

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	high Limit (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	26.32	37	PASS
EGPRS1900 1 Slot	661	1880	26.61	37	PASS
EGPRS1900 1 Slot	810	1909.8	26.61	37	PASS
EGPRS1900 2 Slot	512	1850.2	25.37	37	PASS
EGPRS1900 2 Slot	661	1880	25.12	37	PASS
EGPRS1900 2 Slot	810	1909.8	25.58	37	PASS
EGPRS1900 3 Slot	512	1850.2	23.06	37	PASS
EGPRS1900 3 Slot	661	1880	22.94	37	PASS
EGPRS1900 3 Slot	810	1909.8	23.52	37	PASS
EGPRS1900 4 Slot	512	1850.2	21.33	37	PASS
EGPRS1900 4 Slot	661	1880	21.76	37	PASS
EGPRS1900 4 Slot	810	1909.8	21.74	37	PASS
EGPRS850 1 Slot	128	824.2	25.19	37	PASS
EGPRS850 1 Slot	189	836.4	25.35	37	PASS
EGPRS850 1 Slot	251	848.8	25.21	37	PASS
EGPRS850 2 Slot	128	824.2	24.12	37	PASS
EGPRS850 2 Slot	189	836.4	24.47	37	PASS
EGPRS850 2 Slot	251	848.8	24.17	37	PASS
EGPRS850 3 Slot	128	824.2	22.45	37	PASS
EGPRS850 3 Slot	189	836.4	22.20	37	PASS
EGPRS850 3 Slot	251	848.8	22.42	37	PASS
EGPRS850 4 Slot	128	824.2	21.10	37	PASS
EGPRS850 4 Slot	189	836.4	21.15	37	PASS
EGPRS850 4 Slot	251	848.8	21.02	37	PASS
GPRS1900 1 Slot	512	1850.2	30.22	37	PASS
GPRS1900 1 Slot	661	1880	30.08	37	PASS
GPRS1900 1 Slot	810	1909.8	29.85	37	PASS
GPRS1900 2 Slot	512	1850.2	29.24	37	PASS
GPRS1900 2 Slot	661	1880	29.15	37	PASS
GPRS1900 2 Slot	810	1909.8	28.96	37	PASS
GPRS1900 3 Slot	512	1850.2	27.17	37	PASS
GPRS1900 3 Slot	661	1880	27.15	37	PASS
GPRS1900 3 Slot	810	1909.8	27.06	37	PASS
GPRS1900 4 Slot	512	1850.2	26.03	37	PASS
GPRS1900 4 Slot	661	1880	26.05	37	PASS
GPRS1900 4 Slot	810	1909.8	26.00	37	PASS
GPRS850 1 Slot	128	824.2	32.84	37	PASS
GPRS850 1 Slot	189	836.4	32.81	37	PASS
GPRS850 1 Slot	251	848.8	32.88	37	PASS
GPRS850 2 Slot	128	824.2	31.88	37	PASS
GPRS850 2 Slot	189	836.4	31.88	37	PASS

GPRS850 2 Slot	251	848.8	31.90	37	PASS
GPRS850 3 Slot	128	824.2	29.82	37	PASS
GPRS850 3 Slot	189	836.4	29.83	37	PASS
GPRS850 3 Slot	251	848.8	29.86	37	PASS
GPRS850 4 Slot	128	824.2	28.69	37	PASS
GPRS850 4 Slot	189	836.4	28.72	37	PASS
GPRS850 4 Slot	251	848.8	28.76	37	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	6.57	13	PASS
EGPRS1900	661	1880	6.47	13	PASS
EGPRS1900	810	1909.8	5.97	13	PASS
EGPRS850	128	824.2	10.05	13	PASS
EGPRS850	189	836.4	10.33	13	PASS
EGPRS850	251	848.8	10.25	13	PASS


EGPRS1900 Channel=512

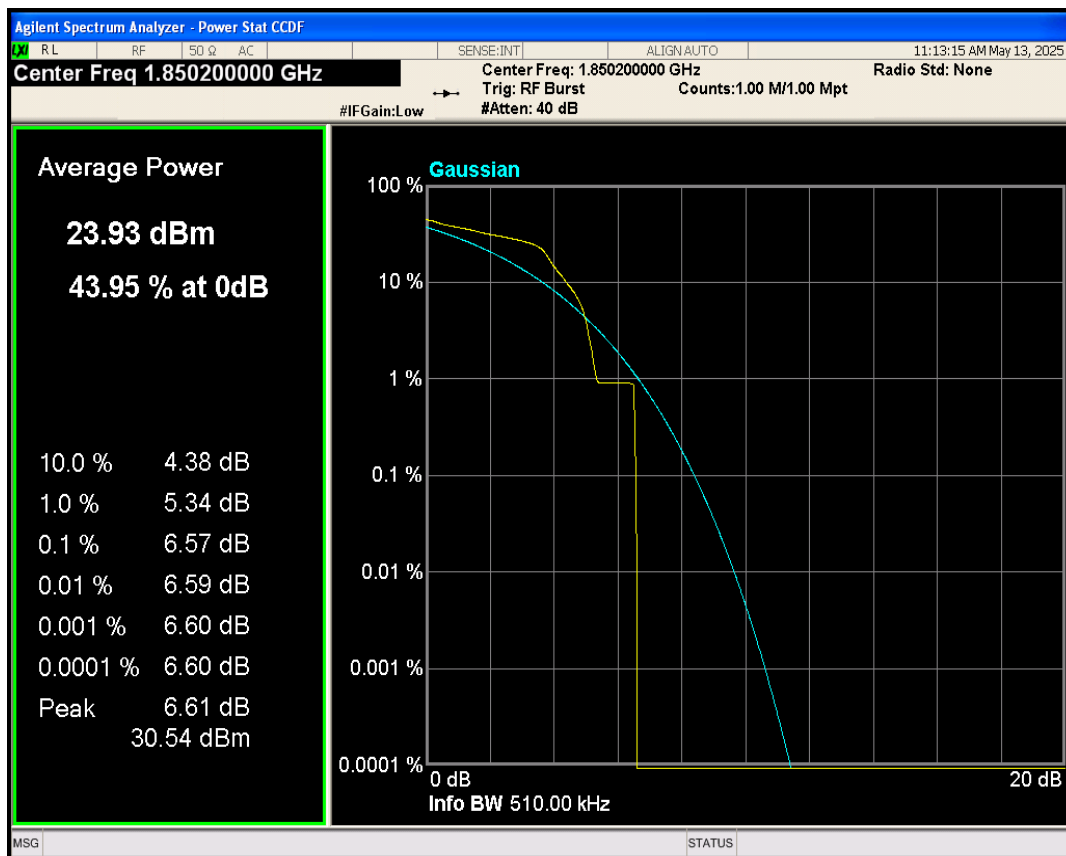


EGPRS1900 Channel=661

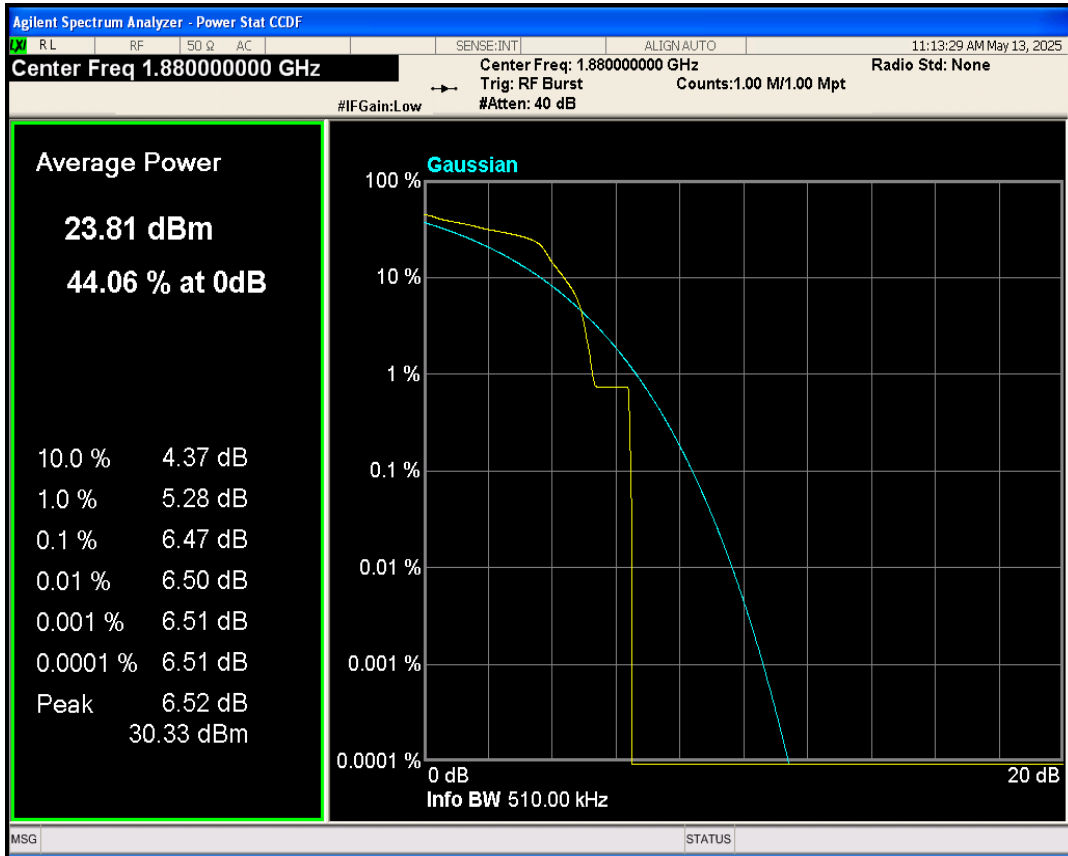


EGPRS1900 Channel=810

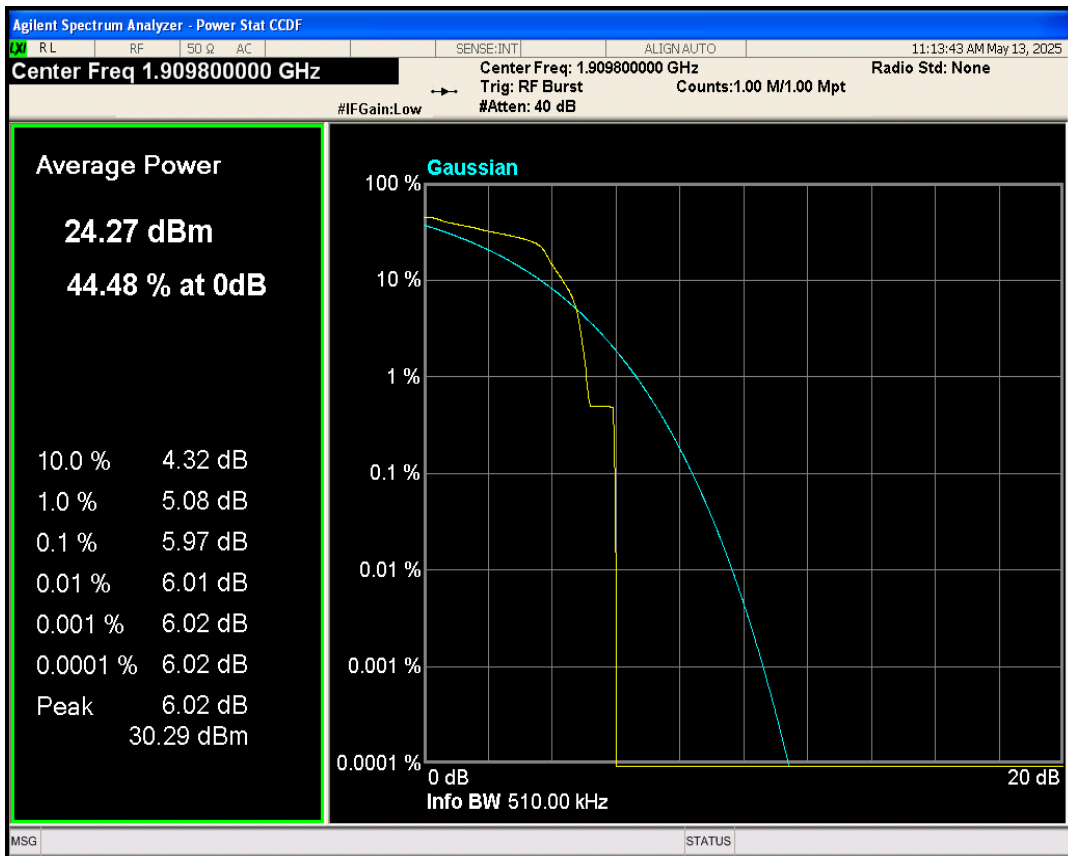


EGPRS850 Channel=128

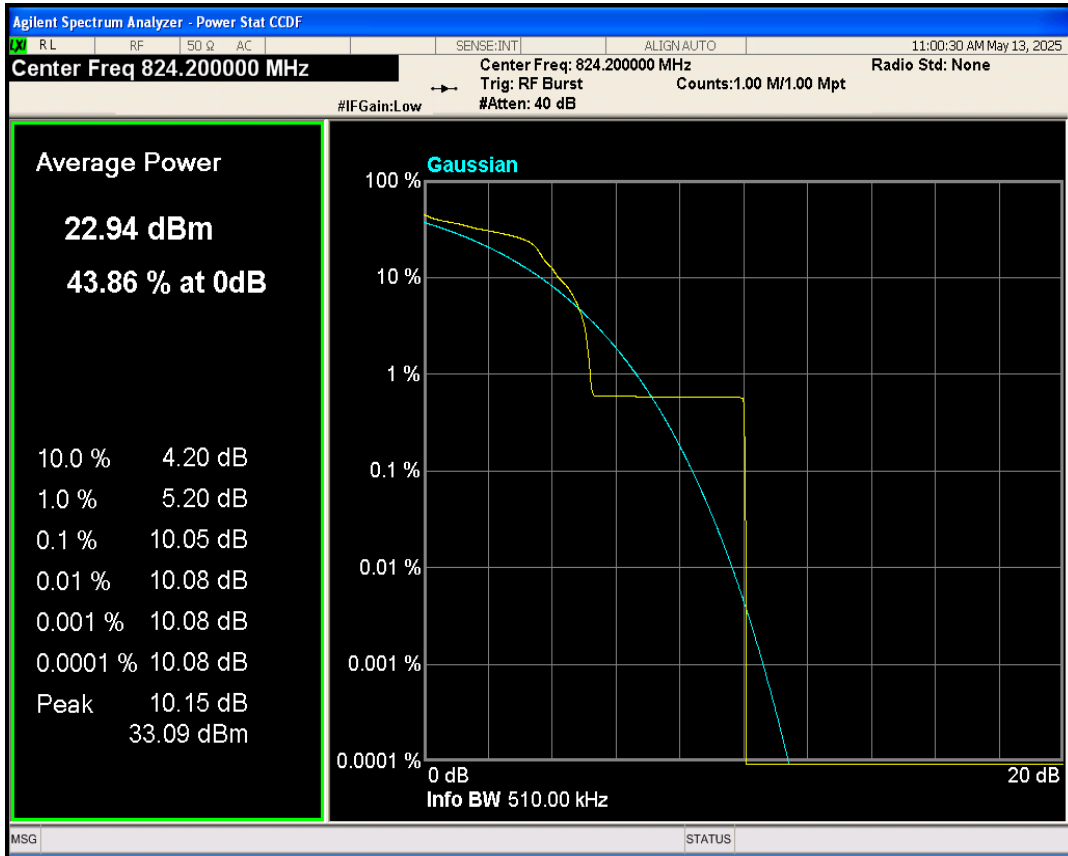

EGPRS850 Channel=189

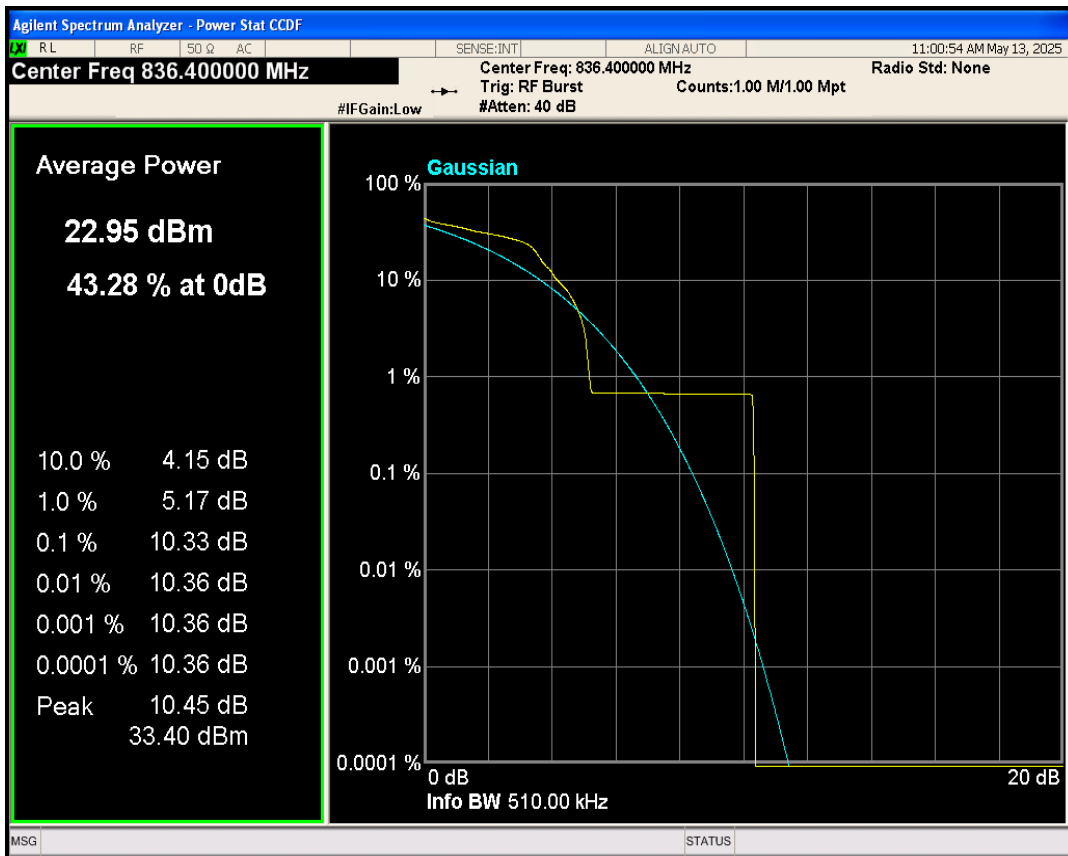


EGPRS850 Channel=251

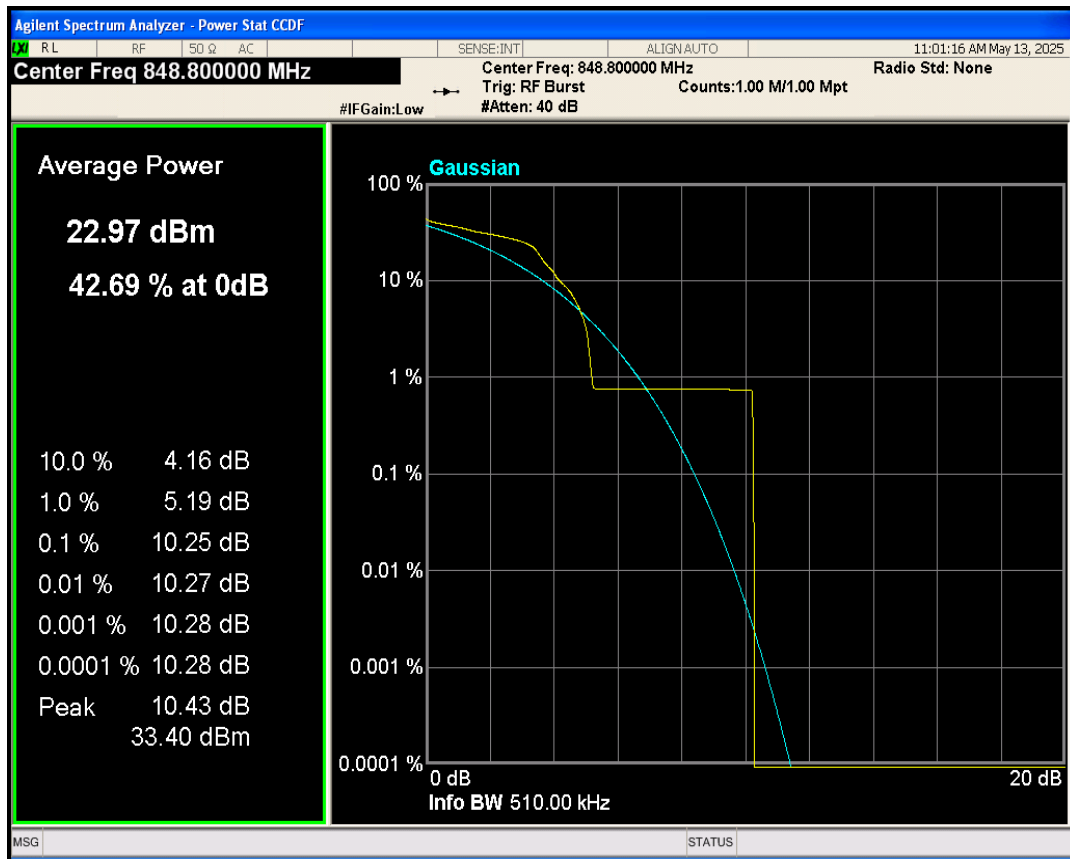


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	251.459	317.480	PASS
EGPRS1900	661	1880	249.206	314.071	PASS
EGPRS1900	810	1909.8	252.593	321.901	PASS
EGPRS850	128	824.2	248.254	305.436	PASS
EGPRS850	189	836.4	256.013	310.821	PASS
EGPRS850	251	848.8	253.966	309.352	PASS


EGPRS1900 Channel=512

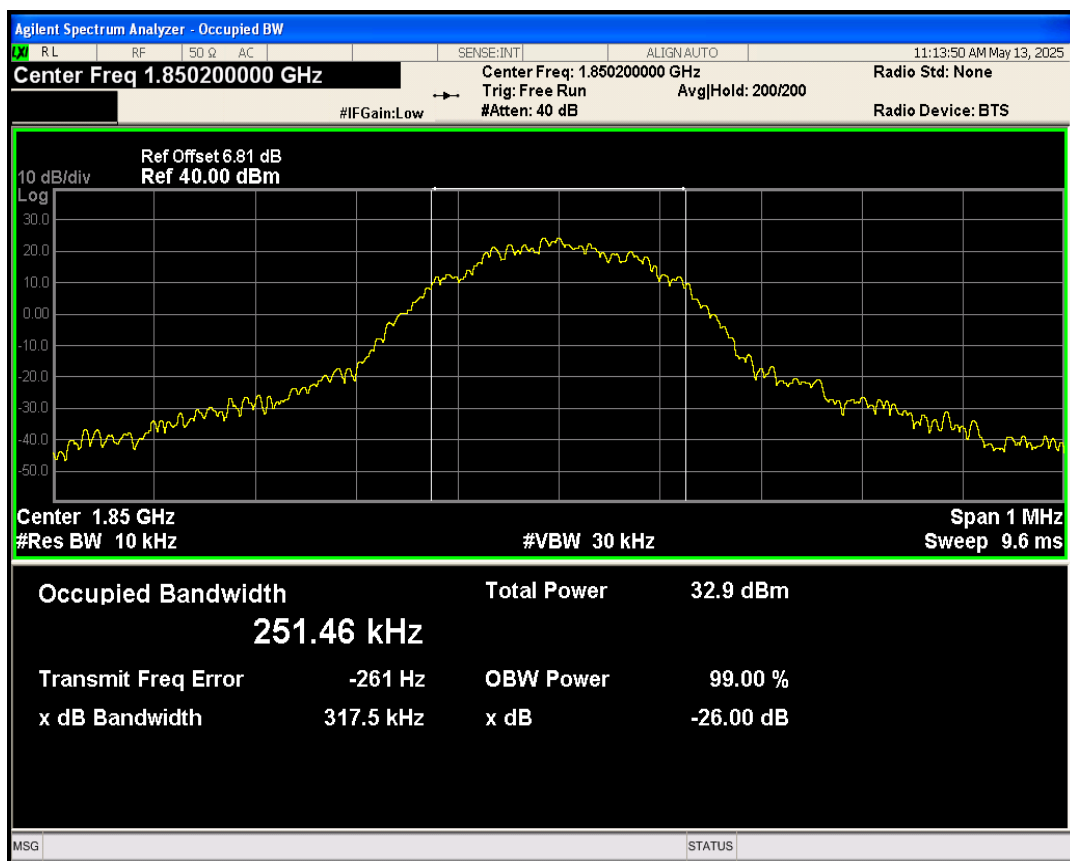


EGPRS1900 Channel=661

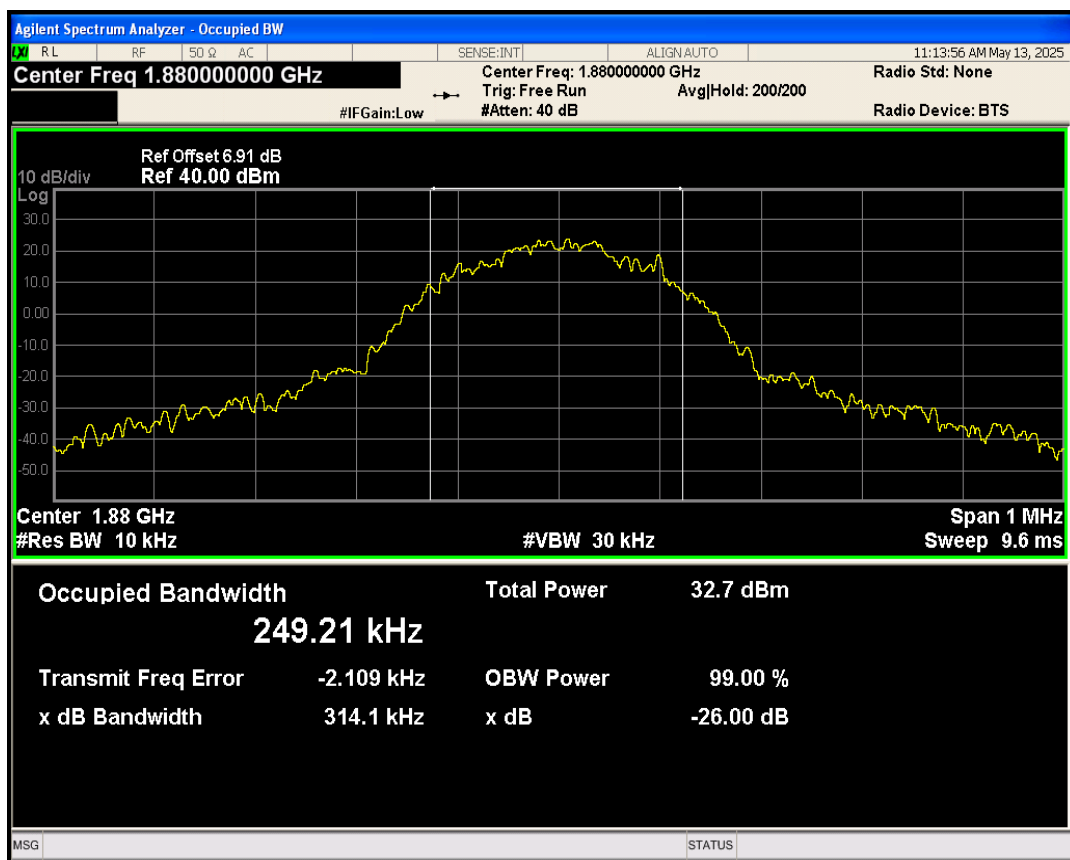


EGPRS1900 Channel=810

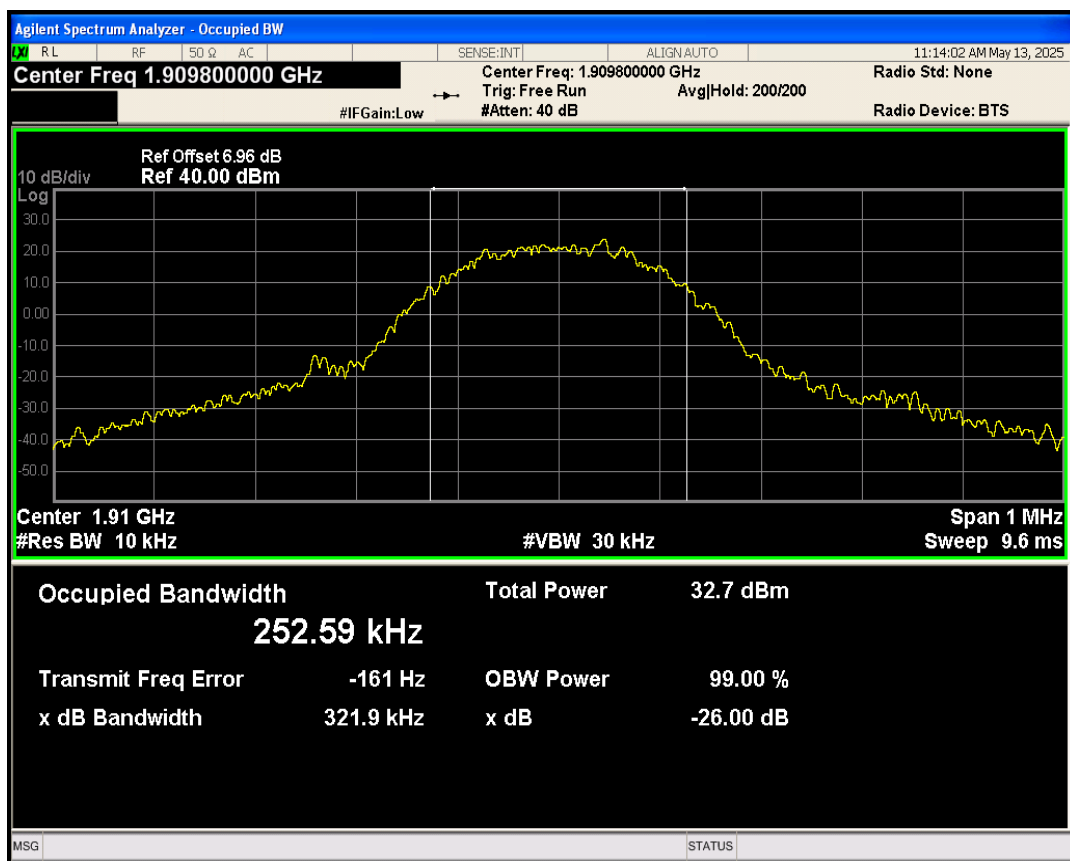


EGPRS850 Channel=128

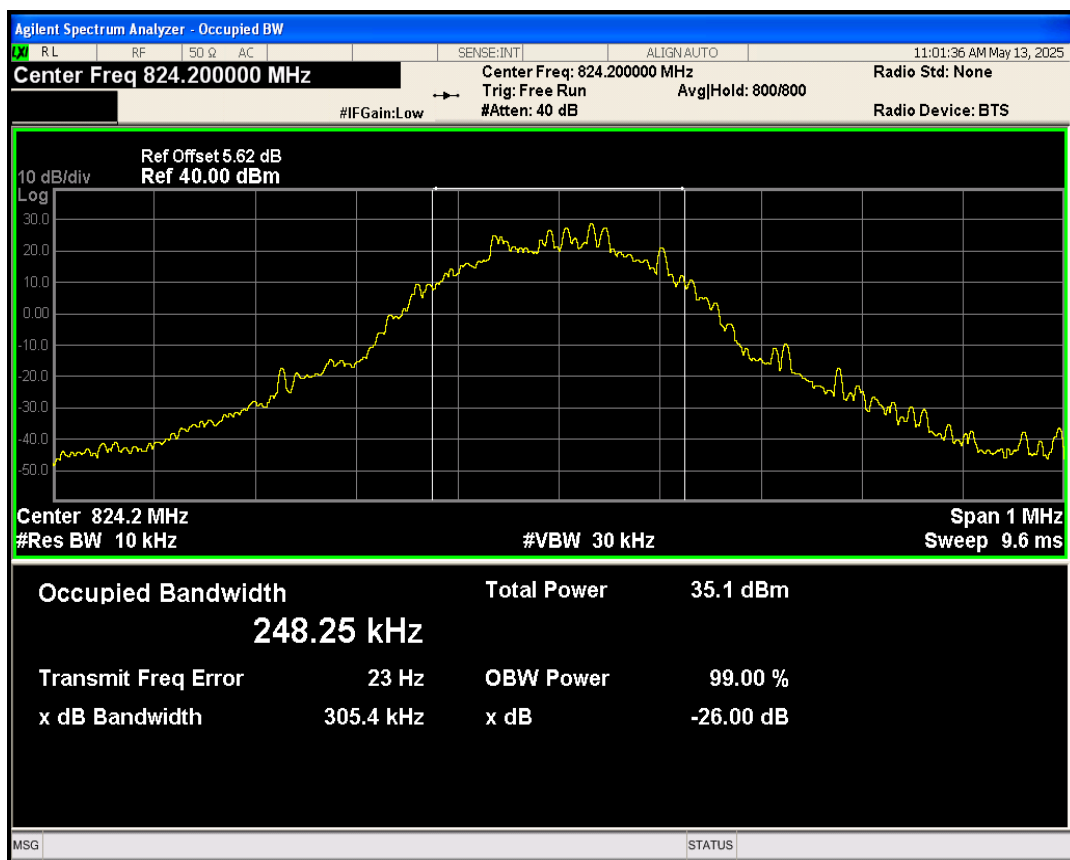

EGPRS850 Channel=189

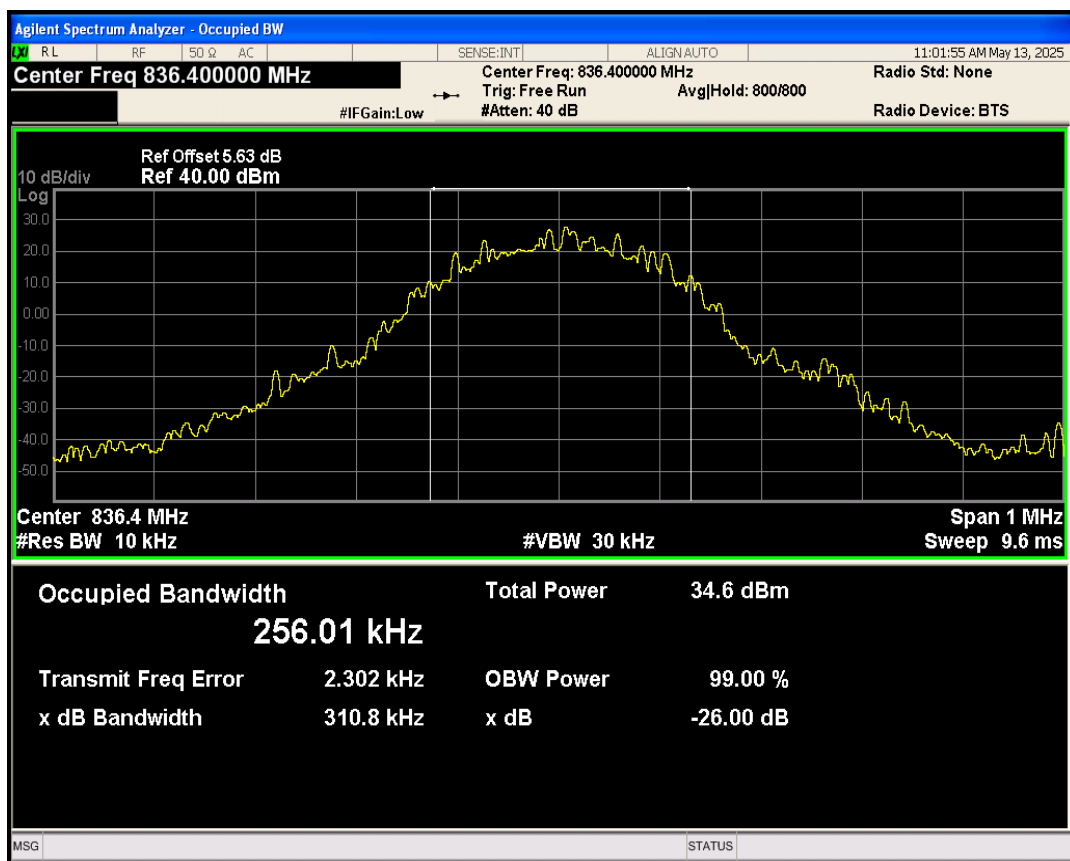


EGPRS850 Channel=251

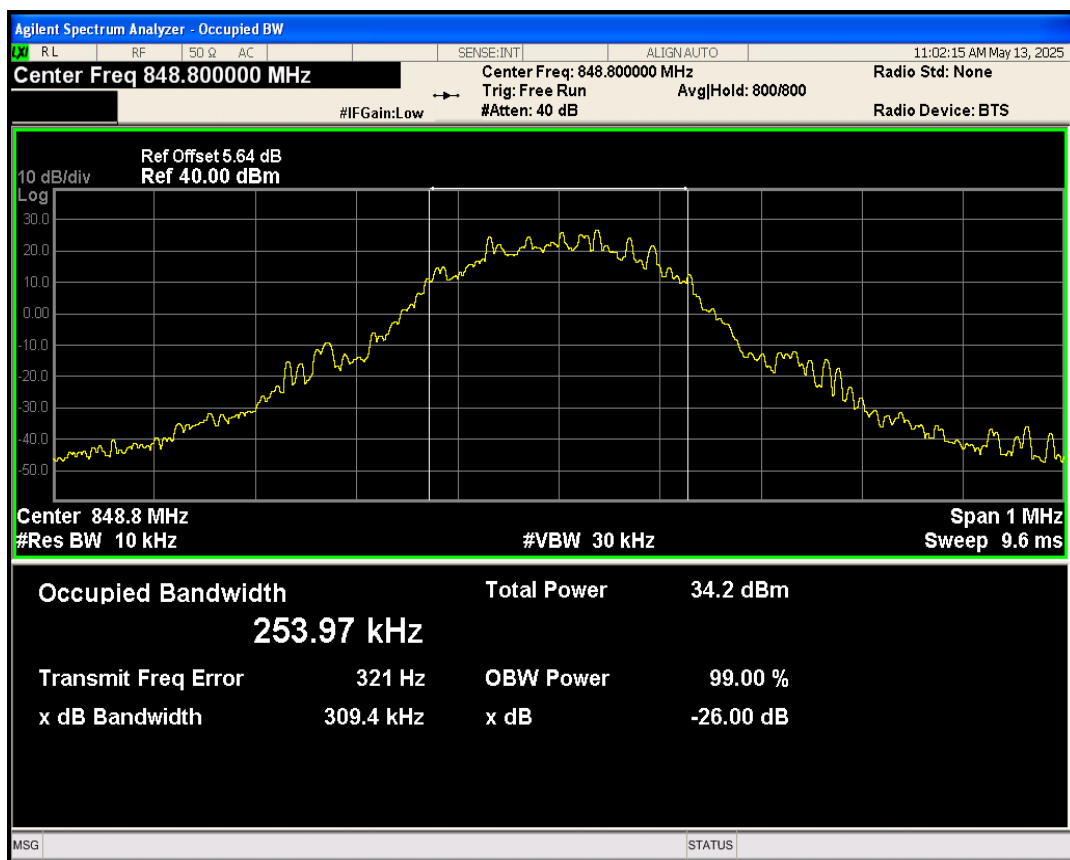


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.96	-38.24	-13	PASS
EGPRS1900	810	1909.8	1910.00	-34.20	-13	PASS
EGPRS850	128	824.2	824.00	-35.19	-13	PASS
EGPRS850	251	848.8	849.02	-37.11	-13	PASS


EGPRS1900 Channel=512

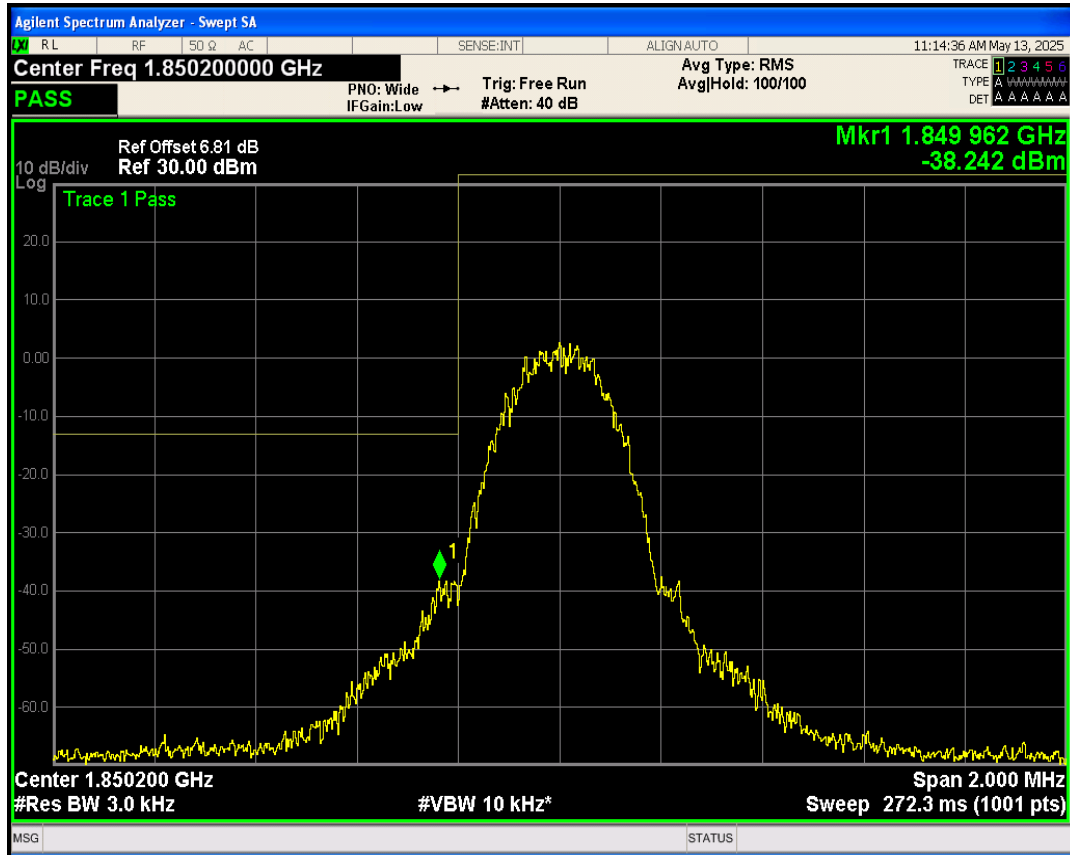


EGPRS1900 Channel=810

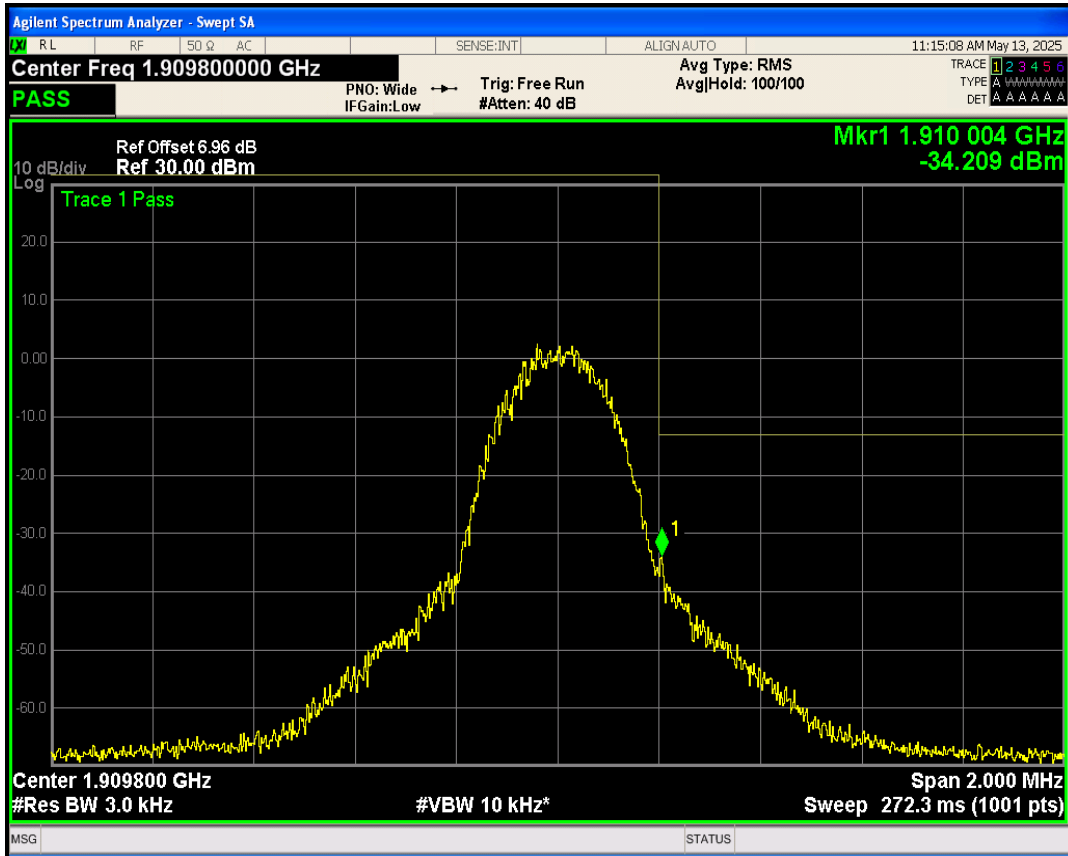

EGPRS850 Channel=128

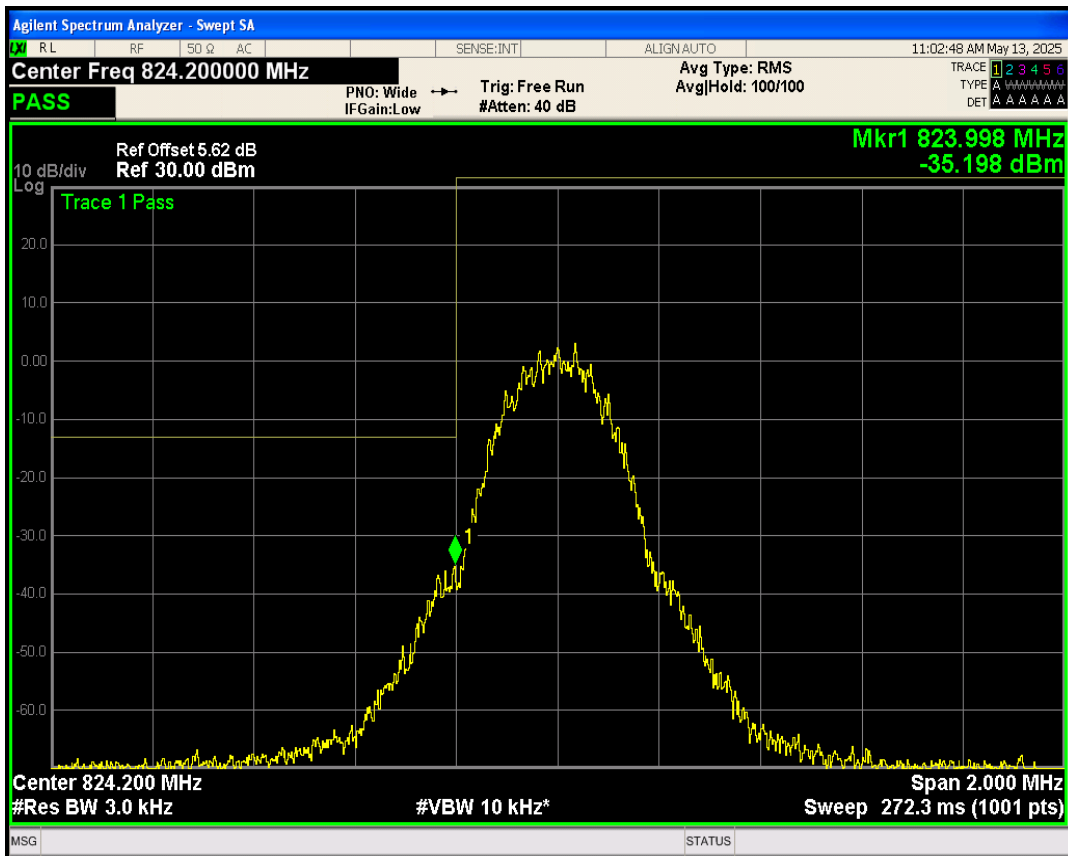


EGPRS850 Channel=251

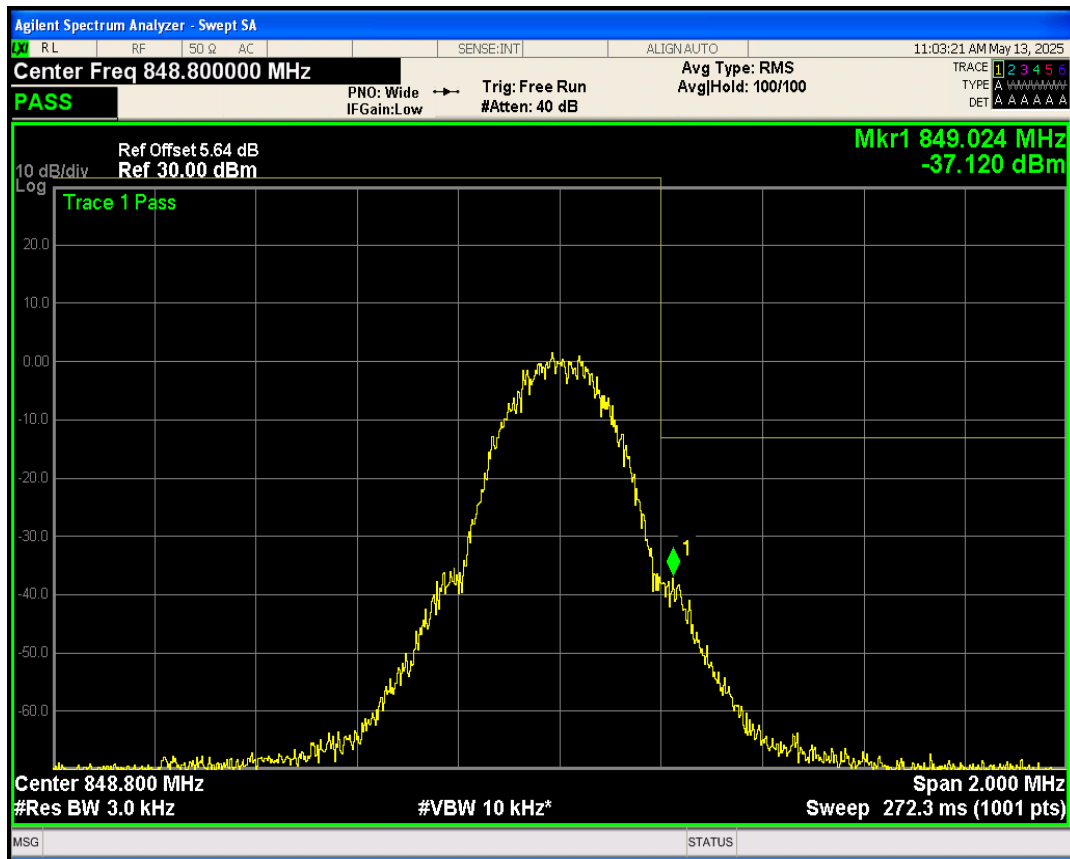


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25973.91	-20.45	-13	PASS
EGPRS1900	661	1880	25140.10	-20.77	-13	PASS
EGPRS1900	810	1909.8	25484.88	-20.72	-13	PASS
EGPRS850	128	824.2	25635.09	-22.08	-13	PASS
EGPRS850	189	836.4	25706.56	-21.89	-13	PASS
EGPRS850	251	848.8	25615.24	-21.30	-13	PASS


EGPRS1900 Channel=512

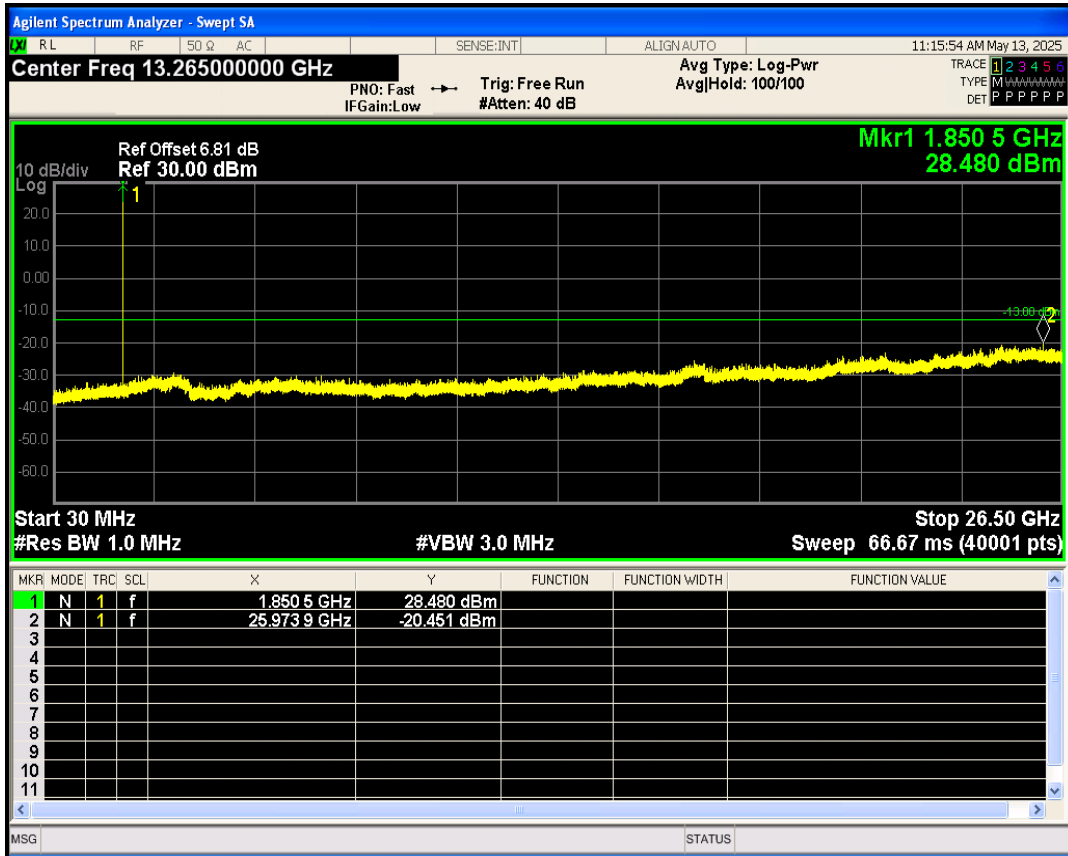


EGPRS1900 Channel=661

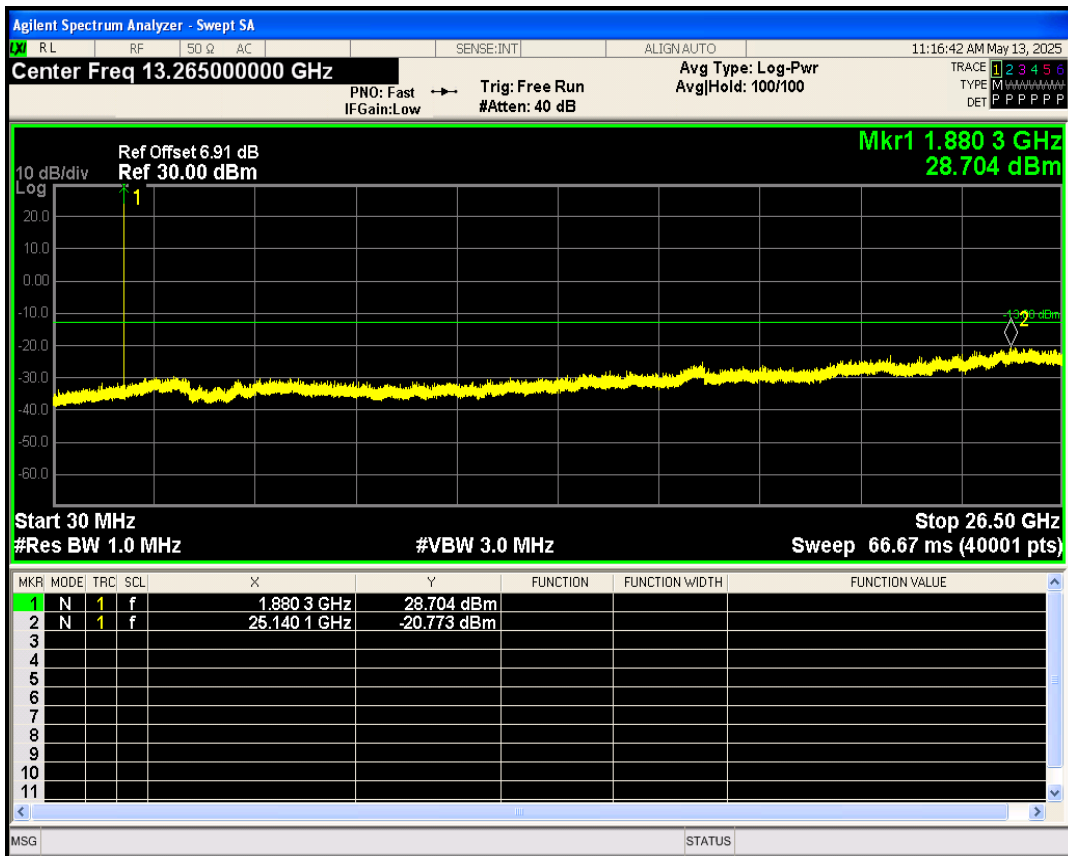


EGPRS1900 Channel=810

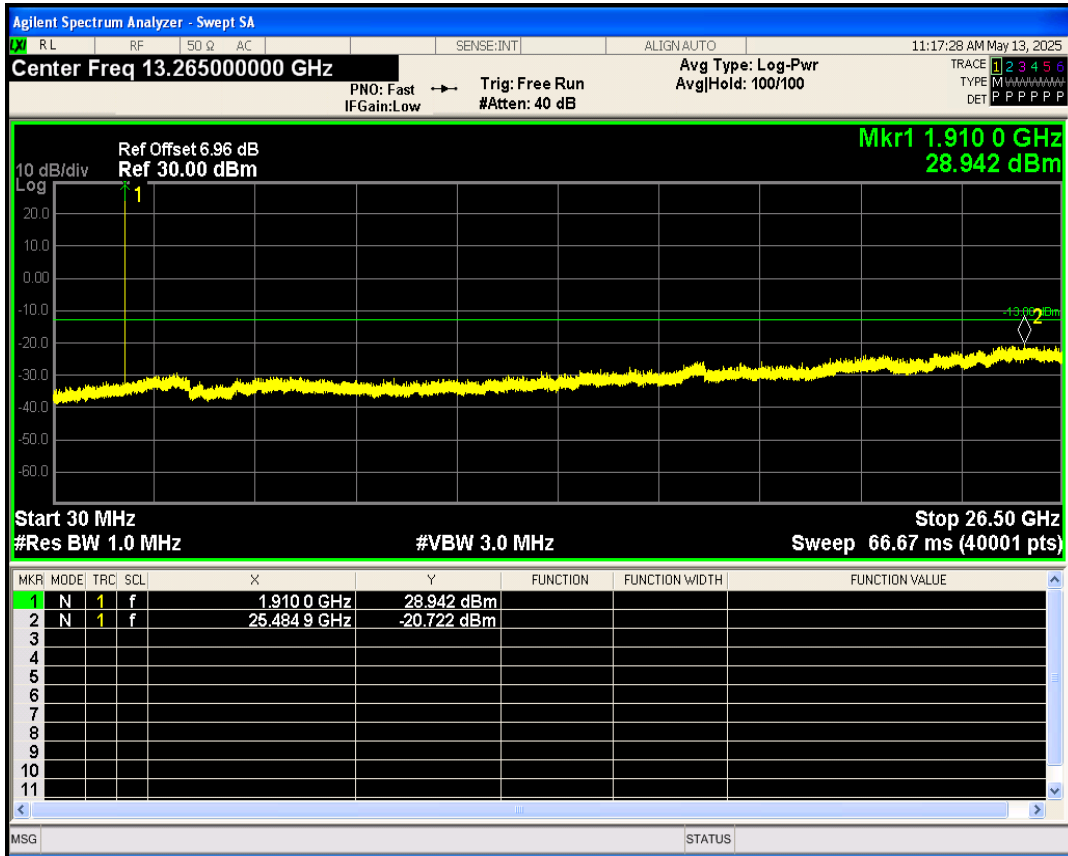


EGPRS850 Channel=128

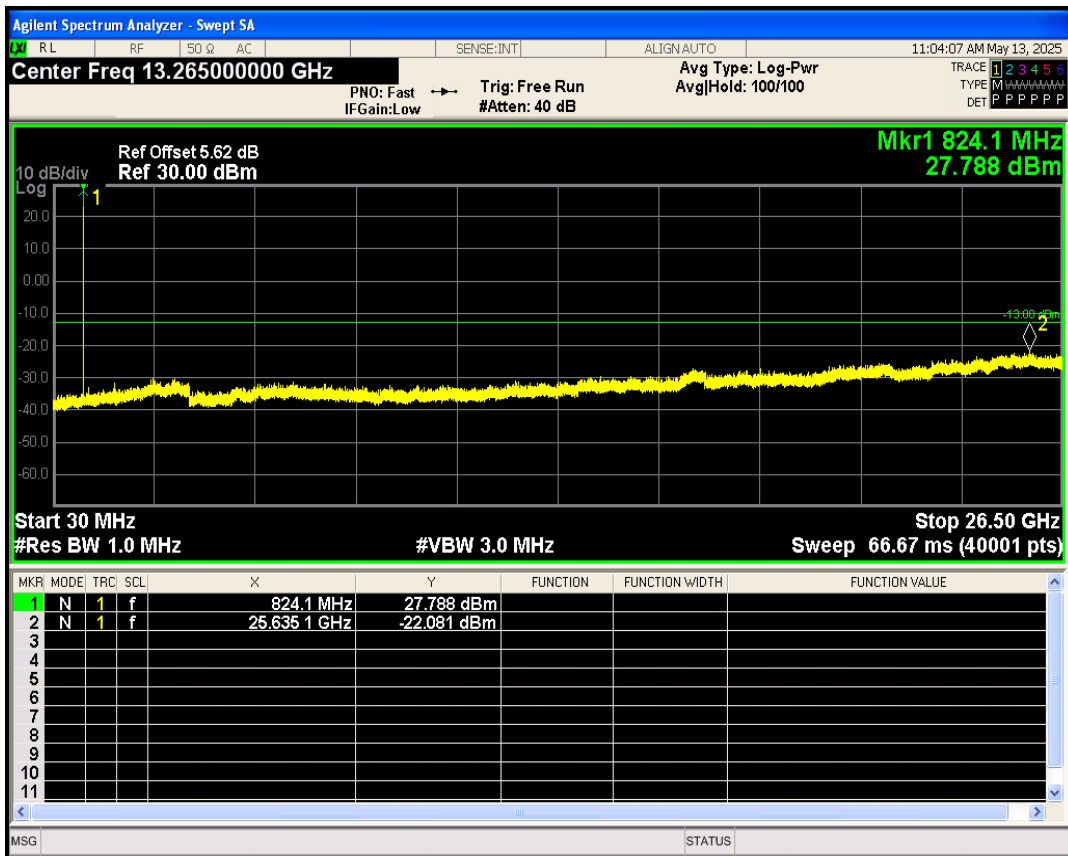

EGPRS850 Channel=189

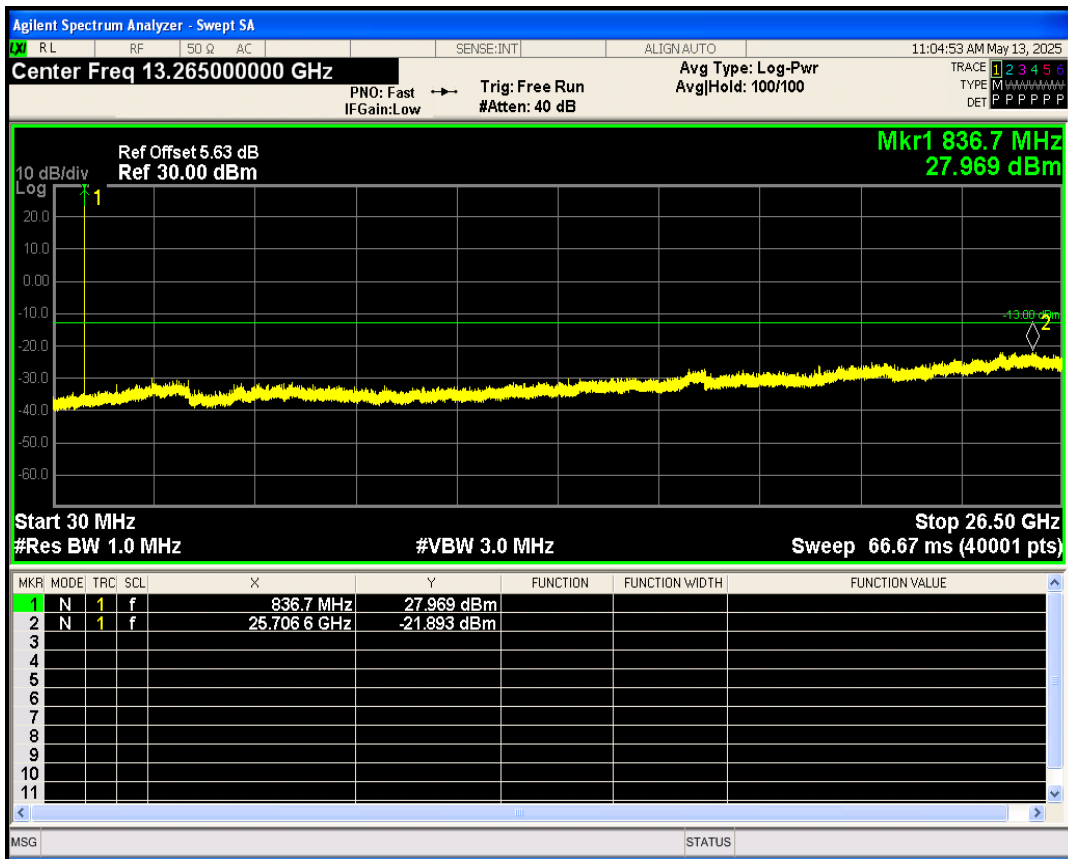

EGPRS850 Channel=251

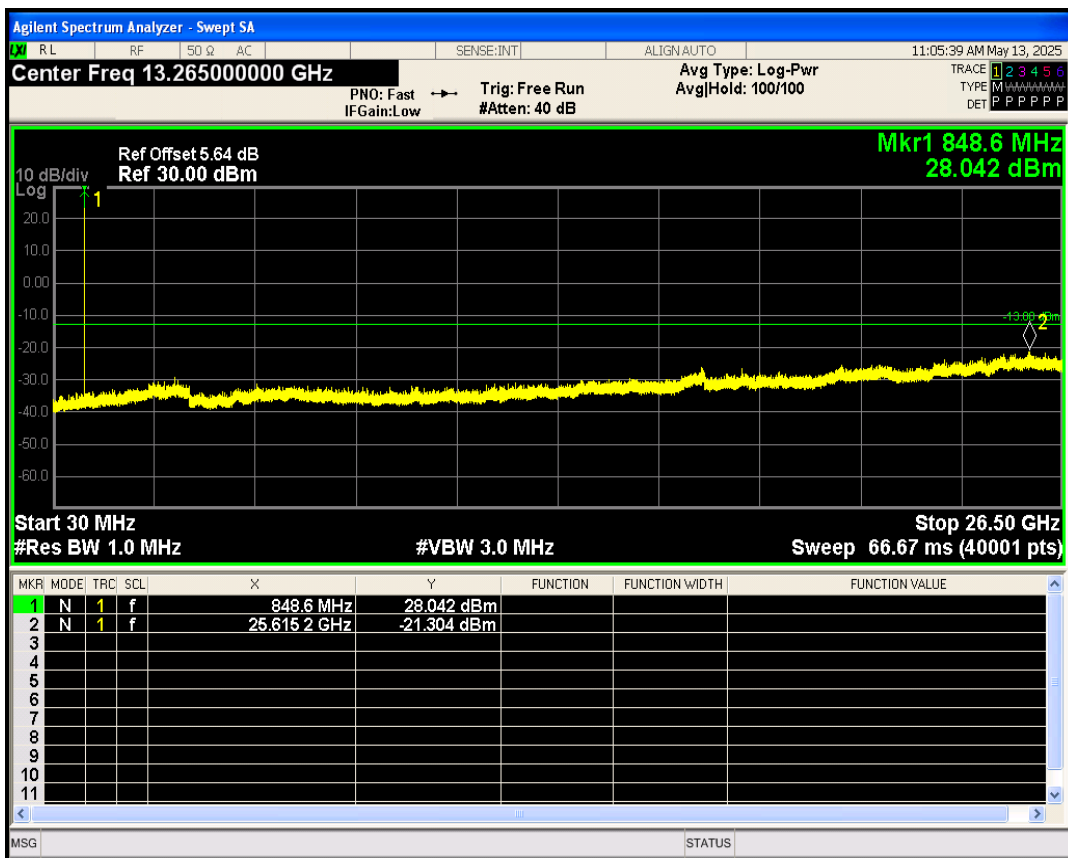


08 Frequency stability

Band	Channel	Frequency (MHz)	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
GPRS1900	661	1880	-13.14034	-0.01	-2.500	2.5	PASS
GPRS850	189	836.4	-8.16832	-0.01	-2.500	2.5	PASS


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.70	13	PASS
GPRS1900	661	1880	2.70	13	PASS
GPRS1900	810	1909.8	2.70	13	PASS
GPRS850	128	824.2	2.66	13	PASS
GPRS850	189	836.4	2.66	13	PASS
GPRS850	251	848.8	2.67	13	PASS


GPRS1900 Channel=512

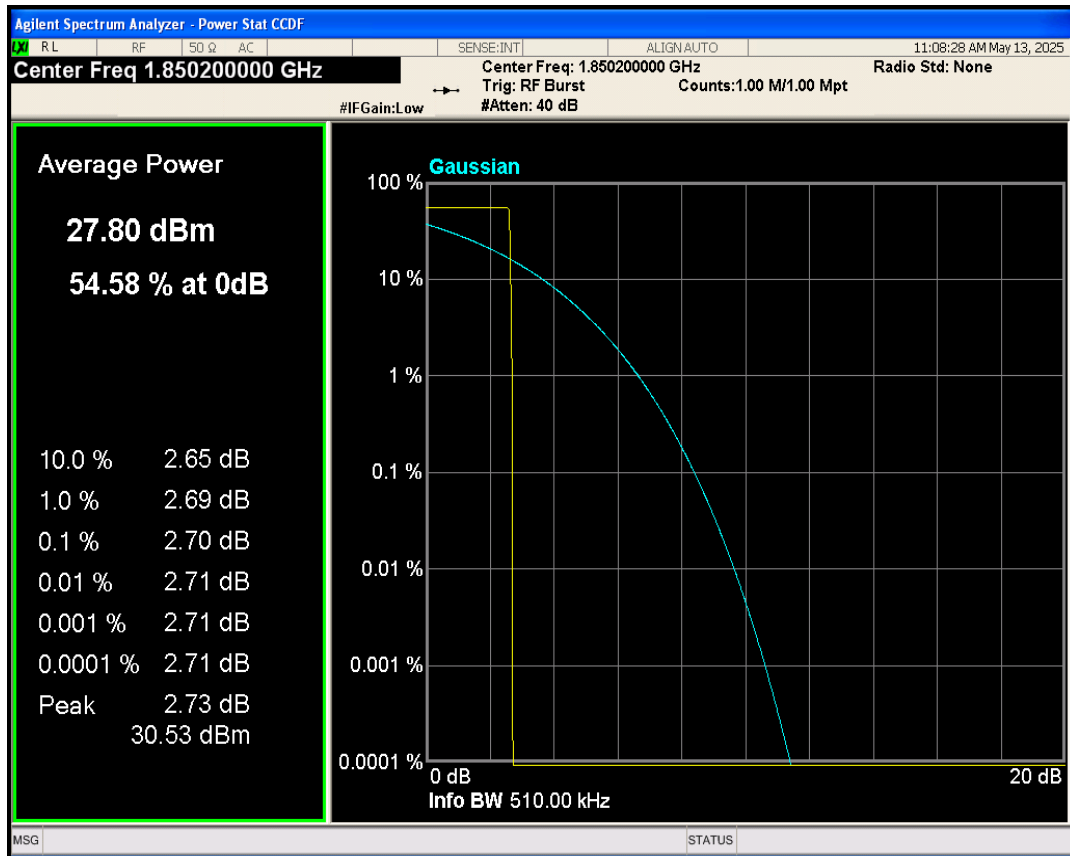


GPRS1900 Channel=661

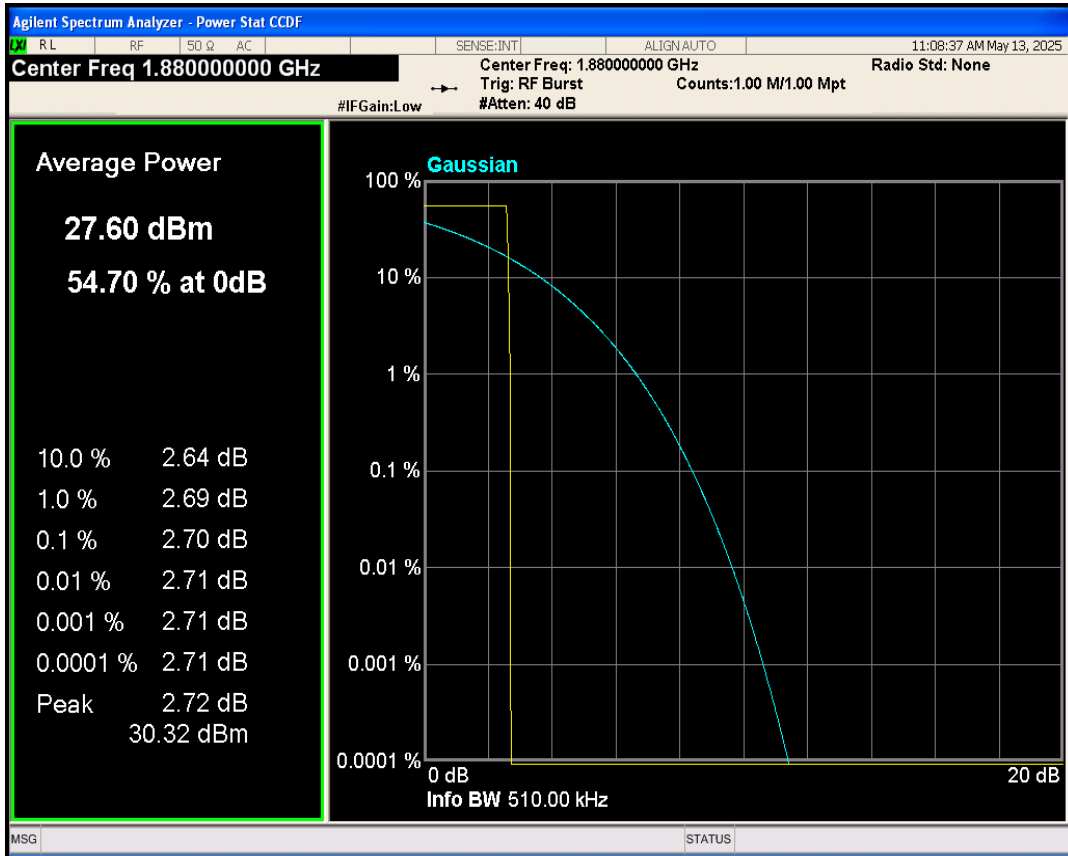


GPRS1900 Channel=810

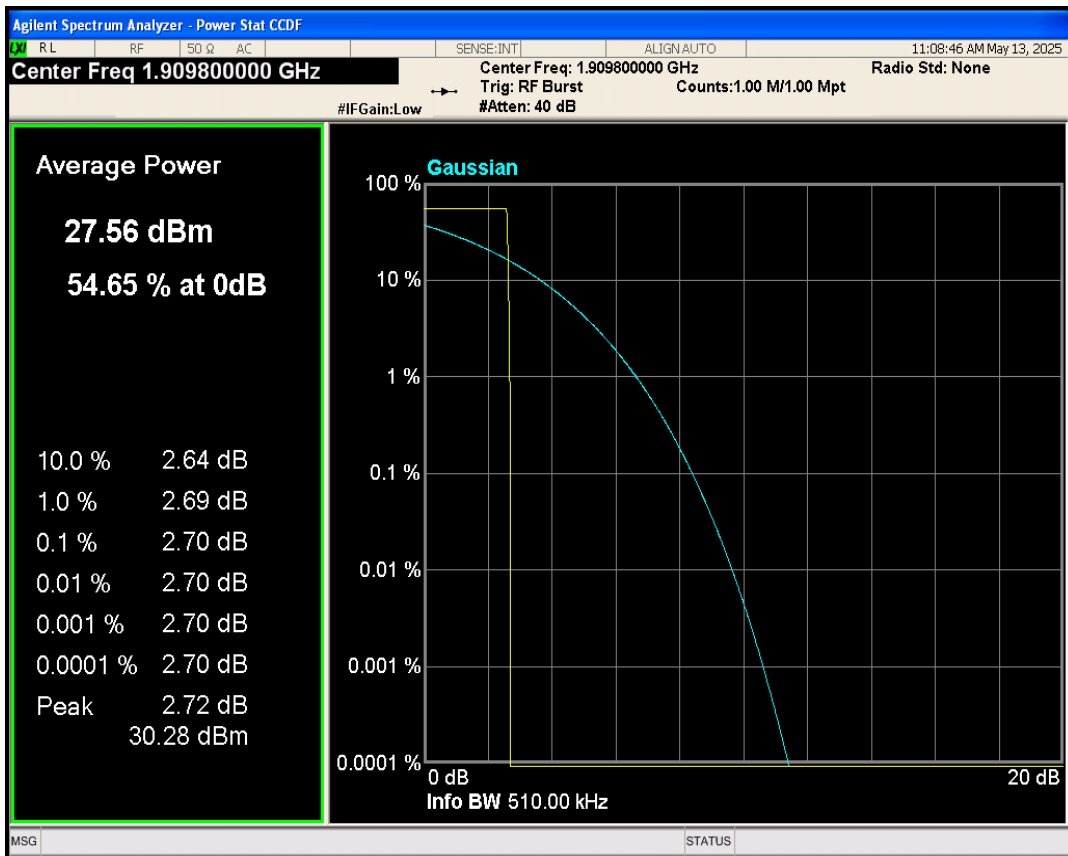


GPRS850 Channel=128

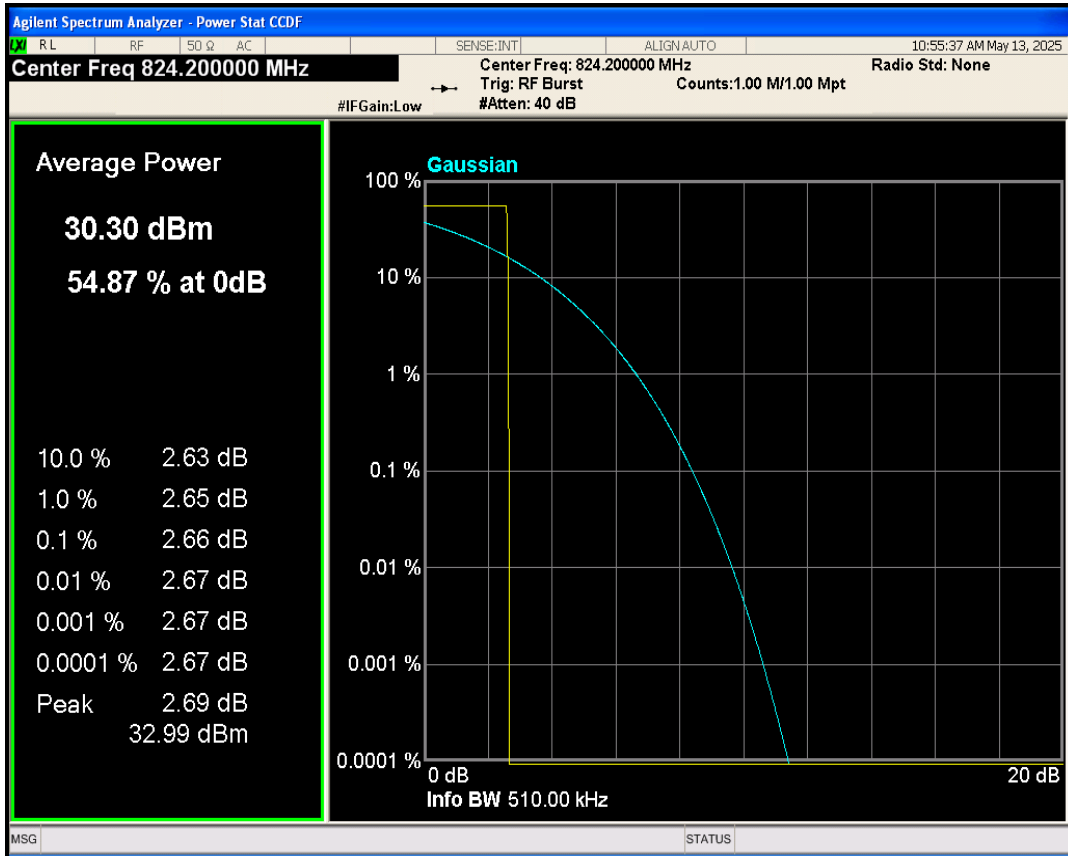

GPRS850 Channel=189

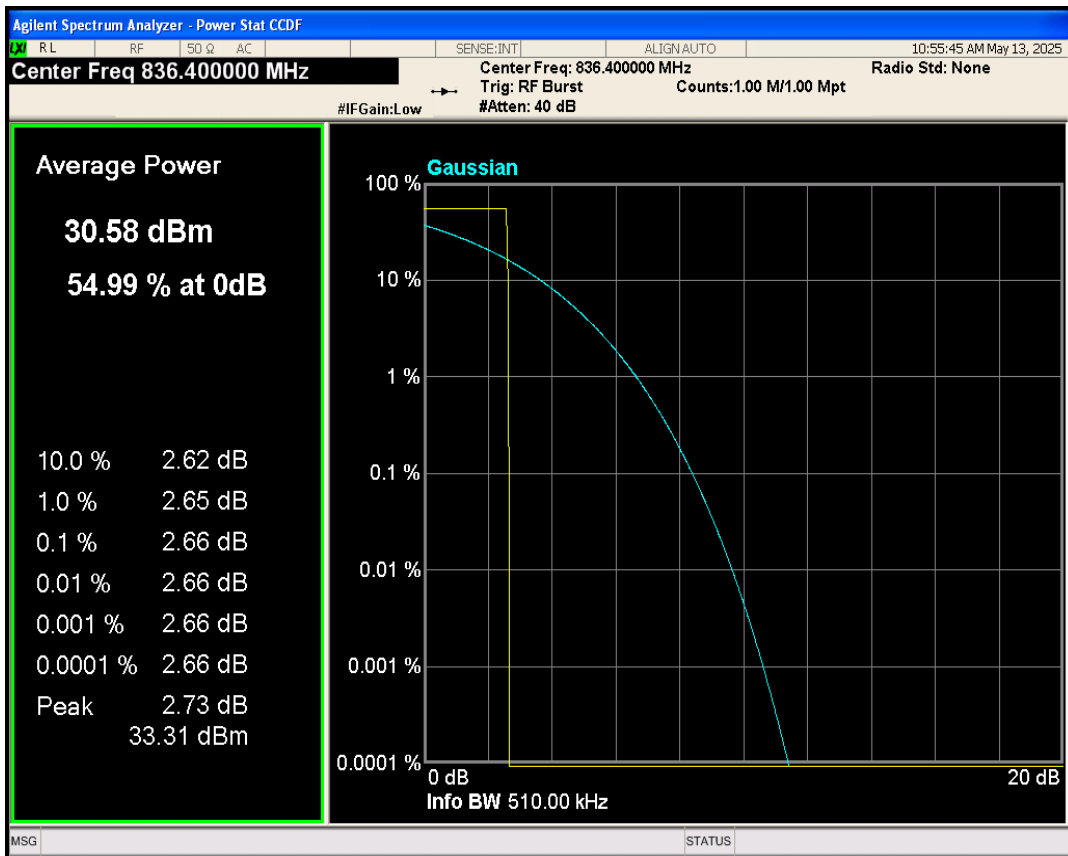


GPRS850 Channel=251

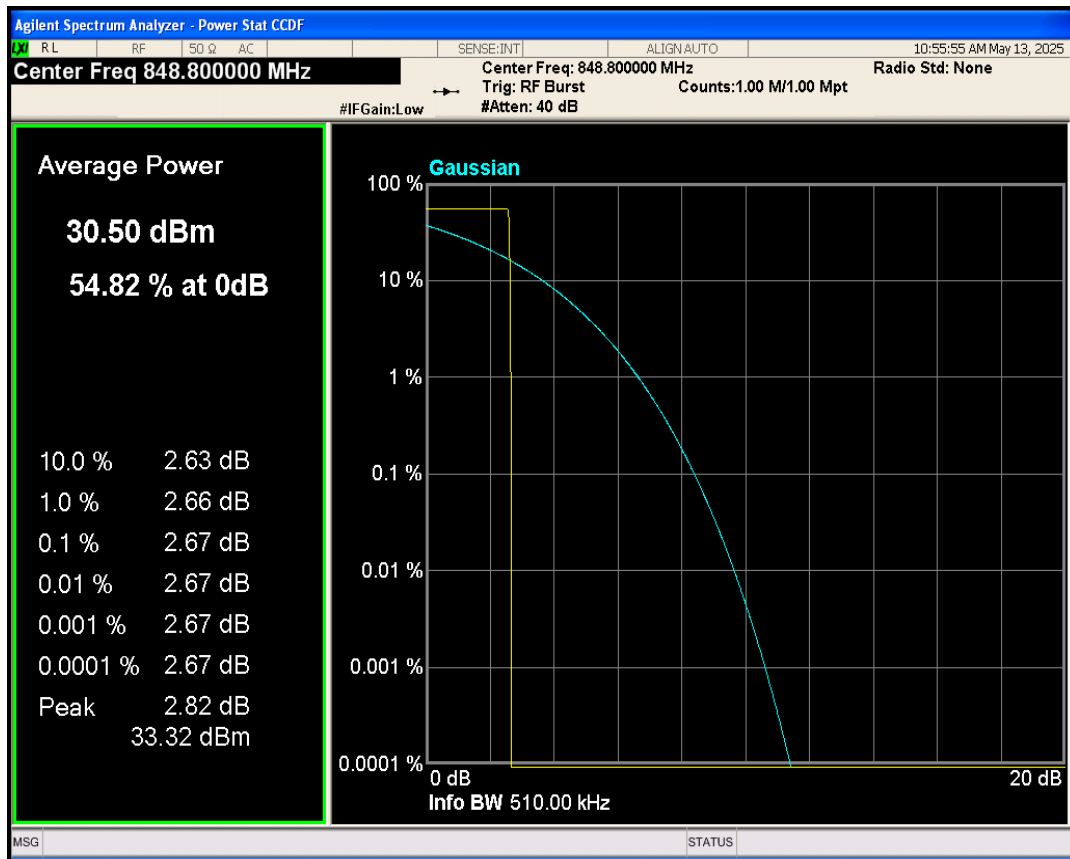


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	242.078	313.306	PASS
GPRS1900	661	1880	244.033	323.099	PASS
GPRS1900	810	1909.8	249.939	317.020	PASS
GPRS850	128	824.2	250.291	315.322	PASS
GPRS850	189	836.4	246.517	318.326	PASS
GPRS850	251	848.8	242.530	311.572	PASS


GPRS1900 Channel=512

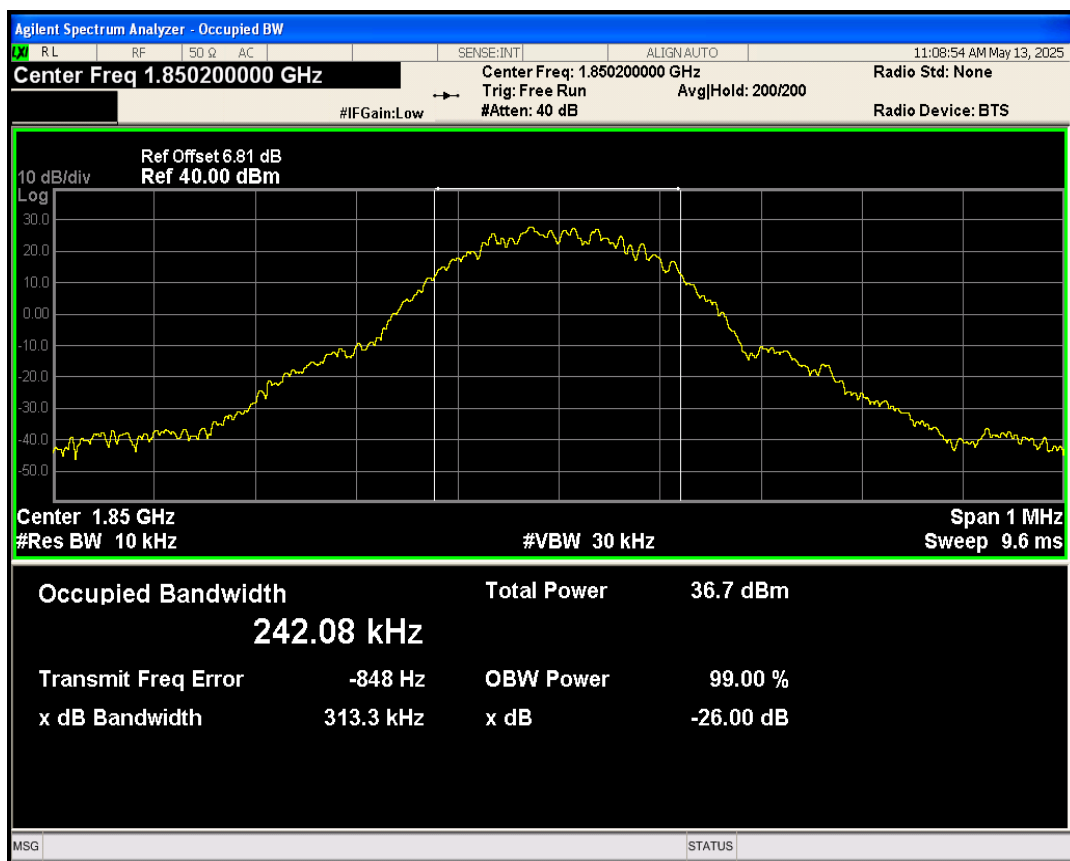


GPRS1900 Channel=661

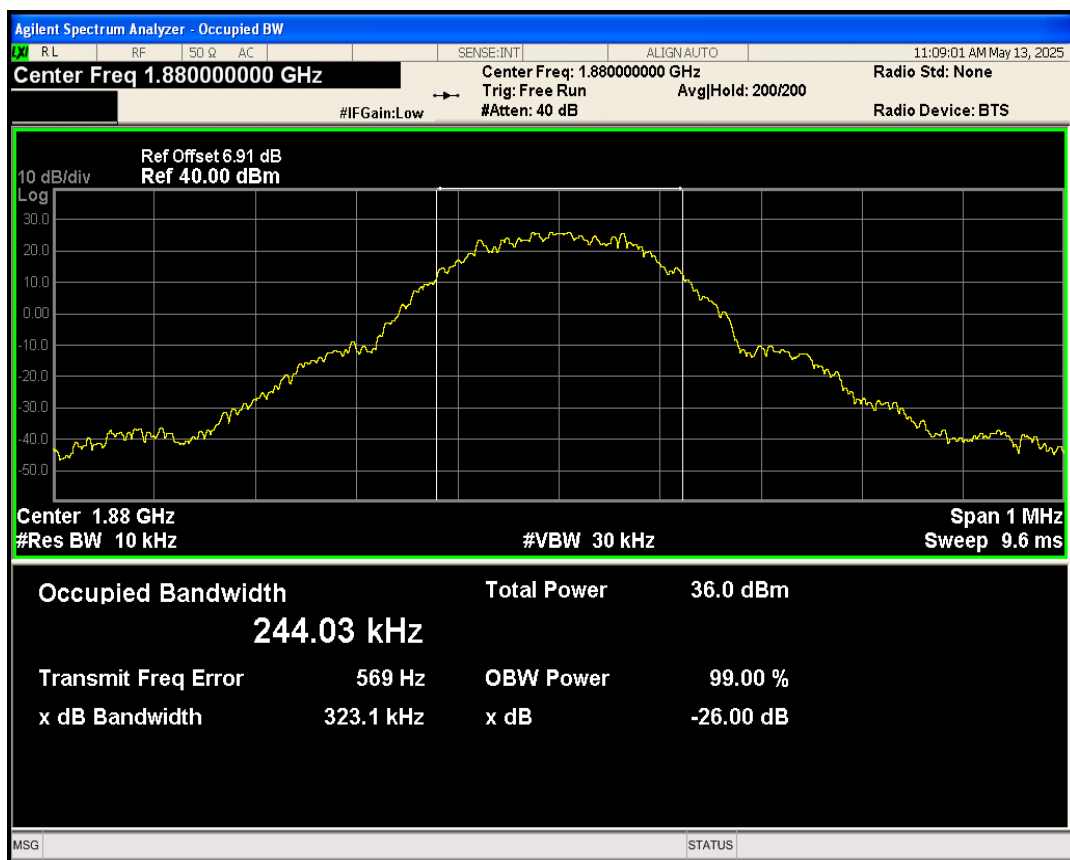


GPRS1900 Channel=810

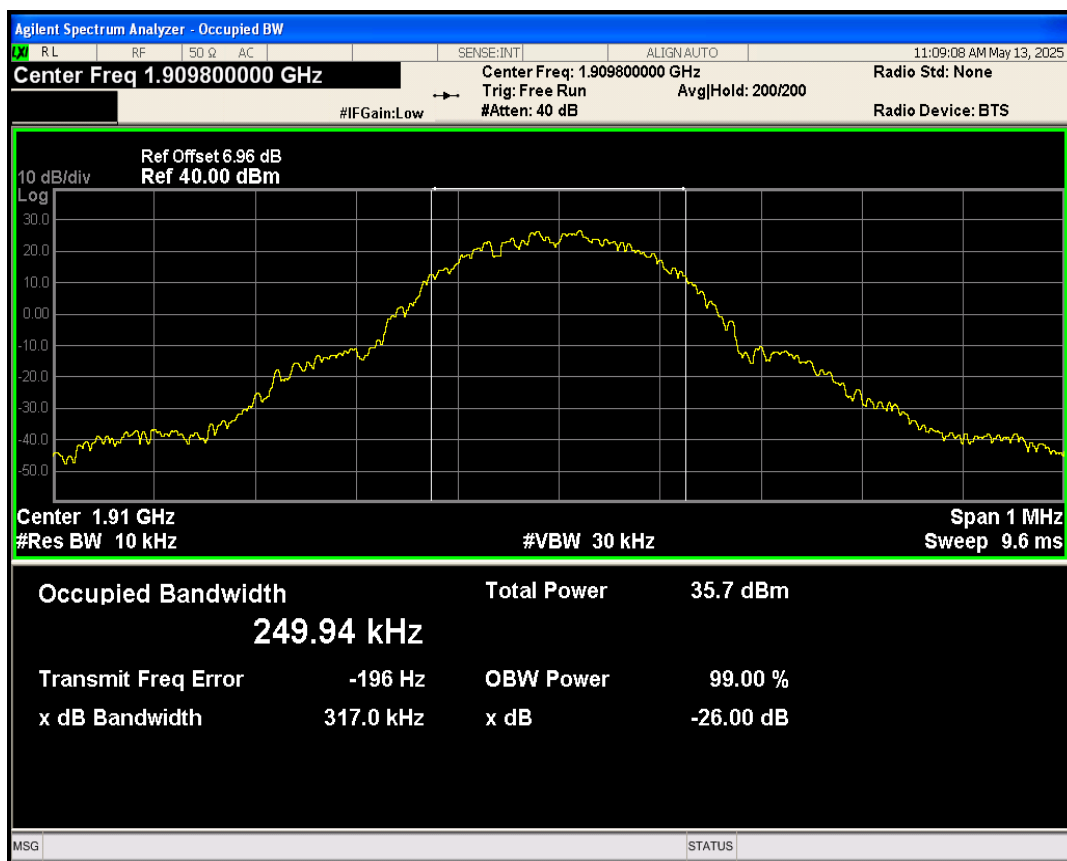


GPRS850 Channel=128

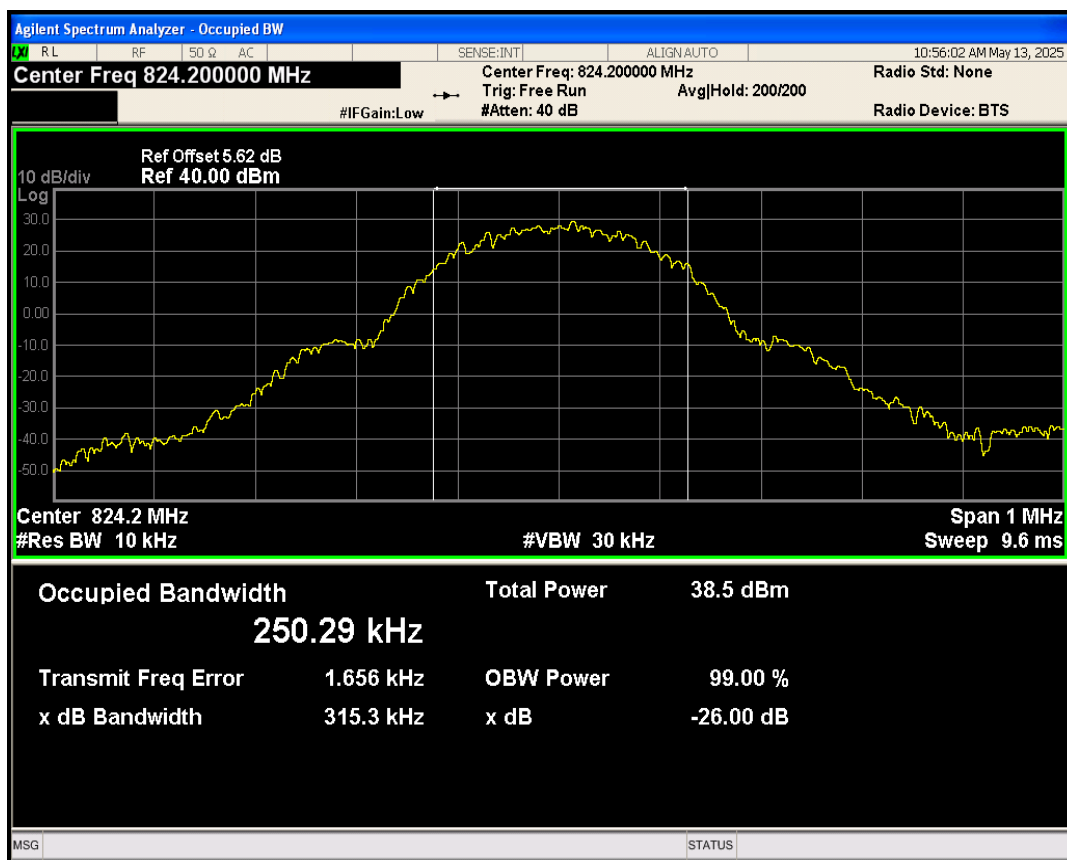

GPRS850 Channel=189

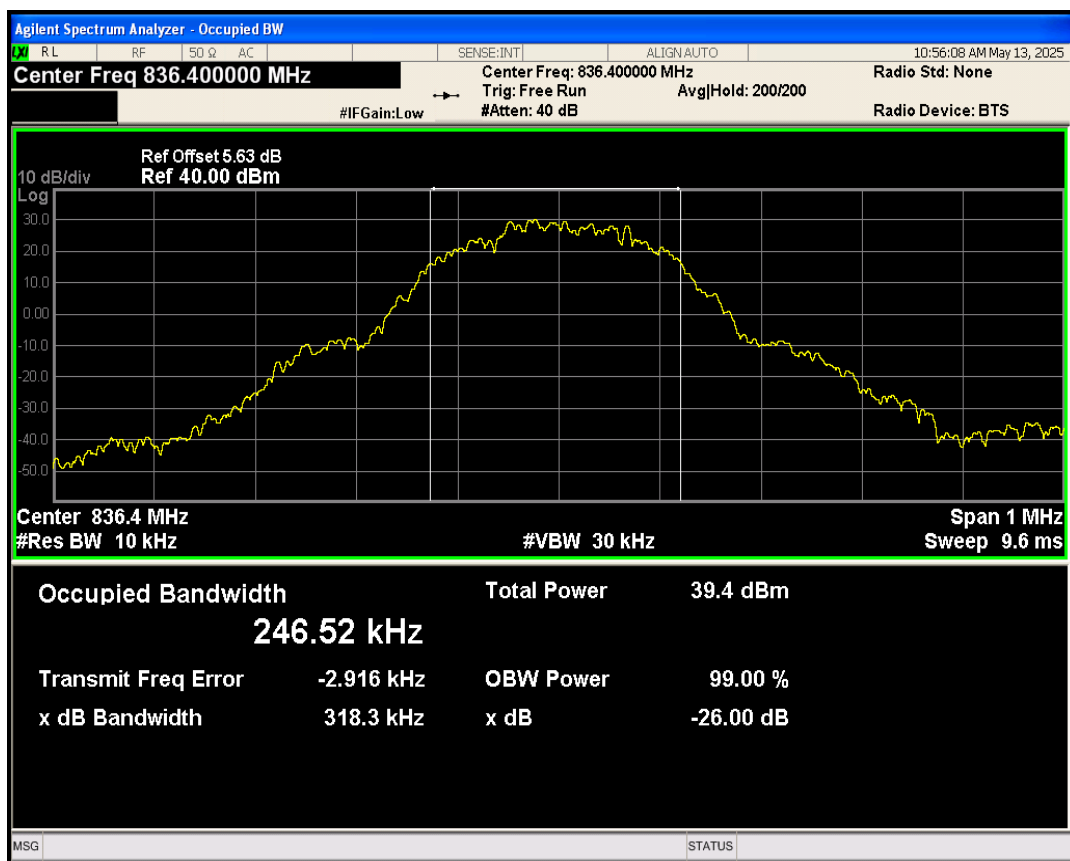


GPRS850 Channel=251

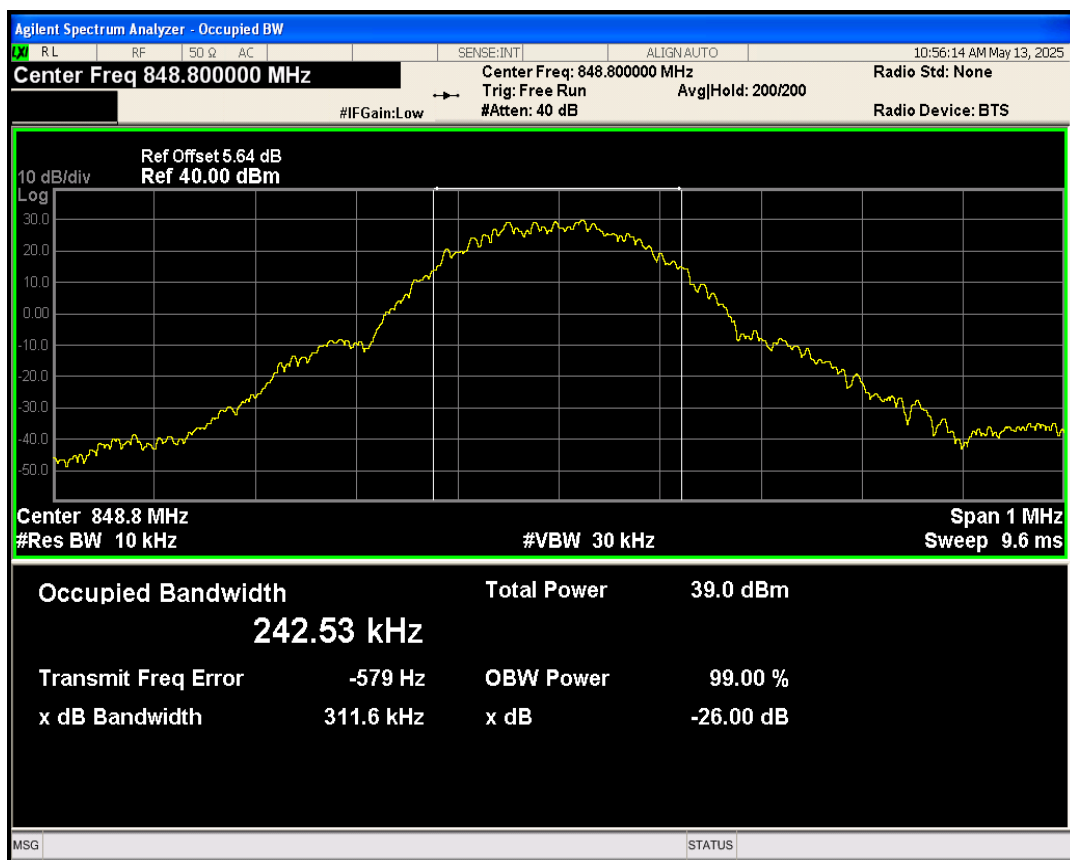


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-29.87	-13	PASS
GPRS1900	810	1909.8	1910.01	-31.85	-13	PASS
GPRS850	128	824.2	823.98	-26.66	-13	PASS
GPRS850	251	848.8	849.02	-27.45	-13	PASS


GPRS1900 Channel=512

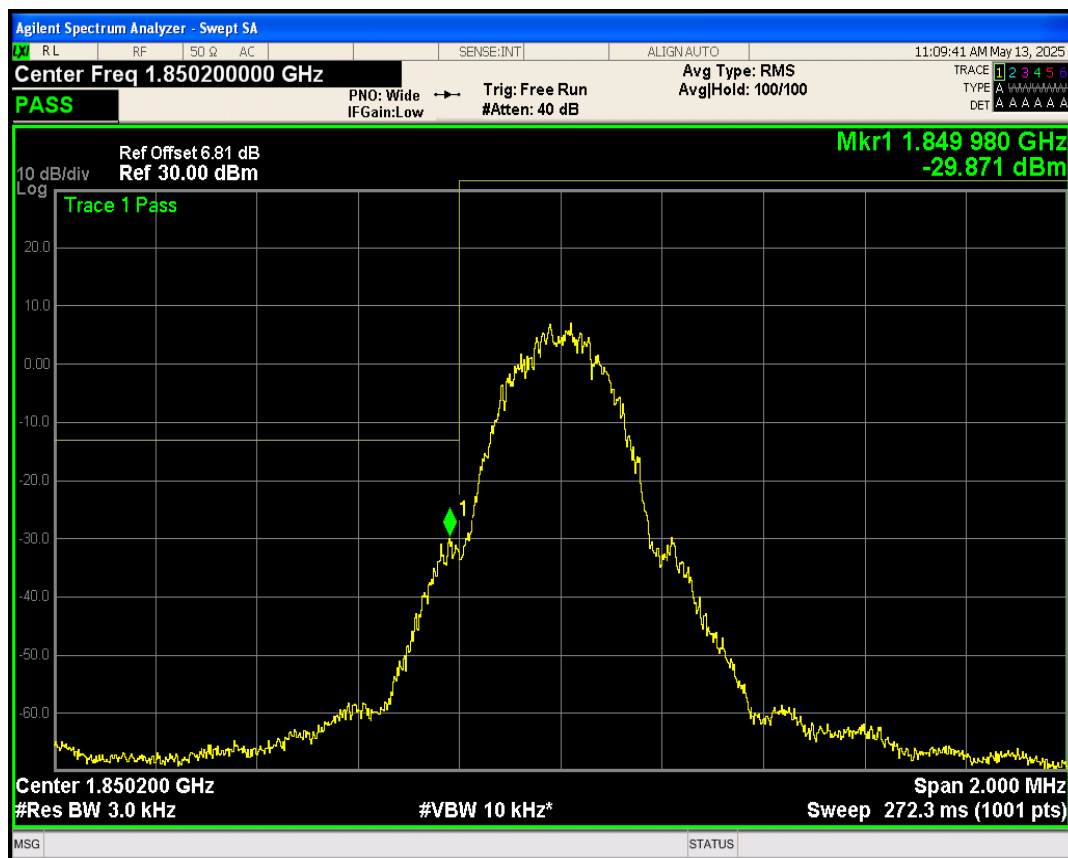


GPRS1900 Channel=810

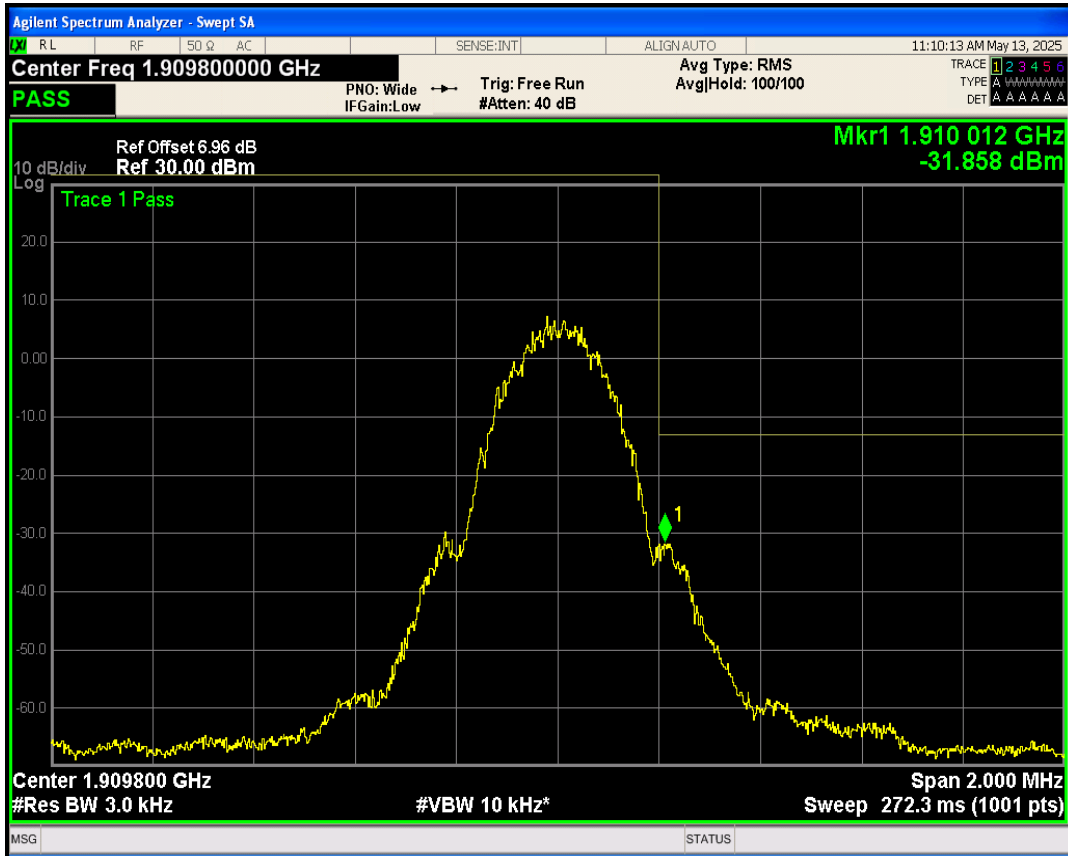

GPRS850 Channel=128

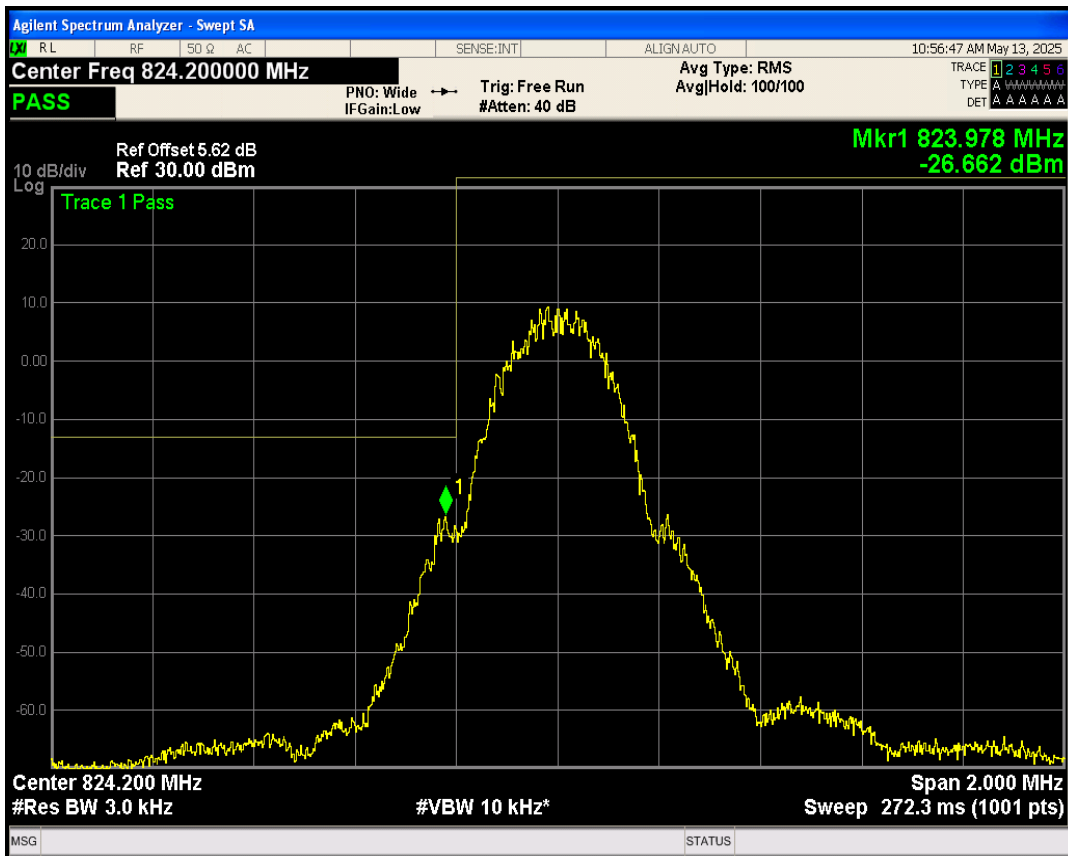


GPRS850 Channel=251

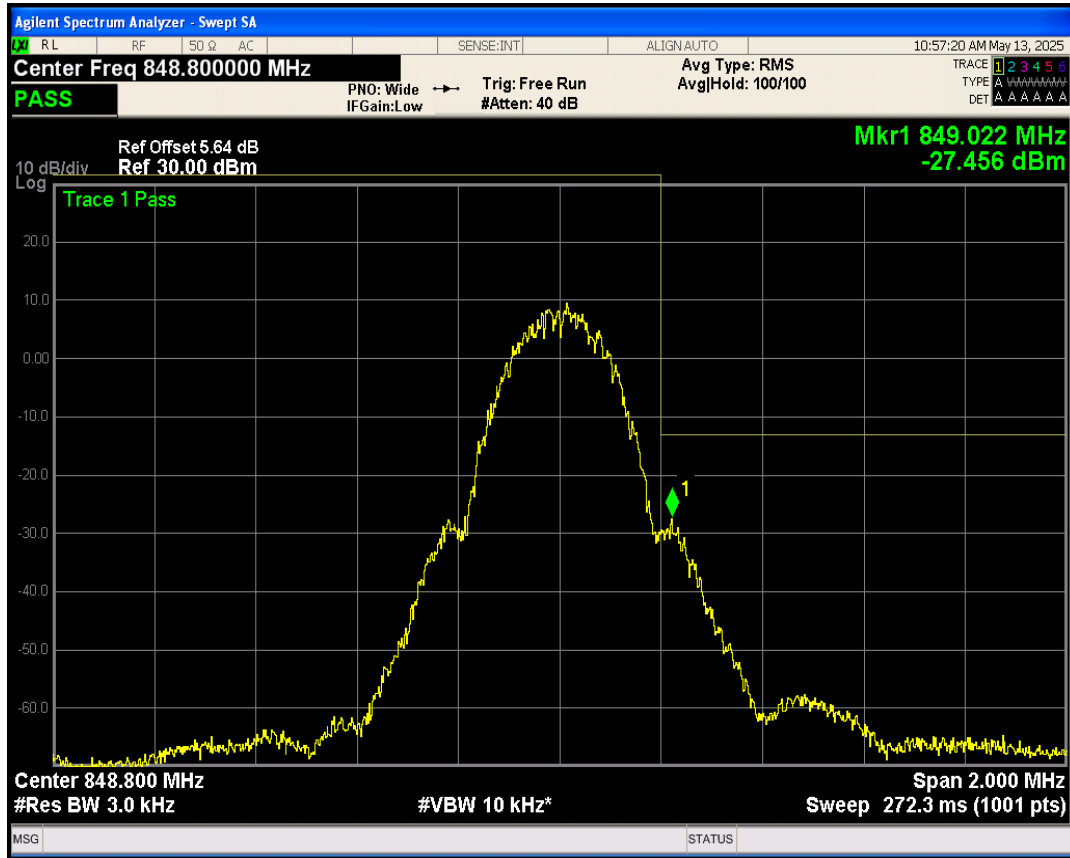


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25228.12	-20.78	-13	PASS
GPRS1900	661	1880	25760.16	-20.51	-13	PASS
GPRS1900	810	1909.8	25547.08	-20.85	-13	PASS
GPRS850	128	824.2	25235.40	-22.24	-13	PASS
GPRS850	189	836.4	25756.19	-21.48	-13	PASS
GPRS850	251	848.8	25838.91	-22.08	-13	PASS


GPRS1900 Channel=512

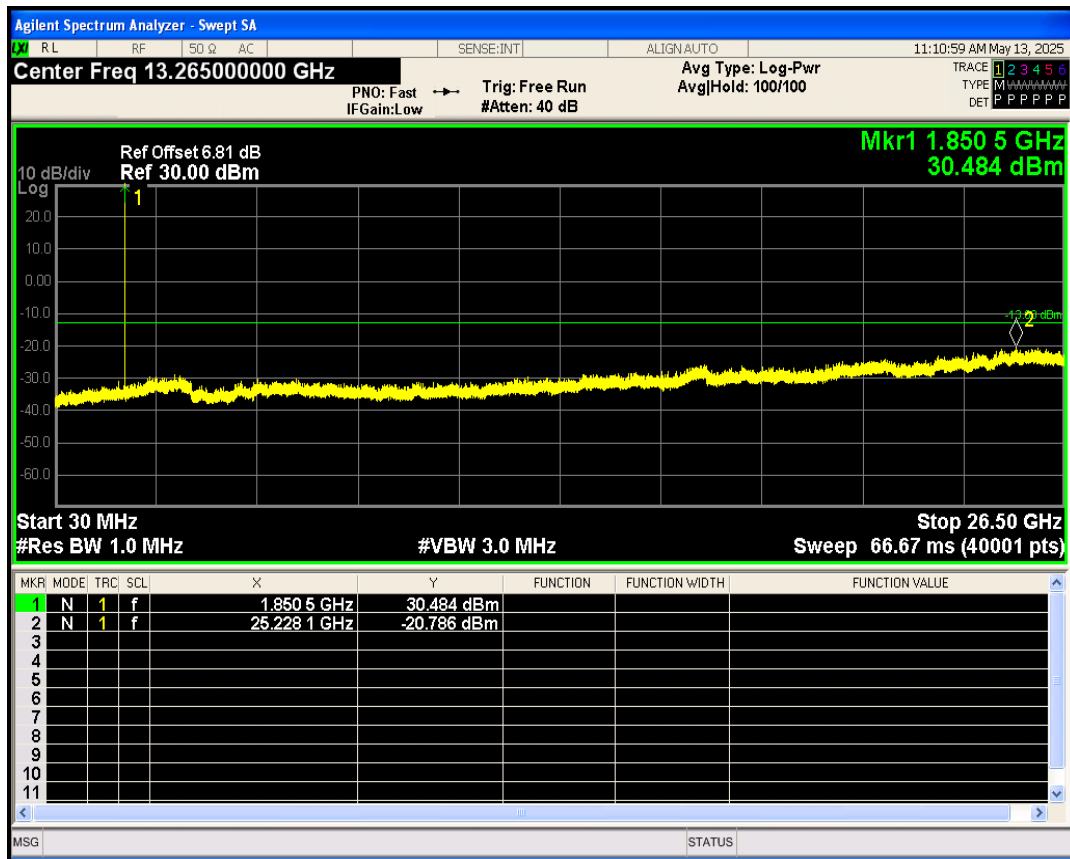


GPRS1900 Channel=661

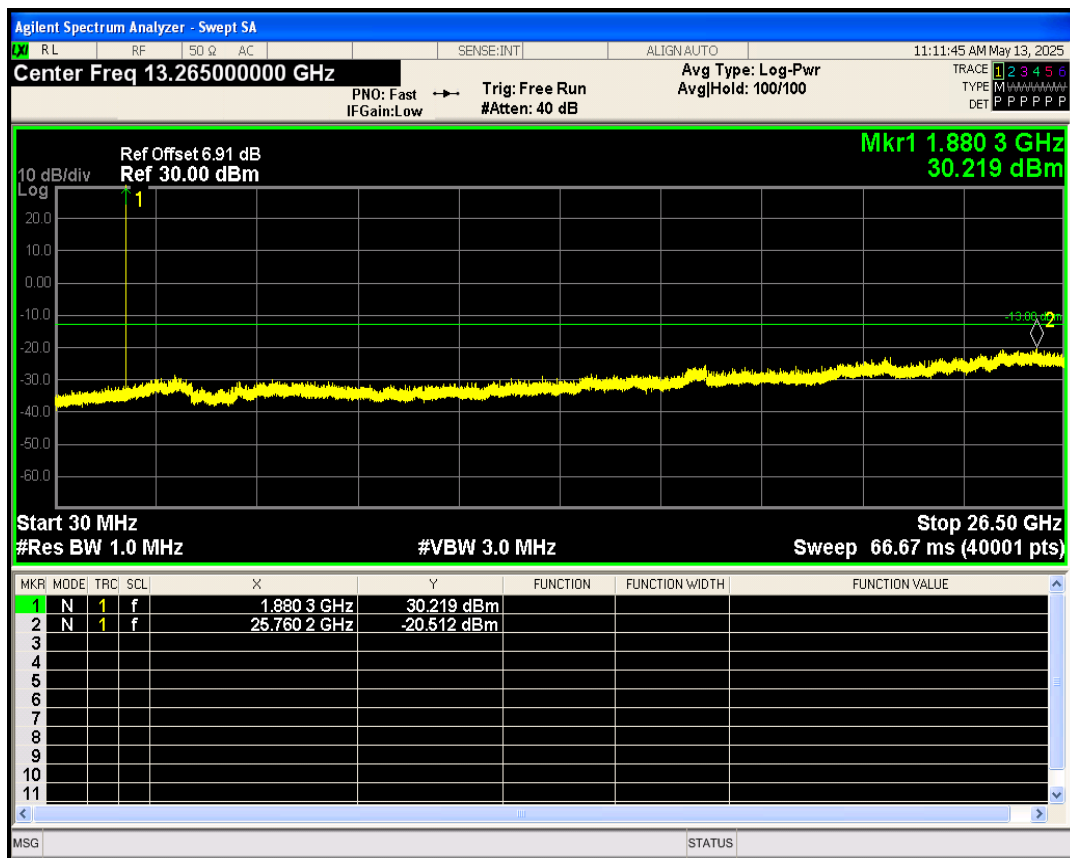


GPRS1900 Channel=810

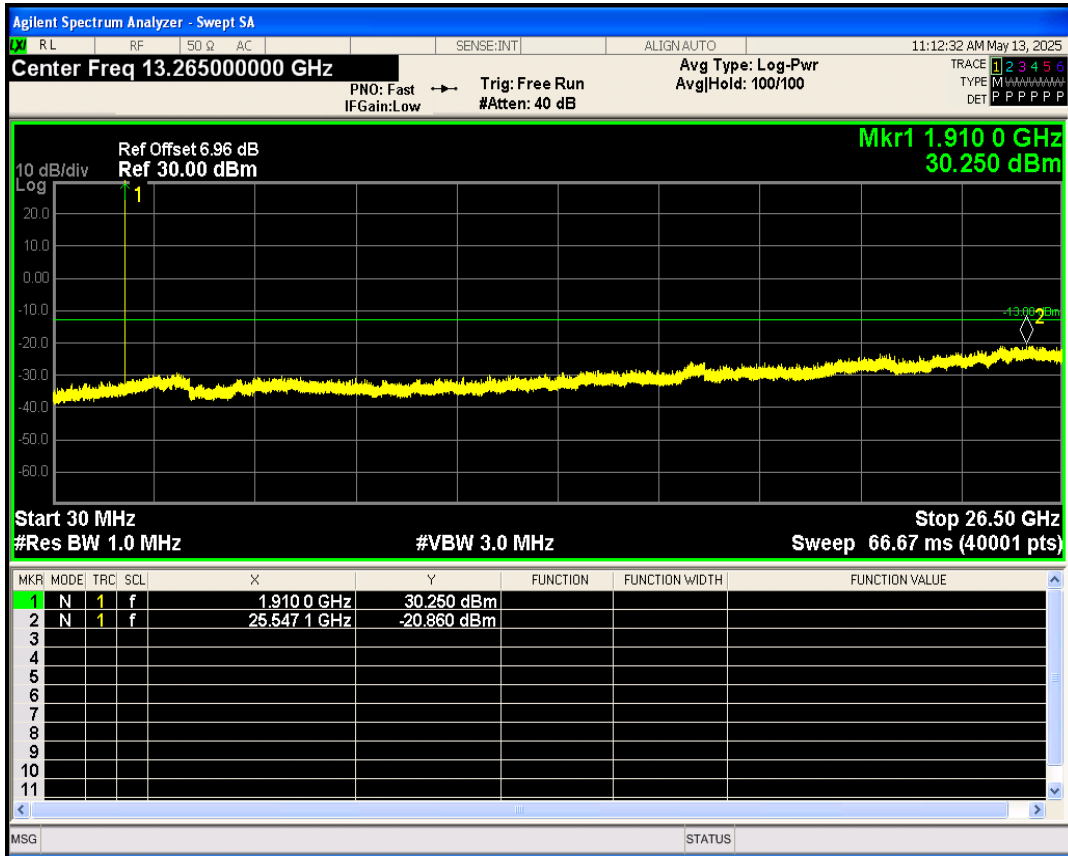

GPRS850 Channel=128

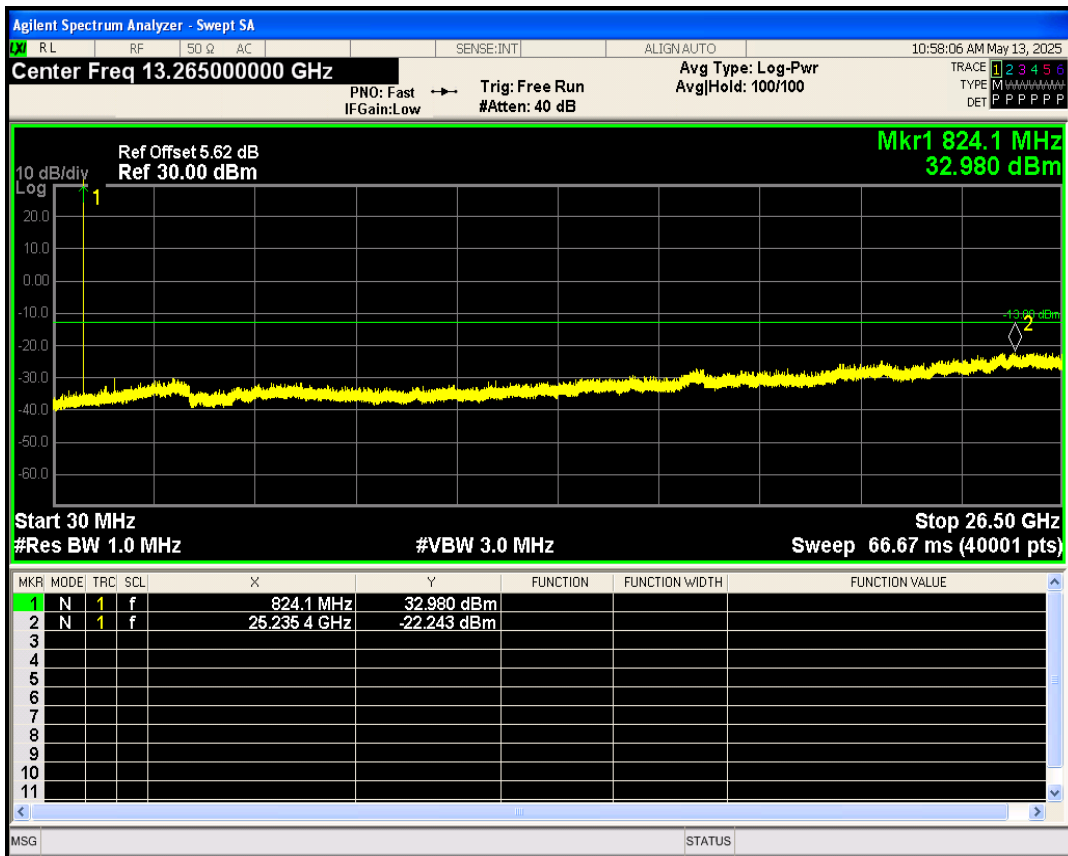

GPRS850 Channel=189

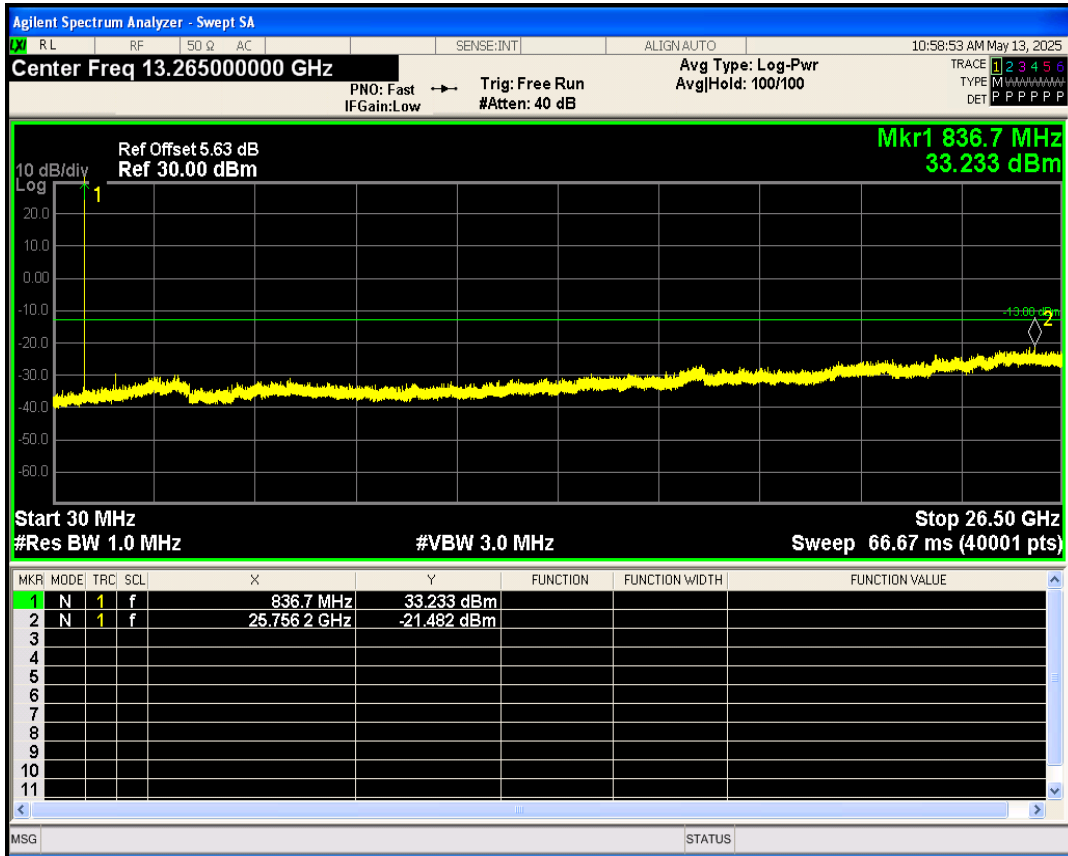

GPRS850 Channel=251

