


Test Mode	TX AX(HE40) Mode 2447 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

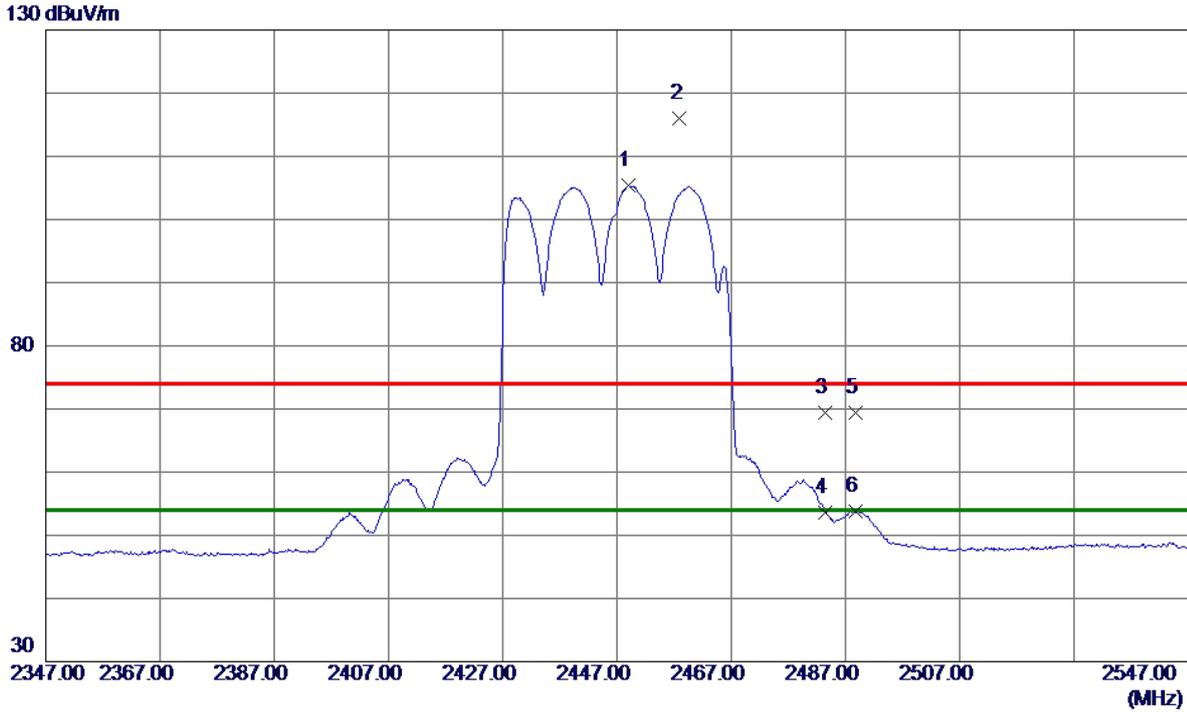


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2449.1000	95.32	10.00	105.32	54.00	51.32	AVG	No Limit
2	2458.0000	105.92	10.00	115.92	74.00	41.92	Peak	No Limit
3	2483.5000	59.42	10.01	69.43	74.00	-4.57	Peak	
4	2483.5000	43.56	10.01	53.57	54.00	-0.43	AVG	
5	2488.8000	59.35	10.02	69.37	74.00	-4.63	Peak	
6	2488.8000	43.87	10.02	53.89	54.00	-0.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2447 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

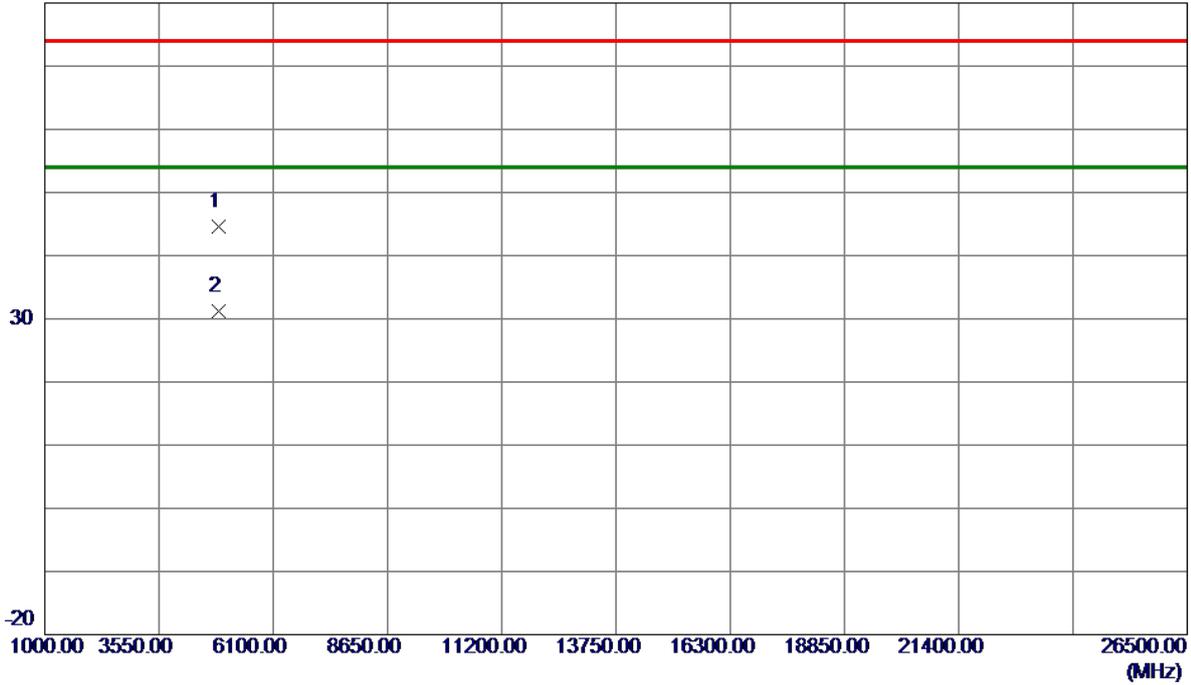


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4895.2200	38.03	6.63	44.66	74.00	-29.34	Peak	
2 *	4895.6549	24.54	6.63	31.17	54.00	-22.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2447 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

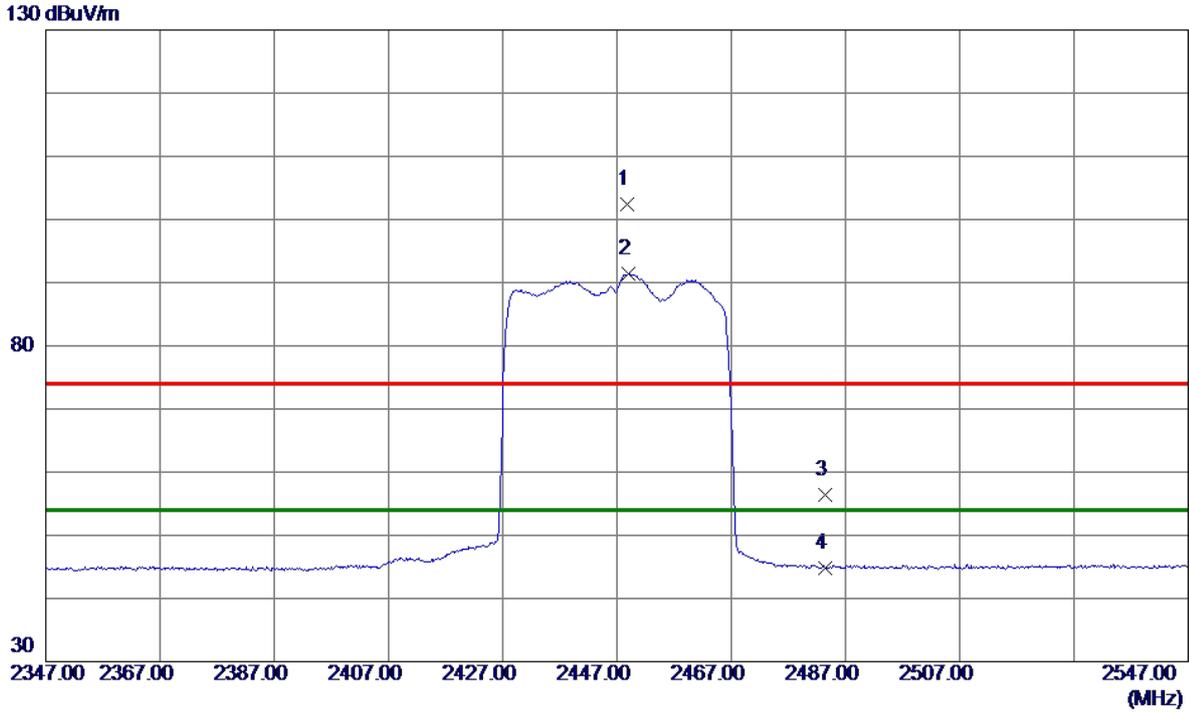


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2448.7000	92.43	10.00	102.43	74.00	28.43	Peak	No Limit
2 *	2448.9000	81.42	10.00	91.42	54.00	37.42	AVG	No Limit
3	2483.5000	46.46	10.01	56.47	74.00	-17.53	Peak	
4	2483.5000	34.83	10.01	44.84	54.00	-9.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2447 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

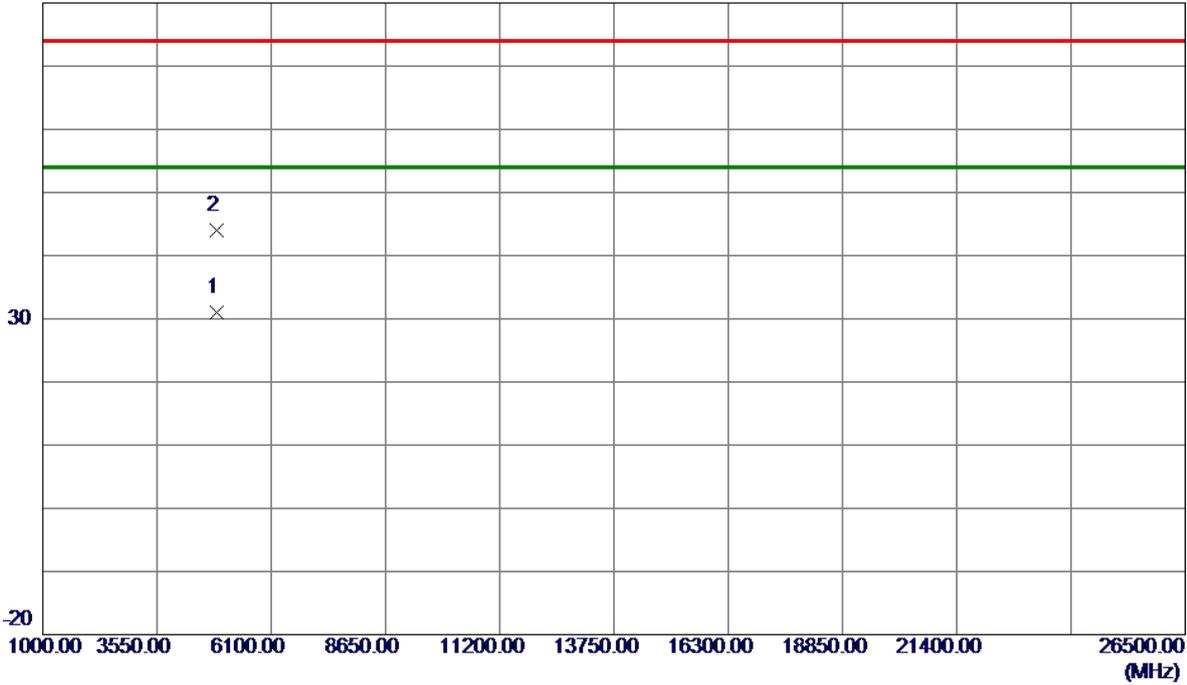


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4895.0400	24.41	6.63	31.04	54.00	-22.96	AVG	
2	4895.7850	37.31	6.63	43.94	74.00	-30.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

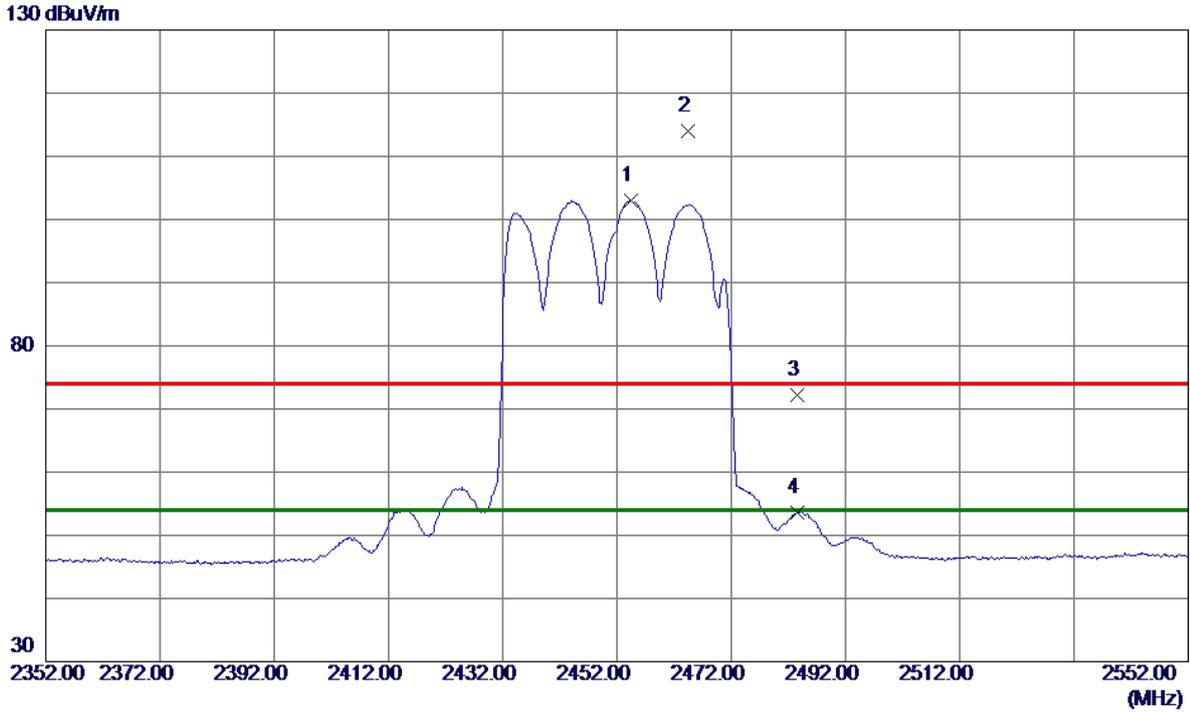


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.4000	93.03	10.00	103.03	54.00	49.03	AVG	No Limit
2	2464.4000	104.06	10.01	114.07	74.00	40.07	Peak	No Limit
3	2483.5000	62.13	10.01	72.14	74.00	-1.86	Peak	
4	2483.5000	43.53	10.01	53.54	54.00	-0.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

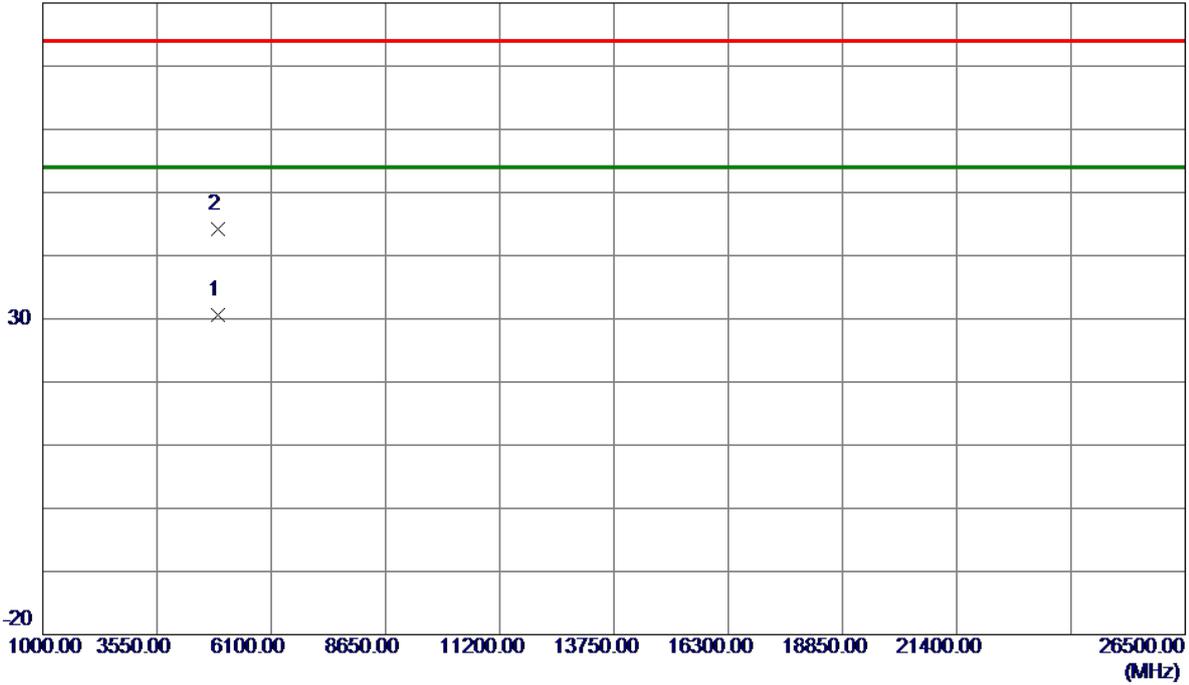


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.6080	23.98	6.65	30.63	54.00	-23.37	AVG	
2	4903.9380	37.64	6.65	44.29	74.00	-29.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

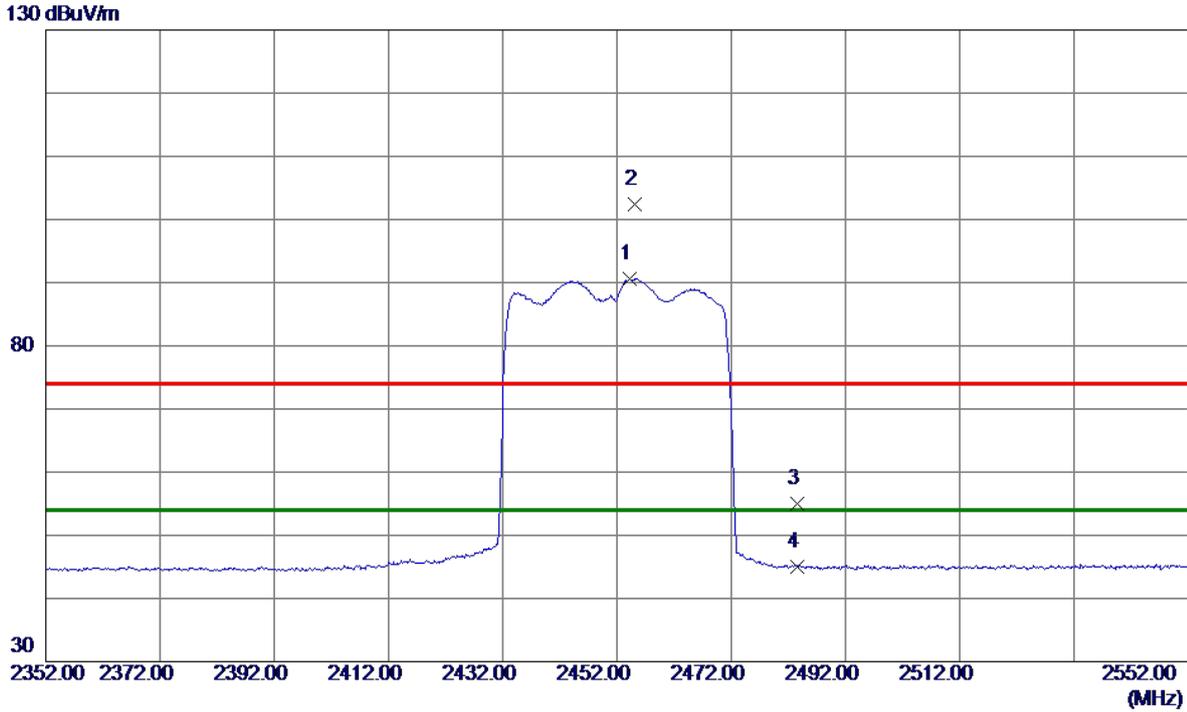


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.2000	80.59	10.00	90.59	54.00	36.59	AVG	No Limit
2	2455.2000	92.39	10.00	102.39	74.00	28.39	Peak	No Limit
3	2483.5000	45.02	10.01	55.03	74.00	-18.97	Peak	
4	2483.5000	34.91	10.01	44.92	54.00	-9.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode 2452 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

80 dBuV/m

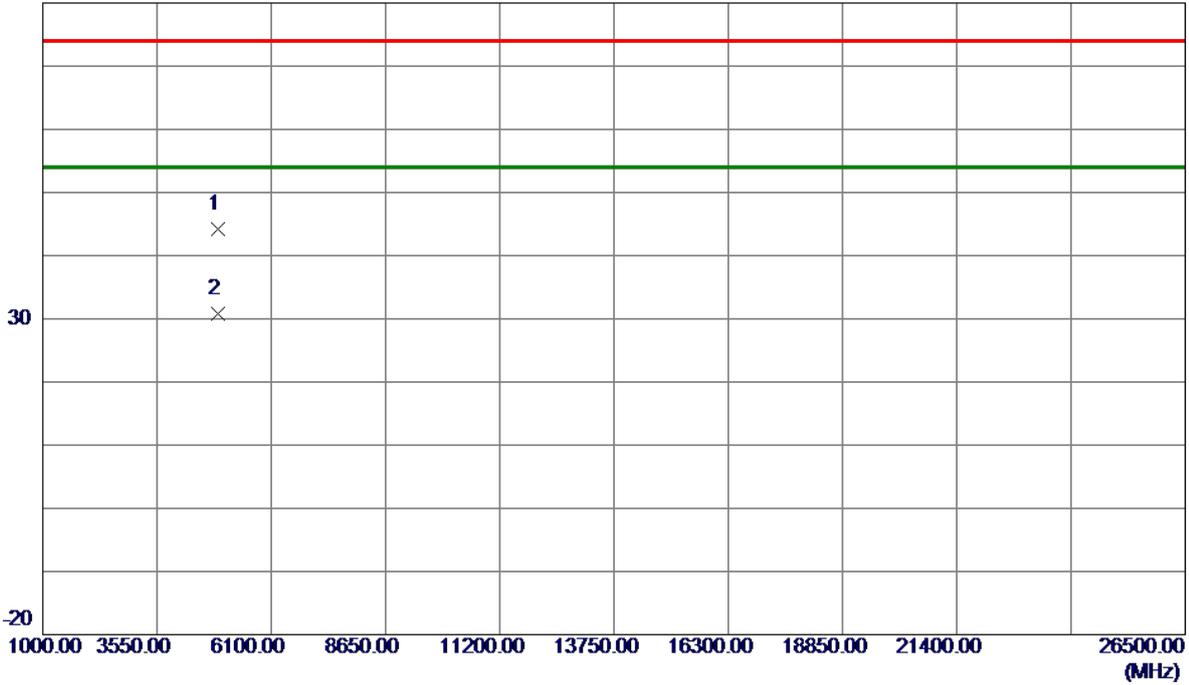

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4903.7799	37.57	6.65	44.22	74.00	-29.78	Peak	
2 *	4904.3500	24.06	6.65	30.71	54.00	-23.29	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode TX B Mode


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	8.040	15.120	0.5	Complies
06	2437	9.560	15.280	0.5	Complies
11	2462	8.080	15.280	0.5	Complies

CH01

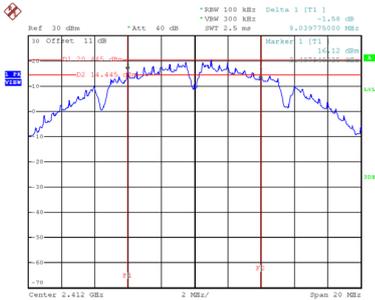


Date: 14_JUL_2021 14:45:11

CH06
6 dB Bandwidth

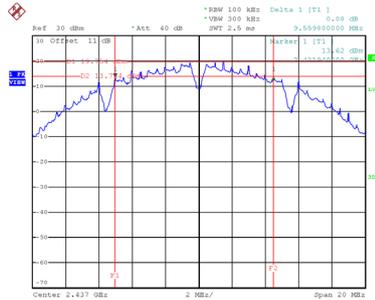


Date: 14_JUL_2021 14:45:19

CH11

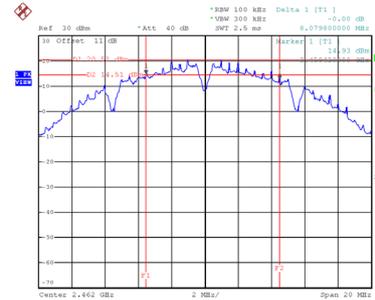


Date: 14_JUL_2021 14:46:53


99 % Occupied Bandwidth

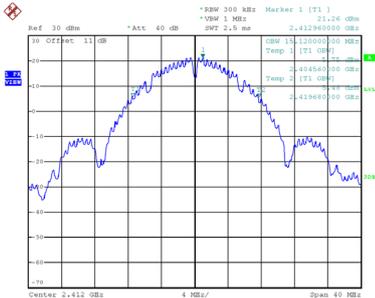

Date: 14_JUL_2021 14:45:18

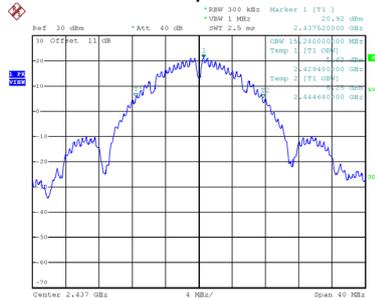

Date: 14_JUL_2021 14:46:07

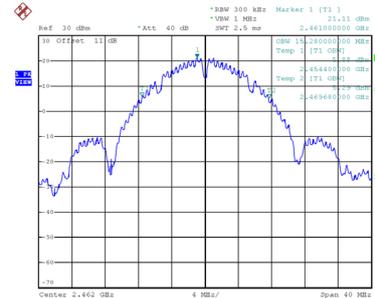


Date: 14_JUL_2021 14:47:00

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.380	16.720	0.5	Complies
06	2437	16.380	22.400	0.5	Complies
11	2462	16.400	23.840	0.5	Complies

CH01

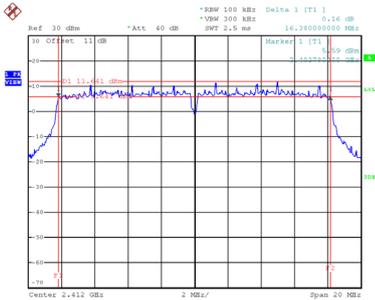


Date: 14_JUL_2021 14:47:32

CH06
6 dB Bandwidth

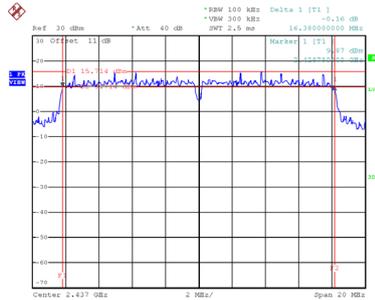


Date: 14_JUL_2021 14:48:14

CH11

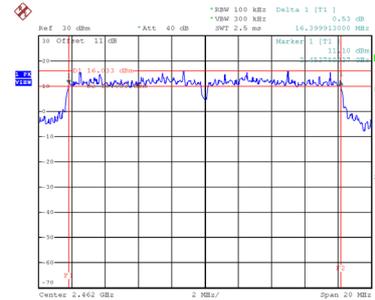


Date: 14_JUL_2021 14:48:57


99 % Occupied Bandwidth

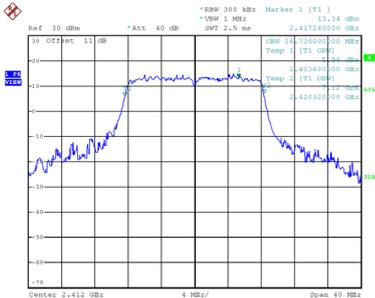

Date: 14_JUL_2021 14:47:39

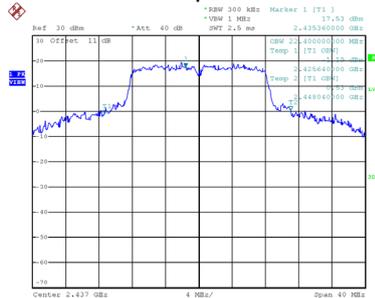

Date: 14_JUL_2021 14:48:21

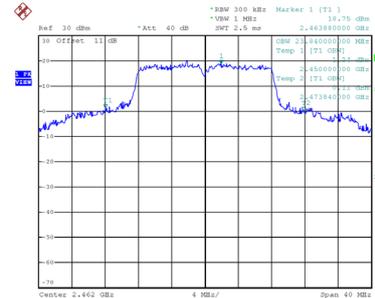


Date: 14_JUL_2021 14:49:04

Test Mode	TX N(HT20) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	17.620	17.840	0.5	Complies
06	2437	17.660	22.880	0.5	Complies
11	2462	17.660	18.320	0.5	Complies

CH01

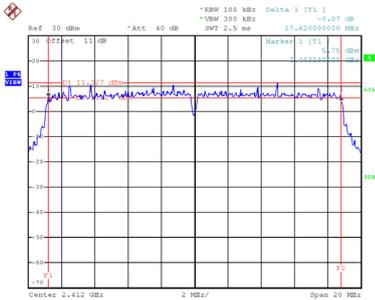


Date: 14_JUL_2021 14:49:40

CH06
6 dB Bandwidth

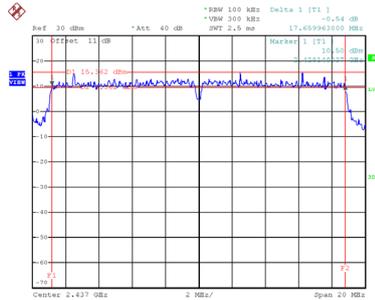


Date: 14_JUL_2021 14:50:23

CH11

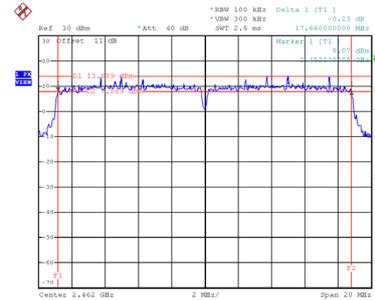


Date: 14_JUL_2021 14:51:06


99 % Occupied Bandwidth

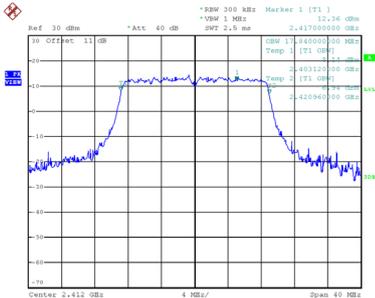

Date: 14_JUL_2021 14:49:48

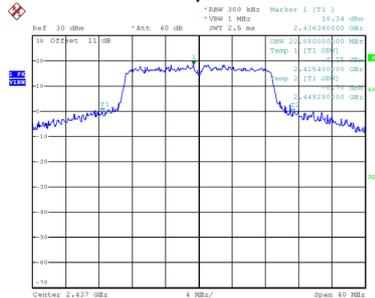

Date: 14_JUL_2021 14:50:31

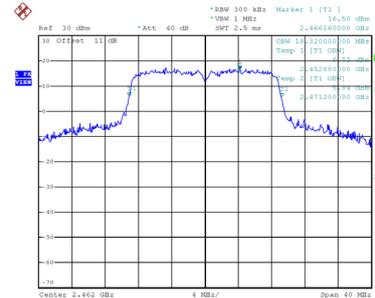


Date: 14_JUL_2021 14:51:13

Test Mode	TX N(HT40) Mode
-----------	-----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	36.360	37.280	0.5	Complies
06	2437	36.480	37.440	0.5	Complies
09	2452	36.490	37.440	0.5	Complies

CH03

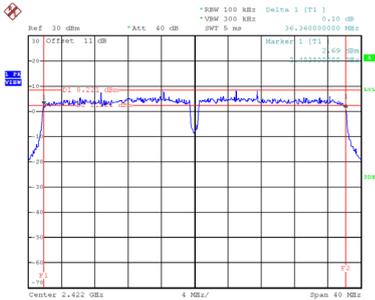


Date: 14_JUL_2021 14:51:48

CH06
6 dB Bandwidth

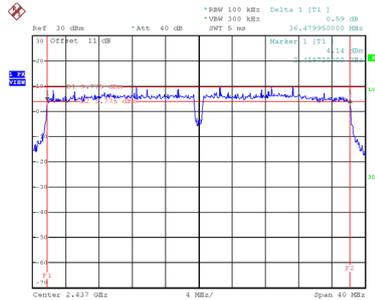


Date: 14_JUL_2021 14:52:29

CH09

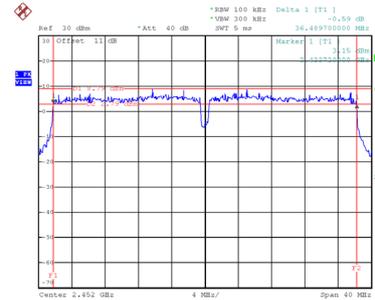


Date: 14_JUL_2021 14:53:10


99 % Occupied Bandwidth

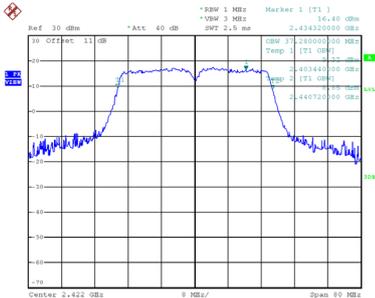

Date: 14_JUL_2021 14:51:55

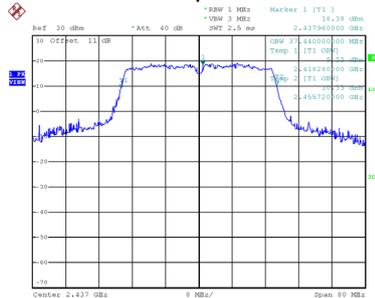

Date: 14_JUL_2021 14:52:37

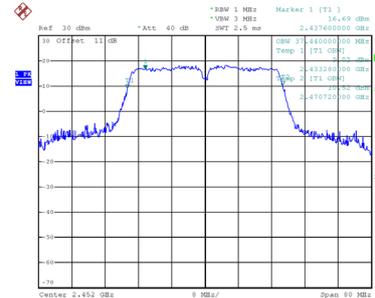


Date: 14_JUL_2021 14:53:17

Test Mode	TX AX(HE20) Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	19.050	19.200	0.5	Complies
06	2437	18.790	21.360	0.5	Complies
11	2462	19.050	19.280	0.5	Complies

CH01

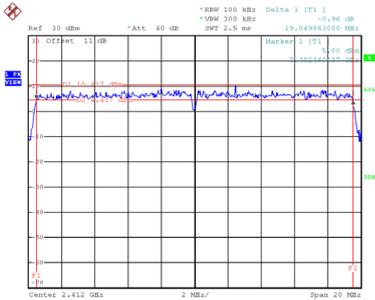


Date: 14_JUL_2021 14:53:45

CH06
6 dB Bandwidth

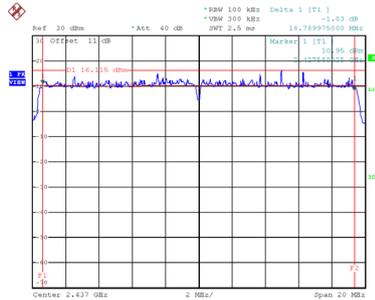


Date: 14_JUL_2021 14:54:12

CH11

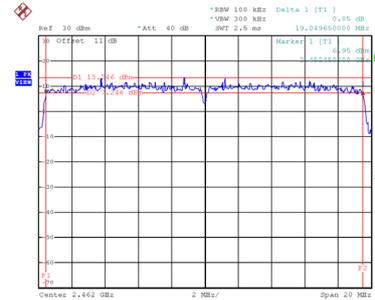


Date: 14_JUL_2021 14:54:35


99 % Occupied Bandwidth

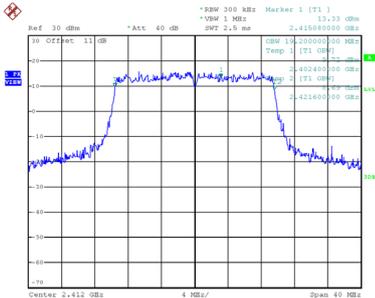

Date: 14_JUL_2021 14:53:52

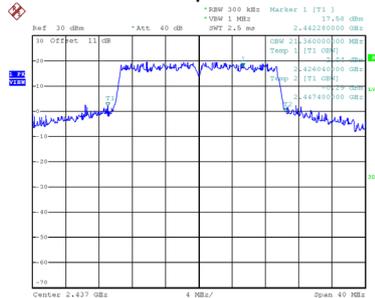

Date: 14_JUL_2021 14:54:19

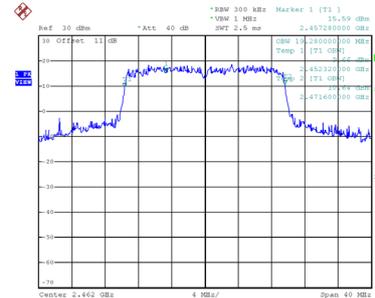


Date: 14_JUL_2021 14:54:42

Test Mode	TX AX(HE40) Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	38.120	38.560	0.5	Complies
06	2437	38.200	38.720	0.5	Complies
09	2452	37.588	38.720	0.5	Complies

CH03

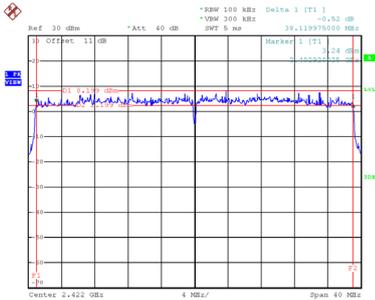


Date: 14_JUL_2021 14:55:20

CH06
6 dB Bandwidth

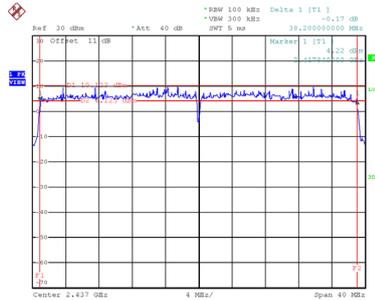


Date: 14_JUL_2021 14:56:01

CH09

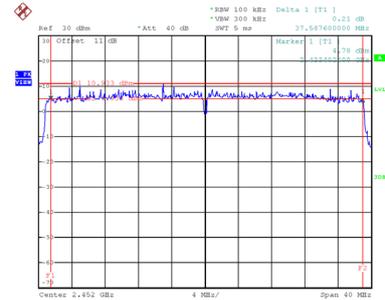


Date: 14_JUL_2021 14:56:38


99 % Occupied Bandwidth

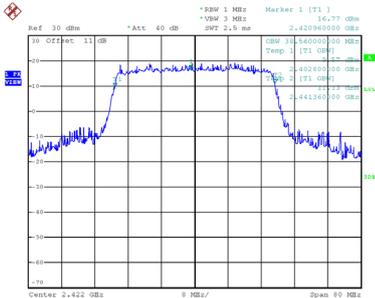

Date: 14_JUL_2021 14:55:27

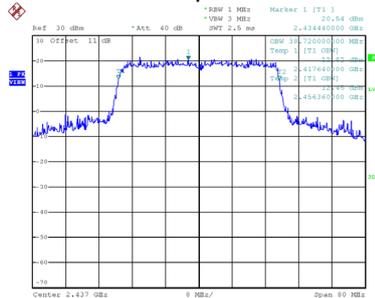

Date: 14_JUL_2021 14:56:08

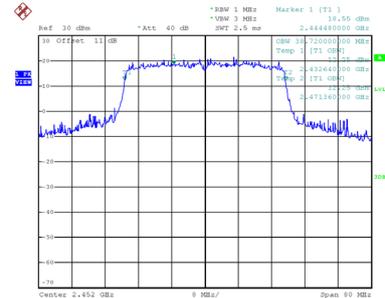

Date: 14_JUL_2021 14:56:45

APPENDIX F - MAXIMUM AVERAGE OUTPUT POWER

Non Beamforming

Test Mode	TX B Mode_Ant. 1
------------------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.62	0.26	20.88	30.00	1.0000	Complies
06	2437	26.11	0.26	26.37	30.00	1.0000	Complies
11	2462	26.15	0.26	26.41	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
------------------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.51	0.26	20.77	30.00	1.0000	Complies
06	2437	25.98	0.26	26.24	30.00	1.0000	Complies
11	2462	25.99	0.26	26.25	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
------------------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.83	30.00	1.0000	Complies
06	2437	29.31	30.00	1.0000	Complies
11	2462	29.34	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.68	0.21	20.89	30.00	1.0000	Complies
06	2437	25.79	0.21	26.00	30.00	1.0000	Complies
11	2462	18.78	0.21	18.99	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.39	0.21	20.60	30.00	1.0000	Complies
06	2437	25.36	0.21	25.57	30.00	1.0000	Complies
11	2462	18.02	0.21	18.23	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	23.75	30.00	1.0000	Complies
06	2437	28.80	30.00	1.0000	Complies
11	2462	21.63	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.31	0.34	18.65	30.00	1.0000	Complies
06	2437	25.78	0.34	26.12	30.00	1.0000	Complies
11	2462	18.86	0.34	19.20	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.01	0.34	18.35	30.00	1.0000	Complies
06	2437	25.68	0.34	26.02	30.00	1.0000	Complies
11	2462	18.17	0.34	18.51	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.51	30.00	1.0000	Complies
06	2437	29.08	30.00	1.0000	Complies
11	2462	21.88	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.02	0.37	16.39	30.00	1.0000	Complies
06	2437	18.98	0.37	19.35	30.00	1.0000	Complies
09	2452	16.42	0.37	16.79	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.91	0.37	16.28	30.00	1.0000	Complies
06	2437	18.65	0.37	19.02	30.00	1.0000	Complies
09	2452	15.72	0.37	16.09	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.35	30.00	1.0000	Complies
06	2437	22.20	30.00	1.0000	Complies
09	2452	19.46	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.32	0.34	18.66	30.00	1.0000	Complies
06	2437	25.95	0.34	26.29	30.00	1.0000	Complies
11	2462	19.15	0.34	19.49	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.05	0.34	18.39	30.00	1.0000	Complies
06	2437	25.81	0.34	26.15	30.00	1.0000	Complies
11	2462	18.41	0.34	18.75	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.54	30.00	1.0000	Complies
06	2437	29.23	30.00	1.0000	Complies
11	2462	22.14	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.33	0.33	16.66	30.00	1.0000	Complies
06	2437	19.15	0.33	19.48	30.00	1.0000	Complies
09	2452	16.57	0.33	16.90	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.25	0.33	16.58	30.00	1.0000	Complies
06	2437	18.75	0.33	19.08	30.00	1.0000	Complies
09	2452	15.83	0.33	16.16	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.63	30.00	1.0000	Complies
06	2437	22.30	30.00	1.0000	Complies
09	2452	19.56	30.00	1.0000	Complies

Beamforming

Test Mode	TX N(HT20) Mode_Ant. 1
------------------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.90	0.34	18.24	30.00	1.0000	Complies
06	2437	25.16	0.34	25.50	30.00	1.0000	Complies
11	2462	18.39	0.34	18.73	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 2
------------------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.51	0.34	17.85	30.00	1.0000	Complies
06	2437	25.01	0.34	25.35	30.00	1.0000	Complies
11	2462	17.71	0.34	18.05	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Total
------------------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.06	30.00	1.0000	Complies
06	2437	28.43	30.00	1.0000	Complies
11	2462	21.41	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Ant. 1
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.54	0.37	15.91	30.00	1.0000	Complies
06	2437	18.50	0.37	18.87	30.00	1.0000	Complies
09	2452	15.95	0.37	16.32	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Ant. 2
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.45	0.37	15.82	30.00	1.0000	Complies
06	2437	18.16	0.37	18.53	30.00	1.0000	Complies
09	2452	15.26	0.37	15.63	30.00	1.0000	Complies

Test Mode	TX N(HT40) Mode_Total
-----------	-----------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	18.88	30.00	1.0000	Complies
06	2437	21.71	30.00	1.0000	Complies
09	2452	19.00	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.85	0.34	18.19	30.00	1.0000	Complies
06	2437	25.46	0.34	25.80	30.00	1.0000	Complies
11	2462	18.69	0.34	19.03	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.56	0.34	17.90	30.00	1.0000	Complies
06	2437	25.32	0.34	25.66	30.00	1.0000	Complies
11	2462	25.01	0.34	25.35	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	21.06	30.00	1.0000	Complies
06	2437	28.74	30.00	1.0000	Complies
11	2462	26.26	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.91	0.33	16.24	30.00	1.0000	Complies
06	2437	18.68	0.33	19.01	30.00	1.0000	Complies
09	2452	16.11	0.33	16.44	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	15.77	0.33	16.10	30.00	1.0000	Complies
06	2437	18.25	0.33	18.58	30.00	1.0000	Complies
09	2452	15.39	0.33	15.72	30.00	1.0000	Complies

Test Mode	TX AX(HE40) Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	19.18	30.00	1.0000	Complies
06	2437	21.81	30.00	1.0000	Complies
09	2452	19.11	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Test Mode TX B Mode_Ant. 1

Reference Level-CH01



Date: 13.JUL.2021 16:40:25

Reference Level -CH06




Date: 13.JUL.2021 16:41:00

Reference Level-CH11




Date: 13.JUL.2021 16:41:26

Bandedge-CH01

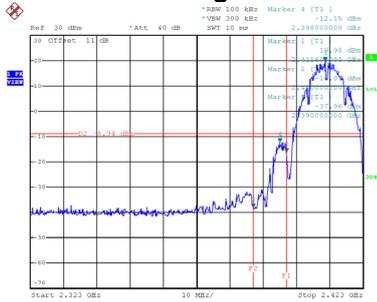




Date: 13.JUL.2021 17:43:15

Bandedge-CH11

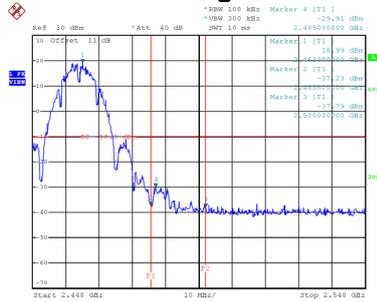

Date: 13.JUL.2021 17:44:30

CH01 – 10th Harmonic of the fundamental frequency

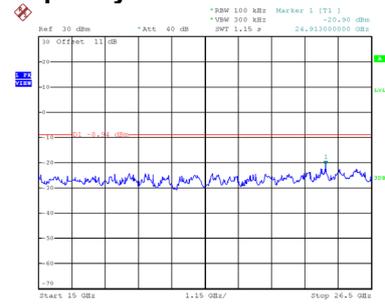
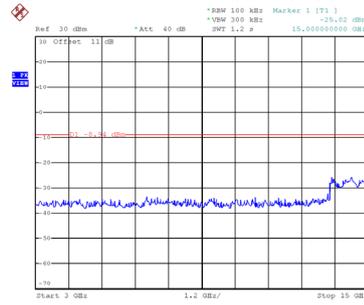
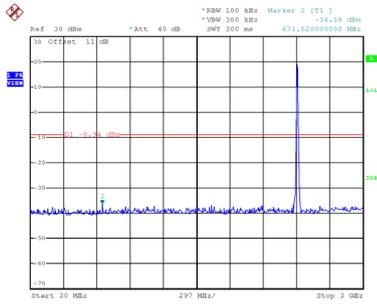


Date: 13.JUL.2021 19:55:14

Date: 13.JUL.2021 19:55:22

Date: 13.JUL.2021 19:55:30

CH06 – 10th Harmonic of the fundamental frequency

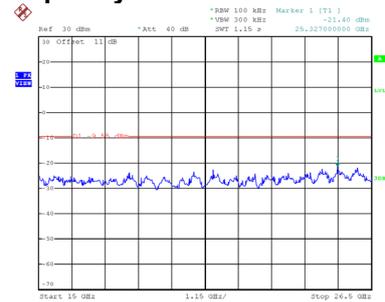
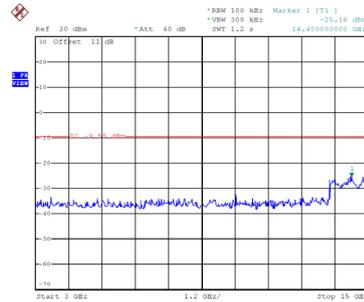
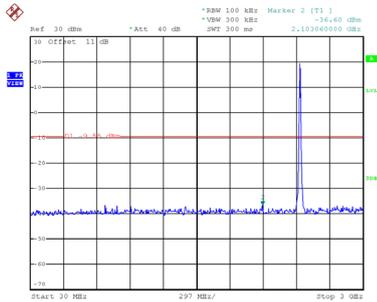


Date: 13.JUL.2021 19:56:07

Date: 13.JUL.2021 19:56:15

Date: 13.JUL.2021 19:56:23

CH11 – 10th Harmonic of the fundamental frequency

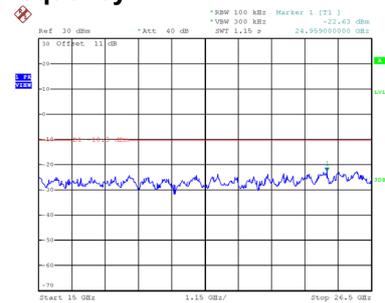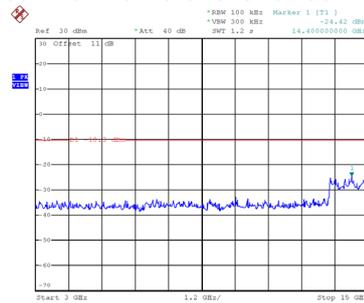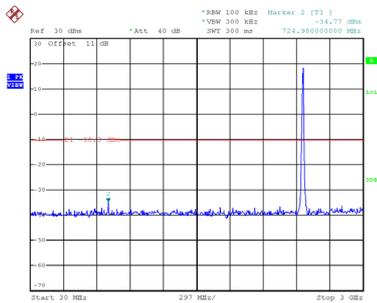

Date: 13.JUL.2021 19:57:09

Date: 13.JUL.2021 19:57:17

Date: 13.JUL.2021 19:57:25


Test Mode TX B Mode_Ant. 2

Reference Level-CH01



Date: 13.JUL.2021 17:13:59

Reference Level -CH06

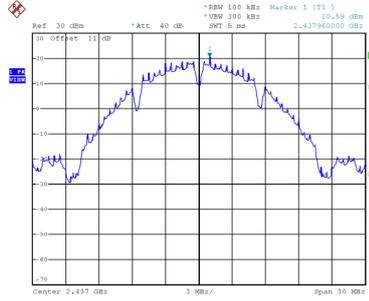


Date: 13.JUL.2021 17:14:28

Reference Level-CH11




Date: 13.JUL.2021 17:14:53

Bandedge-CH01

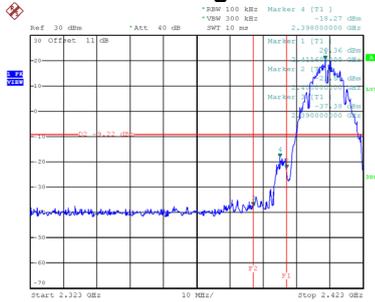


Date: 14.JUL.2021 11:32:31

Bandedge-CH11

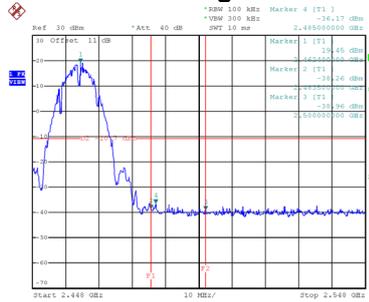


Date: 14.JUL.2021 11:33:47


CH01 – 10th Harmonic of the fundamental frequency

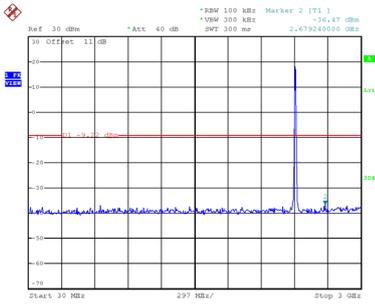

Date: 14.JUL.2021 13:53:05

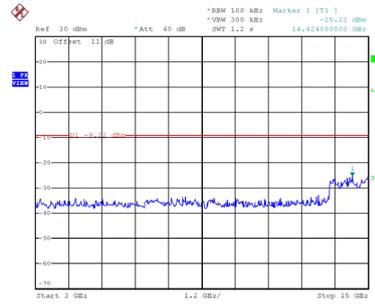


Date: 14.JUL.2021 13:53:14

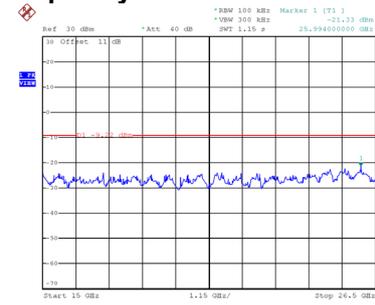


Date: 14.JUL.2021 13:53:21


CH06 – 10th Harmonic of the fundamental frequency

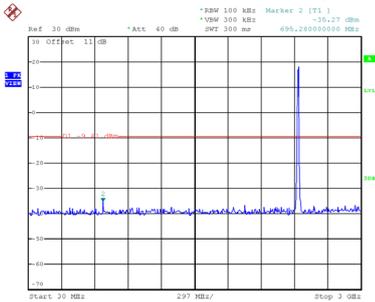

Date: 14.JUL.2021 13:54:00

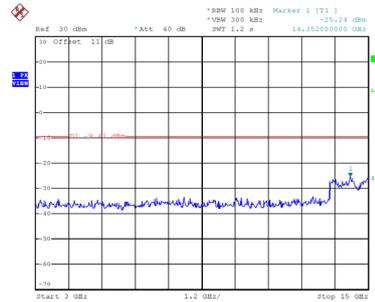


Date: 14.JUL.2021 13:54:08

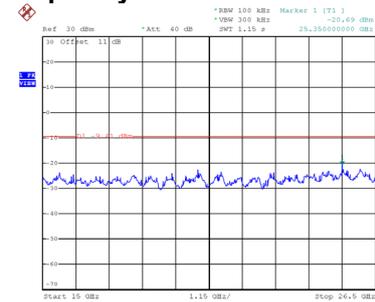


Date: 14.JUL.2021 13:54:15


CH11 – 10th Harmonic of the fundamental frequency

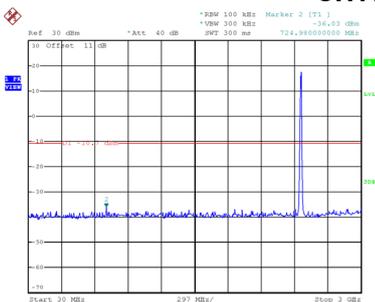

Date: 14.JUL.2021 13:54:45

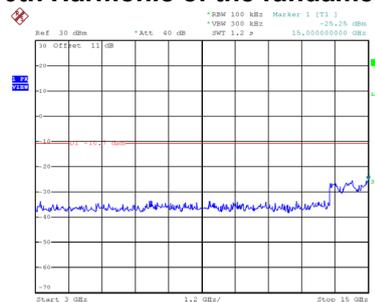


Date: 14.JUL.2021 13:54:53

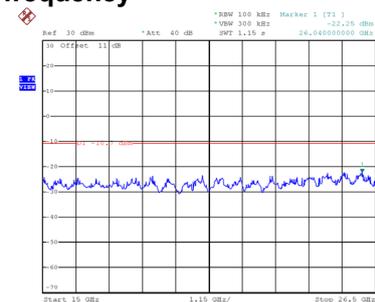

Date: 14.JUL.2021 13:55:00


Test Mode TX G Mode_Ant. 1

Reference Level-CH01

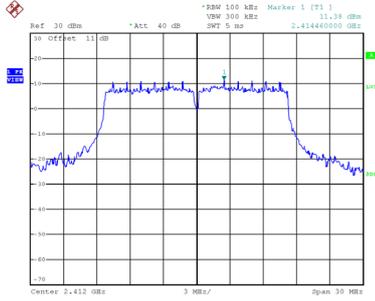


Date: 13.JUL.2021 19:07:07

Reference Level -CH06

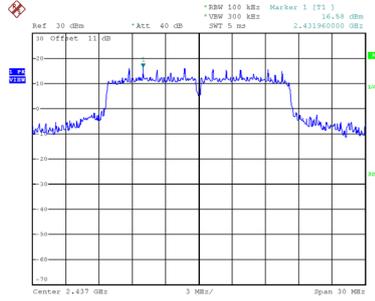


Date: 13.JUL.2021 16:43:17

Reference Level-CH11

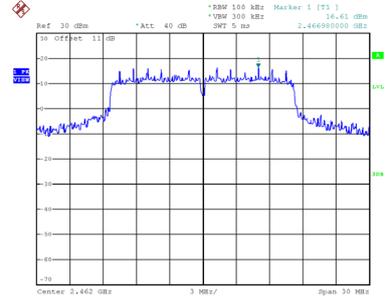


Date: 13.JUL.2021 16:43:47

Bandedge-CH01

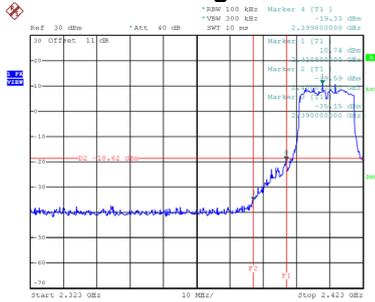


Date: 13.JUL.2021 19:26:16

Bandedge-CH11

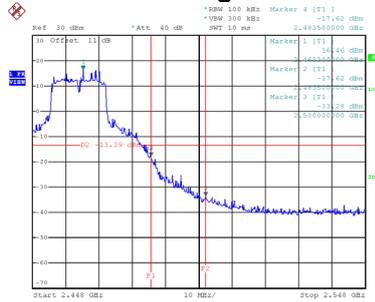


Date: 13.JUL.2021 17:50:15


CH01 – 10th Harmonic of the fundamental frequency

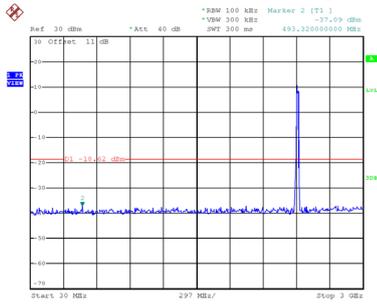

Date: 13.JUL.2021 19:58:04

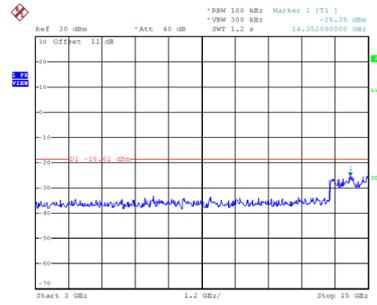


Date: 13.JUL.2021 19:58:11

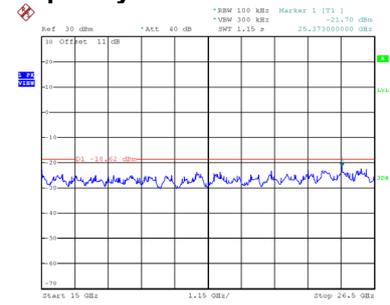


Date: 13.JUL.2021 19:58:19


CH06 – 10th Harmonic of the fundamental frequency

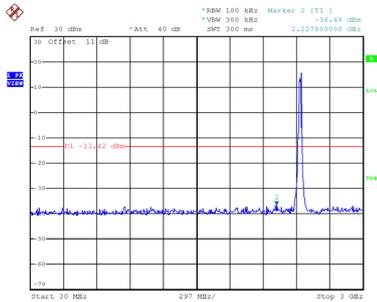

Date: 13.JUL.2021 19:59:02

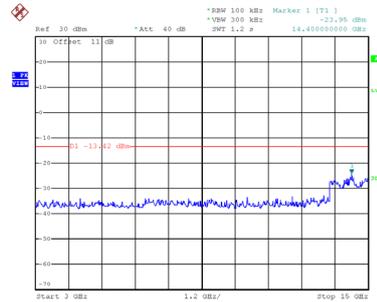


Date: 13.JUL.2021 19:59:10

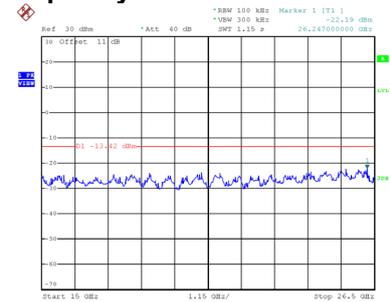


Date: 13.JUL.2021 19:59:18


CH11 – 10th Harmonic of the fundamental frequency

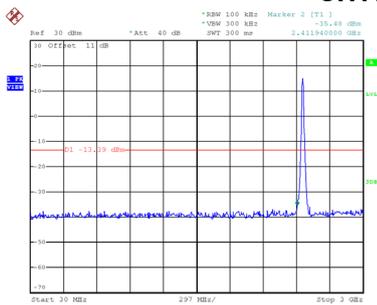

Date: 13.JUL.2021 19:59:48

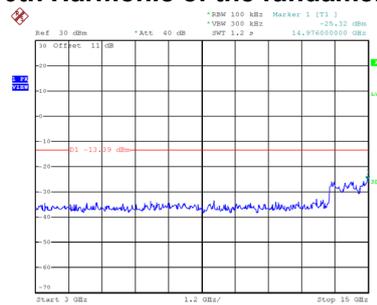


Date: 13.JUL.2021 19:59:56

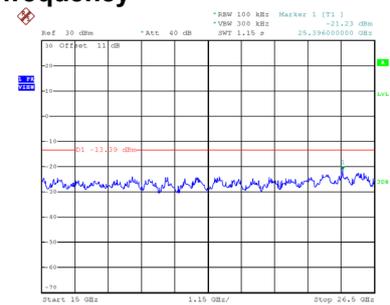

Date: 13.JUL.2021 20:00:04


Test Mode TX G Mode_Ant. 2

Reference Level-CH01

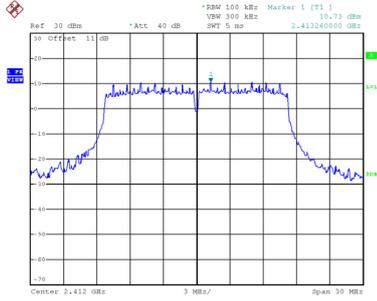


Date: 14.JUL.2021 11:18:13

Reference Level-CH06

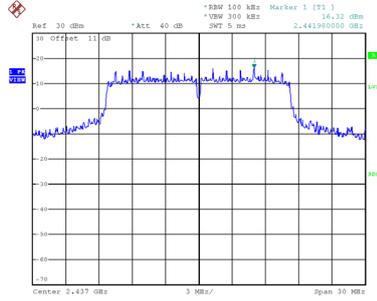


Date: 13.JUL.2021 17:15:38

Reference Level-CH11

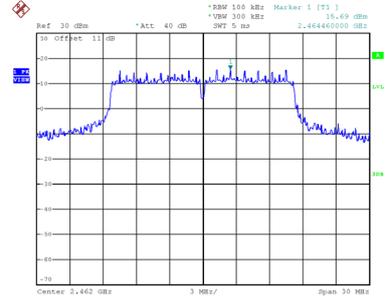


Date: 13.JUL.2021 17:16:03

Bandedge-CH01

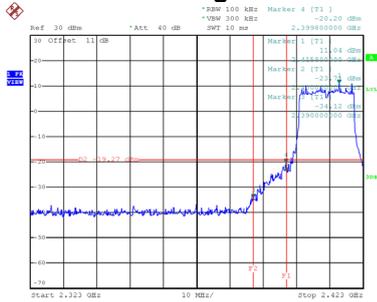




Date: 14.JUL.2021 11:34:51

Bandedge-CH11

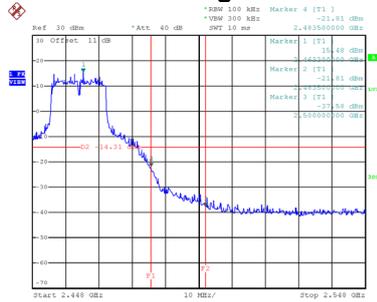

Date: 14.JUL.2021 11:40:28

CH01 – 10th Harmonic of the fundamental frequency

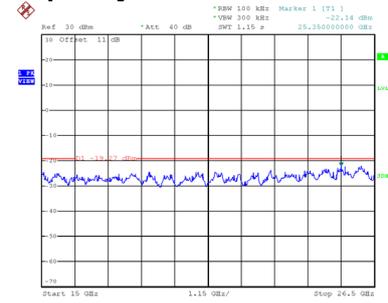
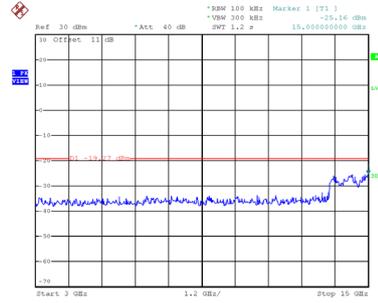
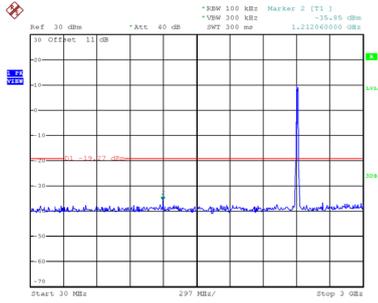


Date: 14.JUL.2021 13:55:40

Date: 14.JUL.2021 13:55:48

Date: 14.JUL.2021 13:55:55

CH06 – 10th Harmonic of the fundamental frequency

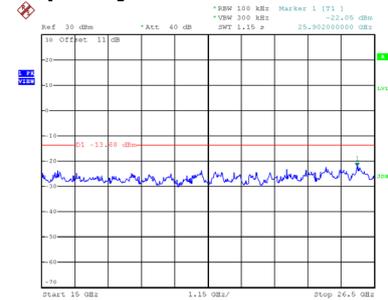
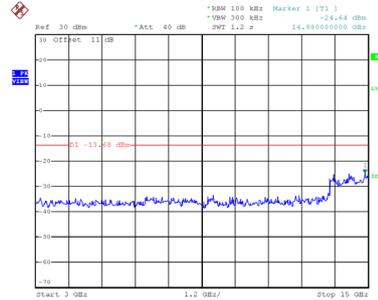
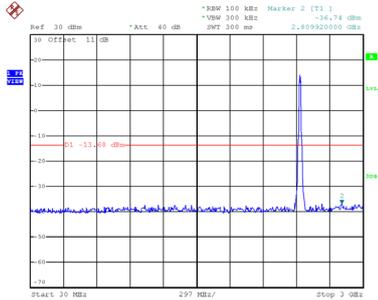


Date: 14.JUL.2021 13:56:28

Date: 14.JUL.2021 13:56:35

Date: 14.JUL.2021 13:56:43

CH11 – 10th Harmonic of the fundamental frequency

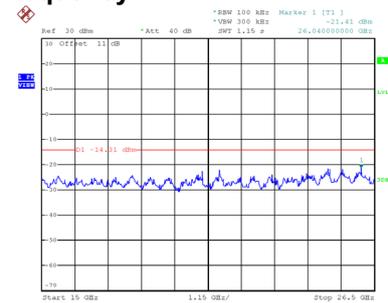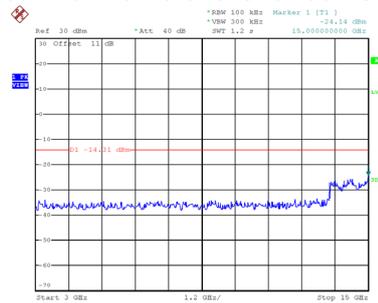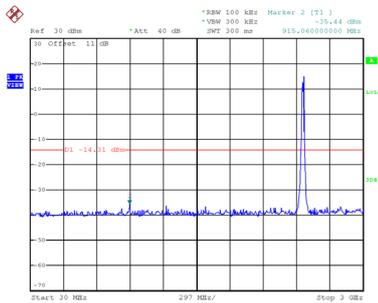


Date: 14.JUL.2021 13:57:20

Date: 14.JUL.2021 13:57:28

Date: 14.JUL.2021 13:57:35


Test Mode TX N(HT20) Mode_Ant. 1

Reference Level-CH01

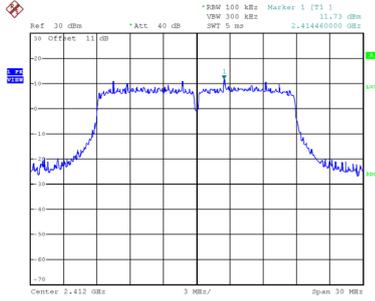


Date: 13.JUL.2021 19:07:56

Reference Level -CH06

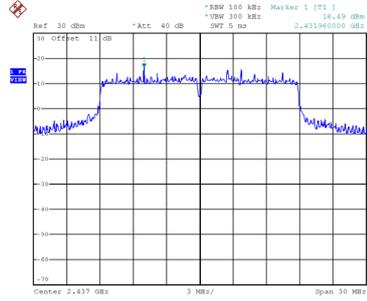


Date: 13.JUL.2021 16:44:51

Reference Level-CH11

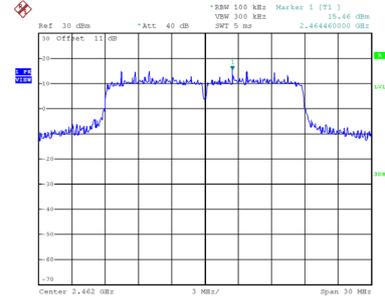


Date: 13.JUL.2021 19:08:54

Bandedge-CH01

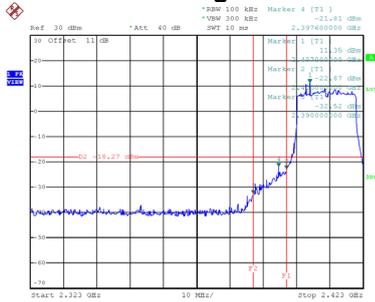




Date: 13.JUL.2021 19:27:32

Bandedge-CH11

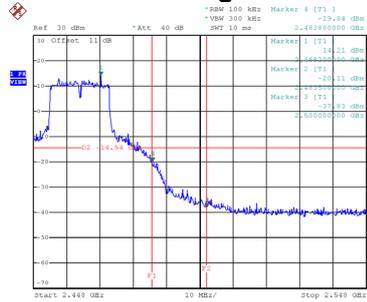

Date: 13.JUL.2021 19:28:36

CH01 – 10th Harmonic of the fundamental frequency

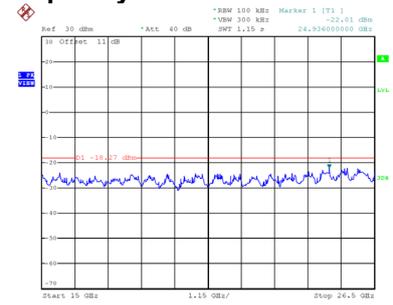
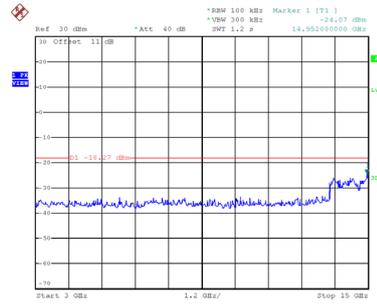
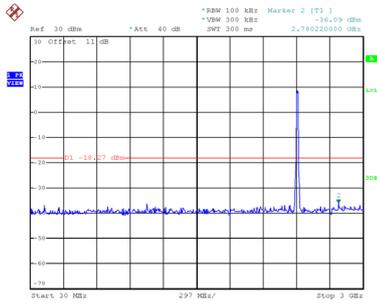


Date: 13.JUL.2021 20:00:52

Date: 13.JUL.2021 20:01:00

Date: 13.JUL.2021 20:01:07

CH06 – 10th Harmonic of the fundamental frequency

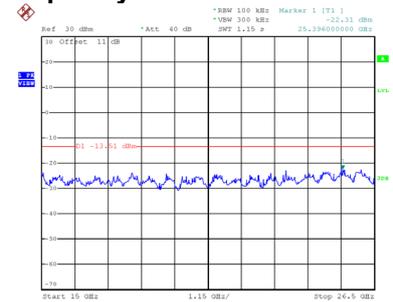
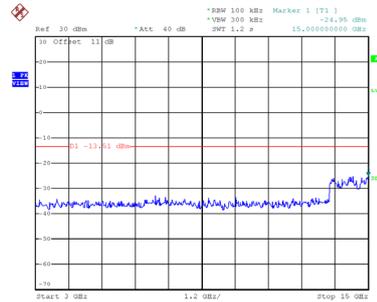
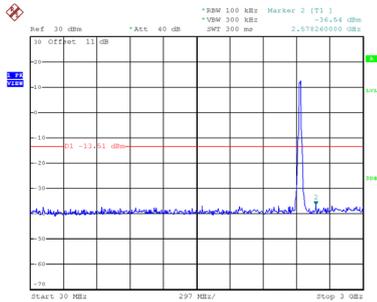


Date: 13.JUL.2021 20:01:44

Date: 13.JUL.2021 20:01:51

Date: 13.JUL.2021 20:01:59

CH11 – 10th Harmonic of the fundamental frequency

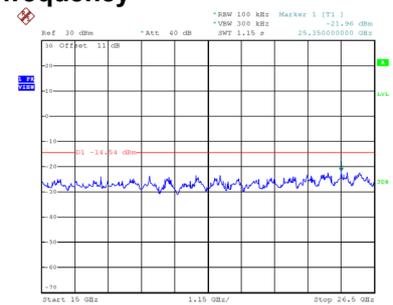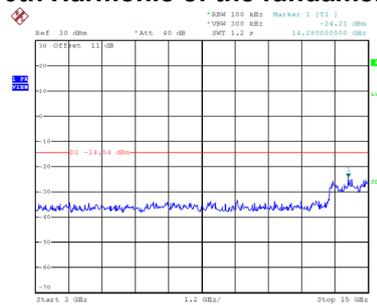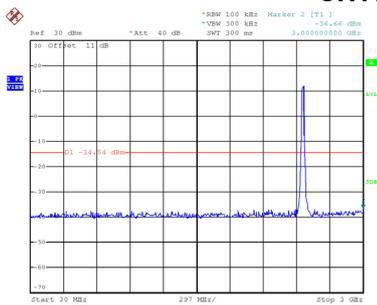

Date: 13.JUL.2021 20:02:34

Date: 13.JUL.2021 20:02:42

Date: 13.JUL.2021 20:02:49