



TEST REPORT

Product Name: Corvus UV
FCC ID: 2AXMRCORV-UV-1
Trademark: Corvus Core
Model Number: CORV-UV-1
Prepared For: Corvus Robotics, Inc.
Address: 425 Medford Street, Boston MA 02129, USA
Manufacturer: Shenzhen RG Information Technology Co., Ltd.
Address: Room 103, Building B New retail digital industry park Xixiang street, Baoan District, Shenzhen, P.R.China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Sep. 11, 2020
Sample tested Date: Sep. 11, 2020 to Sep. 28, 2020
Issue Date: Sep. 28, 2020
Report No.: CTB200928020RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Arron Liu

Reviewed by:

Rita Xiao

Approved by:


Sherwin Qian/ Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

| Test Report Declaration | Page |
|---|------|
| 1. VERSION | 4 |
| 2. TEST SUMMARY | 5 |
| 3. MEASUREMENT UNCERTAINTY | 6 |
| 4. PRODUCT INFORMATION AND TEST SETUP | 7 |
| 4.1 Product Information | 7 |
| 4.2 Test Setup Configuration | 7 |
| 4.3 Support Equipment | 7 |
| 4.4 Channel List | 8 |
| 4.5 Test Mode | 8 |
| 4.6 Test Environment | 8 |
| 5. TEST FACILITY AND TEST INSTRUMENT USED | 9 |
| 5.1 Test Facility | 9 |
| 5.2 Test Instrument Used | 9 |
| 6. AC POWER LINE CONDUCTED EMISSION | 11 |
| 6.1 Block Diagram Of Test Setup | 11 |
| 6.2 Limit | 11 |
| 6.3 Test procedure | 11 |
| 6.4 Test Result | 13 |
| 7. RADIATED SPURIOUS EMISSION | 15 |
| 7.1 Block Diagram Of Test Setup | 15 |
| 7.2 Limit | 15 |
| 7.3 Test procedure | 16 |
| 7.4 Test Result | 17 |
| 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS | 26 |
| 8.1 Block Diagram Of Test Setup | 26 |
| 8.2 Limit | 26 |
| 8.3 Test procedure | 26 |
| 9. CONDUCTED PEAK OUTPUT POWER | 34 |
| 9.1 Block Diagram Of Test Setup | 34 |
| 9.2 Limit | 34 |
| 9.3 Test procedure | 34 |
| 9.4 Test Result | 35 |
| 10. 20DB OCCUPIED BANDWIDTH | 39 |
| 10.1 Block Diagram Of Test Setup | 39 |
| 10.2 Limit | 39 |
| 10.3 Test procedure | 39 |
| 10.4 Test Result | 39 |
| 11. CARRIER FREQUENCIES SEPARATION | 43 |
| 11.1 Block Diagram Of Test Setup | 43 |
| 11.2 Limit | 43 |
| 11.3 Test procedure | 43 |

11.4 Test Result 43

12. HOPPING CHANNEL NUMBER 47

12.1 Block Diagram Of Test Setup 47

12.2 Limit 47

12.3 Test procedure 47

12.4 Test Result 47

13. DWELL TIME 49

13.1 Block Diagram Of Test Setup 49

13.2 Limit 49

13.3 Test procedure 49

13.4 Test Result 50

14. PSEUDORANDOM FREQUENCY 54

14.1 Limit 54

14.2 Test procedure 54

14.3 Test Result 55

15. ANTENNA REQUIREMENT 56

16. EUT PHOTOGRAPHS 57

17. EUT TEST SETUP PHOTOGRAPHS 58

(Note: N/A means not applicable)

1. VERSION

| Report No. | Issue Date | Description | Approved |
|-----------------|---------------|-------------|----------|
| CTB200928020RFX | Sep. 28, 2020 | Original | Valid |

2. TEST SUMMARY

The Product has been tested according to the following specifications:

| Test Item | Test Requirement | Test method | Result |
|--|--|------------------|--------|
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Radiated Spurious emissions | 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |
| Band edge and RF Conducted Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a) | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15 Subpart C Section 15.247 (b)(1) | ANSI C63.10-2013 | PASS |
| 20dB Occupied Bandwidth | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Carrier Frequencies Separation | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Hopping Channel Number | 47 CFR Part 15 Subpart C Section 15.247 (b) | ANSI C63.10-2013 | PASS |
| Dwell Time | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Pseudorandom Frequency Hopping Sequence | 47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002) | ANSI C63.10-2013 | PASS |
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| RF Exposure Evaluation | 47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093 | KDB447498D01v06 | PASS |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Item | Uncertainty |
|--|--------------------|
| Occupancy bandwidth | 54.3kHz |
| Conducted output power Above 1G | 0.9dB |
| Conducted output power below 1G | 0.9dB |
| Power Spectral Density , Conduction | 0.9dB |
| Conduction spurious emissions | 2.0dB |
| Out of band emission | 2.0dB |
| 3m chamber Radiated spurious emission(30MHz-1GHz) | 4.6dB |
| 3m chamber Radiated spurious emission(1GHz-18GHz) | 5.1dB |
| 3m chamber Radiated spurious emission(18GHz-40GHz) | 3.4dB |
| humidity uncertainty | 5.5% |
| Temperature uncertainty | 0.63°C |
| frequency | 1×10^{-7} |
| Conducted Emission (150KHz-30MHz) | 3.2 dB |
| Radiated Emission(30MHz ~ 1000MHz) | 4.8 dB |
| Radiated Emission(1GHz ~6GHz) | 4.9 dB |

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

| | |
|-----------------------|---------------------------------------|
| Model(s): | CORV-UV-1 |
| Model Description: | N/A |
| Bluetooth Version: | Bluetooth 5.0 |
| Hardware Version: | V1.0 |
| Software Version: | V1.0 |
| Operation Frequency: | Bluetooth: 2402-2480MHz |
| Max. RF output power: | Bluetooth: 3.928dBm |
| Type of Modulation: | Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK |
| Antenna installation: | Bluetooth: PCB antenna |
| Antenna Gain: | Bluetooth: 1.0dBi |
| Ratings: | AC 230V/50Hz |

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| | | | | | |
| | | | | | |
| | | | | | |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

| CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) |
|----|-----------------|----|-----------------|----|-----------------|----|-----------------|
| 0 | 2402 | 1 | 2403 | 2 | 2404 | 3 | 2405 |
| 4 | 2406 | 5 | 2407 | 6 | 2408 | 7 | 2409 |
| 8 | 2410 | 9 | 2411 | 10 | 2412 | 11 | 2413 |
| 12 | 2414 | 13 | 2415 | 14 | 2416 | 15 | 2417 |
| 16 | 2418 | 17 | 2419 | 18 | 2420 | 19 | 2421 |
| 20 | 2422 | 21 | 2423 | 22 | 2424 | 23 | 2425 |
| 24 | 2426 | 25 | 2427 | 26 | 2428 | 27 | 2429 |
| 28 | 2430 | 29 | 2431 | 30 | 2432 | 31 | 2433 |
| 32 | 2434 | 33 | 2435 | 34 | 2436 | 35 | 2437 |
| 36 | 2438 | 37 | 2439 | 38 | 2440 | 39 | 2441 |
| 40 | 2442 | 41 | 2443 | 42 | 2444 | 43 | 2445 |
| 44 | 2446 | 45 | 2447 | 46 | 2448 | 47 | 2449 |
| 48 | 2450 | 49 | 2451 | 50 | 2452 | 51 | 2453 |
| 52 | 2454 | 53 | 2455 | 54 | 2456 | 55 | 2457 |
| 56 | 2458 | 57 | 2459 | 58 | 2460 | 59 | 2461 |
| 60 | 2462 | 61 | 2463 | 62 | 2464 | 63 | 2465 |
| 64 | 2466 | 65 | 2467 | 66 | 2468 | 67 | 2469 |
| 68 | 2470 | 69 | 2471 | 70 | 2472 | 71 | 2473 |
| 72 | 2474 | 73 | 2475 | 74 | 2476 | 75 | 2477 |
| 76 | 2478 | 77 | 2479 | 78 | 2480 | 79 | / |

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode | Low channel | Middle channel | High channel |
|---------------------------------------|-------------|----------------|--------------|
| Transmitting (GFSK/π/4DQPSK/8DPSK) | 2402MHz | 2441MHz | 2480MHz |
| Receiving (GFSK/π/4DQPSK/8DPSK) | 2402MHz | 2441MHz | 2480MHz |

4.6 Test Environment

| | |
|----------------------------|-------|
| Humidity(%): | 55 |
| Atmospheric Pressure(kPa): | 101.1 |
| Normal Voltage(AC): | 120V |
| Normal Temperature(°C) | 25 |
| Low Temperature(°C) | 0 |
| High Temperature(°C) | 40 |

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


| Item | Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|---|--------------|---------------------------|--------------|------------------|------------------|
| 1 | Spectrum Analyzer | Agilent | N9020A | MY52090073 | Oct. 17, 2019 | Oct. 16, 2020 |
| 2 | Power Sensor | Agilent | U2021XA | MY56120032 | Nov. 02, 2019 | Nov. 01, 2020 |
| 3 | Power Sensor | Agilent | U2021XA | MY56120034 | Nov. 02, 2019 | Nov. 01, 2020 |
| 4 | Communication test set | R&S | CMW500 | 118735 | Nov. 02, 2019 | Nov. 01, 2020 |
| 5 | Spectrum Analyzer | R&S | FSP40 | 100550 | Nov. 02, 2019 | Nov. 01, 2020 |
| 6 | Signal Generator | Agilent | N5181A | MY49060920 | Nov. 03, 2019 | Nov. 02, 2020 |
| 7 | Signal Generator | Agilent | N5182A | MY47420195 | Nov. 03, 2019 | Nov. 02, 2020 |
| 8 | Communication test set | R&S | CMU200 | 119978 | Nov. 02, 2019 | Nov. 01, 2020 |
| 9 | band rejection filter | Shenxiang | MSF2400-24 83.5MS-1154 | 20181015001 | Nov. 02, 2019 | Nov. 01, 2020 |
| 10 | band rejection filter | Shenxiang | MSF5150-58 50MS-1155 | 20181015001 | Nov. 02, 2019 | Nov. 01, 2020 |
| 11 | band rejection filter | Xingbo | XBLBQ-DZA 120 | 190821-1-1 | Nov. 02, 2019 | Nov. 01, 2020 |
| 12 | BT&WI-FI Automatic test software | Microwave | MTS8310 | Ver. 2.0.0.0 | \ | \ |
| 13 | Rohde & Schwarz SFU Broadcast Test System | R&S | SFU | 101017 | Nov. 02, 2019 | Nov. 01, 2020 |
| 14 | Temperature humidity chamber | Hongjing | TH-80CH | DG-15174 | Nov. 02, 2019 | Nov. 01, 2020 |
| 15 | 234G Automatic test software | Microwave | MTS8200 | Ver. 2.0.0.0 | \ | \ |
| 16 | 966 chamber | C.R.T. | 966 Room | 966 | Nov. 10, 2019 | Nov. 09, 2020 |
| 17 | Receiver | R&S | ESPI | 100362 | Nov. 02, 2019 | Nov. 01, 2020 |

| | | | | | | |
|----|--------------------------|-------------|-----------|------------|---------------|---------------|
| 18 | Amplifier | HP | 8447E | 2945A02747 | Nov. 03, 2019 | Nov. 02, 2020 |
| 19 | Amplifier | Agilent | 8449B | 3008A01838 | Nov. 03, 2019 | Nov. 02, 2020 |
| 20 | TRILOG Broadband Antenna | Schwarzbeck | VULB 9163 | 869 | Nov. 02, 2019 | Nov. 01, 2020 |
| 21 | Horn Antenna | Schwarzbeck | BBHA9120D | 1911 | Nov. 02, 2019 | Nov. 01, 2020 |
| 22 | Software | Fala | EZ-EMC | FA-03A2 RE | \ | \ |
| 23 | 3-Loop Antenna | Daze | ZN30401 | 17014 | Nov. 02, 2019 | Nov. 01, 2020 |
| 24 | loop antenna | ZHINAN | ZN30900A | / | Nov. 02, 2019 | Nov. 01, 2020 |
| 25 | Horn antenna | A/H/System | SAS-574 | 588 | Nov. 02, 2019 | Nov. 01, 2020 |
| 26 | Amplifier | AEROFLEX | / | S/N/ 097 | Nov. 02, 2019 | Nov. 01, 2020 |

| Conducted emissions Test | | | | | | |
|--------------------------|-------------------|----------------|----------|---------------|---------------|---------------|
| 27 | Equipment | Manufacturer | Model# | Serial# | Last Cal. | Next Cal. |
| 28 | AMN | ROHDE&SC HWARZ | ESH3-Z5 | 831551852 | Nov. 02, 2019 | Nov. 01, 2020 |
| 29 | Pulse limiter | ROHDE&SC HWARZ | ESH3Z2 | 357881052 | Nov. 02, 2019 | Nov. 01, 2020 |
| 30 | EMI TEST RECEIVER | ROHDE&SC HWARZ | ESCS30 | 834115/006 | Nov. 02, 2019 | Nov. 01, 2020 |
| 31 | Coaxial cable | ZDECL | Z302S | 18091904 | Nov. 02, 2019 | Nov. 01, 2020 |
| 32 | ISN | TESEQ | NTFM8158 | NTFM8158# 183 | Nov. 02, 2019 | Nov. 01, 2020 |
| 33 | EMI TEST RECEIVER | ROHDE&SC HWARZ | ESCI | 10428 | Nov. 02, 2019 | Nov. 01, 2020 |
| 34 | Software | Fala | EZ-EMC | EMC-CON 3A1.1 | \ | \ |

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

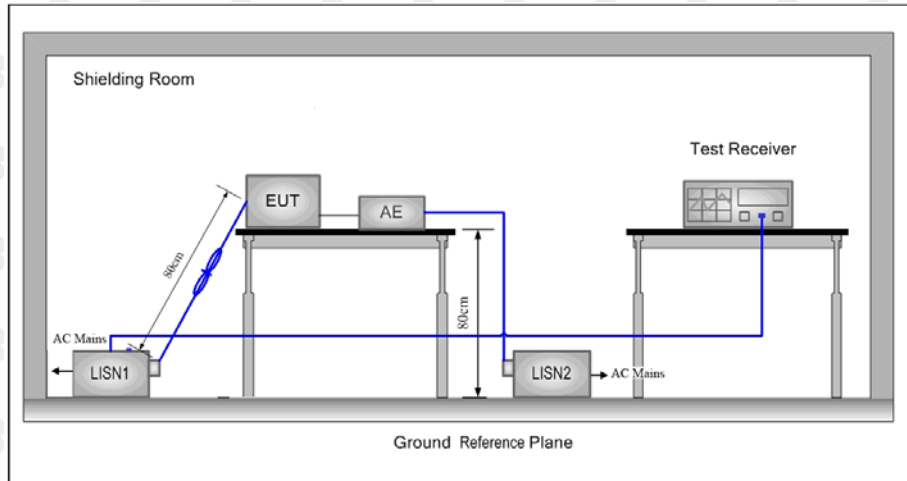

6.2 Limit

| Frequency (MHz) | Maximum RF Line Voltage (dB μ V) | | | |
|-----------------|--------------------------------------|------|---------|--------|
| | CLASS A | | CLASS B | |
| | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56* | 56-46* |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was


between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

100.0 dBuV

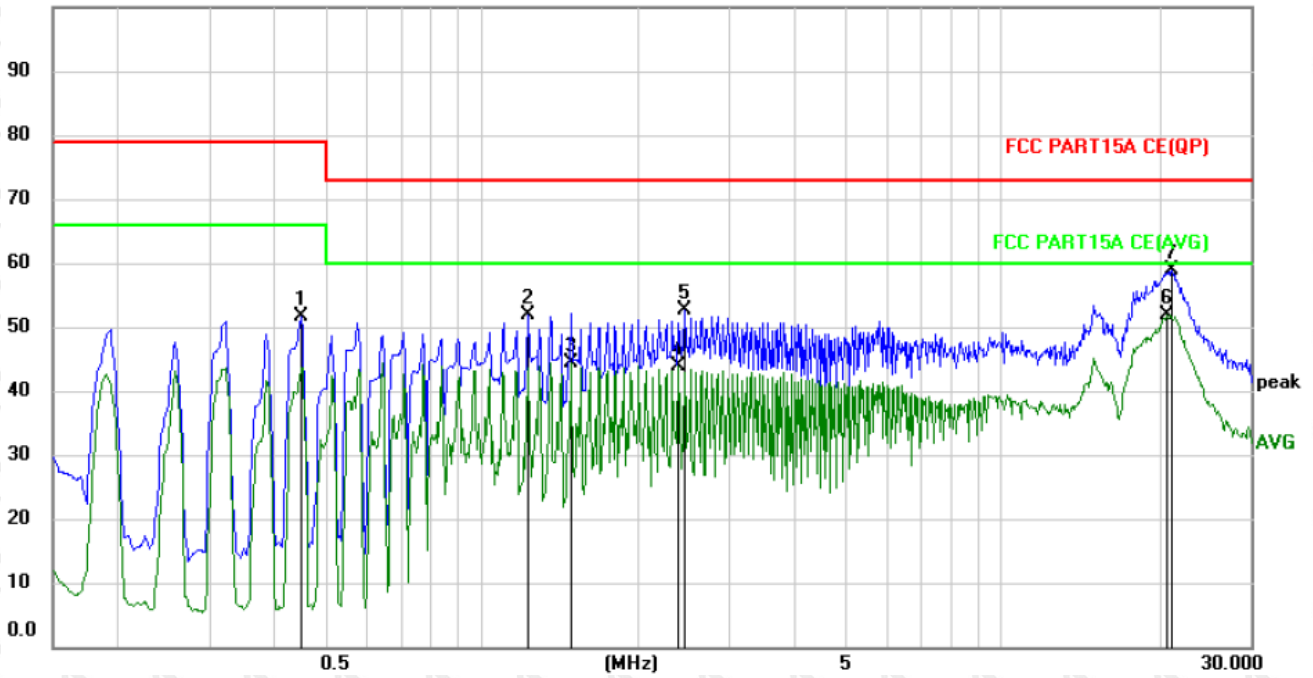


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Margin dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|
| 1 | | 0.4500 | 41.43 | 10.08 | 51.51 | 79.00 | -27.49 | peak |
| 2 | | 1.2300 | 41.72 | 10.23 | 51.95 | 73.00 | -21.05 | peak |
| 3 | | 1.4860 | 34.19 | 10.23 | 44.42 | 60.00 | -15.58 | AVG |
| 4 | | 2.3900 | 33.70 | 10.25 | 43.95 | 60.00 | -16.05 | AVG |
| 5 | | 2.4539 | 42.38 | 10.25 | 52.63 | 73.00 | -20.37 | peak |
| 6 | * | 20.8060 | 41.10 | 10.78 | 51.88 | 60.00 | -8.12 | AVG |
| 7 | | 21.1900 | 48.01 | 10.78 | 58.79 | 73.00 | -14.21 | peak |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement - Limit

N:

100.0 dBuV

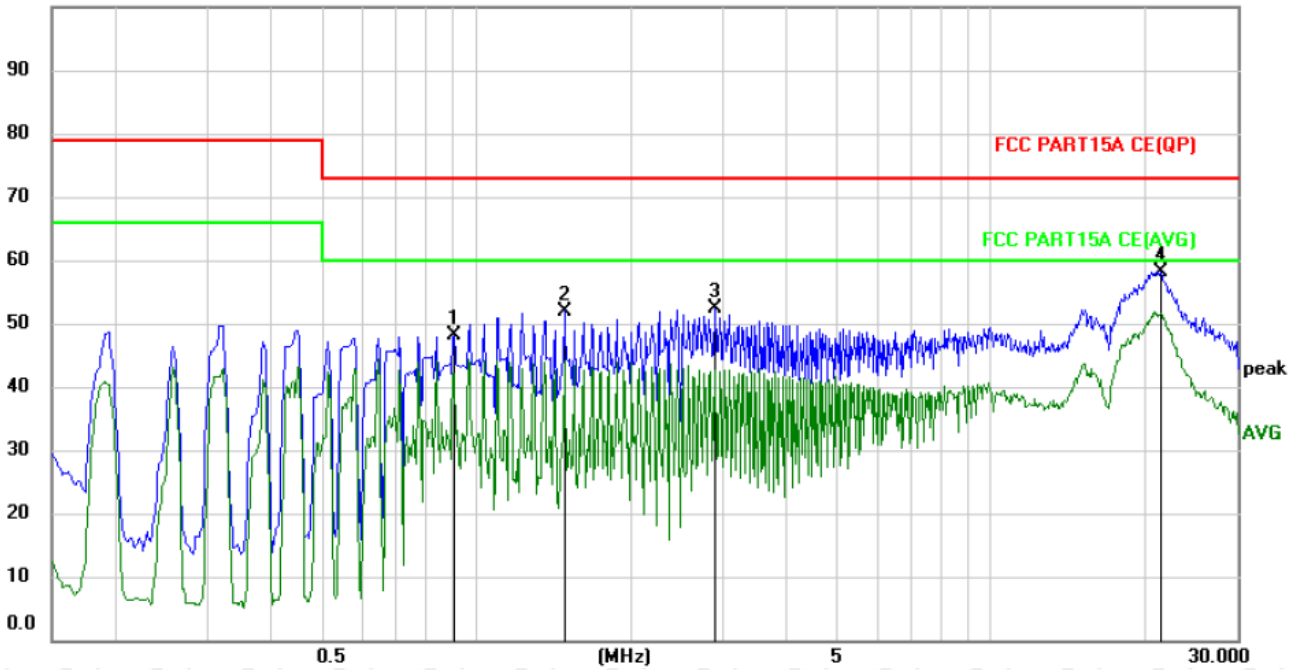

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | | 0.9060 | 37.92 | 10.18 | 48.10 | 73.00 | -24.90 | peak |
| 2 | | 1.4860 | 41.85 | 10.15 | 52.00 | 73.00 | -21.00 | peak |
| 3 | | 2.9060 | 42.02 | 10.25 | 52.27 | 73.00 | -20.73 | peak |
| 4 | * | 21.2820 | 47.46 | 10.77 | 58.23 | 73.00 | -14.77 | peak |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

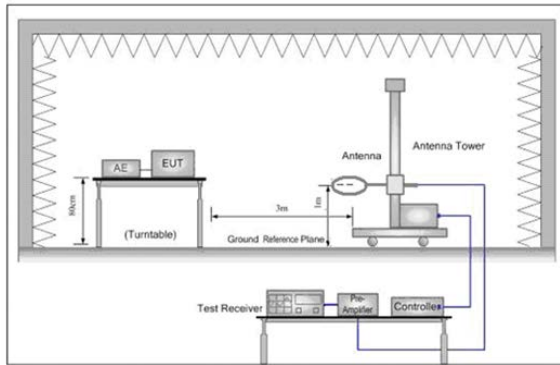


Figure 1. Below 30MHz

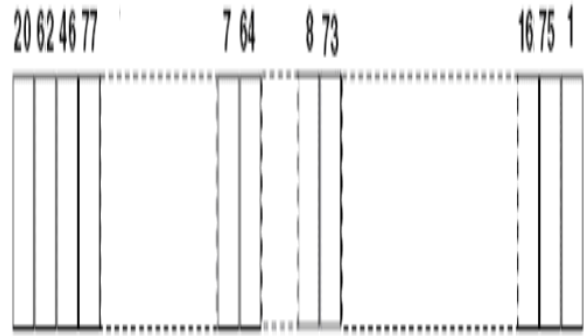


Figure 2. 30MHz to 1GHz

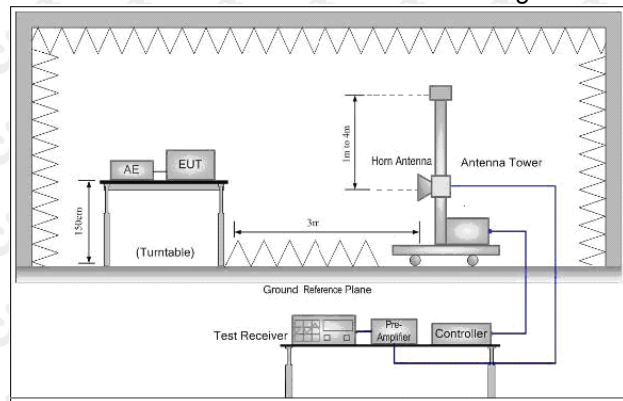


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

| Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
|-------------------|----------------------------------|----------------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F (kHz) | - | - | 300 |
| 0.490MHz-1.705MHz | 24000/F (kHz) | - | - | 30 |
| 1.705MHz-30MHz | 30 | - | - | 30 |
| 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1GHz | 500 | 54.0 | Average | 3 |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

| Frequency | Detector | RBW | VBW | Remark |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak | 10kHz | 30KHz | Peak |
| 0.009MHz-0.090MHz | Average | 10kHz | 30KHz | Average |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30KHz | Quasi-peak |
| 0.110MHz-0.490MHz | Peak | 10kHz | 30KHz | Peak |
| 0.110MHz-0.490MHz | Average | 10kHz | 30KHz | Average |
| 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| 30MHz-1GHz | Quasi-peak | 120 kHz | 300KHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | Peak | 1MHz | 10Hz | Average |

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

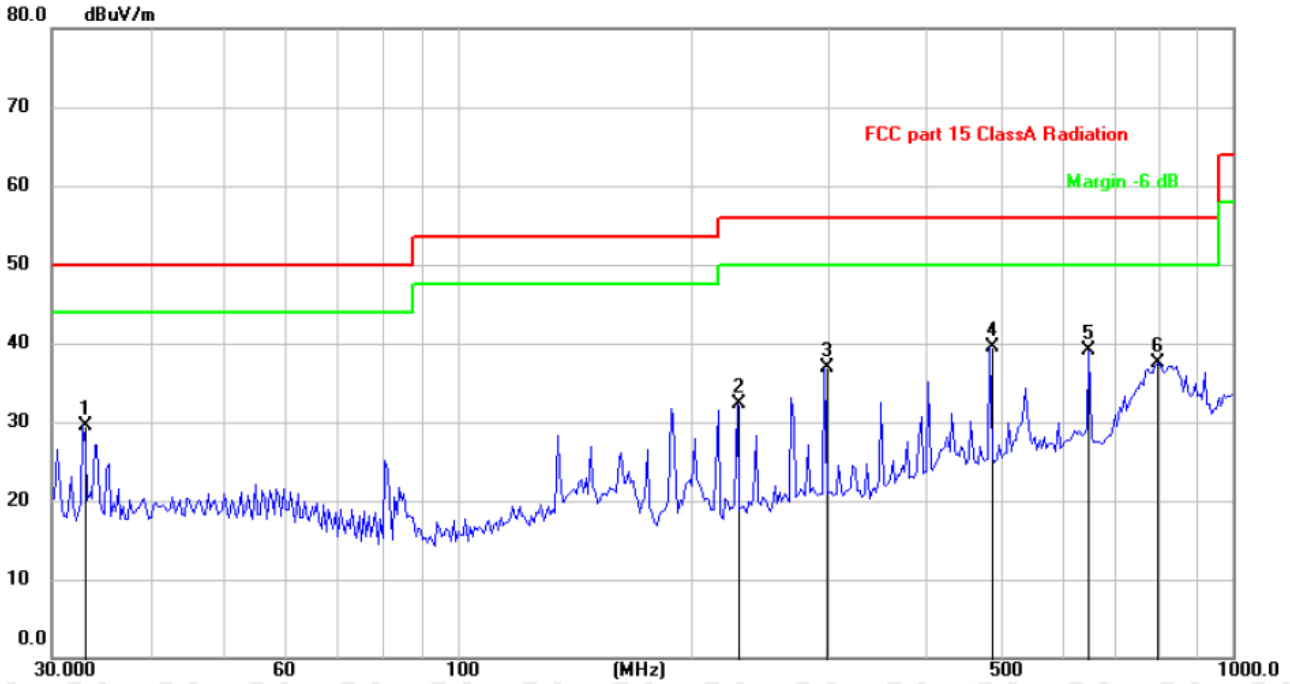

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Margin dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|--------------|----------|
| 1 | | 32.8637 | 36.64 | -7.09 | 29.55 | 50.00 | -20.45 | peak |
| 2 | | 229.2931 | 39.76 | -7.42 | 32.34 | 56.00 | -23.66 | peak |
| 3 | | 297.2241 | 42.53 | -5.72 | 36.81 | 56.00 | -19.19 | peak |
| 4 | * | 485.6093 | 39.72 | -0.28 | 39.44 | 56.00 | -16.56 | peak |
| 5 | | 651.9417 | 36.11 | 2.98 | 39.09 | 56.00 | -16.91 | peak |
| 6 | | 798.9797 | 31.79 | 5.76 | 37.55 | 56.00 | -18.45 | peak |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Antenna polarity: V

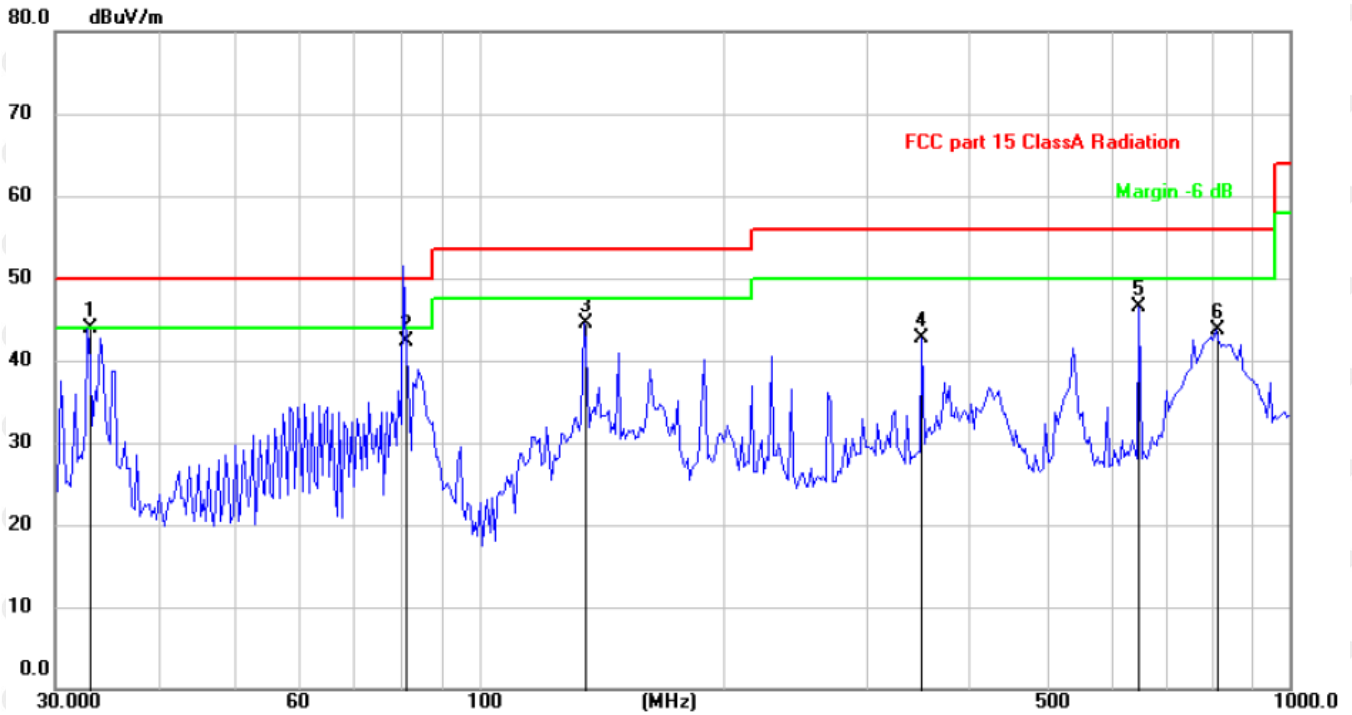

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Margin dB | Detector | Antenna Height cm | Table Degree degree |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|--------------|----------|-------------------------|---------------------------|
| 1 | * | 32.8637 | 51.00 | -7.09 | 43.91 | 50.00 | -6.09 | peak | | |
| 2 | | 81.0042 | 52.74 | -10.44 | 42.30 | 50.00 | -7.70 | QP | 100 | 0 |
| 3 | | 134.5592 | 51.41 | -6.84 | 44.57 | 53.50 | -8.93 | peak | | |
| 4 | | 351.7079 | 46.39 | -3.60 | 42.79 | 56.00 | -13.21 | peak | | |
| 5 | | 651.9417 | 43.43 | 2.98 | 46.41 | 56.00 | -9.59 | peak | | |
| 6 | | 810.2654 | 37.79 | 5.90 | 43.69 | 56.00 | -12.31 | peak | | |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

 CH Low (2402MHz)
 Horizontal:

| Frequency (MHz) | Reading Result (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4804 | 57.77 | -3.65 | 54.12 | 74.00 | -19.88 | peak |
| 4804 | 49.30 | -3.65 | 45.65 | 54.00 | -8.35 | AVG |
| 7206 | 60.66 | -0.95 | 59.71 | 74.00 | -14.29 | peak |
| 7206 | 41.98 | -0.95 | 41.03 | 54.00 | -12.97 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency (MHz) | Reading Result (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4804 | 58.22 | -3.65 | 54.57 | 74.00 | -19.43 | peak |
| 4804 | 49.14 | -3.65 | 45.49 | 54.00 | -8.51 | AVG |
| 7206 | 61.39 | -0.95 | 60.44 | 74.00 | -13.56 | peak |
| 7206 | 41.97 | -0.95 | 41.02 | 54.00 | -12.98 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|----------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 4882.00 | 58.02 | -3.54 | 54.48 | 74.00 | -19.52 | peak |
| 4882.00 | 49.47 | -3.54 | 45.93 | 54.00 | -8.07 | AVG |
| 7323.00 | 57.37 | -0.81 | 56.56 | 74.00 | -17.44 | peak |
| 7323.00 | 42.00 | -0.81 | 41.19 | 54.00 | -12.81 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|----------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 4882.00 | 59.10 | -3.54 | 55.56 | 74.00 | -18.44 | peak |
| 4882.00 | 49.72 | -3.54 | 46.18 | 54.00 | -7.82 | AVG |
| 7323.00 | 58.39 | -0.81 | 57.58 | 74.00 | -16.42 | peak |
| 7323.00 | 42.34 | -0.81 | 41.53 | 54.00 | -12.47 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

| Frequency (MHz) | Reading Result (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4960 | 58.78 | -3.43 | 55.35 | 74.00 | -18.65 | peak |
| 4960 | 49.72 | -3.44 | 46.28 | 54.00 | -7.72 | AVG |
| 7440 | 61.29 | -0.77 | 60.52 | 74.00 | -13.48 | peak |
| 7440 | 41.59 | -0.77 | 40.82 | 54.00 | -13.18 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency (MHz) | Reading Result (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|--------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4960 | 57.90 | -3.43 | 54.47 | 74.00 | -19.53 | peak |
| 4960 | 47.70 | -3.44 | 44.26 | 54.00 | -9.74 | AVG |
| 7440 | 60.51 | -0.77 | 59.74 | 74.00 | -14.26 | peak |
| 7440 | 42.32 | -0.77 | 41.55 | 54.00 | -12.45 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz ◦
- (2). All modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK, $\pi/4$ DQPSK, 8DPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

hopping
 Operation Mode: TX CH Low (2402MHz)
 Horizontal (Worst case)

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2310.00 | 57.18 | -5.81 | 51.37 | 74.00 | -22.63 | peak |
| 2310.00 | / | -5.81 | / | 54.00 | / | AVG |
| 2390.00 | 56.57 | -5.84 | 50.73 | 74.00 | -23.27 | peak |
| 2390.00 | / | -5.84 | / | 54.00 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2310.00 | 56.20 | -5.81 | 50.39 | 74.00 | -23.61 | peak |
| 2310.00 | / | -5.81 | / | 54.00 | / | AVG |
| 2390.00 | 56.26 | -5.84 | 50.42 | 74.00 | -23.58 | peak |
| 2390.00 | / | -5.84 | / | 54.00 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2483.50 | 55.78 | -5.81 | 49.97 | 74.00 | -24.03 | peak |
| 2483.50 | / | -5.81 | / | 54.00 | / | AVG |
| 2500.00 | 53.63 | -6.06 | 47.57 | 74.00 | -26.43 | peak |
| 2500.00 | / | -6.06 | / | 54.00 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|--|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2483.50 | 56.87 | -5.81 | 51.06 | 74.00 | -22.94 | peak |
| 2483.50 | / | -5.81 | / | 54.00 | / | AVG |
| 2500.00 | 53.50 | -6.06 | 47.44 | 74.00 | -26.56 | peak |
| 2500.00 | / | -6.06 | / | 54.00 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case)

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2310.00 | 56.33 | -5.81 | 50.52 | 74.00 | -23.48 | peak |
| 2310.00 | / | -5.81 | / | 54.00 | / | AVG |
| 2390.00 | 54.55 | -5.84 | 48.71 | 74.00 | -25.29 | peak |
| 2390.00 | / | -5.84 | / | 54.00 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2310.00 | 56.25 | -5.81 | 50.44 | 74.00 | -23.56 | peak |
| 2310.00 | / | -5.81 | / | 54.00 | / | AVG |
| 2390.00 | 54.73 | -5.84 | 48.89 | 74.00 | -25.11 | peak |
| 2390.00 | / | -5.84 | / | 54.00 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2483.50 | 57.65 | -5.81 | 51.84 | 74.00 | -22.16 | peak |
| 2483.50 | / | -5.81 | / | 54.00 | / | AVG |
| 2500.00 | 57.13 | -6.06 | 51.07 | 74.00 | -22.93 | peak |
| 2500.00 | / | -6.06 | / | 54.00 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 2483.50 | 55.12 | -5.81 | 49.31 | 74.00 | -24.69 | peak |
| 2483.50 | / | -5.81 | / | 54.00 | / | AVG |
| 2500.00 | 53.49 | -6.06 | 47.43 | 74.00 | -26.57 | peak |
| 2500.00 | / | -6.06 | / | 54.00 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

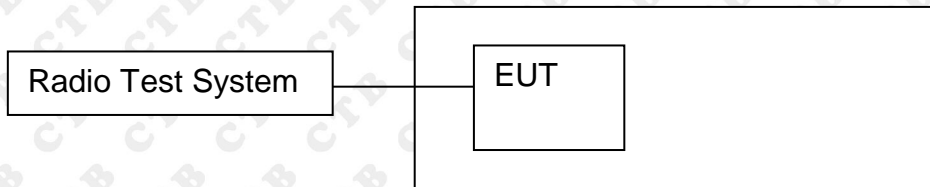


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Blow 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

8.4 Test Result

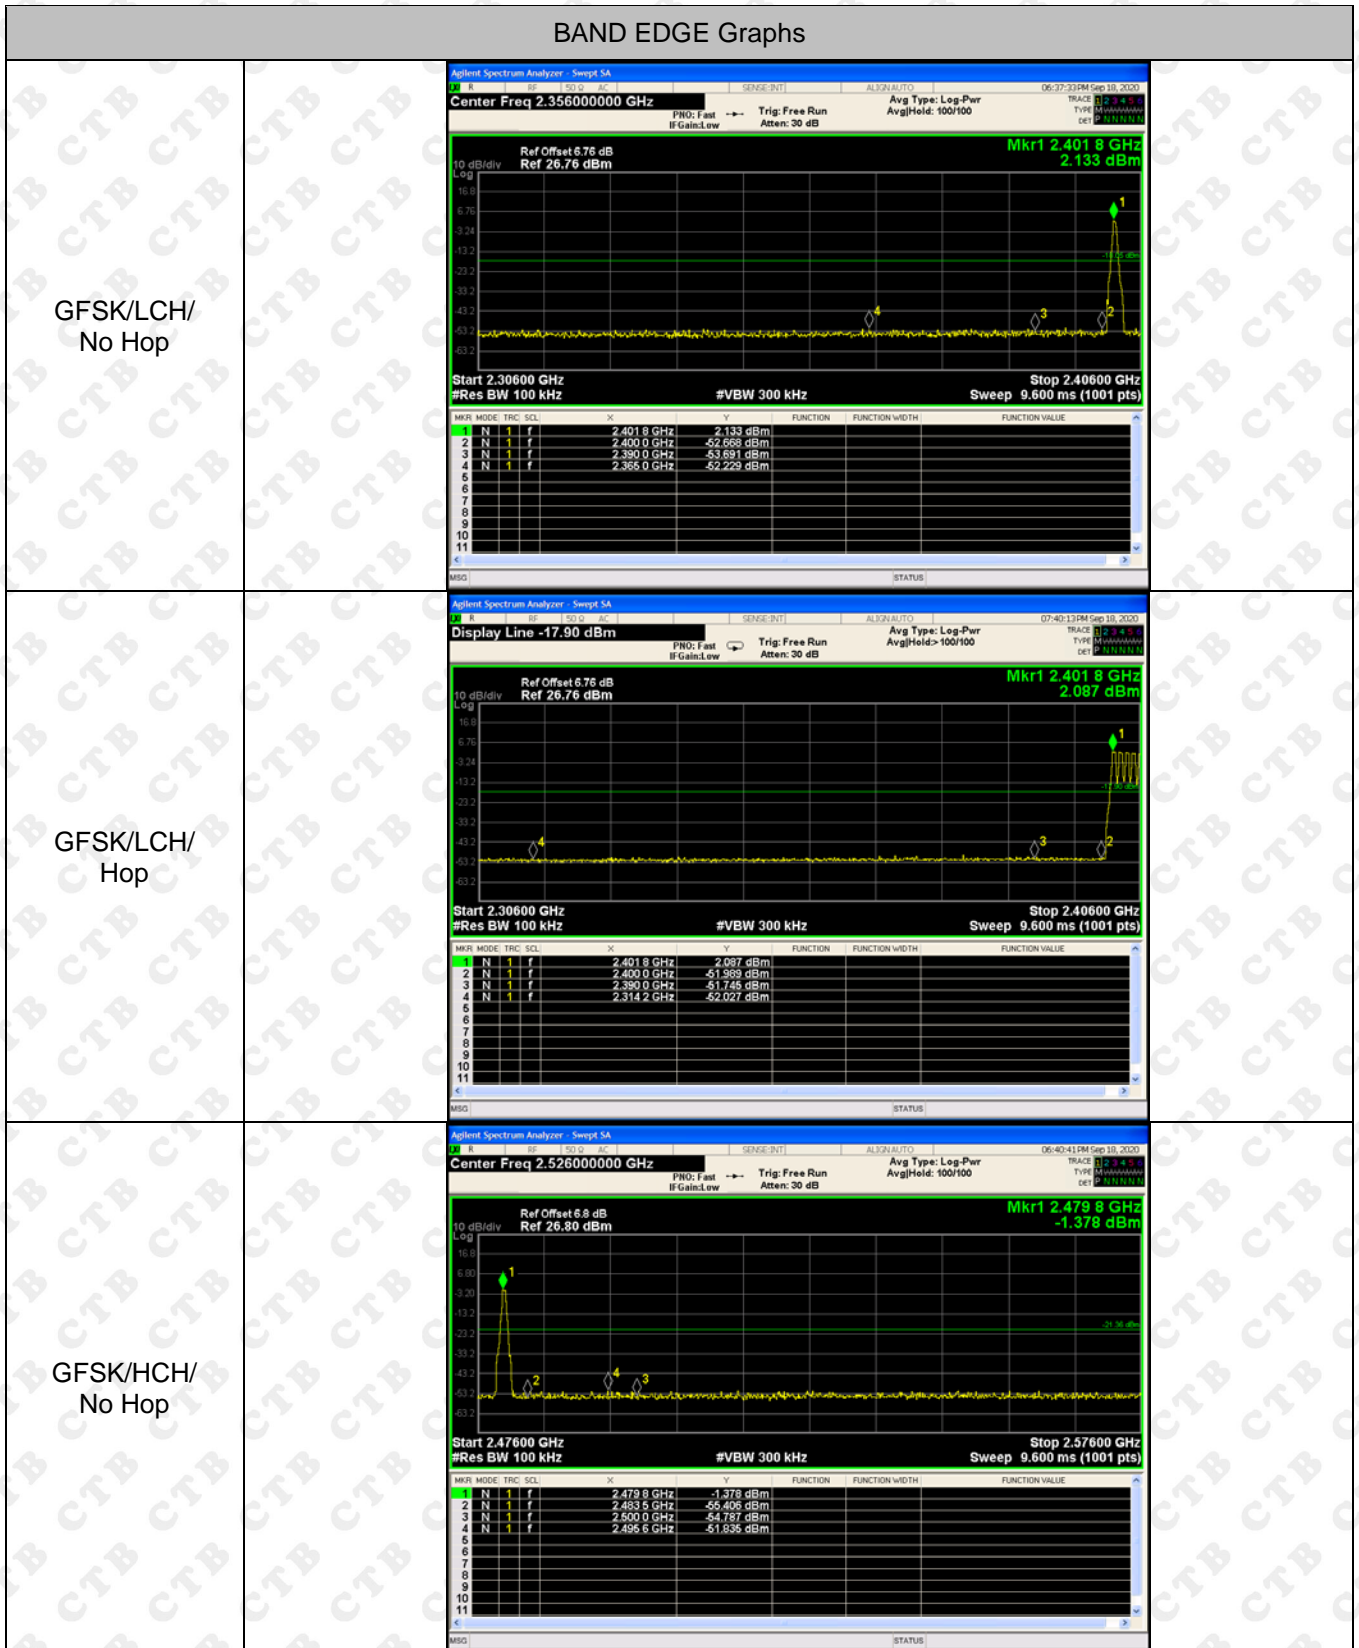

| <p>GFSK/HCH/ Hop</p> |  <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 GHz</td> <td>-1.223 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 GHz</td> <td>-53.364 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 GHz</td> <td>-52.574 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.480 GHz | -1.223 dBm | | | | 2 | N | 1 | f | 2.483 GHz | -53.364 dBm | | | | 3 | N | 1 | f | 2.493 GHz | -52.574 dBm | | | | | | | | | | | | |
|--|--|-----|------|-----------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|-----------|------------|--|--|--|---|---|---|---|-----------|-------------|--|--|--|---|---|---|---|-----------|-------------|--|--|--|---|---|---|---|-----------|-------------|--|--|--|
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.480 GHz | -1.223 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.483 GHz | -53.364 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.493 GHz | -52.574 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/LCH/ No Hop</p> |  <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 GHz</td> <td>1.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 GHz</td> <td>-51.212 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 GHz</td> <td>-53.850 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.377 GHz</td> <td>-51.811 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.402 GHz | 1.427 dBm | | | | 2 | N | 1 | f | 2.400 GHz | -51.212 dBm | | | | 3 | N | 1 | f | 2.390 GHz | -53.850 dBm | | | | 4 | N | 1 | f | 2.377 GHz | -51.811 dBm | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.402 GHz | 1.427 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.400 GHz | -51.212 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.390 GHz | -53.850 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.377 GHz | -51.811 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/LCH/ Hop</p> |  <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 GHz</td> <td>1.981 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 GHz</td> <td>-50.411 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 GHz</td> <td>-52.419 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.346 GHz</td> <td>-51.417 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.401 GHz | 1.981 dBm | | | | 2 | N | 1 | f | 2.400 GHz | -50.411 dBm | | | | 3 | N | 1 | f | 2.390 GHz | -52.419 dBm | | | | 4 | N | 1 | f | 2.346 GHz | -51.417 dBm | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.401 GHz | 1.981 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.400 GHz | -50.411 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.390 GHz | -52.419 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.346 GHz | -51.417 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| <p>$\pi/4$DQPSK/HCH/ No Hop</p> |  <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 9 GHz</td> <td></td> <td></td> <td>-1.573 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td></td> <td></td> <td>-53.700 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 0 GHz</td> <td></td> <td></td> <td>-55.145 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.495 5 GHz</td> <td></td> <td></td> <td>-52.489 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.479 9 GHz | | | -1.573 dBm | 2 | N | 1 | f | 2.483 5 GHz | | | -53.700 dBm | 3 | N | 1 | f | 2.490 0 GHz | | | -55.145 dBm | 4 | N | 1 | f | 2.495 5 GHz | | | -52.489 dBm | 5 | | | | | | | | 6 | | | | | | | | 7 | | | | | | | | 8 | | | | | | | | 9 | | | | | | | | 10 | | | | | | | | 11 | | | | | | | |
|--|--|----------|-----|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|-------------|--|--|------------|---|---|---|---|-------------|--|--|-------------|---|---|---|---|-------------|--|--|-------------|---|---|---|---|-------------|--|--|-------------|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|----|--|--|--|--|--|--|--|----|--|--|--|--|--|--|--|
| MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.479 9 GHz | | | -1.573 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.483 5 GHz | | | -53.700 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.490 0 GHz | | | -55.145 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.495 5 GHz | | | -52.489 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/HCH/ Hop</p> |  <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.477 1 GHz</td> <td></td> <td></td> <td>-2.329 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td></td> <td></td> <td>-53.585 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td></td> <td></td> <td>-53.671 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.495 4 GHz</td> <td></td> <td></td> <td>-52.044 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.477 1 GHz | | | -2.329 dBm | 2 | N | 1 | f | 2.483 5 GHz | | | -53.585 dBm | 3 | N | 1 | f | 2.500 0 GHz | | | -53.671 dBm | 4 | N | 1 | f | 2.495 4 GHz | | | -52.044 dBm | 5 | | | | | | | | 6 | | | | | | | | 7 | | | | | | | | 8 | | | | | | | | 9 | | | | | | | | 10 | | | | | | | | 11 | | | | | | | |
| MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.477 1 GHz | | | -2.329 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.483 5 GHz | | | -53.585 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.500 0 GHz | | | -53.671 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.495 4 GHz | | | -52.044 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK/LCH/ No Hop</p> |  <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 0 GHz</td> <td></td> <td></td> <td>-0.104 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td></td> <td></td> <td>-51.096 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 0 GHz</td> <td></td> <td></td> <td>-54.198 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 9 GHz</td> <td></td> <td></td> <td>-51.641 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.402 0 GHz | | | -0.104 dBm | 2 | N | 1 | f | 2.400 0 GHz | | | -51.096 dBm | 3 | N | 1 | f | 2.390 0 GHz | | | -54.198 dBm | 4 | N | 1 | f | 2.399 9 GHz | | | -51.641 dBm | 5 | | | | | | | | 6 | | | | | | | | 7 | | | | | | | | 8 | | | | | | | | 9 | | | | | | | | 10 | | | | | | | | 11 | | | | | | | |
| MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.402 0 GHz | | | -0.104 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.400 0 GHz | | | -51.096 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.390 0 GHz | | | -54.198 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.399 9 GHz | | | -51.641 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| <p>8DPSK /LCH/ Hop</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Display Line -18.10 dBm</p> <p>Center Freq 2.40200000 GHz</p> <p>Mkr1 2.402 0 GHz 1.986 dBm</p> <p>Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40600 GHz Sweep 9.600 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 0 GHz</td> <td></td> <td></td> <td>1.986 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td></td> <td></td> <td>-48.968 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 0 GHz</td> <td></td> <td></td> <td>-52.287 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.381 7 GHz</td> <td></td> <td></td> <td>-51.650 dBm</td> </tr> </tbody> </table> | MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.402 0 GHz | | | 1.986 dBm | 2 | N | 1 | f | 2.400 0 GHz | | | -48.968 dBm | 3 | N | 1 | f | 2.390 0 GHz | | | -52.287 dBm | 4 | N | 1 | f | 2.381 7 GHz | | | -51.650 dBm |
|-------------------------------|---|----------|-----|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|-------------|--|--|------------|---|---|---|---|-------------|--|--|-------------|---|---|---|---|-------------|--|--|-------------|---|---|---|---|-------------|--|--|-------------|
| MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.402 0 GHz | | | 1.986 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.400 0 GHz | | | -48.968 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.390 0 GHz | | | -52.287 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.381 7 GHz | | | -51.650 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK /HCH/ No Hop</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.526000000 GHz</p> <p>Mkr1 2.480 1 GHz -2.626 dBm</p> <p>Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 1 GHz</td> <td></td> <td></td> <td>-2.626 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td></td> <td></td> <td>-53.832 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td></td> <td></td> <td>-54.299 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.496 4 GHz</td> <td></td> <td></td> <td>-51.624 dBm</td> </tr> </tbody> </table> | MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.480 1 GHz | | | -2.626 dBm | 2 | N | 1 | f | 2.483 5 GHz | | | -53.832 dBm | 3 | N | 1 | f | 2.500 0 GHz | | | -54.299 dBm | 4 | N | 1 | f | 2.496 4 GHz | | | -51.624 dBm |
| MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.480 1 GHz | | | -2.626 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.483 5 GHz | | | -53.832 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.500 0 GHz | | | -54.299 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.496 4 GHz | | | -51.624 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK /HCH/ Hop</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Display Line -23.00 dBm</p> <p>Center Freq 2.477000000 GHz</p> <p>Mkr1 2.477 1 GHz -3.014 dBm</p> <p>Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.57600 GHz Sweep 9.600 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.477 1 GHz</td> <td></td> <td></td> <td>-3.014 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 5 GHz</td> <td></td> <td></td> <td>-53.733 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 0 GHz</td> <td></td> <td></td> <td>-52.775 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 7 GHz</td> <td></td> <td></td> <td>-52.058 dBm</td> </tr> </tbody> </table> | MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.477 1 GHz | | | -3.014 dBm | 2 | N | 1 | f | 2.483 5 GHz | | | -53.733 dBm | 3 | N | 1 | f | 2.500 0 GHz | | | -52.775 dBm | 4 | N | 1 | f | 2.494 7 GHz | | | -52.058 dBm |
| MKR MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.477 1 GHz | | | -3.014 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.483 5 GHz | | | -53.733 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.500 0 GHz | | | -52.775 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.494 7 GHz | | | -52.058 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

RF Conducted Spurious Emissions Graphs




| <p>$\pi/4$DQPSK /LCH</p> | <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4022 GHz</td> <td>-1.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6398 GHz</td> <td>-47.234 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7624 GHz</td> <td>-60.448 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3366 GHz</td> <td>-60.401 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6105 GHz</td> <td>-61.708 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.4022 GHz | -1.427 dBm | | | | 2 | N | 1 | f | 24.6398 GHz | -47.234 dBm | | | | 3 | N | 1 | f | 4.7624 GHz | -60.448 dBm | | | | 4 | N | 1 | f | 7.3366 GHz | -60.401 dBm | | | | 5 | N | 1 | f | 9.6105 GHz | -61.708 dBm | | | | |
|-------------------------------------|--|------|------|-------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|------------|------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|------------|-------------|--|--|--|---|---|---|---|------------|-------------|--|--|--|---|---|---|---|------------|-------------|--|--|--|--|
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.4022 GHz | -1.427 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 24.6398 GHz | -47.234 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 4.7624 GHz | -60.448 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 7.3366 GHz | -60.401 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | N | 1 | f | 9.6105 GHz | -61.708 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/MCH</p> | <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4409 GHz</td> <td>0.670 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6398 GHz</td> <td>-47.805 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8817 GHz</td> <td>-60.755 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4957 GHz</td> <td>-60.539 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6668 GHz</td> <td>-60.962 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.4409 GHz | 0.670 dBm | | | | 2 | N | 1 | f | 24.6398 GHz | -47.805 dBm | | | | 3 | N | 1 | f | 4.8817 GHz | -60.755 dBm | | | | 4 | N | 1 | f | 7.4957 GHz | -60.539 dBm | | | | 5 | N | 1 | f | 9.6668 GHz | -60.962 dBm | | | | |
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.4409 GHz | 0.670 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 24.6398 GHz | -47.805 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 4.8817 GHz | -60.755 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 7.4957 GHz | -60.539 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | N | 1 | f | 9.6668 GHz | -60.962 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/HCH</p> | <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-4.678 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6242 GHz</td> <td>-47.882 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8928 GHz</td> <td>-60.938 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4784 GHz</td> <td>-60.278 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9993 GHz</td> <td>-61.451 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.4802 GHz | -4.678 dBm | | | | 2 | N | 1 | f | 24.6242 GHz | -47.882 dBm | | | | 3 | N | 1 | f | 4.8928 GHz | -60.938 dBm | | | | 4 | N | 1 | f | 7.4784 GHz | -60.278 dBm | | | | 5 | N | 1 | f | 9.9993 GHz | -61.451 dBm | | | | |
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.4802 GHz | -4.678 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 24.6242 GHz | -47.882 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 4.8928 GHz | -60.938 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 7.4784 GHz | -60.278 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | N | 1 | f | 9.9993 GHz | -61.451 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| <p>8DPSK/LCH</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 6.76 dB Ref 16.76 dBm</p> <p>Mkr1 2.402 2 GHz 0.288 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 2 GHz</td> <td>0.288 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.645 1 GHz</td> <td>-46.855 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.833 5 GHz</td> <td>-61.604 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.040 3 GHz</td> <td>-60.954 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.573 5 GHz</td> <td>-61.532 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.402 2 GHz | 0.288 dBm | | | | 2 | N | 1 | f | 24.645 1 GHz | -46.855 dBm | | | | 3 | N | 1 | f | 4.833 5 GHz | -61.604 dBm | | | | 4 | N | 1 | f | 7.040 3 GHz | -60.954 dBm | | | | 5 | N | 1 | f | 9.573 5 GHz | -61.532 dBm | | | | |
|------------------|--|------|------|--------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|-------------|------------|--|--|--|---|---|---|---|--------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|-------------|-------------|--|--|--|---|---|---|---|--------------|-------------|--|--|--|--|
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.402 2 GHz | 0.288 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 24.645 1 GHz | -46.855 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 4.833 5 GHz | -61.604 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 7.040 3 GHz | -60.954 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | N | 1 | f | 9.573 5 GHz | -61.532 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK/MCH</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 6.83 dB Ref 16.83 dBm</p> <p>Mkr1 2.440 9 GHz -0.192 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 9 GHz</td> <td>-0.192 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.647 9 GHz</td> <td>-47.535 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.892 3 GHz</td> <td>-60.374 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.455 1 GHz</td> <td>-60.015 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.905 6 GHz</td> <td>-60.448 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.440 9 GHz | -0.192 dBm | | | | 2 | N | 1 | f | 24.647 9 GHz | -47.535 dBm | | | | 3 | N | 1 | f | 4.892 3 GHz | -60.374 dBm | | | | 4 | N | 1 | f | 7.455 1 GHz | -60.015 dBm | | | | 5 | N | 1 | f | 9.905 6 GHz | -60.448 dBm | | | | |
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.440 9 GHz | -0.192 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 24.647 9 GHz | -47.535 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 4.892 3 GHz | -60.374 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 7.455 1 GHz | -60.015 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | N | 1 | f | 9.905 6 GHz | -60.448 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK/HCH</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 12.515000000 GHz</p> <p>Ref Offset 6.8 dB Ref 16.80 dBm</p> <p>Mkr1 2.480 2 GHz -4.965 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 25.00 GHz Sweep 2.387 s (40001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-4.965 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.688 6 GHz</td> <td>-48.232 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.990 3 GHz</td> <td>-57.709 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.420 5 GHz</td> <td>-60.616 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.105 4 GHz</td> <td>-61.187 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.480 2 GHz | -4.965 dBm | | | | 2 | N | 1 | f | 24.688 6 GHz | -48.232 dBm | | | | 3 | N | 1 | f | 4.990 3 GHz | -57.709 dBm | | | | 4 | N | 1 | f | 7.420 5 GHz | -60.616 dBm | | | | 5 | N | 1 | f | 10.105 4 GHz | -61.187 dBm | | | | |
| MKR | MODE | TRIG | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.480 2 GHz | -4.965 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 24.688 6 GHz | -48.232 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 4.990 3 GHz | -57.709 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 7.420 5 GHz | -60.616 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | N | 1 | f | 10.105 4 GHz | -61.187 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

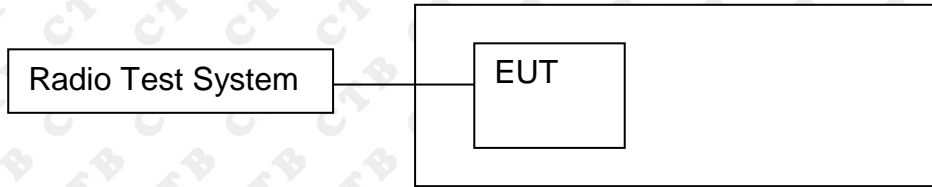

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

| Mode | Channel. | Maximum Peak Output Power [dBm] | Verdict |
|------------------------------|----------|---------------------------------|---------|
| EDR mode (GFSK) | LCH | 2.578 | PASS |
| | MCH | 2.404 | PASS |
| | HCH | -0.892 | PASS |
| EDR mode ($\pi/4$ DQPSK) | LCH | 3.842 | PASS |
| | MCH | 3.695 | PASS |
| | HCH | 0.832 | PASS |
| EDR mode (8DPSK) | LCH | 3.928 | PASS |
| | MCH | 3.761 | PASS |
| | HCH | 1.069 | PASS |

Test Graph:


| Graphs | |
|----------|--|
| GFSK/LCH | |
| GFSK/MCH | |
| GFSK/HCH | |

| | |
|------------------------------------|--|
| <p>$\pi/4$DQPSK/LCH</p> | |
| <p>$\pi/4$DQPSK/MCH</p> | |
| <p>$\pi/4$DQPSK/HCH</p> | |

| | |
|------------------|--|
| <p>8DPSK/LCH</p> | |
| <p>8DPSK/MCH</p> | |
| <p>8DPSK/HCH</p> | |

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

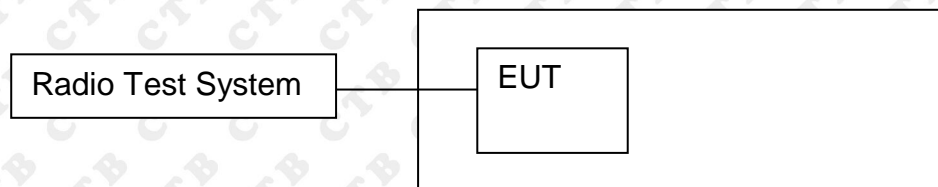

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

| Test Mode | Frequency | 20dB Bandwidth (MHz) | Result |
|---------------|--------------|----------------------|-------------|
| GFSK | Low channel | 0.939 | PASS |
| | Mid channel | 1.0243 | PASS |
| | High channel | 0.9314 | PASS |
| $\pi/4$ DQPSK | Low channel | 1.2815 | PASS |
| | Mid channel | 1.2838 | PASS |
| | High channel | 1.2797 | PASS |
| 8DPSK | Low channel | 1.2752 | PASS |
| | Mid channel | 1.2752 | PASS |
| | High channel | 1.3072 | PASS |

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


| | | | | | | | | | | | | | | | | | | | | |
|------------------------------|---|--------------------|-------------|-----------|-------------------|--|--|---------------------|-----------|---------|------------|------|-----------|----------------|--|--|-----------|--|--|--|
| <p>GFSK Low channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 2 MHz Sweep: 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.99 dBm</td> </tr> <tr> <td>853.33 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-2.442 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>939.0 kHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 1.99 dBm | 853.33 kHz | | | Transmit Freq Error | OBW Power | 99.00 % | -2.442 kHz | x dB | -20.00 dB | x dB Bandwidth | | | 939.0 kHz | | | |
| Occupied Bandwidth | Total Power | 1.99 dBm | | | | | | | | | | | | | | | | | | |
| 853.33 kHz | | | | | | | | | | | | | | | | | | | | |
| Transmit Freq Error | OBW Power | 99.00 % | | | | | | | | | | | | | | | | | | |
| -2.442 kHz | x dB | -20.00 dB | | | | | | | | | | | | | | | | | | |
| x dB Bandwidth | | | | | | | | | | | | | | | | | | | | |
| 939.0 kHz | | | | | | | | | | | | | | | | | | | | |
| <p>GFSK Mid channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 2 MHz Sweep: 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.76 dBm</td> </tr> <tr> <td>847.00 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-6.162 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.024 MHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 1.76 dBm | 847.00 kHz | | | Transmit Freq Error | OBW Power | 99.00 % | -6.162 kHz | x dB | -20.00 dB | x dB Bandwidth | | | 1.024 MHz | | | |
| Occupied Bandwidth | Total Power | 1.76 dBm | | | | | | | | | | | | | | | | | | |
| 847.00 kHz | | | | | | | | | | | | | | | | | | | | |
| Transmit Freq Error | OBW Power | 99.00 % | | | | | | | | | | | | | | | | | | |
| -6.162 kHz | x dB | -20.00 dB | | | | | | | | | | | | | | | | | | |
| x dB Bandwidth | | | | | | | | | | | | | | | | | | | | |
| 1.024 MHz | | | | | | | | | | | | | | | | | | | | |
| <p>GFSK High channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 2 MHz Sweep: 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>-1.47 dBm</td> </tr> <tr> <td>833.31 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>2.694 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>931.4 kHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | -1.47 dBm | 833.31 kHz | | | Transmit Freq Error | OBW Power | 99.00 % | 2.694 kHz | x dB | -20.00 dB | x dB Bandwidth | | | 931.4 kHz | | | |
| Occupied Bandwidth | Total Power | -1.47 dBm | | | | | | | | | | | | | | | | | | |
| 833.31 kHz | | | | | | | | | | | | | | | | | | | | |
| Transmit Freq Error | OBW Power | 99.00 % | | | | | | | | | | | | | | | | | | |
| 2.694 kHz | x dB | -20.00 dB | | | | | | | | | | | | | | | | | | |
| x dB Bandwidth | | | | | | | | | | | | | | | | | | | | |
| 931.4 kHz | | | | | | | | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | |
|--|---|--------------------|-------------|-----------|------------|---------------------|------------|-----------|---------|--|----------------|-----------|-----------|--|
| <p>$\pi/4$-DQPSK Low channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz #IF Gain: Low #Att: 10 dB #Res BW: 30 kHz #VBW: 100 kHz Span: 2 MHz Sweep: 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.88 dBm</td> </tr> <tr> <td>1.1770 MHz</td> <td>Transmit Freq Error</td> <td>-5.437 kHz</td> </tr> <tr> <td>OBW Power</td> <td>99.00 %</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.281 MHz</td> <td>-20.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 1.88 dBm | 1.1770 MHz | Transmit Freq Error | -5.437 kHz | OBW Power | 99.00 % | | x dB Bandwidth | 1.281 MHz | -20.00 dB | |
| Occupied Bandwidth | Total Power | 1.88 dBm | | | | | | | | | | | | |
| 1.1770 MHz | Transmit Freq Error | -5.437 kHz | | | | | | | | | | | | |
| OBW Power | 99.00 % | | | | | | | | | | | | | |
| x dB Bandwidth | 1.281 MHz | -20.00 dB | | | | | | | | | | | | |
| <p>$\pi/4$-DQPSK Mid channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz #IF Gain: Low #Att: 10 dB #Res BW: 30 kHz #VBW: 100 kHz Span: 2 MHz Sweep: 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.69 dBm</td> </tr> <tr> <td>1.1815 MHz</td> <td>Transmit Freq Error</td> <td>-2.464 kHz</td> </tr> <tr> <td>OBW Power</td> <td>99.00 %</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.284 MHz</td> <td>-20.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 1.69 dBm | 1.1815 MHz | Transmit Freq Error | -2.464 kHz | OBW Power | 99.00 % | | x dB Bandwidth | 1.284 MHz | -20.00 dB | |
| Occupied Bandwidth | Total Power | 1.69 dBm | | | | | | | | | | | | |
| 1.1815 MHz | Transmit Freq Error | -2.464 kHz | | | | | | | | | | | | |
| OBW Power | 99.00 % | | | | | | | | | | | | | |
| x dB Bandwidth | 1.284 MHz | -20.00 dB | | | | | | | | | | | | |
| <p>$\pi/4$-DQPSK High channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz #IF Gain: Low #Att: 10 dB #Res BW: 30 kHz #VBW: 100 kHz Span: 2 MHz Sweep: 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>-1.67 dBm</td> </tr> <tr> <td>1.1916 MHz</td> <td>Transmit Freq Error</td> <td>1.850 kHz</td> </tr> <tr> <td>OBW Power</td> <td>99.00 %</td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.280 MHz</td> <td>-20.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | -1.67 dBm | 1.1916 MHz | Transmit Freq Error | 1.850 kHz | OBW Power | 99.00 % | | x dB Bandwidth | 1.280 MHz | -20.00 dB | |
| Occupied Bandwidth | Total Power | -1.67 dBm | | | | | | | | | | | | |
| 1.1916 MHz | Transmit Freq Error | 1.850 kHz | | | | | | | | | | | | |
| OBW Power | 99.00 % | | | | | | | | | | | | | |
| x dB Bandwidth | 1.280 MHz | -20.00 dB | | | | | | | | | | | | |

| | |
|-------------------------------|---|
| <p>8DPSK Low channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz #IF Gain: Low #Att: 10 dB Total Power: 1.90 dBm Occupied Bandwidth: 1.1926 MHz Transmit Freq Error: -8.014 kHz x dB Bandwidth: 1.275 MHz</p> |
| <p>8DPSK Mid channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz #IF Gain: Low #Att: 10 dB Total Power: 1.48 dBm Occupied Bandwidth: 1.1939 MHz Transmit Freq Error: -5.513 kHz x dB Bandwidth: 1.275 MHz</p> |
| <p>8DPSK High channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz #IF Gain: Low #Att: 10 dB Total Power: -1.85 dBm Occupied Bandwidth: 1.1980 MHz Transmit Freq Error: -4.789 kHz x dB Bandwidth: 1.307 MHz</p> |

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

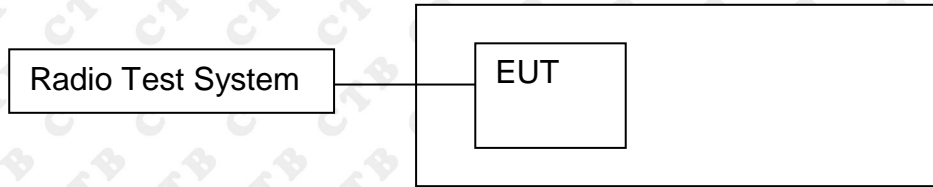

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

| Mode | Channel. | Carrier Frequency Separation [MHz] | Verdict |
|---------------|----------|------------------------------------|---------|
| GFSK | LCH | 0.993 | PASS |
| GFSK | MCH | 1.008 | PASS |
| GFSK | HCH | 1.005 | PASS |
| $\pi/4$ DQPSK | LCH | 1.023 | PASS |
| $\pi/4$ DQPSK | MCH | 0.987 | PASS |
| $\pi/4$ DQPSK | HCH | 1.011 | PASS |
| 8DPSK | LCH | 1.038 | PASS |
| 8DPSK | MCH | 1.032 | PASS |
| 8DPSK | HCH | 1.029 | PASS |

Test Graph




| <p>$\pi/4$DQPSK/LCH</p> | <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>-1.023 MHz (Δ)</td> <td>0.609 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.402 854 GHz</td> <td>1.391 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | ΔZ | 1 | f (Δ) | -1.023 MHz (Δ) | 0.609 dB | | | | 2 | F | 1 | f | 2.402 854 GHz | 1.391 dBm | | | | |
|------------------------------------|--|-----|-------|----------------|------------|----------|----------------|----------------|----------------|----------------|---|----|---|-------|----------------|-----------|--|--|--|---|---|---|---|---------------|------------|--|--|--|--|
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | |
| 1 | ΔZ | 1 | f (Δ) | -1.023 MHz (Δ) | 0.609 dB | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.402 854 GHz | 1.391 dBm | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/MCH</p> | <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>-987 kHz (Δ)</td> <td>-0.558 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.441 833 GHz</td> <td>1.729 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | ΔZ | 1 | f (Δ) | -987 kHz (Δ) | -0.558 dB | | | | 2 | F | 1 | f | 2.441 833 GHz | 1.729 dBm | | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | |
| 1 | ΔZ | 1 | f (Δ) | -987 kHz (Δ) | -0.558 dB | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.441 833 GHz | 1.729 dBm | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/HCH</p> | <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.011 MHz (Δ)</td> <td>1.162 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.478 807 GHz</td> <td>-2.641 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | ΔZ | 1 | f (Δ) | 1.011 MHz (Δ) | 1.162 dB | | | | 2 | F | 1 | f | 2.478 807 GHz | -2.641 dBm | | | | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | |
| 1 | ΔZ | 1 | f (Δ) | 1.011 MHz (Δ) | 1.162 dB | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | 2.478 807 GHz | -2.641 dBm | | | | | | | | | | | | | | | | | | | | | | | | |

| <p>8DPSK/LCH</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.038000000 MHz</p> <p>Ref Offset: 6.76 dB Ref: 26.76 dBm</p> <p>ΔMkr1 1.038 MHz -0.366 dB</p> <p>Center 2.402500 GHz #Res BW 100 kHz #VBW 300 kHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.038 MHz</td> <td>(Δ)</td> <td></td> <td>-0.366 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401996 GHz</td> <td></td> <td></td> <td>1.701 dBm</td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | Δ Z | 1 | f | (Δ) | 1.038 MHz | (Δ) | | -0.366 dB | 2 | F | 1 | f | | 2.401996 GHz | | | 1.701 dBm | |
|------------------|--|-----|------|--------------|--------------|--------------|----------------|----------------|----------------|----------------|---|------------|---|---|--------------|------------|--------------|--|-----------|---|---|---|---|--|--------------|--|--|------------|--|
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ Z | 1 | f | (Δ) | 1.038 MHz | (Δ) | | -0.366 dB | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | | 2.401996 GHz | | | 1.701 dBm | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK/MCH</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ -1.032000000 MHz</p> <p>Ref Offset: 6.63 dB Ref: 26.63 dBm</p> <p>ΔMkr1 -1.032 MHz -2.727 dB</p> <p>Center 2.441500 GHz #Res BW 100 kHz #VBW 300 kHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>-1.032 MHz</td> <td>(Δ)</td> <td></td> <td>-2.727 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441996 GHz</td> <td></td> <td></td> <td>1.802 dBm</td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | Δ Z | 1 | f | (Δ) | -1.032 MHz | (Δ) | | -2.727 dB | 2 | F | 1 | f | | 2.441996 GHz | | | 1.802 dBm | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ Z | 1 | f | (Δ) | -1.032 MHz | (Δ) | | -2.727 dB | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | | 2.441996 GHz | | | 1.802 dBm | | | | | | | | | | | | | | | | | | | | | |
| <p>8DPSK/HCH</p> | <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ -1.029000000 MHz</p> <p>Ref Offset: 6.8 dB Ref: 26.80 dBm</p> <p>ΔMkr1 -1.029 MHz -1.146 dB</p> <p>Center 2.479500 GHz #Res BW 100 kHz #VBW 300 kHz Span 3.000 MHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>-1.029 MHz</td> <td>(Δ)</td> <td></td> <td>-1.146 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.480037 GHz</td> <td></td> <td></td> <td>-1.823 dBm</td> </tr> </tbody> </table> | MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | Δ Z | 1 | f | (Δ) | -1.029 MHz | (Δ) | | -1.146 dB | 2 | F | 1 | f | | 2.480037 GHz | | | -1.823 dBm | |
| MKR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | |
| 1 | Δ Z | 1 | f | (Δ) | -1.029 MHz | (Δ) | | -1.146 dB | | | | | | | | | | | | | | | | | | | | | |
| 2 | F | 1 | f | | 2.480037 GHz | | | -1.823 dBm | | | | | | | | | | | | | | | | | | | | | |

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

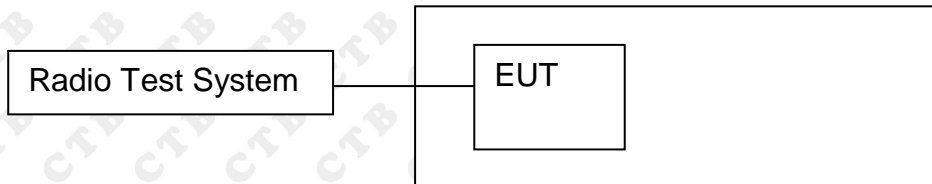

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


| Mode | Channel. | Number of Hopping Channel | Verdict |
|---------------|----------|---------------------------|---------|
| GFSK | Hop | 79 | PASS |
| $\pi/4$ DQPSK | Hop | 79 | PASS |
| 8DPSK | Hop | 79 | PASS |

Test Graph



13. DWELL TIME

13.1 Block Diagram Of Test Setup

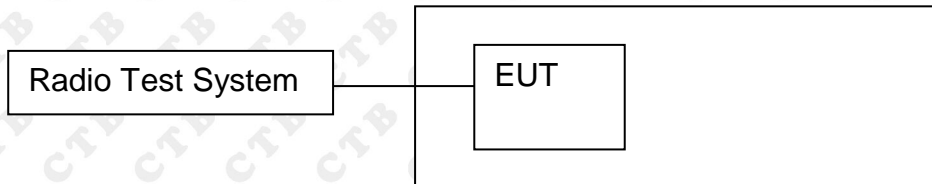

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

| Mode | Packet | Channel | Pulse Time (ms) | Total Dwell Time (ms) | Limit (ms) | Verdict |
|------|--------|---------|-----------------|-----------------------|------------|---------|
| GFSK | DH1 | LCH | 0.405 | 127.885 | 400 | PASS |
| | DH1 | MCH | 0.405 | 127.885 | 400 | PASS |
| | DH1 | HCH | 0.405 | 127.885 | 400 | PASS |
| | DH3 | LCH | 1.649 | 260.605 | 400 | PASS |
| | DH3 | MCH | 1.65 | 260.653 | 400 | PASS |
| | DH3 | HCH | 1.649 | 260.605 | 400 | PASS |
| | DH5 | LCH | 2.896 | 274.588 | 400 | PASS |
| | DH5 | MCH | 2.897 | 274.588 | 400 | PASS |
| | DH5 | HCH | 2.896 | 274.541 | 400 | PASS |

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$


DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.

Test Graph

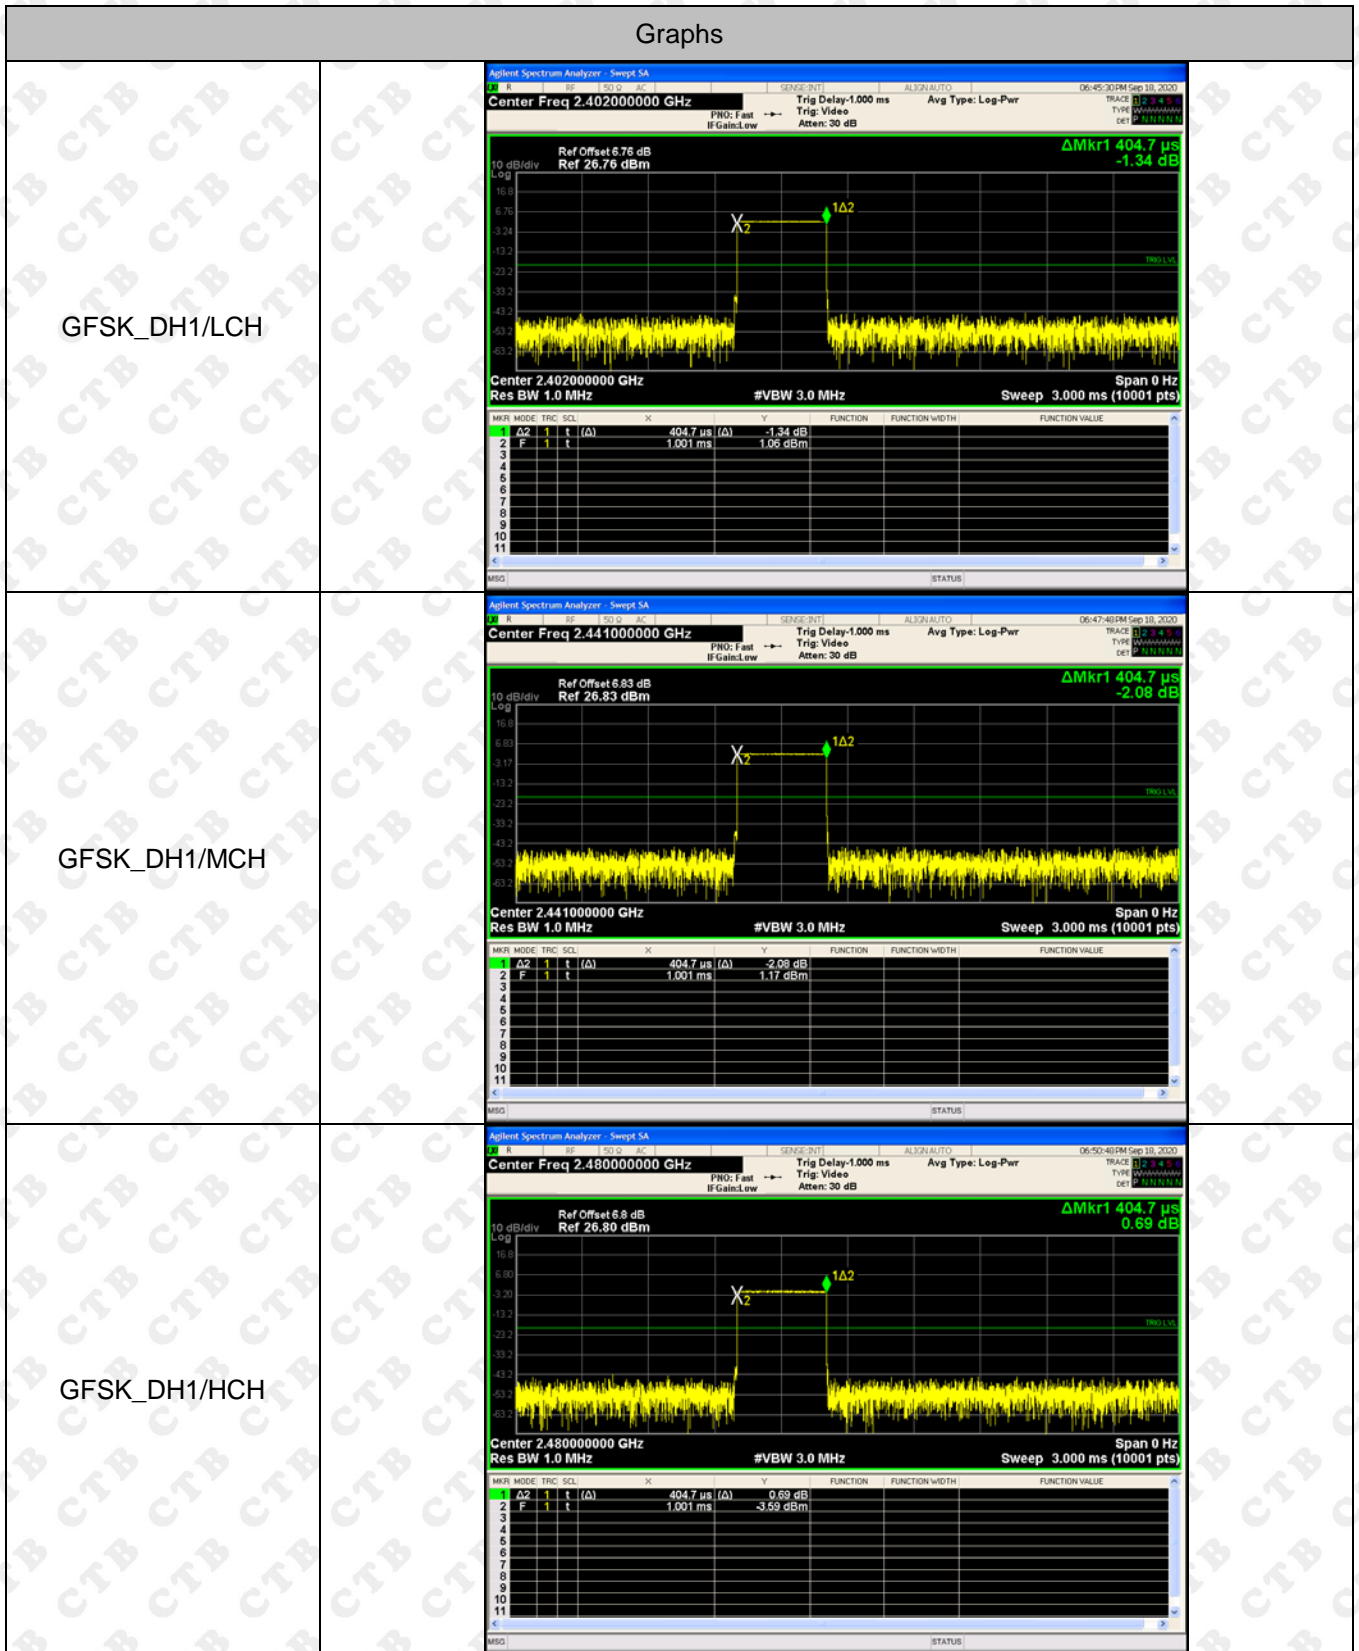

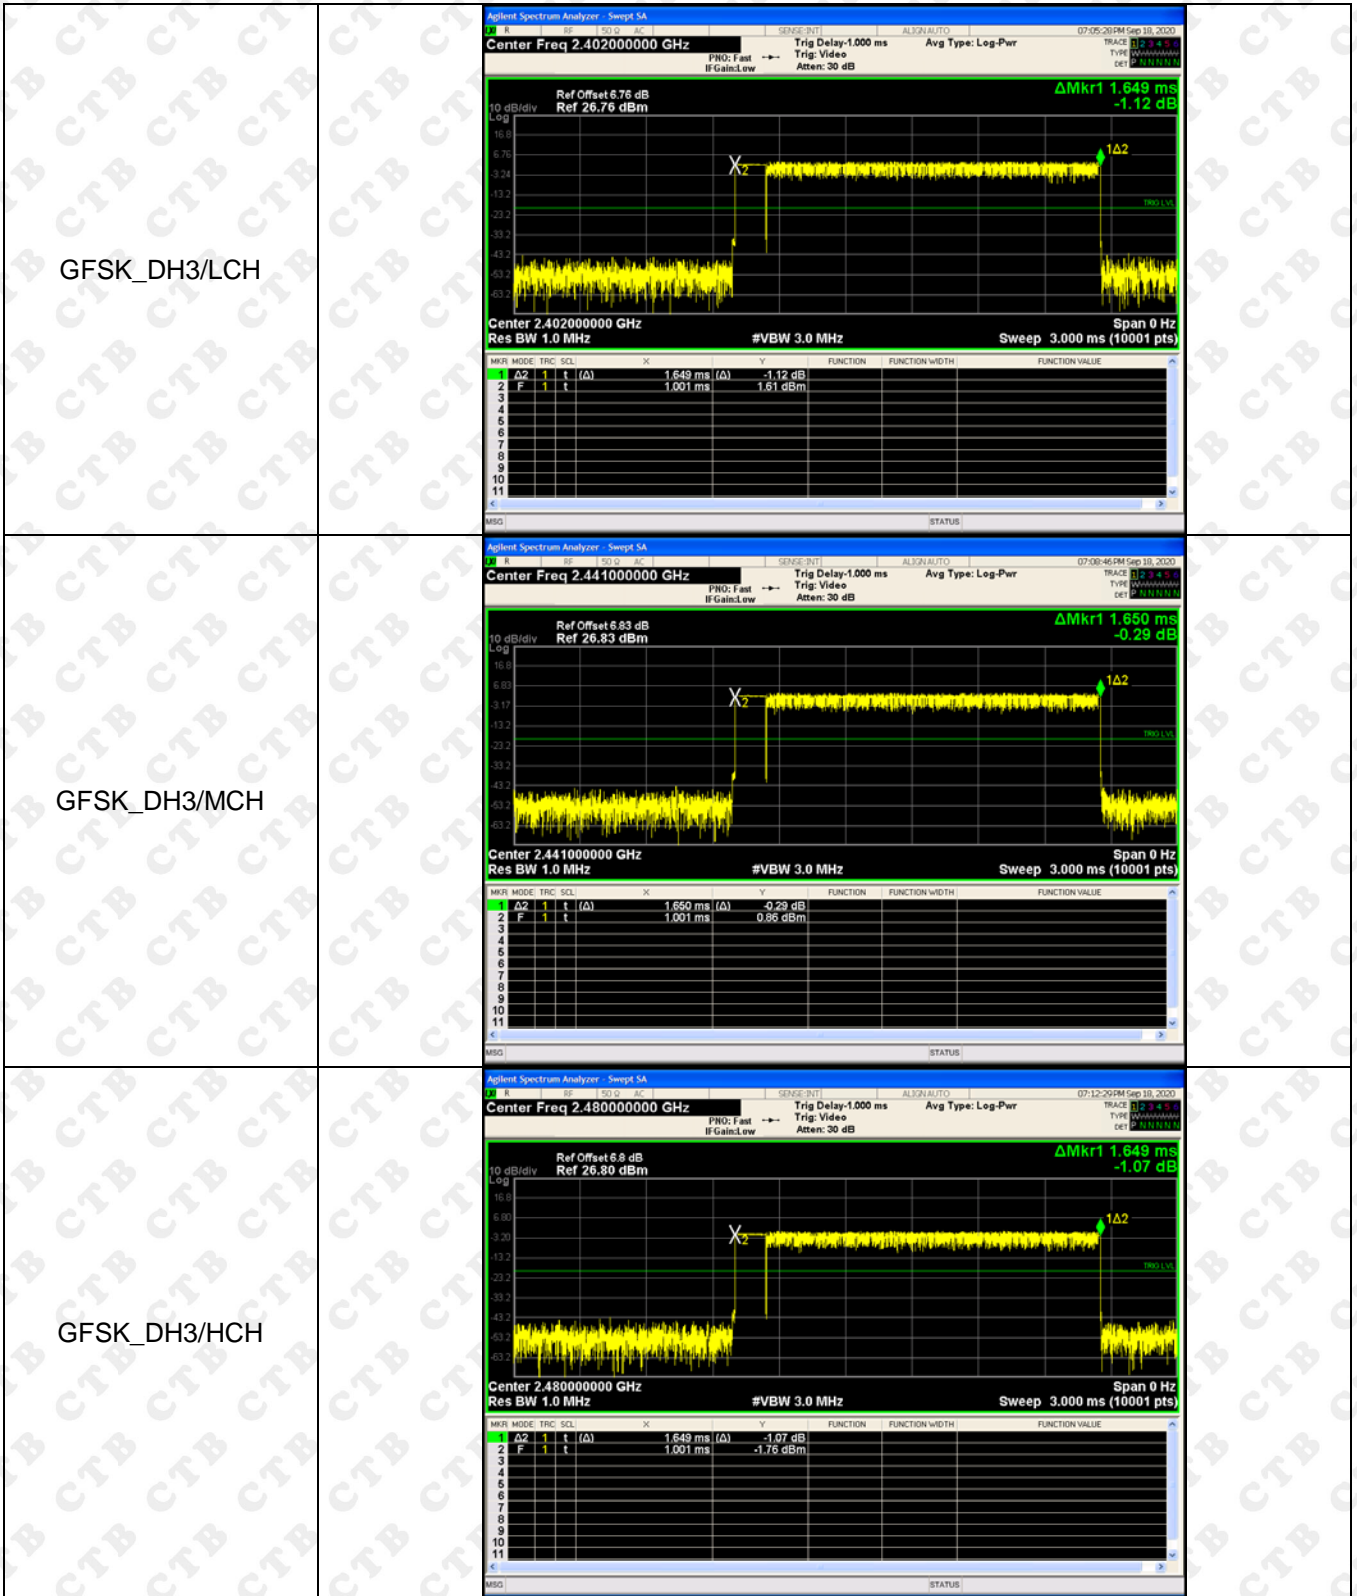

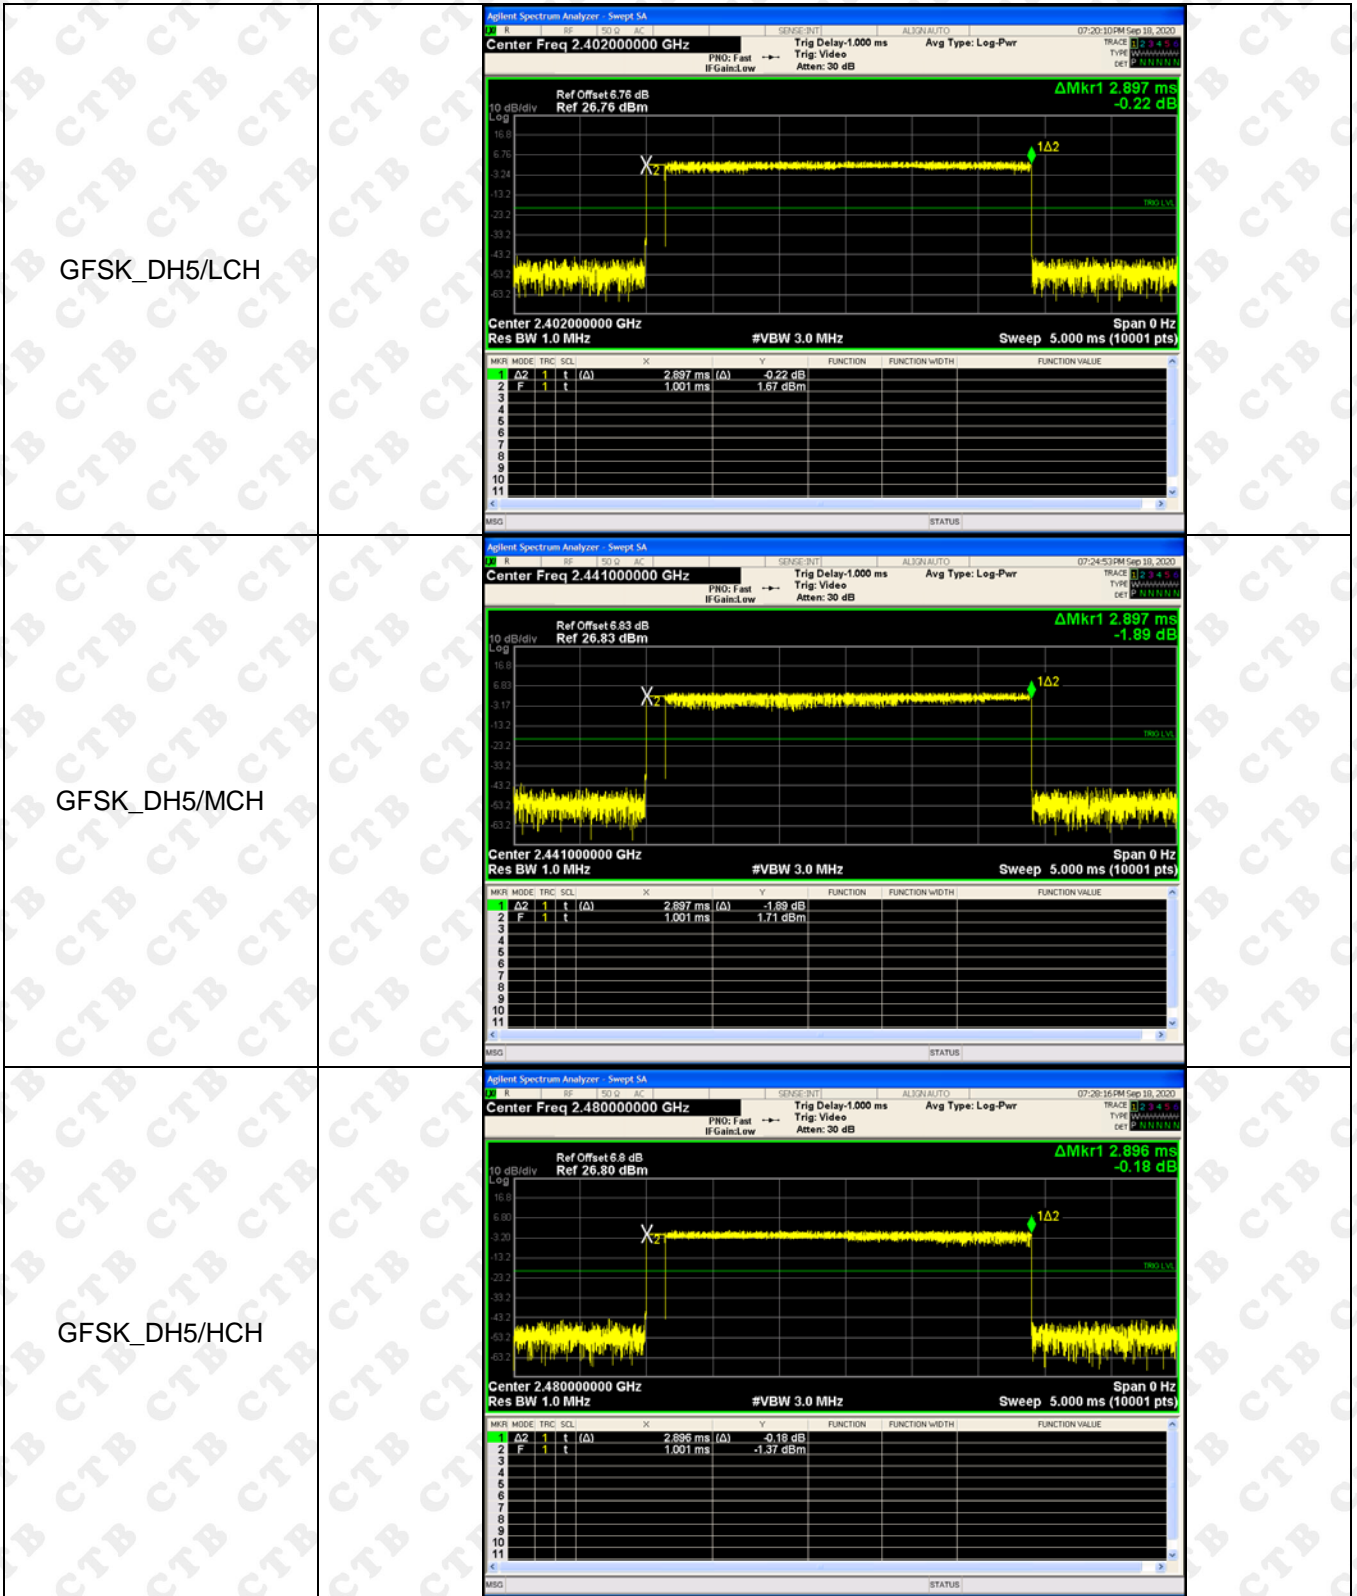

14. PSEUDORANDOM FREQUENCY


14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

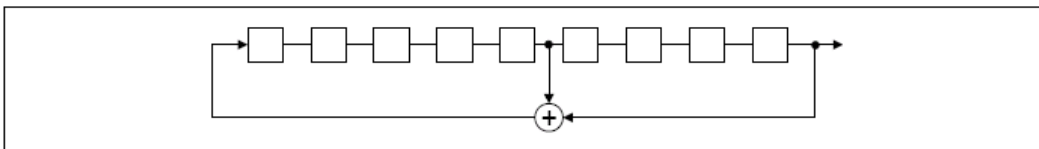

An example of Pseudorandom Frequency Hopping Sequence as follow:

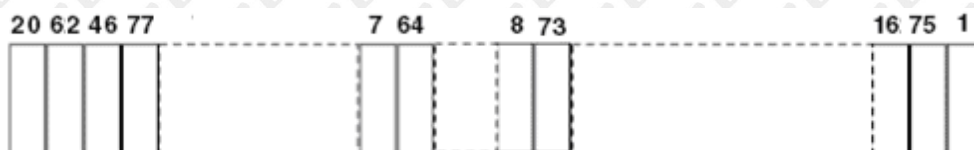

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is Ceramic antenna. The best case gain of the antenna is 1dBi.

16. EUT PHOTOGRAPHS

EUT Photo 1





EUT Photo 2

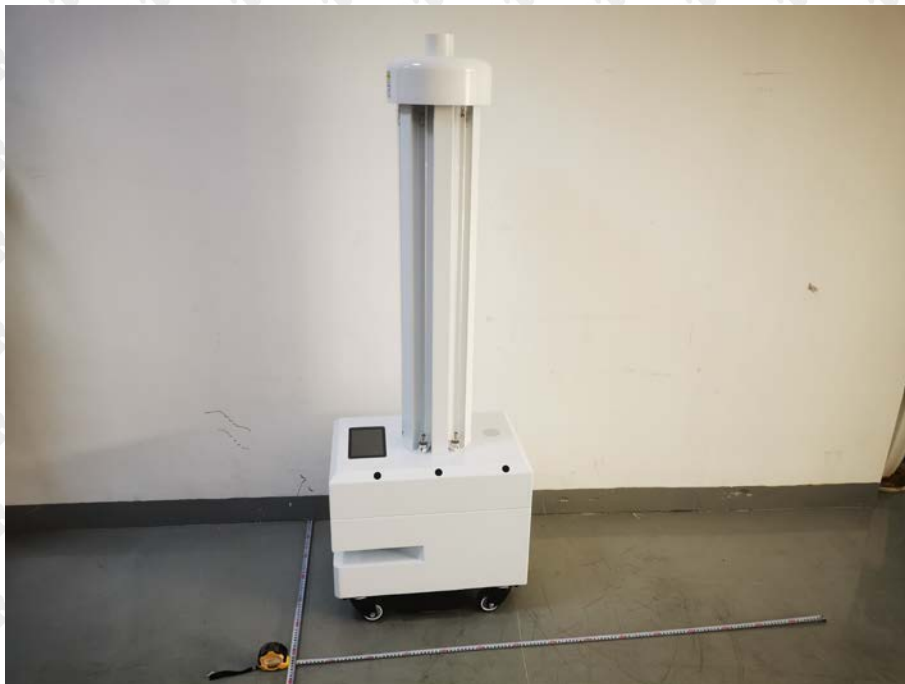

17. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

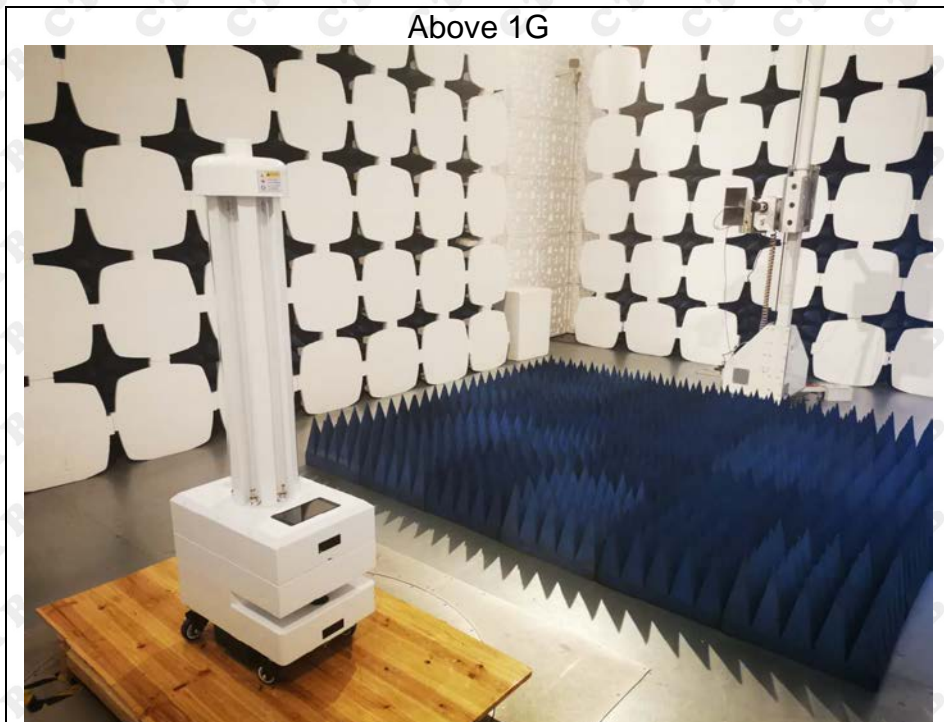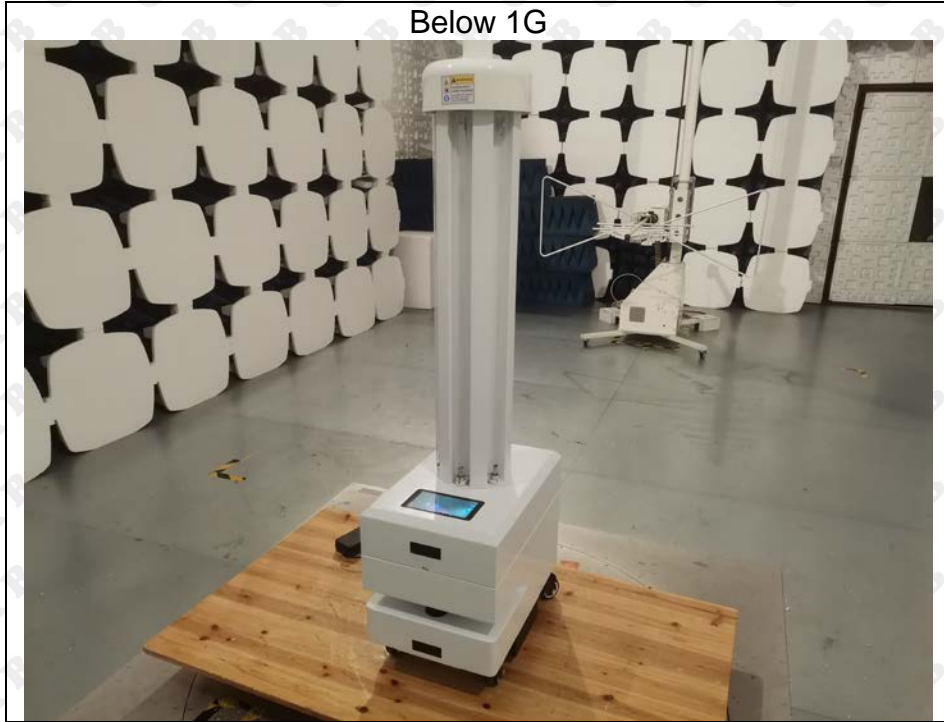

Conducted Emission



***** END OF REPORT
