


Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-1_1.4M_16QAM_TX_925.7MHz
Test by :Cyril Chen

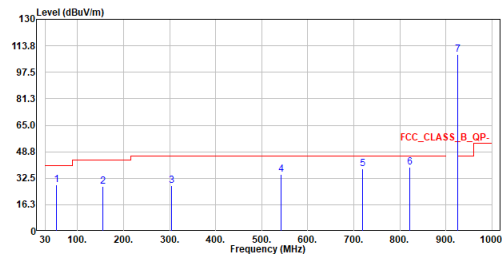


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	54.638	28.46	40.00	-11.54	20.34	8.12	QP
2	155.324	27.69	43.50	-15.81	20.21	7.48	QP
3	304.898	28.15	46.00	-17.85	20.09	8.06	QP
4	542.742	34.83	46.00	-11.17	21.03	13.80	QP
5	719.185	38.03	46.00	-7.97	20.72	17.31	QP
6	821.132	39.27	46.00	-6.73	20.39	10.88	QP
7	925.892	108.33	-----	-----	88.24	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-1_1.4M_16QAM_TX_925.7MHz
Test by :Cyril Chen

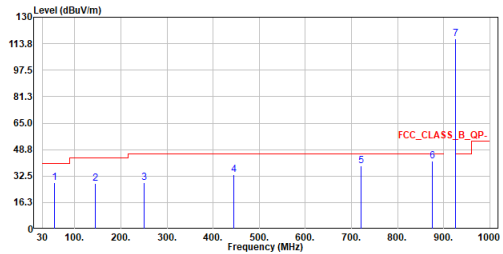


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	56.093	28.38	40.00	-11.62	20.29	8.09	QP
2	143.781	27.77	43.50	-15.73	20.62	7.15	QP
3	249.996	28.38	46.00	-17.62	22.11	6.27	QP
4	444.384	33.35	46.00	-12.65	21.31	12.04	QP
5	720.737	38.74	46.00	-7.26	21.38	17.36	QP
6	874.579	41.89	46.00	-4.11	22.56	19.33	QP
7	926.183	116.92	-----	-----	96.83	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_1.4M_16QAM_TX_925.7MHz
Test by :Scott Chang

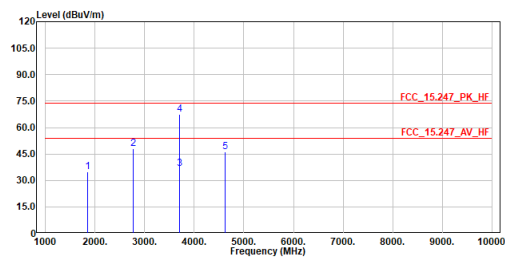


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	34.76	74.00	-39.24	60.30	-25.54	Peak
2	2777.100	48.15	74.00	-25.85	70.38	-22.23	Peak
3	3702.800	36.55	54.00	-17.45	55.58	-19.03	Average
4	3702.800	67.59	74.00	-6.41	86.62	-19.03	Peak
5	4628.500	46.15	74.00	-27.85	61.60	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_1.4M_16QAM_TX_925.7MHz
Test by :Scott Chang

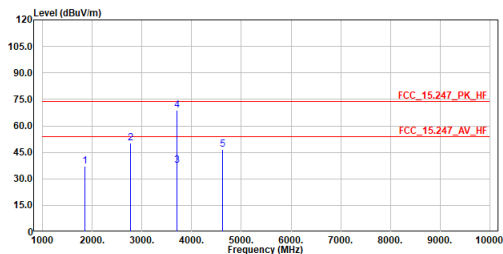


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	37.15	74.00	-36.85	62.69	-25.54	Peak
2	2777.100	50.18	74.00	-23.82	72.41	-22.23	Peak
3	3702.800	37.61	54.00	-16.39	56.64	-19.03	Average
4	3702.800	69.01	74.00	-4.99	88.04	-19.03	Peak
5	4628.500	46.46	74.00	-27.54	61.91	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-1_1.4M_16QAM_TX_927.3MHz
Test by :Cyril Chen

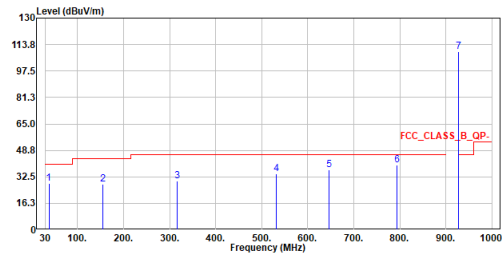

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	37.566	28.28	40.00	-11.72	20.66	7.62	QP
2	154.451	27.99	43.50	-15.51	20.59	7.40	QP
3	316.344	29.82	46.00	-16.18	21.29	8.53	QP
4	532.169	34.34	46.00	-11.66	20.79	13.55	QP
5	645.368	36.60	46.00	-9.40	20.50	16.10	QP
6	793.487	39.66	46.00	-6.34	21.16	18.50	QP
7	927.735	109.30	-----	-----	89.20	20.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-1_1.4M_16QAM_TX_927.3MHz
Test by :Cyril Chen

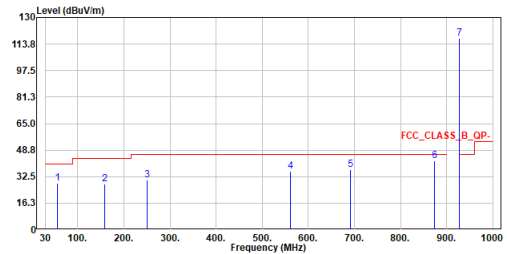

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	55.802	28.22	40.00	-11.78	20.15	8.07	QP
2	158.816	28.17	43.50	-15.33	20.75	7.42	QP
3	249.996	30.57	46.00	-15.43	24.30	6.27	QP
4	560.784	35.73	46.00	-10.27	21.67	14.06	QP
5	691.637	36.98	46.00	-9.02	20.27	16.71	QP
6	872.833	42.11	46.00	-3.89	22.78	19.33	QP
7	927.444	117.40	-----	-----	97.30	20.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_1.4M_16QAM_TX_927.3MHz
Test by :Scott Chang

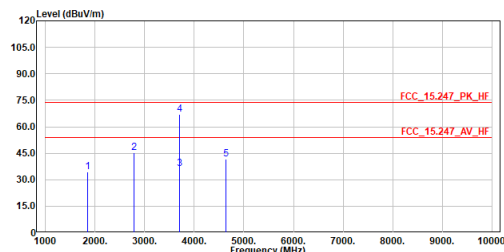

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	1854.600	34.44	74.00	-39.56	59.96	-25.52	Peak
2	2781.900	45.07	74.00	-28.93	67.29	-22.22	Peak
3	3709.200	36.22	54.00	-17.78	55.22	-19.00	Average
4	3709.200	67.17	74.00	-6.83	86.17	-19.00	Peak
5	4636.500	41.82	74.00	-32.18	57.24	-15.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_1.4M_16QAM_TX_927.3MHz
Test by :Scott Chang

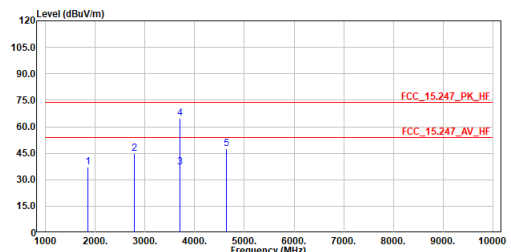

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	1854.600	37.28	74.00	-36.72	62.80	-25.52	Peak
2	2781.900	45.06	74.00	-28.94	67.28	-22.22	Peak
3	3709.200	37.33	54.00	-16.67	56.33	-19.00	Average
4	3709.200	64.77	74.00	-9.23	83.77	-19.00	Peak
5	4636.500	47.47	74.00	-26.53	62.89	-15.42	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-1_1.4M_64QAM_TX_925.7MHz
Test by :Cyril Chen

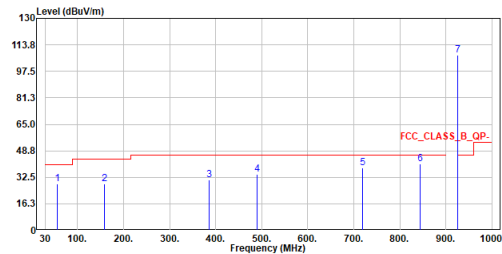


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	56.578	28.42	40.00	-11.58	20.34	8.08	QP
2	157.652	28.37	43.50	-15.13	20.99	7.38	QP
3	385.893	30.92	46.00	-15.08	20.55	10.37	QP
4	490.168	34.28	46.00	-11.72	21.45	12.83	QP
5	718.797	38.20	46.00	-7.80	20.89	17.31	QP
6	843.636	40.68	46.00	-5.32	21.56	19.12	QP
7	925.892	107.54	-----	-----	87.45	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-1_1.4M_64QAM_TX_925.7MHz
Test by :Cyril Chen

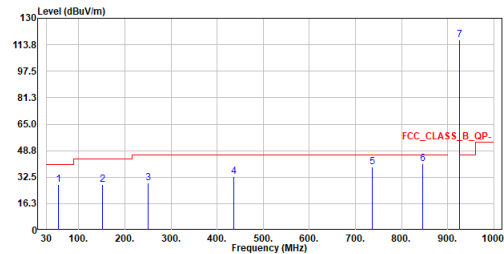


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	55.802	27.97	40.00	-12.03	19.90	8.07	QP
2	151.250	27.81	43.50	-15.69	20.49	7.32	QP
3	249.996	28.95	46.00	-17.05	22.68	6.27	QP
4	436.430	32.71	46.00	-13.29	20.95	11.76	QP
5	736.451	38.59	46.00	-7.41	20.93	17.66	QP
6	845.382	40.51	46.00	-5.49	21.35	19.16	QP
7	925.892	116.94	-----	-----	96.85	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_1.4M_64QAM_TX_925.7MHz
Test by :Scott Chang

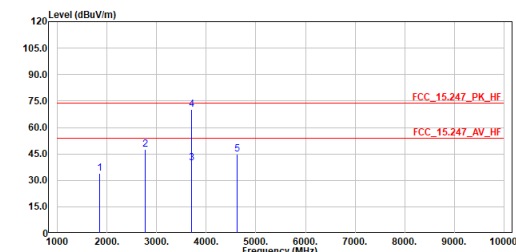


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	33.82	74.00	-40.18	59.36	-25.54	Peak
2	2777.100	47.33	74.00	-26.67	69.56	-22.23	Peak
3	3702.800	39.81	54.00	-14.19	58.84	-19.03	Average
4	3702.800	70.40	74.00	-3.60	89.43	-19.03	Peak
5	4628.500	44.66	74.00	-29.34	60.11	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_1.4M_64QAM_TX_925.7MHz
Test by :Scott Chang

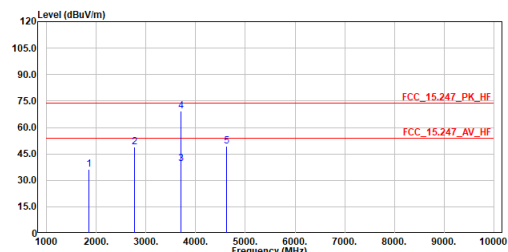


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	36.03	74.00	-37.97	61.57	-25.54	Peak
2	2777.100	48.77	74.00	-25.23	71.00	-22.23	Peak
3	3702.800	39.41	54.00	-14.59	58.44	-19.03	Average
4	3702.800	69.19	74.00	-4.81	88.22	-19.03	Peak
5	4628.500	49.40	74.00	-24.60	64.85	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-1_1.4M_64QAM_TX_927.3MHz
Test by :Cyril Chen

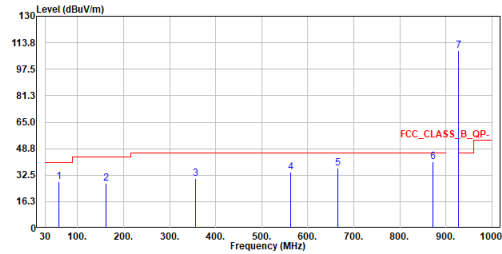


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	59.391	28.38	40.00	-11.62	20.65	7.73	QP
2	161.532	27.68	43.50	-15.82	20.40	7.28	QP
3	355.532	30.23	46.00	-15.77	21.08	9.15	QP
4	563.209	34.57	46.00	-11.43	20.39	14.18	QP
5	665.447	36.95	46.00	-9.05	20.49	16.46	QP
6	871.766	40.64	46.00	-5.36	21.31	19.33	QP
7	927.444	108.80	-----	-----	88.70	20.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-1_1.4M_64QAM_TX_927.3MHz
Test by :Cyril Chen

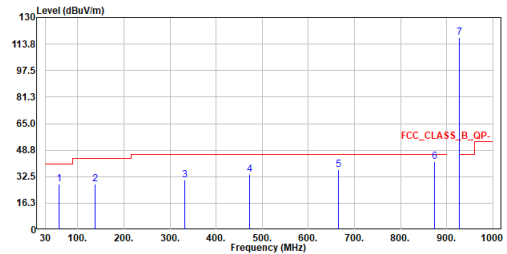


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	59.682	27.88	40.00	-12.12	20.15	7.73	QP
2	138.058	27.81	43.50	-15.69	21.32	6.49	QP
3	331.961	30.42	46.00	-15.58	21.46	8.96	QP
4	472.417	33.65	46.00	-12.35	21.18	12.47	QP
5	666.029	36.65	46.00	-9.35	20.19	16.46	QP
6	872.930	41.63	46.00	-4.37	22.30	19.33	QP
7	927.056	117.63	-----	-----	97.53	20.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_1.4M_64QAM_TX_927.3MHz
Test by :Scott Chang

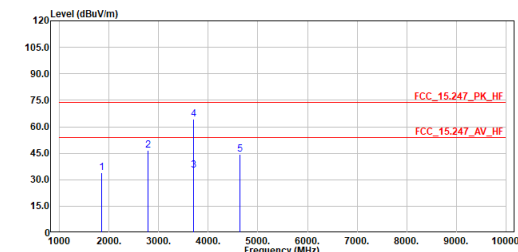


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1854.600	34.14	74.00	-39.86	59.66	-25.52	Peak
2	2781.900	46.78	74.00	-27.22	69.00	-22.22	Peak
3	3709.200	35.39	54.00	-18.61	54.39	-19.00	Average
4	3709.200	64.12	74.00	-9.88	83.12	-19.00	Peak
5	4636.500	44.45	74.00	-29.55	59.87	-15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_1.4M_64QAM_TX_927.3MHz
Test by :Scott Chang

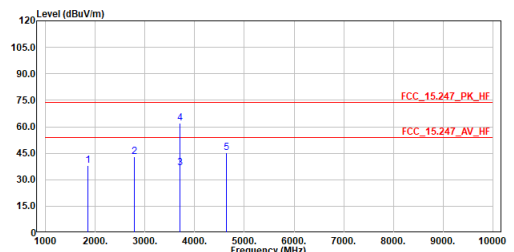


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1854.600	37.96	74.00	-36.04	63.48	-25.52	Peak
2	2781.900	42.92	74.00	-31.08	65.14	-22.22	Peak
3	3709.200	36.81	54.00	-17.19	55.81	-19.00	Average
4	3709.200	62.10	74.00	-11.90	81.10	-19.00	Peak
5	4636.500	45.13	74.00	-28.87	60.55	-15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_CAT-1_3M_QPSK_926.5Mhz
Test by :Brook cheng

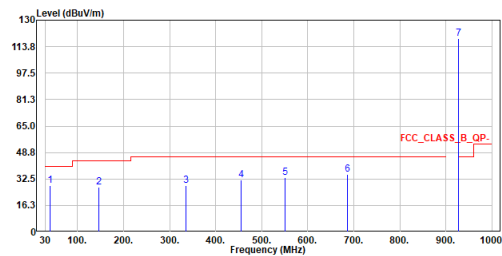


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	40.185	28.50	40.00	-11.50	30.52	-2.02	QP
2	145.430	27.31	43.50	-16.19	30.23	-2.92	QP
3	334.580	28.32	46.00	-17.68	29.35	-1.03	QP
4	454.375	31.79	46.00	-14.21	29.58	2.21	QP
5	549.920	33.35	46.00	-12.65	29.45	3.90	QP
6	686.690	35.24	46.00	-10.76	28.61	6.63	QP
7	927.735	118.61	-----	-----	108.51	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_CAT-1_3M_QPSK_926.5Mhz
Test by :Brook cheng

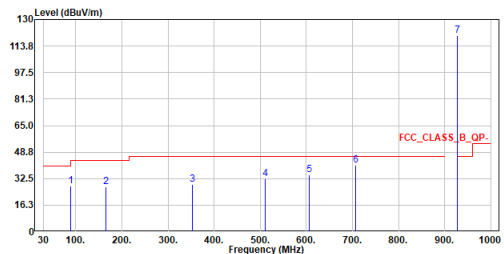


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	88.200	27.98	43.50	-15.52	36.23	-8.25	QP
2	164.830	27.64	43.50	-15.86	30.49	-2.85	QP
3	352.040	29.08	46.00	-16.92	29.95	-0.87	QP
4	510.635	32.46	46.00	-13.54	29.26	3.20	QP
5	606.665	35.02	46.00	-10.98	29.32	5.70	QP
6	707.545	40.53	46.00	-5.47	33.49	7.04	QP
7	927.250	120.13	-----	-----	110.03	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_3M_QPSK_TX_926.5Mhz
Test by :Brook cheng

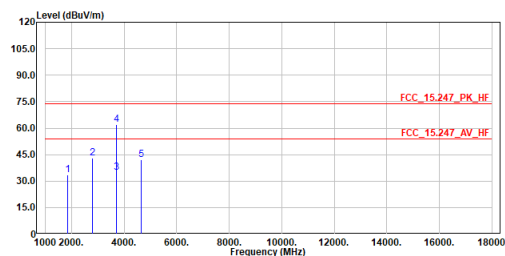


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	33.62	74.00	-40.38	59.15	-25.53	Peak
2	2779.500	43.16	74.00	-30.84	65.39	-22.23	Peak
3	3706.000	34.98	54.00	-19.02	54.00	-19.02	Average
4	3706.000	61.88	74.00	-12.12	80.90	-19.02	Peak
5	4632.500	42.08	74.00	-31.92	57.52	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_3M_QPSK_TX_926.5Mhz
Test by :Brook cheng

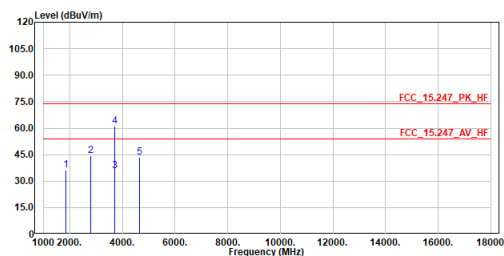


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	36.20	74.00	-37.80	61.73	-25.53	Peak
2	2779.500	44.17	74.00	-29.83	66.40	-22.23	Peak
3	3706.000	35.66	54.00	-18.34	54.68	-19.02	Average
4	3706.000	61.14	74.00	-12.86	80.16	-19.02	Peak
5	4632.500	43.28	74.00	-30.72	58.72	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_CAT-1_3M_16QAM_926.5Mhz
Test by :Brook cheng

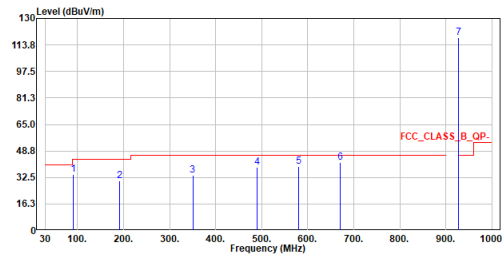


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	90.625	34.39	43.50	-9.11	42.69	-8.30	QP
2	191.990	30.60	43.50	-12.90	36.02	-5.42	QP
3	350.100	34.08	46.00	-11.92	34.95	-0.87	QP
4	489.780	38.89	46.00	-7.11	36.06	2.83	QP
5	580.475	39.12	46.00	-6.88	34.42	4.70	QP
6	671.170	41.60	46.00	-4.40	35.14	6.46	QP
7	927.735	118.17	-----	-----	108.07	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_CAT-1_3M_16QAM_926.5Mhz
Test by :Brook cheng

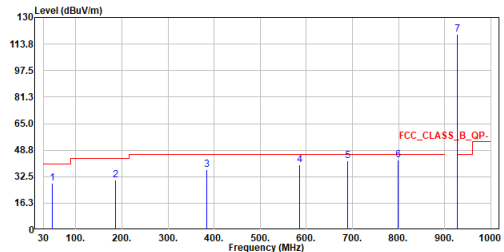


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	48.430	28.65	40.00	-11.35	30.16	-1.51	QP
2	185.685	30.22	43.50	-13.28	34.99	-4.77	QP
3	384.535	36.84	46.00	-9.16	36.50	0.34	QP
4	585.810	39.88	46.00	-6.12	35.04	4.84	QP
5	689.600	42.15	46.00	-3.85	35.51	6.64	QP
6	798.725	42.47	46.00	-3.53	33.95	8.52	QP
7	927.250	119.83	-----	-----	109.73	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_3M_16QAM_TX_926.5Mhz
Test by :Brook cheng

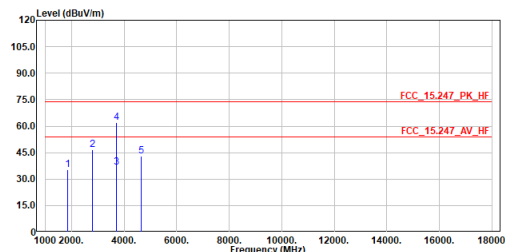


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	35.28	74.00	-38.72	60.81	-25.53	Peak
2	2779.500	46.49	74.00	-27.51	68.72	-22.23	Peak
3	3706.000	36.73	54.00	-17.27	55.75	-19.02	Average
4	3706.000	62.03	74.00	-11.97	81.05	-19.02	Peak
5	4632.500	43.01	74.00	-30.99	58.45	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_3M_16QAM_TX_926.5Mhz
Test by :Brook cheng

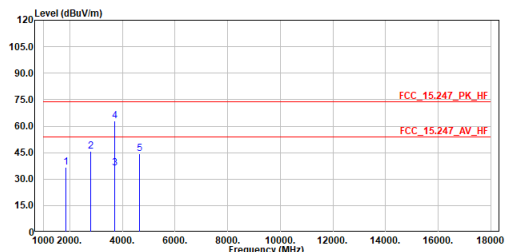


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	36.72	74.00	-37.28	62.25	-25.53	Peak
2	2779.500	45.81	74.00	-28.19	68.04	-22.23	Peak
3	3706.000	36.21	54.00	-17.79	55.23	-19.02	Average
4	3706.000	62.95	74.00	-11.05	81.97	-19.02	Peak
5	4632.500	44.39	74.00	-29.61	59.83	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_CAT-1_3M_64QAM_926.5Mhz
Test by :Brook cheng

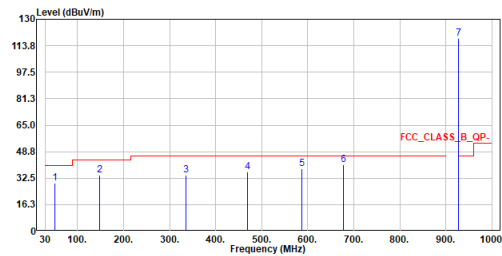


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	50.855	29.41	40.00	-10.59	30.97	-1.56	QP
2	147.370	34.14	43.50	-9.36	36.81	-2.67	QP
3	334.580	34.32	46.00	-11.68	35.35	-1.03	QP
4	468.440	36.24	46.00	-9.76	33.79	2.45	QP
5	586.780	38.05	46.00	-7.95	33.17	4.88	QP
6	676.990	40.91	46.00	-5.09	34.47	6.44	QP
7	927.735	118.12	-----	-----	108.02	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_CAT-1_3M_64QAM_926.5Mhz
Test by :Brook cheng

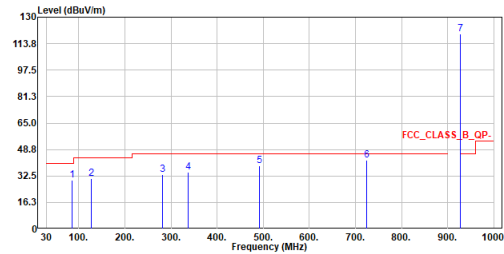


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	84.805	29.78	40.00	-10.22	37.66	-7.88	QP
2	127.000	31.11	43.50	-12.39	35.97	-4.86	QP
3	281.230	33.16	46.00	-12.84	35.63	-2.47	QP
4	337.005	34.70	46.00	-11.30	35.73	-1.03	QP
5	491.720	38.93	46.00	-7.07	36.10	2.83	QP
6	724.520	41.94	46.00	-4.06	34.50	7.44	QP
7	927.250	119.68	-----	-----	109.58	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-1_3M_64QAM_TX_926.5Mhz
Test by :Brook cheng

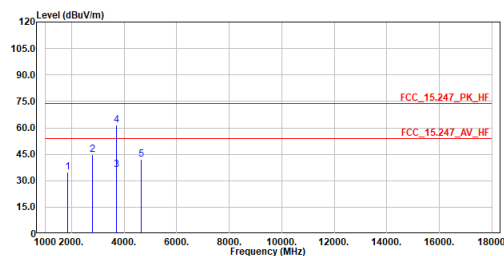


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	34.74	74.00	-39.26	60.27	-25.53	Peak
2	2779.500	44.76	74.00	-29.24	66.99	-22.23	Peak
3	3706.000	36.20	54.00	-17.80	55.22	-19.02	Average
4	3706.000	61.80	74.00	-12.20	80.82	-19.02	Peak
5	4632.500	42.27	74.00	-31.73	57.71	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-1_3M_64QAM_TX_926.5Mhz
Test by :Brook cheng

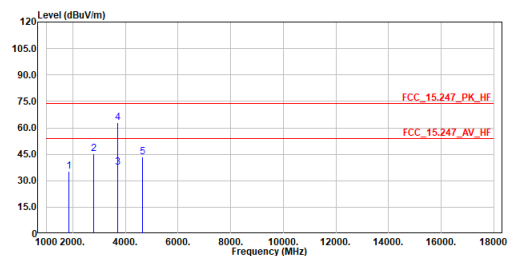


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	35.31	74.00	-38.69	60.84	-25.53	Peak
2	2779.500	45.37	74.00	-28.63	67.60	-22.23	Peak
3	3706.000	37.44	54.00	-16.56	56.46	-19.02	Average
4	3706.000	62.94	74.00	-11.06	81.96	-19.02	Peak
5	4632.500	43.31	74.00	-30.69	58.75	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-M1_1.4M_QPSK_TX_925.7MHz
Test by :Cyril Chen

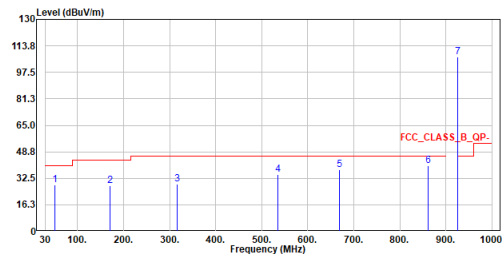


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	50.758	28.62	40.00	-11.38	20.22	8.40	QP
2	170.262	27.77	43.50	-15.73	20.90	6.87	QP
3	316.926	28.96	46.00	-17.04	20.42	8.54	QP
4	534.206	34.74	46.00	-11.26	21.18	13.56	QP
5	668.260	37.66	46.00	-8.34	21.19	16.47	QP
6	860.708	40.04	46.00	-5.96	20.65	19.39	QP
7	926.086	107.02	-----	-----	86.93	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-M1_1.4M_QPSK_TX_925.7MHz
Test by :Cyril Chen

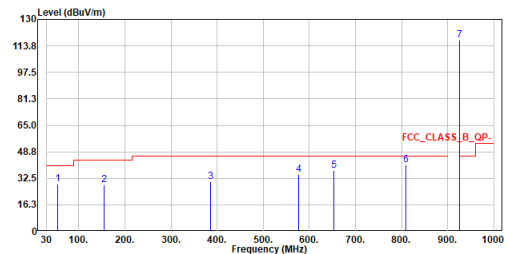


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	54.056	28.79	40.00	-11.21	20.49	8.30	QP
2	155.421	28.57	43.50	-14.93	21.10	7.47	QP
3	386.281	30.56	46.00	-15.44	20.17	10.39	QP
4	576.110	34.92	46.00	-11.08	20.32	14.60	QP
5	653.128	37.50	46.00	-8.50	21.22	16.28	QP
6	809.783	40.67	46.00	-5.33	22.03	18.64	QP
7	926.086	117.12	-----	-----	97.03	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-M1_1.4M_QPSK_TX_925.7MHz
Test by :Scott Chang

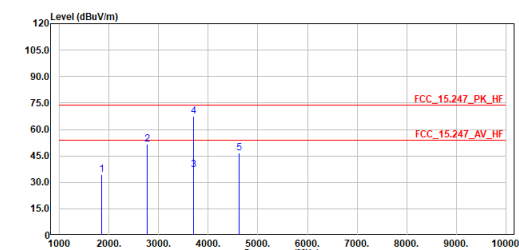


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	34.58	74.00	-39.42	60.12	-25.54	Peak
2	2777.100	51.50	74.00	-22.50	73.73	-22.23	Peak
3	3702.800	37.35	54.00	-16.65	56.38	-19.03	Average
4	3702.800	67.49	74.00	-6.51	86.52	-19.03	Peak
5	4628.500	46.59	74.00	-27.41	62.04	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-M1_1.4M_QPSK_TX_925.7MHz
Test by :Scott Chang

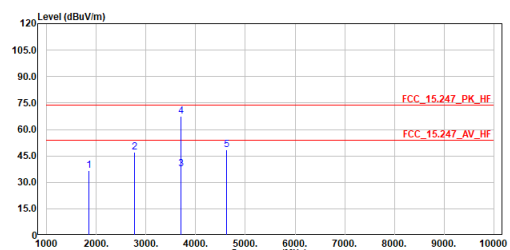


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	36.67	74.00	-37.33	62.21	-25.54	Peak
2	2777.100	47.06	74.00	-26.94	69.29	-22.23	Peak
3	3702.800	37.56	54.00	-16.44	56.59	-19.03	Average
4	3702.800	67.67	74.00	-6.33	86.70	-19.03	Peak
5	4628.500	48.65	74.00	-25.35	64.10	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-M1_1.4M_QPSK_TX_927.3MHz
Test by :Cyril Chen

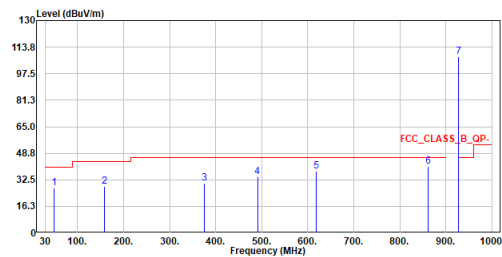


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	48.527	27.68	40.00	-12.32	19.20	8.48	QP
2	158.040	28.44	43.50	-15.06	21.03	7.41	QP
3	375.999	30.33	46.00	-15.67	20.27	10.06	QP
4	490.750	34.58	46.00	-11.42	21.75	12.83	QP
5	618.790	37.62	46.00	-8.38	21.81	15.81	QP
6	861.775	40.82	46.00	-5.18	21.42	19.40	QP
7	927.153	107.98	-----	-----	87.88	20.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-M1_1.4M_QPSK_TX_927.3MHz
Test by :Cyril Chen

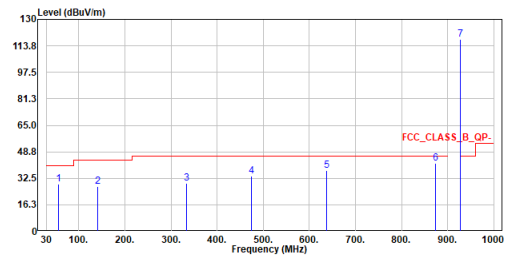


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	56.093	28.77	40.00	-11.23	20.68	8.09	QP
2	140.386	27.60	43.50	-15.90	20.94	6.66	QP
3	333.513	29.45	46.00	-16.55	20.49	8.96	QP
4	474.648	34.05	46.00	-11.95	21.58	12.47	QP
5	637.802	37.51	46.00	-8.49	21.58	15.93	QP
6	872.833	41.86	46.00	-4.14	22.53	19.33	QP
7	927.056	117.60	-----	-----	97.50	20.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-M1_1.4M_QPSK_TX_927.3MHz
Test by :Scott Chang

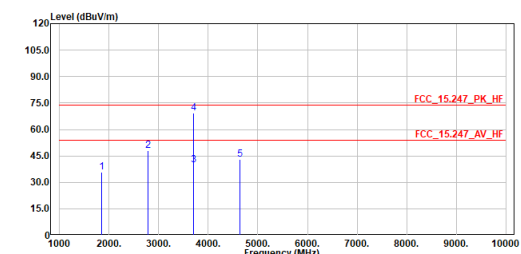


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	1854.600	35.78	74.00	-38.22	61.30	-25.52	Peak
2	2781.900	48.00	74.00	-26.00	70.22	-22.22	Peak
3	3709.200	39.66	54.00	-14.34	58.66	-19.00	Average
4	3709.200	69.26	74.00	-4.74	88.26	-19.00	Peak
5	4636.500	42.99	74.00	-31.01	58.41	-15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-M1_1.4M_QPSK_TX_927.3MHz
Test by :Scott Chang

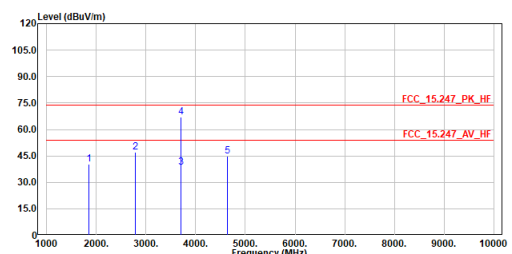


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	1854.600	40.11	74.00	-33.89	65.63	-25.52	Peak
2	2781.900	47.08	74.00	-26.92	69.30	-22.22	Peak
3	3709.200	38.63	54.00	-15.37	57.63	-19.00	Average
4	3709.200	66.95	74.00	-7.05	85.95	-19.00	Peak
5	4636.500	45.06	74.00	-28.94	60.48	-15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-M1_1.4M_16QAM_TX_925.7MHz
Test by :Cyril Chen

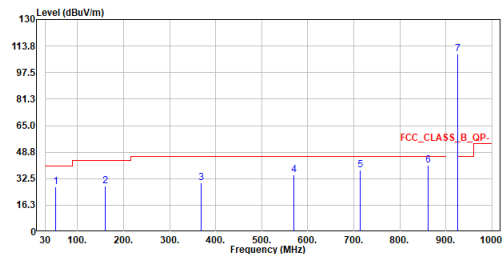


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	51.631	27.53	40.00	-12.47	19.26	8.27	QP
2	160.271	28.18	43.50	-15.32	20.86	7.32	QP
3	368.433	29.80	46.00	-16.20	20.20	9.60	QP
4	570.484	35.04	46.00	-10.96	20.57	14.47	QP
5	713.268	37.93	46.00	-8.07	20.75	17.18	QP
6	861.872	40.74	46.00	-5.26	21.34	19.40	QP
7	925.989	108.87	-----	-----	88.78	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-M1_1.4M_16QAM_TX_925.7MHz
Test by :Cyril Chen

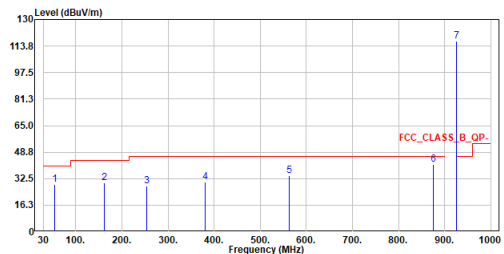


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	54.347	28.76	40.00	-11.24	20.54	8.22	QP
2	161.532	29.81	43.50	-13.69	22.53	7.28	QP
3	254.361	27.74	46.00	-18.26	21.36	6.38	QP
4	380.849	30.47	46.00	-15.53	20.21	10.26	QP
5	562.142	34.20	46.00	-11.80	20.07	14.13	QP
6	875.258	41.33	46.00	-4.67	22.00	19.33	QP
7	926.086	116.92	-----	-----	96.83	20.09	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-M1_1.4M_16QAM_TX_925.7MHz
Test by :Scott Chang

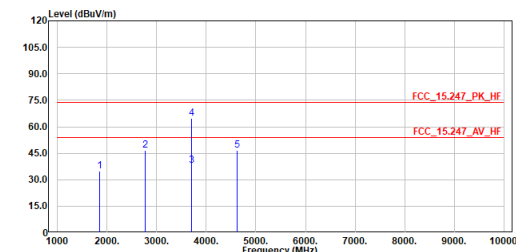


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	34.87	74.00	-39.13	60.41	-25.54	Peak
2	2777.100	46.54	74.00	-27.46	68.77	-22.23	Peak
3	3702.800	38.08	54.00	-15.92	57.11	-19.03	Average
4	3702.800	64.96	74.00	-9.04	83.99	-19.03	Peak
5	4628.500	46.64	74.00	-27.36	62.09	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-M1_1.4M_16QAM_TX_925.7MHz
Test by :Scott Chang

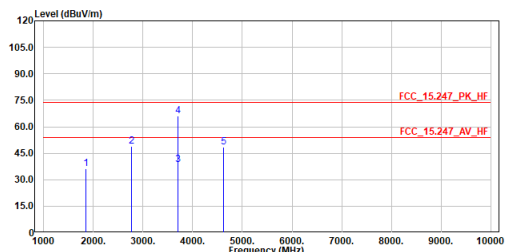


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1851.400	36.37	74.00	-37.63	61.91	-25.54	Peak
2	2777.100	48.99	74.00	-25.01	71.22	-22.23	Peak
3	3702.800	38.62	54.00	-15.38	57.65	-19.03	Average
4	3702.800	66.29	74.00	-7.71	85.32	-19.03	Peak
5	4628.500	48.44	74.00	-25.56	63.89	-15.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_Cat-M1_1.4M_16QAM_TX_927.3MHz
Test by :Cyril Chen

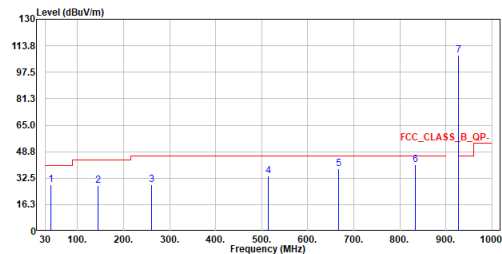


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	41.640	28.28	40.00	-11.72	20.30	7.98	QP
2	144.751	27.79	43.50	-15.71	20.75	7.04	QP
3	260.181	28.29	46.00	-17.71	21.57	6.72	QP
4	514.030	33.67	46.00	-12.33	20.39	13.28	QP
5	666.611	38.21	46.00	-7.79	21.75	16.46	QP
6	833.257	40.82	46.00	-5.18	21.93	18.89	QP
7	927.153	107.84	-----	-----	87.74	20.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_Cat-M1_1.4M_16QAM_TX_927.3MHz
Test by :Cyril Chen

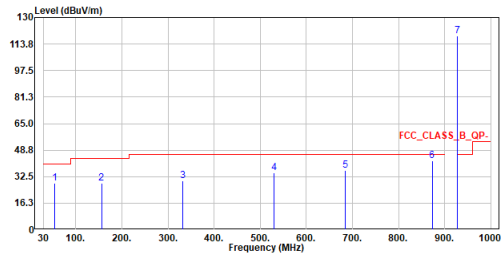


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	53.765	28.33	40.00	-11.67	20.03	8.30	QP
2	155.615	28.64	43.50	-14.86	21.19	7.45	QP
3	332.446	30.01	46.00	-15.99	21.05	8.96	QP
4	529.065	34.84	46.00	-11.16	21.33	13.51	QP
5	683.586	36.38	46.00	-9.62	19.79	16.59	QP
6	872.736	42.09	46.00	-3.91	22.76	19.33	QP
7	927.056	118.72	-----	-----	98.62	20.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-M1_1.4M_16QAM_TX_927.3MHz
Test by :Scott Chang

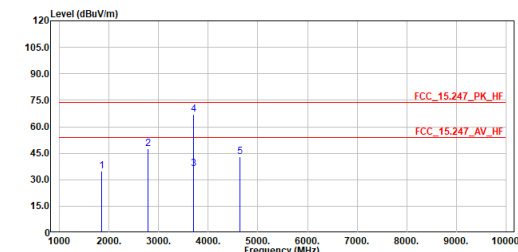


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	1854.600	35.01	74.00	-38.99	60.53	-25.52	Peak
2	2781.900	47.38	74.00	-26.62	69.60	-22.22	Peak
3	3709.200	36.44	54.00	-17.56	55.44	-19.00	Average
4	3709.200	67.16	74.00	-6.84	86.16	-19.00	Peak
5	4636.500	42.90	74.00	-31.10	58.32	-15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-M1_1.4M_16QAM_TX_927.3MHz
Test by :Scott Chang

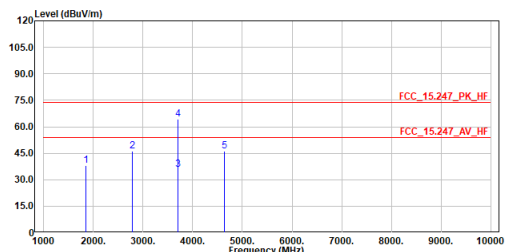


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	1854.600	37.84	74.00	-36.16	63.36	-25.52	Peak
2	2781.900	46.11	74.00	-27.89	68.33	-22.22	Peak
3	3709.200	35.88	54.00	-18.12	54.88	-19.00	Average
4	3709.200	64.37	74.00	-9.63	83.37	-19.00	Peak
5	4636.500	45.99	74.00	-28.01	61.41	-15.42	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_CAT-M1_3M_QPSK_926.5Mhz
Test by :Brook cheng

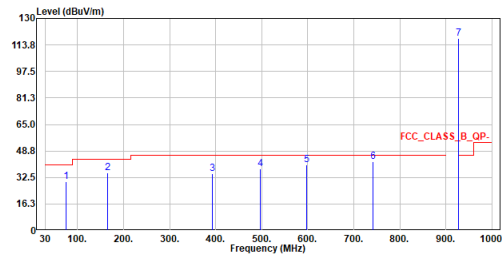


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	74.135	29.98	40.00	-10.02	35.52	-5.54	QP
2	165.315	35.17	43.50	-8.33	38.01	-2.84	QP
3	393.265	34.95	46.00	-11.05	34.40	0.55	QP
4	497.055	37.71	46.00	-8.29	34.82	2.89	QP
5	596.965	40.32	46.00	-5.68	35.10	5.22	QP
6	741.495	42.30	46.00	-3.70	34.46	7.84	QP
7	927.735	117.91	-----	-----	107.81	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_CAT-M1_3M_QPSK_926.5Mhz
Test by :Brook cheng

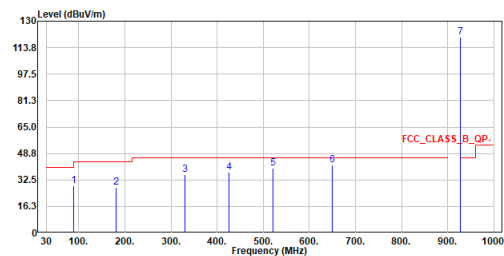


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	88.200	28.98	43.50	-14.52	37.23	-8.25	QP
2	180.350	27.82	43.50	-15.68	31.87	-4.05	QP
3	330.215	35.71	46.00	-10.29	36.75	-1.04	QP
4	424.790	37.16	46.00	-8.84	35.77	1.39	QP
5	521.305	39.52	46.00	-6.48	36.13	3.39	QP
6	648.860	41.85	46.00	-4.15	35.66	6.19	QP
7	927.250	120.38	-----	-----	110.28	10.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-M1_3M_QPSK_TX_926.5Mhz
Test by :Brook cheng

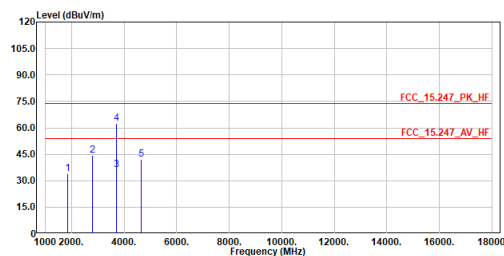


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	34.10	74.00	-39.90	59.63	-25.53	Peak
2	2779.500	44.29	74.00	-29.71	66.52	-22.23	Peak
3	3706.000	36.06	54.00	-17.94	55.08	-19.02	Average
4	3706.000	62.63	74.00	-11.37	81.65	-19.02	Peak
5	4632.500	41.91	74.00	-32.09	57.35	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-M1_3M_QPSK_TX_926.5Mhz
Test by :Brook cheng

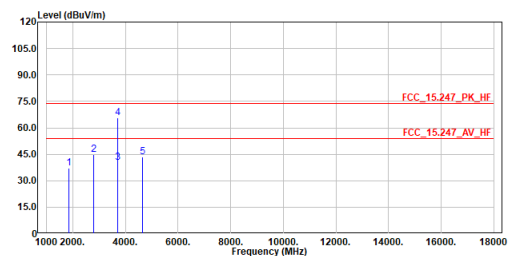


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	1853.000	37.28	74.00	-36.72	62.81	-25.53	Peak
2	2779.500	44.74	74.00	-29.26	66.97	-22.23	Peak
3	3706.000	40.45	54.00	-13.55	59.47	-19.02	Average
4	3706.000	65.85	74.00	-8.15	84.87	-19.02	Peak
5	4632.500	43.60	74.00	-30.40	59.04	-15.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :LF_SRD_CAT-M1_3M_16QAM_926.5Mhz
Test by :Brook cheng

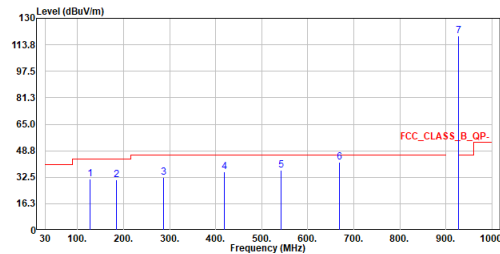

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	127.485	31.20	43.50	-12.30	35.91	-4.71	QP
2	184.230	30.84	43.50	-12.66	35.39	-4.55	QP
3	286.080	32.21	46.00	-13.79	34.50	-2.29	QP
4	418.970	35.94	46.00	-10.06	34.81	1.13	QP
5	541.190	36.94	46.00	-9.06	33.21	3.73	QP
6	668.745	41.50	46.00	-4.50	35.03	6.47	QP
7	927.735	119.01	-----	-----	108.91	10.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Vertical
Mode :LF_SRD_CAT-M1_3M_16QAM_926.5Mhz
Test by :Brook cheng

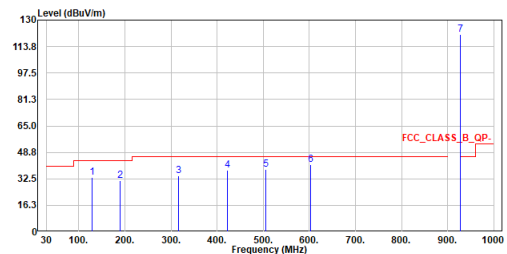

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	129.425	33.58	43.50	-9.92	38.09	-4.51	QP
2	189.080	31.18	43.50	-12.32	36.40	-5.22	QP
3	316.635	34.47	46.00	-11.53	35.94	-1.47	QP
4	422.850	37.55	46.00	-8.45	36.25	1.30	QP
5	504.815	38.38	46.00	-7.62	35.31	3.07	QP
6	602.785	41.19	46.00	-4.81	35.66	5.53	QP
7	927.250	121.03	-----	-----	110.93	10.10	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m Horizontal
Mode :SRD_Cat-M1_3M_16QAM_TX_926.5Mhz
Test by :Brook cheng

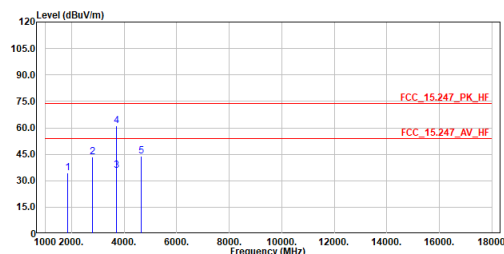

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	1853.000	34.59	74.00	-39.41	60.12	-25.53	Peak
2	2779.500	43.32	74.00	-30.68	65.55	-22.23	Peak
3	3706.000	35.95	54.00	-18.05	54.97	-19.02	Average
4	3706.000	61.06	74.00	-12.94	80.08	-19.02	Peak
5	4632.500	44.11	74.00	-29.89	59.55	-15.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :SRD_Cat-M1_3M_16QAM_TX_926.5Mhz
Test by :Brook cheng

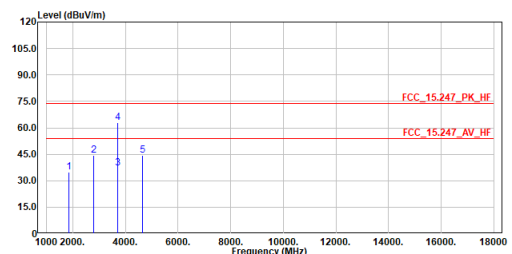


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	1853.000	34.92	74.00	-39.08	60.45	-25.53	Peak
2	2779.500	44.45	74.00	-29.55	66.68	-22.23	Peak
3	3706.000	37.26	54.00	-16.74	56.28	-19.02	Average
4	3706.000	62.86	74.00	-11.14	81.88	-19.02	Peak
5	4632.500	44.39	74.00	-29.61	59.83	-15.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Appendix G. Test Result of Radiated Emissions Co-location

1. WWAN LTE of EUT + WWAN LTE of WWAN module

30 MHz ~ 1 GHz:

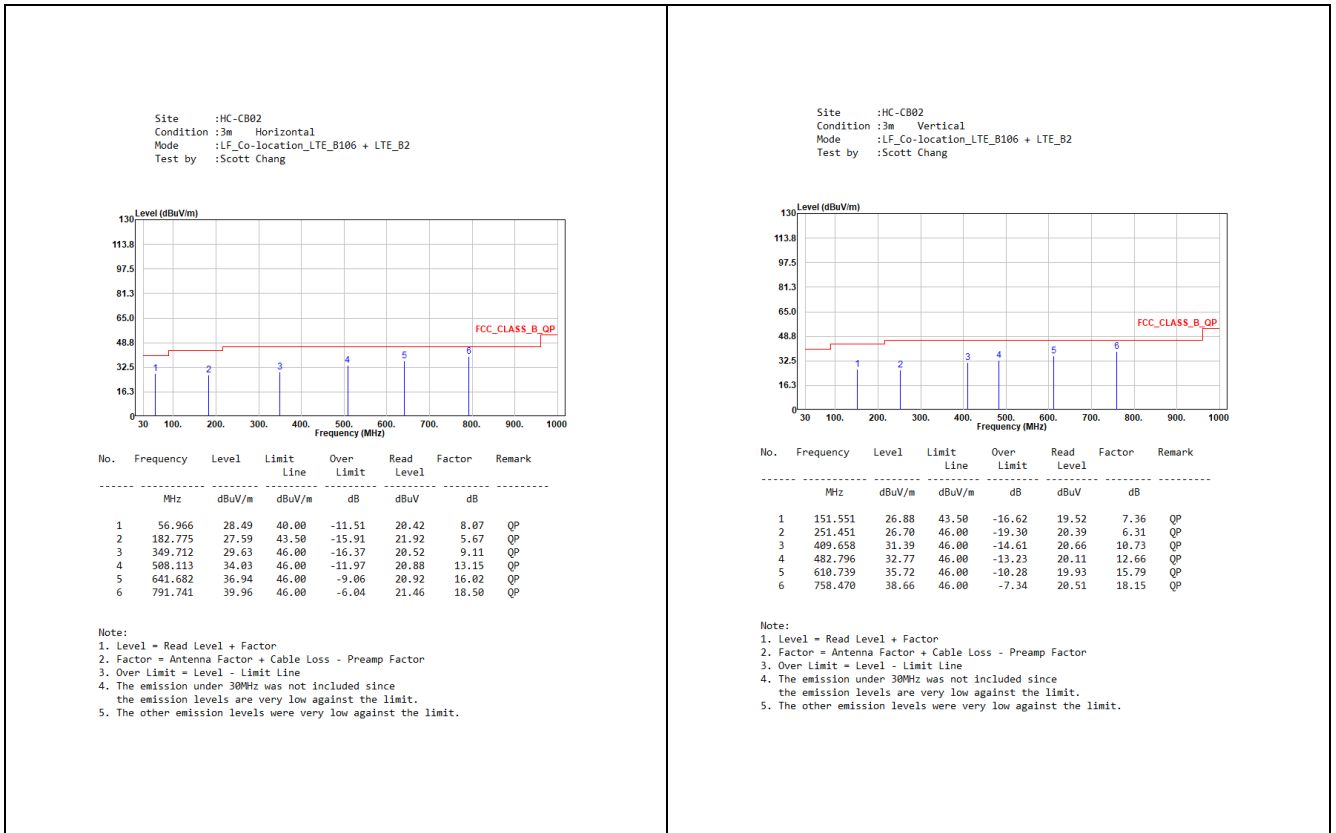


Above 1 GHz:



2. SRD + WWAN LTE of WWAN module

30 MHz ~ 1 GHz:

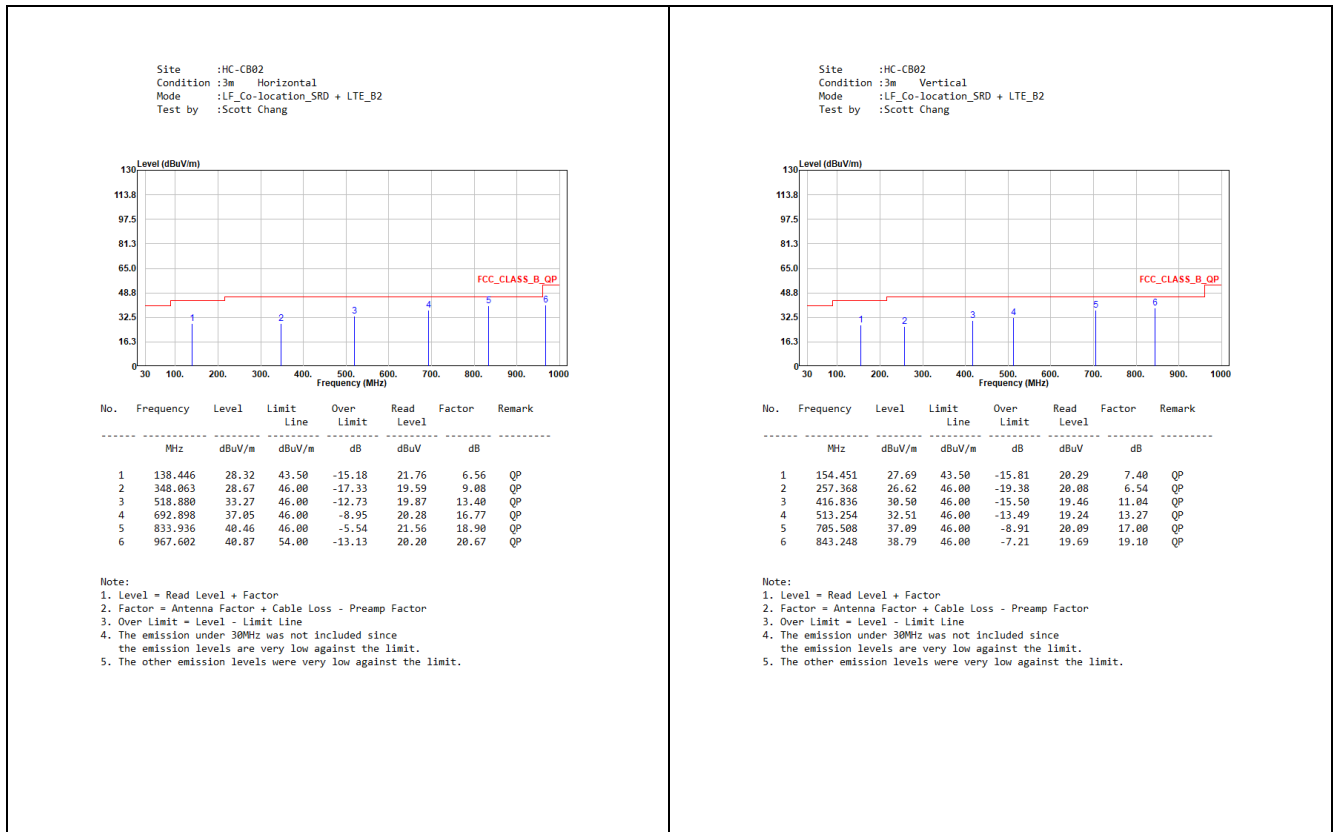

Above 1 GHz:

