

TEST REPORT
CBSD-SAS Interoperability**Applicant Name:**

EUCAST Co., Ltd.

13595 4th FL Sungok Bldg, 262

Hwangsaeul-ro Bundang-Gu, Seongnam-si

Greonggi-do, Korea

Date of Testing:

12/09/2021 – 12/15/2021

Test Report Issue Date:

01/21/2021

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2112130161-01-R2.2AXTR

FCC ID: 2AXTR-ECL4248-2401**APPLICANT:** EUCAST Co., Ltd.**Application Type:**

Certification

Model:

ECL4248-2401

EUT Type:

LTE Picocell base station for CBRS

Frequency Range:

3550 – 3700 MHz

FCC Classification:

Citizens Band Category A and B Devices (CBD)

FCC Rule Part(s):

Part 96

Test Procedure(s):KDB 940660 D01 v03, KDB 940660 D02 v01, WINNF-TS-0122-V1.0.2,
CBRSA-TS-9001 V.1.0.0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in the test procedures listed above. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 1 of 62

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Modifications.....	4
3.0	TEST EQUIPMENT CALIBRATION DATA.....	5
4.0	ENVIRONMENTAL CONDITIONS	6
5.0	EVALUATION PROCEDURE	7
6.0	TEST Summary.....	8
6.1	Summary	8
7.0	CONCLUSION	10
	APPENDIX A – TEST RESULT AND DATA	11
A1	[WINNF.FT.C.REG.1] MULTI-STEP REGISTRATION.....	11
A3	[WINNF.FT.C.REG.5] SINGLE-STEP REGISTRATION FOR CBSD WITH CPI SIGNED DATA	13
A4	[WINNF.FT.C.REG.8] MISSING REQUIRED PARAMETERS (RESPONSECODE 102)	15
A5	[WINNF.FT.C.REG.10] PENDING REGISTRATION (RESPONSECODE 200).....	16
A6	[WINNF.FT.C.REG.12] INVALID PARAMETER (RESPONSECODE 103).....	17
A7	[WINNF.FT.C.REG.14] BLACKLISTED CBSD (RESPONSECODE 101).....	18
A8	[WINNF.FT.C.REG.16] UNSUPPORTED SAS PROTOCOL VERSION (RESPONSECODE 100).....	19
A9	[WINNF.FT.C.REG.18] GROUP ERROR (RESPONSECODE 201).....	20
A10	[WINNF.FT.C.GRA.1] UNSUCCESSFUL GRANT RESPONSECODE=400 (INTERFERENCE)	21
A11	[WINNF.FT.C.GRA.2] UNSUCCESSFUL GRANT RESPONSECODE=401 (GRANT_CONFLICT).....	22
A12	[WINNF.FT.C.HBT.1] HEARTBEAT SUCCESS CASE (FIRST HEARTBEAT RESPONSE).....	23
A13	[WINNF.FT.C.HBT.3] HEARTBEAT RESPONSECODE=105 (DEREGISTER).....	26
A14	[WINNF.FT.C.HBT.4] HEARTBEAT RESPONSECODE=500 (TERMINATED_GRANT)	28
A15	[WINNF.FT.C.HBT.5] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN FIRST HEARTBEAT RESPONSE	30
A16	[WINNF.FT.C.HBT.6] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN SUBSEQUENT HEARTBEAT RESPONSE.....	32
A17	[WINNF.FT.C.HBT.7] HEARTBEAT RESPONSECODE=502 (UNSYNC_OP_PARAM).....	34
A18	[WINNF.FT.C.HBT.9] HEARTBEAT RESPONSE ABSENT (FIRST HEARTBEAT)	36
A19	[WINNF.FT.C.HBT.10] HEARTBEAT RESPONSE ABSENT (SUBSEQUENT HEARTBEAT).....	38
A20	[WINNF.FT.C.MES.3] GRANT RESPONSE CONTAINS MEASREPORTCONFIG.....	40
A21	[WINNF.FT.C.MES.4] HEARTBEAT RESPONSE CONTAINS MEASREPORTCONFIG.....	41
A22	[WINNF.FT.C.RLQ.1] SUCCESSFUL RELINQUISHMENT	42
A23	[WINNF.FT.C.DRG.1] SUCCESSFUL DEREGISTRATION.....	44
A24	[WINNF.FT.C.SCS.1] SUCCESSFUL TLS CONNECTION BETWEEN UUT AND SAS TEST HARNESS	46
A25	[WINNF.FT.C.SCS.2] TLS FAILURE DUE TO REVOKED CERTIFICATE	48
A26	[WINNF.FT.C.SCS.3] TLS FAILURE DUE TO EXPIRED SERVER CERTIFICATE	50
A27	[WINNF.FT.C.SCS.4] TLS FAILURE WHEN SAS TEST HARNESS CERTIFICATE IS ISSUED BY AN UNKNOWN CA.....	52
A28	[WINNF.FT.C.SCS.5] TLS FAILURE WHEN CERTIFICATE AT THE SAS TEST HARNESS IS CORRUPTED	54
A29	[WINNF.PT.C.HBT.1] UUT RF TRANSMIT POWER MEASUREMENT	56
	APPENDIX B – TEST LOGS	61
	APPENDIX C – TEST SETUP.....	62

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 2 of 62

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory facility located at 7185 Oakland Mills Road, Columbia, MD 21046.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 3 of 62

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **EUCAST Co., Ltd., Cat B LTE Picocell base station for CBRS FCC ID: 2AXTR-ECL4248-2401**. The test data contained in this report pertains only to CBSD-SAS interoperability. The EUT is not a Domain Proxy.

Test Device Serial Number(s): EE0F010021B010001

Test Device Hardware Version: Ver 1.0

Test Device Software Version: Ver 2.4.10

Test Device Category: Cat. B

2.2 Device Capabilities

This device contains the following capabilities:

LTE Band 48

This device supports the following conditional features:

	Conditional Test Case Definitions	Supported
C1	Mandatory for UUT which supports multi-step registration message	☒
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	☐
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	☒
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	☐
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	☒
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration	☐

Table 2-1. Conditional Features

2.3 Test Configuration

The EUT was connected to the SAS Test Harness developed by WINNF WG4-CBSD. The latest version of the SAS Test Harness (V1.0.0.2) provided by CBRS Alliance was used. The SAS Test Harness is synchronized to UTC time.

2.4 Modifications

No modifications were made to EUT during testing.

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 4 of 62

3.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Spectrum Analyzer	8/17/2020	Annual	12/17/2021	MY52350166
Dell	Latitude 5580	Test Harness Laptop	N/A	N/A	N/A	N/A
Samsung	Galaxy S20	End User Device	N/A	N/A	N/A	N/A

Table 3-1 Annual Test Equipment Calibration Schedule

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 5 of 62

4.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 6 of 62

5.0 EVALUATION PROCEDURE

The measurement procedure described in KDB 940660 D01 v03 and WINNF-TS-0122-V1.0.2 was used in the measurement of the EUT.

Deviation from measurement procedure.....None

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 7 of 62

6.0 TEST SUMMARY

6.1 Summary

Company Name: EUCAST Co., Ltd.
FCC ID: 2AXTR-ECL4248-2401

Table 6-1. Summary of Test Results

FCC Part Section(s)	KDB940660 D01 Section 3.3 a)	Test Case Description	WinnForum Test Case	Test Result
96.39 (c)	1	Confirm that the device will only transmit after it receives authorization from a SAS	WINNF.FT.C.REG.1 WINNF.FT.C.REG.5 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18 WINNF.FT.C.GRA.1 WINNF.FT.C.GRA.2	Pass
96.39 (c)	2	Check the device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS.	WINNF.FT.C.REG.1 WINNF.FT.C.REG.5 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18	Pass
96.39(c)(1)	3	Confirm that the device changes its operating power and/or channel in response to a command from the SAS.	WINNF.FT.C.HBT.1	Pass
96.39	4	Confirm that the device correctly configures based on the different license classes	N/A	N/A
96.39(c)(1)	5	Confirm that the device transmits at a power level less than or equal to the maximum power level approved by the SAS.	WINNF.PT.C.HBT	Pass
96.39(b)(c)	6	Confirm that the device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	7	Confirm that the device transmits on the SAS specified frequency.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	8	Confirm that the device stops transmission in response to a command from the SAS, within a period as required by Part 96.	WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.4 WINNF.FT.C.HBT.5 WINNF.FT.C.HBT.6 WINNF.FT.C.HBT.7 WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10 WINNF.FT.C.RLQ.1 WINNF.FT.C.DRG.1	Pass

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 8 of 62

Table 6-2. Summary of Test Results (continued)

96.39 (c)	9	Confirm that the device sends measurements data in response to the command from the SAS.	WINNF.FT.C.MES.3 WINNF.FT.C.MES.4	Pass
96.39(a)	10	For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter (± 50 m) within the required time frame.	N/A	N/A
96.39 (c)	11	Confirm that the device is capable of reporting the signal level (measurement data) and frequency to SAS.	WINNF.FT.C.MES.3 WINNF.FT.C.MES.4	Pass
96 E	12	When CBSDs communicate through a management system, confirm compliance with all requirements.	N/A	N/A
96.39	13	When communication between the CBSD and SAS is lost: i) Describe how the CBSD would react if the communications between the device and the SAS is lost. Confirm that the CBSD stops transmission once it loses the link to the SAS. ii) Describe the process for re-establishment of the communications and confirm that the CBSD acts accordingly. iii) Confirm power-on restart process for registration (re-registration) occurs as expected. iv) Confirm the process for de-registration occurs as expected.	WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10	Pass
96.39(f)	KDB940660 D01 Section 4	SAS and Device Security Requirements	WINNF.FT.C.SCS.1 WINNF.FT.C.SCS.2 WINNF.FT.C.SCS.3 WINNF.FT.C.SCS.4 WINNF.FT.C.SCS.5	Pass

Notes:

- Test cases denoted as “N/A” in the table above are not applicable to the EUT and are either Optional or Conditional per Section 6 of WINNF-TS-0122.
- Please see Appendices for test data.

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 9 of 62

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **EUCAST Co., Ltd., Cat B LTE Picocell base station for CBRS FCC ID: 2AXTR-ECL4248-2401** has been tested to show compliance with Part 96 and KDB 940660 D01.

FCC ID: 2AXTR-ECL4248-2401	 PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 10 of 62

APPENDIX A – TEST RESULT AND DATA


Note: To verify the UUT produced no unauthorized in-band transmissions, its RF output was monitored with a max hold trace for a minimum of 60 seconds.

A1 [WINNF.FT.C.REG.1] Multi-Step registration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT is in the Unregistered state CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness:	--	--
2	• The required userId, fcclId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	☒	☐
3	• SAS Test Harness sends a CBSD Registration Response as follows: - cbsdId = Ci - measReportConfig shall not be included - responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 11 of 62

Test Plots:

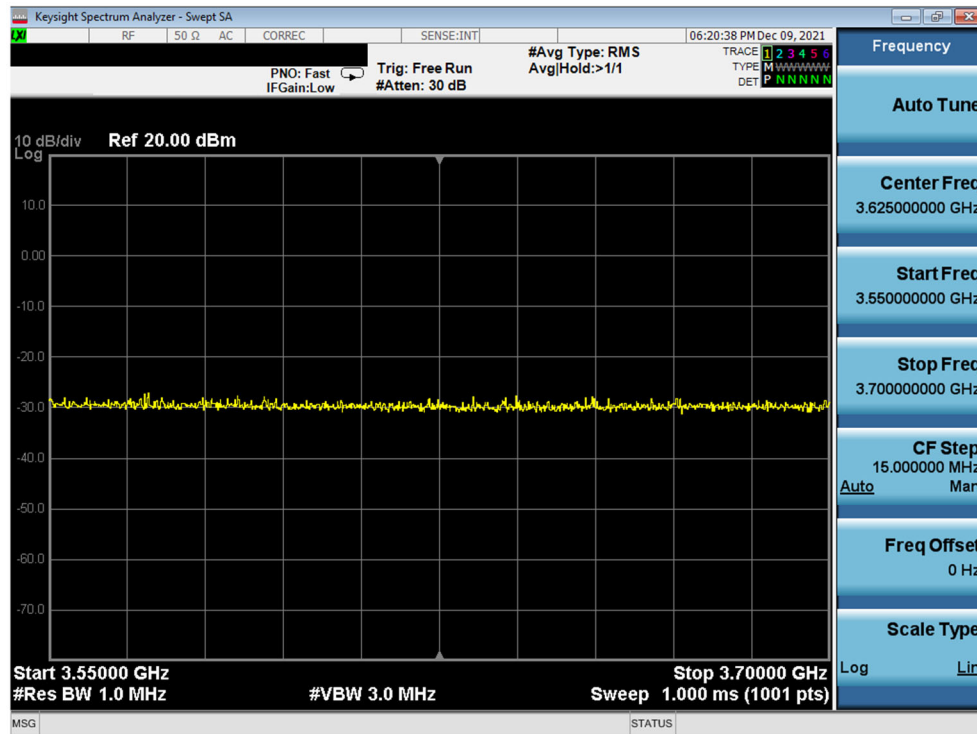

Plot 1. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.1)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 12 of 62

A3 [WINNF.FT.C.REG.5] Single-Step registration for CBSD with CPI signed data

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state • All of the required and REG-Conditional parameters shall be configured and CPI signature provided	--	--
2	CBSD sends Registration request to the SAS Test Harness: • The required userId, fccId and cbsdSerialNumber and REG-Conditional cbsdCategory, airInterface, measCapability and cpiSignatureData registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges.	☒	☐
3	• SAS Test Harness sends a CBSD Registration Response as follows: - cbsdId = C - measReportConfig shall not be included - responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 13 of 62

Test Plots:

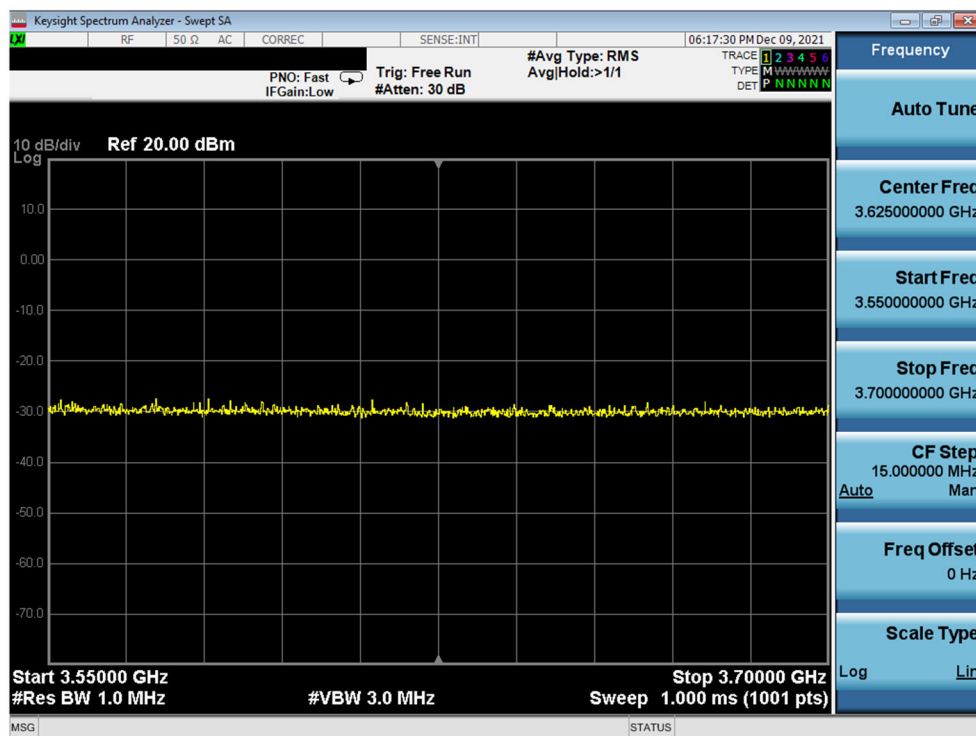


Plot 2. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.5)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 14 of 62

A4 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

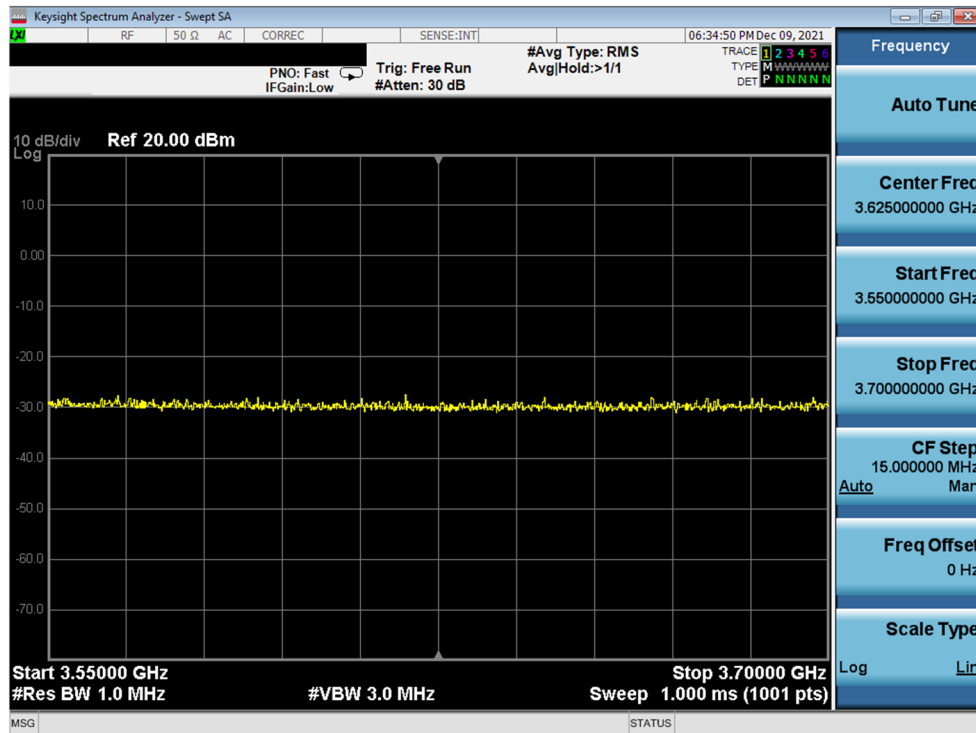


Plot 3. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.8)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 15 of 62

A5 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

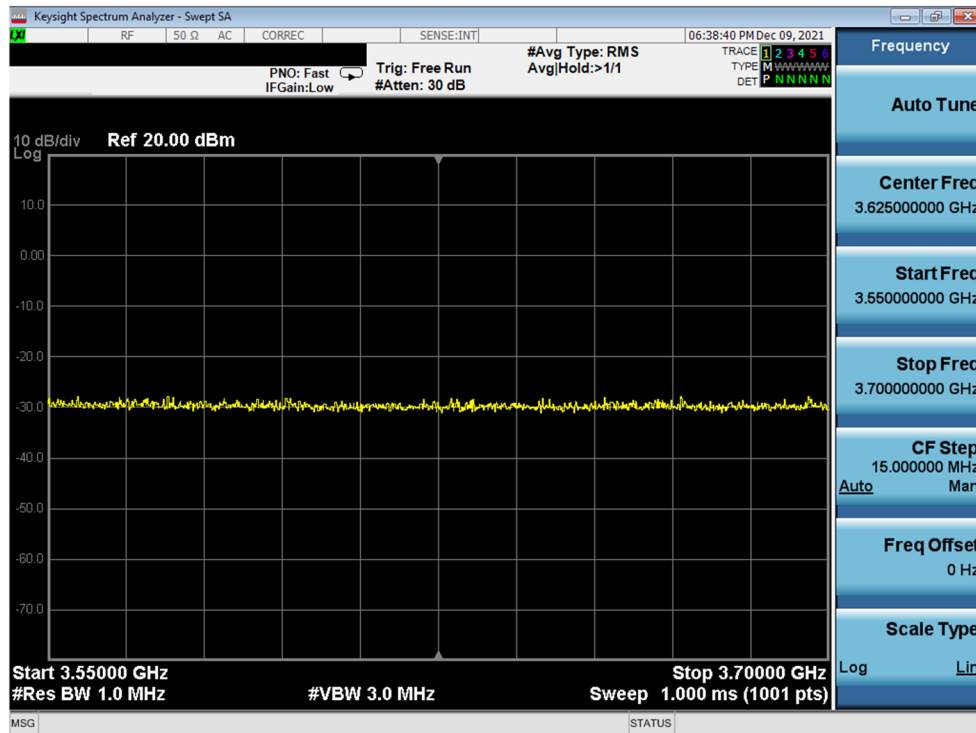


Plot 4. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.10)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 16 of 62

A6 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

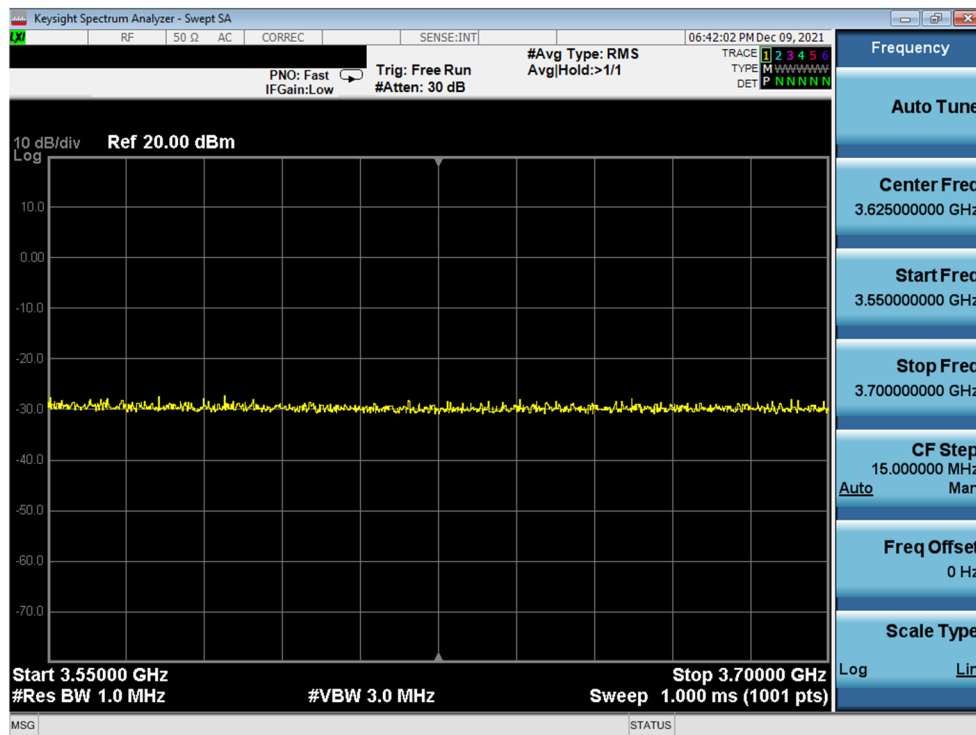


Plot 5. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.12)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 17 of 62

A7 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

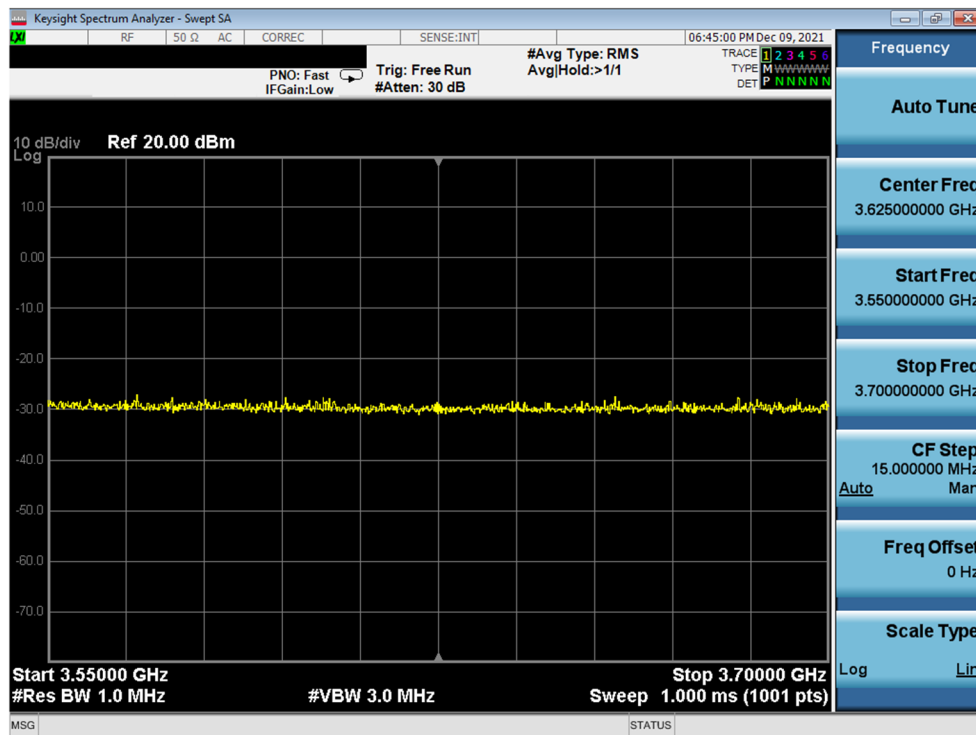


Plot 6. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.14)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 18 of 62

A8 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

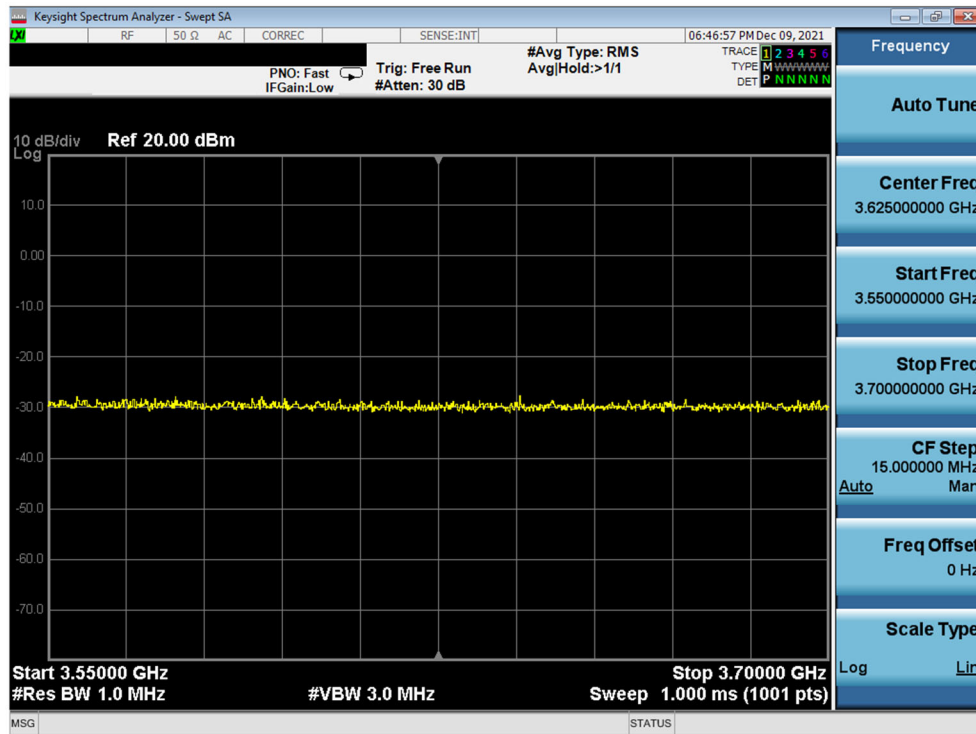


Plot 7. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.16)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 19 of 62

A9 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

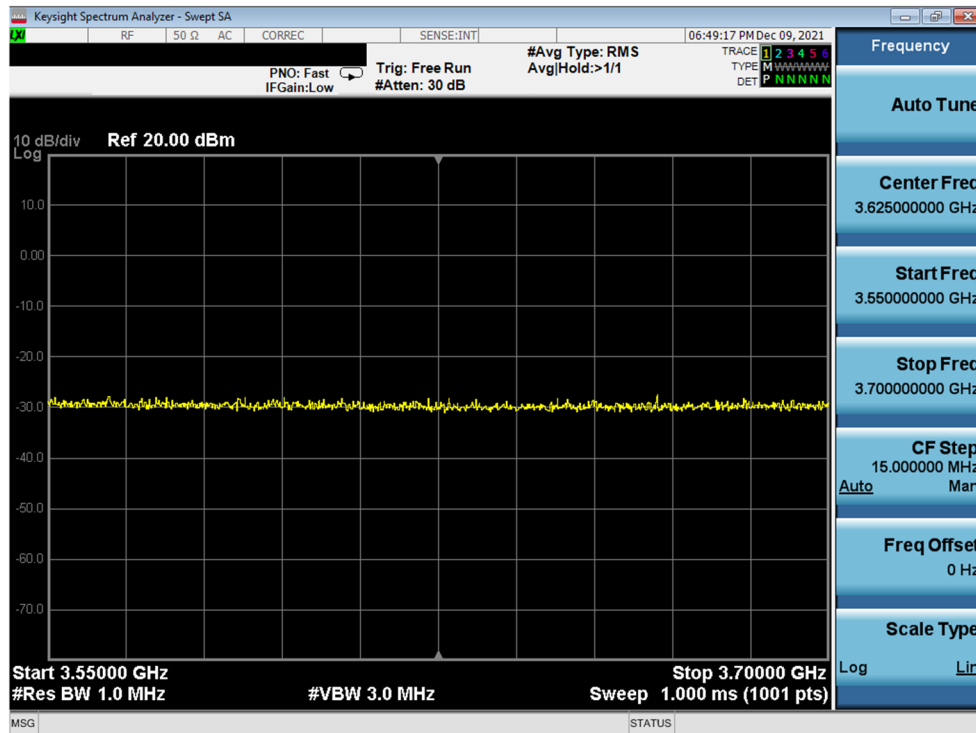


Plot 8. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.18)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 20 of 62

A10 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

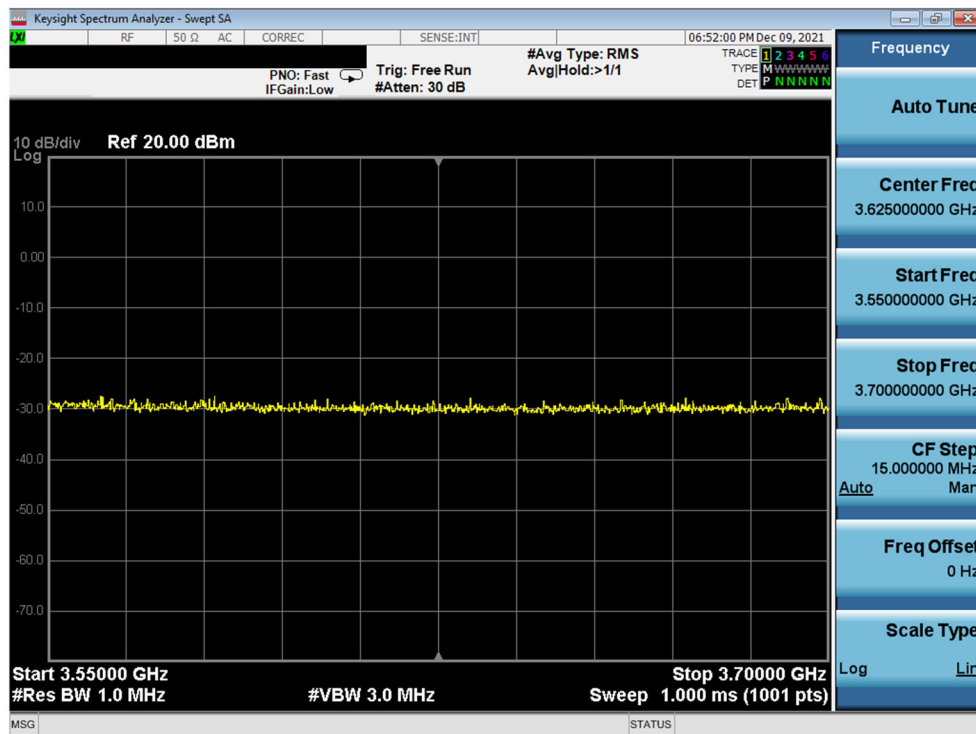


Plot 9. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.1)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 21 of 62

A11 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

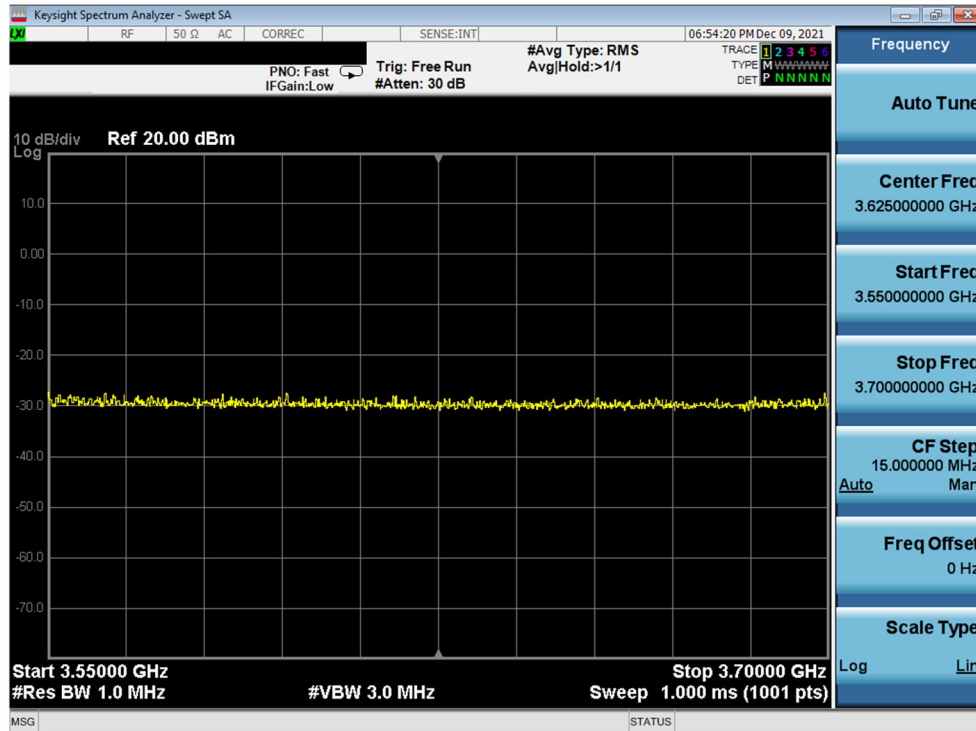

Plot 10. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.2)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 22 of 62


A12 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends a message: • If message is type Spectrum Inquiry Request, go to step 3, or • If message is type Grant Request, go to step 5	--	--
3	UUT sends Spectrum Inquiry Request. Validate: • cbsdId = C • List of frequencyRange objects sent by UUT are within the CBRS frequency range	☒	☐
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: • cbsdId = C • availableChannel is an array of availableChannel objects • responseCode = 0	--	--
5	UUT sends Grant Request message. Validate: • cbsdId = C • maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 • operationFrequencyRange, F, sent by UUT is a valid range within the CBRS band	☒	☐
6	SAS Test Harness sends a Grant Response message, including the parameters: • cbsdId = C • grantId = G = a valid grant ID • grantExpireTime = UTC time greater than duration of the test • responseCode = 0	--	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
9	For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and: • cbsdId = C • grantId = G • operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters:	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 23 of 62


	• cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0		
10	Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify: • UUT does not transmit at any time prior to completion of the first heartbeat response • UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F	☒	☐

Test Plots:

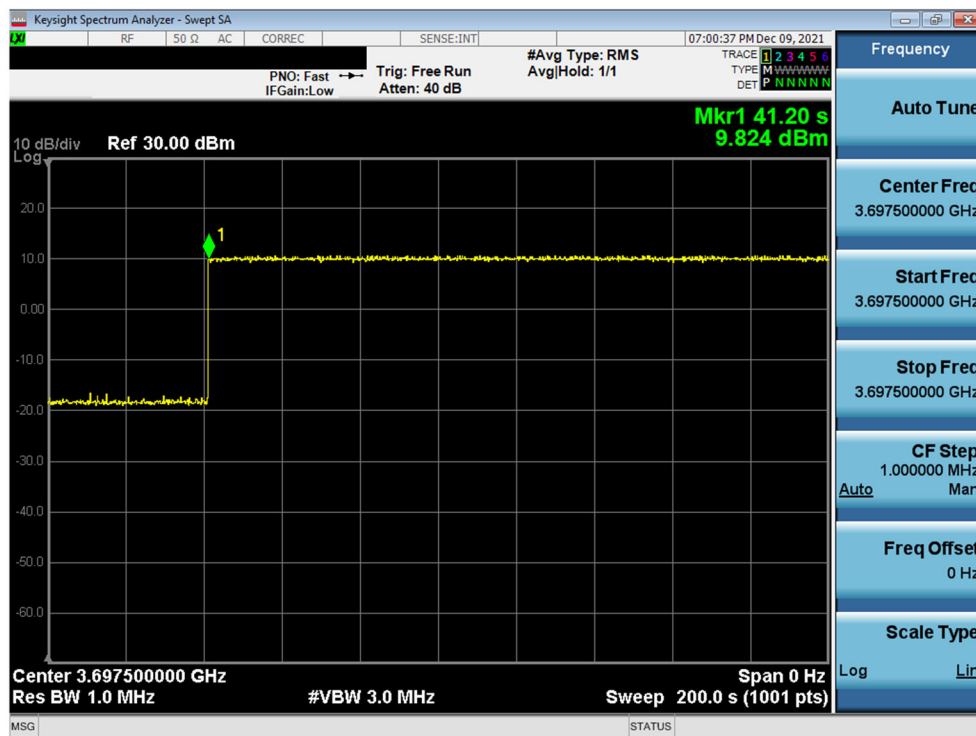

Plot 11. Conducted Measurement - RF transmission after SAS heartbeat response (WINNF.FT.C.HBT.1)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 24 of 62

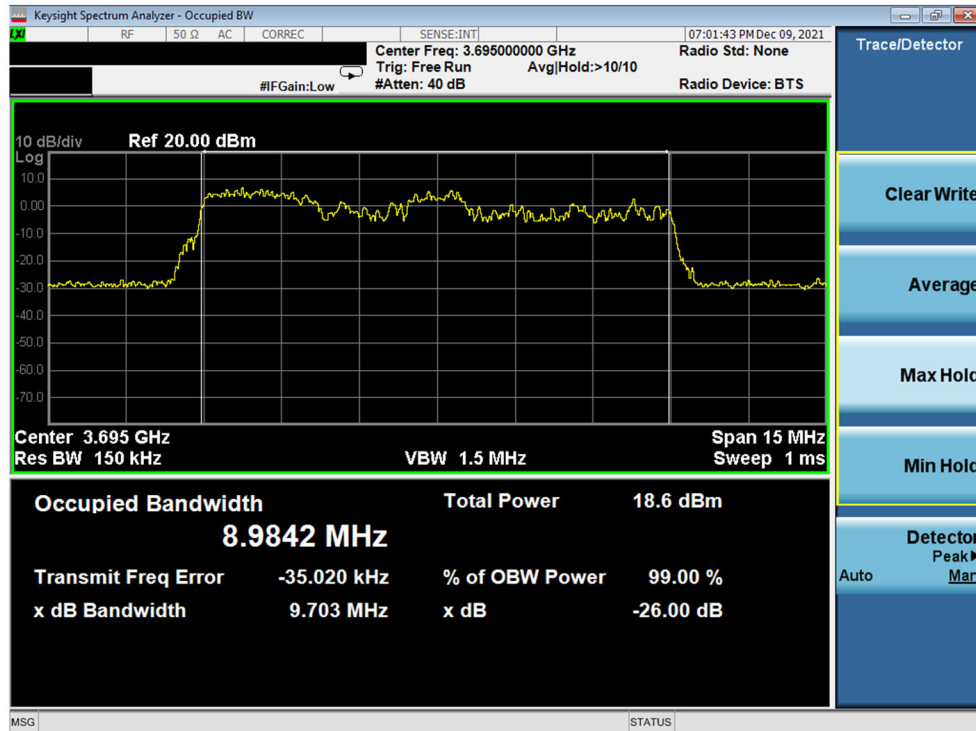

Plot 12. Conducted Measurement Occupied Bandwidth for 10MHz (WINNF.FT.C.HBT.1)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 25 of 62

A13 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 105 (DEREGISTER)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 26 of 62

Test Plots:

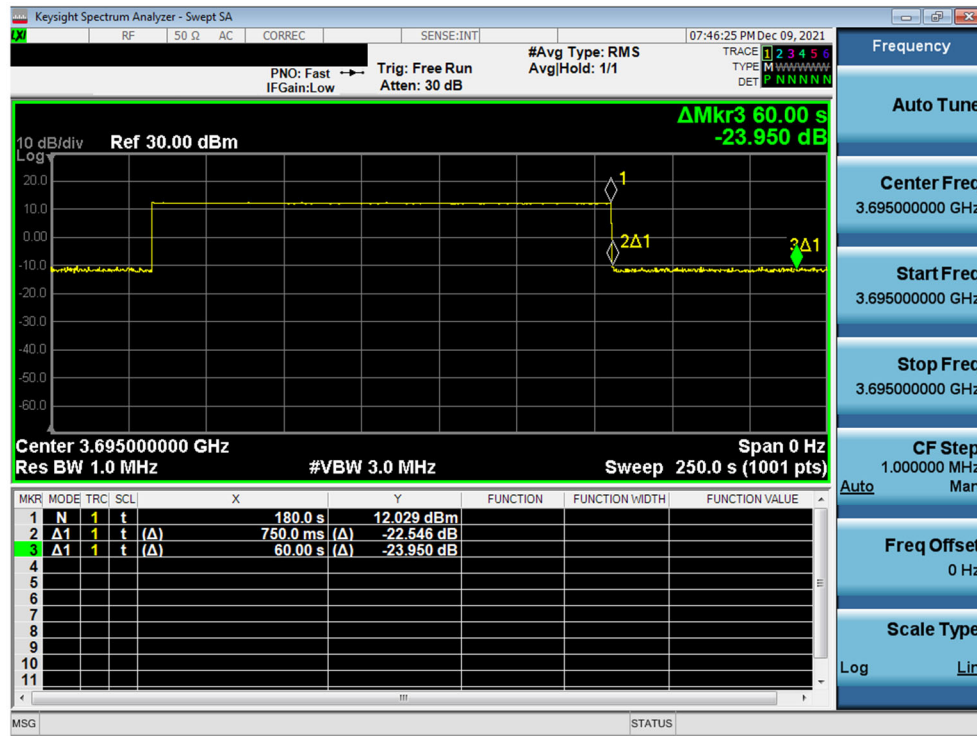

Plot 13. Conducted Measurement - RF transmission stops within 60s of SAS message indicated by Marker 1 (X) (WINNF.FT.C.HBT.3)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 27 of 62

A14 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 500 (TERMINATED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 28 of 62

Test Plots:

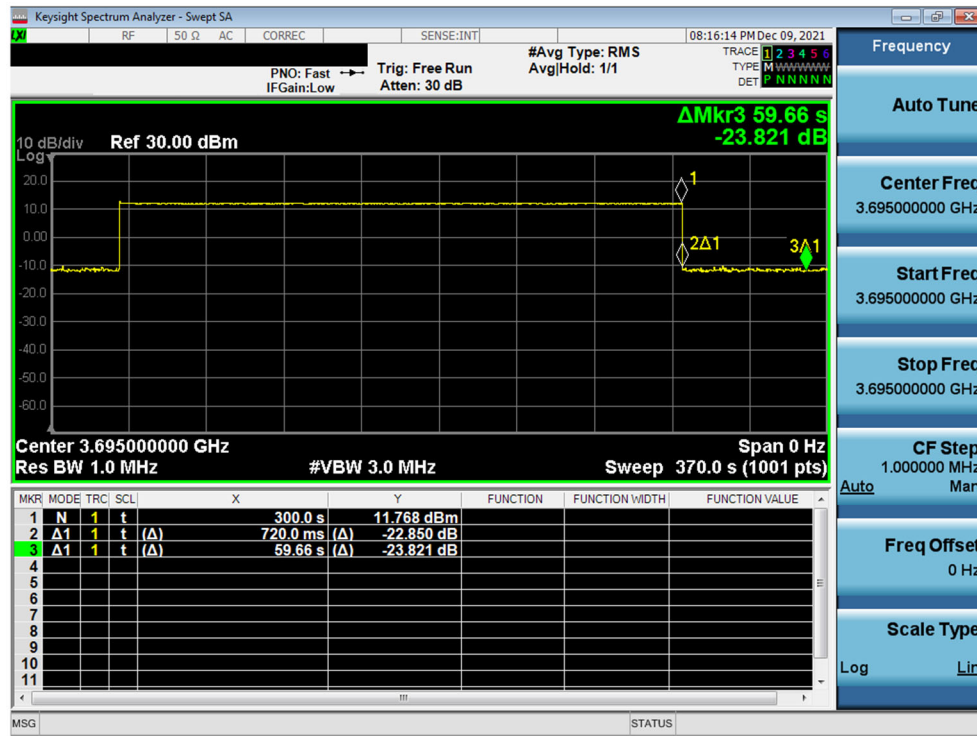

Plot 14. Conducted Measurement - RF transmission stops within 60s of SAS message indicated by Marker 1 (X) (WINNF.FT.C.HBT.4)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 29 of 62

A15 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: • UUT does not transmit at any time	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 30 of 62

Test Plots:

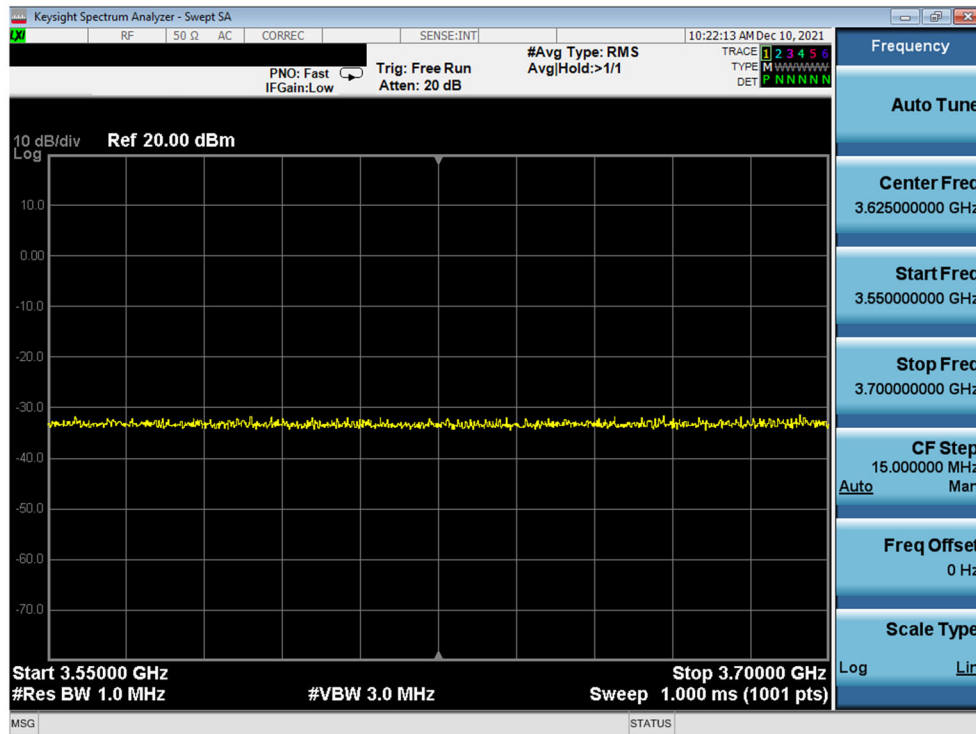

Plot 15. Conducted Measurement – No RF transmission in entire band (WINNF.TT.C.HBT.5)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 31 of 62

A16 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 32 of 62

Test Plots:

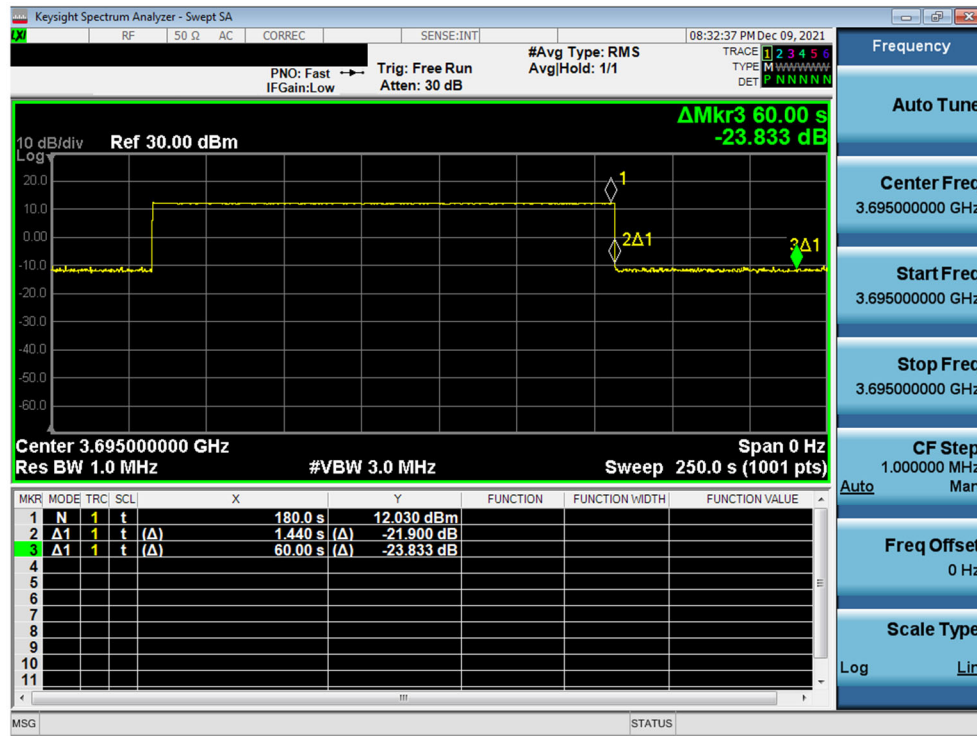

Plot 16. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.6)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 33 of 62

A17 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 502 (UNSYNC_OP_PARAM)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify: • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: - o cbsdId = C - o grantId = G Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T+60) seconds of completion of step 3.	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 34 of 62

Test Plots:

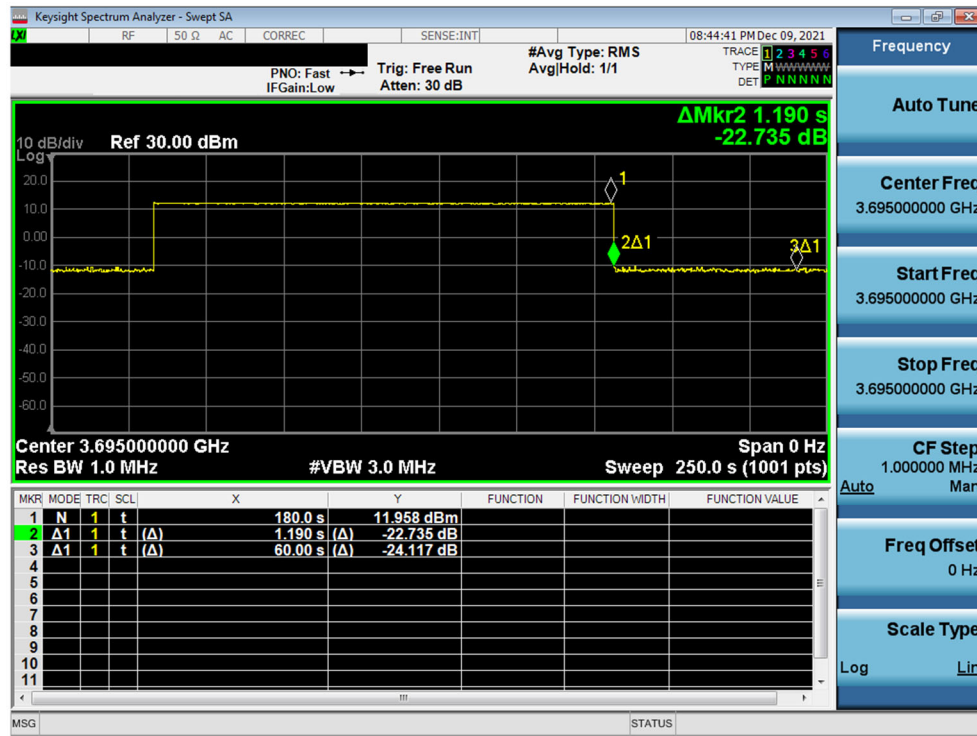

Plot 17. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.7)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 35 of 62

A18 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: • At any time during the test, UUT shall not transmit on RF interface	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 36 of 62

Test Plots:

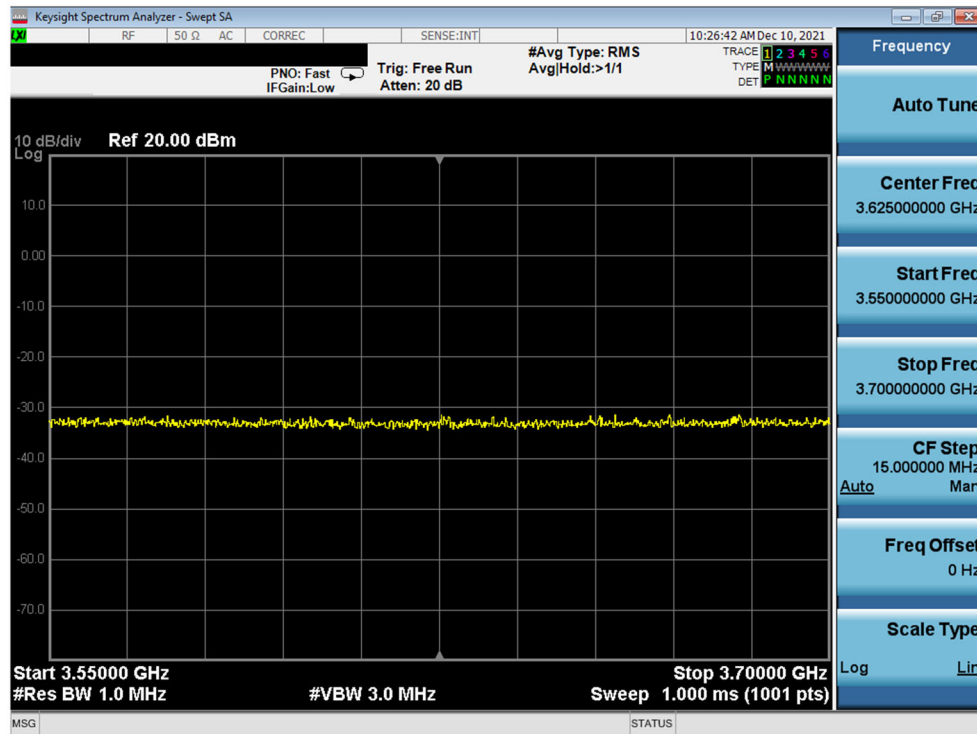

Plot 18. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.HBT.9)


FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 37 of 62

A19 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	Monitor the RF output of the UUT. Verify: • UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3.	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 38 of 62

Test Plots:

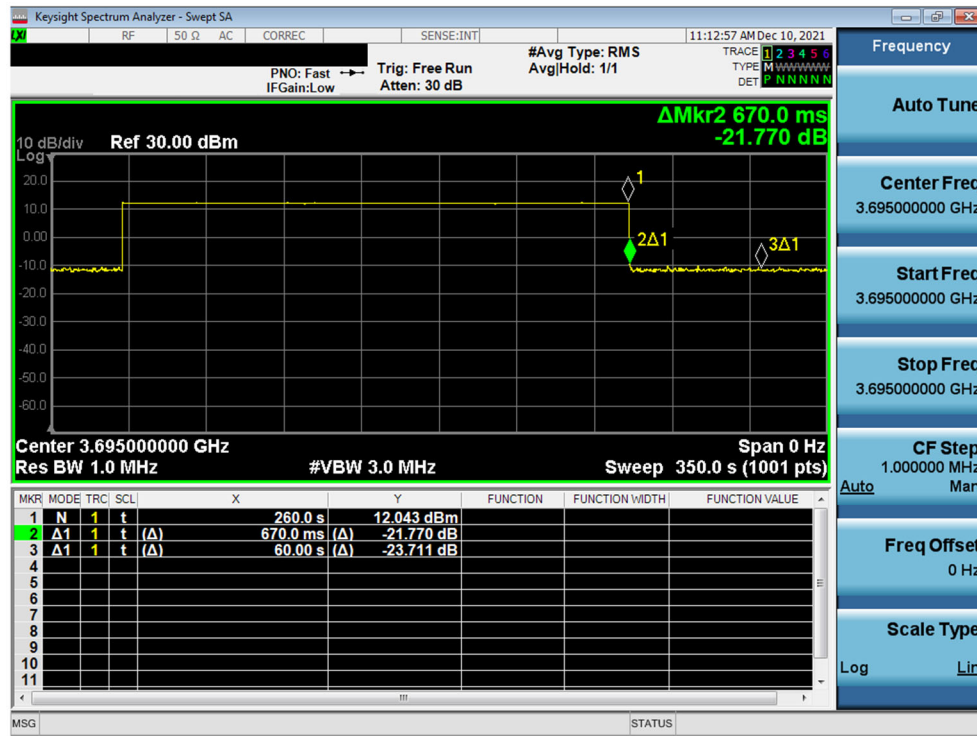

Plot 19. Conducted Measurement - RF transmission stops within transmitExpireTime + 60s. The last SAS heartbeat message is indicated by Marker 1 (X) (WINNF.FT.C.HBT.10)

FCC ID: 2AXTR-ECL4248-2401	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 39 of 62

A20 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C and measCapability = "RECEIVED_POWER_WITH_GRANT"	--	--
2	UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically: • cbsdId = C • operationParam is present and format is valid	☒	☐
3	SAS Test Harness sends a Grant Response message, with the following parameters: • cbsdId = C • grantId = G = valid grant ID • grantExpireTime = UTC time in the future • heartbeatInterval = 60 seconds • measReportConfig= "RECEIVED_POWER_WITH_GRANT" • operationParam is set to valid operating parameters • channelType = "GAA" • responseCode = 0	--	--
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
5	If Heartbeat Request message (step 4) contains measReport object, then: • verify measReport is properly formatted as object rcvdPowerMeasReport • end test, with PASS result else, if Heartbeat Request message (step 4) does not contain measReport object, then: If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL	☒	☐
6	SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0 Go to Step 4, above	--	--

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 40 of 62

A21 [WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C and measCapability = "RECEIVED_POWER_WITH_GRANT" • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. • Grant has heartbeatInterval = 60 seconds	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message contains all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G • measReportConfig= "RECEIVED_POWER_WITH_GRANT" • responseCode = 0	--	--
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
5	If Heartbeat Request message (step 4) contains measReport object, then: • verify measReport is properly formatted as object rcvdPowerMeasReport • end test, with PASS result else, if Heartbeat Request message (step 4) does not contain measReport object, then: • If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL	☒	☐
6	SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G • responseCode = 0 Go to Step 4, above	--	--

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 41 of 62

A22 [WINNF.FT.C.RLQ.1] Successful Relinquishment

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G	☒	☐
3	SAS Test Harness shall approve the request with a Relinquishment Response message with parameters: • cbsdId = C • grantId = G • responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	☒	☐

FCC ID: 2AXTR-ECL4248-2401		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2112130161-01-R2.2AXTR	Test Dates: 12/09/2021 – 12/15/2021	EUT Type: Cat B LTE Picocell base station for CBRS		Page 42 of 62