



Antenna Test Report

Project No	MNDBPOE1	PCB Version	V0.2
Tester	MoQi	Date	2024.9.6
Auditing		Date	
Approval		Date	

Contents

一、 Project Information	3rd
二、 Technical Specification	4th
三、 The shape and size of the antenna	7th
四、 The result of the test	9th
1 .VSWR & Return loss & Smith	9th
2. Antenna Testing Environment	10th
3 .Gain and Efficiency	13th
4 .3D Radiation Pattern	20th
5. 2D Radiation Pattern	23rd

一、Project Information


1. Antenna Coding: [ANT-LMIL8024007 \(ANT-915\)](#) , [ANT-BMIL8024008 \(ANT-J2/J3\)](#) ,
[ANT-WBNCNC24009 \(ANT-WiFi\)](#)

2. Antenna Type: [Metal Antenna and onboard Antenna](#)

3. Model of the DUT: [MNDBPOE1](#)

4 .Test Data : [2024.9.2](#)

5 .Product picture:

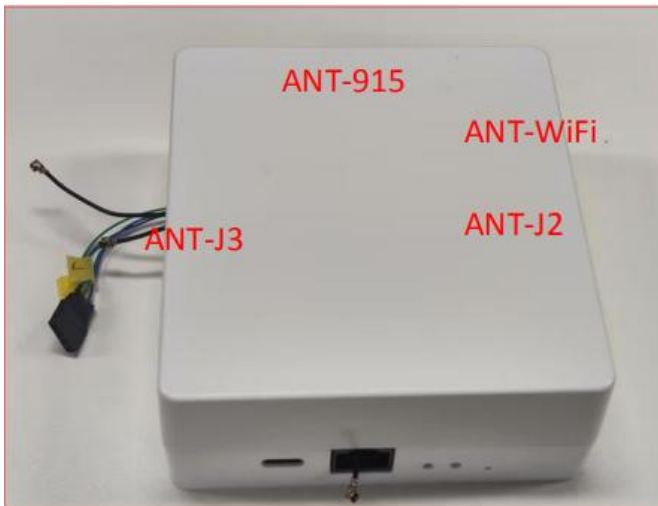Product appearance	
PCB board and antenna	

二、Technical Specification

ANT-J3

Electrical Specifications	
Frequency Range	2400-2480 MHz
Peak Gain	4.92dBi
Efficiency	74.95%
Return Loss	≤ -15.02 dB (MAX)
VSWR	≤ 1.4 (MAX)
Bandwidth (S11 $\leq$ -10dB)	110 MHz
Input Impedance	50 Ω
Radiation direction	Directional ANT
Polarization Type	Linear
Lightning Protection	DC grounding
Power Capacity	1000mW (30dBm)
Mechanical Specifications	
Antenna Size	18.25 x 17.90 mm
Core Radiator	Copper
Coaxial wire	L=80mm, $\varnothing$ 1.13mm
Connect Type	IPEX-1
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +85° C

ANT-J2

Electrical Specifications	
Frequency Range	2400-2480 MHz
Peak Gain	5.09dBi
Efficiency	79.06%
Return Loss	≤ -12.0 dB (MAX)
VSWR	≤ 1.8 (MAX)
Bandwidth (S11 ≤ -10 dB)	120 MHz
Input Impedance	50 Ω
Radiation direction	Directional ANT
Polarization Type	Linear
Lightning Protection	DC grounding
Power Capacity	1000mW (30dBm)
Mechanical Specifications	
Antenna Size	18.25 x 17.90 mm
Core Radiator	Copper
Coaxial wire	L=80mm, $\varnothing$ 1.13mm
Connect Type	IPEX-1
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +85° C

ANT-915


Electrical Specifications	
Frequency Range	900-928 MHz
Peak Gain	3.02 dBi
Efficiency	73.80%
Return Loss	≤ -14.3 dB (MAX)
VSWR	≤ 1.4 (MAX)
Bandwidth (S11 $\leq$ -10dB)	150 MHz
Input Impedance	50 Ω
Radiation direction	Directional ANT
Polarization Type	Linear
Lightning Protection	DC grounding
Power Capacity	1000mW (30dBm)
Mechanical Specifications	
Antenna Size	55x 21 mm
Core Radiator	Copper
Coaxial wire	L=80mm, $\varnothing$ 1.13mm
Connect Type	IPEX-1
Operating Temperature	-40 to +85° C
Storage Temperature	-40 to +85° C

ANT-WIFI


Electrical Specifications	
Frequency Range	2400-2480 MHz
Peak Gain	3.33dBi
Efficiency	64.63%
Return Loss	≤ -12.9 dB (MAX)
VSWR	≤ 1.88 (MAX)
Bandwidth (S11 ≤ -10 dB)	150 MHz
Input Impedance	50 Ω
Radiation direction	Omni
Polarization Type	Linear
Lightning Protection	DC grounding
Power Capacity	1000mW (30dBm)
Mechanical Specifications	
Antenna Size	5.56 x 14.60 mm
Core Radiator	Copper
Substrate material	FR4
Substrate thickness	0.8 mm
Substrate Size (mm)	6.22 x 18 mm
Coaxial wire	板载无, 外接天线需要
Connect Type	板载无, 外接天线需要
Operating Temperature	-40 to +85 ° C
Storage Temperature	-40 to +85 ° C

三、The shape and size of the antenna


1、ANT-J3&ANT-J2

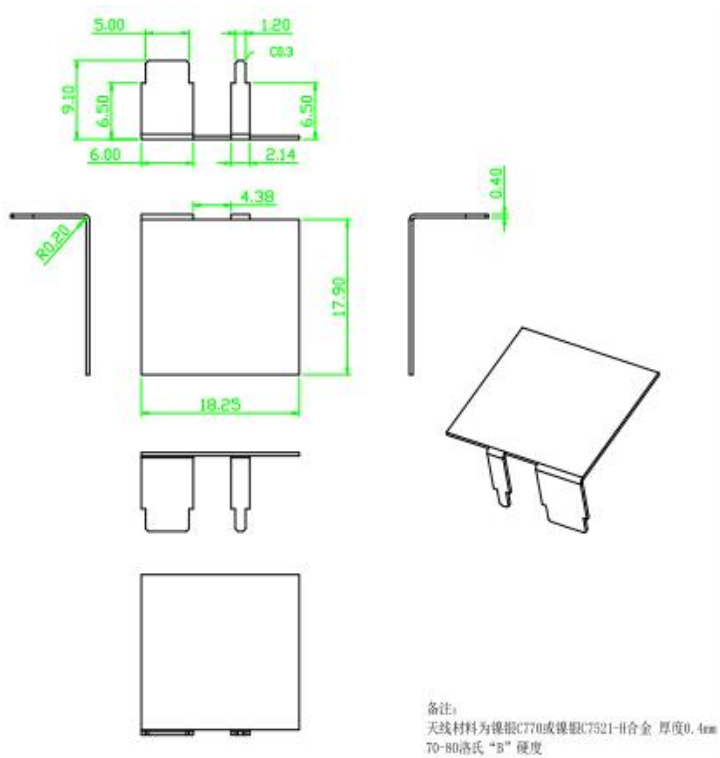

2、ANT-915

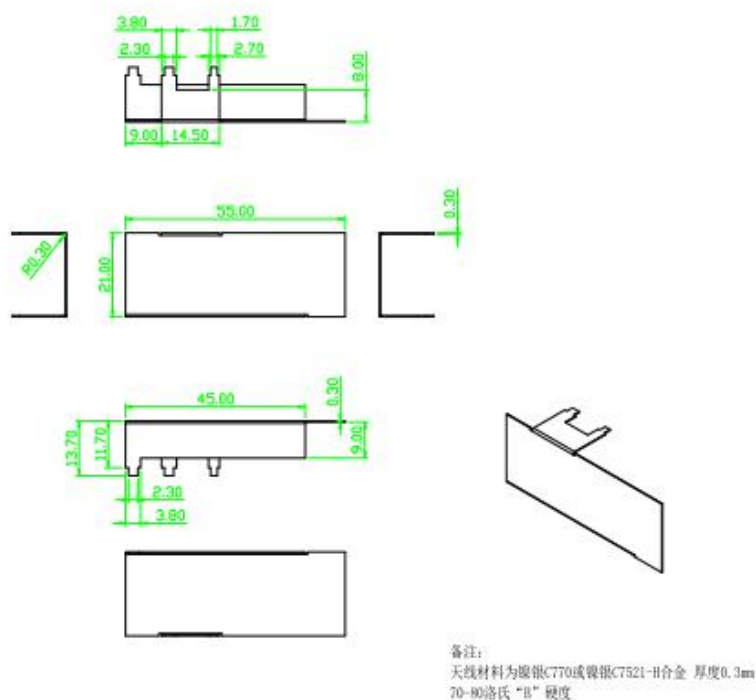


3、ANT-WIFI

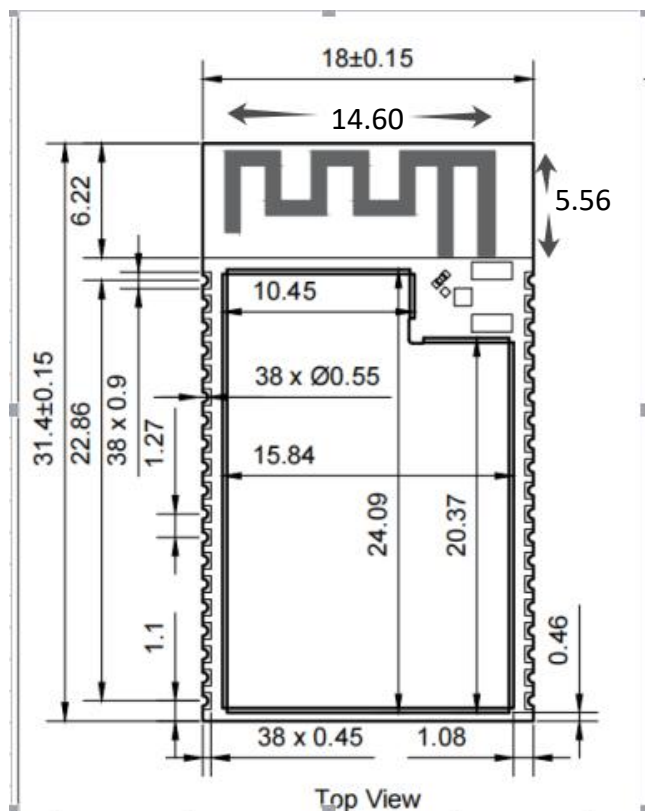

四、The result of the test


1. VSWR & Return loss & Smith

ANT-J3

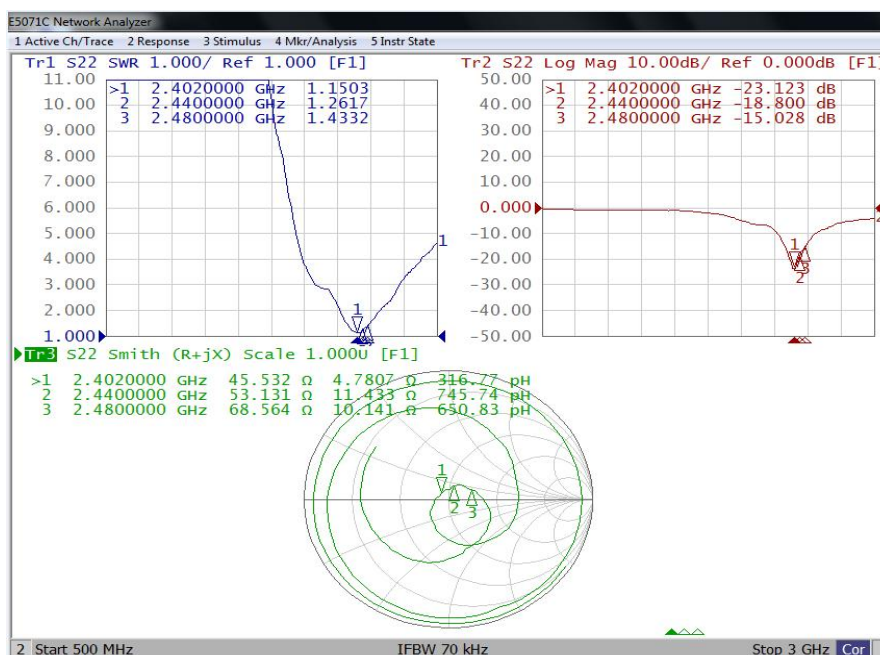


Frequency (MHz)	Return Loss (dB)	VSWR
2402	-23.1	1.15
2440	-18.8	1.26
2480	-15.0	1.43
Bandwidth (S11≤-10dB)	120	

ANT-J2

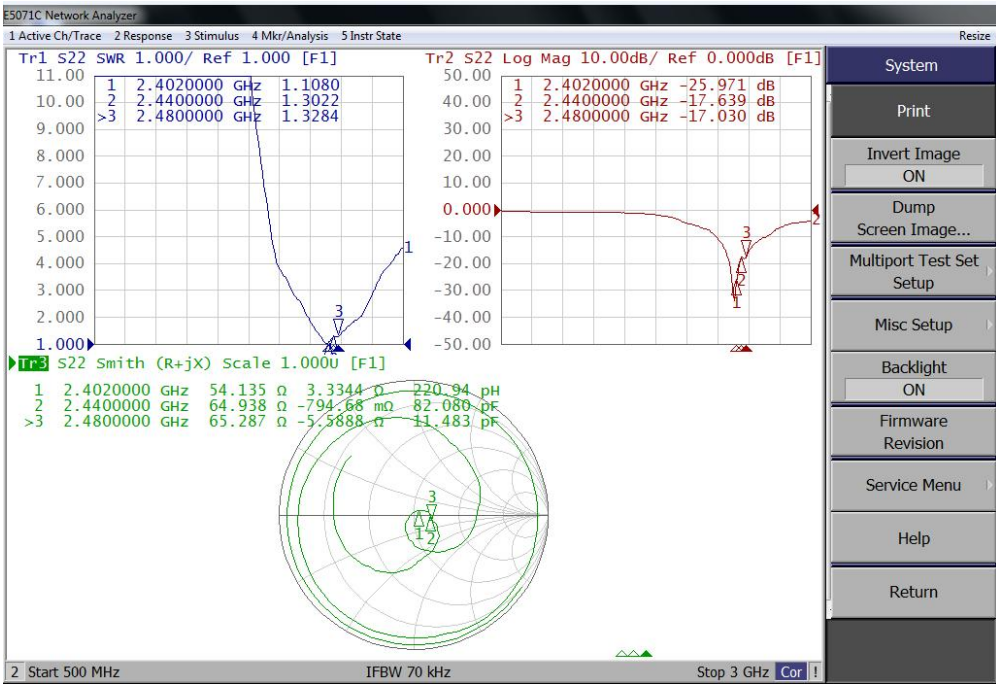


Frequency (MHz)	Return Loss (dB)	VSWR
2402	-25.9	1.10
2440	-17.6	1.30
2480	-17.0	1.32
Bandwidth (S11≤-10dB)	170	

ANT-915

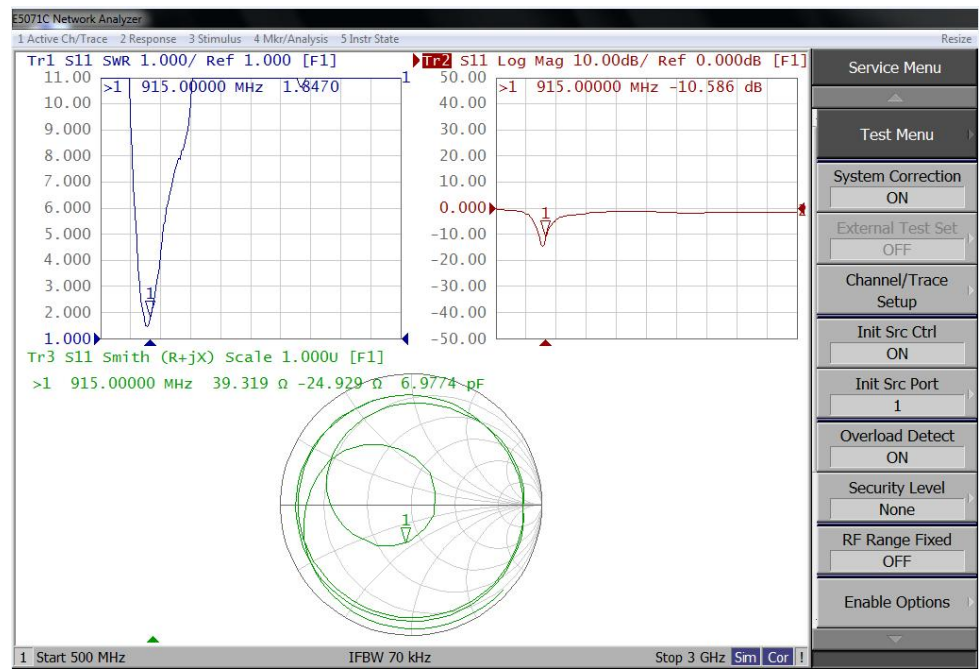

Frequency (MHz)	Return Loss (dB)	VSWR
915	-10.58	1.84
Bandwidth (S11≤-10dB)	30	

ANT-WIFI

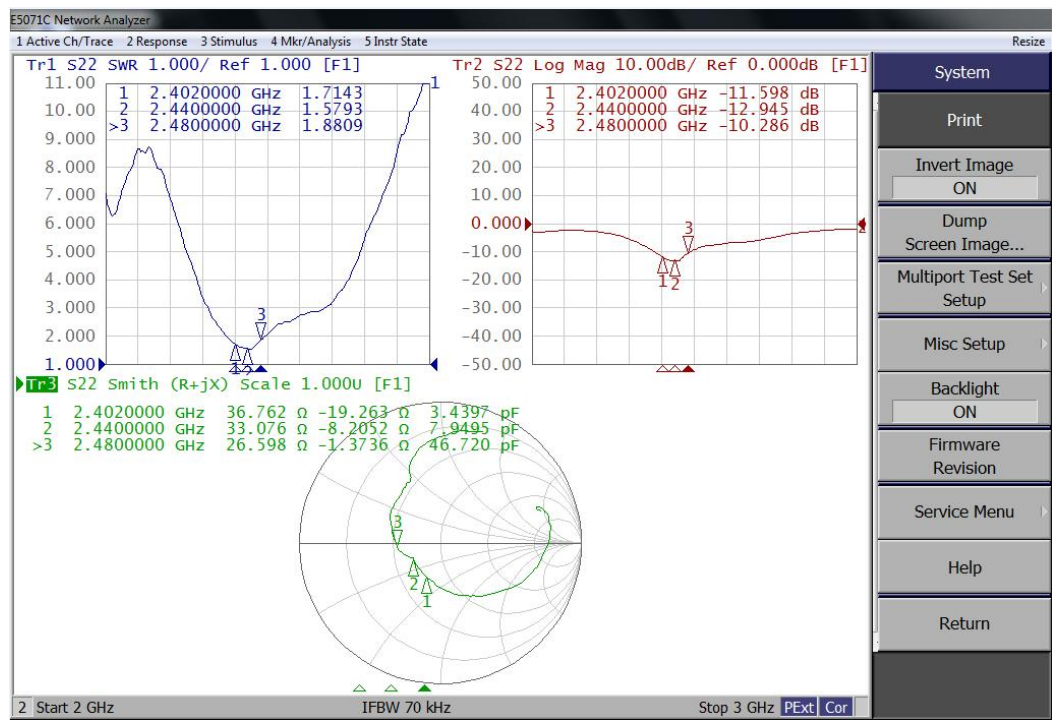


Frequency (MHz)	Return Loss (dB)	VSWR
2402	-11.5	1.71
2440	-12..9	1.57
2480	-10.2	1.88
Bandwidth ($S_{11} \leq -10\text{dB}$)	120	

2. Antenna Testing Environment

(1).Test Equipment : SY-24M, Agilent-E5071C

(2).Test Engineer : MoQi

(3).Test Environment : The microwave unreflected chamber


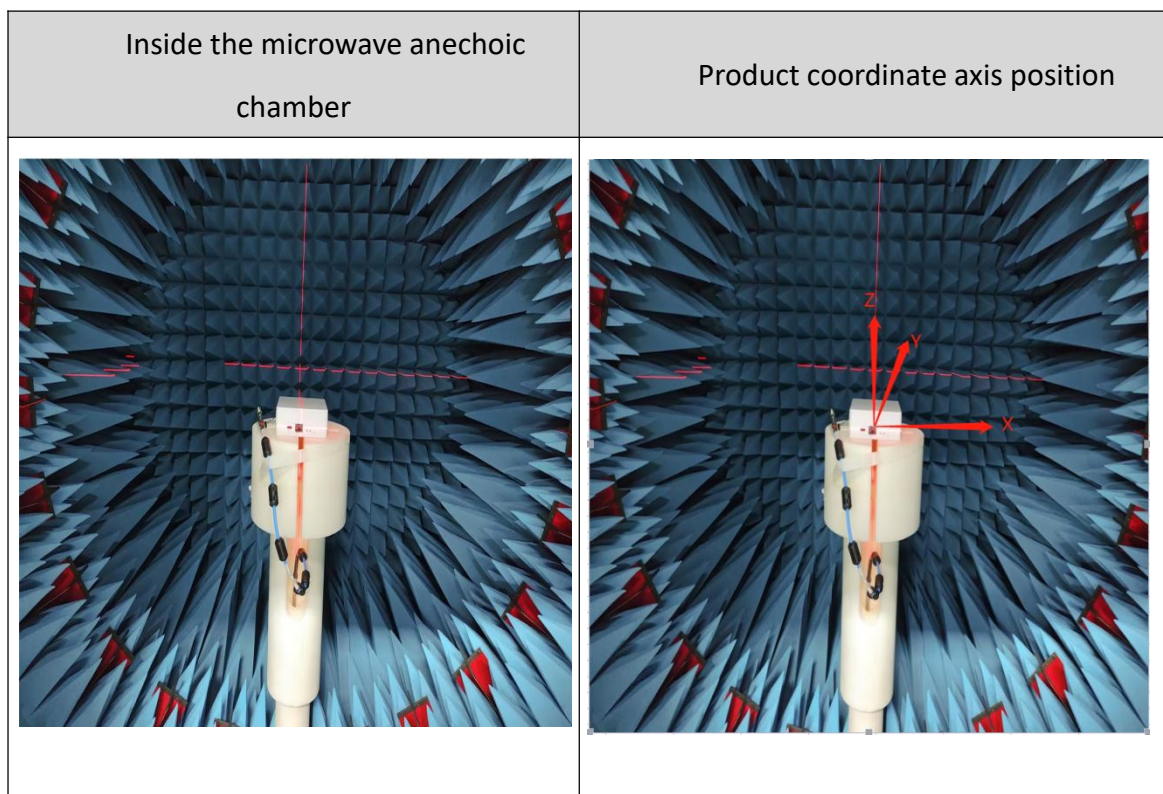


3. Gain and Efficiency

(1).ANT-J3

频率(MHz)	增益(dBi)	效率(dB)	效率(%)
2400	4.92	-1.48	71.12
2402	4.89	-1.49	70.88
2404	4.88	-1.49	71.00
2406	4.91	-1.48	71.12
2408	4.90	-1.48	71.14
2410	4.88	-1.48	71.11
2412	4.86	-1.49	70.90
2414	4.83	-1.50	70.80
2416	4.87	-1.48	71.05
2418	4.85	-1.48	71.04
2420	4.81	-1.51	70.69
2422	4.79	-1.51	70.61
2424	4.77	-1.52	70.41
2426	4.78	-1.50	70.77
2428	4.77	-1.50	70.85
2430	4.76	-1.51	70.70
2432	4.76	-1.51	70.66
2434	4.76	-1.52	70.43
2436	4.77	-1.51	70.62
2438	4.76	-1.51	70.56
2440	4.76	-1.50	70.73
2442	4.78	-1.48	71.20
2444	4.77	-1.48	71.18
2446	4.74	-1.47	71.32
2448	4.72	-1.49	71.03
2450	4.73	-1.46	71.49
2452	4.71	-1.45	71.63
2454	4.70	-1.42	72.04
2456	4.68	-1.39	72.56
2458	4.64	-1.41	72.24
2460	4.57	-1.46	71.51
2462	4.55	-1.48	71.11
2464	4.57	-1.47	71.28
2466	4.59	-1.44	71.74
2468	4.64	-1.41	72.33
2470	4.66	-1.41	72.25



2472	4.69	-1.41	72.26
2474	4.71	-1.42	72.04
2476	4.69	-1.42	72.17
2478	4.73	-1.40	72.51
2480	4.78	-1.36	73.18

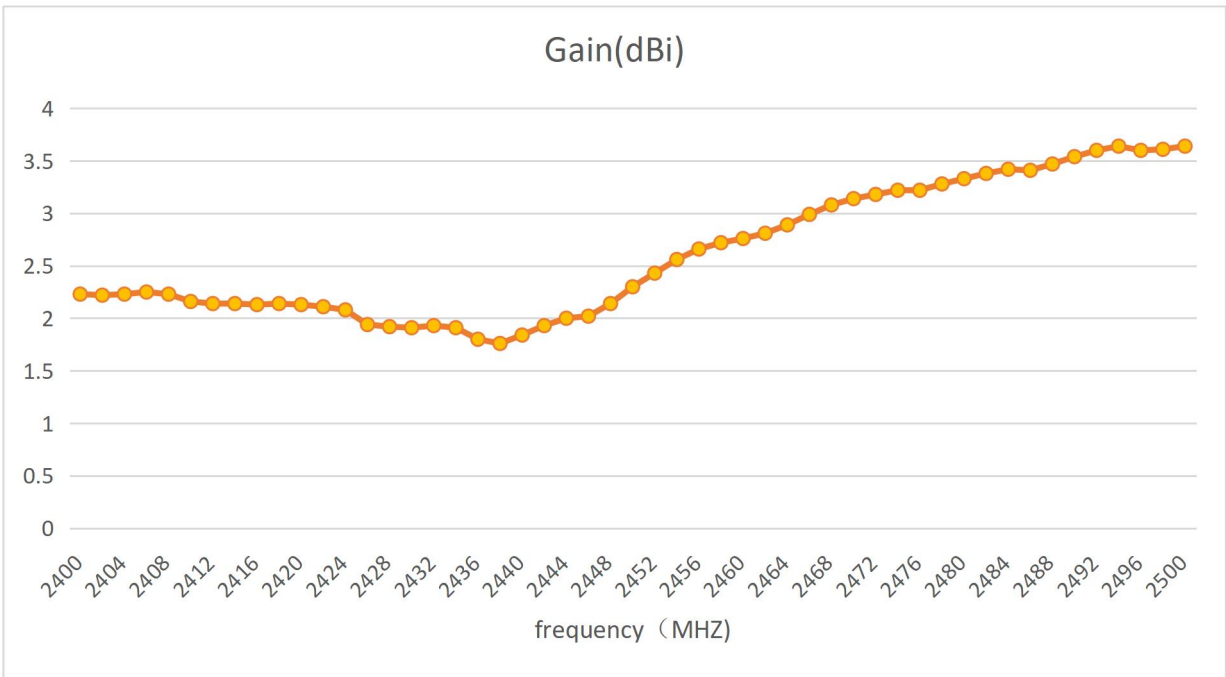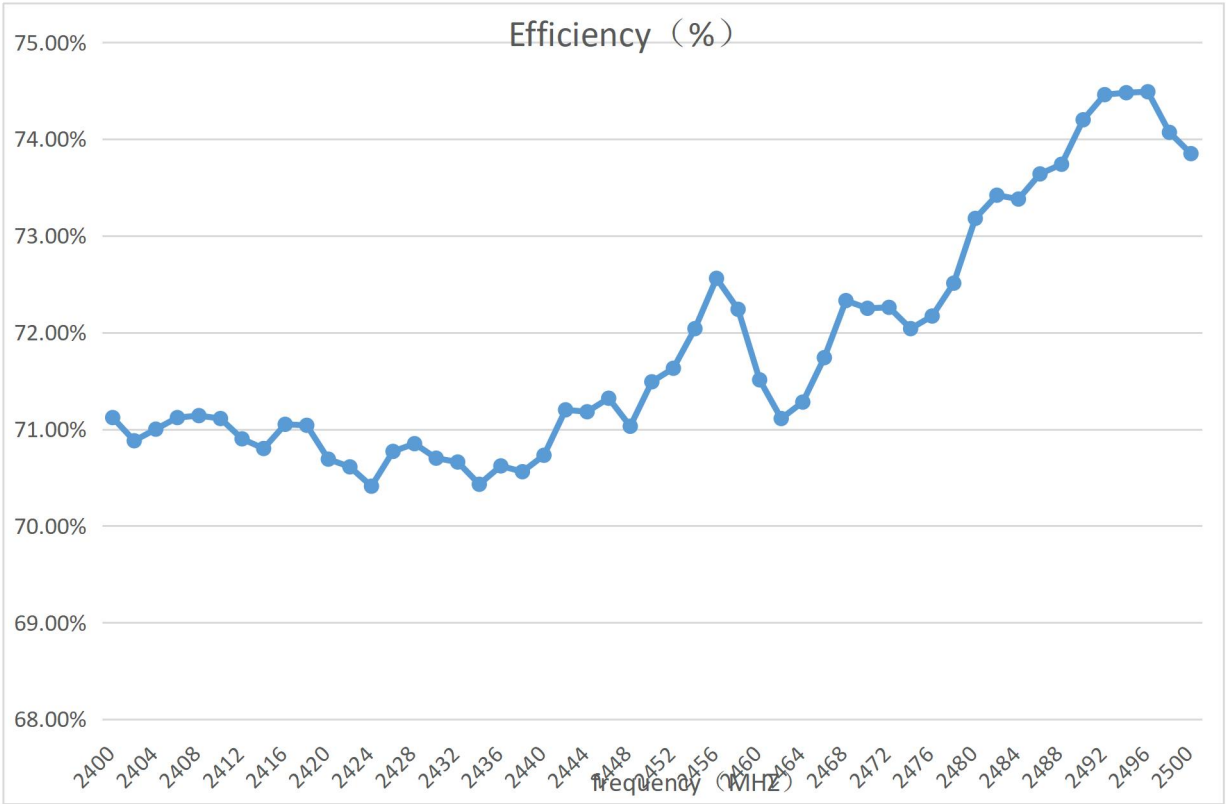

(2). ANT-J2

频率 (MHz)	增益 (dBi)	效率 (dB)	效率 (%)
2400	4.86	-1.13	77.04
2402	4.84	-1.15	76.66
2404	4.82	-1.15	76.67
2406	4.86	-1.16	76.58
2408	4.84	-1.17	76.38
2410	4.82	-1.18	76.16
2412	4.78	-1.21	75.72
2414	4.75	-1.22	75.52
2416	4.73	-1.23	75.39
2418	4.71	-1.24	75.16
2420	4.68	-1.28	74.50
2422	4.68	-1.30	74.19
2424	4.67	-1.32	73.83
2426	4.61	-1.33	73.69
2428	4.57	-1.35	73.35
2430	4.54	-1.38	72.79
2432	4.54	-1.41	72.33
2434	4.54	-1.44	71.76
2436	4.52	-1.45	71.56
2438	4.51	-1.48	71.18
2440	4.49	-1.50	70.82
2442	4.51	-1.49	70.91
2444	4.52	-1.51	70.56
2446	4.48	-1.54	70.19
2448	4.48	-1.56	69.75
2450	4.50	-1.55	69.96
2452	4.49	-1.56	69.83
2454	4.49	-1.55	70.04
2456	4.52	-1.53	70.34
2458	4.52	-1.54	70.20
2460	4.51	-1.56	69.76
2462	4.54	-1.57	69.62
2464	4.61	-1.55	70.02
2466	4.69	-1.50	70.86
2468	4.77	-1.44	71.81
2470	4.81	-1.42	72.16
2472	4.87	-1.39	72.63
2474	4.91	-1.38	72.80


2476	4.96	-1.35	73.27
2478	5.02	-1.31	73.99
2480	5.09	-1.25	74.94

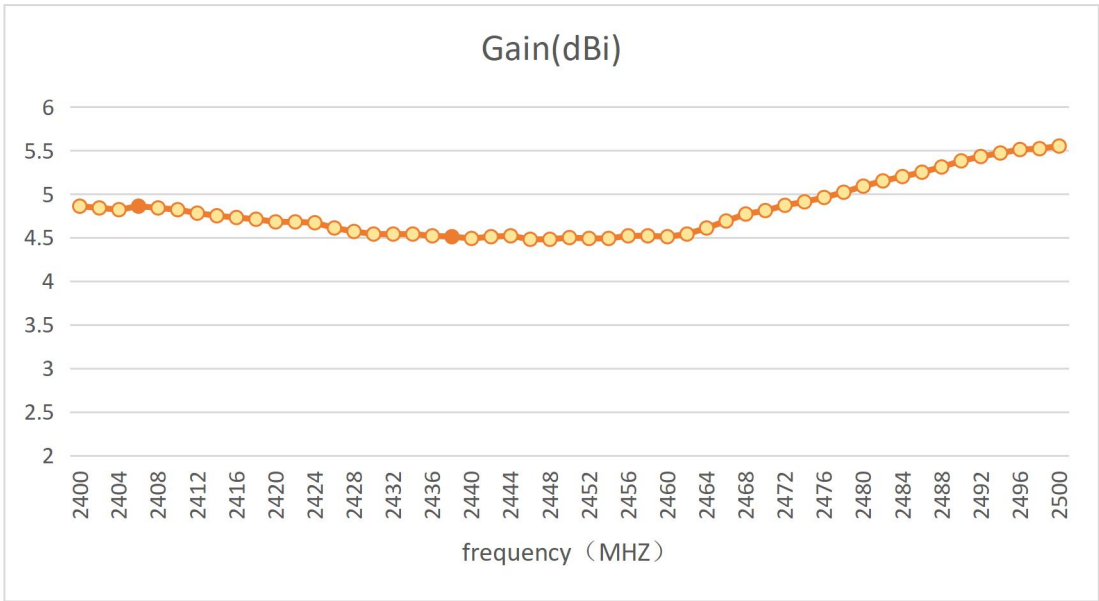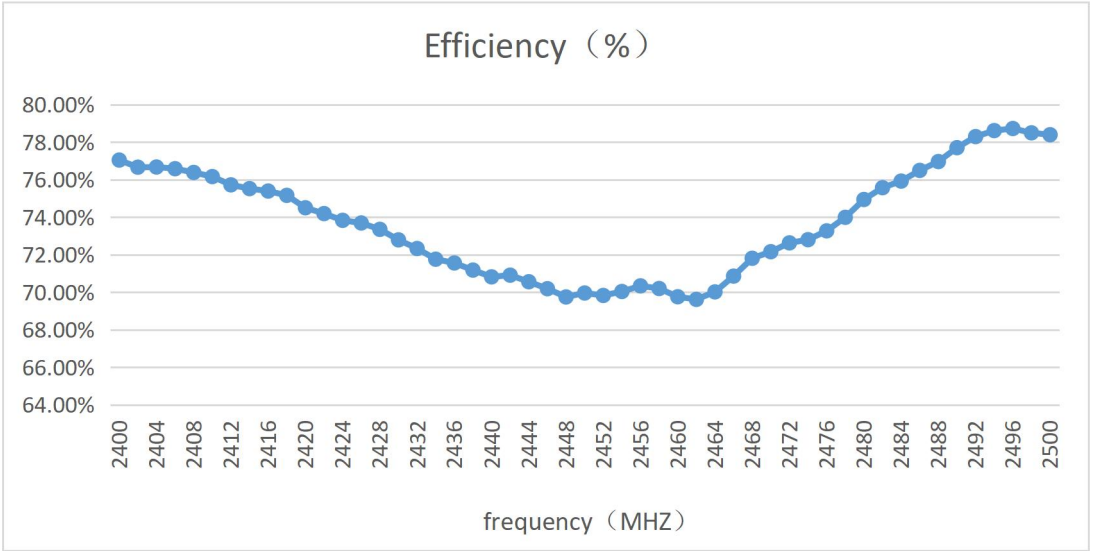


(3). ANT-915

频率(MHz)	增益(dBi)	效率(dB)	效率(%)
900	3.01	-1.35	73.27
901	3.02	-1.32	73.71
902	3.01	-1.32	73.80
903	2.97	-1.35	73.33
904	2.90	-1.41	72.31
905	2.81	-1.50	70.83

906	2.75	-1.51	70.66
907	2.75	-1.52	70.53
908	2.75	-1.52	70.43
909	2.74	-1.53	70.36
910	2.74	-1.53	70.33
911	2.71	-1.56	69.80
912	2.68	-1.59	69.33
913	2.67	-1.60	69.12
914	2.65	-1.63	68.76
915	2.64	-1.65	68.36
916	2.51	-1.68	67.92
917	2.49	-1.71	67.45
918	2.48	-1.73	67.13
919	2.47	-1.74	66.93
920	2.47	-1.74	66.92
921	2.42	-1.79	66.18
922	2.38	-1.83	65.64
923	2.34	-1.86	65.22
924	2.33	-1.85	65.24
925	2.33	-1.84	65.40
926	2.26	-1.87	65.06
927	2.23	-1.88	64.90
928	2.20	-1.89	64.70


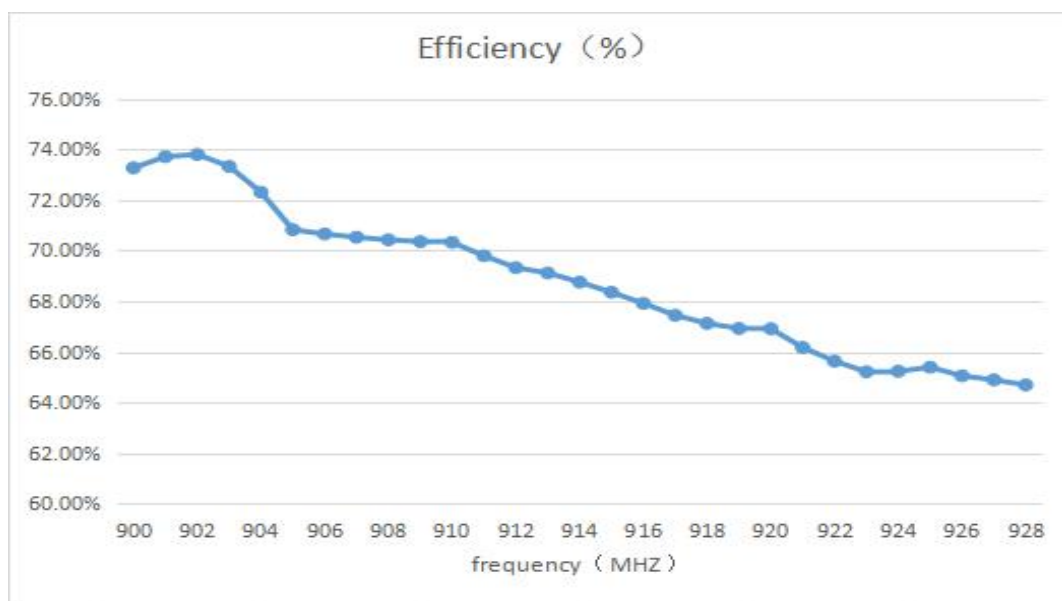


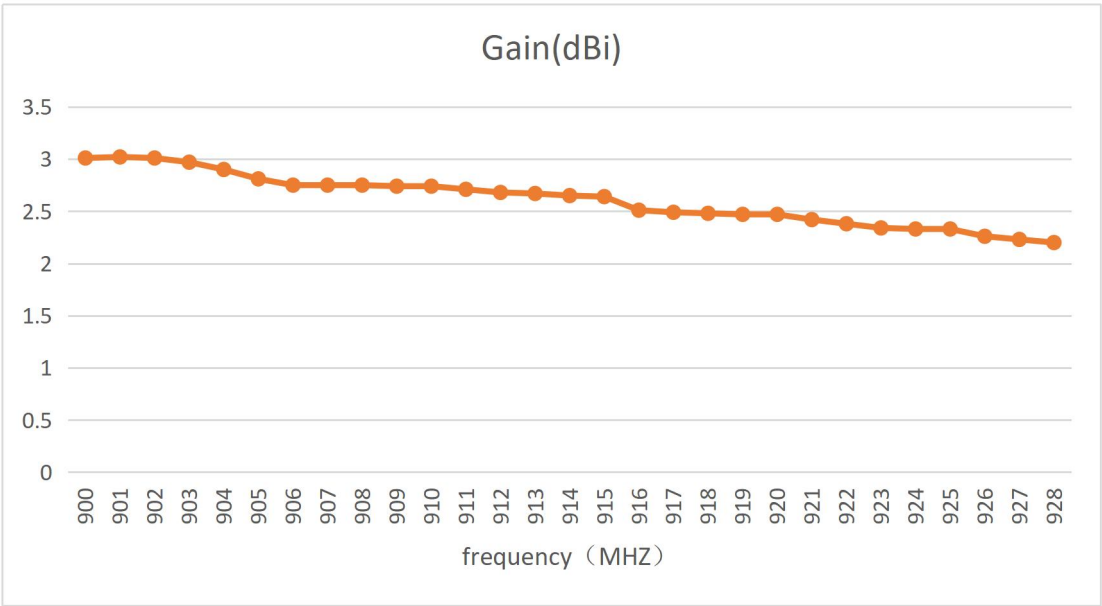

(4). ANT-WIFI


频率(MHz)	增益(dBi)	效率(dB)	效率(%)
2400	2.23	-1.94	63.93
2402	2.22	-1.95	63.83
2404	2.23	-1.94	63.91
2406	2.25	-1.93	64.12
2408	2.23	-1.93	64.10
2410	2.16	-1.94	63.99
2412	2.14	-1.95	63.84
2414	2.14	-1.95	63.79
2416	2.13	-1.94	63.99
2418	2.14	-1.95	63.83
2420	2.13	-1.98	63.42
2422	2.11	-1.99	63.28
2424	2.08	-2.00	63.13
2426	1.94	-2.00	63.04
2428	1.92	-2.01	62.99
2430	1.91	-2.03	62.68
2432	1.93	-2.04	62.57
2434	1.91	-2.06	62.30
2436	1.80	-2.08	61.93
2438	1.76	-2.09	61.75
2440	1.84	-2.09	61.75
2442	1.93	-2.08	62.00
2444	2.00	-2.08	61.94
2446	2.02	-2.13	61.26

2448	2.14	-2.14	61.07
2450	2.30	-2.12	61.39
2452	2.43	-2.12	61.37
2454	2.56	-2.11	61.54
2456	2.66	-2.12	61.41
2458	2.72	-2.14	61.06
2460	2.76	-2.19	60.46
2462	2.81	-2.21	60.10
2464	2.89	-2.21	60.18
2466	2.99	-2.18	60.54
2468	3.08	-2.15	60.95
2470	3.14	-2.14	61.03
2472	3.18	-2.14	61.15
2474	3.22	-2.13	61.30
2476	3.22	-2.13	61.24
2478	3.28	-2.10	61.71
2480	3.33	-2.06	62.26

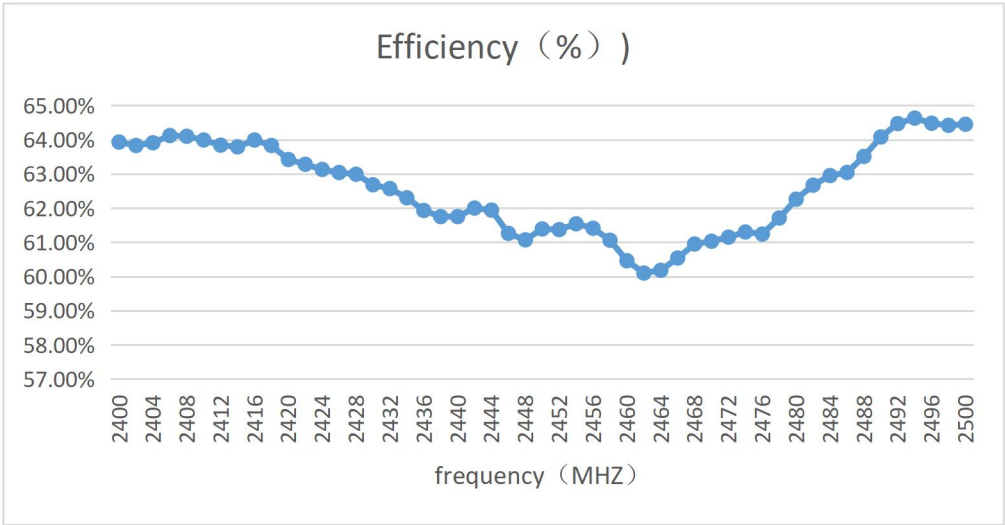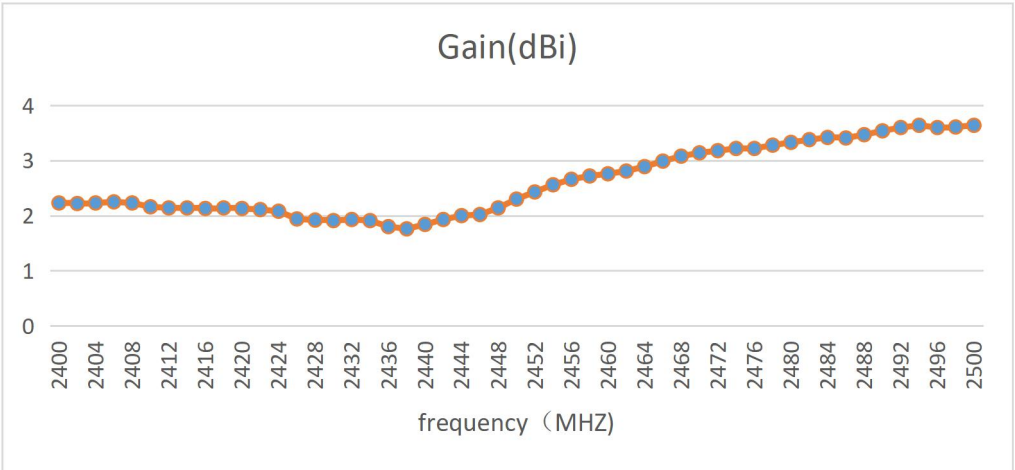


4. 3D Radiation Pattern

ANT-J3

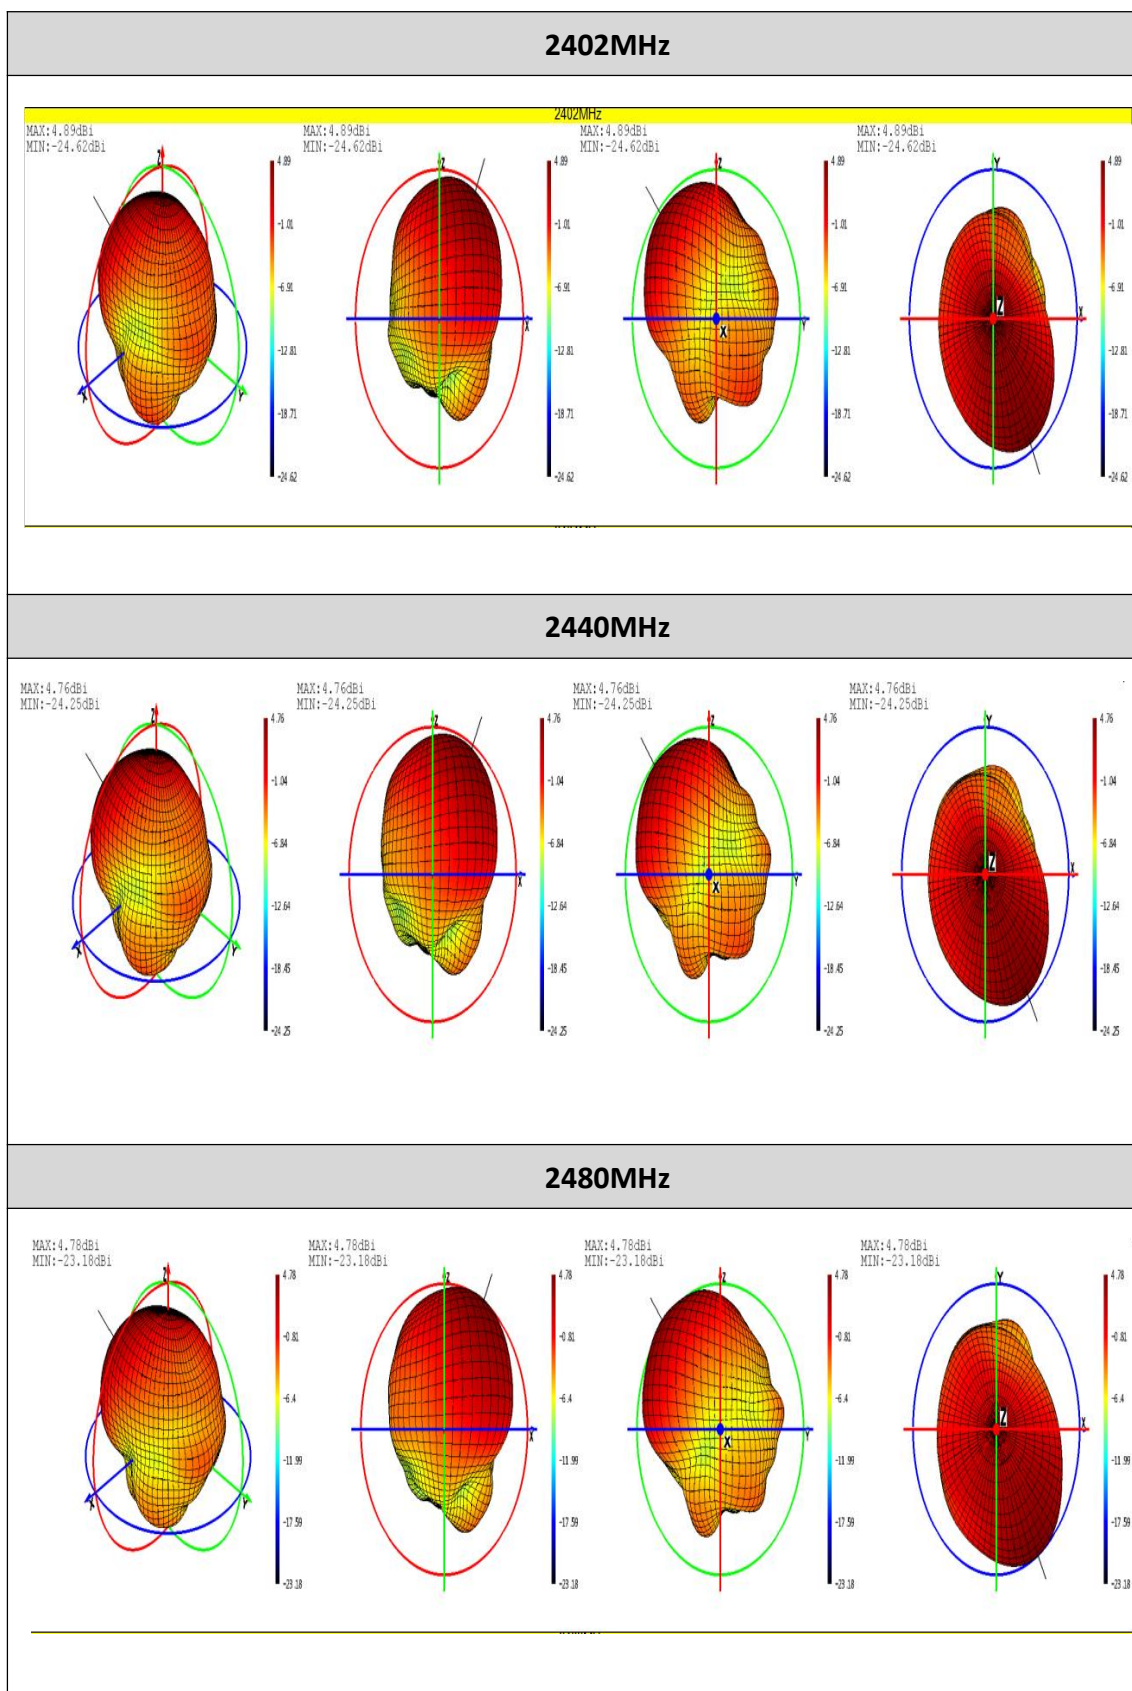


ANT-J2

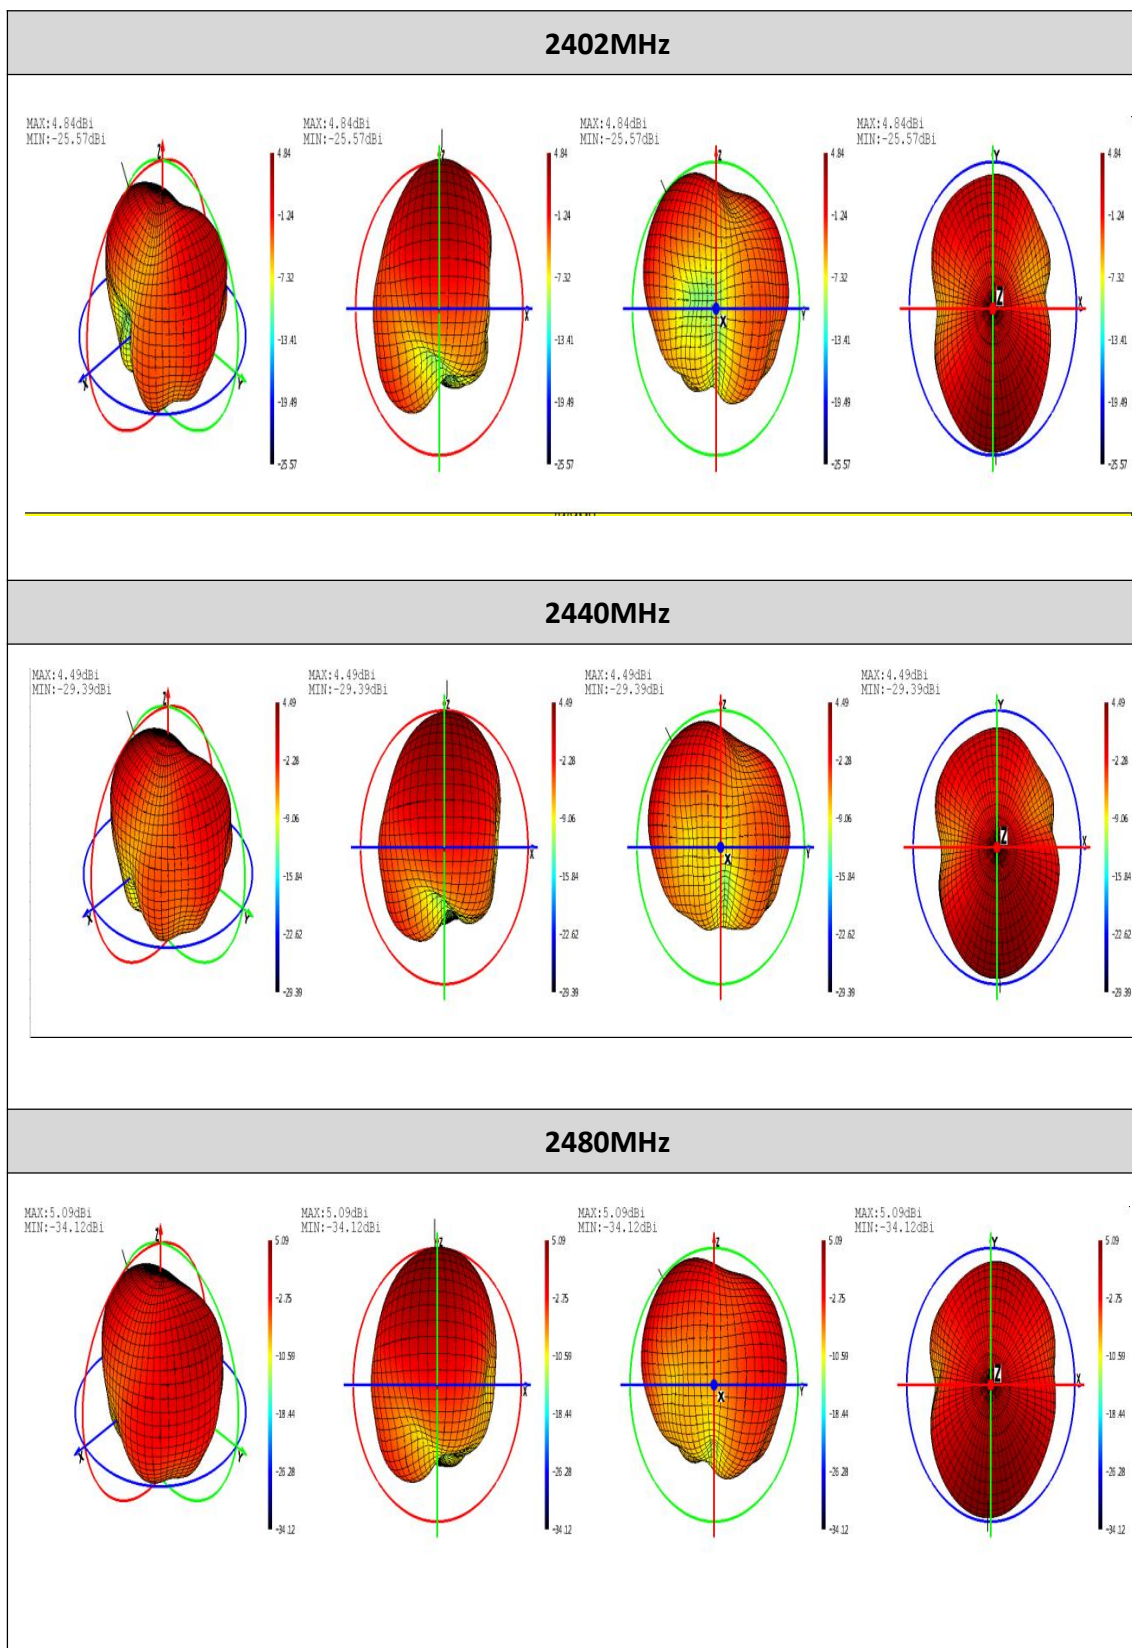


ANT-915


900MHz

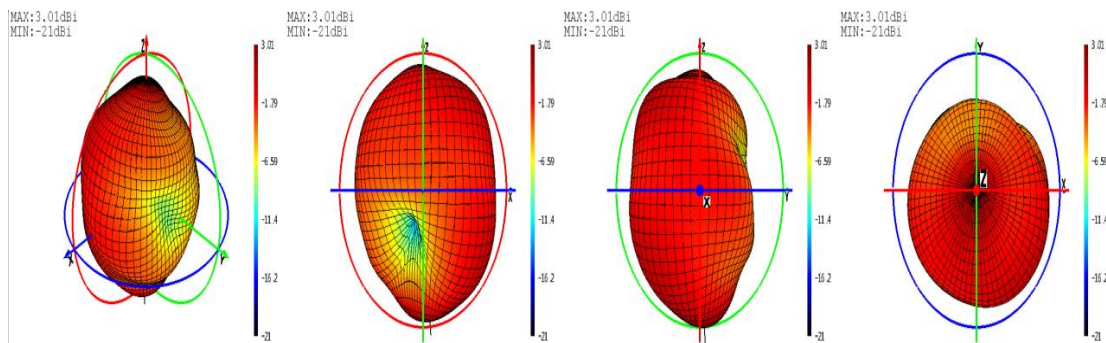

915MHz

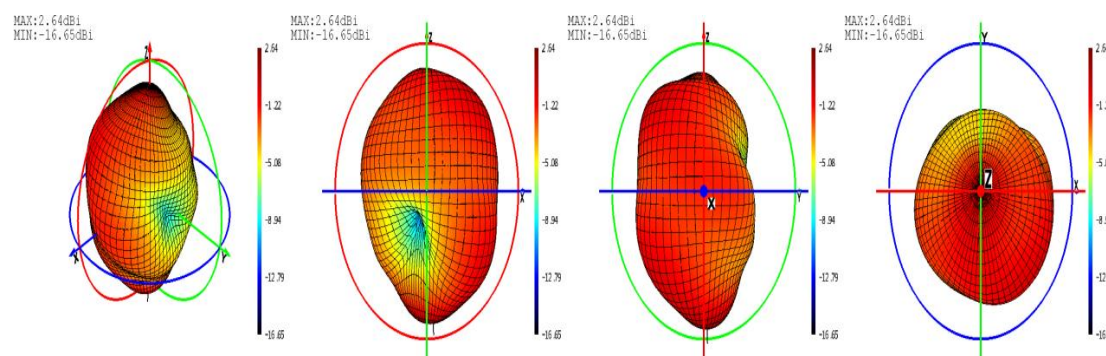


928MHz

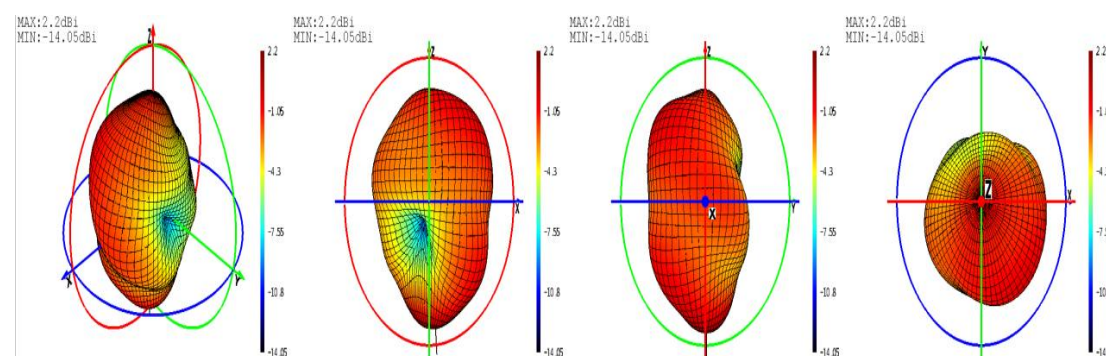


ANT -WIFI


2402MHz

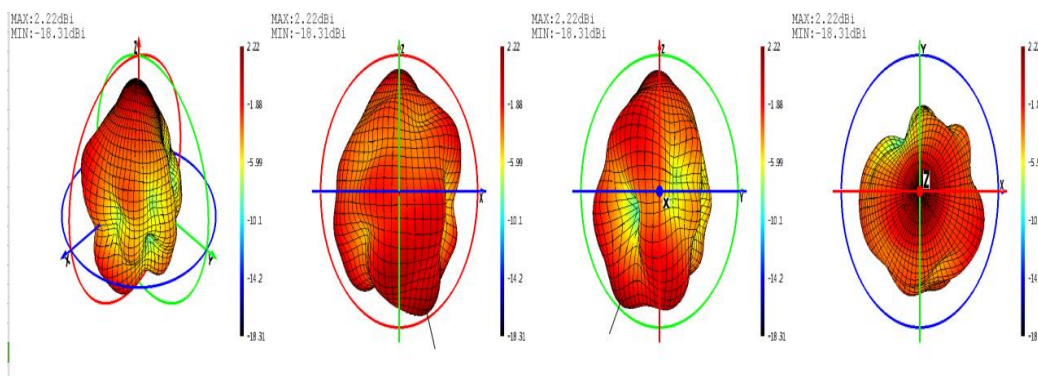

2440MHz

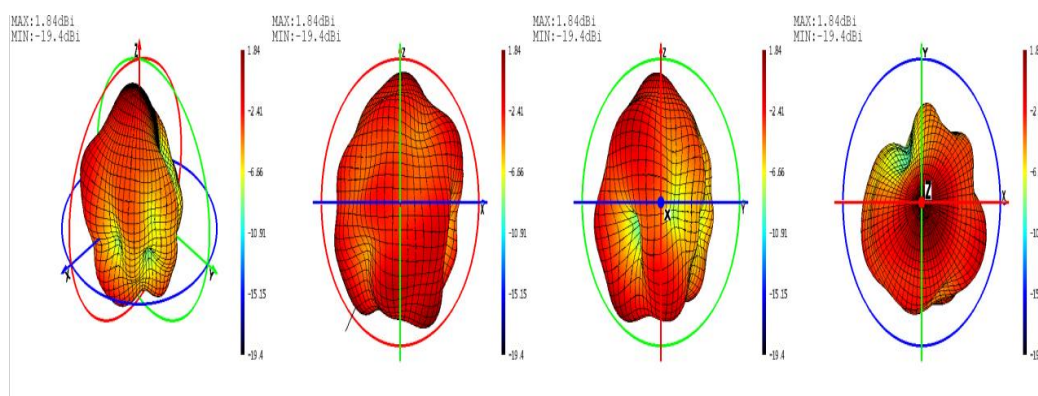


2480MHz

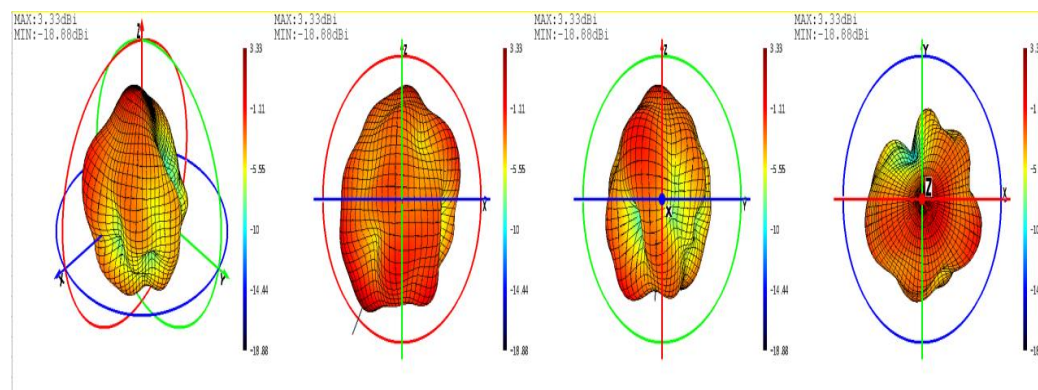


5. 2D Radiation Pattern

ANT-J3

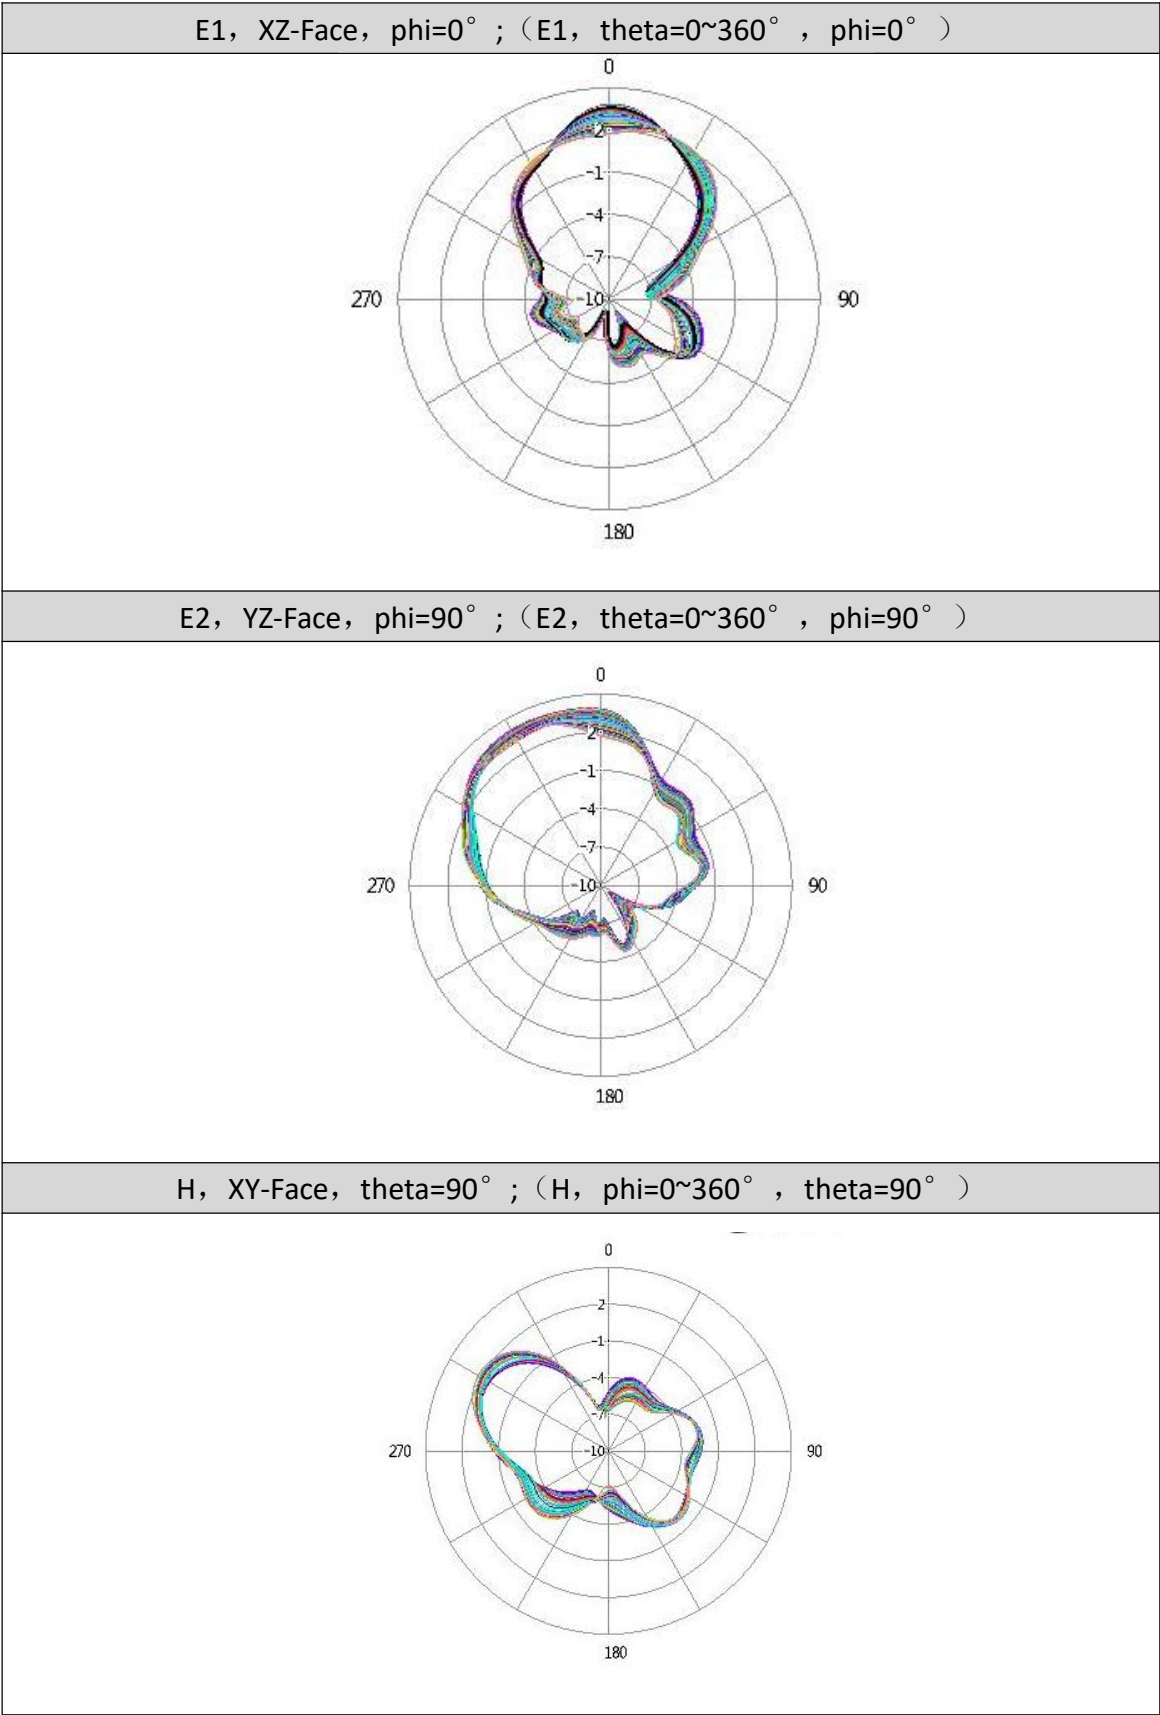


ANT-J2


E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

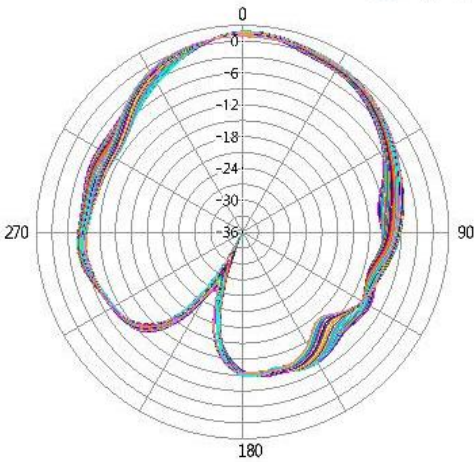

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)

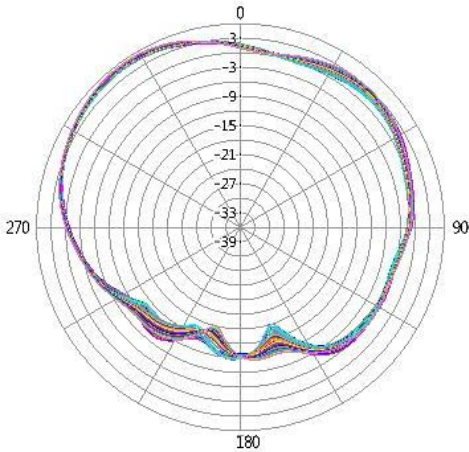


H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)

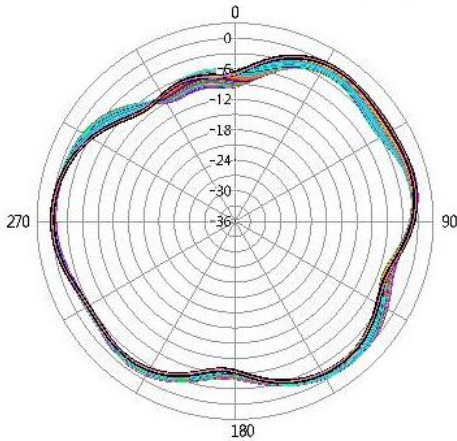


ANT-915


E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

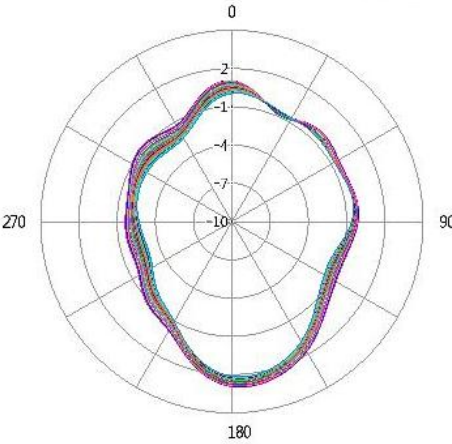

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)

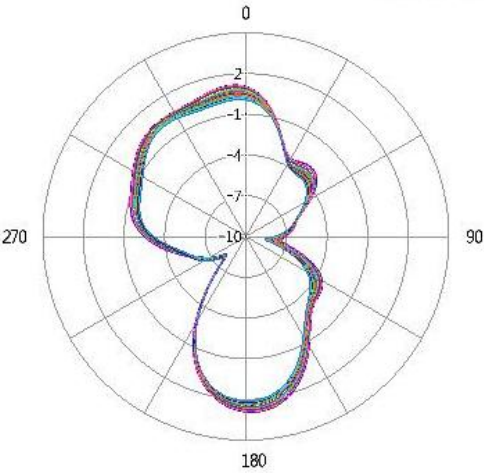


H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)

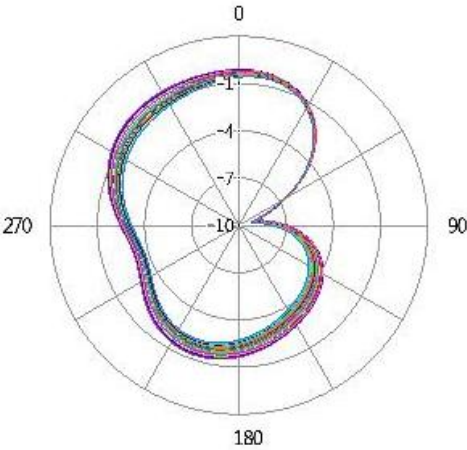


ANT-WIFI

E1, XZ-Face, $\phi=0^\circ$; (E1, $\theta=0\sim360^\circ$, $\phi=0^\circ$)

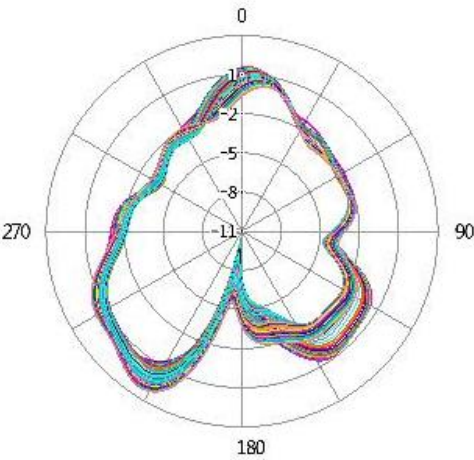

E2, YZ-Face, $\phi=90^\circ$; (E2, $\theta=0\sim360^\circ$, $\phi=90^\circ$)

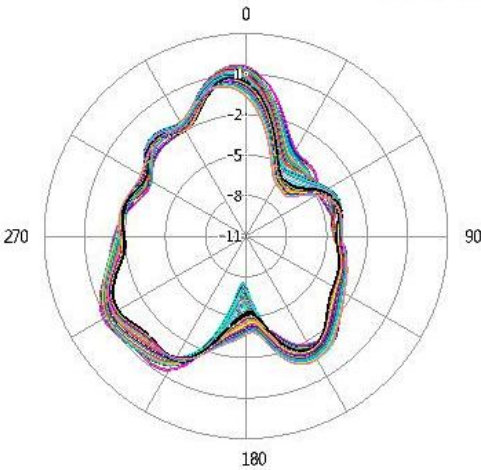

H, XY-Face, $\theta=90^\circ$; (H, $\phi=0\sim360^\circ$, $\theta=90^\circ$)

