



TEST REPORT

Product Name: Adjustable bed
FCC ID: 2AXVZ-S4M
Trademark: N/A
Model Number: S4M
Prepared For: Zhejiang Tri mix Technology Co., Ltd
Address: Room 201, 2nd Floor, Building 2, No. 332 Xinfei Road, Fengqiao Town, Nanhu District, Jiaxing City, Zhejiang Province, China
Manufacturer: Zhejiang Tri mix Technology Co., Ltd
Address: Room 201, 2nd Floor, Building 2, No. 332 Xinfei Road, Fengqiao Town, Nanhu District, Jiaxing City, Zhejiang Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 30, 2024
Sample tested Date: Jan. 30, 2024 to Feb. 24, 2024
Issue Date: Feb. 24, 2024
Report No.: CTB240224028RFX
Test Standards: FCC Part15.249
ANSI C63.10:2013
Test Results: PASS
Remark: This is 2.4GHz radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup	10
6.2 Limit	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	24
7.1 Block Diagram Of Test Setup	24
7.2 Limit	24
7.3 Test procedure	25
7.4 Test Result	26
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	44
8.1 Block Diagram Of Test Setup	44
8.2 Limit	44
8.3 Test procedure	45
8.4 Test Result	46
9. BANDWIDTH TEST	47
9.1 Block Diagram Of Test Setup	47
9.2 Limit	47
9.3 Test procedure	47
9.4 Test Result	47
10. ANTENNA REQUIREMENT	48
11. EUT TEST SETUP PHOTOGRAPHS	49

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240224028RFX	Feb. 24, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.249	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	S4M
Model Description:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2440MHz
Type of Modulation:	GFSK
Antenna installation:	PCB Antenna
Antenna Gain:	-1.04dBi
Ratings:	W87RA07-290030: Input: AC 100-240V, 4A Output: DC 29V, 3A W52RA199-290018: Input: AC 100-240V, 1.5A Output: DC 29V, 1.8A W52RA198-290018: Input: AC 100-240V, 1.5A Output: DC 29V, 1.8A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH No.	Frequency (MHz)
1	2440

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	channel
Transmitting GFSK	2440MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	29V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08


22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100- NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100- NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100- SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- -NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

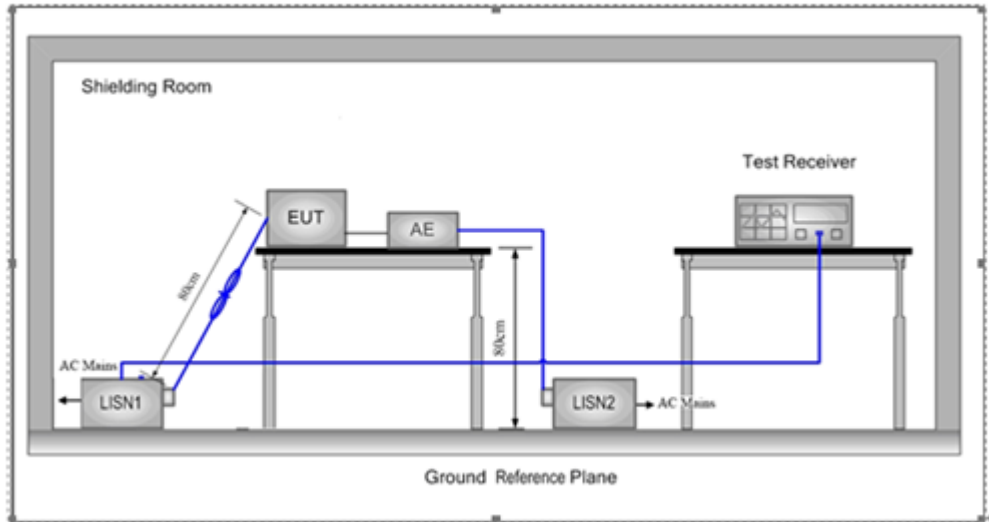

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

Adapter model: W87RA07-290030+ white nose

L: Worst case-GFSK(low channel)

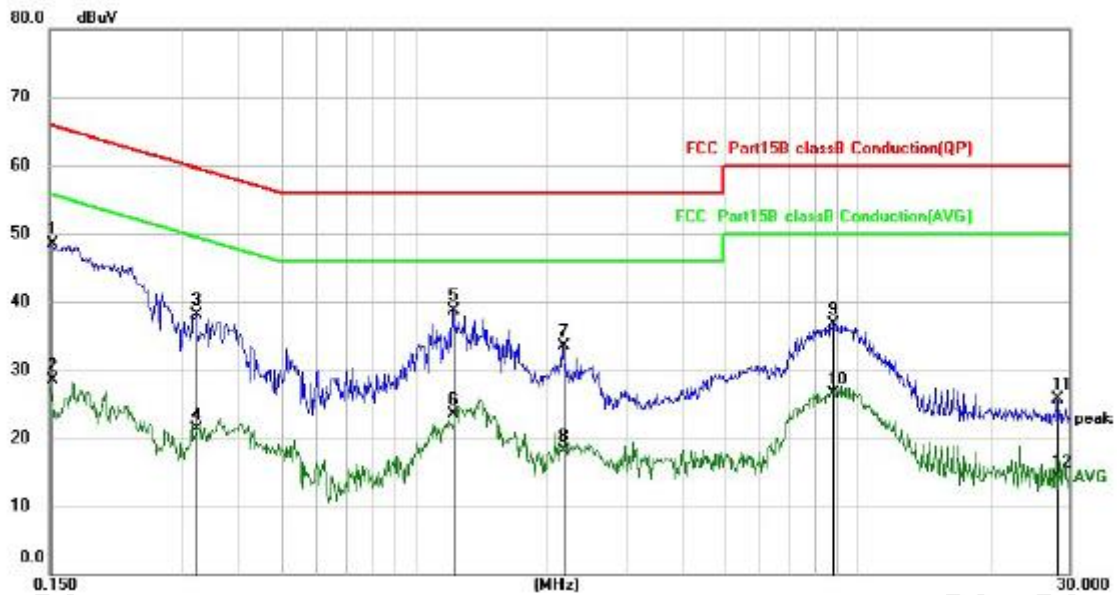


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1524	37.85	10.67	48.52	65.87	-17.35	QP
2		0.1524	17.81	10.67	28.48	55.87	-27.39	AVG
3		0.3200	27.56	10.63	38.19	59.71	-21.52	QP
4		0.3200	10.66	10.63	21.29	49.71	-28.42	AVG
5	*	1.2218	28.03	10.73	38.76	56.00	-17.24	QP
6		1.2218	12.79	10.73	23.52	46.00	-22.48	AVG
7		2.1579	22.74	10.79	33.53	56.00	-22.47	QP
8		2.1579	7.30	10.79	18.09	46.00	-27.91	AVG
9		8.8018	25.84	10.94	36.78	60.00	-23.22	QP
10		8.8018	15.61	10.94	26.55	50.00	-23.45	AVG
11		28.0380	14.25	11.51	25.76	60.00	-34.24	QP
12		28.0380	2.79	11.51	14.30	50.00	-35.70	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

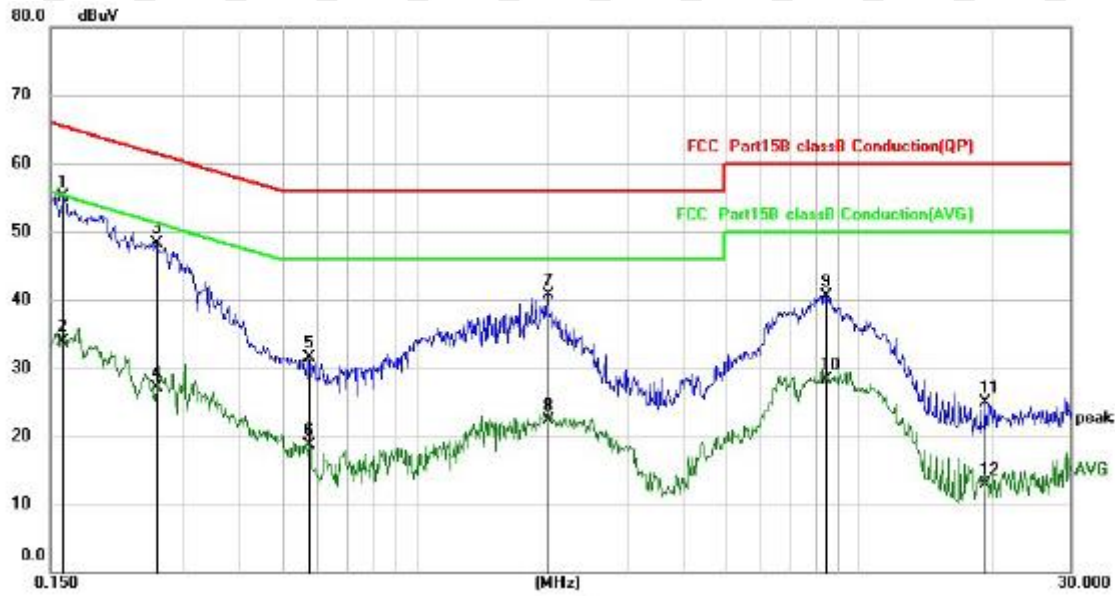


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1607	44.42	10.65	55.07	65.43	-10.36	QP
2		0.1607	23.32	10.65	33.97	55.43	-21.46	AVG
3		0.2600	37.67	10.62	48.29	61.43	-13.14	QP
4		0.2600	16.54	10.62	27.16	51.43	-24.27	AVG
5		0.5737	20.80	10.69	31.49	56.00	-24.51	QP
6		0.5737	8.03	10.69	18.72	46.00	-27.28	AVG
7		1.9858	29.99	10.79	40.78	56.00	-15.22	QP
8		1.9858	11.53	10.79	22.32	46.00	-23.68	AVG
9		8.4539	29.59	10.93	40.52	60.00	-19.48	QP
10		8.4539	17.35	10.93	28.28	50.00	-21.72	AVG
11		19.3216	13.67	11.25	24.92	60.00	-35.08	QP
12		19.3216	1.65	11.25	12.90	50.00	-37.10	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Adapter model: W52RA199-290018+ white nose

L: Worst case-GFSK(low channel)

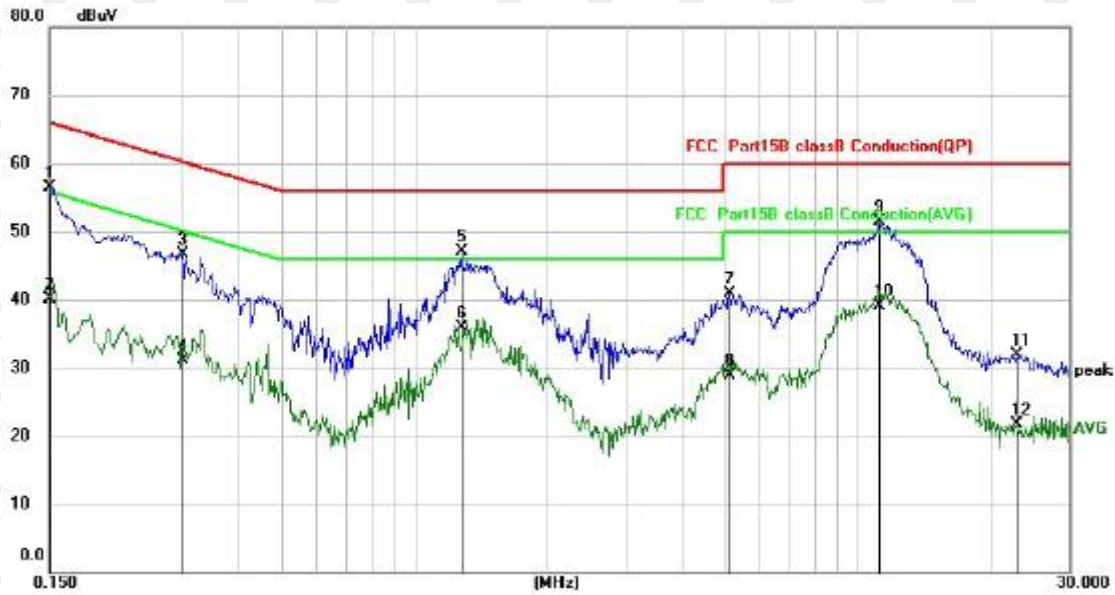


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	45.88	10.67	56.55	66.00	-9.45	QP
2		0.1500	29.38	10.67	40.05	56.00	-15.95	AVG
3		0.2987	35.99	10.63	46.62	60.28	-13.66	QP
4		0.2987	20.57	10.63	31.20	50.28	-19.08	AVG
5		1.2780	36.31	10.73	47.04	56.00	-8.96	QP
6		1.2780	25.22	10.73	35.95	46.00	-10.05	AVG
7		5.1337	30.01	10.80	40.81	60.00	-19.19	QP
8		5.1337	18.19	10.80	28.99	50.00	-21.01	AVG
9	*	11.1737	40.50	11.01	51.51	60.00	-8.49	QP
10		11.1737	28.19	11.01	39.20	50.00	-10.80	AVG
11		22.7778	20.52	11.32	31.84	60.00	-28.16	QP
12		22.7778	10.43	11.32	21.75	50.00	-28.25	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

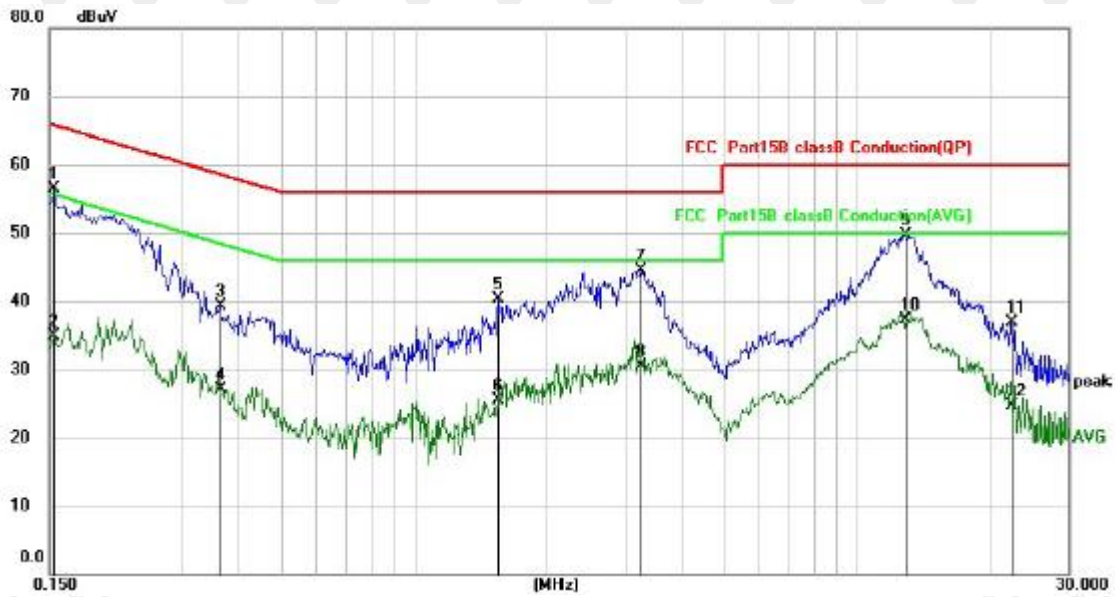


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	45.80	10.66	56.46	65.79	-9.33	QP
2		0.1539	24.33	10.66	34.99	55.79	-20.80	AVG
3		0.3659	28.61	10.64	39.25	58.59	-19.34	QP
4		0.3659	16.46	10.64	27.10	48.59	-21.49	AVG
5		1.5460	29.50	10.75	40.25	56.00	-15.75	QP
6		1.5460	14.70	10.75	25.45	46.00	-20.55	AVG
7		3.2580	33.80	10.79	44.59	56.00	-11.41	QP
8		3.2580	19.78	10.79	30.57	46.00	-15.43	AVG
9		12.8338	38.71	11.05	49.76	60.00	-10.24	QP
10		12.8338	26.21	11.05	37.26	50.00	-12.74	AVG
11		22.2300	25.58	11.31	36.89	60.00	-23.11	QP
12		22.2300	13.40	11.31	24.71	50.00	-25.29	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Adapter model: W52RA198-290018+ white nose

L: Worst case-GFSK(low channel)

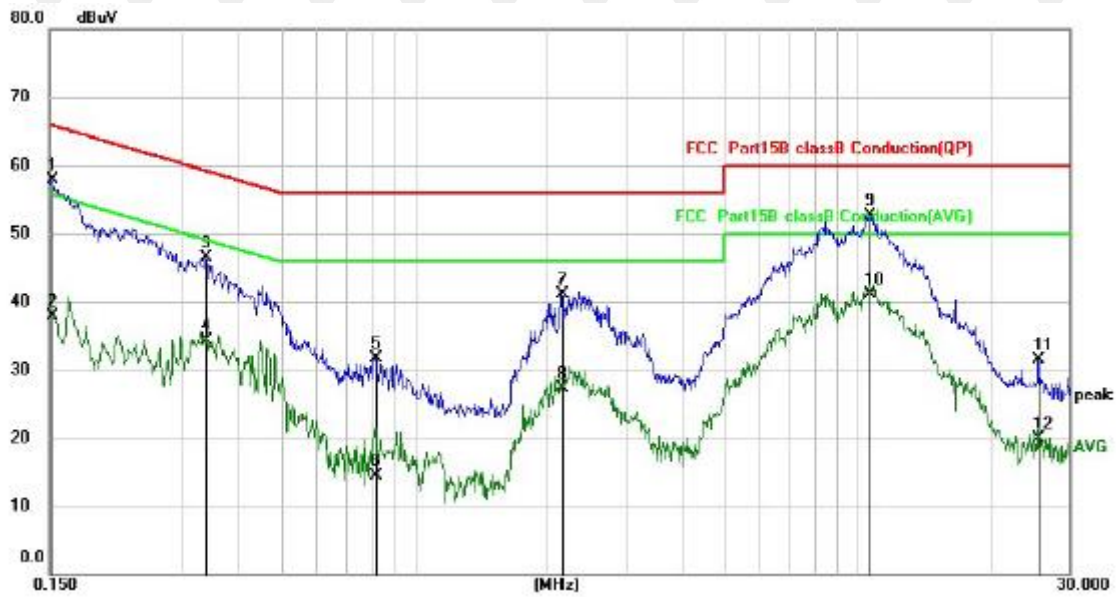


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1524	47.30	10.67	57.97	65.87	-7.90	QP
2		0.1524	27.31	10.67	37.98	55.87	-17.89	AVG
3		0.3379	35.85	10.64	46.49	59.25	-12.76	QP
4		0.3379	23.70	10.64	34.34	49.25	-14.91	AVG
5		0.8178	20.96	10.70	31.66	56.00	-24.34	QP
6		0.8178	3.86	10.70	14.56	46.00	-31.44	AVG
7		2.1459	30.26	10.79	41.05	56.00	-14.95	QP
8		2.1459	16.43	10.79	27.22	46.00	-18.78	AVG
9	*	10.6059	41.64	11.00	52.64	60.00	-7.36	QP
10		10.6059	30.08	11.00	41.08	50.00	-8.92	AVG
11		25.5700	20.21	11.39	31.60	60.00	-28.40	QP
12		25.5700	8.52	11.39	19.91	50.00	-30.09	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

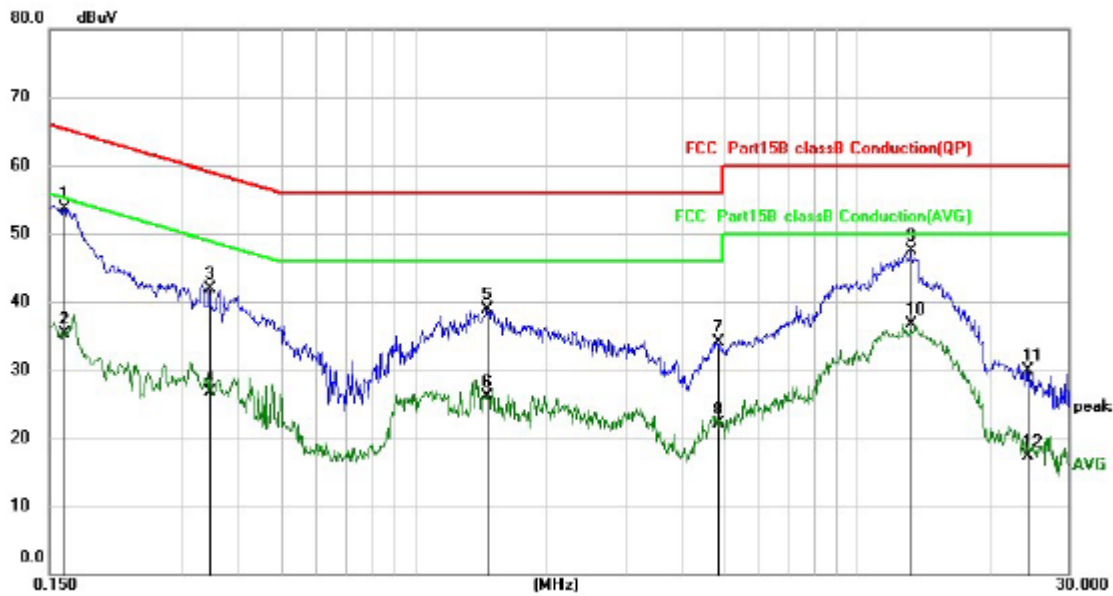


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1621	43.02	10.65	53.67	65.36	-11.69	QP
2		0.1621	24.65	10.65	35.30	55.36	-20.06	AVG
3		0.3458	31.35	10.64	41.99	59.06	-17.07	QP
4		0.3458	16.05	10.64	26.69	49.06	-22.37	AVG
5		1.4578	28.23	10.75	38.98	56.00	-17.02	QP
6		1.4578	15.38	10.75	26.13	46.00	-19.87	AVG
7		4.8418	23.33	10.79	34.12	56.00	-21.88	QP
8		4.8418	11.41	10.79	22.20	46.00	-23.80	AVG
9		13.2577	36.47	11.06	47.53	60.00	-12.47	QP
10		13.2577	25.61	11.06	36.67	50.00	-13.33	AVG
11		24.1700	18.61	11.34	29.95	60.00	-30.05	QP
12		24.1700	5.96	11.34	17.30	50.00	-32.70	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Adapter model: W87RA07-290030+ Black nose

L: Worst case-GFSK(low channel)

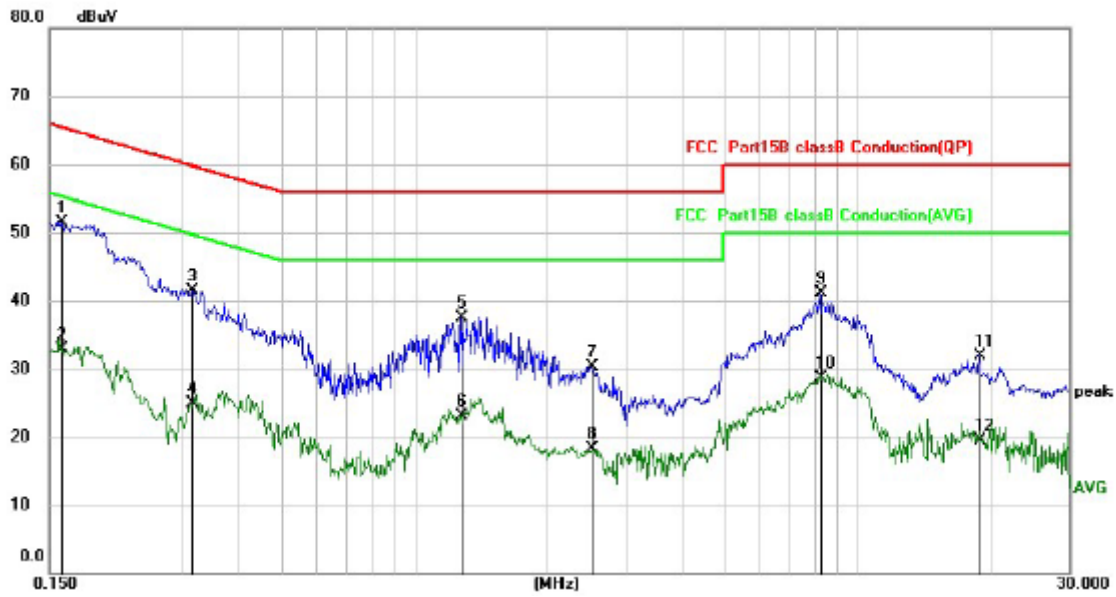


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1597	40.91	10.66	51.57	65.48	-13.91	QP
2		0.1597	22.29	10.66	32.95	55.48	-22.53	AVG
3		0.3149	30.95	10.63	41.58	59.84	-18.26	QP
4		0.3149	14.19	10.63	24.82	49.84	-25.02	AVG
5		1.2700	26.68	10.73	37.41	56.00	-18.59	QP
6		1.2700	12.43	10.73	23.16	46.00	-22.84	AVG
7		2.5019	19.60	10.79	30.39	56.00	-25.61	QP
8		2.5019	7.42	10.79	18.21	46.00	-27.79	AVG
9		8.2179	30.15	10.93	41.08	60.00	-18.92	QP
10		8.2179	17.81	10.93	28.74	50.00	-21.26	AVG
11		18.8139	20.77	11.23	32.00	60.00	-28.00	QP
12		18.8139	8.22	11.23	19.45	50.00	-30.55	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

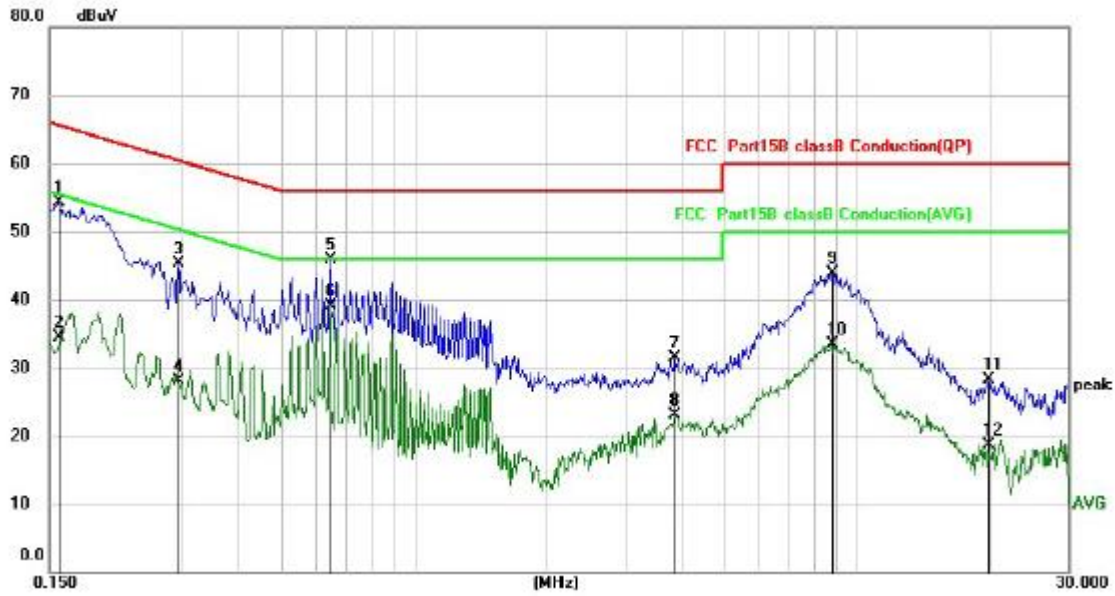


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	43.68	10.66	54.34	65.57	-11.23	QP
2		0.1580	23.75	10.66	34.41	55.57	-21.16	AVG
3		0.2938	34.70	10.62	45.32	60.42	-15.10	QP
4		0.2938	17.46	10.62	28.08	50.42	-22.34	AVG
5		0.6500	35.19	10.69	45.88	56.00	-10.12	QP
6	*	0.6500	28.44	10.69	39.13	46.00	-6.87	AVG
7		3.8780	20.72	10.79	31.51	56.00	-24.49	QP
8		3.8780	12.26	10.79	23.05	46.00	-22.95	AVG
9		8.7339	32.96	10.94	43.90	60.00	-16.10	QP
10		8.7339	22.52	10.94	33.46	50.00	-16.54	AVG
11		19.7577	17.13	11.26	28.39	60.00	-31.61	QP
12		19.7577	7.51	11.26	18.77	50.00	-31.23	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Adapter model: W52RA199-290018+ Black nose

L: Worst case-GFSK(low channel)

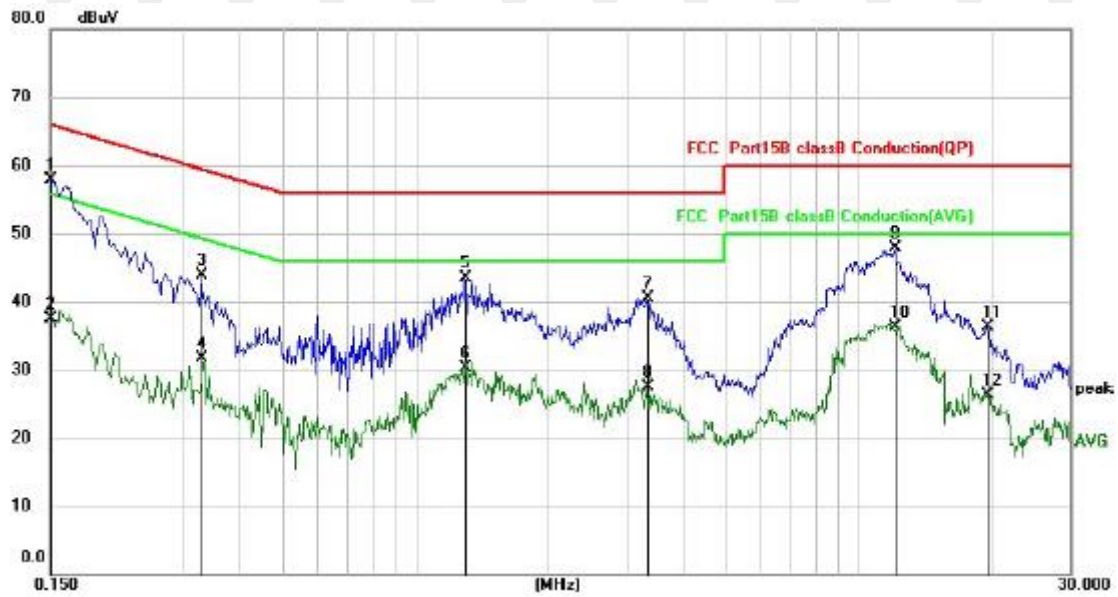


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	47.31	10.67	57.98	66.00	-8.02	QP
2		0.1500	26.80	10.67	37.47	56.00	-18.53	AVG
3		0.3300	33.19	10.63	43.82	59.45	-15.63	QP
4		0.3300	20.99	10.63	31.62	49.45	-17.83	AVG
5		1.2940	32.77	10.73	43.50	56.00	-12.50	QP
6		1.2940	19.54	10.73	30.27	46.00	-15.73	AVG
7		3.3420	29.77	10.79	40.56	56.00	-15.44	QP
8		3.3420	16.71	10.79	27.50	46.00	-18.50	AVG
9		12.0817	36.89	11.03	47.92	60.00	-12.08	QP
10		12.0817	25.29	11.03	36.32	50.00	-13.68	AVG
11		19.4618	25.04	11.25	36.29	60.00	-23.71	QP
12		19.4618	15.11	11.25	26.36	50.00	-23.64	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

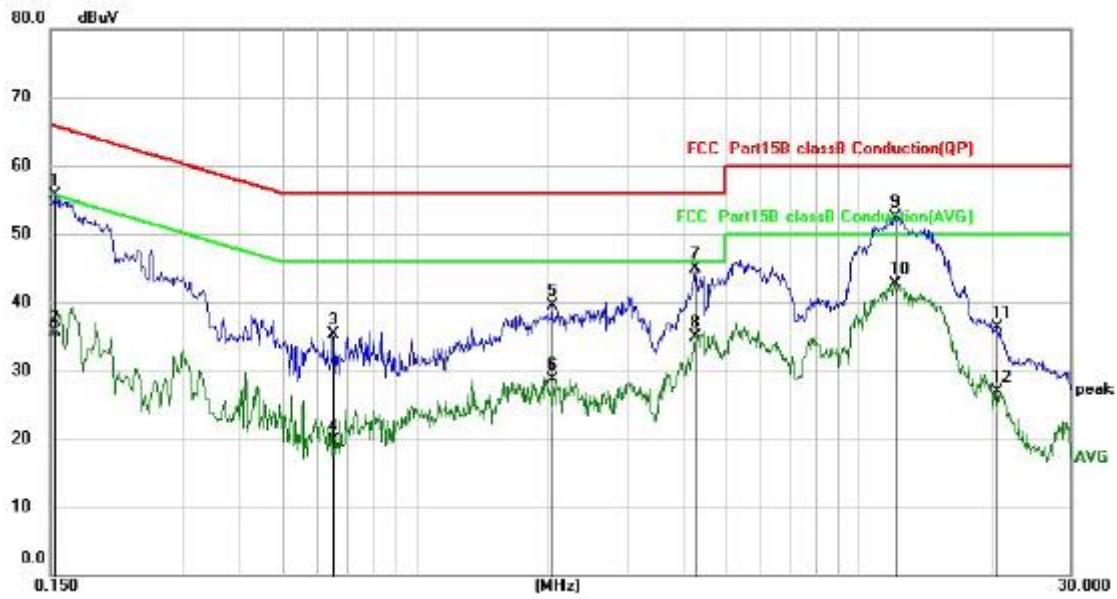


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	45.02	10.66	55.68	65.79	-10.11	QP
2		0.1539	25.07	10.66	35.73	55.79	-20.06	AVG
3		0.6540	24.60	10.70	35.30	56.00	-20.70	QP
4		0.6540	9.02	10.70	19.72	46.00	-26.28	AVG
5		2.0339	28.70	10.79	39.49	56.00	-16.51	QP
6		2.0339	17.86	10.79	28.65	46.00	-17.35	AVG
7		4.2700	34.06	10.79	44.85	56.00	-11.15	QP
8		4.2700	24.14	10.79	34.93	46.00	-11.07	AVG
9		12.0016	41.47	11.03	52.50	60.00	-7.50	QP
10	*	12.0016	31.70	11.03	42.73	50.00	-7.27	AVG
11		20.4700	25.04	11.28	36.32	60.00	-23.68	QP
12		20.4700	15.57	11.28	26.85	50.00	-23.15	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Adapter model: W52RA198-290018+ Black nose

L: Worst case-GFSK(low channel)

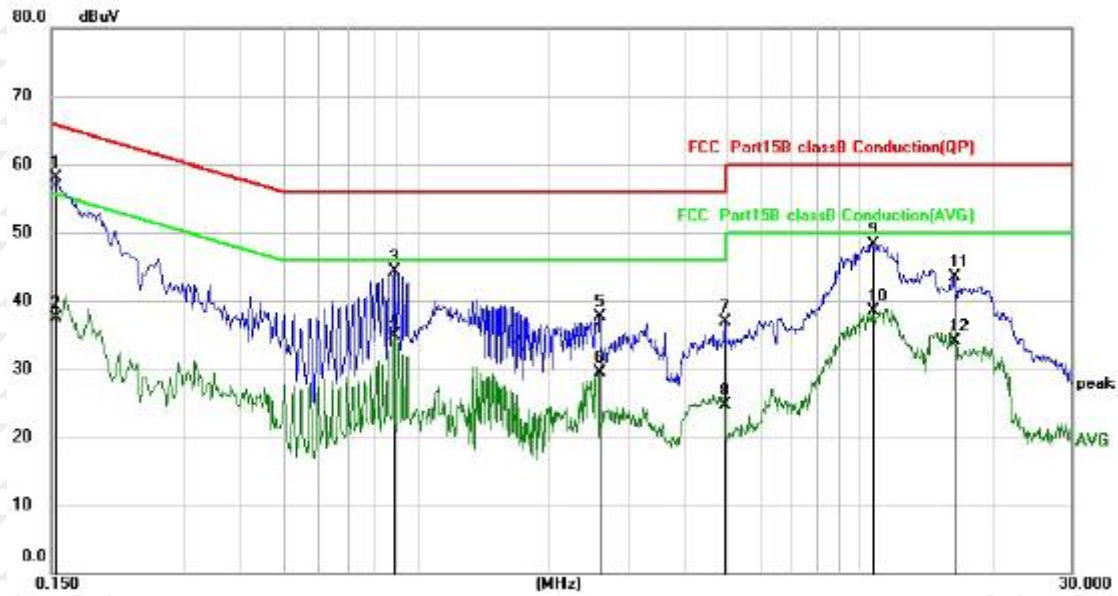


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	47.44	10.66	58.10	65.79	-7.69	QP
2		0.1539	26.85	10.66	37.51	55.79	-18.28	AVG
3		0.8900	33.51	10.71	44.22	56.00	-11.78	QP
4		0.8900	24.26	10.71	34.97	46.00	-11.03	AVG
5		2.5859	26.91	10.79	37.70	56.00	-18.30	QP
6		2.5859	18.78	10.79	29.57	46.00	-16.43	AVG
7		4.9618	26.13	10.79	36.92	56.00	-19.08	QP
8		4.9618	13.98	10.79	24.77	46.00	-21.23	AVG
9		10.7299	37.25	11.00	48.25	60.00	-11.75	QP
10		10.7299	27.55	11.00	38.55	50.00	-11.45	AVG
11		16.3538	32.32	11.15	43.47	60.00	-16.53	QP
12		16.3538	22.86	11.15	34.01	50.00	-15.99	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

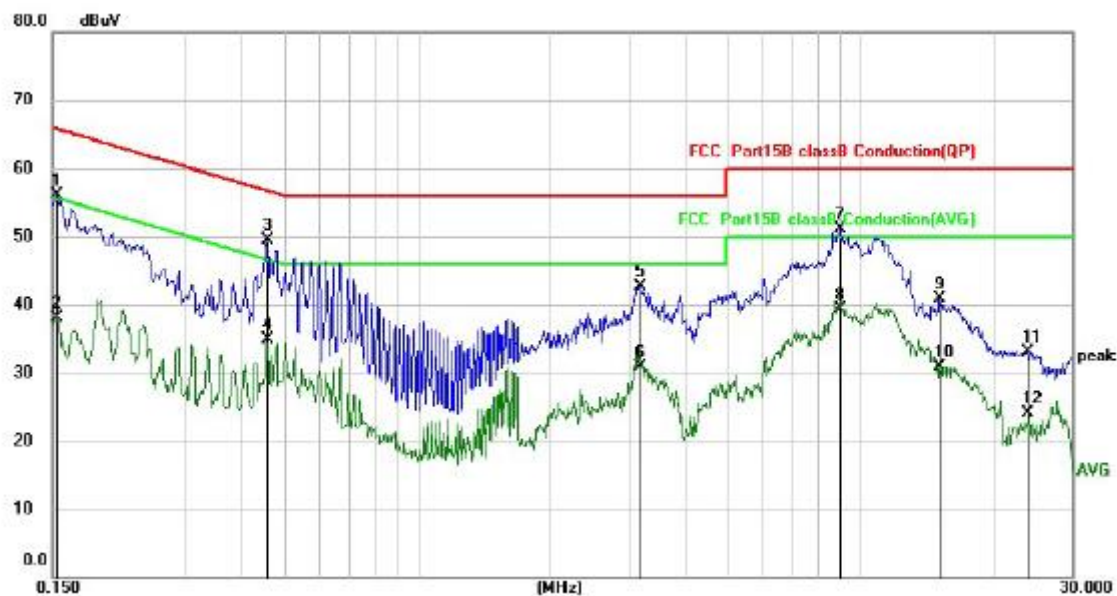

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1539	45.44	10.66	56.10	65.79	-9.69	QP
2		0.1539	27.49	10.66	38.15	55.79	-17.64	AVG
3	*	0.4580	38.75	10.67	49.42	56.73	-7.31	QP
4		0.4580	24.21	10.67	34.88	46.73	-11.85	AVG
5		3.1819	31.99	10.79	42.78	56.00	-13.22	QP
6		3.1819	20.11	10.79	30.90	46.00	-15.10	AVG
7		8.9859	40.17	10.95	51.12	60.00	-8.88	QP
8		8.9859	28.34	10.95	39.29	50.00	-10.71	AVG
9		15.0579	29.72	11.11	40.83	60.00	-19.17	QP
10		15.0579	19.81	11.11	30.92	50.00	-19.08	AVG
11		23.6660	21.80	11.34	33.14	60.00	-26.86	QP
12		23.6660	12.83	11.34	24.17	50.00	-25.83	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

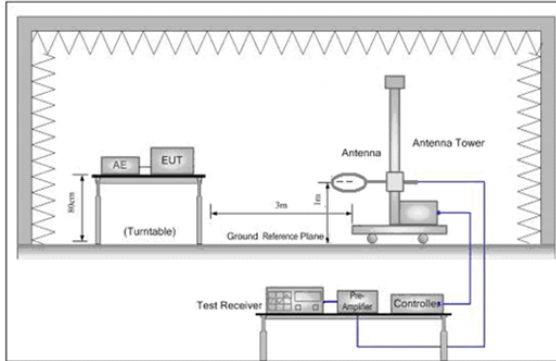


Figure 1. Below 30MHz


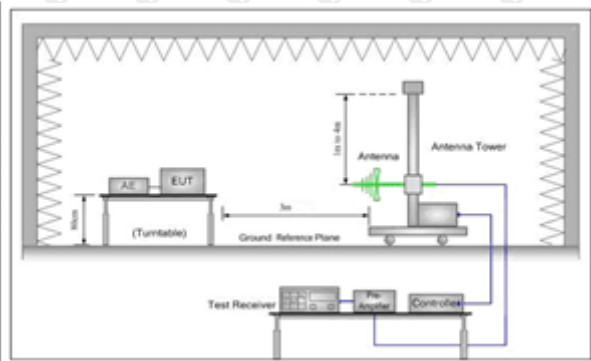


Figure 2. 30MHz to 1GHz

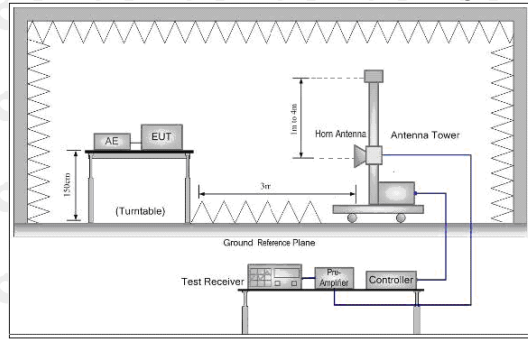

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.
- Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Adapter model: W87RA07-290030+ white nose:

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		61.0242	35.53	-6.87	28.66	40.00	-11.34	QP
2		115.7256	33.20	-6.02	27.18	43.50	-16.32	QP
3		173.2050	32.91	-4.74	28.17	43.50	-15.33	QP
4		273.2339	36.04	-5.90	30.14	47.00	-16.86	QP
5		580.7024	34.76	2.13	36.89	47.00	-10.11	QP
6	*	722.9923	33.99	4.98	38.97	47.00	-8.03	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.6946	39.57	-5.83	33.74	40.00	-6.26	QP
2		82.9384	36.88	-9.35	27.53	40.00	-12.47	QP
3		144.0817	34.37	-3.89	30.48	43.50	-13.02	QP
4		287.9904	29.43	-5.26	24.17	47.00	-22.83	QP
5		565.6295	33.05	1.74	34.79	47.00	-12.21	QP
6	*	775.5167	34.82	5.96	40.78	47.00	-6.22	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit


Adapter model: W52RA199-290018+ white nose:
Below 1GHz Test Results:
Antenna polarity: H

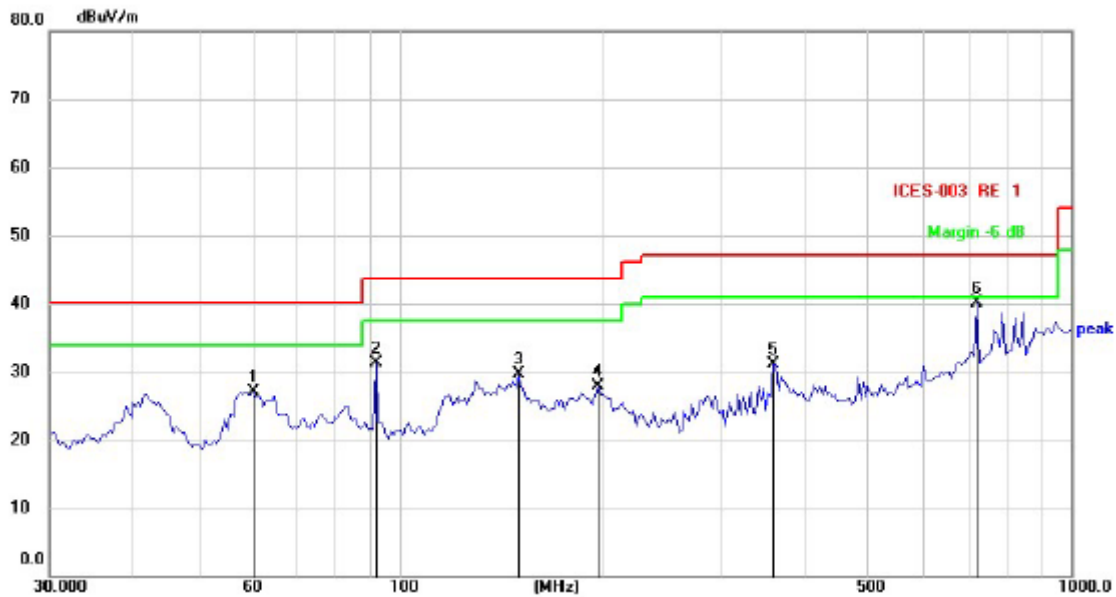

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBuV	dB	dBuV/m	dB/m	dB
1		60.4917	33.81	-6.79	27.02	40.00	-12.98
2		92.1386	40.99	-9.76	31.23	43.50	-12.27
3		150.5377	32.89	-3.19	29.70	43.50	-13.80
4		197.5457	35.46	-7.49	27.97	43.50	-15.53
5		361.7137	34.30	-3.14	31.16	47.00	-15.84
6	*	722.9923	35.07	4.98	40.05	47.00	-6.95

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit


Antenna polarity: V

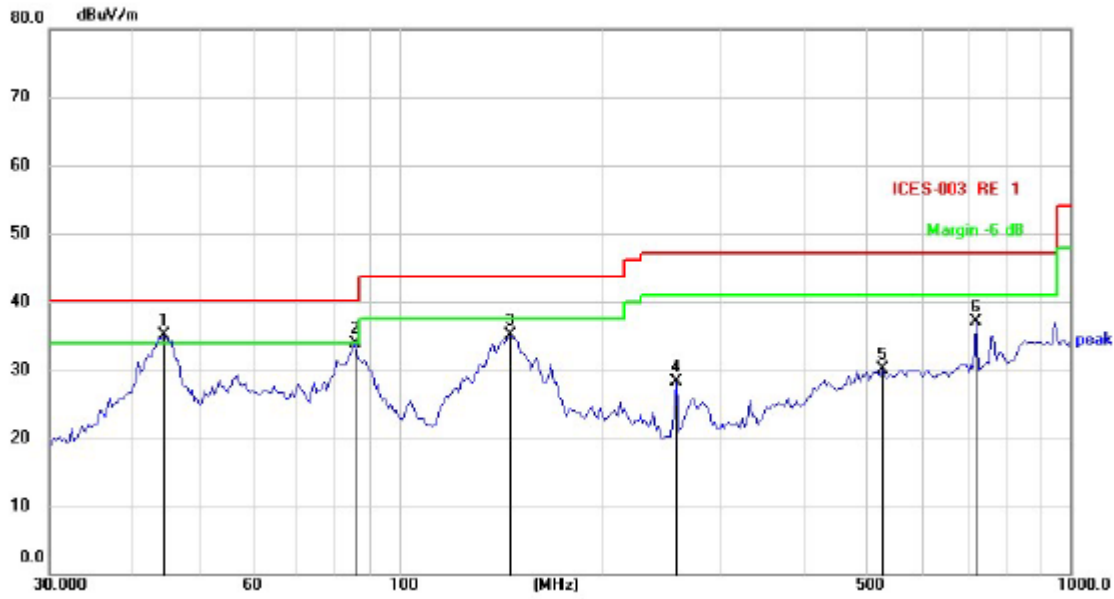

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	44.5086	40.63	-5.61	35.02	40.00	-4.98	QP
2		85.8983	43.56	-9.62	33.94	40.00	-6.06	QP
3		146.6303	38.77	-3.58	35.19	43.50	-8.31	QP
4		259.2336	34.89	-6.50	28.39	47.00	-18.61	QP
5		527.3202	29.31	0.75	30.06	47.00	-16.94	QP
6		722.9923	32.20	4.98	37.18	47.00	-9.82	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Adapter model: W52RA198-290018+ white nose:
Below 1GHz Test Results:
Antenna polarity: H

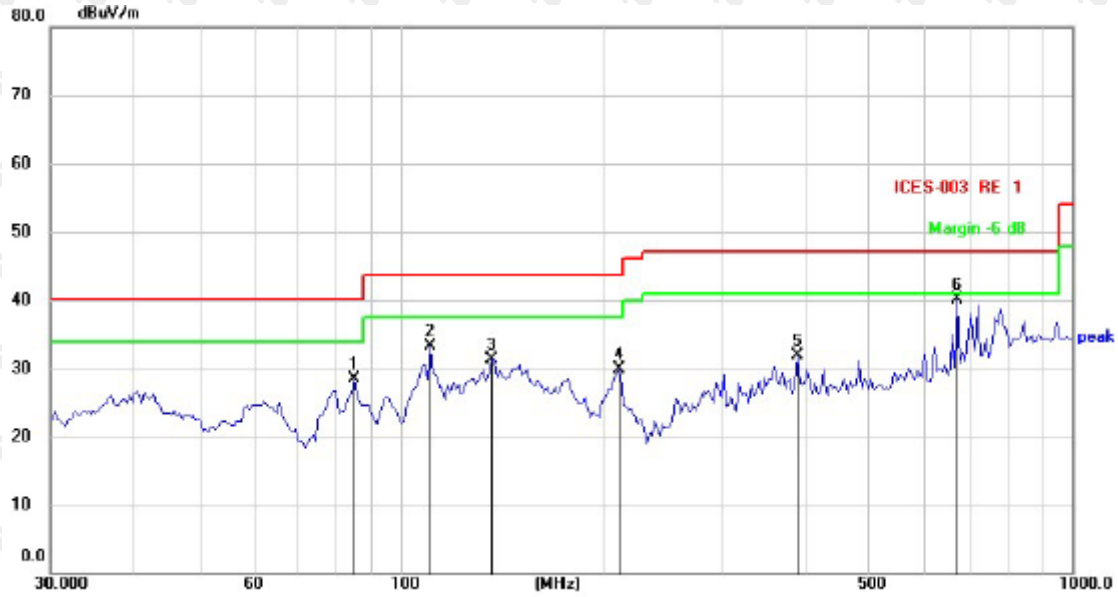

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		85.1486	37.98	-9.55	28.43	40.00	-11.57	QP
2		110.7626	40.21	-6.90	33.31	43.50	-10.19	QP
3		136.6991	35.82	-4.53	31.29	43.50	-12.21	QP
4		211.8976	37.31	-7.33	29.98	43.50	-13.52	QP
5		391.4082	34.26	-2.37	31.89	47.00	-15.11	QP
6	*	674.0252	36.12	4.05	40.17	47.00	-6.83	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Antenna polarity: V

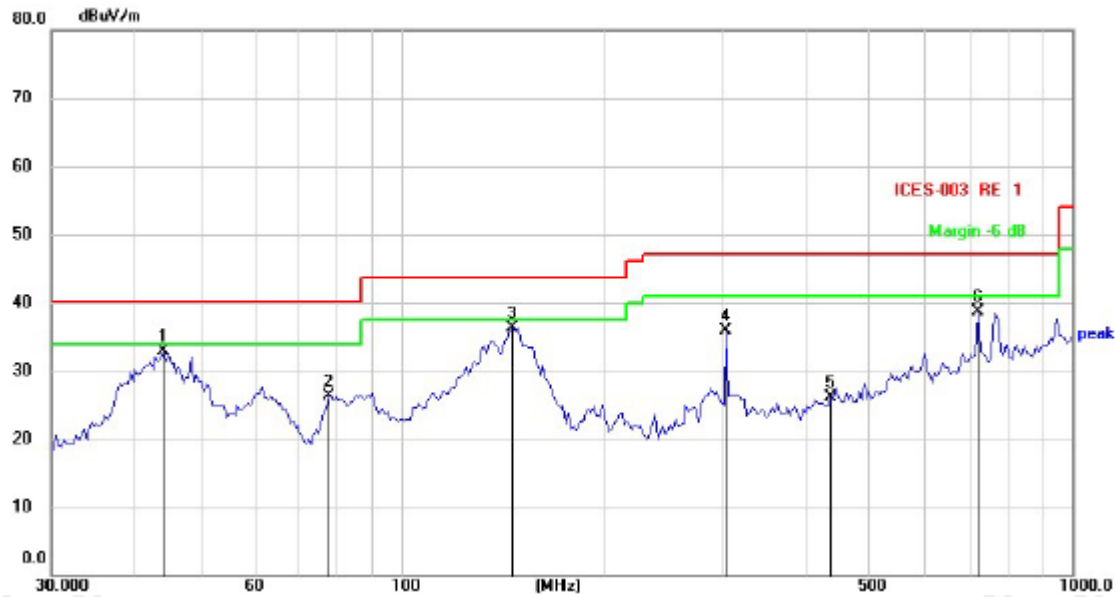

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	44.1200	38.45	-5.54	32.91	40.00	-7.09	QP
2		78.0019	35.17	-8.87	26.30	40.00	-13.70	QP
3		146.6303	39.84	-3.58	36.26	43.50	-7.24	QP
4		306.2162	40.49	-4.58	35.91	47.00	-11.09	QP
5		438.6553	27.40	-1.30	26.10	47.00	-20.90	QP
6		722.9923	33.71	4.98	38.69	47.00	-8.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Adapter model: W87RA07-290030+ Black nose:
Below 1GHz Test Results:
Antenna polarity: H

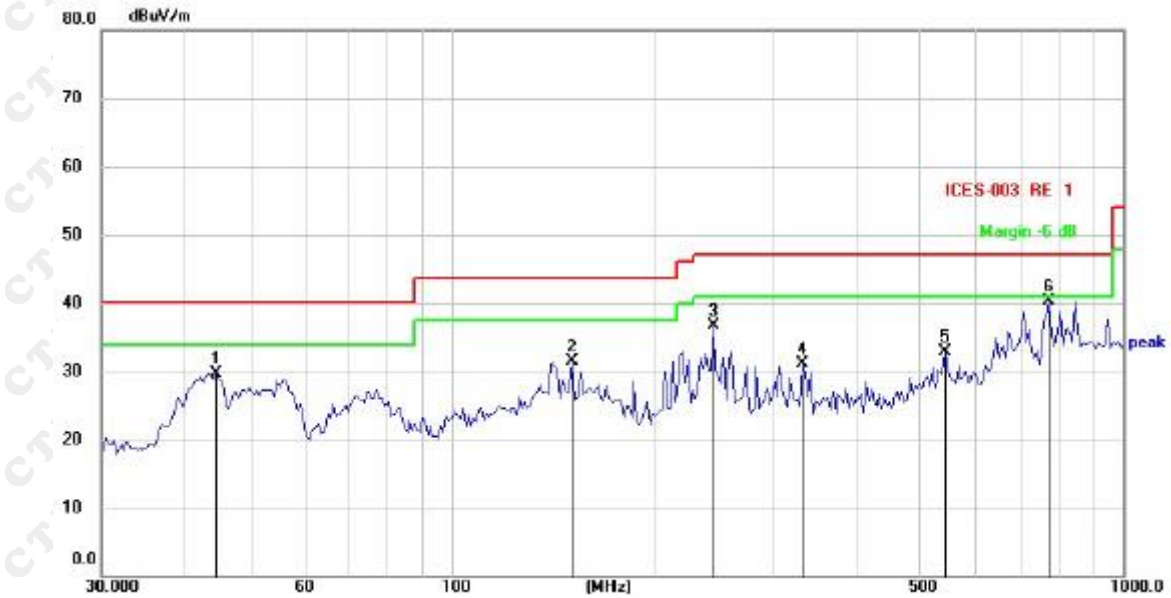

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.5086	35.35	-5.61	29.74	40.00	-10.26	QP
2		151.8632	34.67	-3.24	31.43	43.50	-12.07	QP
3		245.9507	43.70	-6.95	36.75	47.00	-10.25	QP
4		334.2721	34.94	-3.85	31.09	47.00	-15.91	QP
5		546.1390	31.66	1.23	32.89	47.00	-14.11	QP
6	*	775.5167	34.42	5.96	40.38	47.00	-6.62	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

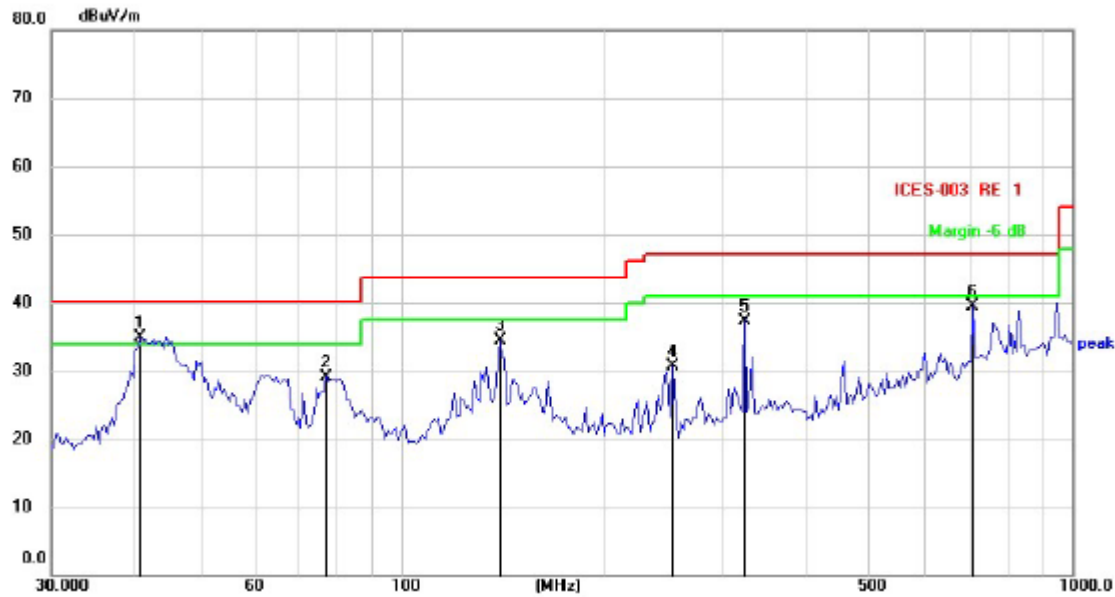

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	40.7730	39.80	-4.91	34.89	40.00	-5.11	QP
2		77.3210	38.00	-8.80	29.20	40.00	-10.80	QP
3		140.3420	38.79	-4.35	34.44	43.50	-9.06	QP
4		254.7281	37.31	-6.70	30.61	47.00	-16.39	QP
5		325.5957	41.47	-4.08	37.39	47.00	-9.61	QP
6		710.4266	34.71	4.74	39.45	47.00	-7.55	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit


Adapter model: W52RA199-290018+ Black nose:
Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		43.3534	36.60	-5.40	31.20	40.00	-8.80	QP
2		56.8913	36.17	-6.70	29.47	40.00	-10.53	QP
3		137.9028	37.53	-4.48	33.05	43.50	-10.45	QP
4		285.4768	42.33	-5.37	36.96	47.00	-10.04	QP
5		434.8267	40.37	-1.39	38.98	47.00	-8.02	QP
6	*	722.9923	35.80	4.98	40.78	47.00	-6.22	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

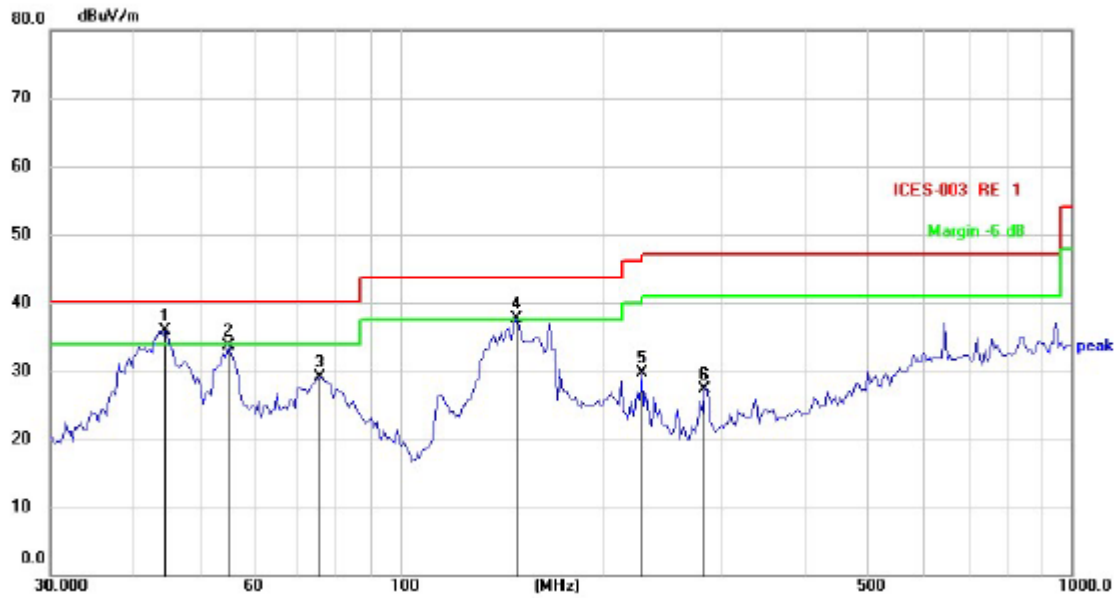

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	44.5086	41.51	-5.61	35.90	40.00	-4.10	QP
2		55.4147	40.31	-6.69	33.62	40.00	-6.38	QP
3		75.9771	37.78	-8.67	29.11	40.00	-10.89	QP
4	!	149.2238	40.90	-3.26	37.64	43.50	-5.86	QP
5		229.2930	36.79	-7.14	29.65	46.00	-16.35	QP
6		285.4768	32.71	-5.37	27.34	47.00	-19.66	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Adapter model: W52RA198-290018+ Black nose:
Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.7351	35.69	-5.47	30.22	40.00	-9.78	QP
2		137.9028	30.52	-4.48	26.04	43.50	-17.46	QP
3		208.2145	40.36	-7.38	32.98	43.50	-10.52	QP
4		282.9849	37.68	-5.48	32.20	46.00	-13.80	QP
5		500.3009	37.00	0.05	37.05	46.00	-8.95	QP
6	*	722.9923	33.88	4.98	38.86	46.00	-7.14	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	44.9004	41.69	-5.69	36.00	40.00	-4.00	QP
2		79.3816	39.35	-9.02	30.33	40.00	-9.67	QP
3		144.0817	37.09	-3.89	33.20	43.50	-10.30	QP
4		282.9849	29.65	-5.48	24.17	46.00	-21.83	QP
5		458.3100	36.84	-0.87	35.97	46.00	-10.03	QP
6		762.0384	29.91	5.71	35.62	46.00	-10.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Adapter model: W87RA07-290030+ white nose:

CH (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	98.76	-5.71	93.05	114	-20.95	peak
2440	92.88	-5.71	87.17	94	-6.83	AVG
4880	56.04	-3.51	52.53	74	-21.47	peak
4880	46.47	-3.51	42.96	54	-11.04	AVG
7320	57.37	-0.82	56.55	74	-17.45	peak
7320	46.05	-0.82	45.23	54	-8.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	98.92	-5.71	93.21	114	-20.79	peak
2440	91.95	-5.71	86.24	94	-7.76	AVG
4880	55.94	-3.51	52.43	74	-21.57	peak
4880	46.84	-3.51	43.33	54	-10.67	AVG
7320	57.08	-0.82	56.26	74	-17.74	peak
7320	47.75	-0.82	46.93	54	-7.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Adapter model: W52RA199-290018+ white nose

CH (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	100.53	-5.71	94.82	114	-19.18	peak
2440	91.51	-5.71	85.80	94	-8.20	AVG
4880	54.73	-3.51	51.22	74	-22.78	peak
4880	45.90	-3.51	42.39	54	-11.61	AVG
7320	56.27	-0.82	55.45	74	-18.55	peak
7320	47.17	-0.82	46.35	54	-7.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	97.29	-5.71	91.58	114	-22.42	peak
2440	92.48	-5.71	86.77	94	-7.23	AVG
4880	55.76	-3.51	52.25	74	-21.75	peak
4880	45.63	-3.51	42.12	54	-11.88	AVG
7320	57.19	-0.82	56.37	74	-17.63	peak
7320	46.50	-0.82	45.68	54	-8.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Adapter model: W52RA198-290018+ white nose

CH (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	98.96	-5.71	93.25	114	-20.75	peak
2440	91.57	-5.71	85.86	94	-8.14	AVG
4880	54.85	-3.51	51.34	74	-22.66	peak
4880	45.41	-3.51	41.90	54	-12.10	AVG
7320	56.53	-0.82	55.71	74	-18.29	peak
7320	45.95	-0.82	45.13	54	-8.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	96.32	-5.71	90.61	114	-23.39	peak
2440	92.56	-5.71	86.85	94	-7.15	AVG
4880	54.95	-3.51	51.44	74	-22.56	peak
4880	46.05	-3.51	42.54	54	-11.46	AVG
7320	56.04	-0.82	55.22	74	-18.78	peak
7320	46.61	-0.82	45.79	54	-8.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Adapter model: W87RA07-290030+ Black nose:

CH (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	98.54	-5.71	92.83	114	-21.17	peak
2440	91.93	-5.71	86.22	94	-7.78	AVG
4880	55.48	-3.51	51.97	74	-22.03	peak
4880	46.64	-3.51	43.13	54	-10.87	AVG
7320	57.86	-0.82	57.04	74	-16.96	peak
7320	47.83	-0.82	47.01	54	-6.99	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	97.32	-5.71	91.61	114	-22.39	peak
2440	92.97	-5.71	87.26	94	-6.74	AVG
4880	54.28	-3.51	50.77	74	-23.23	peak
4880	45.02	-3.51	41.51	54	-12.49	AVG
7320	56.66	-0.82	55.84	74	-18.16	peak
7320	46.87	-0.82	46.05	54	-7.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Adapter model: W52RA199-290018+ Black nose:

CH (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	98.70	-5.71	92.99	114	-21.01	peak
2440	91.98	-5.71	86.27	94	-7.73	AVG
4880	55.51	-3.51	52.00	74	-22.00	peak
4880	46.92	-3.51	43.41	54	-10.59	AVG
7320	57.74	-0.82	56.92	74	-17.08	peak
7320	47.82	-0.82	47.00	54	-7.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	98.68	-5.71	92.97	114	-21.03	peak
2440	91.94	-5.71	86.23	94	-7.77	AVG
4880	54.28	-3.51	50.77	74	-23.23	peak
4880	46.33	-3.51	42.82	54	-11.18	AVG
7320	56.63	-0.82	55.81	74	-18.19	peak
7320	47.47	-0.82	46.65	54	-7.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Adapter model: W52RA198-290018+ Black nose:
CH (2440MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	101.56	-5.71	95.85	114	-18.15	peak
2440	92.45	-5.71	86.74	94	-7.26	AVG
4880	55.23	-3.51	51.72	74	-22.28	peak
4880	46.21	-3.51	42.70	54	-11.30	AVG
7320	57.84	-0.82	57.02	74	-16.98	peak
7320	47.20	-0.82	46.38	54	-7.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440	99.66	-5.71	93.95	114	-20.05	peak
2440	92.13	-5.71	86.42	94	-7.58	AVG
4880	54.36	-3.51	50.85	74	-23.15	peak
4880	45.94	-3.51	42.43	54	-11.57	AVG
7320	56.05	-0.82	55.23	74	-18.77	peak
7320	46.53	-0.82	45.71	54	-8.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz.
- (2) All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

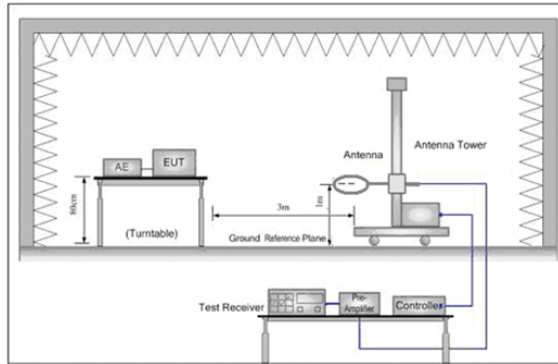


Figure 1. Below 30MHz


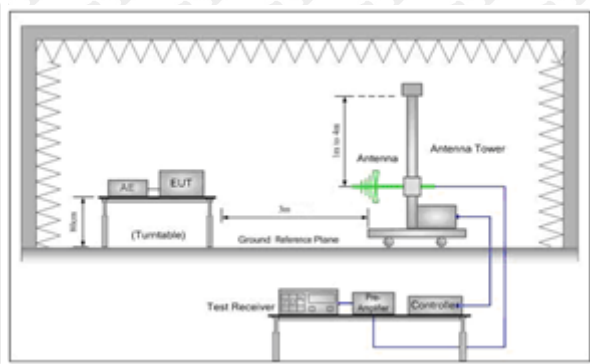


Figure 2. 30MHz to 1GHz

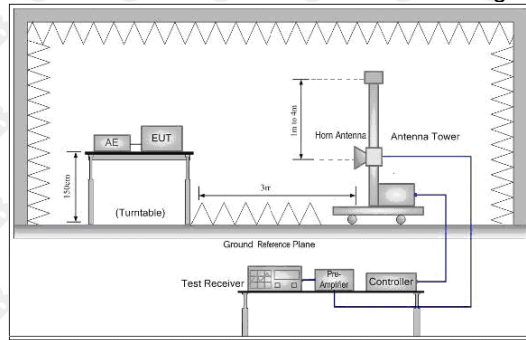

8.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

8.3 Test procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Frequency	Detector	RBW	VBW	Remark
2310MHz-2400MHz	peak	1MHz	3MHz	peak
2483.5MHz-2500MHz	peak	1MHz	3MHz	peak

8.4 Test Result

CH Low:

Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.1473	29.79	-4.31	25.47	54	-28.53	peak
2	2343.9287	31.40	-4.35	27.04	54	-26.96	peak
3	2378.1652	28.12	-4.49	23.63	54	-30.37	peak
4	2389.781	27.56	-4.91	22.64	54	-31.36	peak
5	2439.9945	26.96	-3.91	23.05	54	-30.95	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.2716	27.61	-4.28	23.33	54	-30.67	peak
2	2343.5536	31.26	-4.27	26.99	54	-27.01	peak
3	2378.1386	28.04	-4.41	23.63	54	-30.37	peak
4	2390.1539	27.37	-4.92	22.45	54	-31.55	peak
5	2439.912	27.03	-3.99	23.04	54	-30.96	peak

CH High:

Horizontal:


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.1823	32.49	-4.35	28.14	54	-25.86	peak
2	2488.8722	30.70	-4.32	26.38	54	-27.62	peak
3	2490.5363	30.26	-4.46	25.80	54	-28.20	peak
4	2493.511	33.75	-4.96	28.79	54	-25.21	peak
5	2496.1168	27.39	-3.92	23.47	54	-30.53	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.0187	32.41	-4.32	28.09	54	-25.91	peak
2	2488.8221	33.72	-4.33	29.39	54	-24.61	peak
3	2490.1197	31.97	-4.47	27.51	54	-26.49	peak
4	2493.3911	33.68	-4.92	28.76	54	-25.24	peak
5	2495.9775	27.83	-3.98	23.85	54	-30.15	peak

9. BANDWIDTH TEST

9.1 Block Diagram Of Test Setup

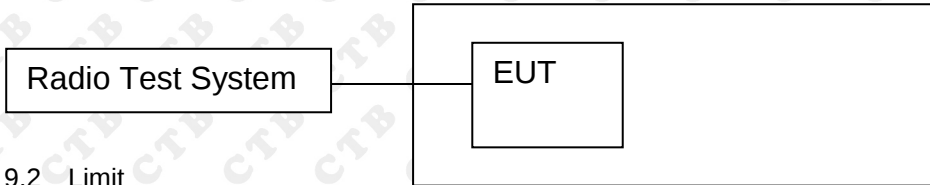

9.2 Limit

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249	Bandwidth	2402-2483.5	PASS

9.3 Test procedure


1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

9.4 Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Channel	1.118	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

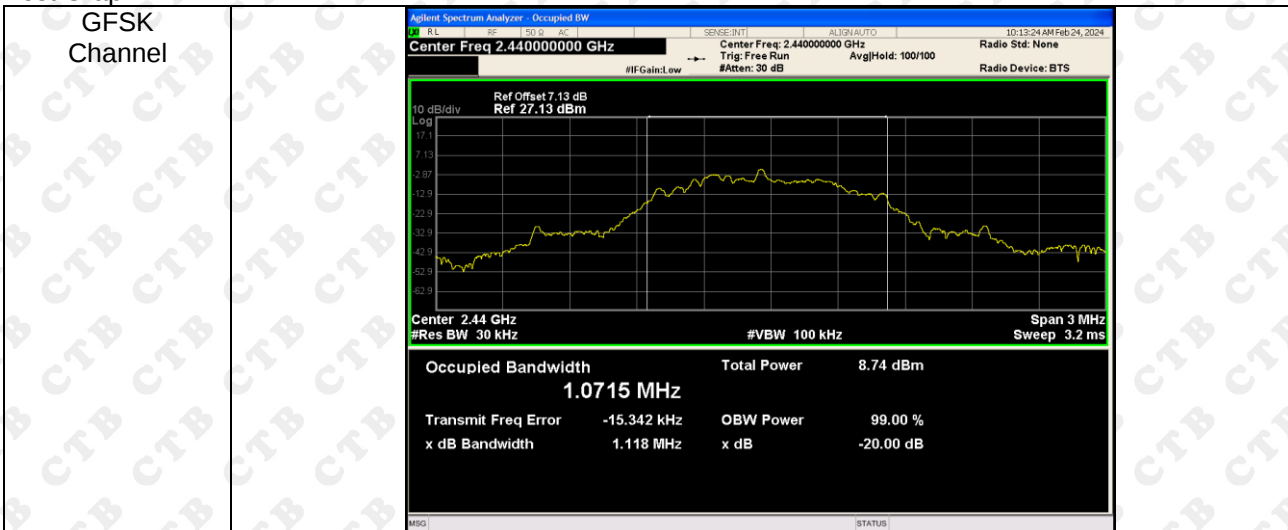

10. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Antenna. The best case gain of the antenna is 1.04dBi.

11. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions


Below 1G



Above 1G



Conducted emission

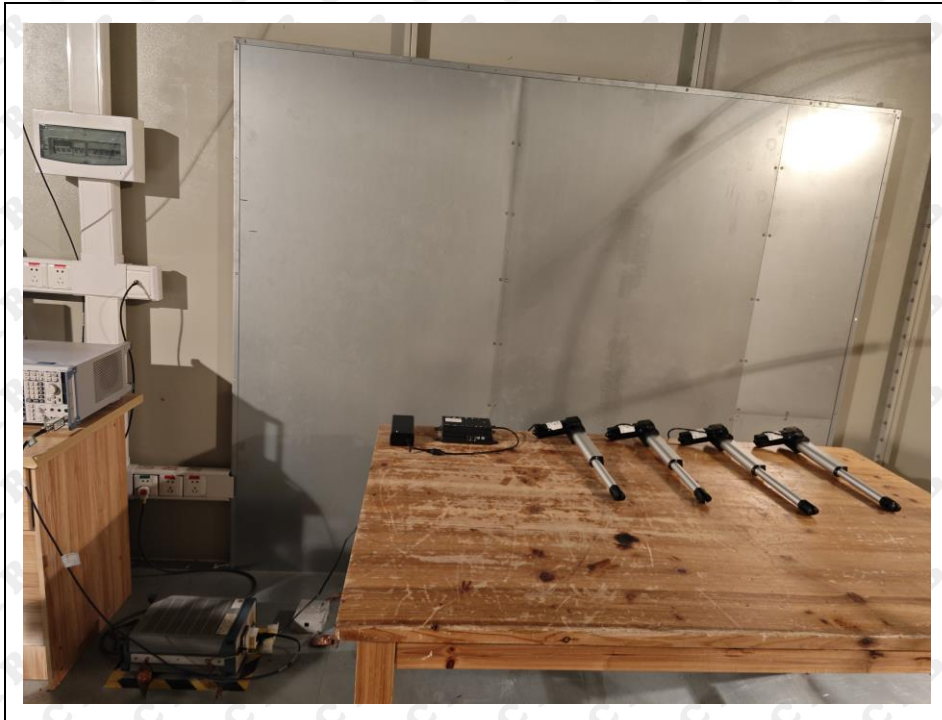

***** END OF REPORT *****