




802.11a

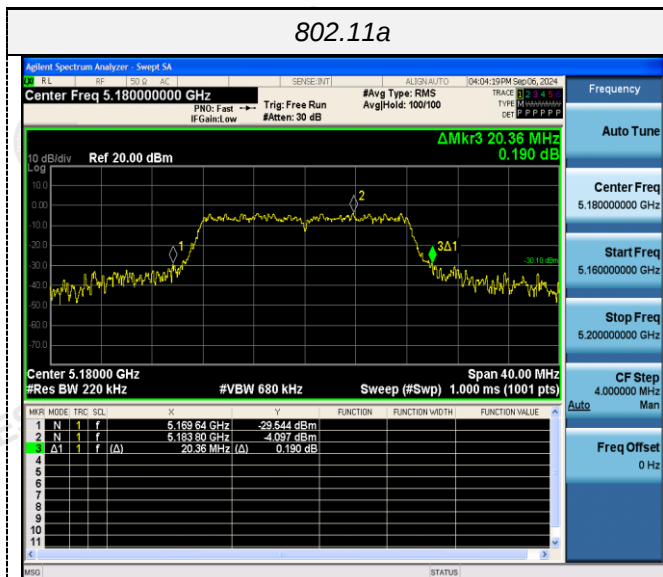


802.11n(HT20)

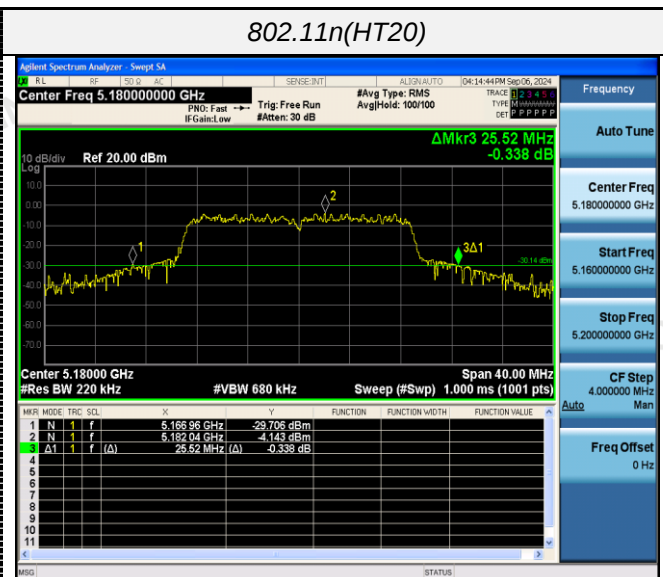


CH36

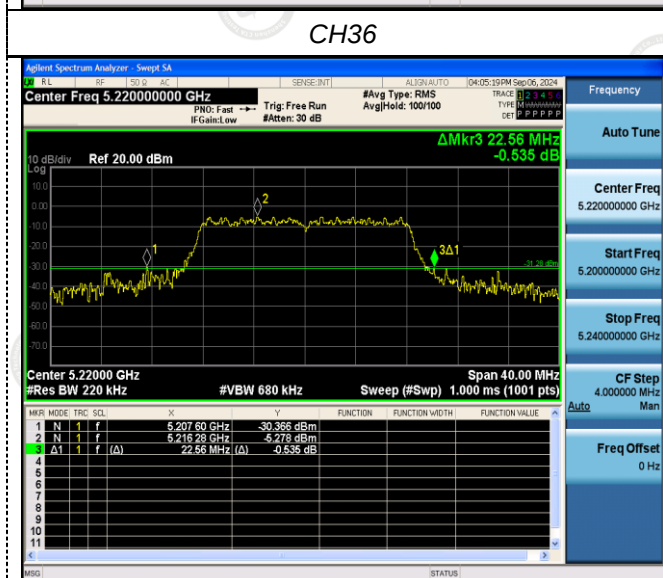


CH36

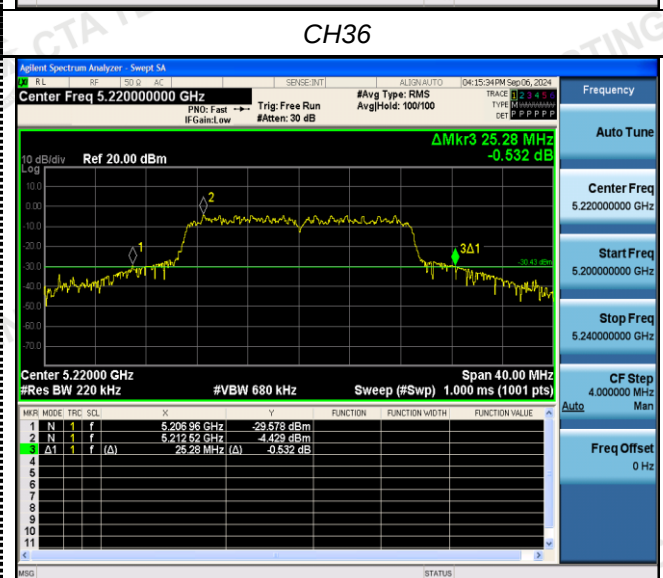

CH40

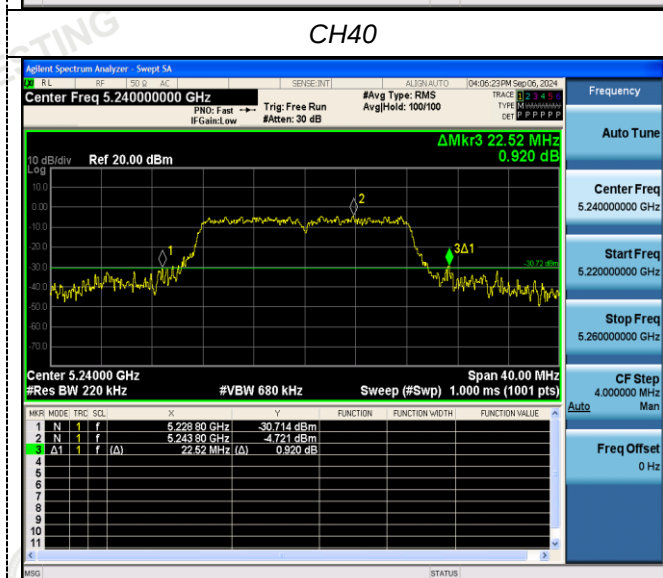

CH40

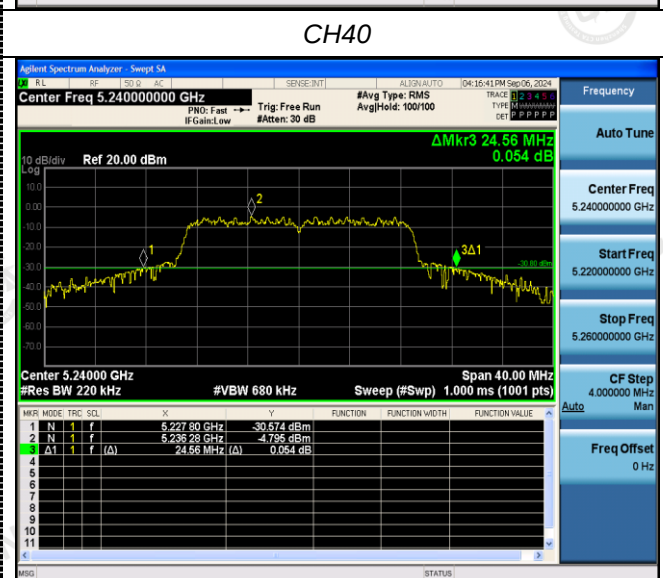


CH48




CH48



802.11n(HT40)

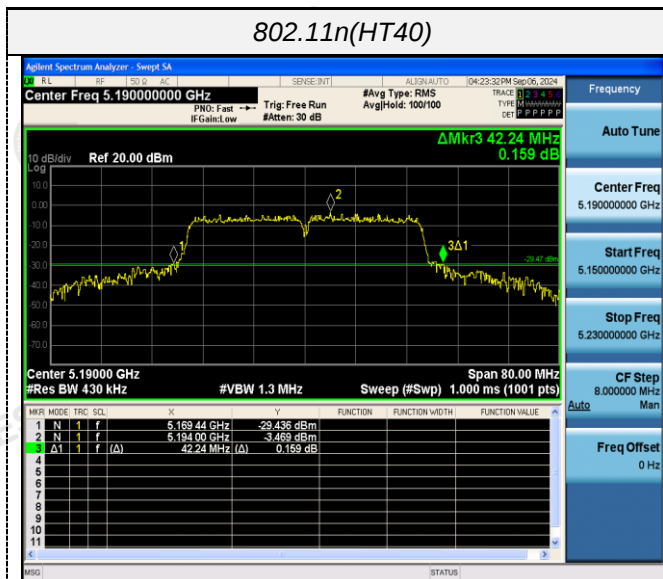


802.11ac(HT20)

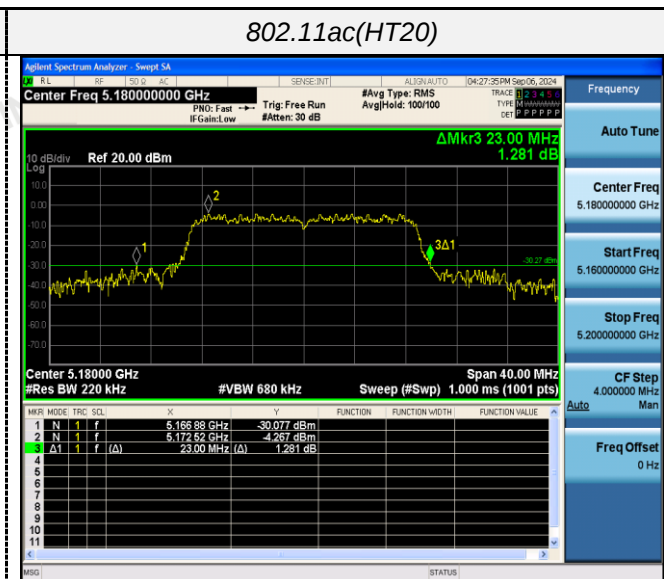

CH38



CH36

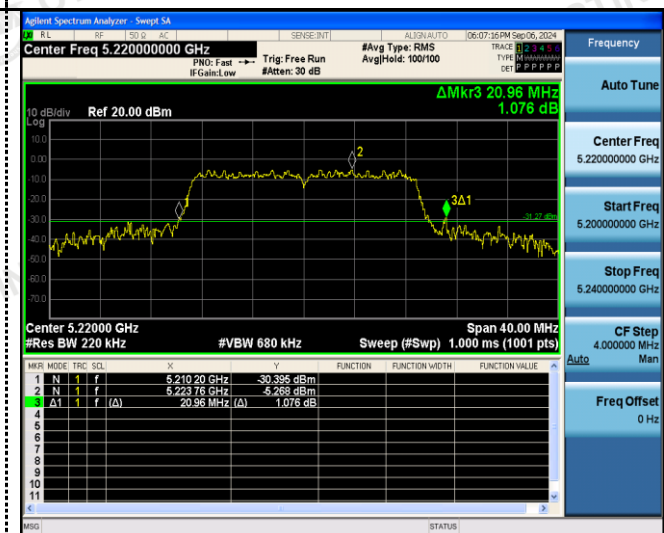

CH46




CH40




CH48

802.11ac(HT40)

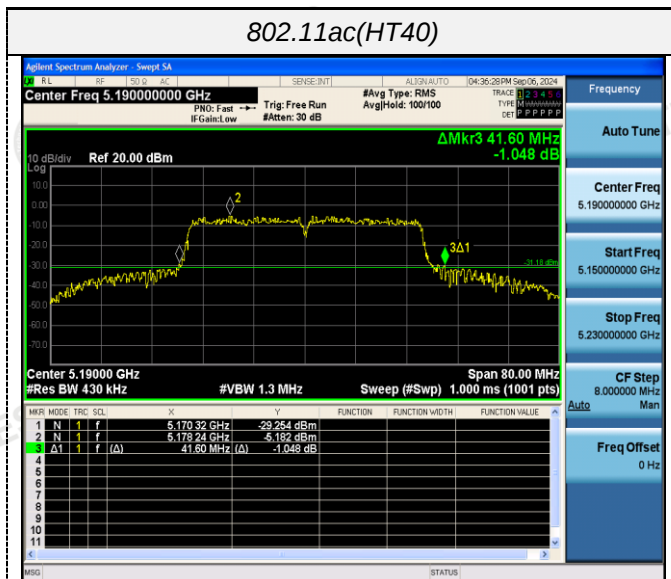


CH38

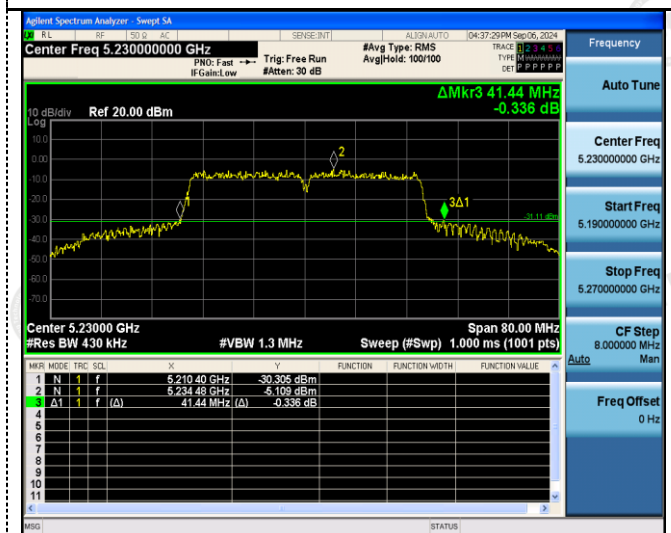


CH46


802.11ax(HT20)

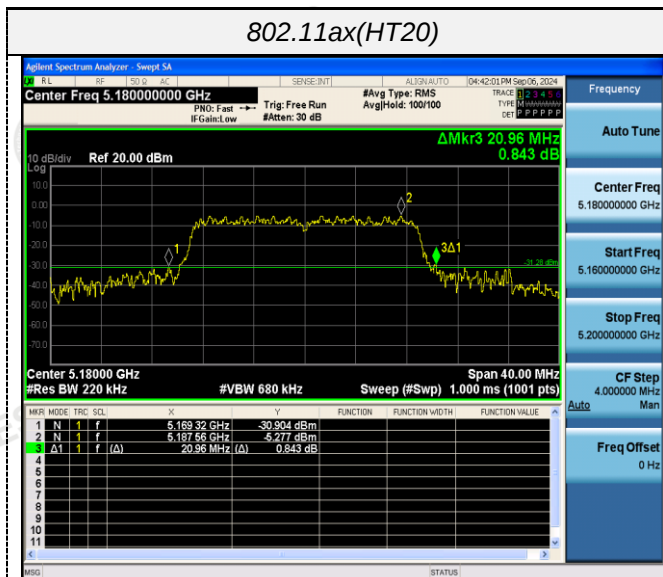


802.11ax(HT40)

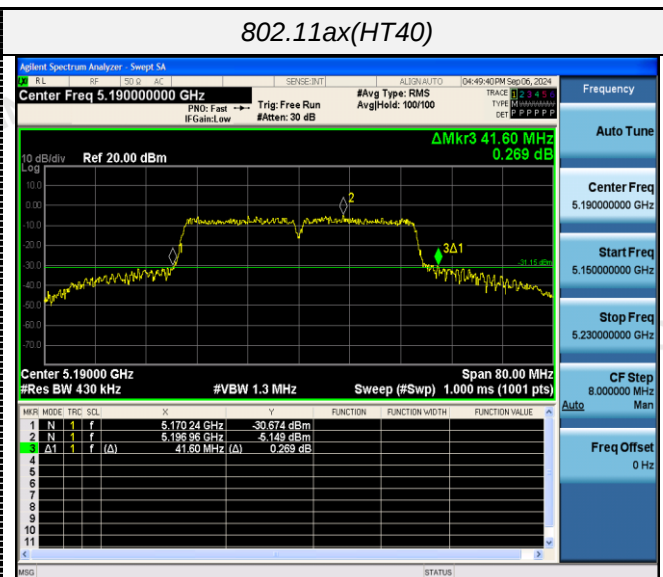


CH36

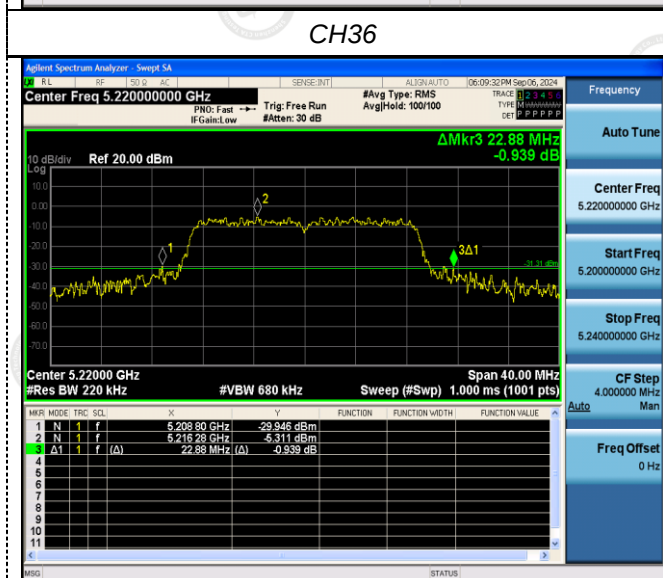


CH38

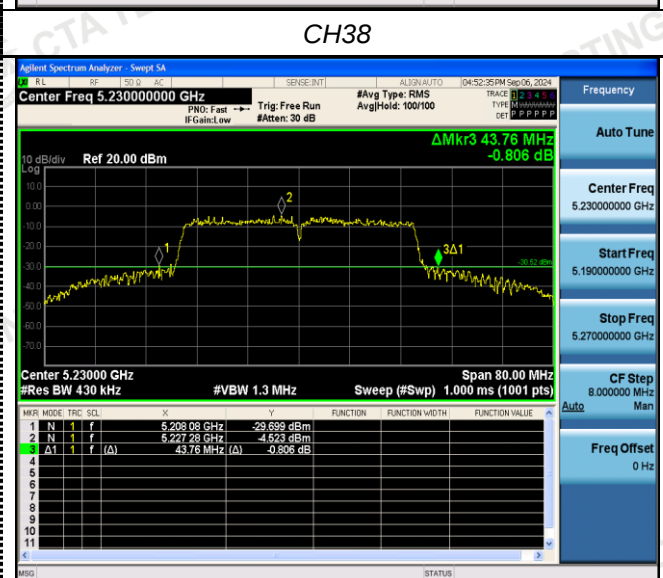

CH44

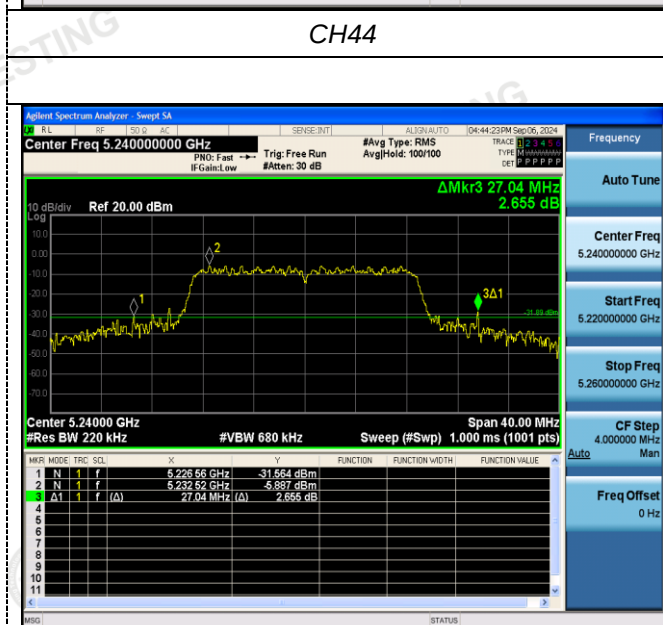

CH46

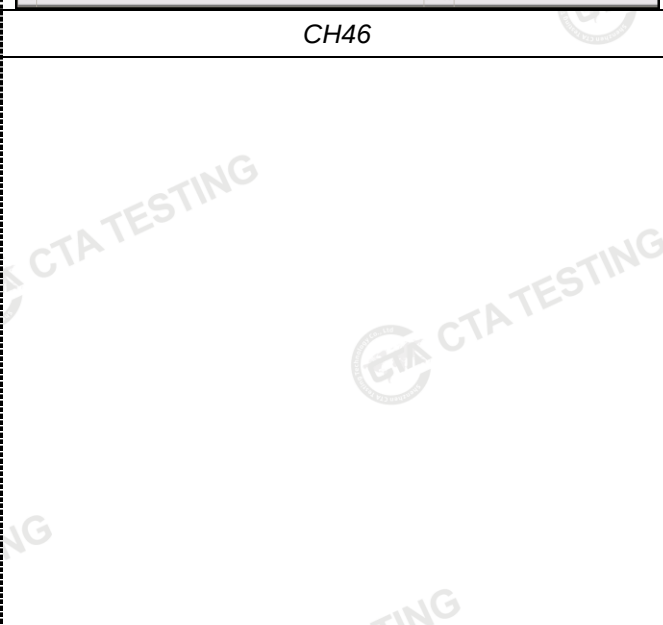

CH48



4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration




Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	16.320	≥500KHz	Pass
		157	16.320		
		165	16.280		
802.11n(HT20)	U-NII 3	149	17.160		
		157	17.120		
		165	16.960		
802.11n(HT40)	U-NII 3	151	35.280		
		159	35.760		
802.11ac(HT20)	U-NII 3	149	17.120		
		157	17.000		
		165	17.120		
802.11ac(HT40)	U-NII 3	151	35.360		
		159	35.360		
802.11ax(HT20)	U-NII 3	149	17.160		
		157	17.280		
		165	16.960		
802.11ax(HT40)	U-NII 3	151	35.520		
		159	35.760		

Test plot as follows:


802.11a

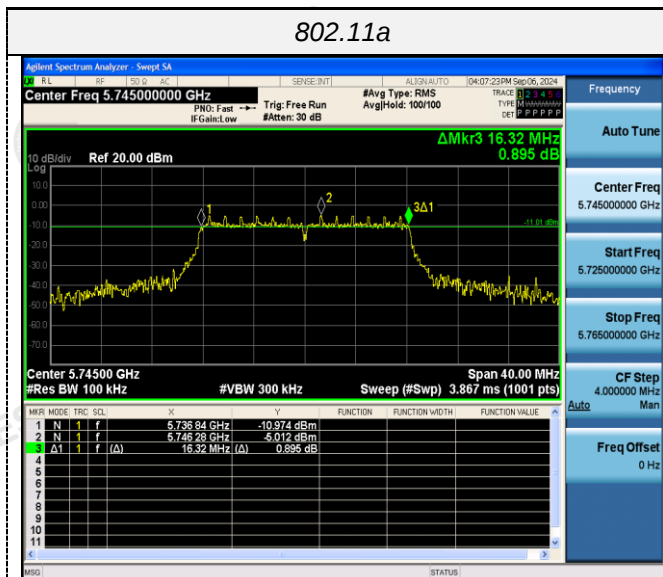


802.11n(HT20)

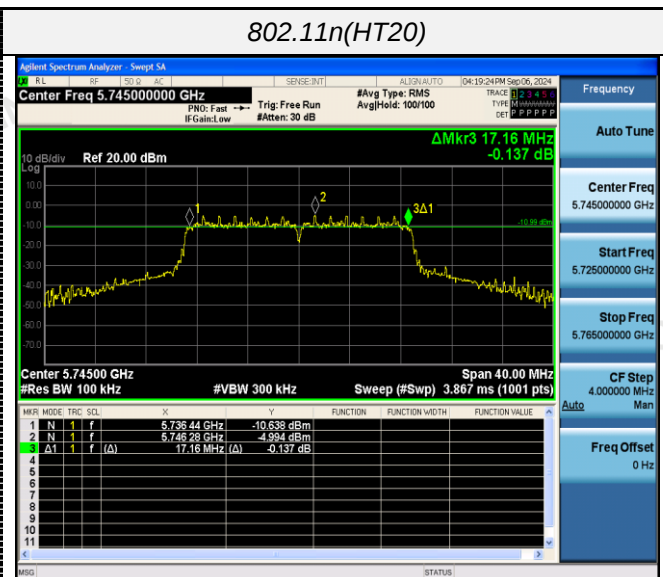


CH149

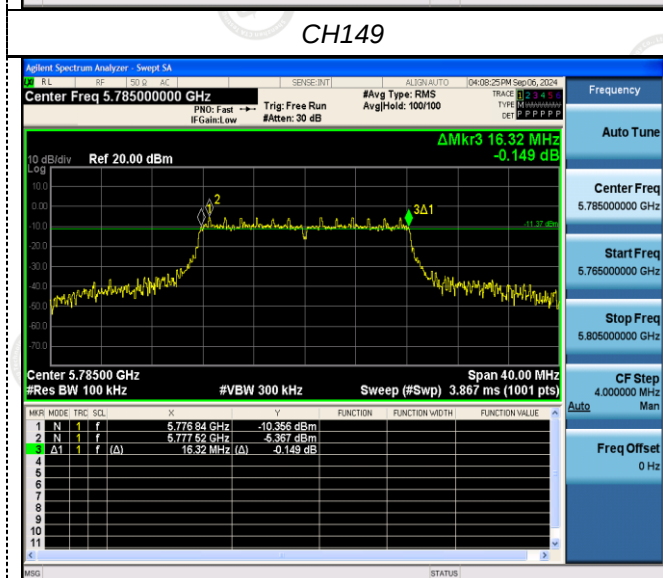


CH149

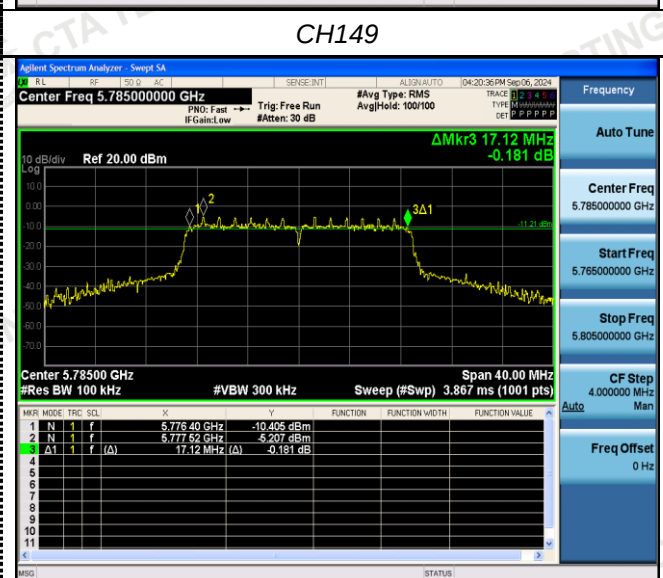


CH157

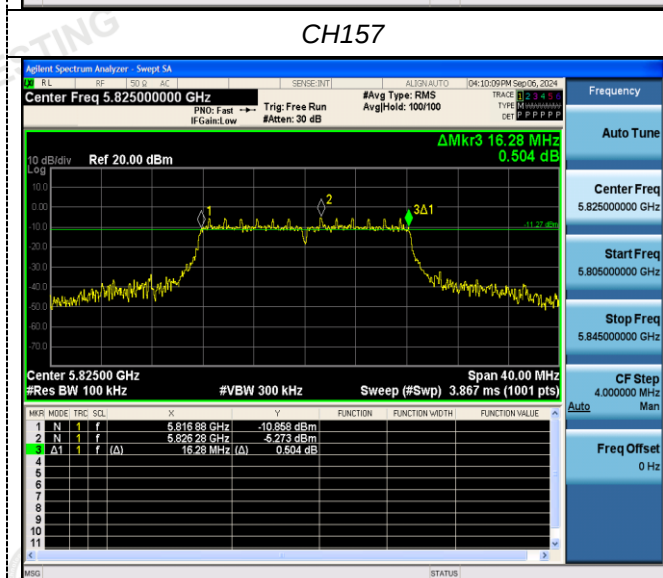


CH157

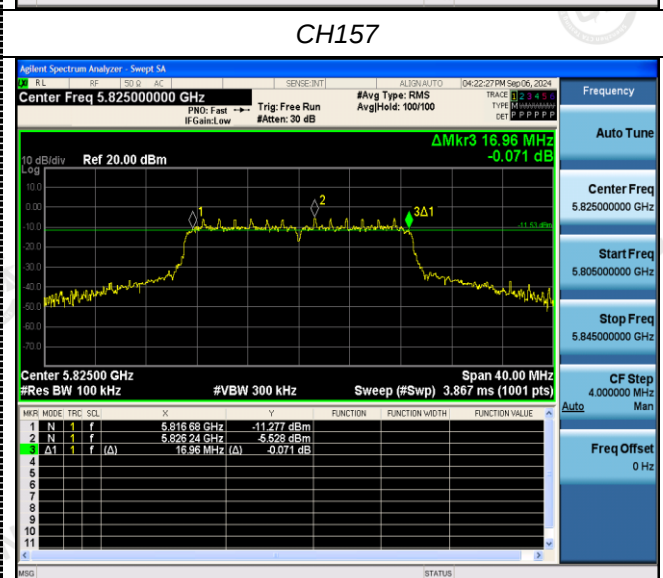


CH165




CH165




802.11n(HT40)

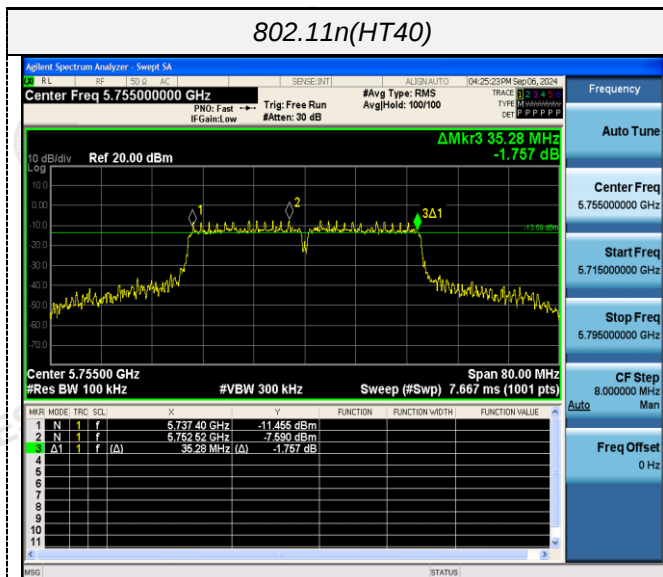


802.11ac(HT20)

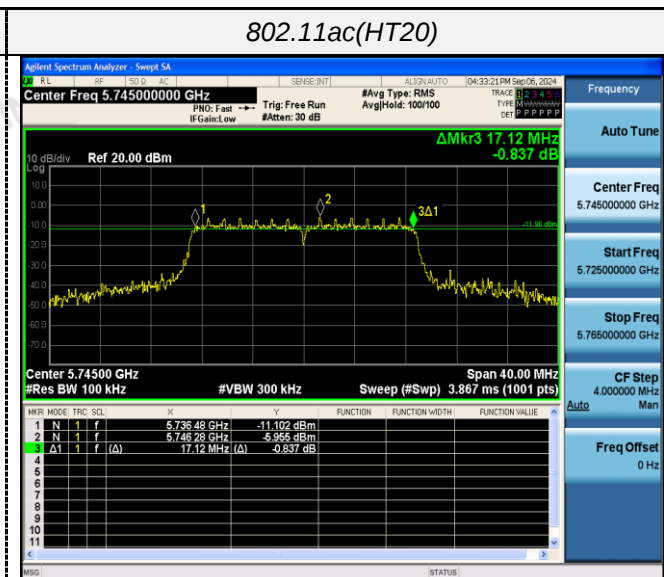

CH151

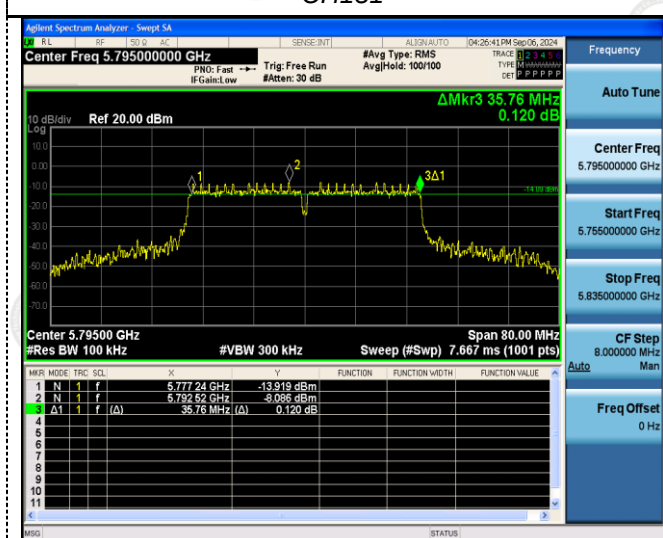


CH149

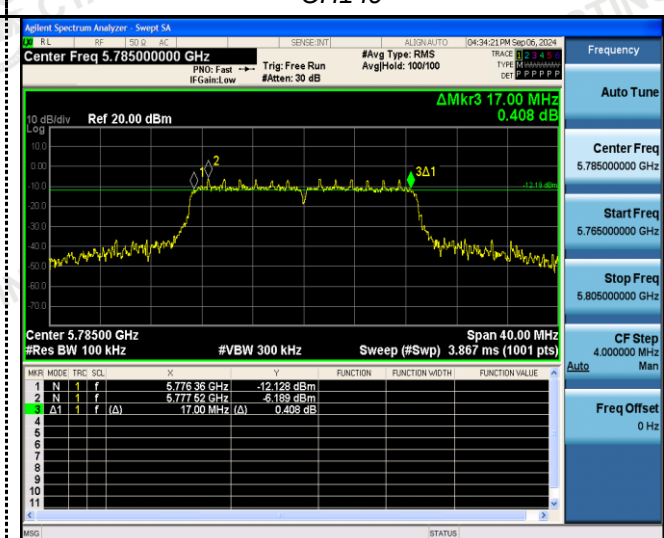

CH159




CH157

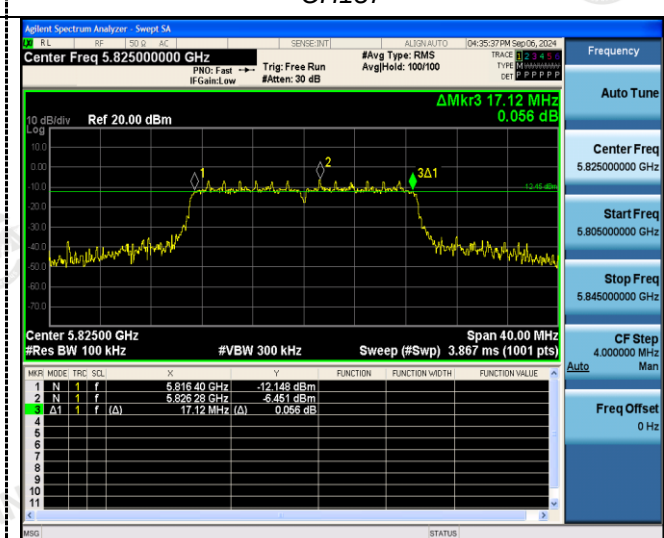


CH165

802.11ac(HT40)

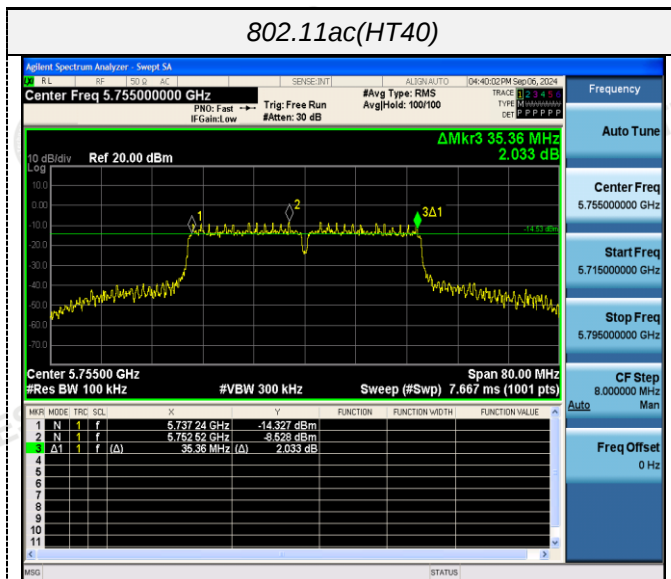


CH151

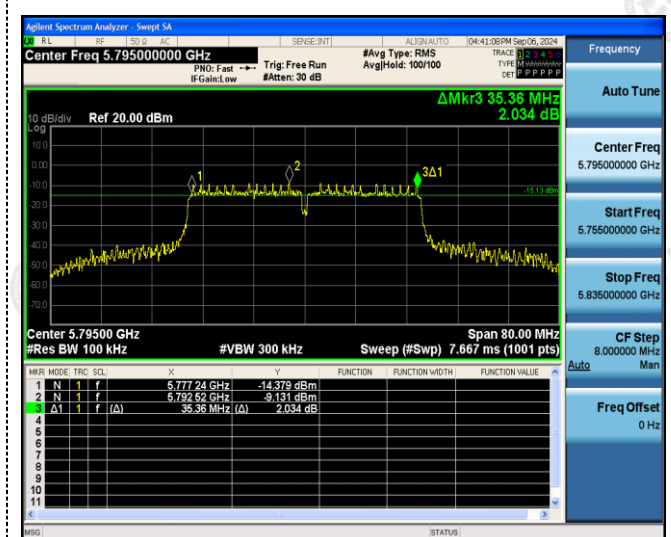


CH159


802.11ax(HT20)

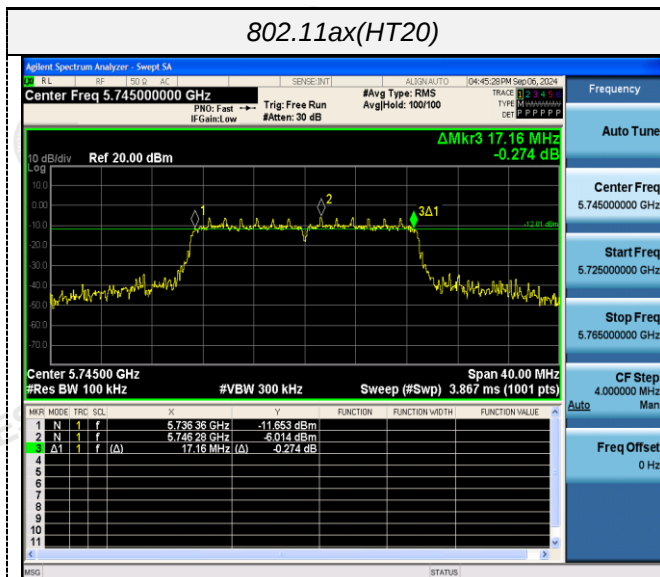


802.11ax(HT40)

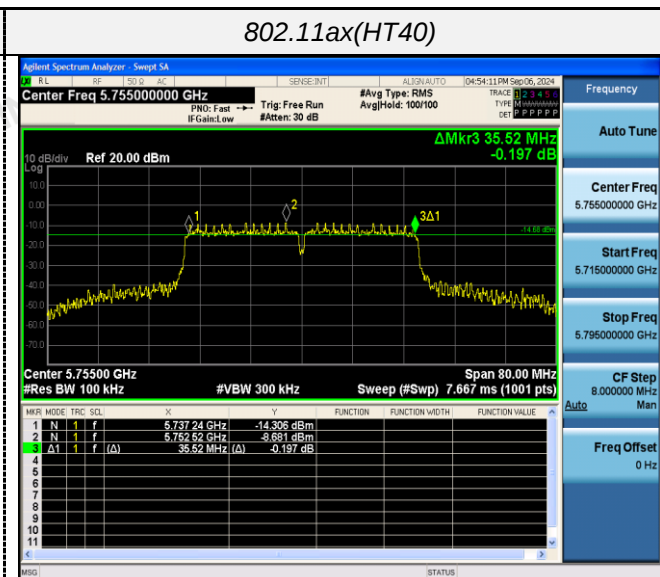


CH149

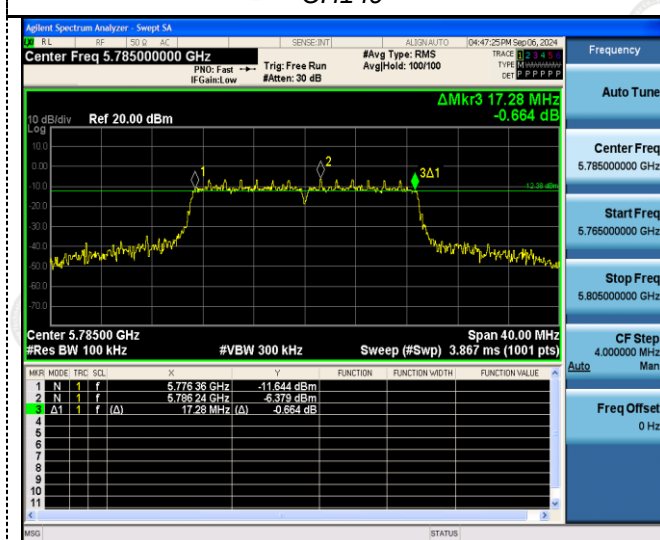

CH151

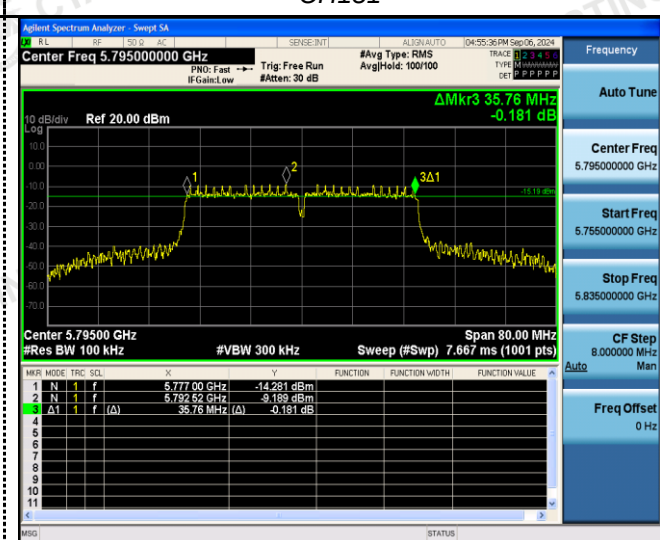

CH157

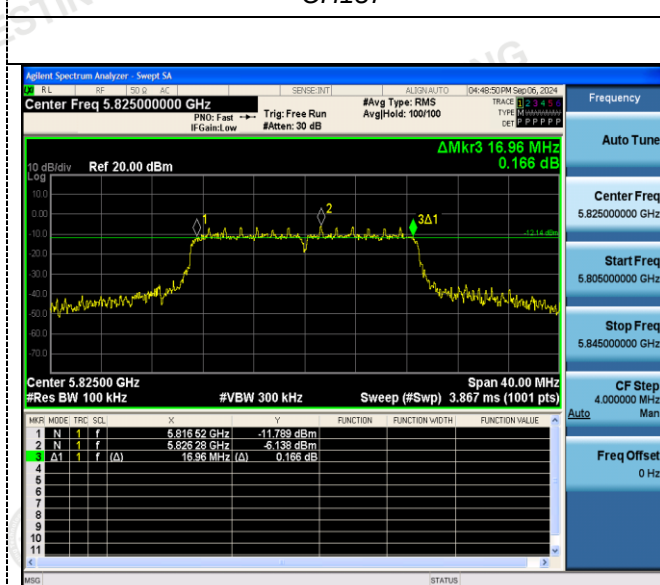

CH159




CH156

4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

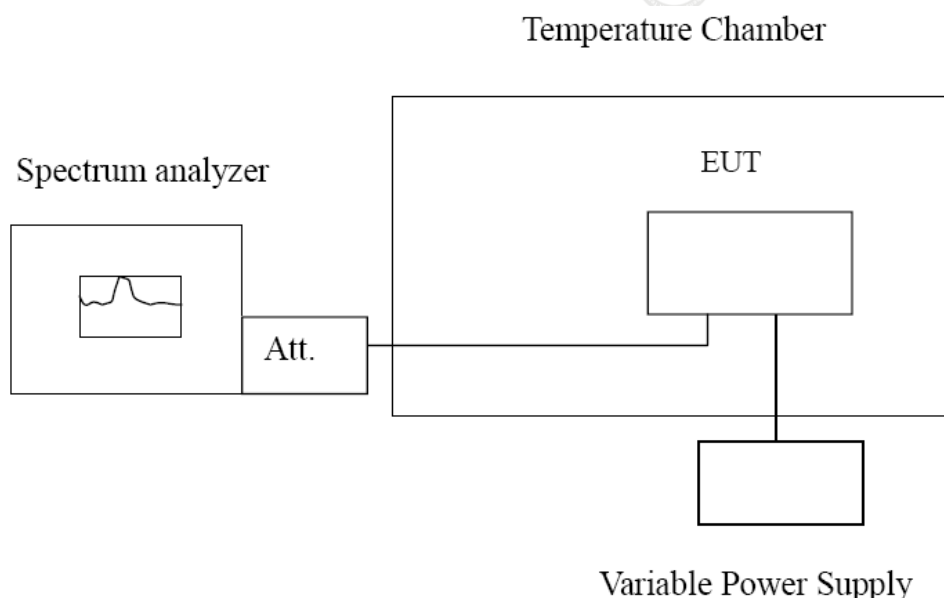

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.


TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
AC 120V	-30	110.64	0.021359	Within the band of operation	Pass
	-20	174.34	0.033656		
	-10	145.52	0.028093		
	0	146.81	0.028342		
	10	146.08	0.028201		
	20	99.71	0.019249		
	30	167.16	0.032270		
	40	129.64	0.025027		
	50	128.32	0.024772		
AC 132V	25	195.75	0.037790	Within the band of operation	Pass
AC 108V	25	118.54	0.022884		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
AC 120V	-30	135.52	0.023589	Within the band of operation	Pass
	-20	129.53	0.022547		
	-10	167.60	0.029173		
	0	169.96	0.029584		
	10	136.33	0.023730		
	20	144.88	0.025218		
	30	116.51	0.020280		
	40	168.55	0.029339		
	50	160.79	0.027988		
AC 132V	25	150.86	0.026259	Within the band of operation	Pass
AC 108V	25	129.51	0.022543		

5 Test Setup Photos of the EUT

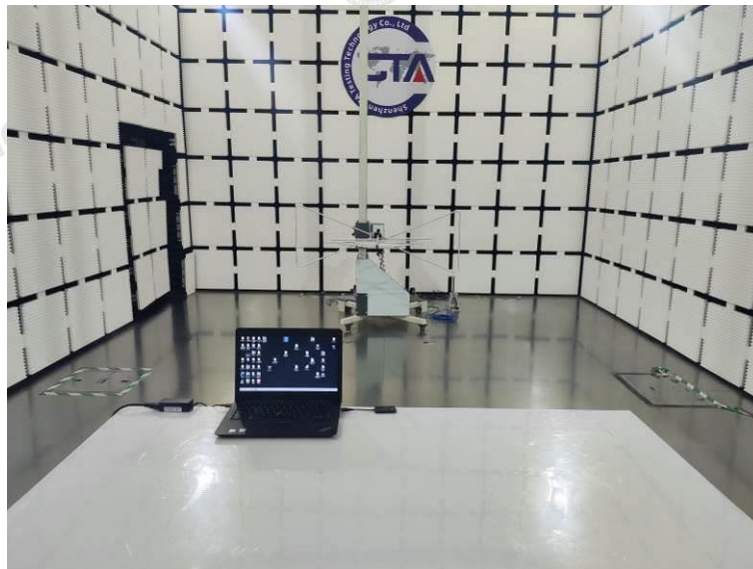

6 Photos of the EUT

Reference to the test report No. CTA24090600101.

***** End of Report *****