

Appendix A

RF Test Data for BT V5.1(BLE) (Conducted Measurement)

Product Name: Bluetooth Keyboard

Trade Mark: Doking


Test Model: BC8601B

Environmental Conditions

Temperature:	23.3°C
Relative Humidity:	54.3%
ATM Pressure:	100.0 kPa
Test Engineer:	JAM ZHENG
Supervised by:	Li Huan

A.1 Duty Cycle

Test Mode	Test Channel	Ant	Duty Cycle[%]	Verdict
BT LE	2440	Ant1	100	PASS

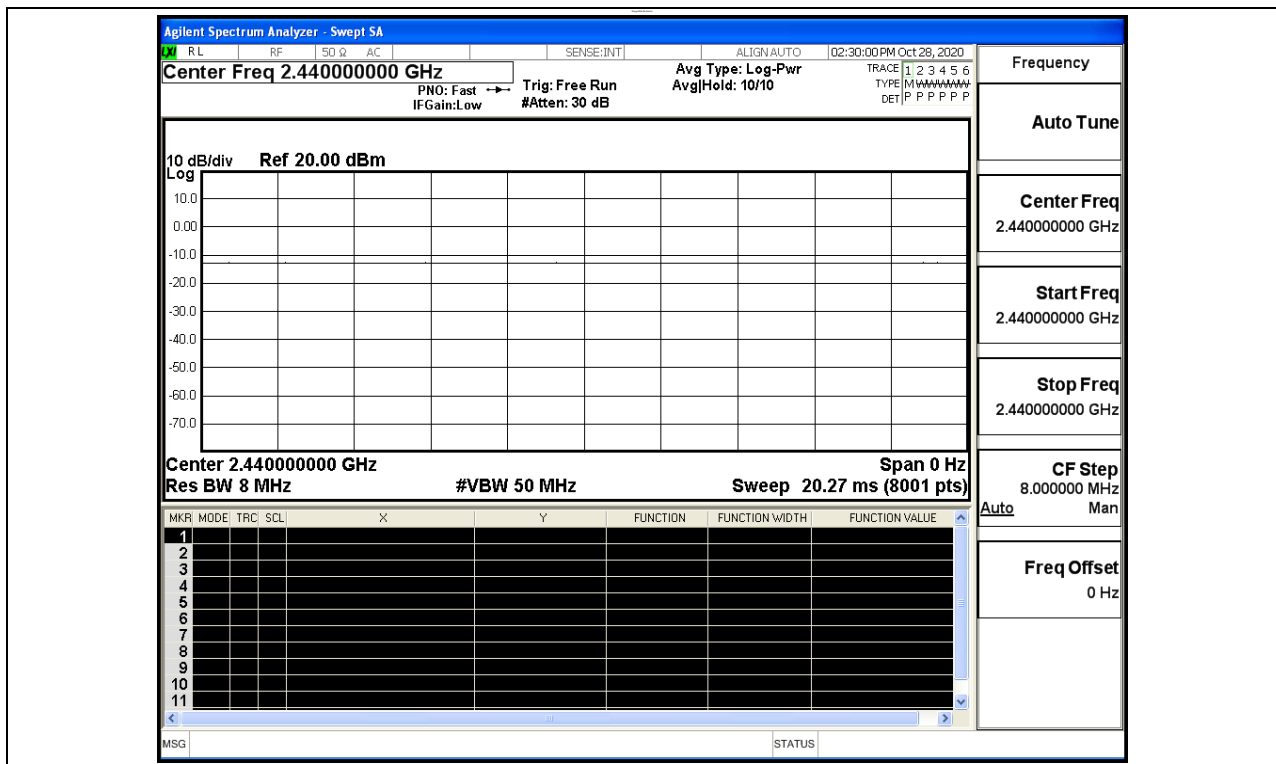


A.2 Maximum Conducted Peak Output Power

Mode	Channel	Conduct Peak Power[dBm]	Limit [dBm]	Verdict
BT LE	LCH	-4.466	30	PASS
BT LE	MCH	-4.995	30	PASS
BT LE	HCH	-5.903	30	PASS

Test Graphs	
LCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Mkr1 2.402 127 500 GHz -4.466 dBm</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Center 2.402000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.067 ms (8001 pts)</p>
MCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44000000 GHz</p> <p>Mkr1 2.439 946 250 GHz -4.995 dBm</p> <p>Ref Offset 8.05 dB Ref 20.00 dBm</p> <p>Center 2.440000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Sweep 1.067 ms (8001 pts)</p>



HCH

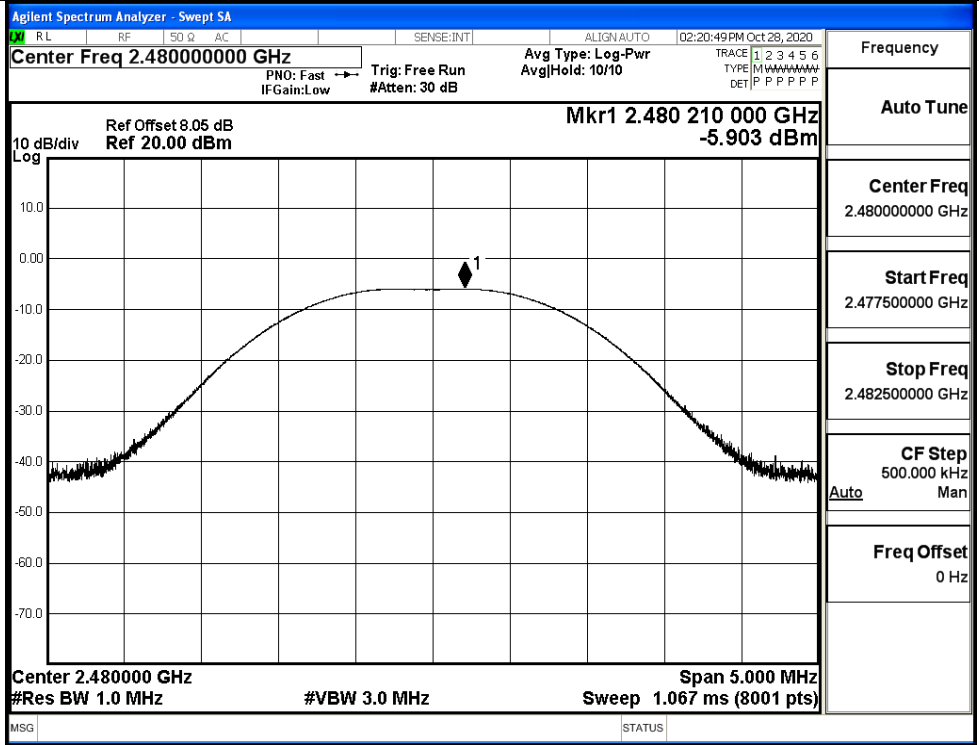

A.3 Maximum Power Spectral Density

Mode	Channel	PSD [dBm/3KHz]	Limit [dBm/3KHz]	Verdict
BT LE	LCH	-20.332	8	PASS
BT LE	MCH	-20.633	8	PASS
BT LE	HCH	-21.510	8	PASS

Test Graphs

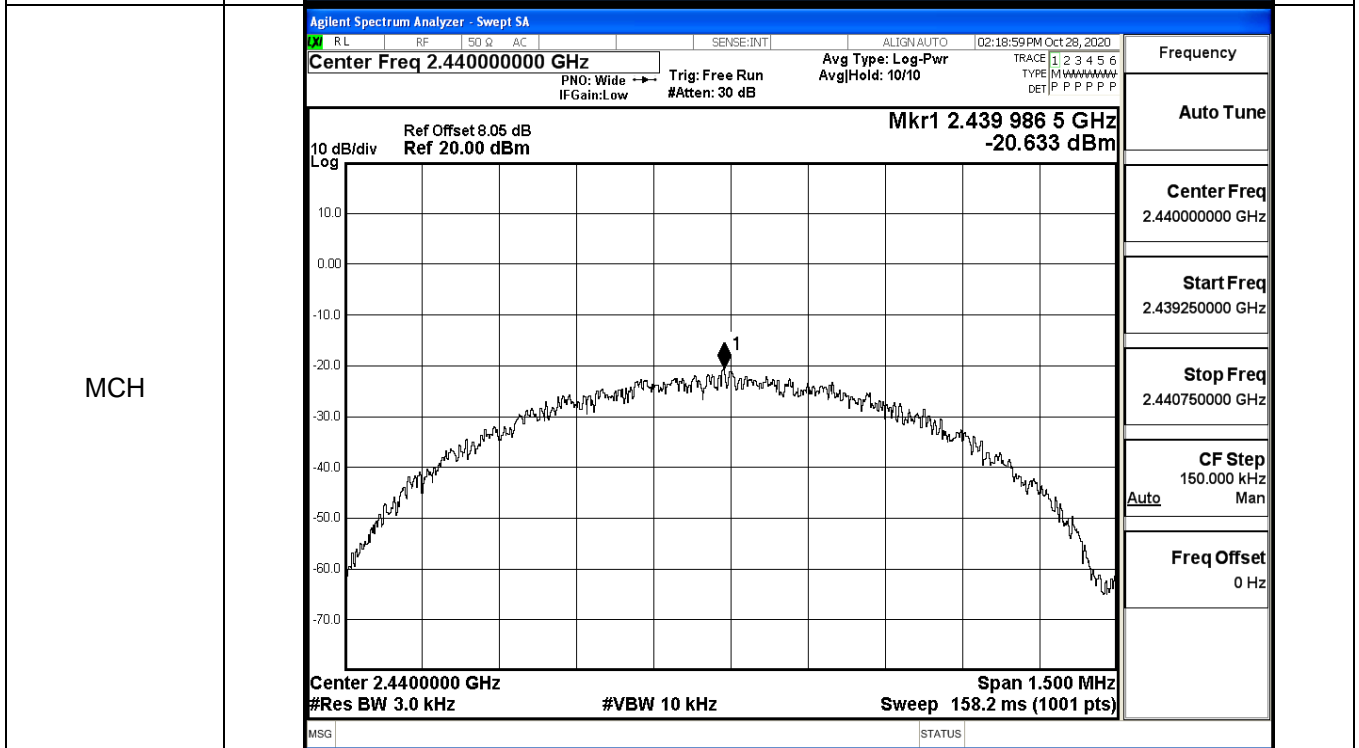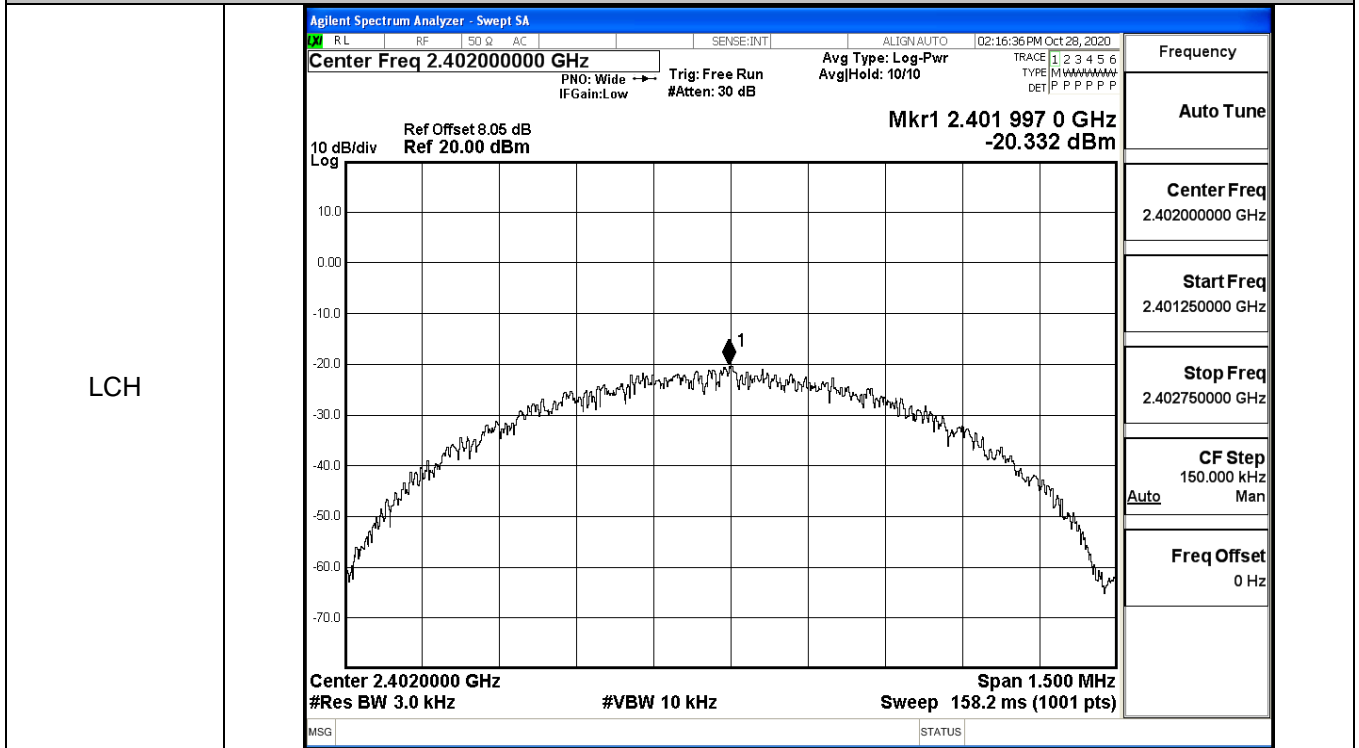


A.4 6dB Bandwidth

Mode	Channel	6dB Bandwidth [MHz]	Limit [MHz]	Verdict
BT LE	LCH	0.6560	≥0.5	PASS
BT LE	MCH	0.6440	≥0.5	PASS
BT LE	HCH	0.6456	≥0.5	PASS

Test Graphs																
LCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 02:16:11 PM Oct 28, 2020</p> <p style="margin: 0;">Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None Trig: Free Run AvgHold: 1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;"> 10 dB/div Log Ref Offset 8.05 dB Ref 20.00 dBm </div> <div style="text-align: right;"> Mkr1 2.4020004 GHz -4.9222 dBm </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.402 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.75 dBm</td> </tr> <tr> <td style="text-align: center;">1.0334 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-11.518 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>656.0 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	1.75 dBm	1.0334 MHz			Transmit Freq Error	-11.518 kHz	OBW Power	x dB Bandwidth	656.0 kHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	1.75 dBm														
1.0334 MHz																
Transmit Freq Error	-11.518 kHz	OBW Power														
x dB Bandwidth	656.0 kHz	x dB														
		-6.00 dB														
MCH	<div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; margin: 0;">Agilent Spectrum Analyzer - Occupied BW</p> <p style="font-size: small; margin: 0;">RL RF 50 Ω AC SENSE:INT ALIGN:AUTO 02:18:35 PM Oct 28, 2020</p> <p style="margin: 0;">Center Freq 2.440000000 GHz Center Freq: 2.440000000 GHz Radio Std: None Trig: Free Run AvgHold: >1/1 #IFGain:Low #Atten: 30 dB Radio Device: BTS</p> <div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;"> 10 dB/div Log Ref Offset 8.05 dB Ref 20.00 dBm </div> <div style="text-align: right;"> Mkr1 2.4399749 GHz -5.4863 dBm </div> </div> <div style="display: flex; justify-content: space-between; font-size: x-small;"> <div>Center 2.44 GHz #Res BW 100 kHz</div> <div>#VBW 300 kHz</div> <div>Span 3 MHz Sweep 1.067 ms</div> </div> <table style="width: 100%; font-size: x-small; margin-top: 5px;"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>1.08 dBm</td> </tr> <tr> <td style="text-align: center;">1.0333 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-15.790 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>644.0 kHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table> <p style="font-size: x-small; margin-top: 5px;">MSG STATUS</p> </div>	Occupied Bandwidth	Total Power	1.08 dBm	1.0333 MHz			Transmit Freq Error	-15.790 kHz	OBW Power	x dB Bandwidth	644.0 kHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	1.08 dBm														
1.0333 MHz																
Transmit Freq Error	-15.790 kHz	OBW Power														
x dB Bandwidth	644.0 kHz	x dB														
		-6.00 dB														

HCH


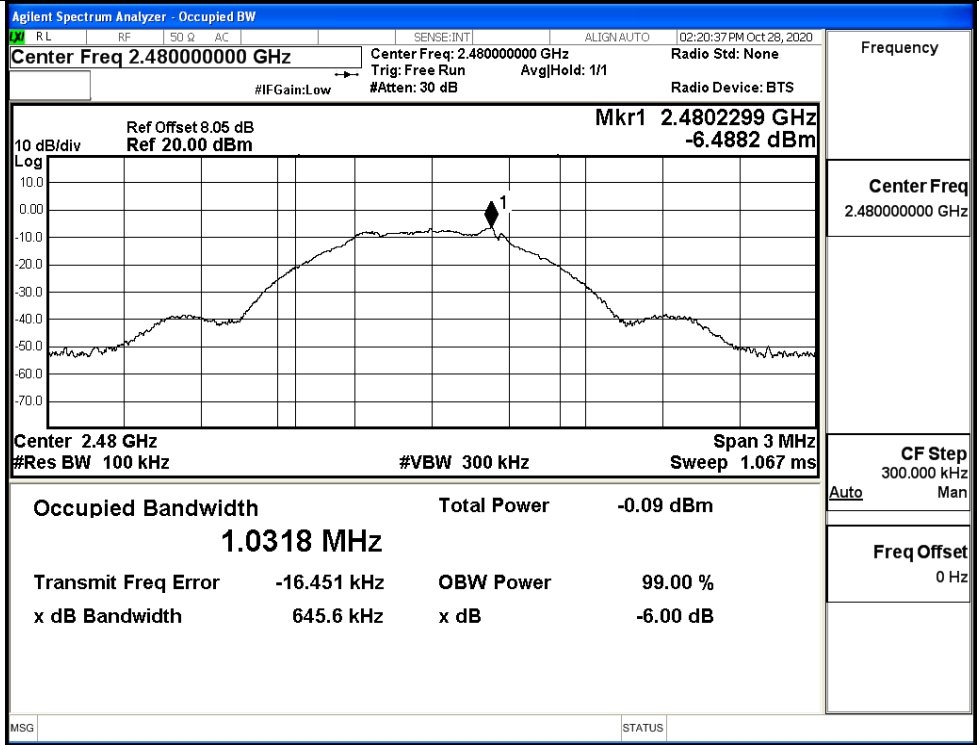


Frequency	Center Freq 2.48000000 GHz
CF Step	300.000 kHz Auto Man
Freq Offset	0 Hz

A.5 RF Conducted Spurious Emissions


Mode	Channel	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-4.874	-36.468	-24.874	PASS
BT LE	MCH	-5.747	-37.291	-25.747	PASS
BT LE	HCH	-7.126	-35.703	-27.126	PASS

BT LE_LCH_Graphs

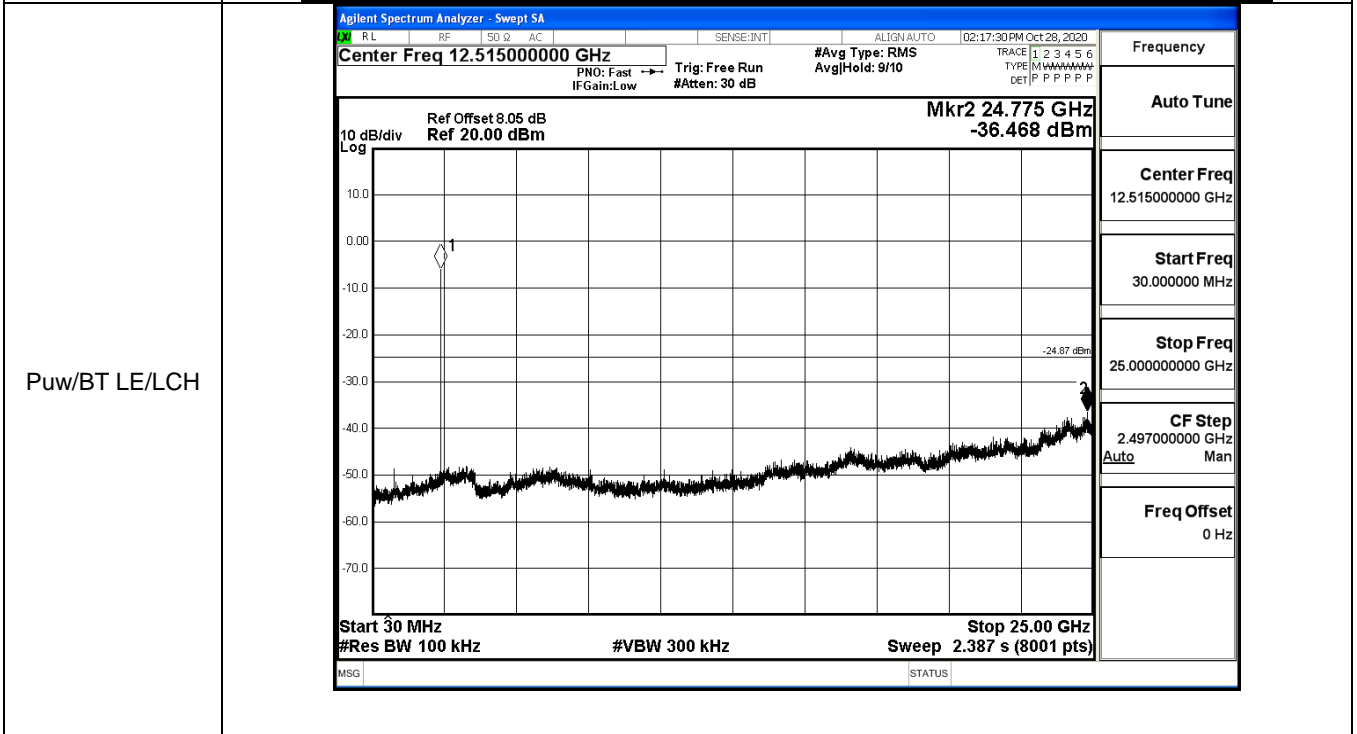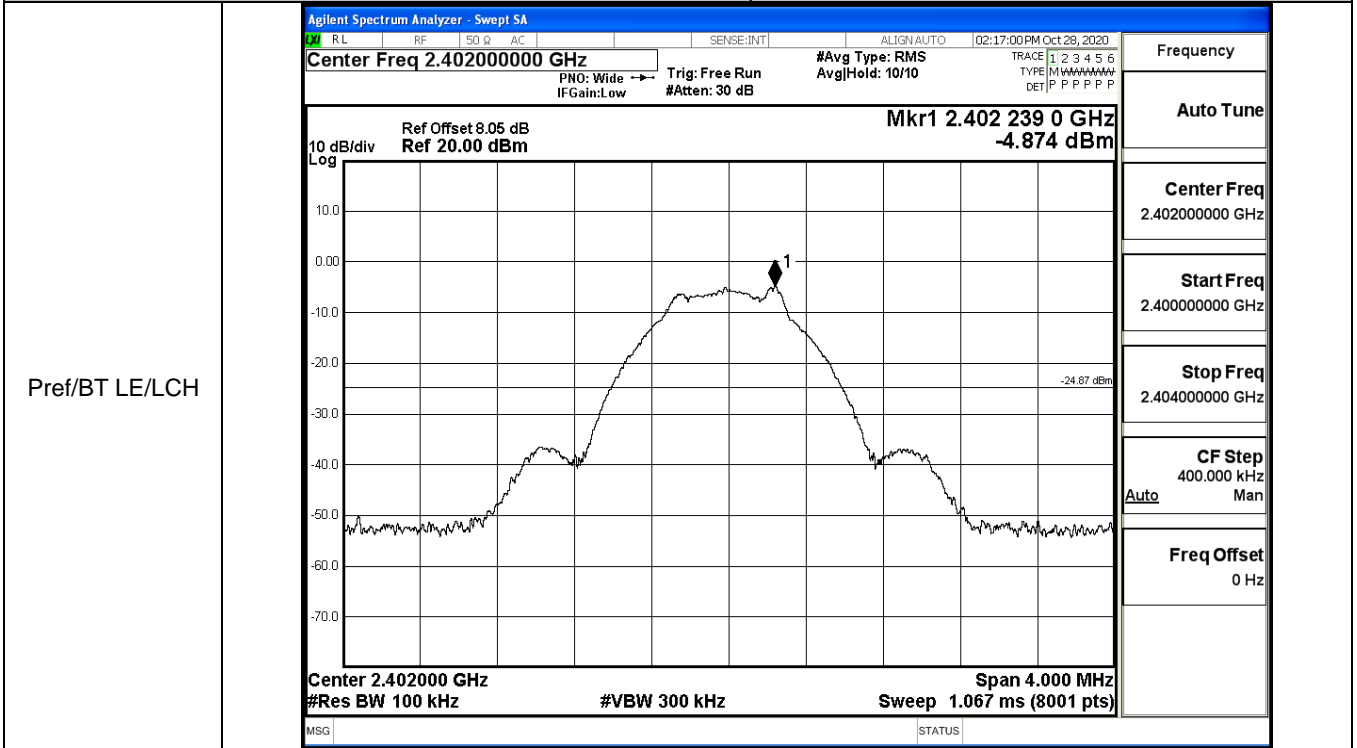


BT LE_MCH_Graphs

Pref/BT LE/MCH

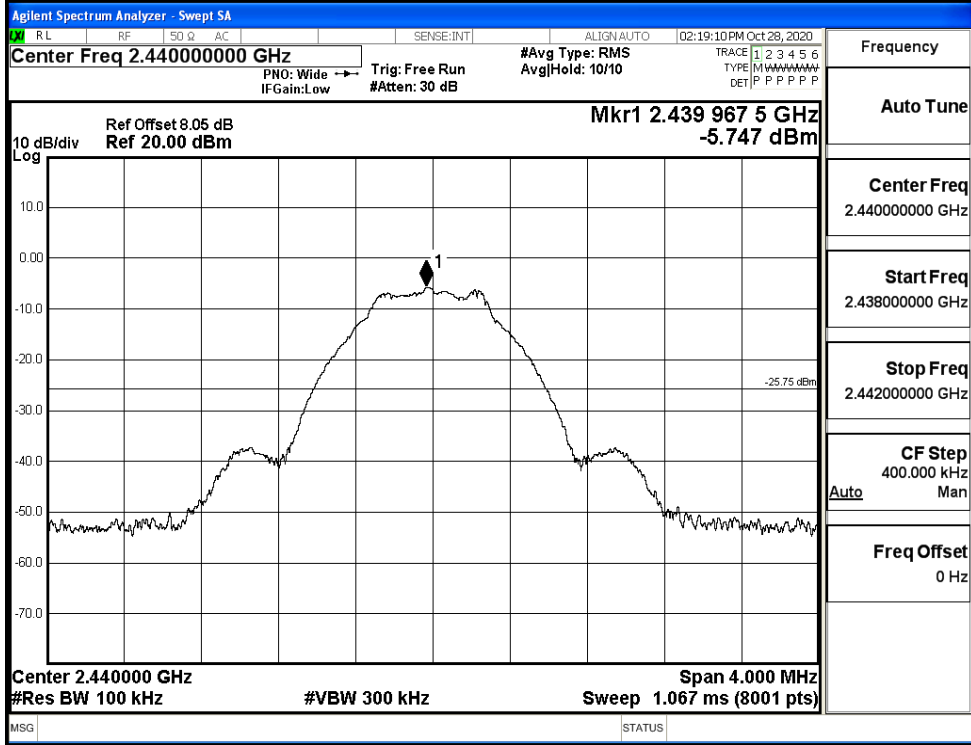


Puw/BT LE/MCH

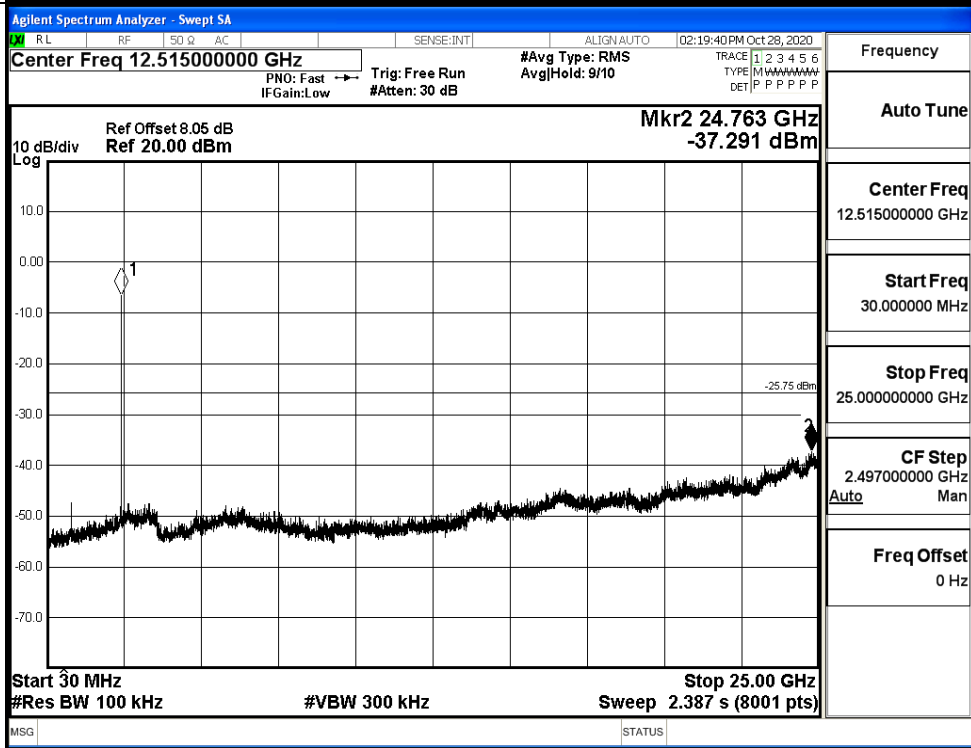


BT LE_HCH_Graphs

Pref/BT LE/HCH

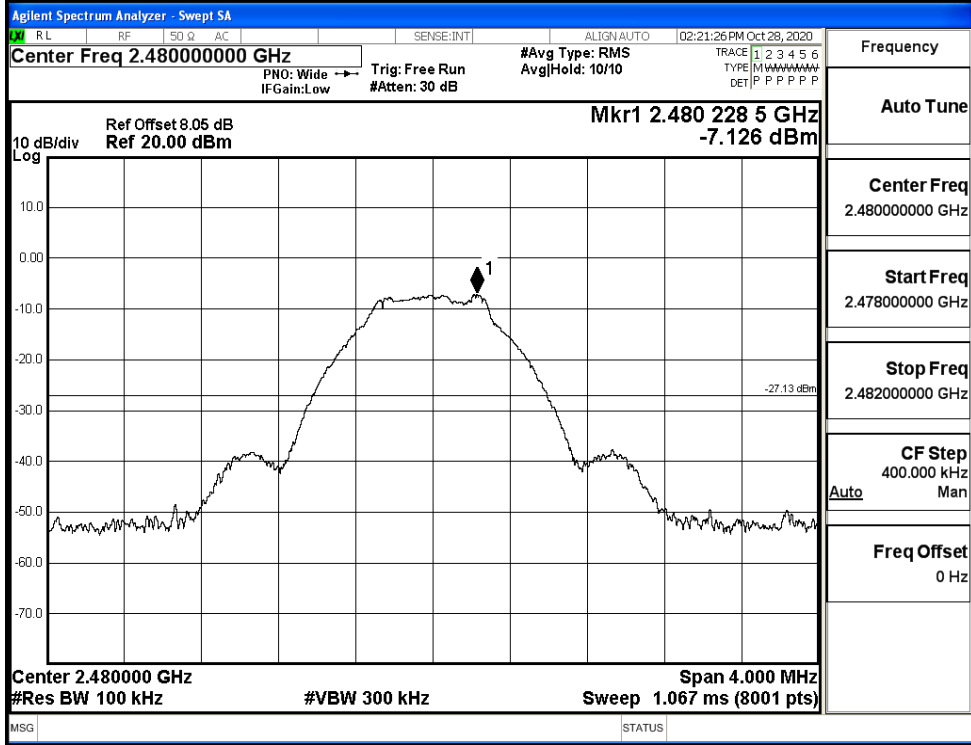

Puw/BT LE/HCH

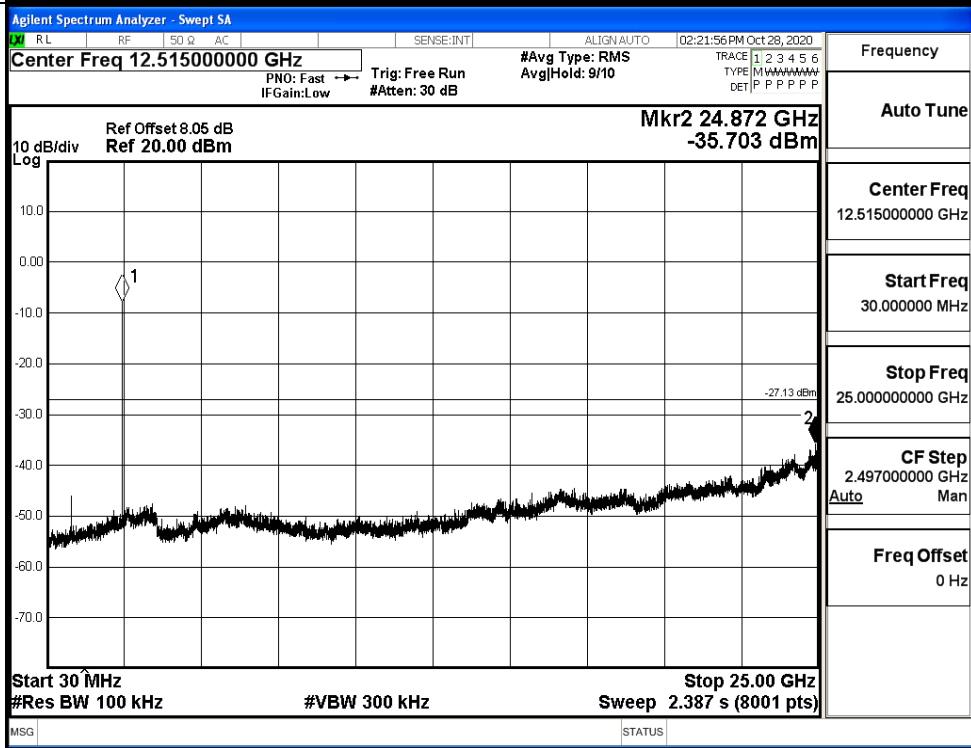

A.6 Band-edge for RF Conducted Emissions

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
BT LE	LCH	-5.383	-49.423	-25.38	PASS
BT LE	HCH	-6.225	-48.725	-26.23	PASS

Test Graphs

LCH

Agilent Spectrum Analyzer - Swept SA
 Center Freq 2.35700000 GHz
 Ref Offset 8.05 dB, Ref 20.00 dBm
 Mkr4 2.359 362 GHz -49.423 dBm
 Start 2.31000 GHz, Stop 2.40400 GHz
 #Res BW 100 kHz, #VBW 300 kHz, Sweep 9.067 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.402 003 GHz	-5.383 dBm			
2	N	f		2.400 000 GHz	-52.962 dBm			
3	N	f		2.390 000 GHz	-53.097 dBm			
4	N	f		2.359 362 GHz	-49.423 dBm			

Frequency

Auto Tune

Center Freq
2.35700000 GHz

Start Freq
2.31000000 GHz

Stop Freq
2.40400000 GHz

CF Step
9.400000 MHz

Freq Offset
0 Hz

HCH

Agilent Spectrum Analyzer - Swept SA
 Center Freq 2.48900000 GHz
 Ref Offset 8.05 dB, Ref 20.00 dBm
 Mkr4 2.487 391 25 GHz -48.725 dBm
 Start 2.47800 GHz, Stop 2.50000 GHz
 #Res BW 100 kHz, #VBW 300 kHz, Sweep 2.133 ms (8001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	f		2.479 980 00 GHz	-6.225 dBm			
2	N	f		2.483 500 00 GHz	-52.819 dBm			
3	N	f		2.500 000 00 GHz	-52.493 dBm			
4	N	f		2.487 391 25 GHz	-48.725 dBm			

Frequency

Auto Tune

Center Freq
2.48900000 GHz

Start Freq
2.47800000 GHz

Stop Freq
2.50000000 GHz


CF Step
2.200000 MHz

Freq Offset
0 Hz


A.7 Restrict-band band-edge measurements

Test Mode	Test Channel	Ant	Freq.	Power [dBm]	Gain	Ground Factor	E [dBuV/m]	Detector	Limit [dBuV/m]	Verdi
BT LE	2402	Ant1	2310.0	-43.16	2.0	0	54.07	PEAK	74	PASS
		Ant1	2310.0	-53.18	2.0	0	44.05	AV	54	PASS
		Ant1	2390.0	-43.44	2.0	0	53.79	PEAK	74	PASS
		Ant1	2390.0	-53.00	2.0	0	44.23	AV	54	PASS
	2480	Ant1	2483.5	-42.98	2.0	0	54.25	PEAK	74	PASS
		Ant1	2483.5	-52.37	2.0	0	44.86	AV	54	PASS
		Ant1	2500.0	-42.03	2.0	0	55.20	PEAK	74	PASS
		Ant1	2500.0	-52.32	2.0	0	44.91	AV	54	PASS


Restrict-band band-edge measurements_BT LE_2402_Ant1_PEAK

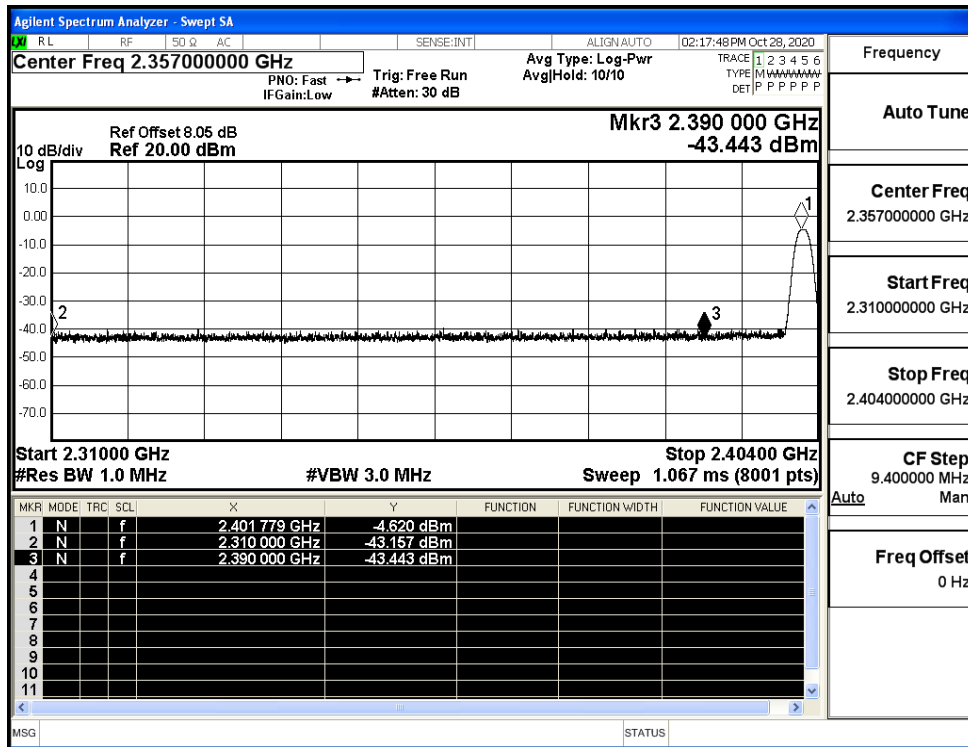

Restrict-band band-edge measurements_BT LE_2402_Ant1_AV

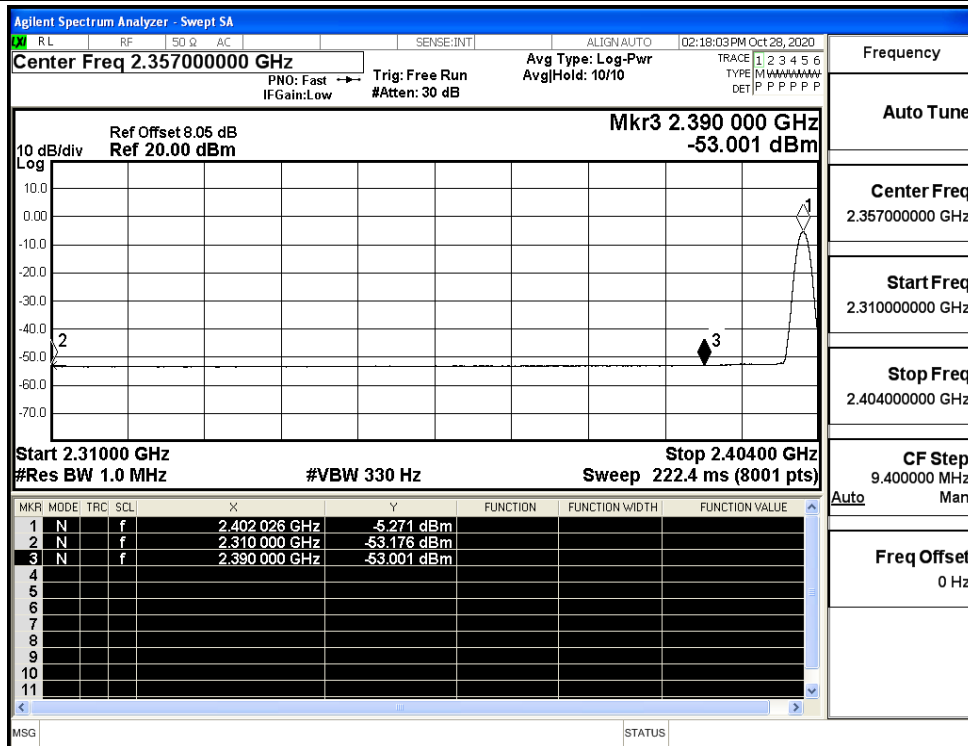

Restrict-band band-edge measurements_BT LE_2480_Ant1_PEAK

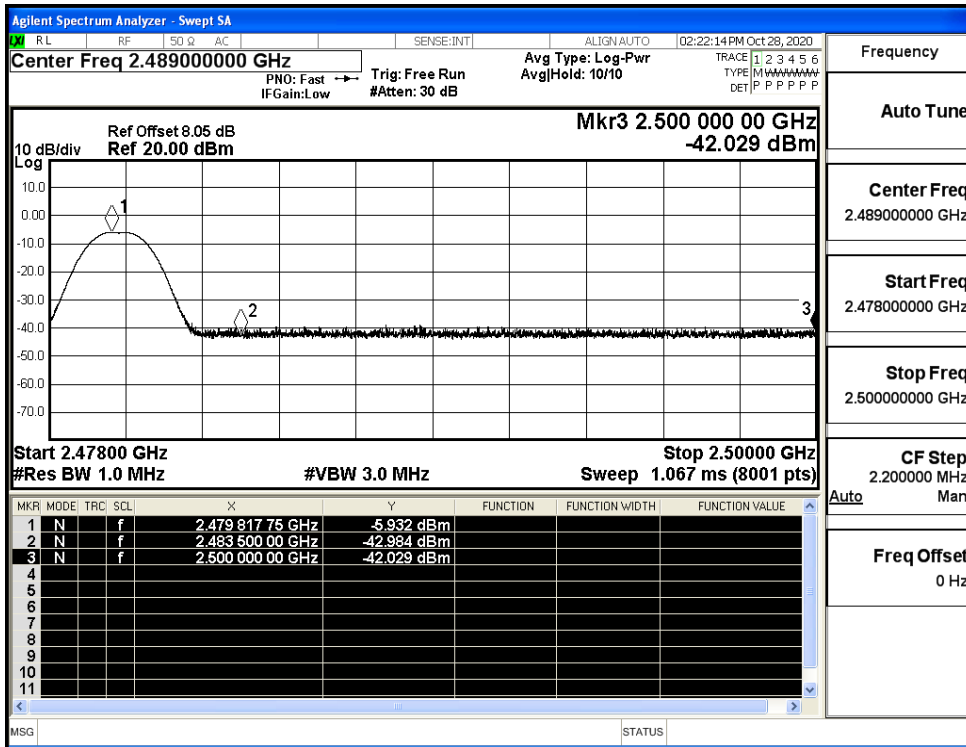

Restrict-band band-edge measurements_BT LE_2480_Ant1_AV

