

TEST REPORT

Product Name: Planet
FCC ID: 2AXYI-KWY001
Trademark: N/A
Model Number: KWY-001
Prepared For: Convergence Technology Co. Ltd.
Address: Huigu 2501, Guandong Street, Hongshan District, Wuhan City, Hubei Province, China
Manufacturer: Convergence Technology Co. Ltd.
Address: Huigu 2501, Guandong Street, Hongshan District, Wuhan City, Hubei Province, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Sep. 09, 2021
Sample tested Date: Sep. 09, 2021 to Oct. 13, 2021
Issue Date: Oct. 16, 2021
Report No.: CTB210913018RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

He Xiaona

He Xiaona

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	61
8.1 Block Diagram Of Test Setup	61
8.2 Limit	61
8.3 Test procedure	61
8.4 Test Result	62
9. CONDUCTED OUTPUT POWER	78
9.1 Block Diagram Of Test Setup	78
9.2 Limit	78
9.3 Test procedure	78
9.4 Test Result	79
10. 6DB OCCUPIED BANDWIDTH	88
10.1 Block Diagram Of Test Setup	88
10.2 Limit	88
10.3 Test procedure	88
10.4 Test Result	89
11. POWER SPECTRAL DENSITY	98
11.1 Block Diagram Of Test Setup	98
11.2 Limit	98
11.3 Test procedure	98

11.4	Test Result	99
12.	ANTENNA REQUIREMENT	108
13.	EUT PHOTOGRAPHS	109
14.	EUT TEST SETUP PHOTOGRAPHS	110

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210913018RFX	Oct. 16, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	KWY-001
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 9.858dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	Antenna 1 : 1dBi Antenna 2 : 1dBi
Ratings:	DC 5V charging from adapter DC 3.7V for battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZEHN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.7
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2022.08.05
4	Communication test set	R&S	CMW500	108058	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.10.30
6	Signal Generator	Agilent	N5181A	MY49060920	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2024.08.11
17	Receiver	R&S	ESPI	100362	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2022.08.05
20	TRILOG Broadband	Schwarzbeck	VULB 9163	869	2022.08.07


	Antenna				
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.10.30
25	Horn antenna	A/H/System	SAS-574	588	2021.10.30
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2022.08.16
7	Communication test set	R&S	CMW500	108058	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2022.08.16
11	Communication test set	R&S	CMW500	108058	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

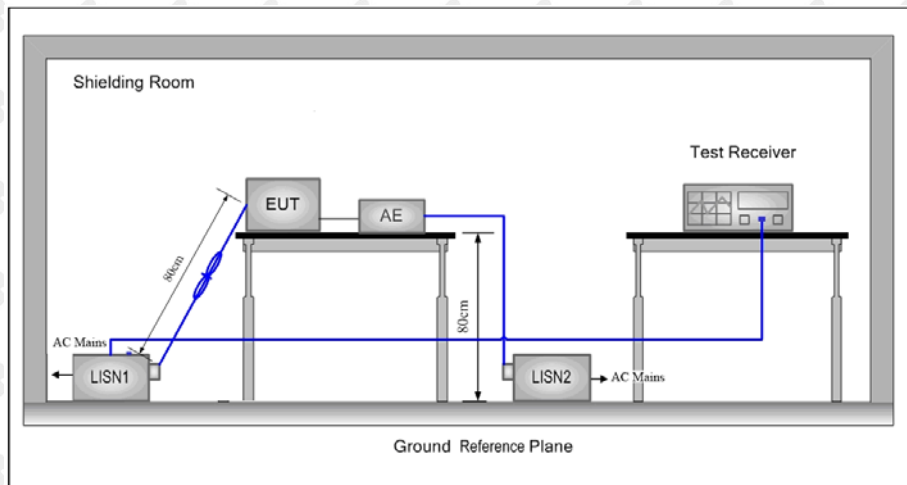

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was


between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
AC 120V 60Hz

80.0 dBuV

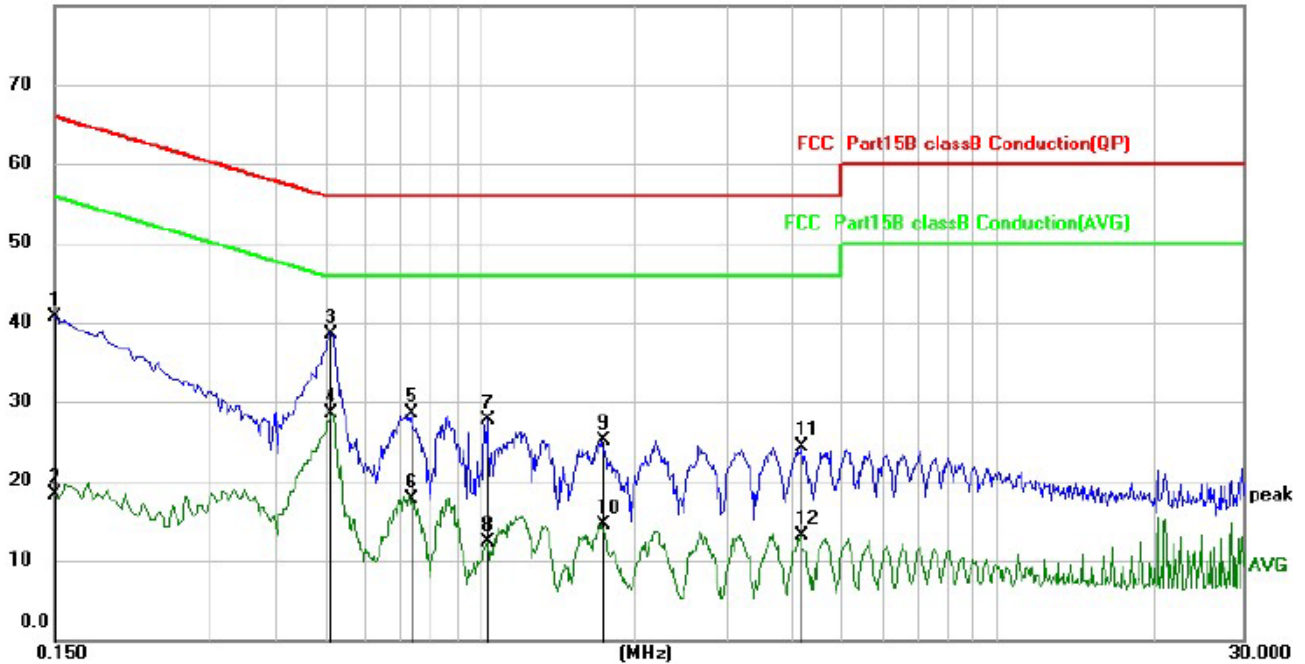


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1500	30.84	9.96	40.80	66.00	-25.20	QP
2		0.1500	8.38	9.96	18.34	56.00	-37.66	AVG
3	*	0.5140	28.61	9.96	38.57	56.00	-17.43	QP
4		0.5140	18.49	9.96	28.45	46.00	-17.55	AVG
5		0.7380	18.47	9.96	28.43	56.00	-27.57	QP
6		0.7380	7.81	9.96	17.77	46.00	-28.23	AVG
7		1.0339	17.72	9.96	27.68	56.00	-28.32	QP
8		1.0339	2.31	9.96	12.27	46.00	-33.73	AVG
9		1.7340	15.04	10.00	25.04	56.00	-30.96	QP
10		1.7340	4.58	10.00	14.58	46.00	-31.42	AVG
11		4.1820	14.19	10.13	24.32	56.00	-31.68	QP
12		4.1820	2.95	10.13	13.08	46.00	-32.92	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

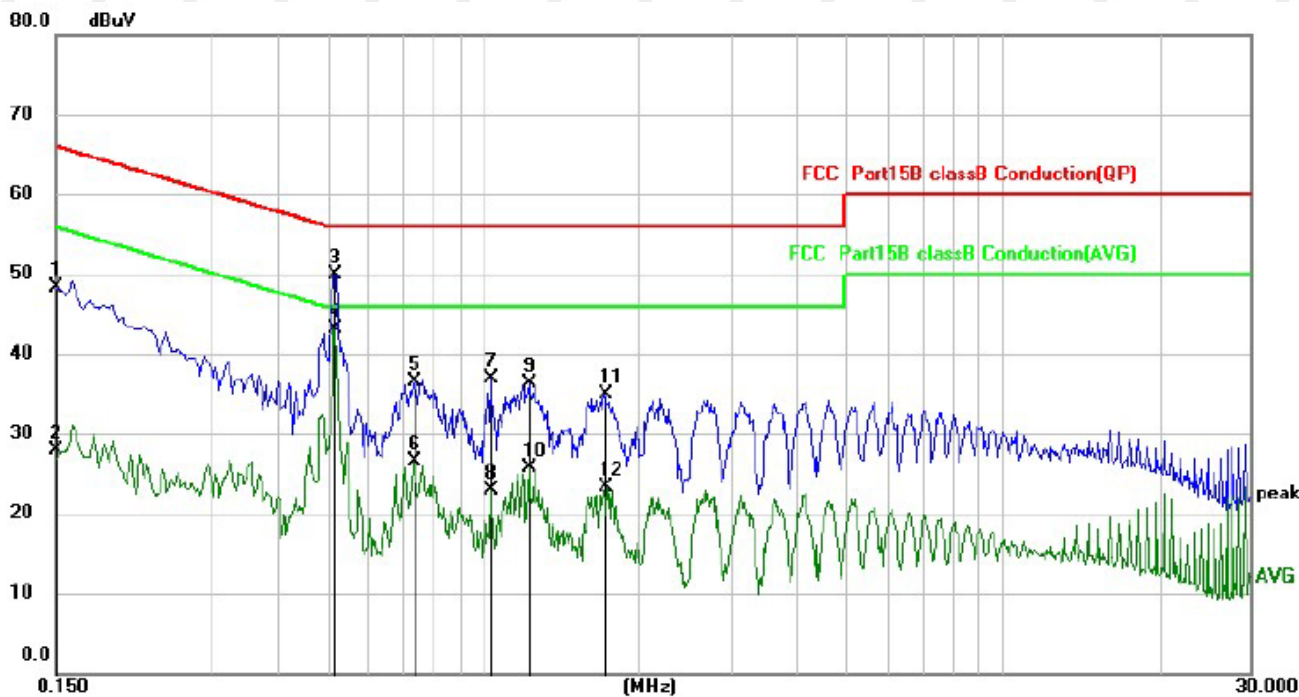

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1500	38.25	9.96	48.21	66.00	-17.79	QP
2		0.1500	18.02	9.96	27.98	56.00	-28.02	AVG
3		0.5180	40.01	9.96	49.97	56.00	-6.03	QP
4	*	0.5180	33.10	9.96	43.06	46.00	-2.94	AVG
5		0.7380	26.53	9.96	36.49	56.00	-19.51	QP
6		0.7380	16.47	9.96	26.43	46.00	-19.57	AVG
7		1.0339	26.99	9.96	36.95	56.00	-19.05	QP
8		1.0339	12.94	9.96	22.90	46.00	-23.10	AVG
9		1.2260	26.36	9.97	36.33	56.00	-19.67	QP
10		1.2260	15.76	9.97	25.73	46.00	-20.27	AVG
11		1.7100	24.87	10.00	34.87	56.00	-21.13	QP
12		1.7100	13.36	10.00	23.36	46.00	-22.64	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

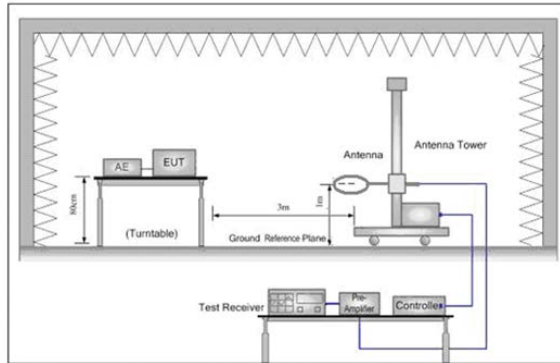


Figure 1. Below 30MHz

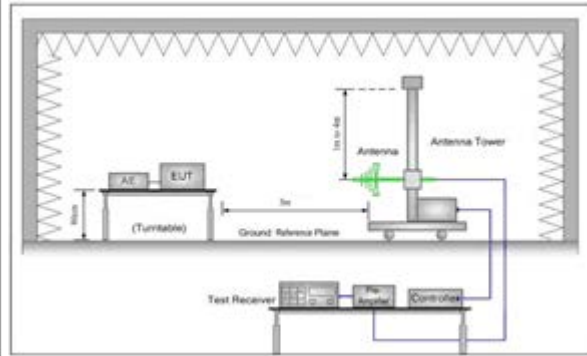


Figure 2. 30MHz to 1GHz

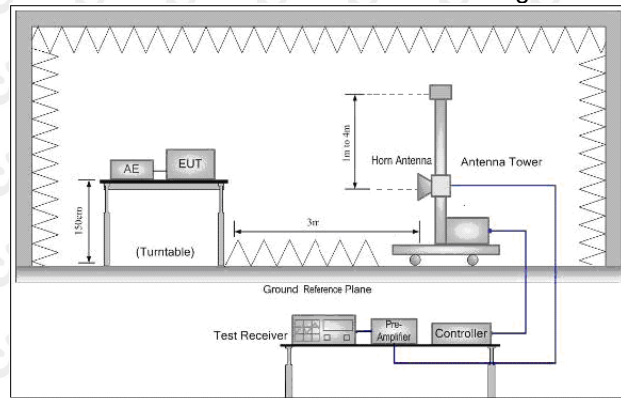


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

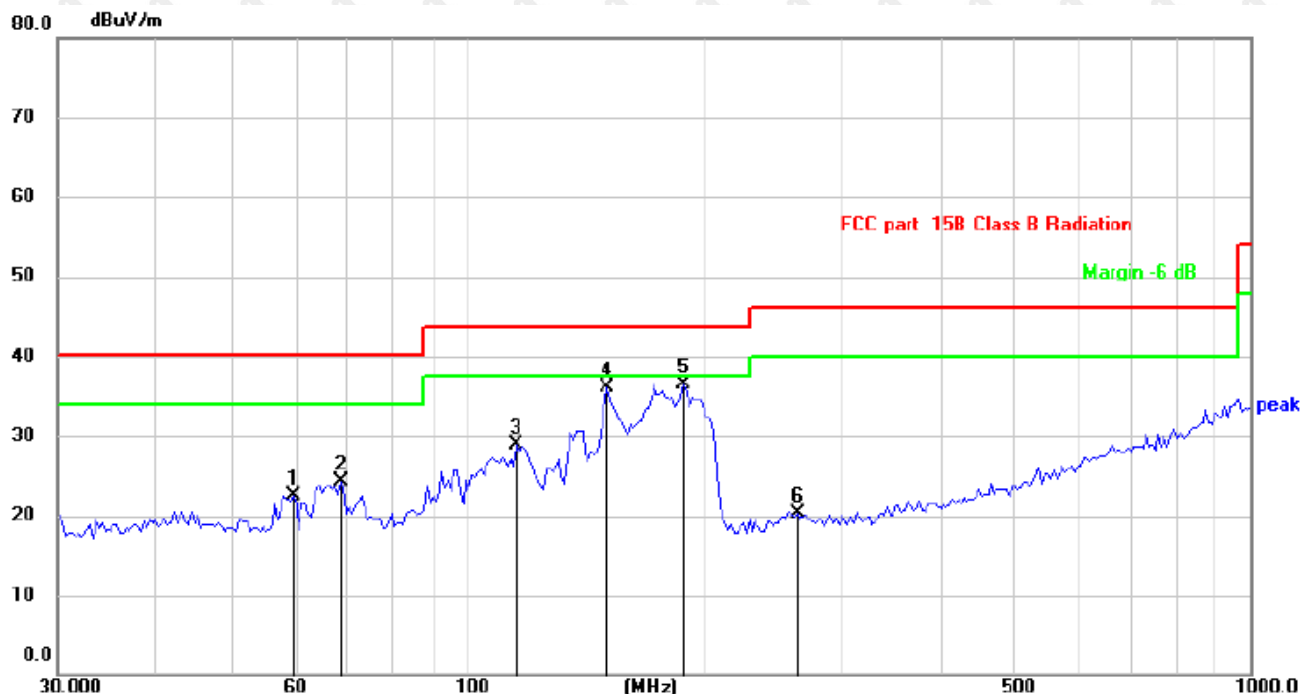

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBuV	dB	dBuV/m	dB/m	dB
1		59.9637	30.53	-7.97	22.56	40.00	-17.44
2		68.9929	33.72	-9.51	24.21	40.00	-15.79
3		115.7256	37.84	-8.93	28.91	43.50	-14.59
4		150.5377	43.03	-6.97	36.06	43.50	-7.44
5	*	189.0742	46.09	-9.56	36.53	43.50	-6.97
6		263.8190	27.98	-7.72	20.26	46.00	-25.74

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level

Antenna polarity: V

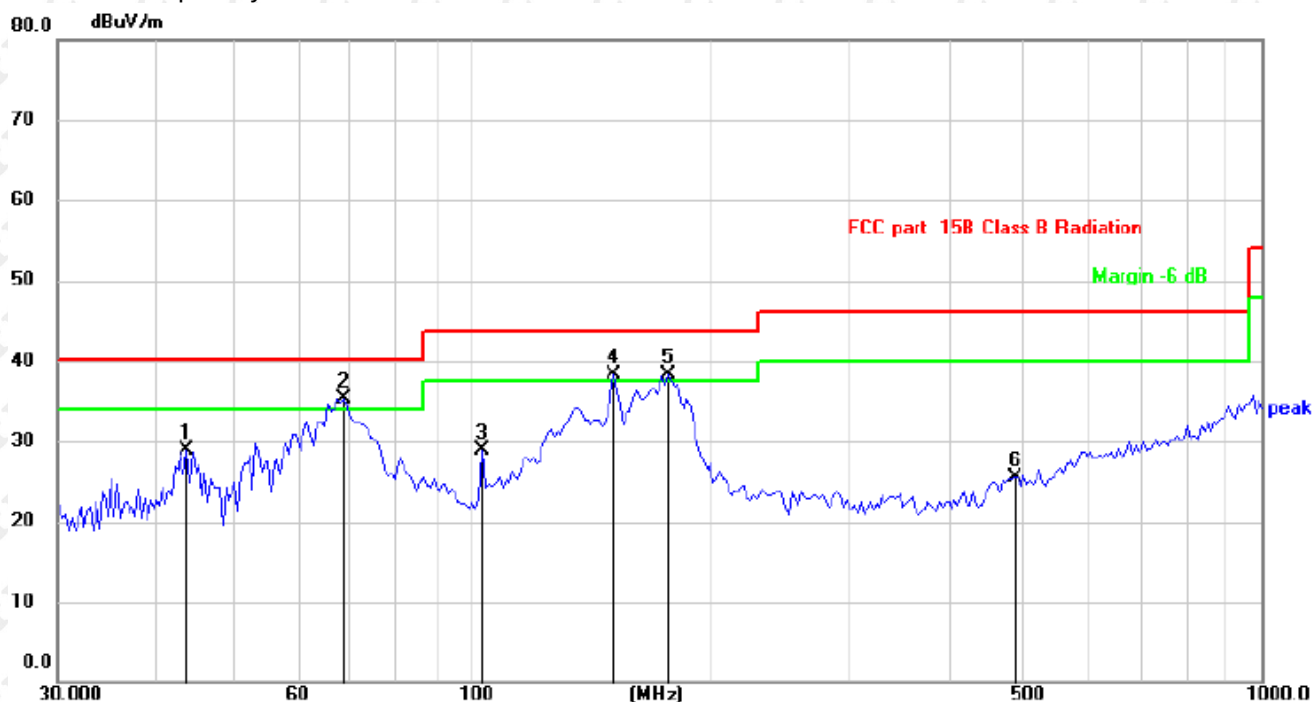

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		43.7351	35.78	-6.89	28.89	40.00	-11.11	QP
2	*	68.9929	44.78	-9.51	35.27	40.00	-4.73	QP
3		103.2609	38.96	-10.06	28.90	43.50	-14.60	QP
4	!	151.8632	45.15	-6.92	38.23	43.50	-5.27	QP
5	!	177.8206	46.65	-8.39	38.26	43.50	-5.24	QP
6		487.3149	28.09	-2.61	25.48	46.00	-20.52	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Above 1 GHz Test Results:

ANT 1

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.91	-3.64	61.27	74	-12.73	peak
4824	48.75	-3.64	45.11	54	-8.89	AVG
7236	57.11	-0.95	56.16	74	-17.84	peak
7236	43.93	-0.95	42.98	54	-11.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.53	-3.64	60.89	74	-13.11	peak
4824	48.45	-3.64	44.81	54	-9.19	AVG
7236	57.31	-0.95	56.36	74	-17.64	peak
7236	44.24	-0.95	43.29	54	-10.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.18	-3.51	60.67	74	-13.33	peak
4874	48.81	-3.51	45.30	54	-8.70	AVG
7311	57.92	-0.82	57.10	74	-16.90	peak
7311	45.88	-0.82	45.06	54	-8.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.38	-3.51	59.87	74	-14.13	peak
4874	46.87	-3.51	43.36	54	-10.64	AVG
7311	58.31	-0.82	57.49	74	-16.51	peak
7311	42.44	-0.82	41.62	54	-12.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.79	-3.43	59.36	74	-14.64	peak
4924	46.01	-3.43	42.58	54	-11.42	AVG
7386	57.32	-0.75	56.57	74	-17.43	peak
7386	44.62	-0.75	43.87	54	-10.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.70	-3.43	60.27	74	-13.73	peak
4924	47.96	-3.43	44.53	54	-9.47	AVG
7386	56.32	-0.75	55.57	74	-18.43	peak
7386	44.02	-0.75	43.27	54	-10.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.44	-3.64	59.80	74	-14.20	peak
4824	47.60	-3.64	43.96	54	-10.04	AVG
7236	57.52	-0.95	56.57	74	-17.43	peak
7236	44.66	-0.95	43.71	54	-10.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.86	-3.64	61.22	74	-12.78	peak
4824	47.38	-3.64	43.74	54	-10.26	AVG
7236	60.65	-0.95	59.70	74	-14.30	peak
7236	43.01	-0.95	42.06	54	-11.94	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.57	-3.51	60.06	74	-13.94	peak
4874	48.00	-3.51	44.49	54	-9.51	AVG
7311	59.33	-0.82	58.51	74	-15.49	peak
7311	44.77	-0.82	43.95	54	-10.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.41	-3.51	60.90	74	-13.10	peak
4874	47.73	-3.51	44.22	54	-9.78	AVG
7311	57.80	-0.82	56.98	74	-17.02	peak
7311	42.22	-0.82	41.40	54	-12.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.93	-3.43	60.50	74	-13.50	peak
4924	49.89	-3.43	46.46	54	-7.54	AVG
7386	57.95	-0.75	57.20	74	-16.80	peak
7386	43.96	-0.75	43.21	54	-10.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.83	-3.43	58.40	74	-15.60	peak
4924	47.35	-3.43	43.92	54	-10.08	AVG
7386	57.28	-0.75	56.53	74	-17.47	peak
7386	42.86	-0.75	42.11	54	-11.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.42	-3.64	60.78	74	-13.22	peak
4824	48.04	-3.64	44.40	54	-9.60	AVG
7236	57.50	-0.95	56.55	74	-17.45	peak
7236	44.50	-0.95	43.55	54	-10.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.81	-3.64	63.17	74	-10.83	peak
4824	50.26	-3.64	46.62	54	-7.38	AVG
7236	59.99	-0.95	59.04	74	-14.96	peak
7236	45.40	-0.95	44.45	54	-9.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.25	-3.51	59.74	74.00	-14.26	peak
4874.00	49.88	-3.51	46.37	54.00	-7.63	AVG
7311.00	58.75	-0.82	57.93	74.00	-16.07	peak
7311.00	46.28	-0.82	45.46	54.00	-8.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.49	-3.51	58.98	74.00	-15.02	peak
4874.00	46.72	-3.51	43.21	54.00	-10.79	AVG
7311.00	56.51	-0.82	55.69	74.00	-18.31	peak
7311.00	43.27	-0.82	42.45	54.00	-11.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.07	-3.43	59.64	74	-14.36	peak
4924	48.00	-3.43	44.57	54	-9.43	AVG
7386	57.52	-0.75	56.77	74	-17.23	peak
7386	41.03	-0.75	40.28	54	-13.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.70	-3.43	62.27	74	-11.73	peak
4924	47.08	-3.43	43.65	54	-10.35	AVG
7386	57.41	-0.75	56.66	74	-17.34	peak
7386	43.25	-0.75	42.50	54	-11.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.88	-3.63	61.25	74	-12.75	peak
4844	49.39	-3.63	45.76	54	-8.24	AVG
7266	59.60	-0.94	58.66	74	-15.34	peak
7266	45.23	-0.94	44.29	54	-9.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.40	-3.63	60.77	74	-13.23	peak
4844	49.01	-3.63	45.38	54	-8.62	AVG
7266	58.31	-0.94	57.37	74	-16.63	peak
7266	45.14	-0.94	44.20	54	-9.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.81	-3.51	59.30	74	-14.70	peak
4874	47.57	-3.51	44.06	54	-9.94	AVG
7311	58.41	-0.82	57.59	74	-16.41	peak
7311	45.26	-0.82	44.44	54	-9.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.93	-3.43	61.50	74	-12.50	peak
4904	49.13	-3.43	45.70	54	-8.30	AVG
7356	56.37	-0.75	55.62	74	-18.38	peak
7356	41.38	-0.75	40.63	54	-13.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.57	-3.43	61.14	74	-12.86	peak
4904	47.40	-3.43	43.97	54	-10.03	AVG
7356	56.32	-0.75	55.57	74	-18.43	peak
7356	43.30	-0.75	42.55	54	-11.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1 GHz Test Results:

ANT 2

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.08	-3.64	60.44	74	-13.56	peak
4824	48.47	-3.64	44.83	54	-9.17	AVG
7236	57.18	-0.95	56.23	74	-17.77	peak
7236	45.45	-0.95	44.50	54	-9.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.33	-3.64	62.69	74	-11.31	peak
4824	49.11	-3.64	45.47	54	-8.53	AVG
7236	58.01	-0.95	57.06	74	-16.94	peak
7236	43.16	-0.95	42.21	54	-11.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.50	-3.51	61.99	74	-12.01	peak
4874	49.28	-3.51	45.77	54	-8.23	AVG
7311	58.15	-0.82	57.33	74	-16.67	peak
7311	45.25	-0.82	44.43	54	-9.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.12	-3.51	59.61	74	-14.39	peak
4874	49.42	-3.51	45.91	54	-8.09	AVG
7311	58.65	-0.82	57.83	74	-16.17	peak
7311	44.08	-0.82	43.26	54	-10.74	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.84	-3.43	60.41	74	-13.59	peak
4924	48.72	-3.43	45.29	54	-8.71	AVG
7386	59.47	-0.75	58.72	74	-15.28	peak
7386	45.16	-0.75	44.41	54	-9.59	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.40	-3.43	60.97	74	-13.03	peak
4924	47.99	-3.43	44.56	54	-9.44	AVG
7386	59.24	-0.75	58.49	74	-15.51	peak
7386	42.44	-0.75	41.69	54	-12.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.94	-3.64	60.30	74	-13.70	peak
4824	48.32	-3.64	44.68	54	-9.32	AVG
7236	57.59	-0.95	56.64	74	-17.36	peak
7236	44.76	-0.95	43.81	54	-10.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.21	-3.64	58.57	74	-15.43	peak
4824	49.16	-3.64	45.52	54	-8.48	AVG
7236	60.64	-0.95	59.69	74	-14.31	peak
7236	43.48	-0.95	42.53	54	-11.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.59	-3.51	61.08	74	-12.92	peak
4874	47.00	-3.51	43.49	54	-10.51	AVG
7311	59.42	-0.82	58.60	74	-15.40	peak
7311	45.31	-0.82	44.49	54	-9.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.52	-3.51	61.01	74	-12.99	peak
4874	48.23	-3.51	44.72	54	-9.28	AVG
7311	57.98	-0.82	57.16	74	-16.84	peak
7311	42.86	-0.82	42.04	54	-11.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.43	-3.43	61.00	74	-13.00	peak
4924	48.70	-3.43	45.27	54	-8.73	AVG
7386	58.16	-0.75	57.41	74	-16.59	peak
7386	41.93	-0.75	41.18	54	-12.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.98	-3.43	59.55	74	-14.45	peak
4924	46.69	-3.43	43.26	54	-10.74	AVG
7386	56.48	-0.75	55.73	74	-18.27	peak
7386	42.14	-0.75	41.39	54	-12.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.93	-3.64	59.29	74	-14.71	peak
4824	46.48	-3.64	42.84	54	-11.16	AVG
7236	57.12	-0.95	56.17	74	-17.83	peak
7236	44.00	-0.95	43.05	54	-10.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.84	-3.64	63.20	74	-10.80	peak
4824	51.17	-3.64	47.53	54	-6.47	AVG
7236	57.08	-0.95	56.13	74	-17.87	peak
7236	42.66	-0.95	41.71	54	-12.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.63	-3.51	59.12	74.00	-14.88	peak
4874.00	46.83	-3.51	43.32	54.00	-10.68	AVG
7311.00	57.27	-0.82	56.45	74.00	-17.55	peak
7311.00	44.93	-0.82	44.11	54.00	-9.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.53	-3.51	60.02	74.00	-13.98	peak
4874.00	48.02	-3.51	44.51	54.00	-9.49	AVG
7311.00	57.87	-0.82	57.05	74.00	-16.95	peak
7311.00	42.23	-0.82	41.41	54.00	-12.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.90	-3.43	60.47	74	-13.53	peak
4924	45.78	-3.43	42.35	54	-11.65	AVG
7386	56.46	-0.75	55.71	74	-18.29	peak
7386	41.50	-0.75	40.75	54	-13.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.22	-3.43	59.79	74	-14.21	peak
4924	46.65	-3.43	43.22	54	-10.78	AVG
7386	58.58	-0.75	57.83	74	-16.17	peak
7386	43.96	-0.75	43.21	54	-10.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.73	-3.63	60.10	74	-13.90	peak
4844	47.73	-3.63	44.10	54	-9.90	AVG
7266	58.43	-0.94	57.49	74	-16.51	peak
7266	45.32	-0.94	44.38	54	-9.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.93	-3.63	61.30	74	-12.70	peak
4844	48.93	-3.63	45.30	54	-8.70	AVG
7266	58.99	-0.94	58.05	74	-15.95	peak
7266	45.27	-0.94	44.33	54	-9.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.63	-3.51	60.12	74	-13.88	peak
4874	49.55	-3.51	46.04	54	-7.96	AVG
7311	60.50	-0.82	59.68	74	-14.32	peak
7311	43.87	-0.82	43.05	54	-10.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.71	-0.82	55.89	74	-18.11	peak
7311	43.38	-0.82	42.56	54	-11.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.46	-3.43	61.03	74	-12.97	peak
4904	47.80	-3.43	44.37	54	-9.63	AVG
7356	56.15	-0.75	55.40	74	-18.60	peak
7356	43.32	-0.75	42.57	54	-11.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.04	-3.43	58.61	74	-15.39	peak
4904	48.26	-3.43	44.83	54	-9.17	AVG
7356	58.01	-0.75	57.26	74	-16.74	peak
7356	44.05	-0.75	43.30	54	-10.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



Restricted bands around fundamental frequency (Radiated)

ANT1

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.53	-5.81	51.72	74	-22.28	
2390	/	-5.81	/	54	/	AVG
2399	64.49	-5.84	58.65	74	-15.35	peak
2399	48.35	-5.84	42.51	54	-11.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.76	-5.81	51.95	74	-22.05	
2390	/	-5.81	/	54	/	AVG
2399	63.43	-5.84	57.59	74	-16.41	peak
2399	45.86	-5.84	40.02	54	-13.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.05	-5.65	51.40	74	-22.60	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.01	-5.65	51.36	74	-22.64	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.96	-5.81	53.15	74	-20.85	
2390	/	-5.81	/	54	/	AVG
2399	63.42	-5.84	57.58	74	-16.42	peak
2399	47.19	-5.84	41.35	54	-12.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.36	-5.81	51.55	74	-22.45	
2390	/	-5.81	/	54	/	AVG
2399	61.45	-5.84	55.61	74	-18.39	peak
2399	46.76	-5.84	40.92	54	-13.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.63	-5.65	50.98	74	-23.02	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.66	-5.65	52.01	74	-21.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.77	-5.81	50.96	74	-23.04	
2390	/	-5.81	/	54	/	AVG
2399	62.76	-5.84	56.92	74	-17.08	peak
2399	48.79	-5.84	42.95	54	-11.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.65	-5.81	50.84	74	-23.16	
2390	/	-5.81	/	54	/	AVG
2399	61.27	-5.84	55.43	74	-18.57	peak
2399	47.36	-5.84	41.52	54	-12.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.59	-5.65	50.94	74	-23.06	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.56	-5.65	49.91	74	-24.09	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	59.09	-5.81	53.28	74	-20.72	
2390	/	-5.81	/	54	/	AVG
2399	62.93	-5.84	57.09	74	-16.91	peak
2399	45.72	-5.84	39.88	54	-14.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.51	-5.81	52.70	74	-21.30	
2390	/	-5.81	/	54	/	AVG
2399	61.02	-5.84	55.18	74	-18.82	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.77	-5.65	51.12	74	-22.88	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.04	-5.65	52.39	74	-21.61	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Restricted bands around fundamental frequency (Radiated)

ANT2

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.93	-5.81	52.12	74	-21.88	peak
2390	/	-5.81	/	54	/	AVG
2399	64.71	-5.84	58.87	74	-15.13	peak
2399	49.12	-5.84	43.28	54	-10.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.59	-5.81	50.78	74	-23.22	peak
2390	/	-5.81	/	54	/	AVG
2399	63.50	-5.84	57.66	74	-16.34	peak
2399	47.13	-5.84	41.29	54	-12.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.07	-5.65	50.42	74	-23.58	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.88	-5.65	51.23	74	-22.77	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.92	-5.81	52.11	74	-21.89	peak
2390	/	-5.81	/	54	/	AVG
2399	63.25	-5.84	57.41	74	-16.59	peak
2399	47.40	-5.84	41.56	54	-12.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.03	-5.81	50.22	74	-23.78	peak
2390	/	-5.81	/	54	/	AVG
2399	62.92	-5.84	57.08	74	-16.92	peak
2399	46.72	-5.84	40.88	54	-13.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.72	-5.65	51.07	74	-22.93	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.34	-5.65	51.69	74	-22.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.68	-5.81	51.87	74	-22.13	
2390	/	-5.81	/	54	/	AVG
2399	63.80	-5.84	57.96	74	-16.04	peak
2399	47.59	-5.84	41.75	54	-12.25	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.00	-5.81	51.19	74	-22.81	
2390	/	-5.81	/	54	/	AVG
2399	60.24	-5.84	54.40	74	-19.60	peak
2399	46.36	-5.84	40.52	54	-13.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.81	-5.65	50.16	74	-23.84	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.38	-5.65	49.73	74	-24.27	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.55	-5.81	52.74	74	-21.26	
2390	/	-5.81	/	54	/	AVG
2399	63.96	-5.84	58.12	74	-15.88	peak
2399	45.67	-5.84	39.83	54	-14.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.32	-5.81	51.51	74	-22.49	
2390	/	-5.81	/	54	/	AVG
2399	61.71	-5.84	55.87	74	-18.13	peak
2399	46.06	-5.84	40.22	54	-13.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.69	-5.65	52.04	74	-21.96	
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	55.39	-5.65	49.74	74	-24.26	
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

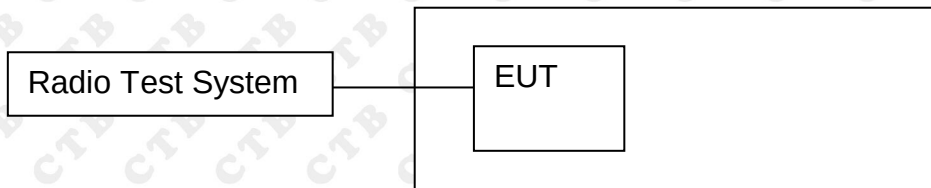

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

ANT1




BAND EDGE Graphs

802.11g/LCH

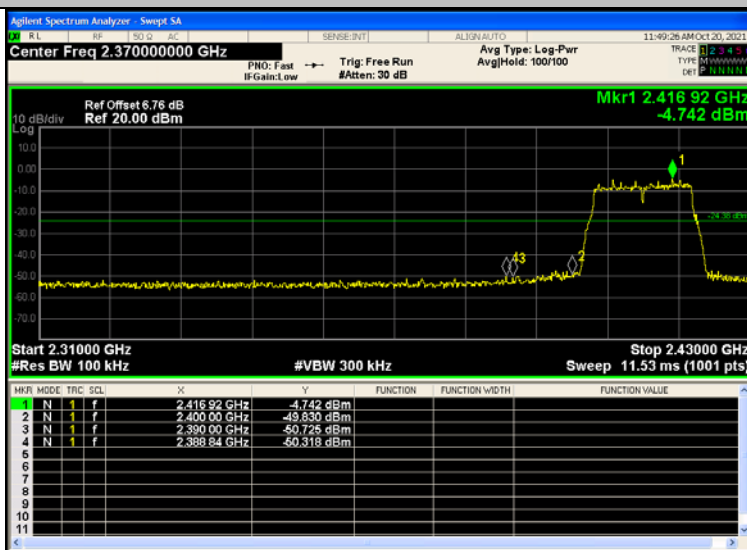


802.11g/HCH

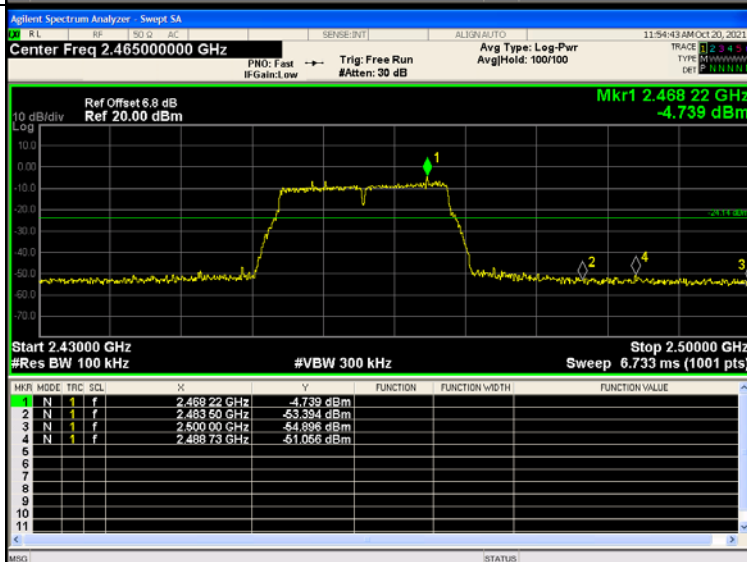


BAND EDGE Graphs

802.11n(HT20)/L
CH

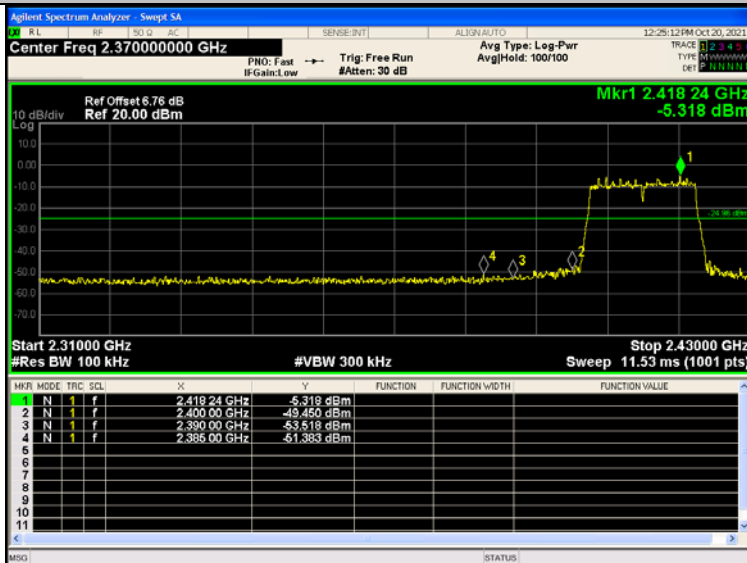


802.11n(HT20)/H
CH

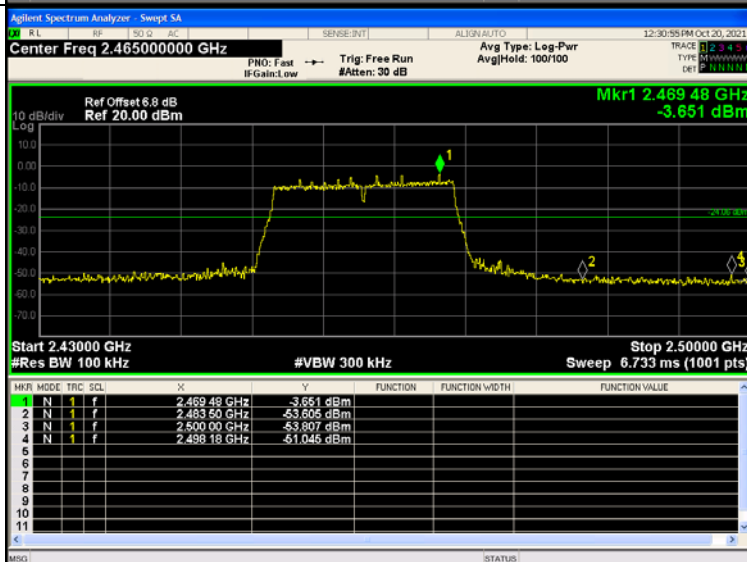


BAND EDGE Graphs




802.11n(HT40)/L
CH

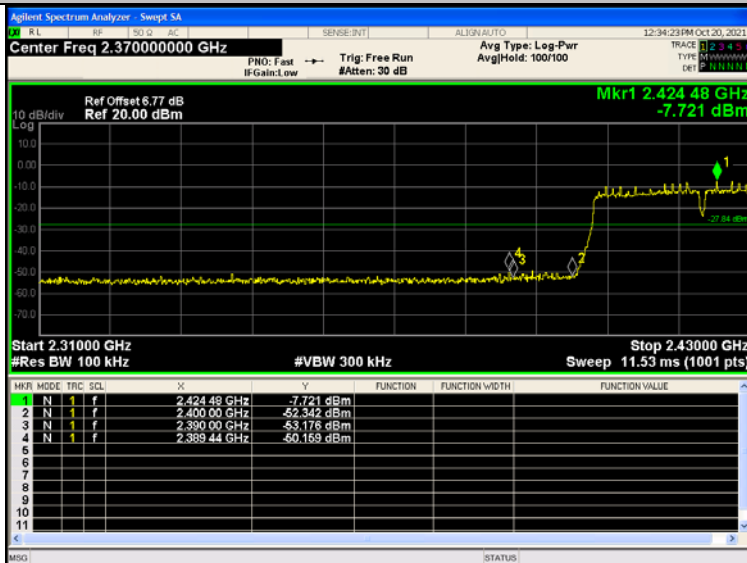




802.11n(HT40)/H
CH

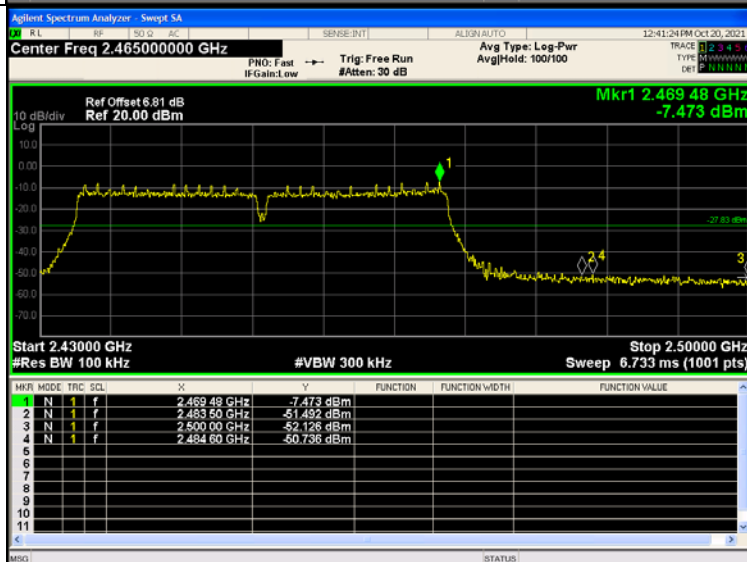




RF Conducted Spurious Emissions Graphs

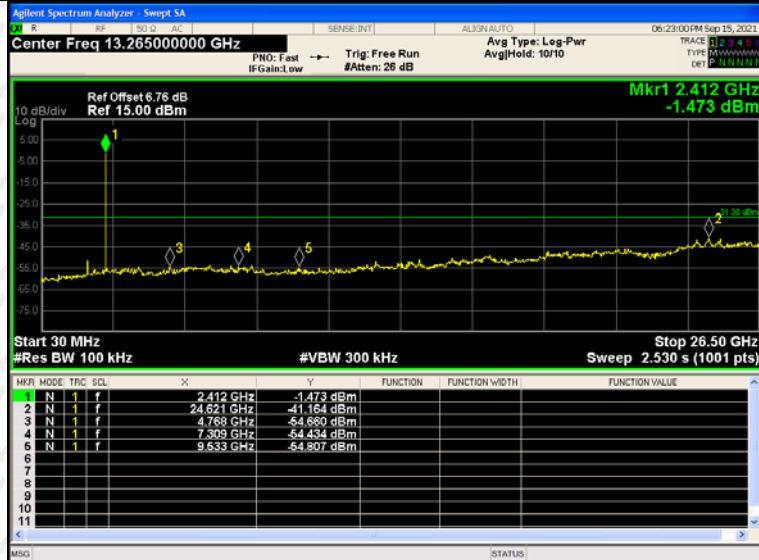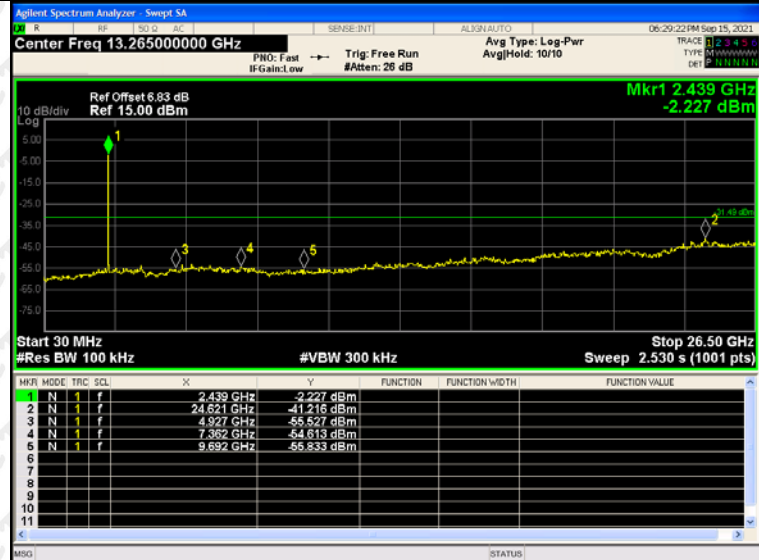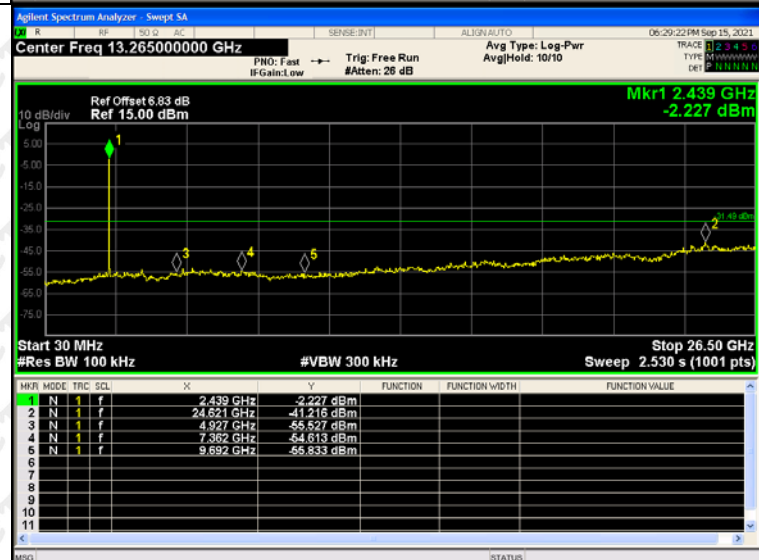802.11b
/LCH

802.11b
/MCH

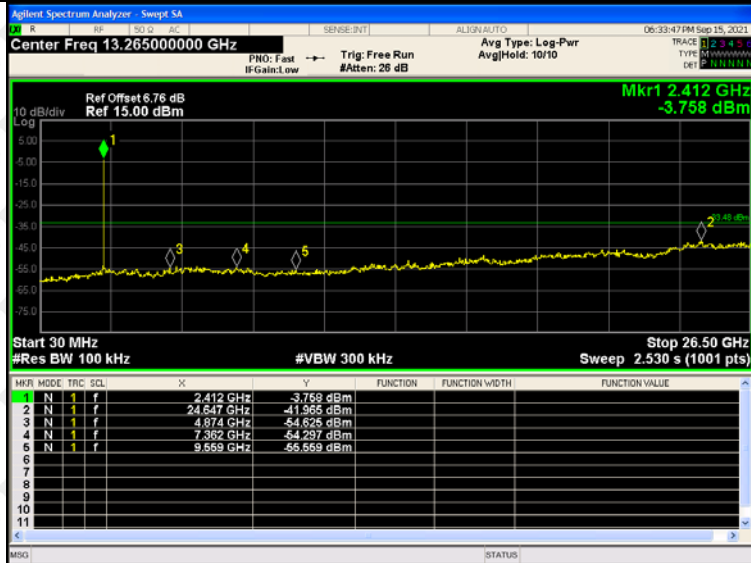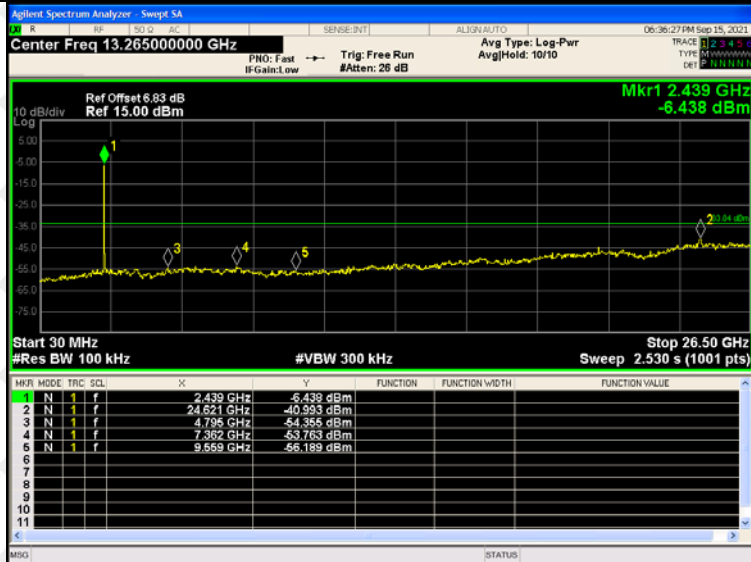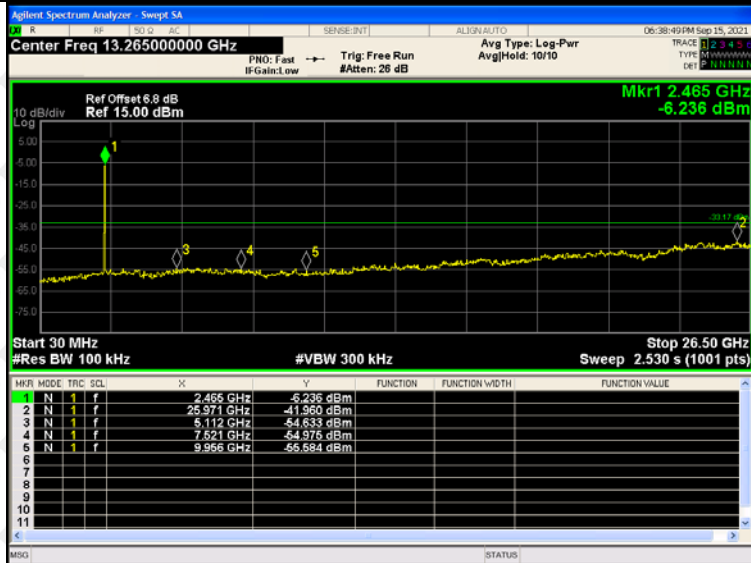802.11b
/HCH


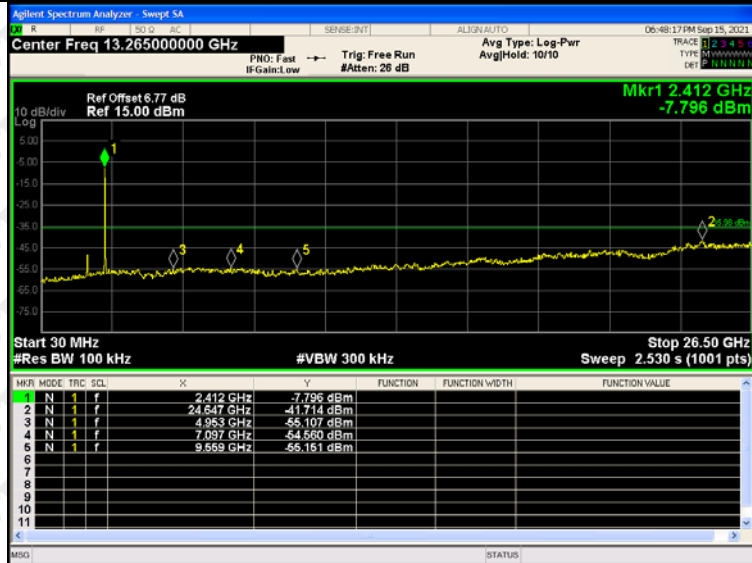
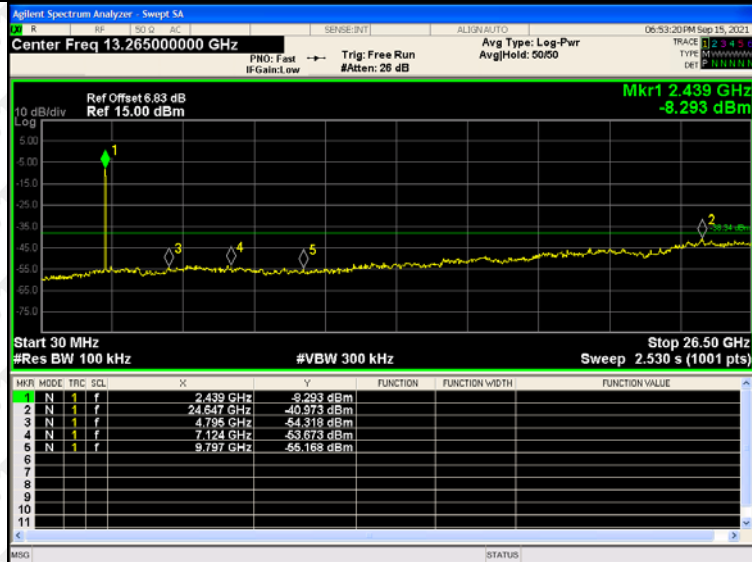
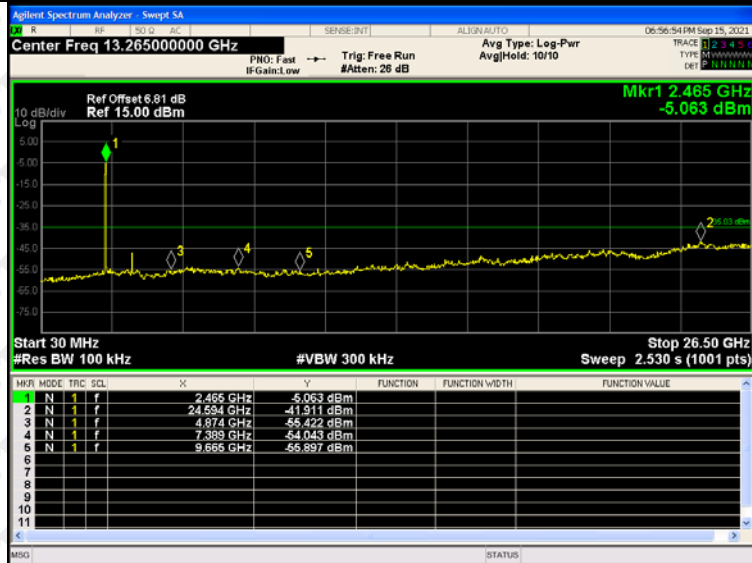
RF Conducted Spurious Emissions Graphs

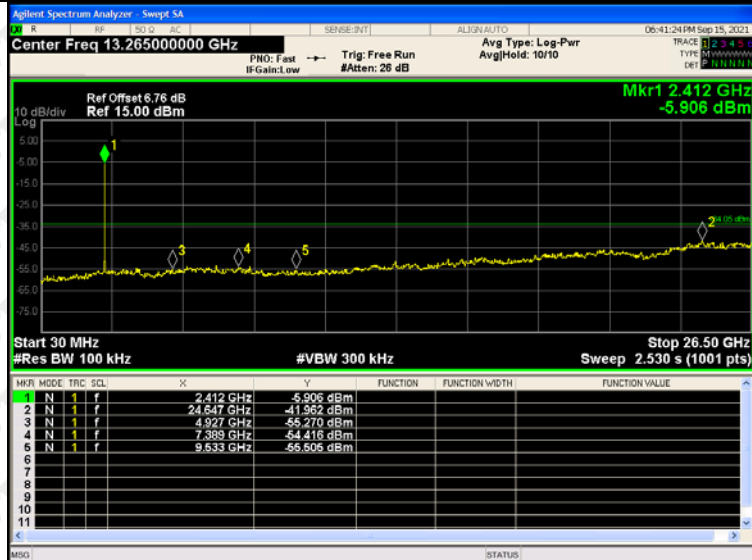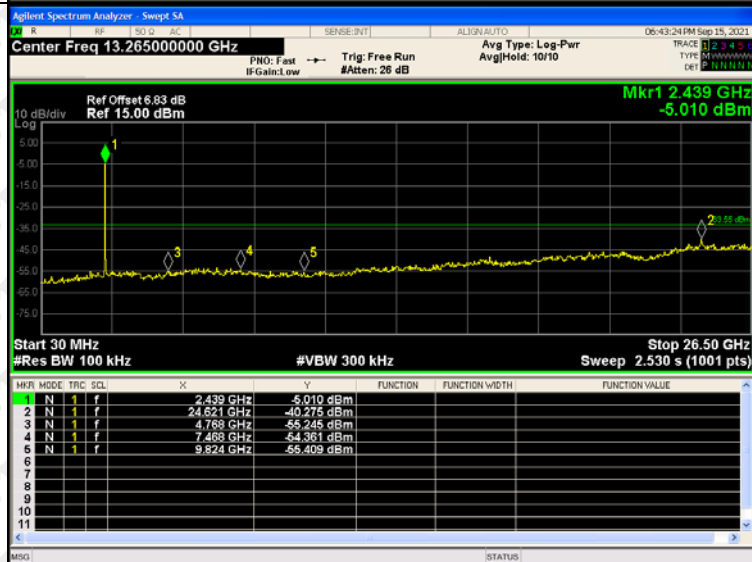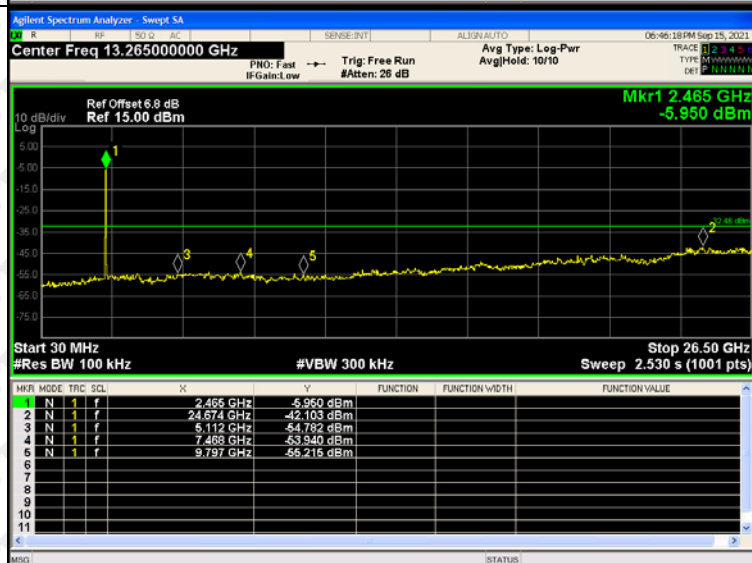802.11g
/LCH

802.11g
/MCH

802.11g
/HCH


RF Conducted Spurious Emissions Graphs

802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


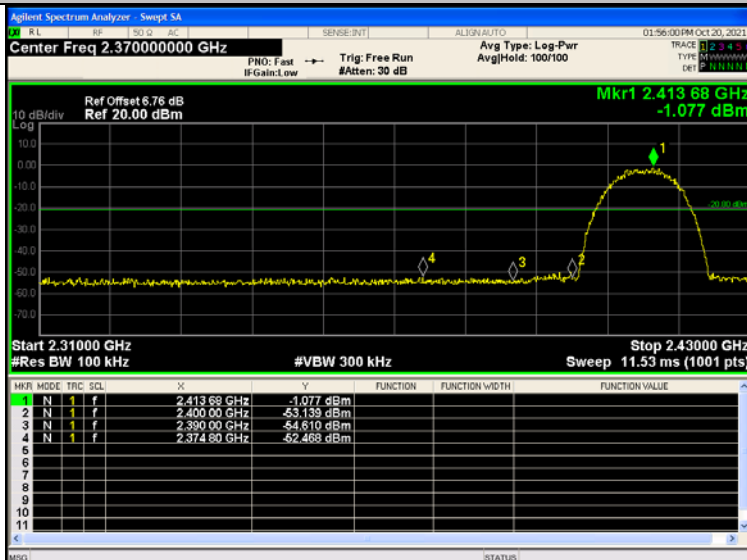
RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH


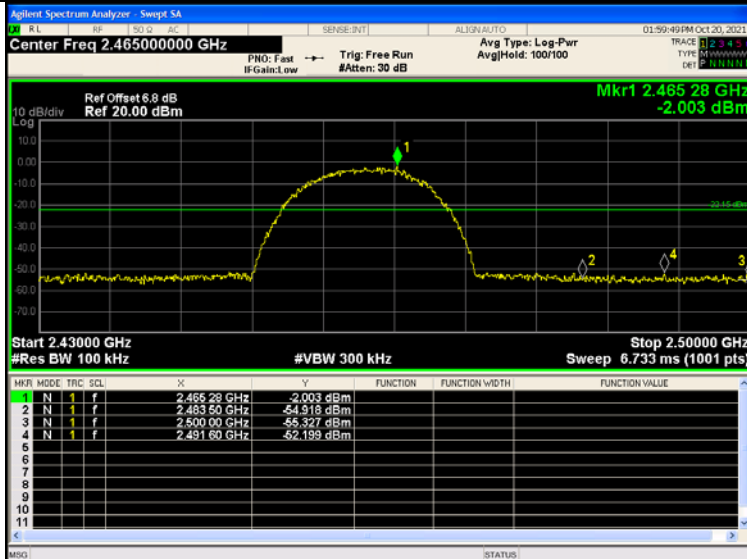
ANT2

BAND EDGE Graphs

802.11b/LCH




802.11b/HCH




BAND EDGE Graphs

802.11g/LCH

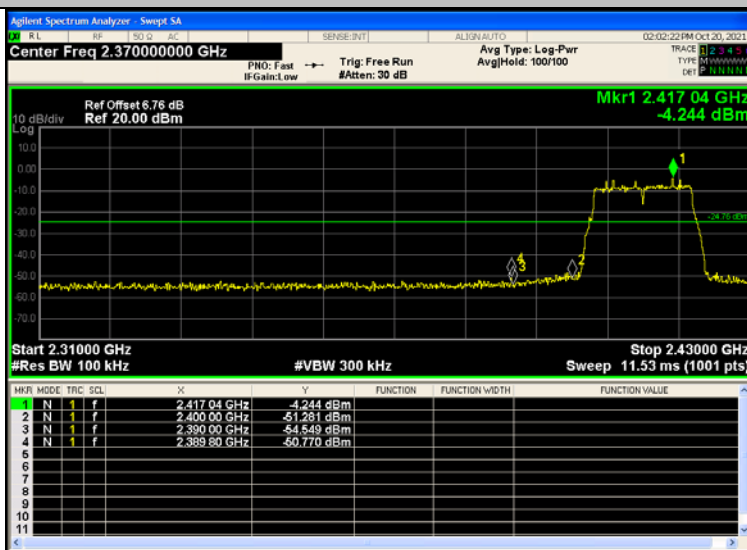


802.11g/HCH

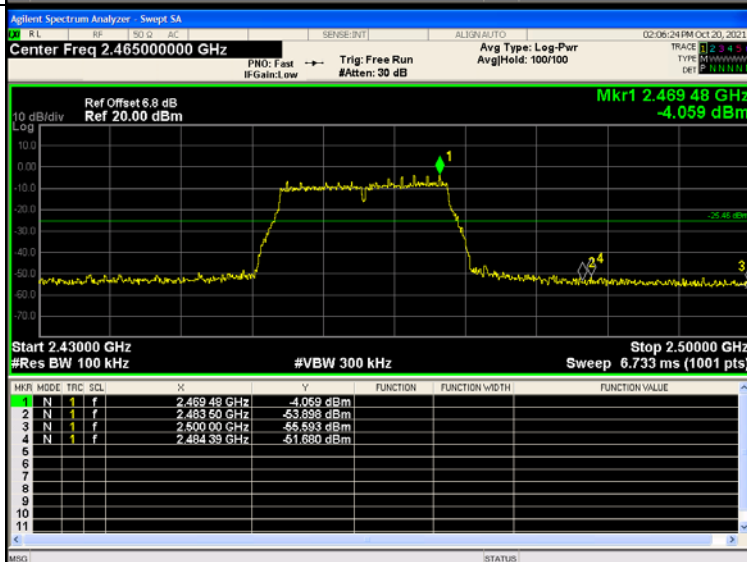


BAND EDGE Graphs

802.11n(HT20)/L
CH

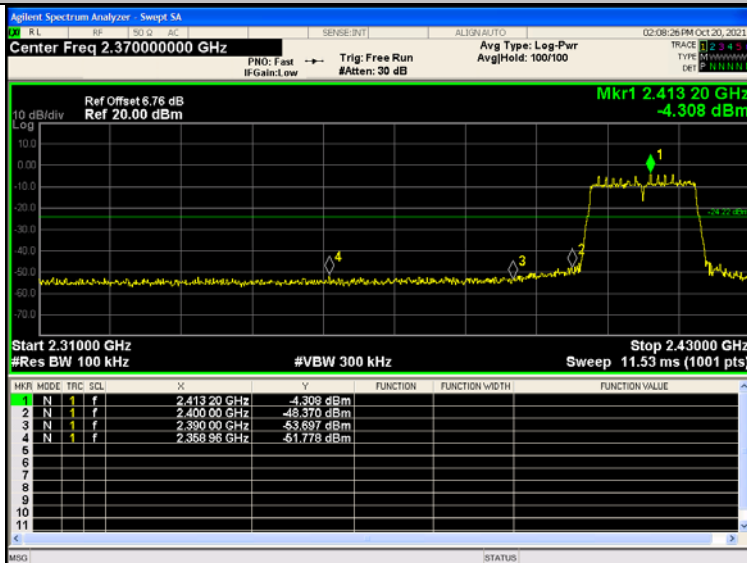


802.11n(HT20)/H
CH

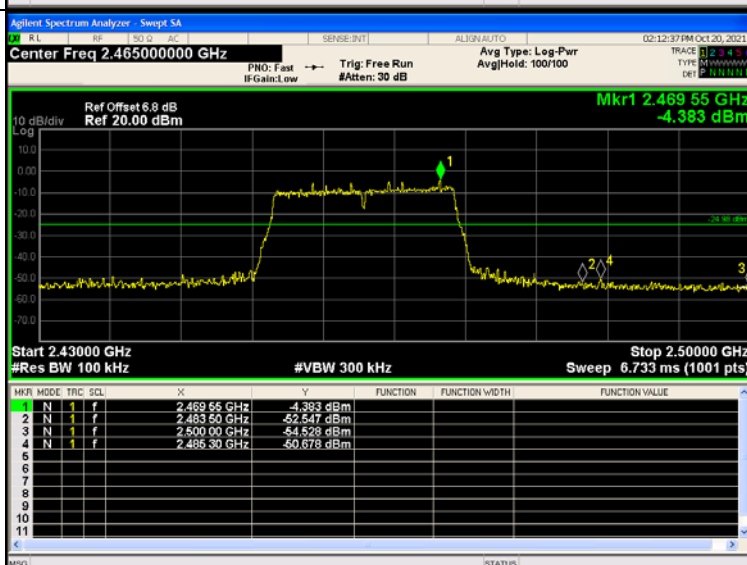


BAND EDGE Graphs

802.11n(HT40)/L
CH

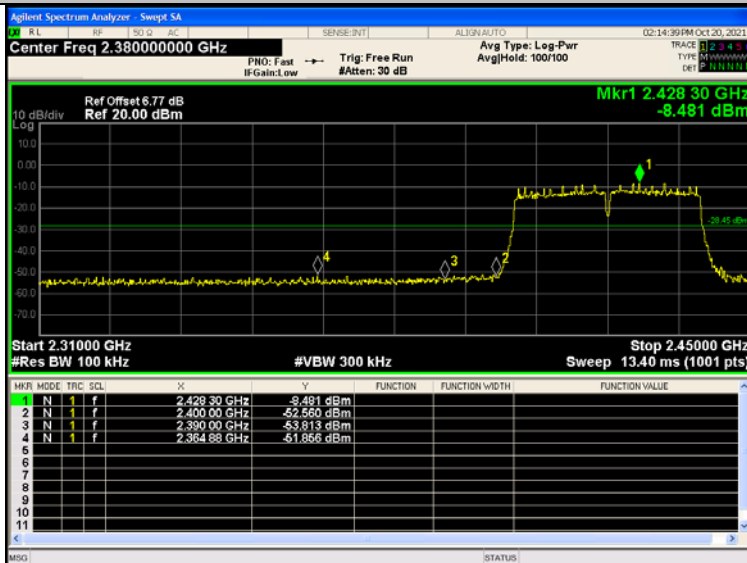




802.11n(HT40)/H
CH

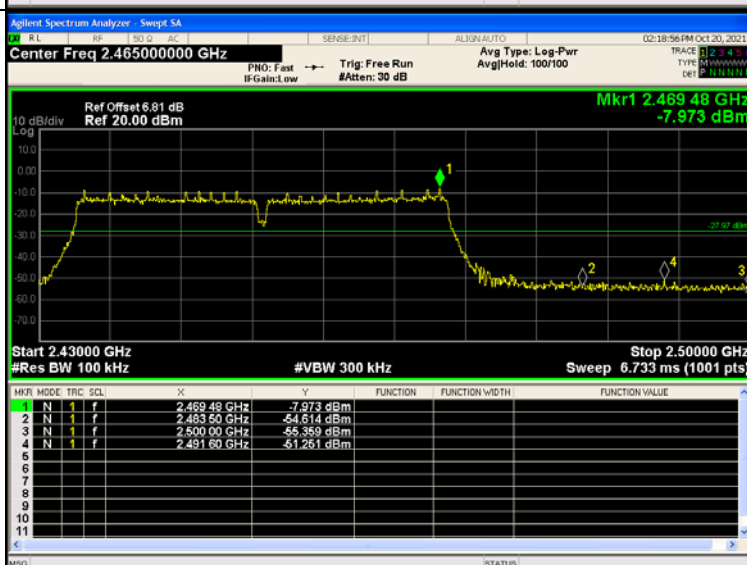




RF Conducted Spurious Emissions Graphs

802.11b /LCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.412 GHz -2.580 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.412 GHz</td><td>-2.580 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.621 GHz</td><td>-41.347 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.821 GHz</td><td>-55.750 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.383 GHz</td><td>-55.368 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.506 GHz</td><td>-55.379 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 GHz	-2.580 dBm				2	N	1	f	24.621 GHz	-41.347 dBm				3	N	1	f	4.821 GHz	-55.750 dBm				4	N	1	f	7.383 GHz	-55.368 dBm				5	N	1	f	9.506 GHz	-55.379 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.412 GHz	-2.580 dBm																																																		
2	N	1	f	24.621 GHz	-41.347 dBm																																																		
3	N	1	f	4.821 GHz	-55.750 dBm																																																		
4	N	1	f	7.383 GHz	-55.368 dBm																																																		
5	N	1	f	9.506 GHz	-55.379 dBm																																																		
802.11b /MCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.83 dB Ref 15.00 dBm Mkr1 2.439 GHz -2.887 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 GHz</td><td>-2.887 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.647 GHz</td><td>-41.529 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.768 GHz</td><td>-55.305 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.621 GHz</td><td>-54.382 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.586 GHz</td><td>-55.916 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 GHz	-2.887 dBm				2	N	1	f	24.647 GHz	-41.529 dBm				3	N	1	f	4.768 GHz	-55.305 dBm				4	N	1	f	7.621 GHz	-54.382 dBm				5	N	1	f	9.586 GHz	-55.916 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 GHz	-2.887 dBm																																																		
2	N	1	f	24.647 GHz	-41.529 dBm																																																		
3	N	1	f	4.768 GHz	-55.305 dBm																																																		
4	N	1	f	7.621 GHz	-54.382 dBm																																																		
5	N	1	f	9.586 GHz	-55.916 dBm																																																		
802.11b /HCH	Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.79 dB Ref 15.00 dBm Mkr1 2.465 GHz -1.280 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (1001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.465 GHz</td><td>-1.280 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.621 GHz</td><td>-41.450 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.139 GHz</td><td>-55.659 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.442 GHz</td><td>-54.295 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.956 GHz</td><td>-55.128 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465 GHz	-1.280 dBm				2	N	1	f	24.621 GHz	-41.450 dBm				3	N	1	f	5.139 GHz	-55.659 dBm				4	N	1	f	7.442 GHz	-54.295 dBm				5	N	1	f	9.956 GHz	-55.128 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.465 GHz	-1.280 dBm																																																		
2	N	1	f	24.621 GHz	-41.450 dBm																																																		
3	N	1	f	5.139 GHz	-55.659 dBm																																																		
4	N	1	f	7.442 GHz	-54.295 dBm																																																		
5	N	1	f	9.956 GHz	-55.128 dBm																																																		




RF Conducted Spurious Emissions Graphs

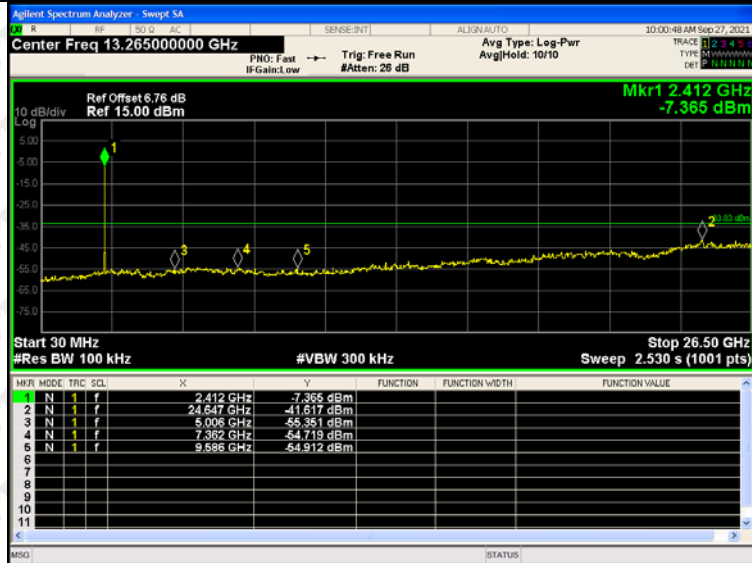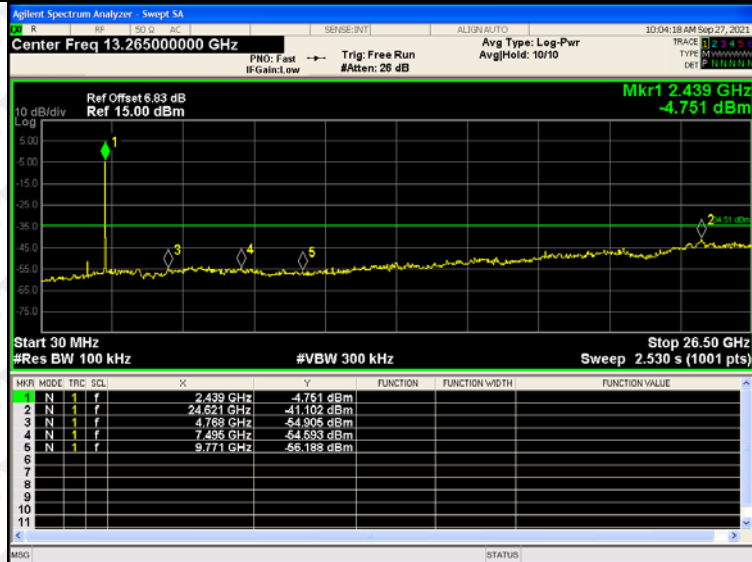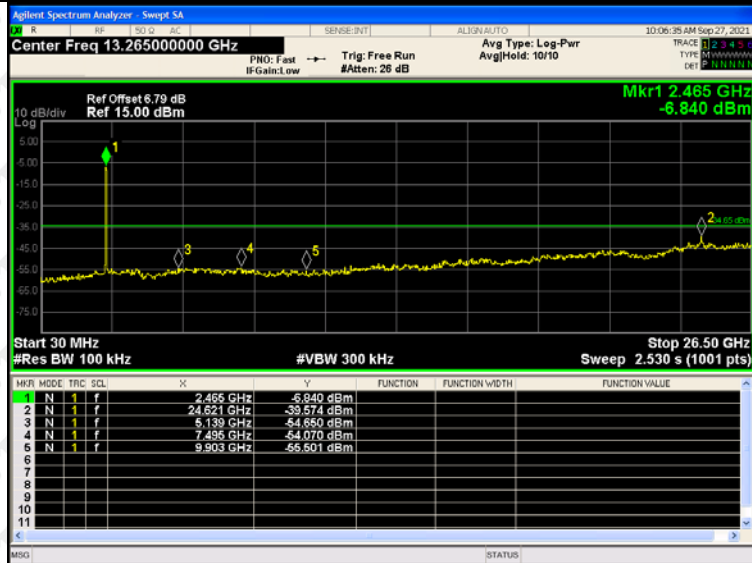802.11g
/LCH

802.11g
/MCH

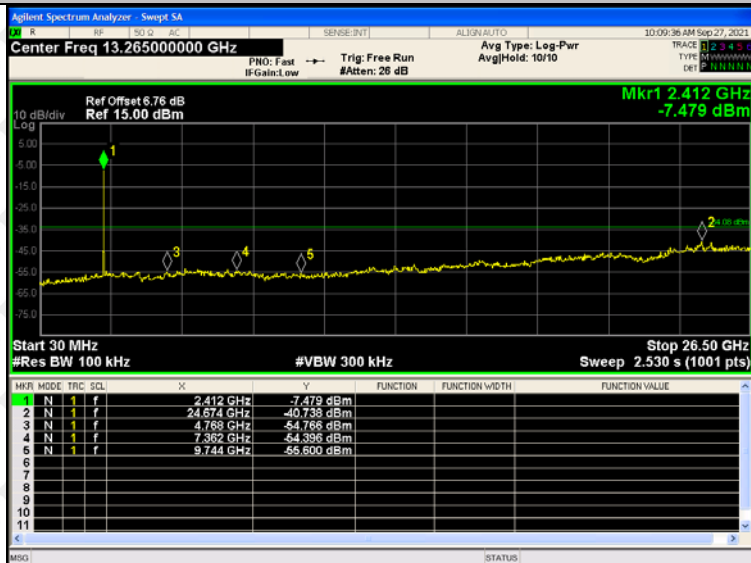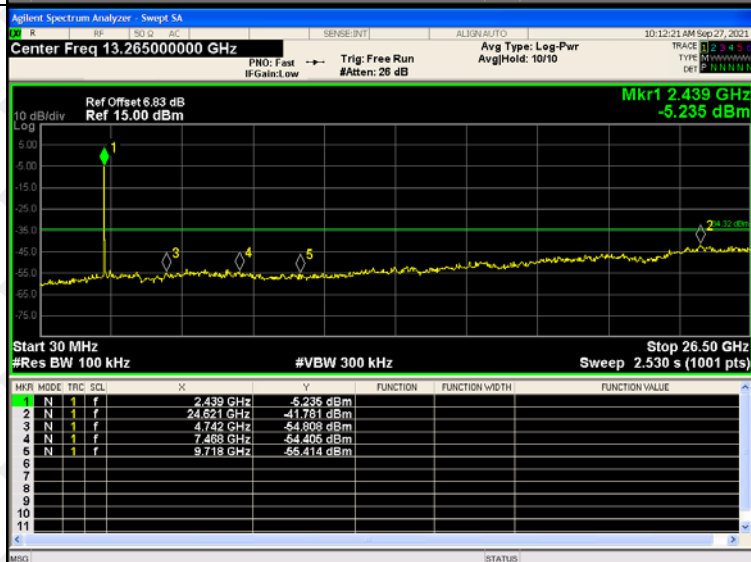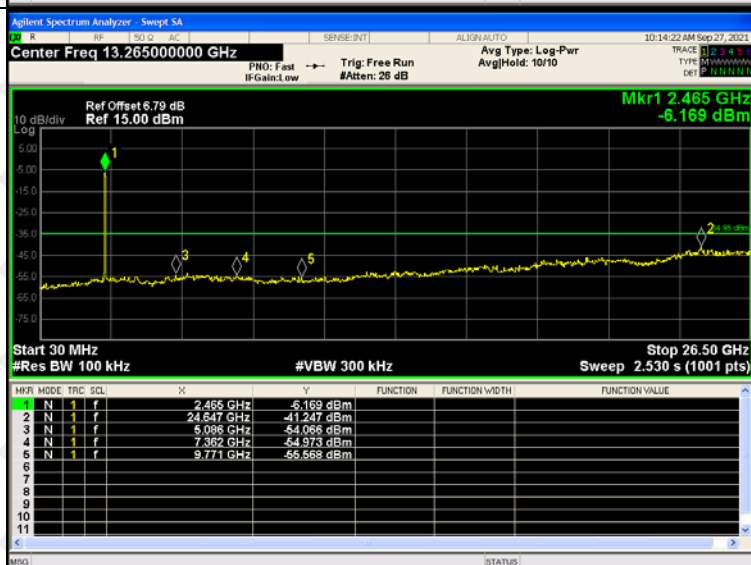802.11g
/HCH


RF Conducted Spurious Emissions Graphs

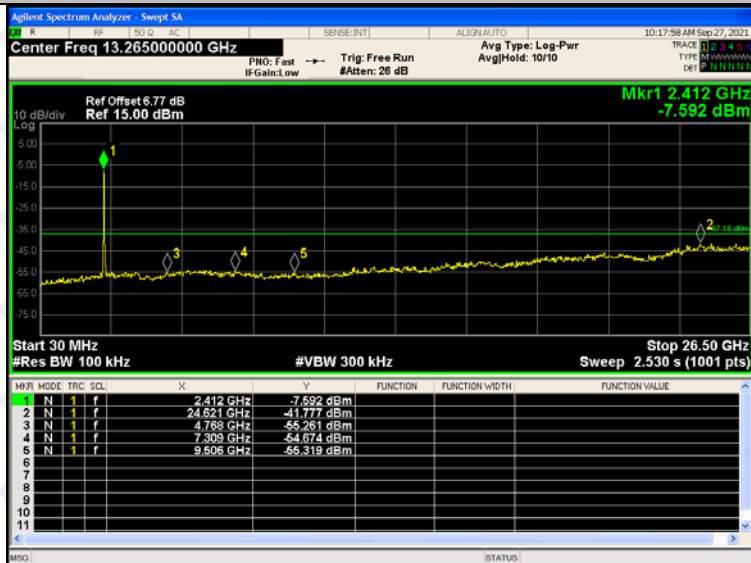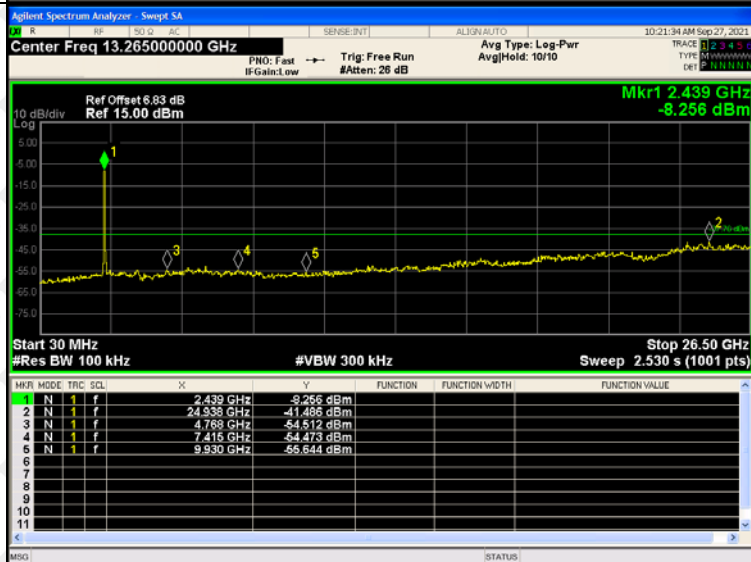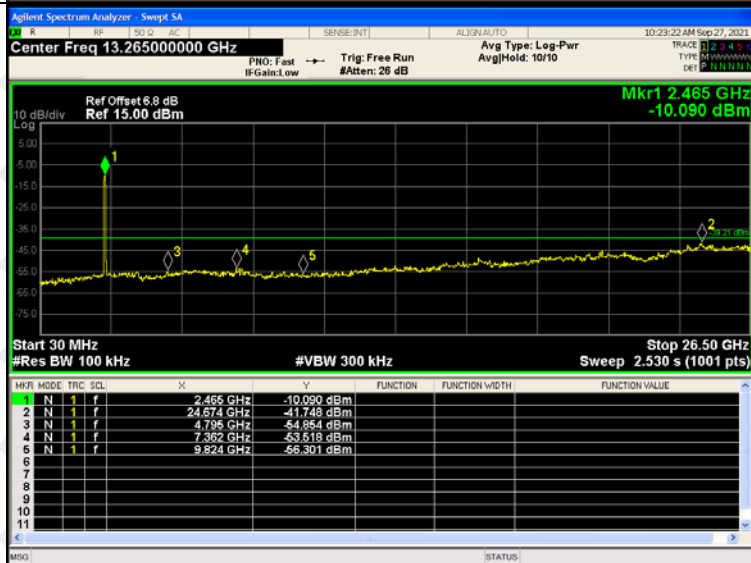
802.11n
(HT20)/
LCH

802.11
n(HT20)
/MCH

802.11
n(HT20)
/HCH


RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

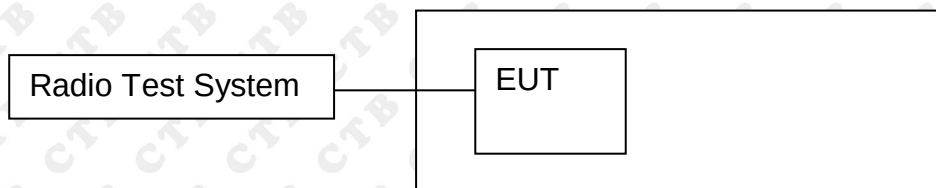802.11
n(HT40)
/MCH

802.11
n(HT40)
/HCH


9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.



9.4 Test Result

ANT 1 +ANT 2

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	7.212	7.816	/	30
	MCH	7.282	7.931	/	30
	HCH	7.273	7.365	/	30
802.11g	LCH	6.979	6.588	/	30
	MCH	6.876	6.684	/	30
	HCH	6.308	6.413	/	30
802.11n(HT20)	LCH	6.787	6.589	9.699	30
	MCH	6.956	6.736	9.858	30
	HCH	7.079	6.459	9.790	30
802.11n(HT40)	LCH	5.233	5.197	8.225	30
	MCH	5.468	5.201	8.347	30
	HCH	5.907	5.247	8.600	30

Note: Directional gain = $1\text{dBi} + 10 \times \log(2/1) = 4.01\text{dBi} < 6\text{dBi}$. So the output power limit no need to reduce.

ANT1

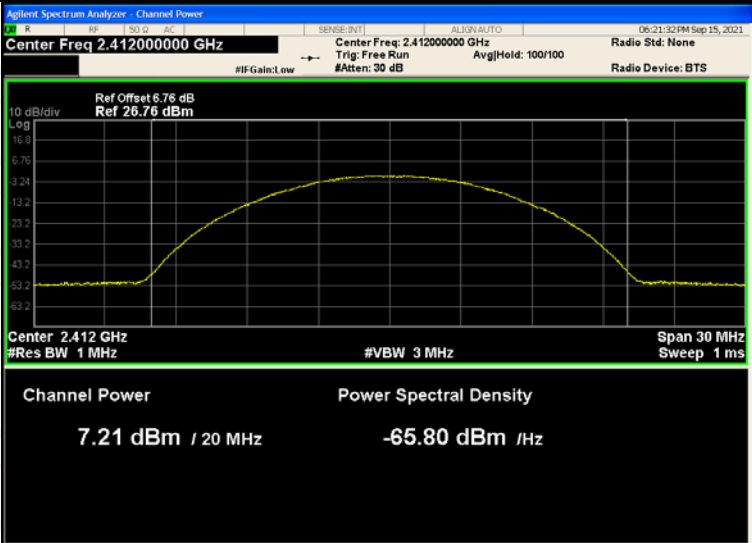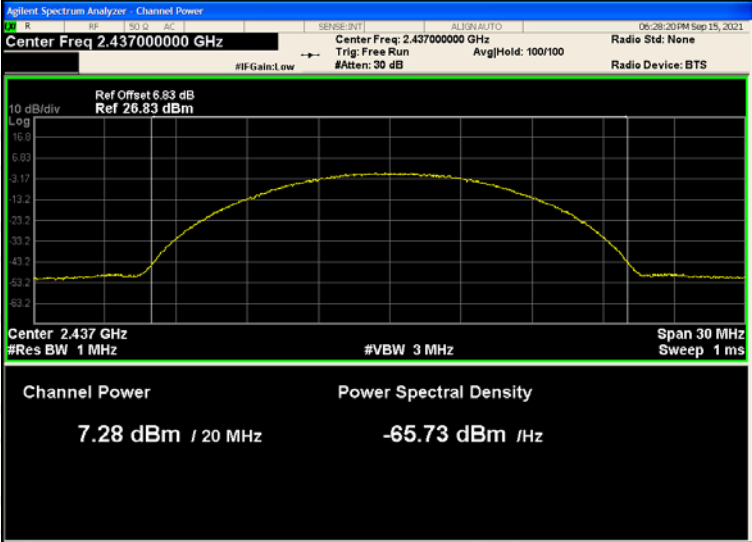Mode	Channel.	Maximum Output Power [dBm]
802.11b	LCH	
	MCH	
	HCH	