Appendix C

RF Test Data for 2.4GWIFI (Conducted Measurement)

Product Name: 3D Printer

Test Model: Anycubic Kobra 3 Max

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Can Kun
Supervised by:	Nick Peng

C.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.1	>=0.5	Pass
NVNT	b	2437	Ant1	8.048	>=0.5	Pass
NVNT	b	2462	Ant1	8.12	>=0.5	Pass
NVNT	g	2412	Ant1	16.042	>=0.5	Pass
NVNT	g	2437	Ant1	16.286	>=0.5	Pass
NVNT	g	2462	Ant1	16.304	>=0.5	Pass
NVNT	n20	2412	Ant1	17.406	>=0.5	Pass
NVNT	n20	2437	Ant1	17.028	>=0.5	Pass
NVNT	n20	2462	Ant1	16.86	>=0.5	Pass
NVNT	n40	2422	Ant1	35.776	>=0.5	Pass
NVNT	n40	2437	Ant1	35.322	>=0.5	Pass
NVNT	n40	2452	Ant1	35.57	>=0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

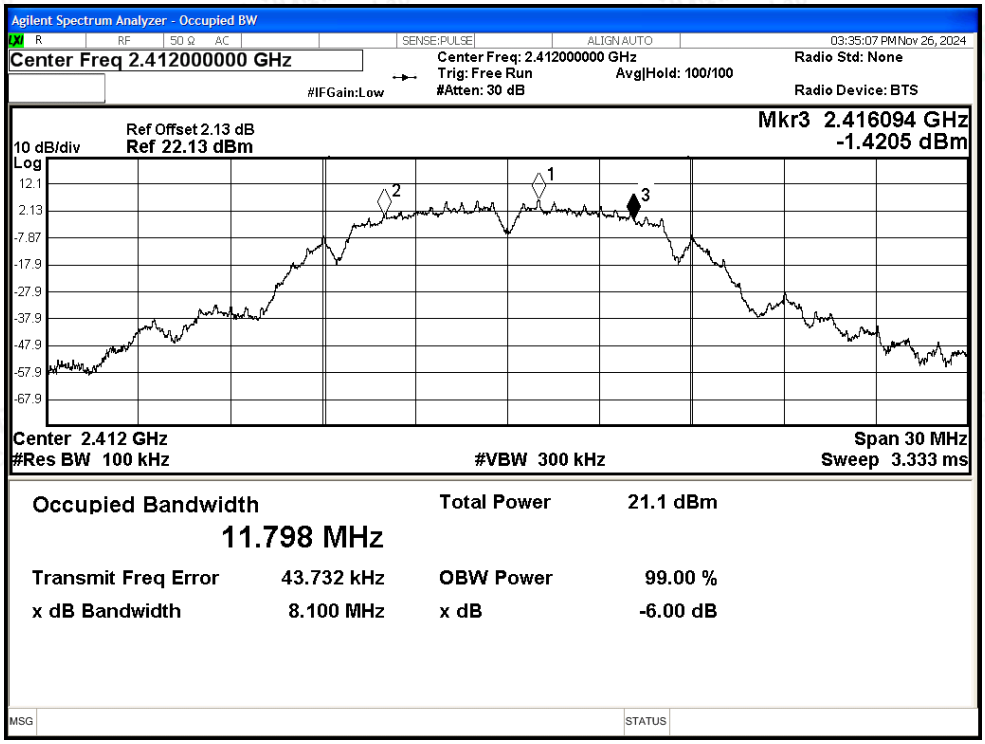

-6dB Bandwidth NVNT b 2437MHz Ant1

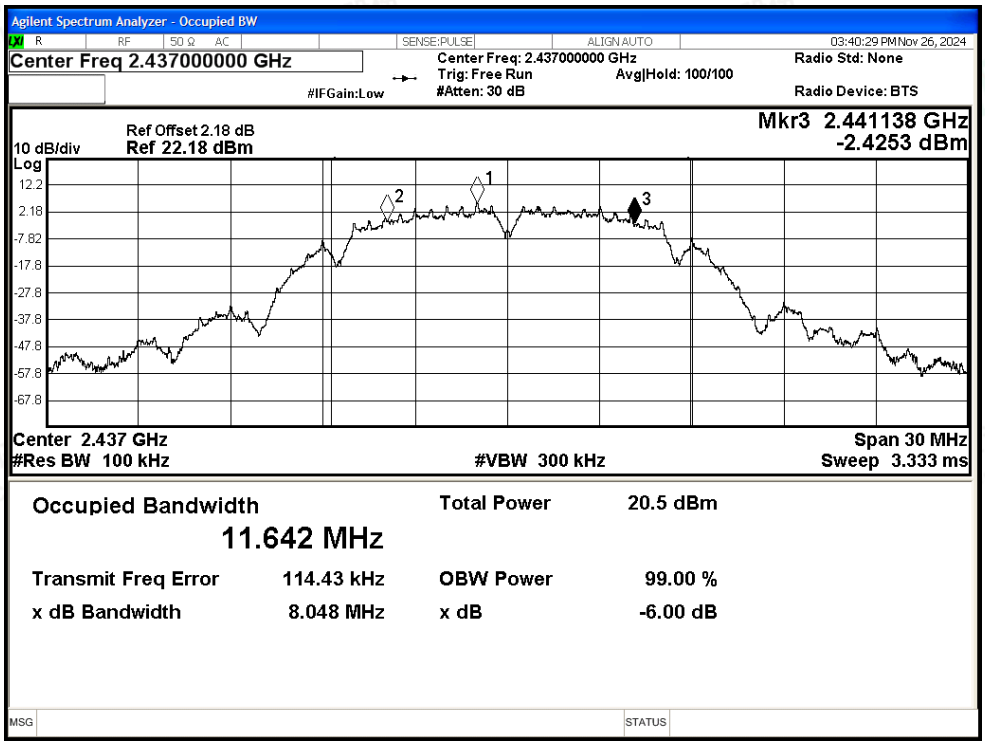

-6dB Bandwidth NVNT b 2462MHz Ant1

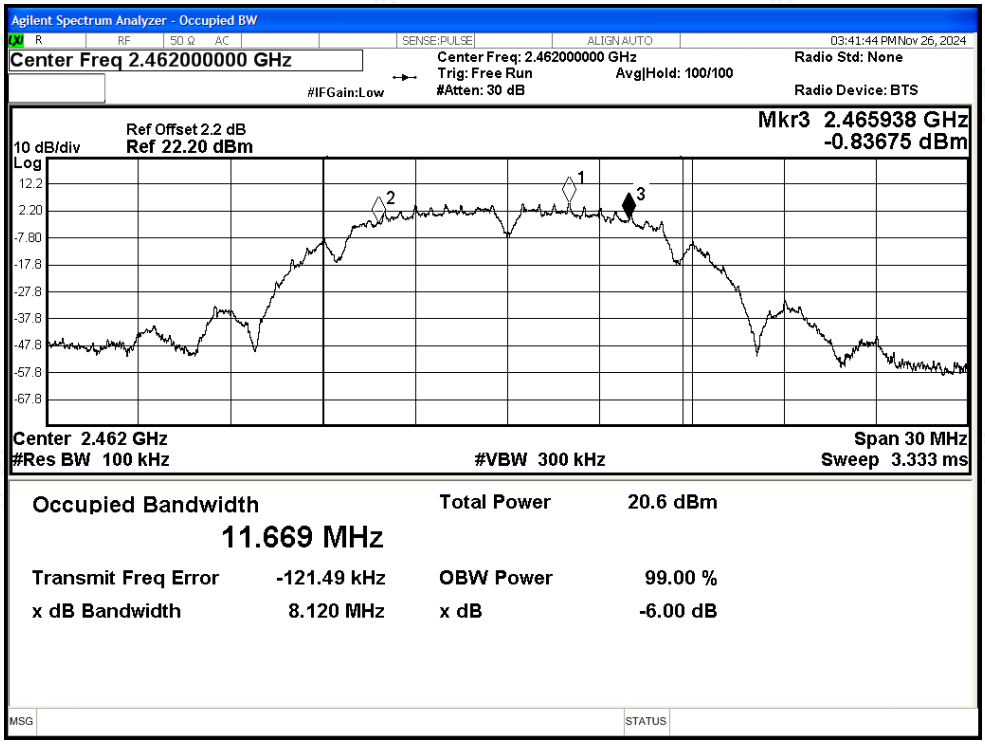

-6dB Bandwidth NVNT g 2412MHz Ant1

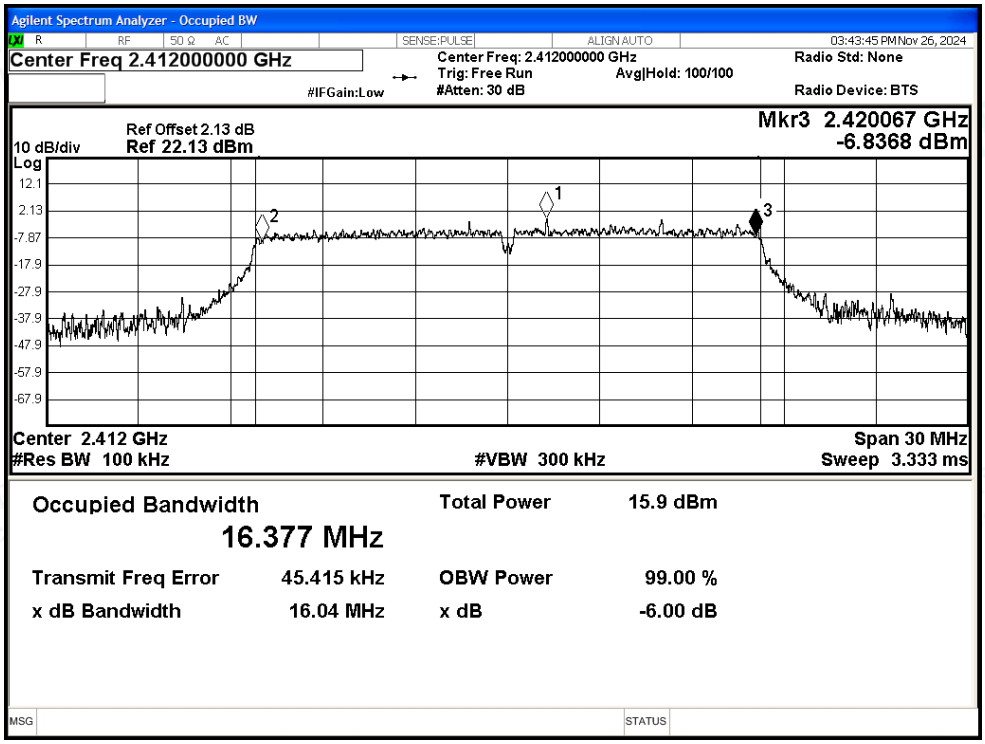

-6dB Bandwidth NVNT g 2437MHz Ant1

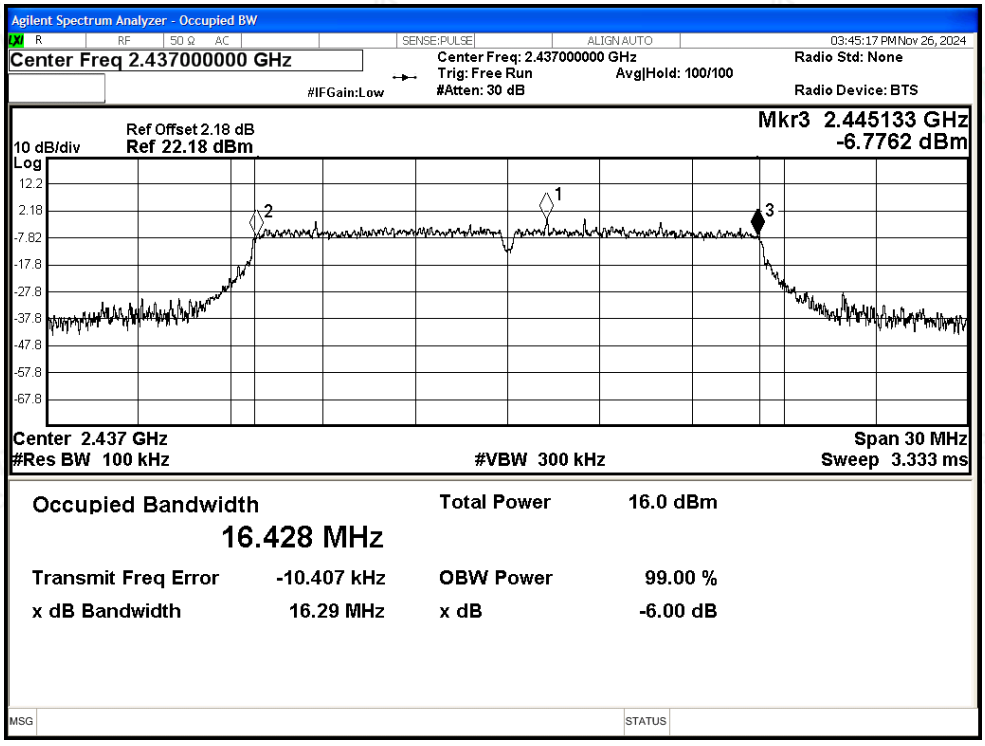

-6dB Bandwidth NVNT g 2462MHz Ant1

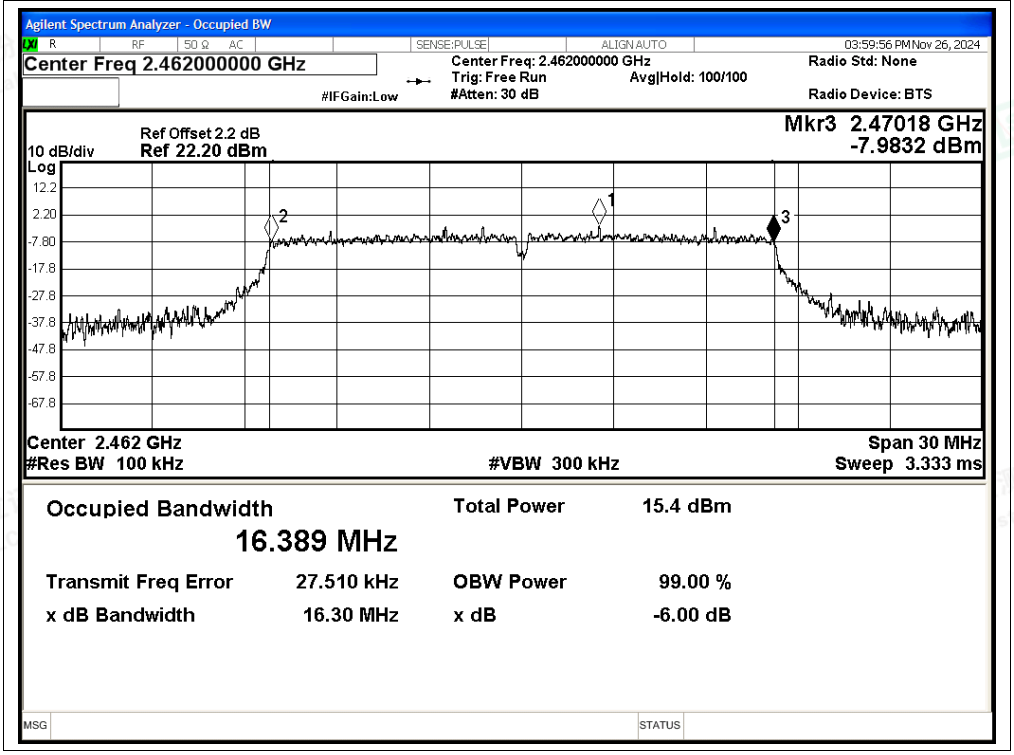

-6dB Bandwidth NVNT n20 2412MHz Ant1

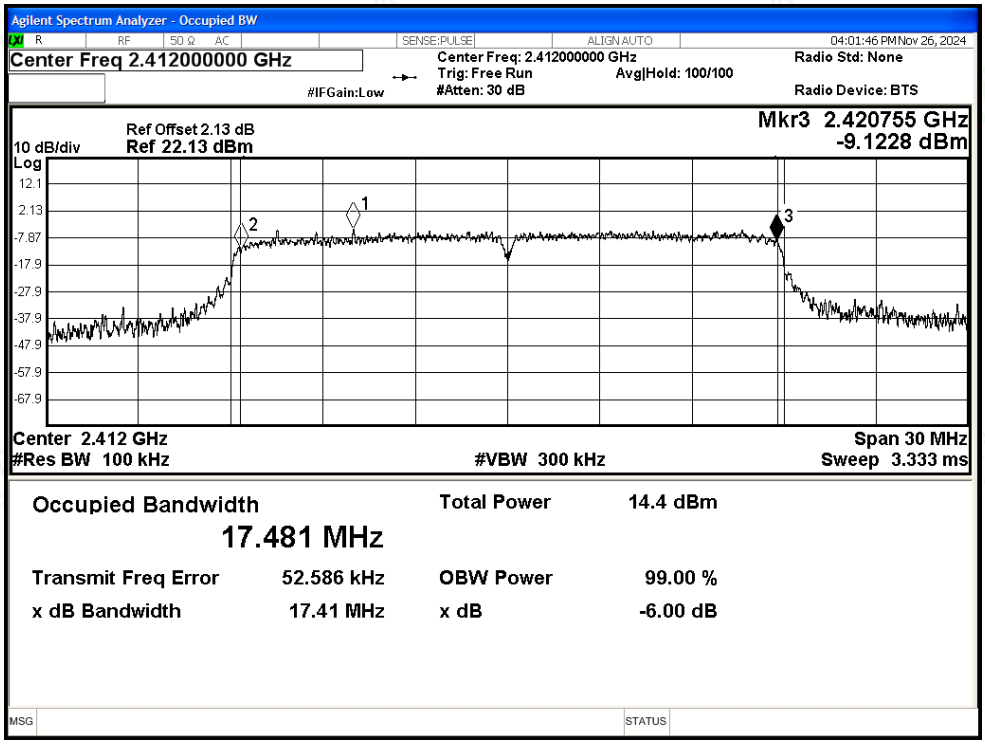

-6dB Bandwidth NVNT n20 2437MHz Ant1

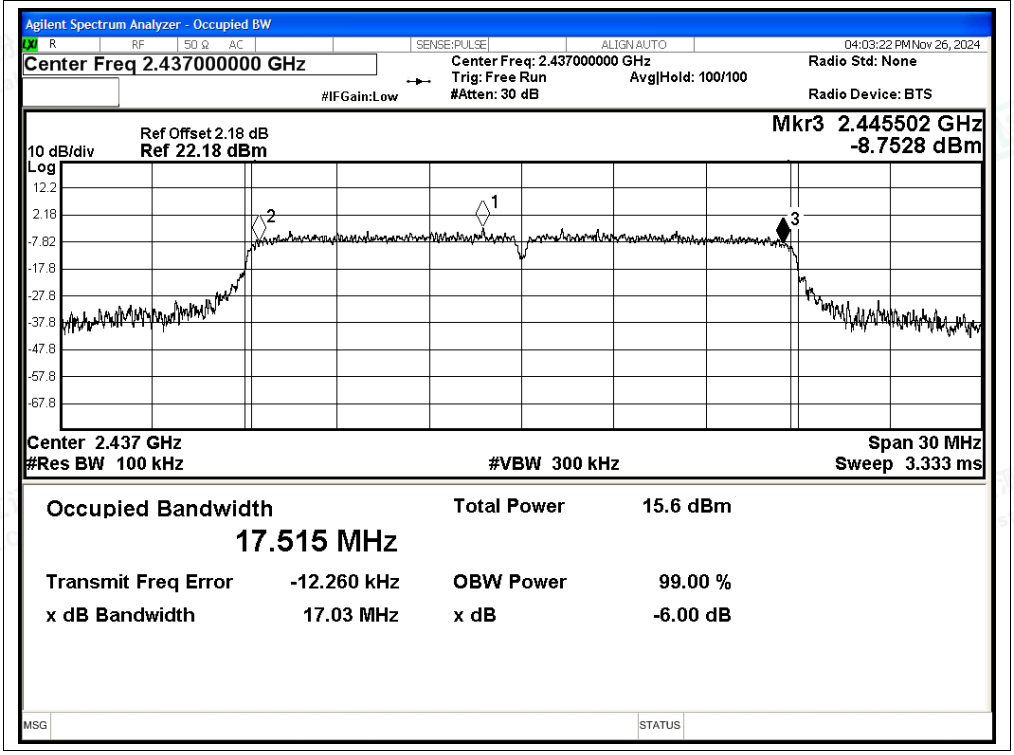

-6dB Bandwidth NVNT n20 2462MHz Ant1

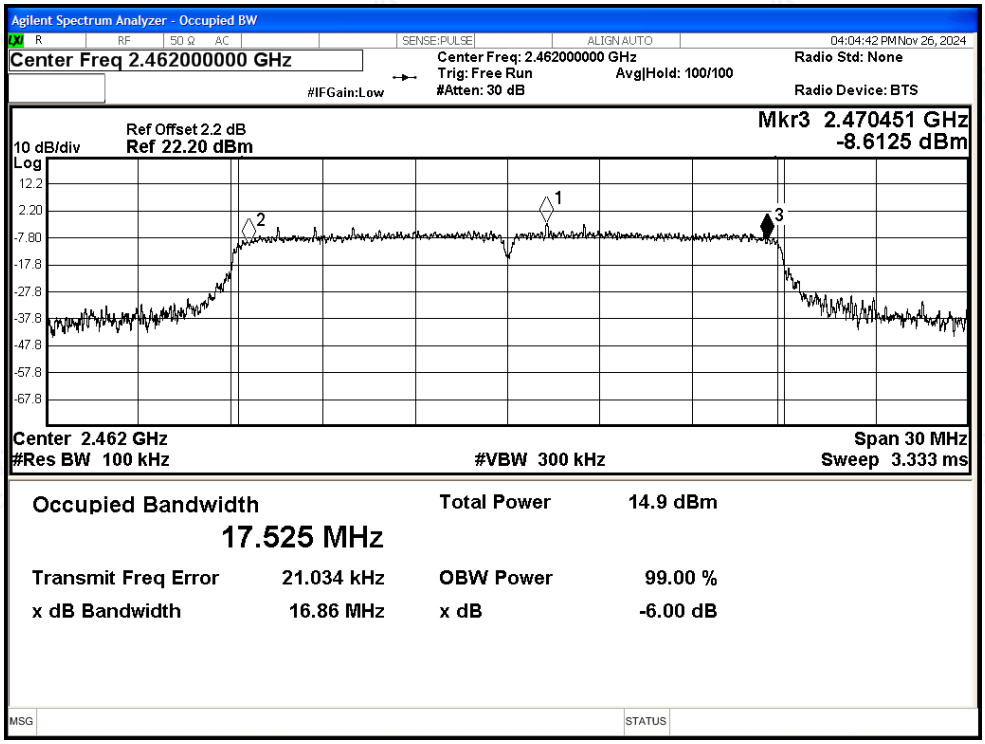

-6dB Bandwidth NVNT n40 2422MHz Ant1

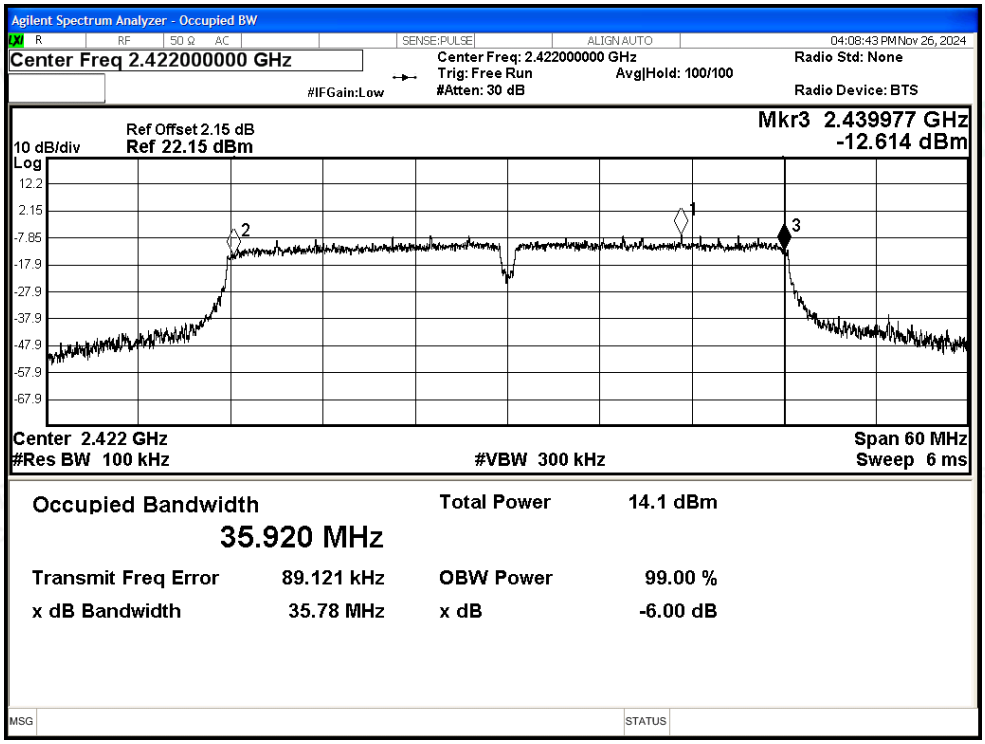

-6dB Bandwidth NVNT n40 2437MHz Ant1

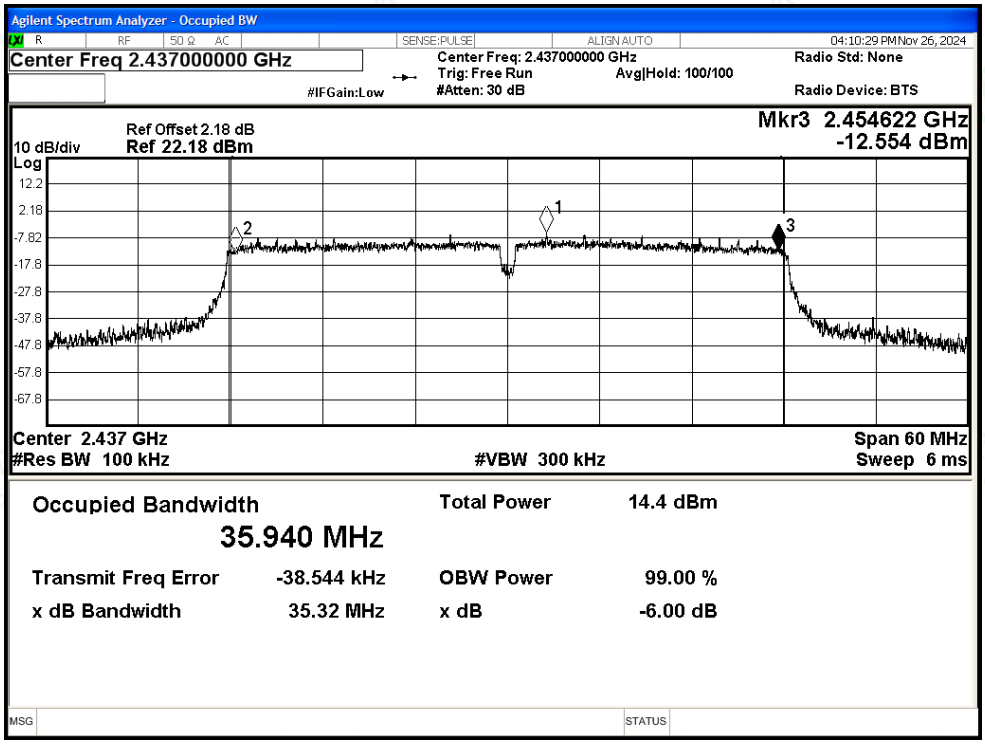

-6dB Bandwidth NVNT n40 2452MHz Ant1

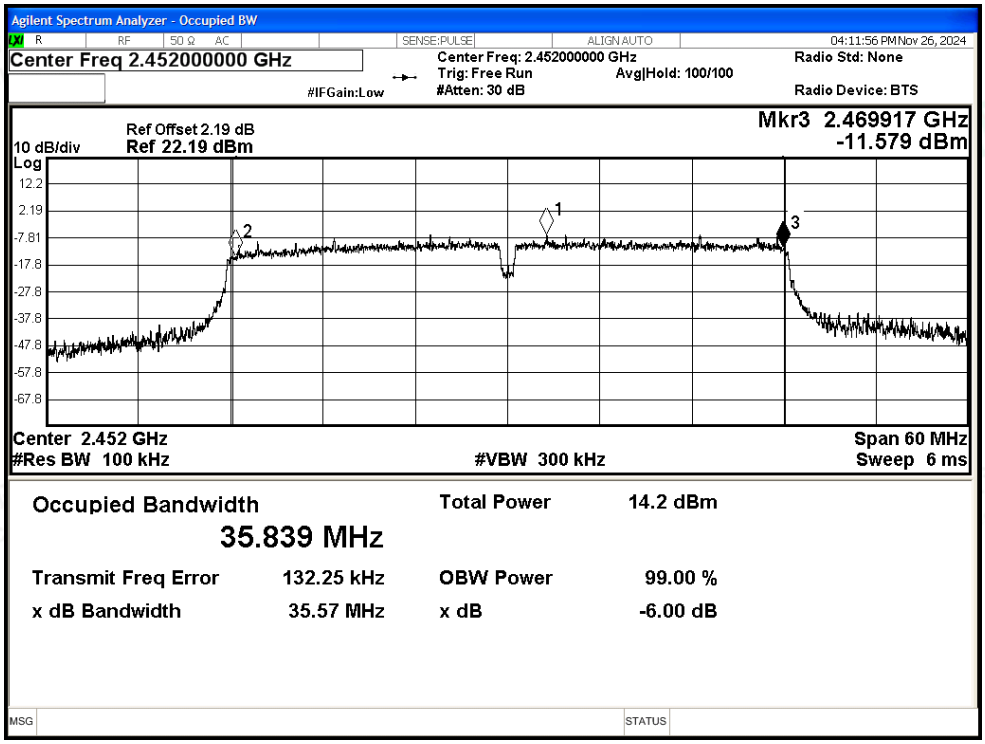

C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	15.09	30	Pass
NVNT	b	2437	Ant1	15.49	30	Pass
NVNT	b	2462	Ant1	15.57	30	Pass
NVNT	g	2412	Ant1	14.7	30	Pass
NVNT	g	2437	Ant1	14.8	30	Pass
NVNT	g	2462	Ant1	14.26	30	Pass
NVNT	n20	2412	Ant1	13.12	30	Pass
NVNT	n20	2437	Ant1	14.25	30	Pass
NVNT	n20	2462	Ant1	13.64	30	Pass
NVNT	n40	2422	Ant1	12.57	30	Pass
NVNT	n40	2437	Ant1	12.85	30	Pass
NVNT	n40	2452	Ant1	12.59	30	Pass

C.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-8.01	8	Pass
NVNT	b	2437	Ant1	-9.26	8	Pass
NVNT	b	2462	Ant1	-9.29	8	Pass
NVNT	g	2412	Ant1	-15.93	8	Pass
NVNT	g	2437	Ant1	-14.77	8	Pass
NVNT	g	2462	Ant1	-16.13	8	Pass
NVNT	n20	2412	Ant1	-16.59	8	Pass
NVNT	n20	2437	Ant1	-16.65	8	Pass
NVNT	n20	2462	Ant1	-17.55	8	Pass
NVNT	n40	2422	Ant1	-21.22	8	Pass
NVNT	n40	2437	Ant1	-21.27	8	Pass
NVNT	n40	2452	Ant1	-21.21	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1

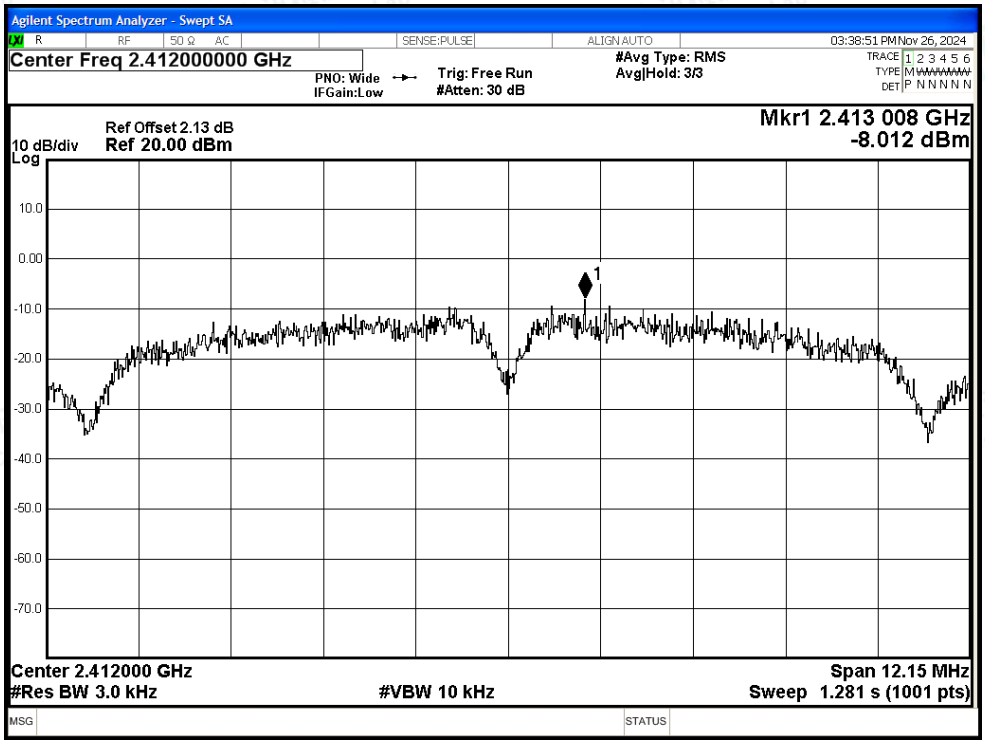

PSD NVNT b 2437MHz Ant1

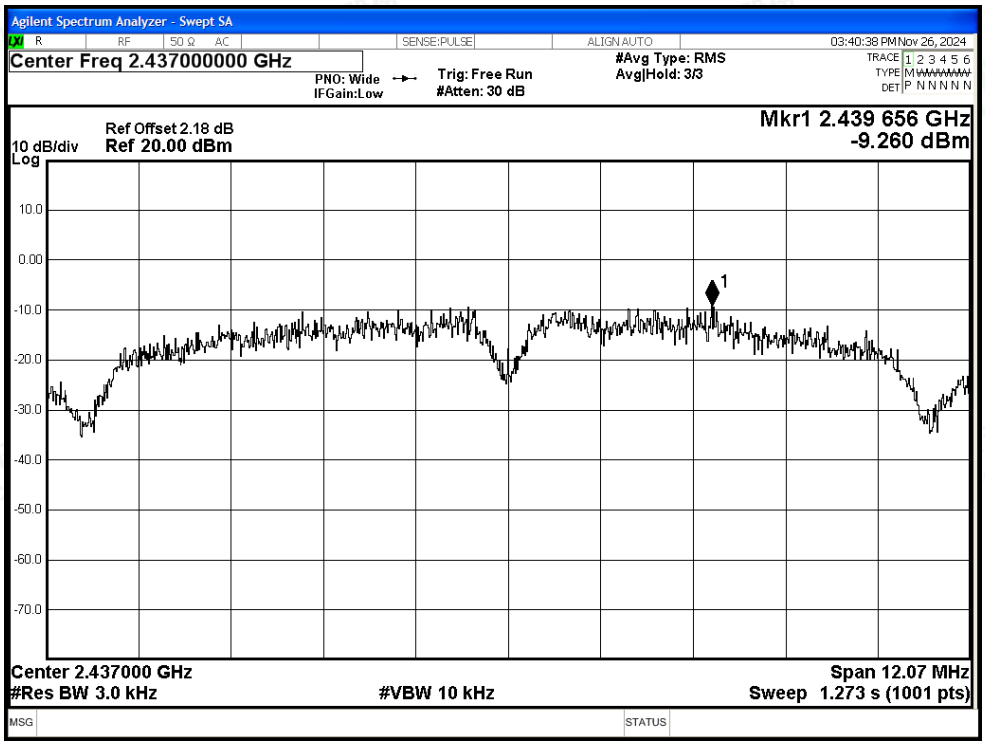

PSD NVNT b 2462MHz Ant1

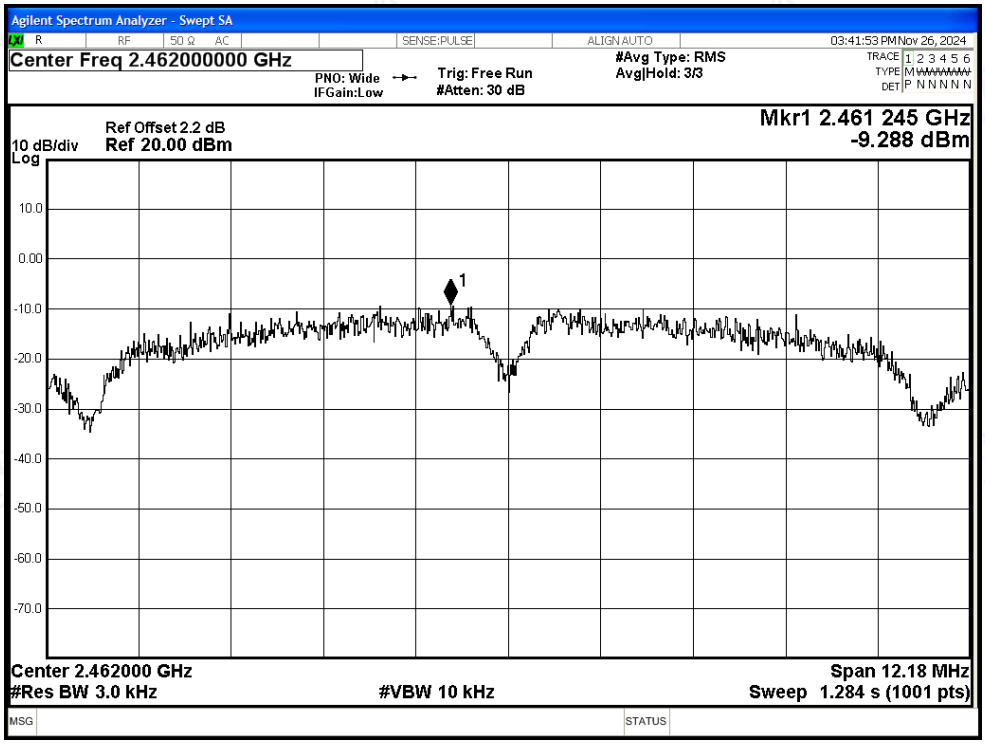

PSD NVNT g 2412MHz Ant1

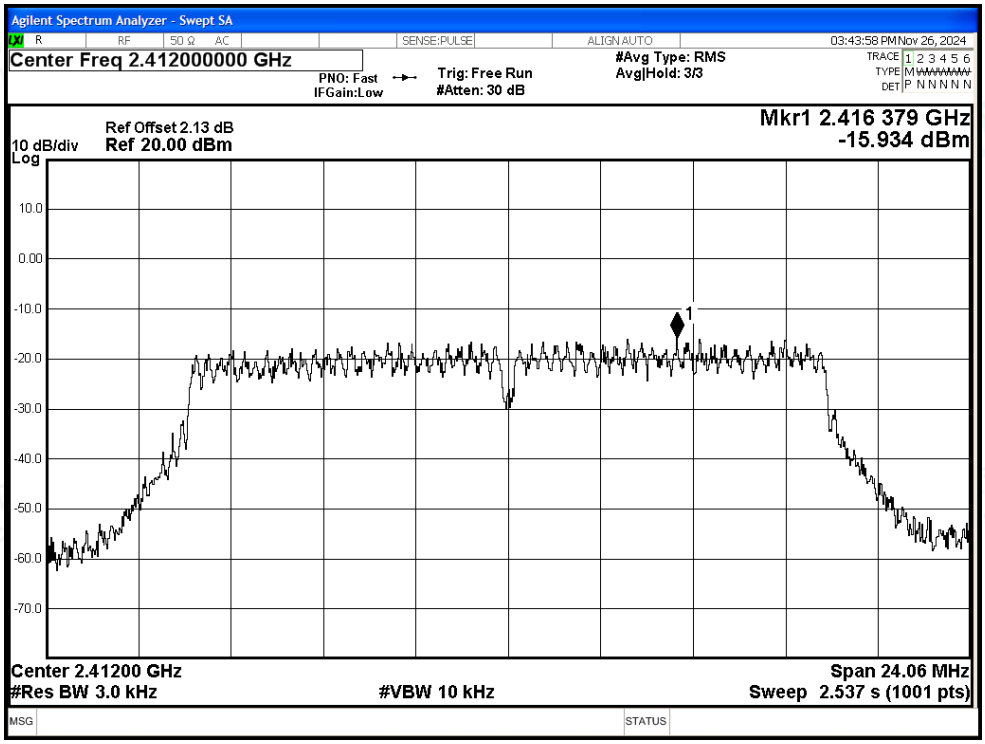

PSD NVNT g 2437MHz Ant1

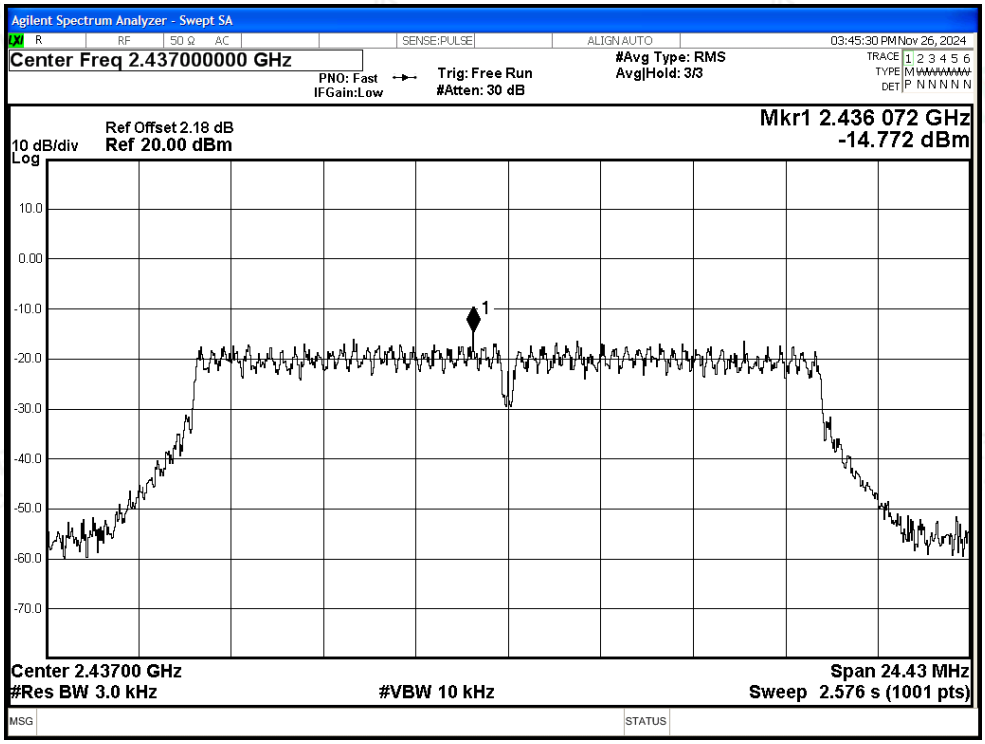

PSD NVNT g 2462MHz Ant1

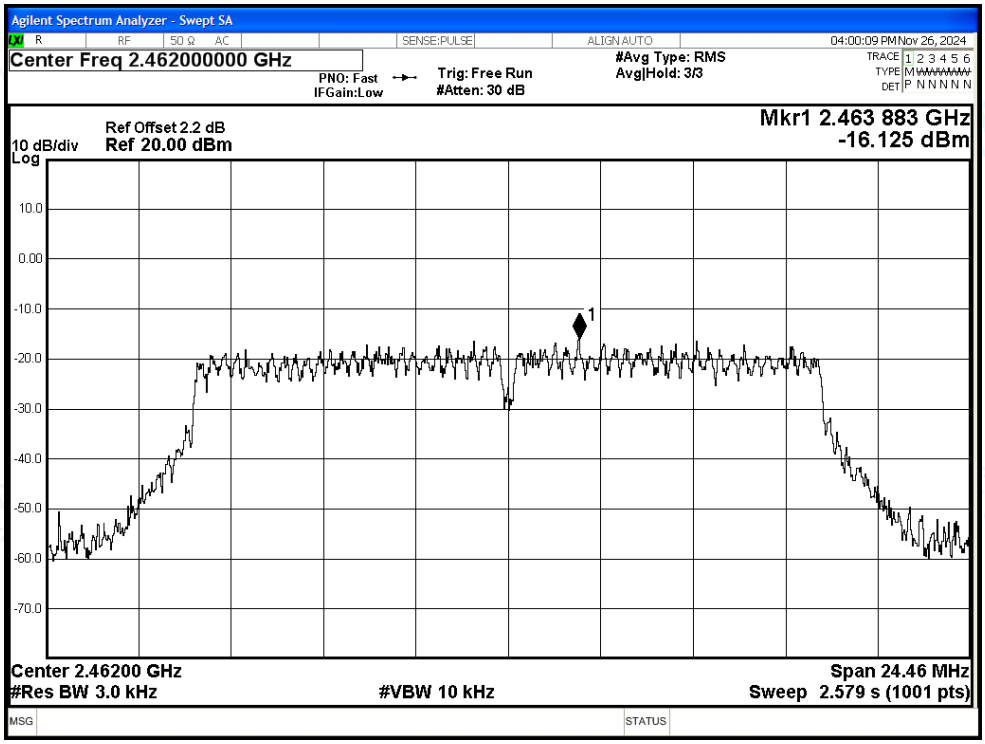

PSD NVNT n20 2412MHz Ant1

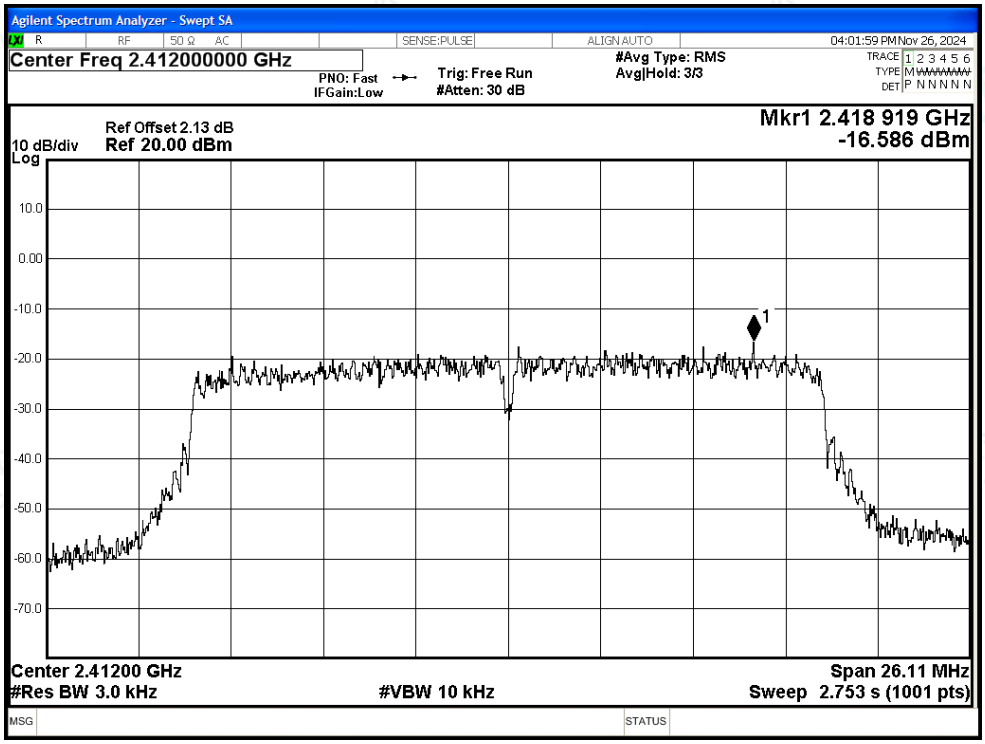

PSD NVNT n20 2437MHz Ant1

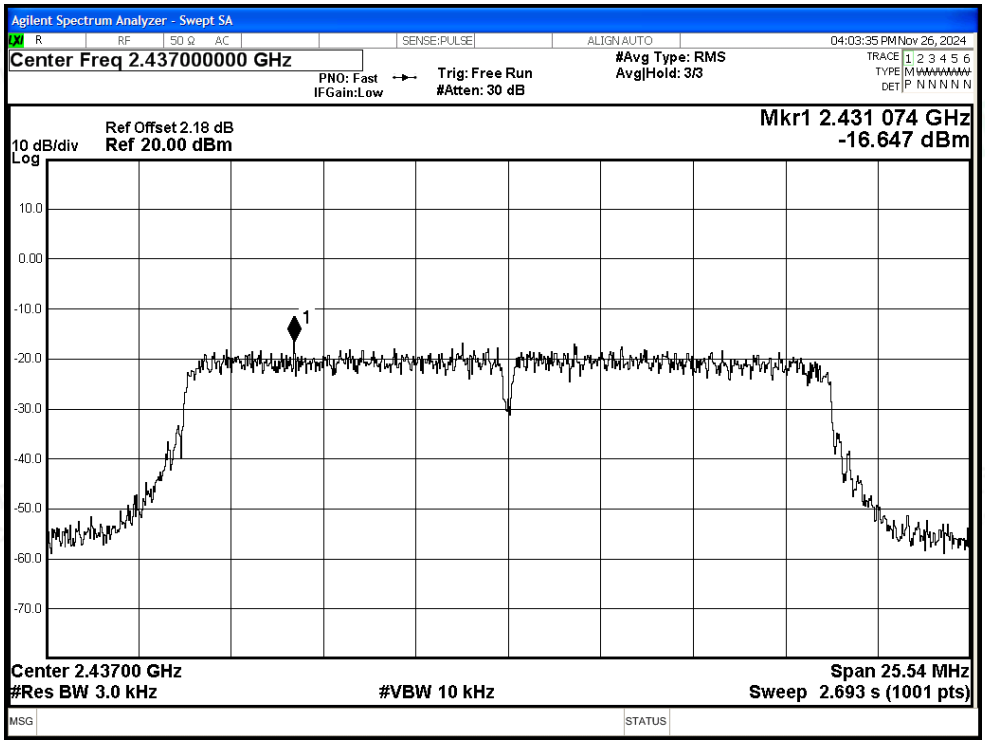

PSD NVNT n20 2462MHz Ant1

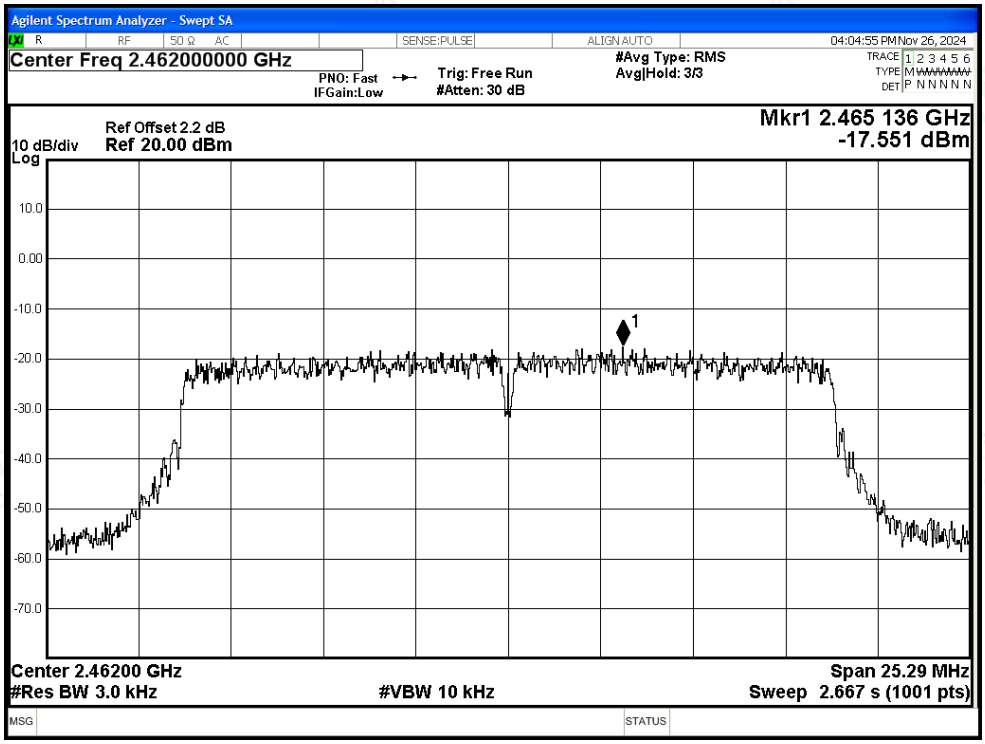

PSD NVNT n40 2422MHz Ant1

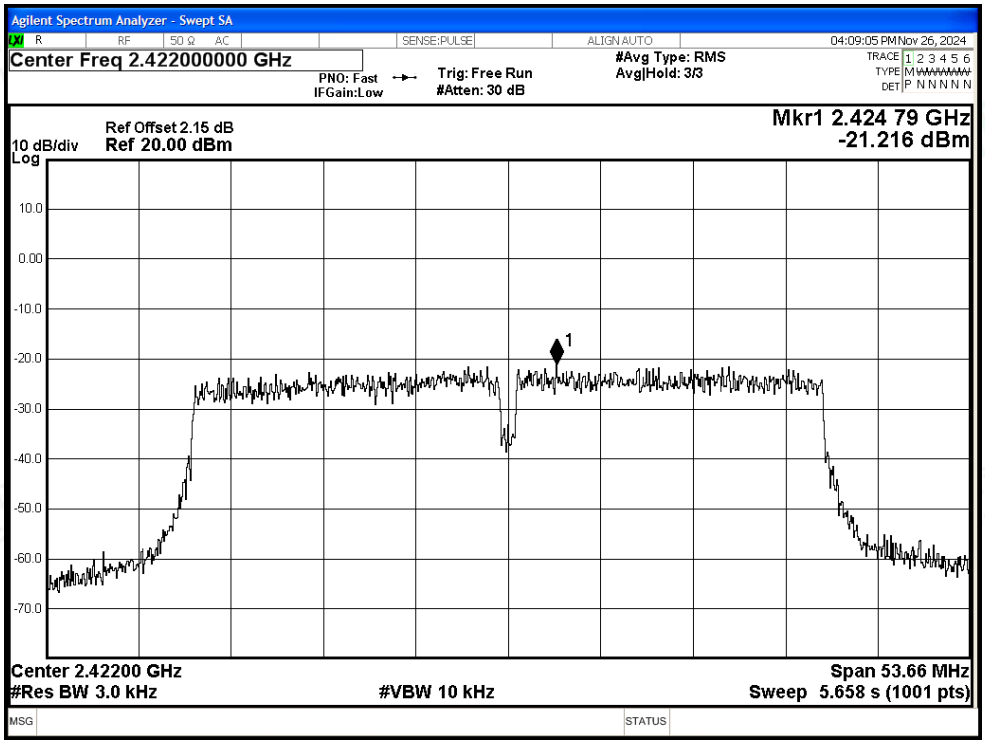

PSD NVNT n40 2437MHz Ant1

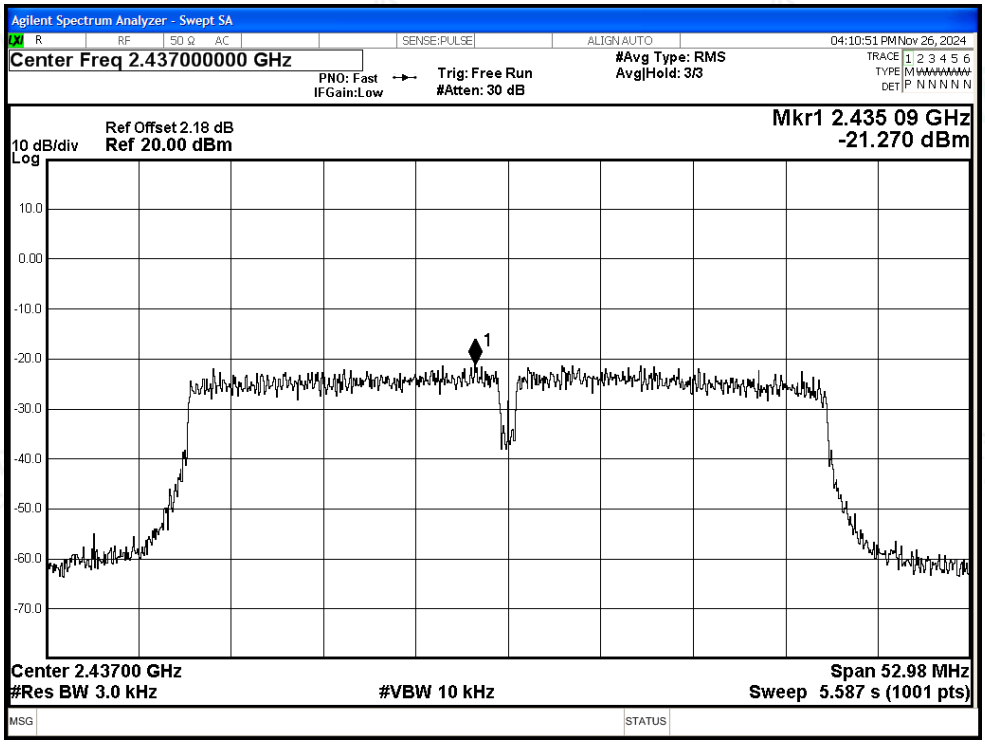

PSD NVNT n40 2452MHz Ant1

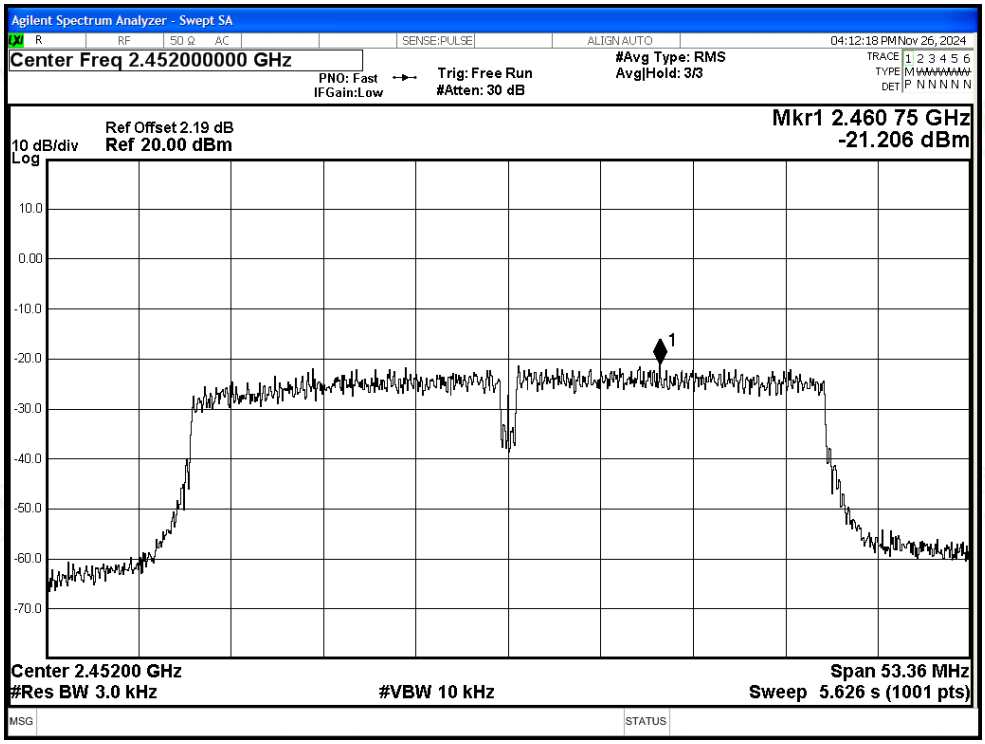

C.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-46.16	-20	Pass
NVNT	b	2462	Ant1	-59.46	-20	Pass
NVNT	g	2412	Ant1	-33.13	-20	Pass
NVNT	g	2462	Ant1	-41.4	-20	Pass
NVNT	n20	2412	Ant1	-34.08	-20	Pass
NVNT	n20	2462	Ant1	-41.21	-20	Pass
NVNT	n40	2422	Ant1	-32.74	-20	Pass
NVNT	n40	2452	Ant1	-37.68	-20	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

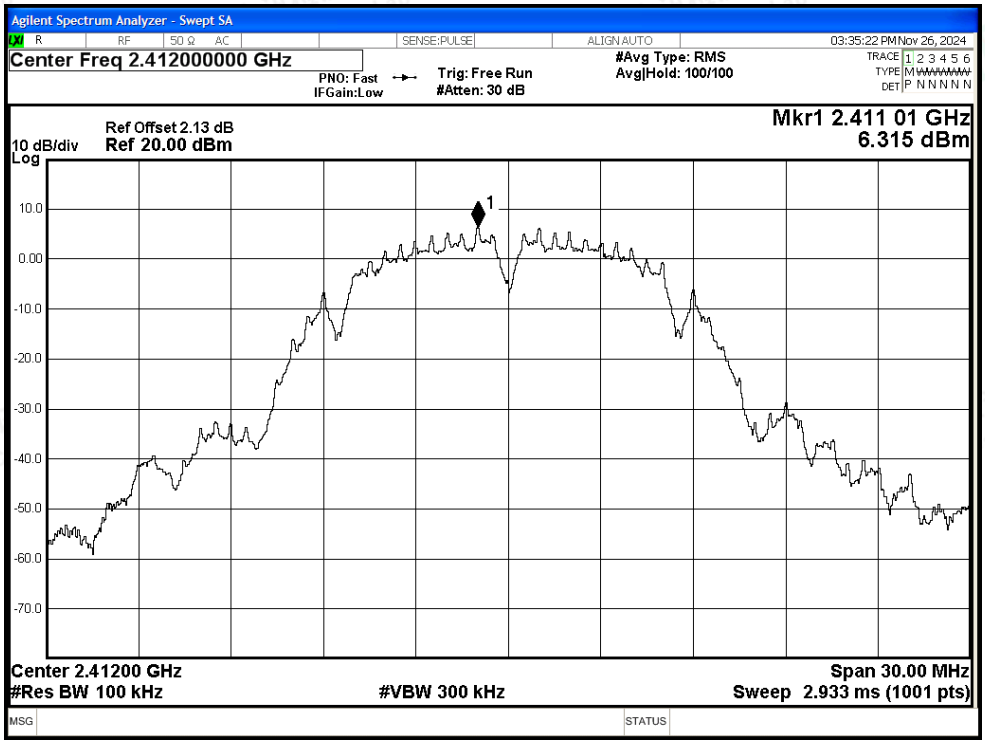

Band Edge NVNT b 2412MHz Ant1 Emission

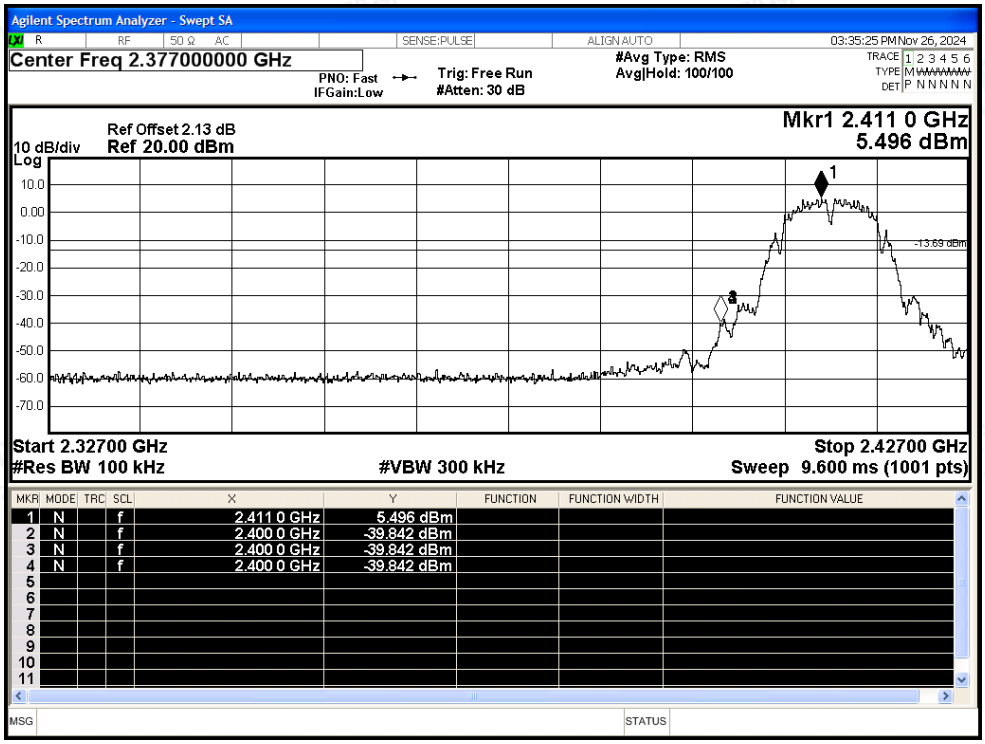

Band Edge NVNT b 2462MHz Ant1 Ref

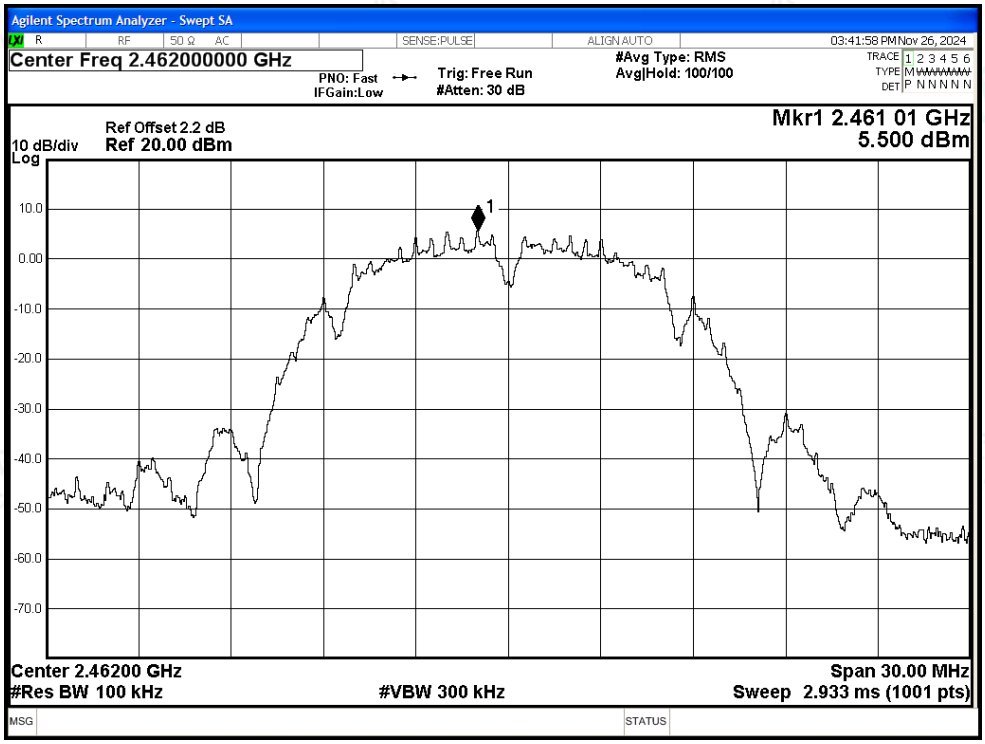

Band Edge NVNT b 2462MHz Ant1 Emission

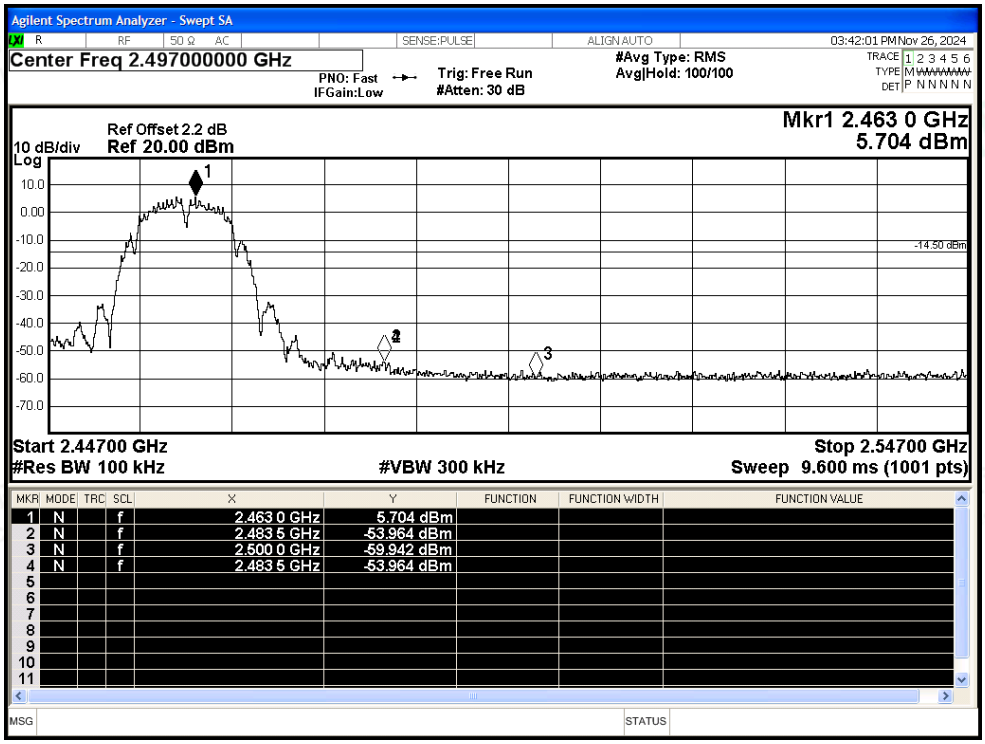

Band Edge NVNT g 2412MHz Ant1 Ref

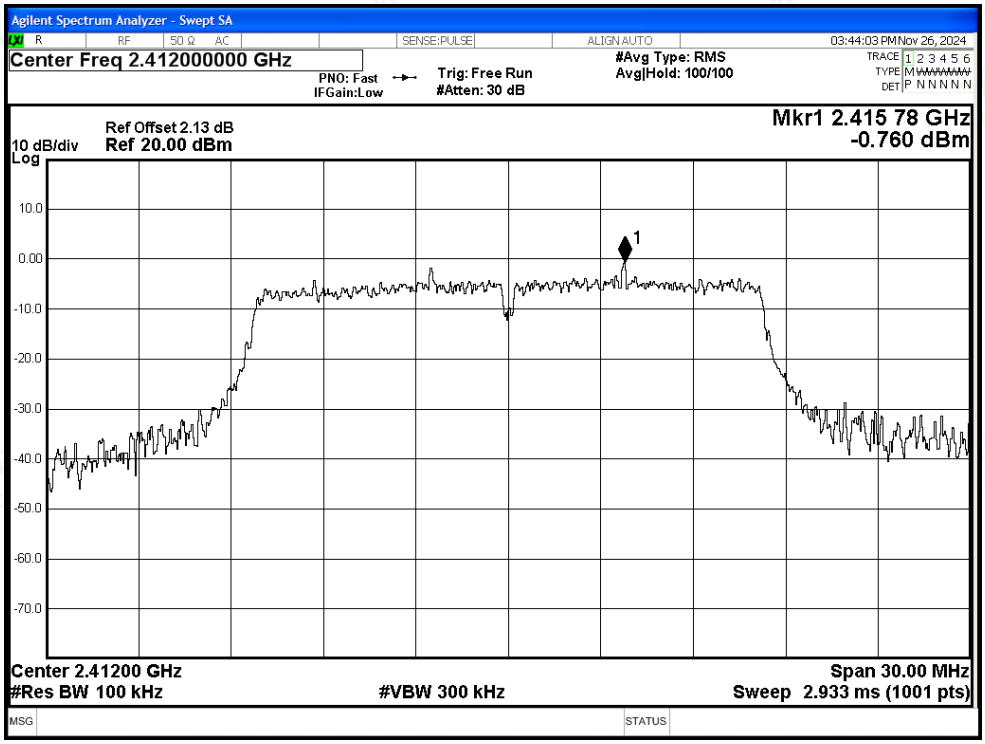

Band Edge NVNT g 2412MHz Ant1 Emission

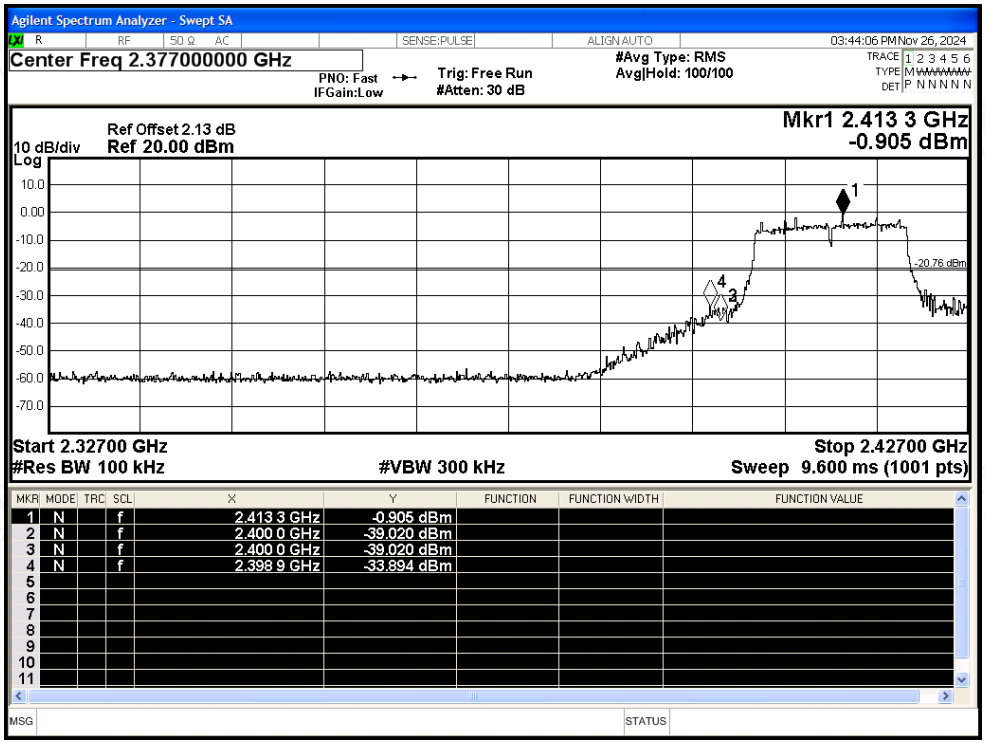

Band Edge NVNT g 2462MHz Ant1 Ref

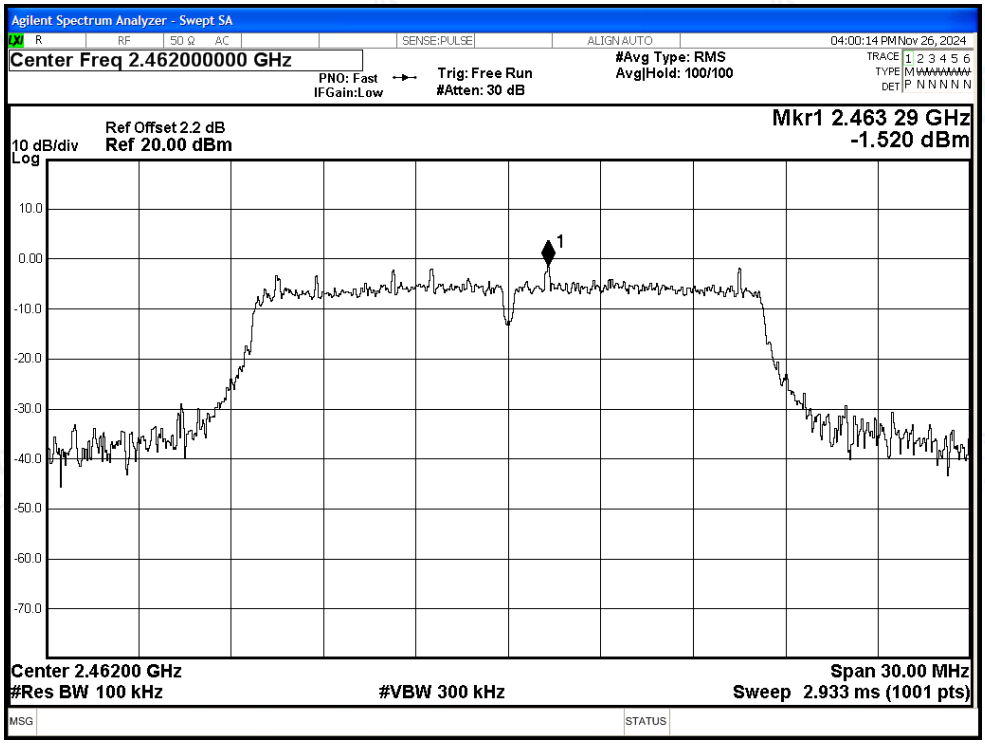

Band Edge NVNT g 2462MHz Ant1 Emission

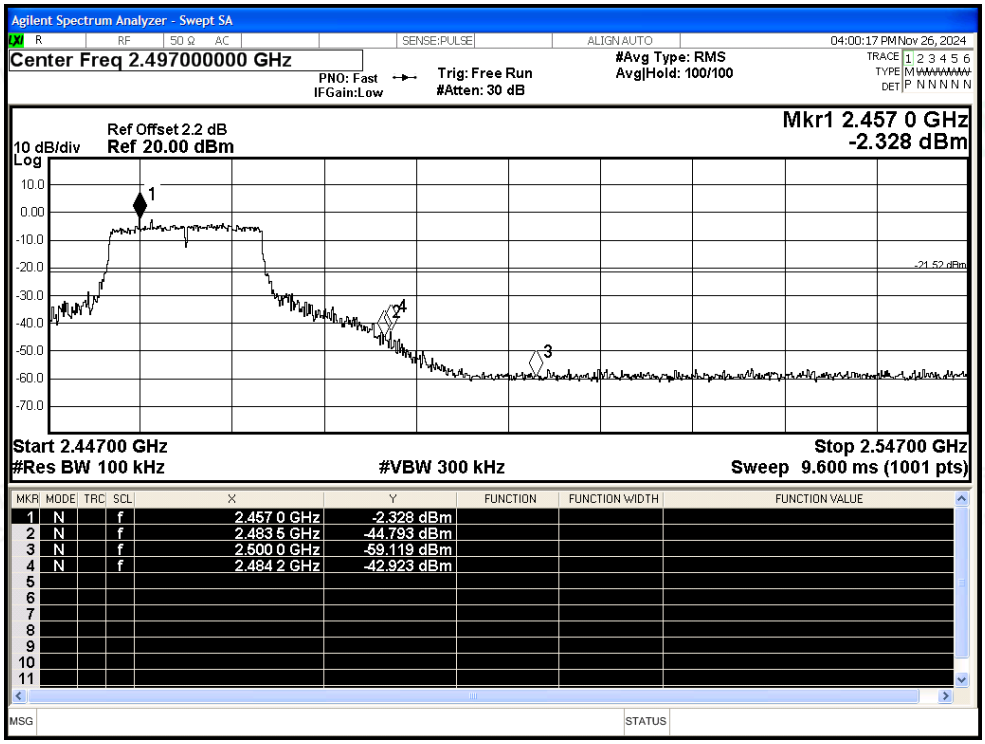

Band Edge NVNT n20 2412MHz Ant1 Ref

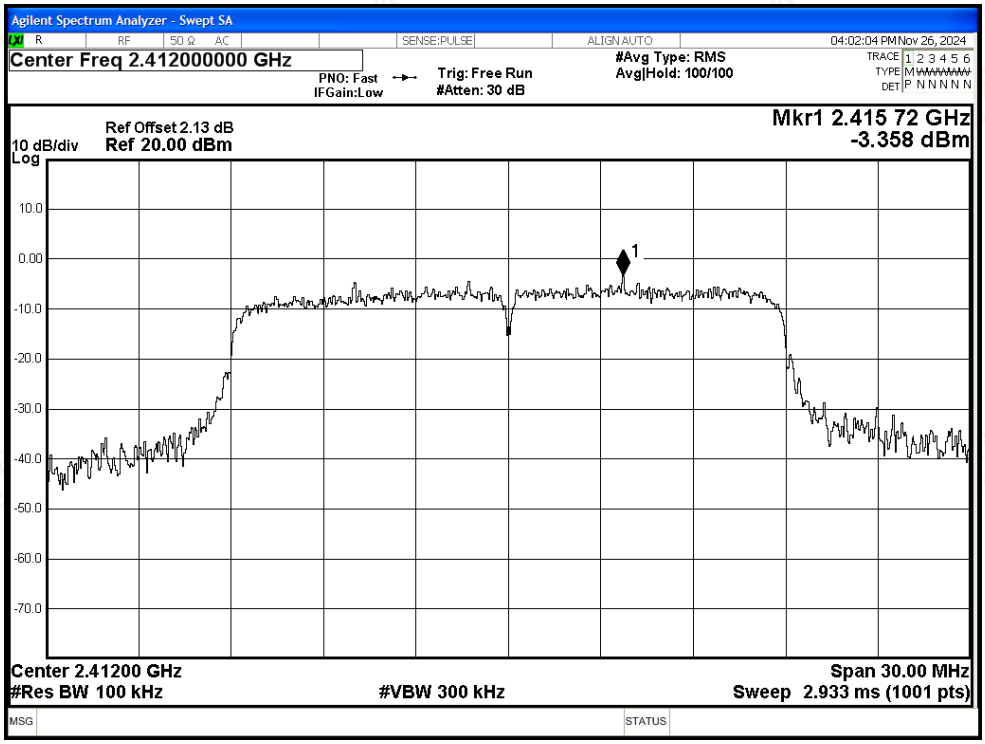

Band Edge NVNT n20 2412MHz Ant1 Emission

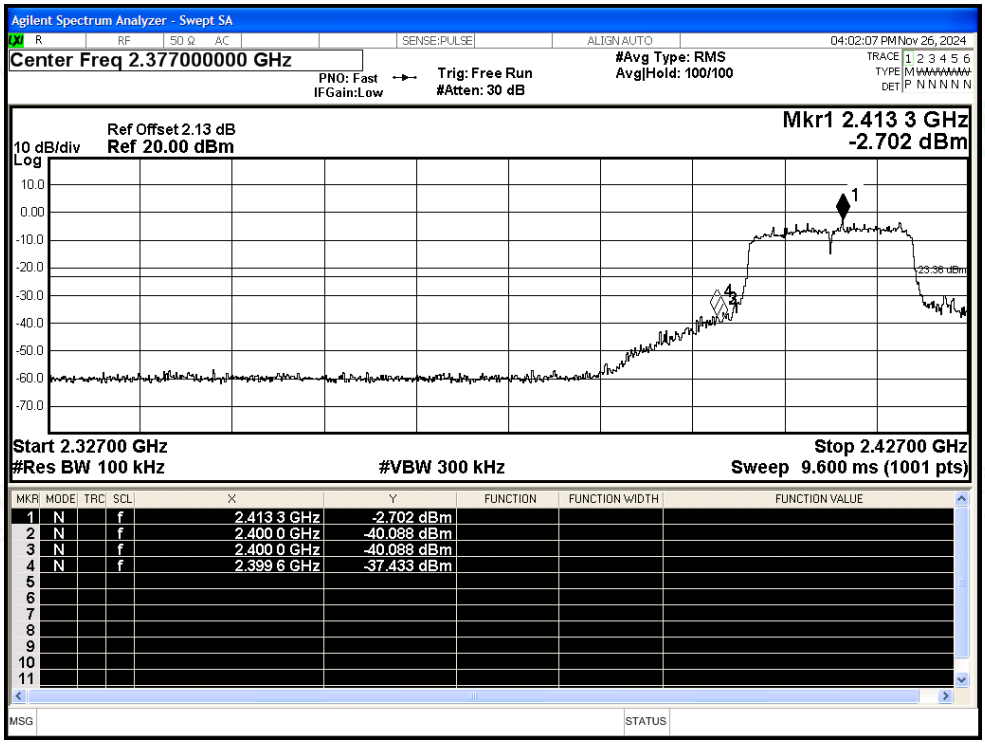

Band Edge NVNT n20 2462MHz Ant1 Ref

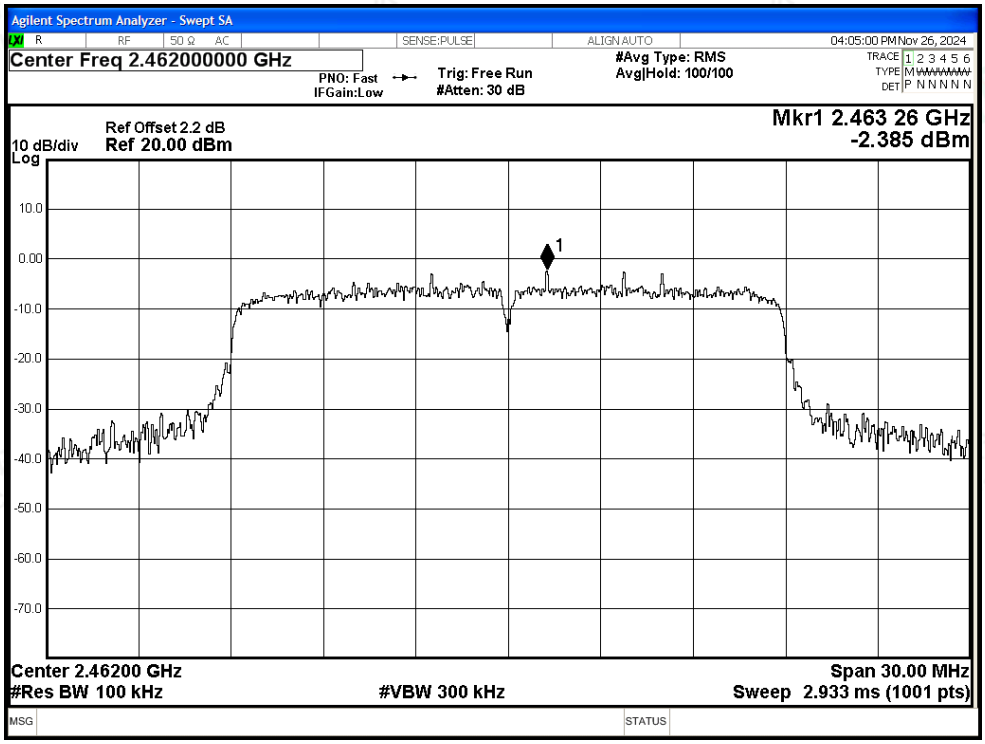

Band Edge NVNT n20 2462MHz Ant1 Emission

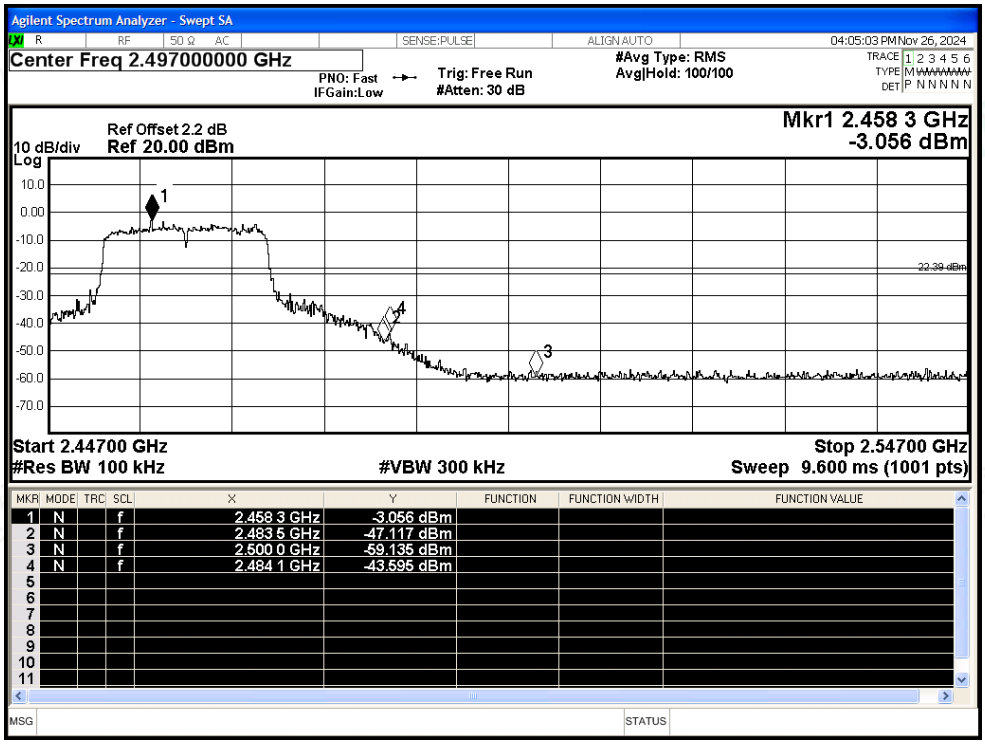

Band Edge NVNT n40 2422MHz Ant1 Ref

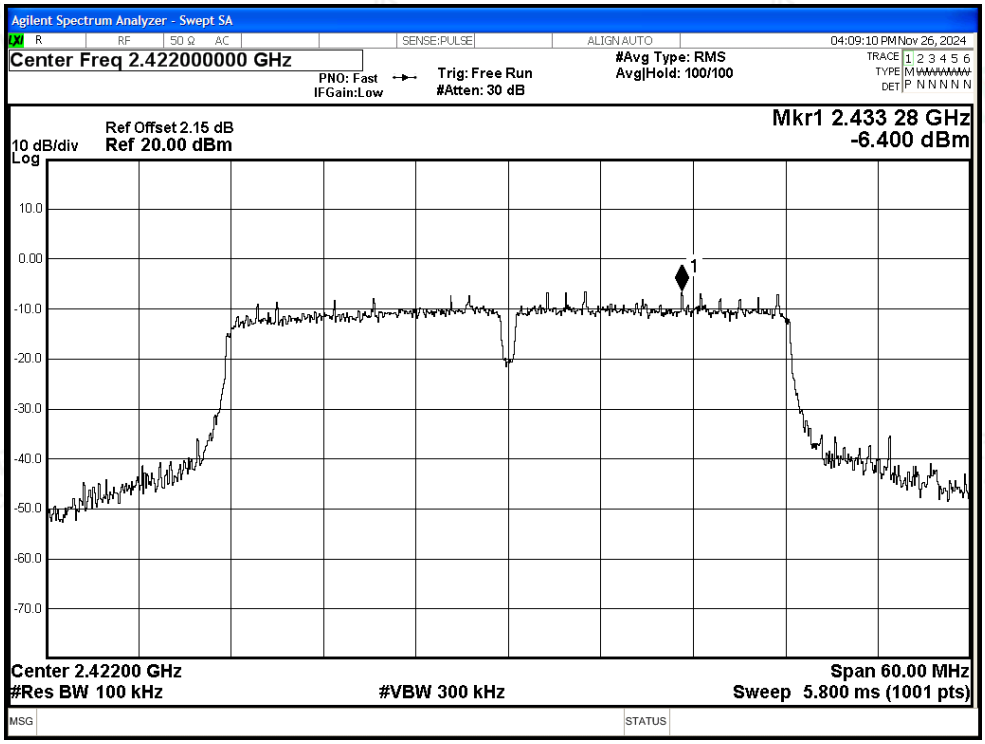

Band Edge NVNT n40 2422MHz Ant1 Emission

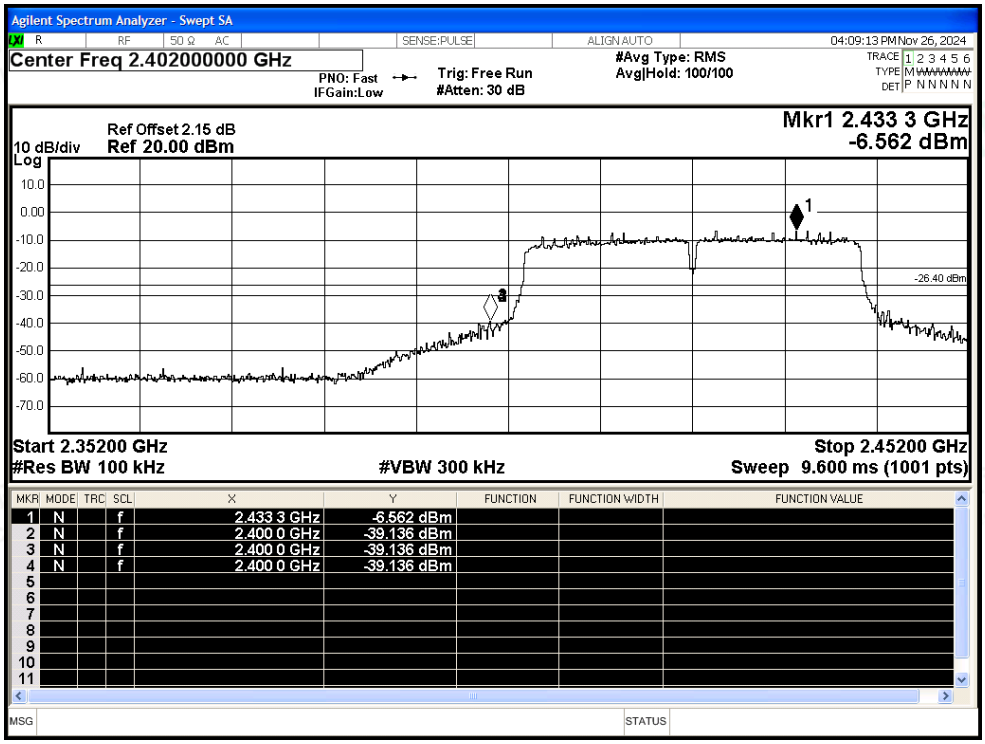

Band Edge NVNT n40 2452MHz Ant1 Ref

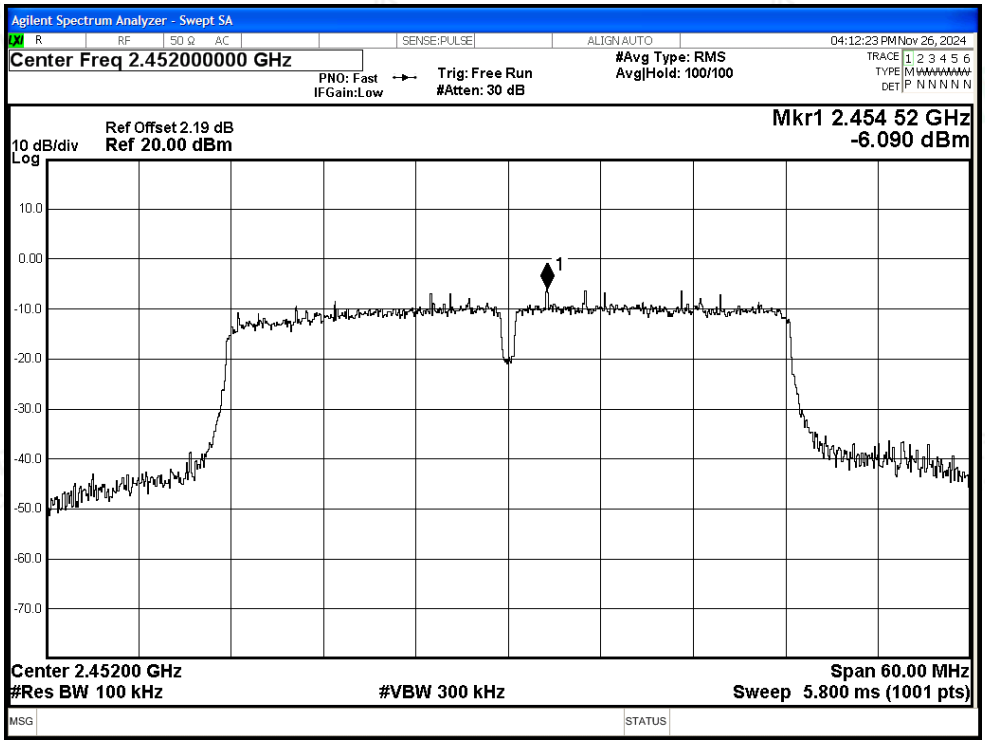

Band Edge NVNT n40 2452MHz Ant1 Emission

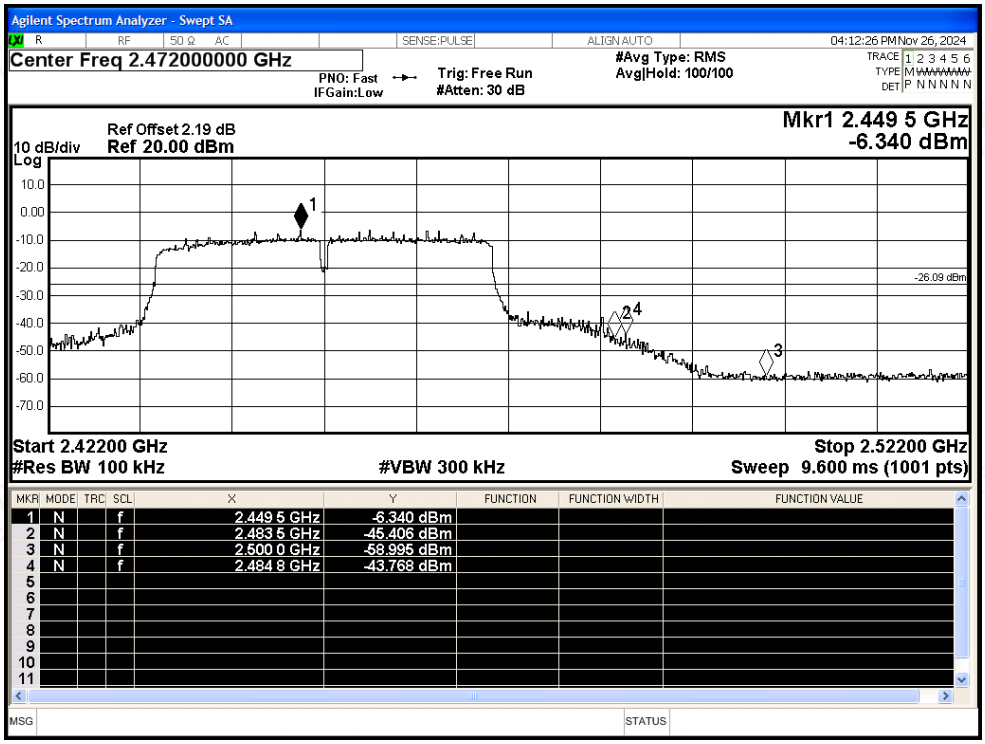

C.5 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-53.43	-20	Pass
NVNT	b	2437	Ant1	-51.6	-20	Pass
NVNT	b	2462	Ant1	-51.53	-20	Pass
NVNT	g	2412	Ant1	-45.87	-20	Pass
NVNT	g	2437	Ant1	-44.35	-20	Pass
NVNT	g	2462	Ant1	-44.59	-20	Pass
NVNT	n20	2412	Ant1	-42.81	-20	Pass
NVNT	n20	2437	Ant1	-43.64	-20	Pass
NVNT	n20	2462	Ant1	-43.3	-20	Pass
NVNT	n40	2422	Ant1	-39.77	-20	Pass
NVNT	n40	2437	Ant1	-40.27	-20	Pass
NVNT	n40	2452	Ant1	-39.71	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

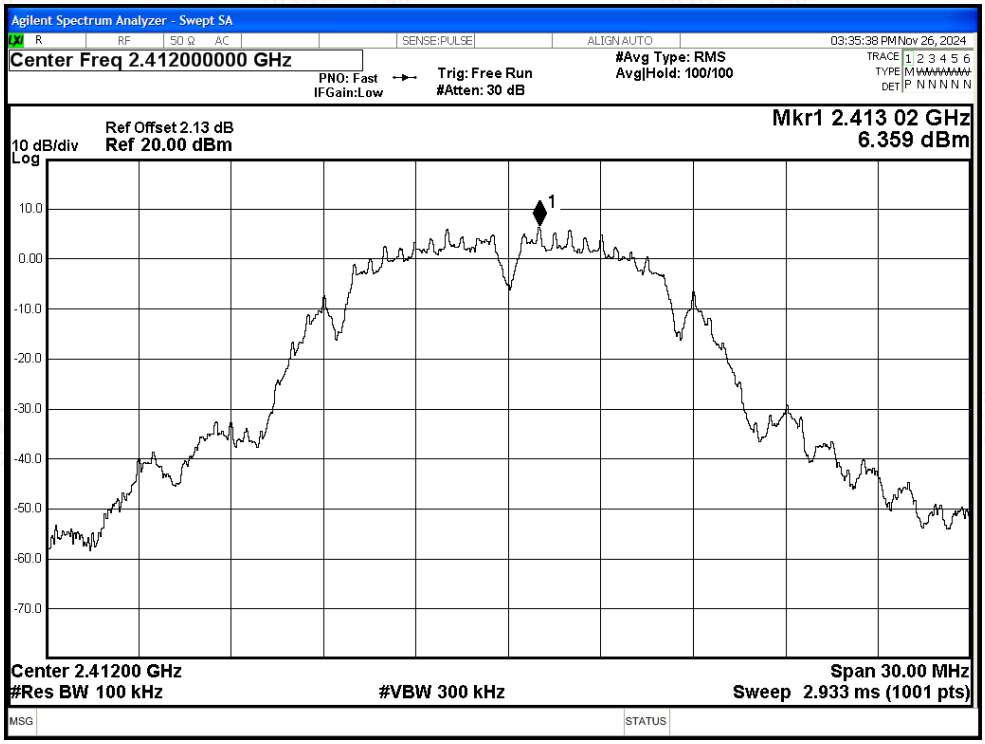

Tx. Spurious NVNT b 2412MHz Ant1 Emission

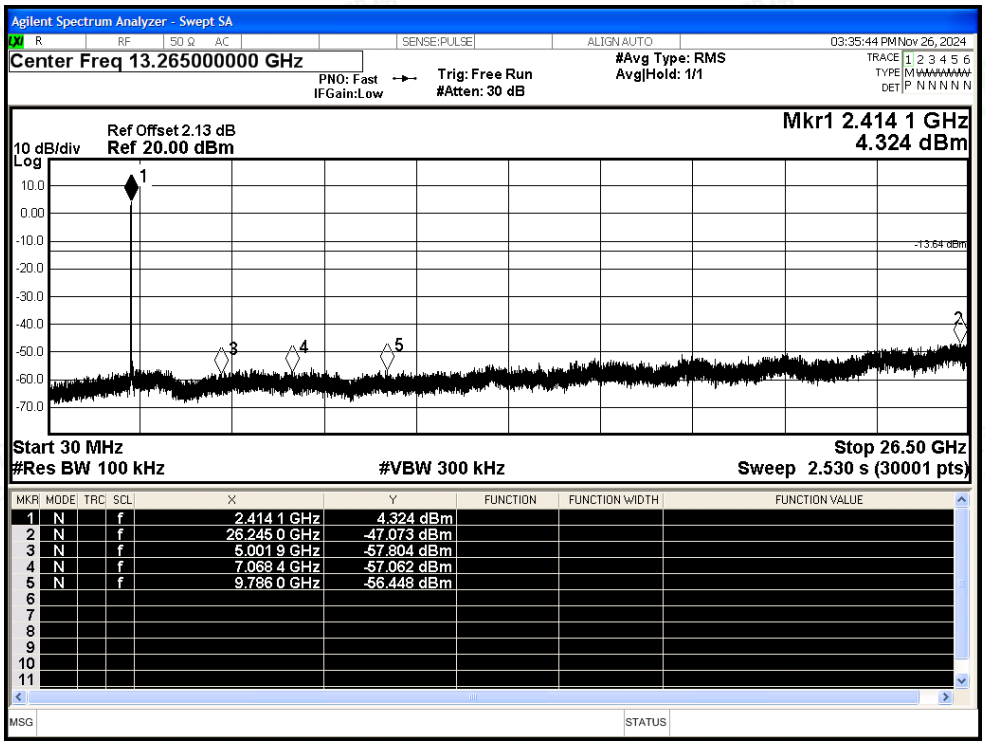

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.414 1 GHz	4.324 dBm			
2	N		f	26.245 0 GHz	-47.073 dBm			
3	N		f	5.001 9 GHz	-57.804 dBm			
4	N		f	7.068 4 GHz	-57.062 dBm			
5	N		f	9.786 0 GHz	-56.448 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT b 2437MHz Ant1 Ref

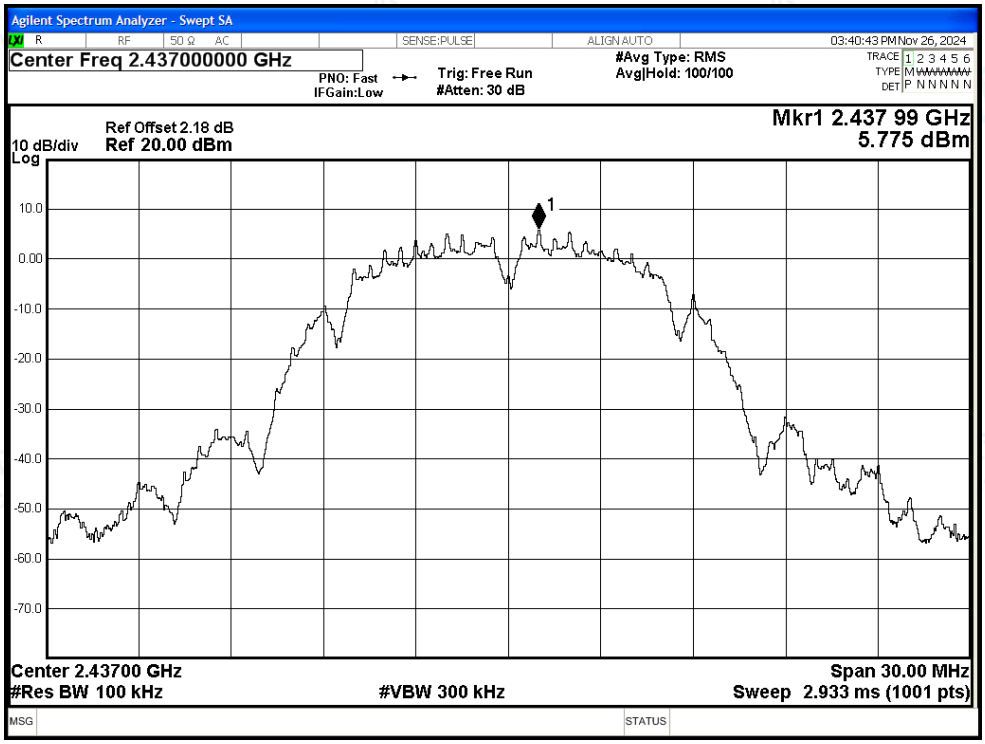

Tx. Spurious NVNT b 2437MHz Ant1 Emission

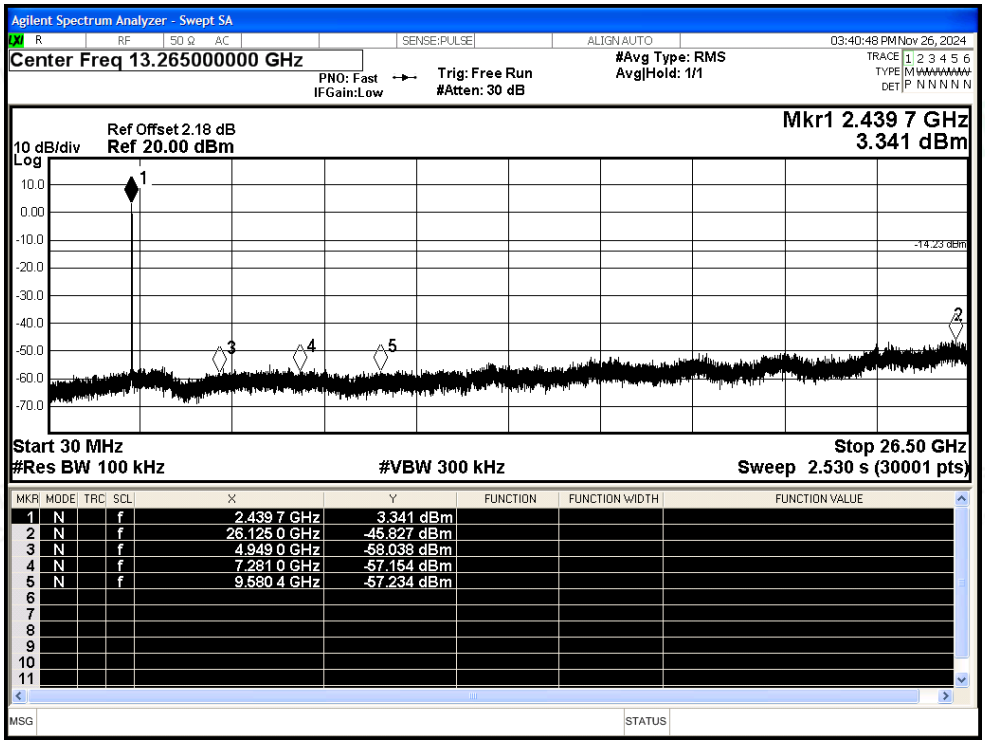

Tx. Spurious NVNT b 2462MHz Ant1 Ref

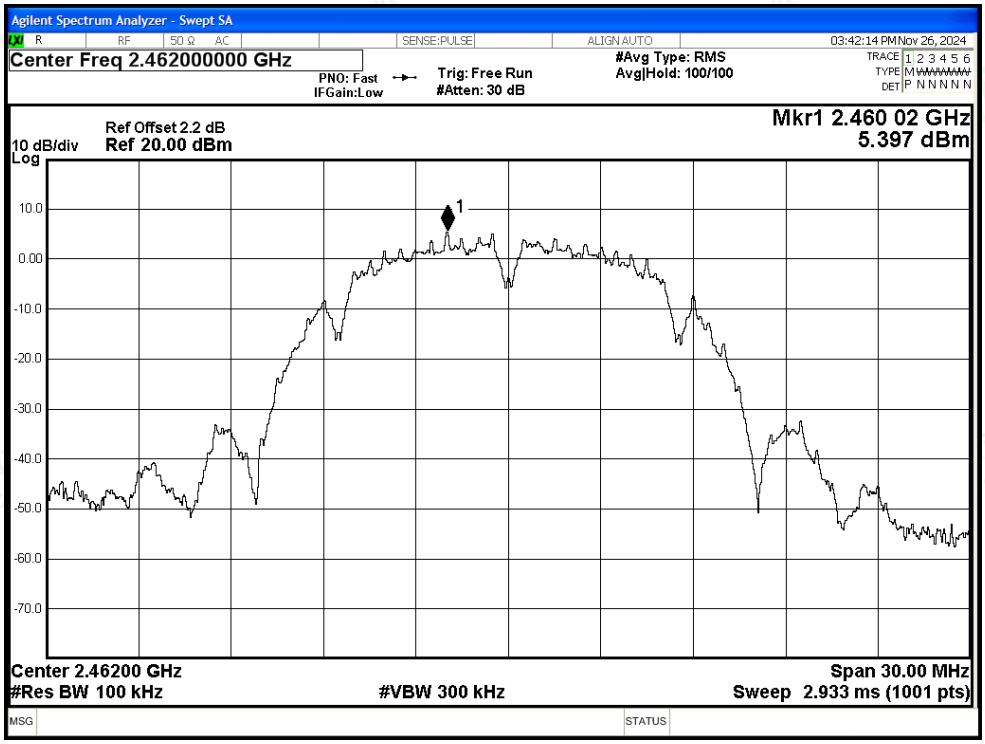

Tx. Spurious NVNT b 2462MHz Ant1 Emission

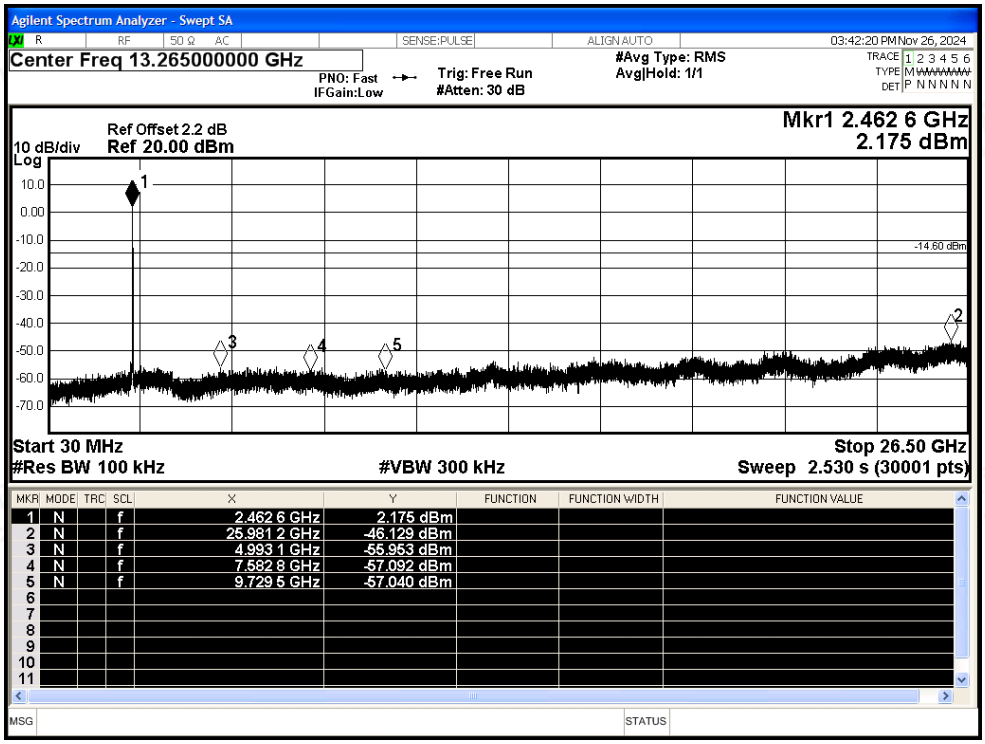

Tx. Spurious NVNT g 2412MHz Ant1 Ref

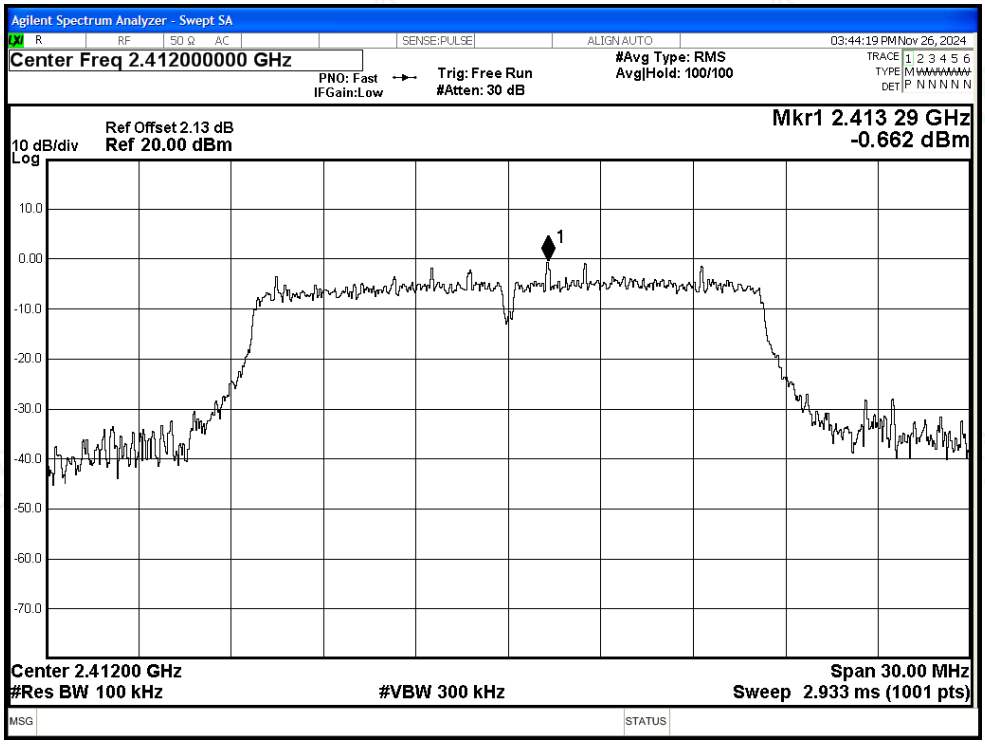

Tx. Spurious NVNT g 2412MHz Ant1 Emission

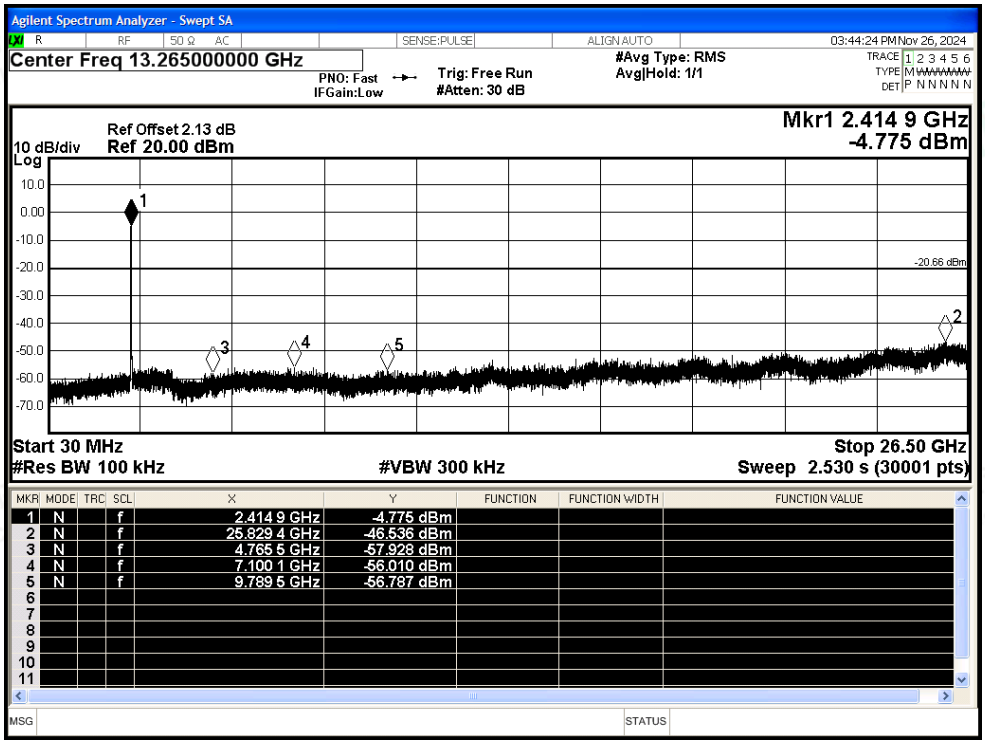

Tx. Spurious NVNT g 2437MHz Ant1 Ref

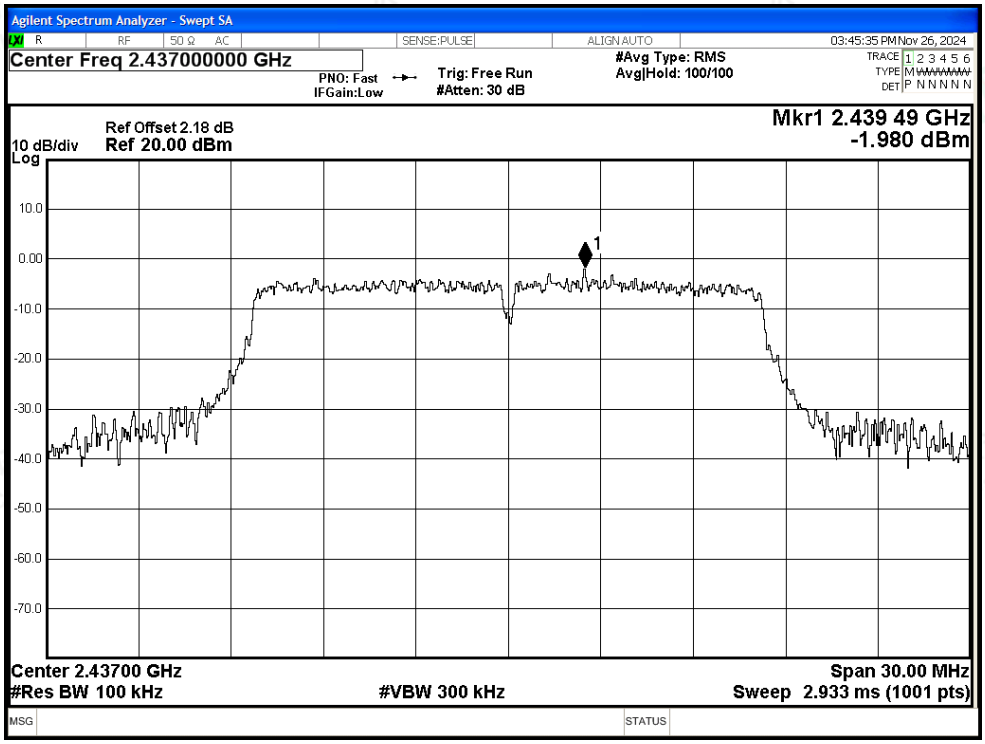

Tx. Spurious NVNT g 2437MHz Ant1 Emission

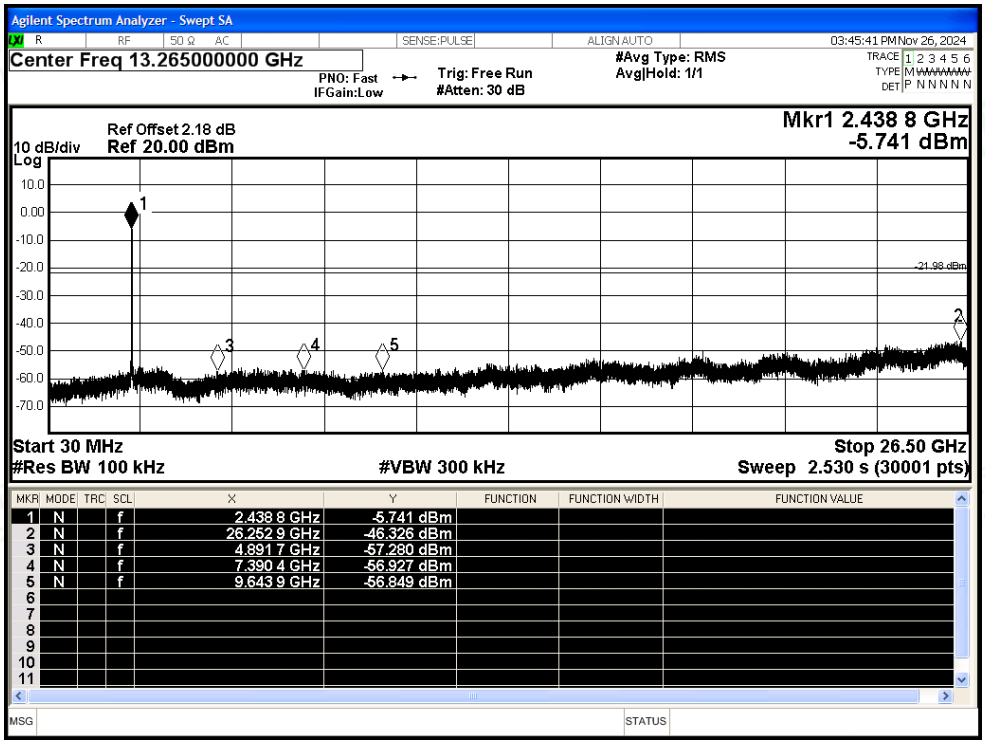

Tx. Spurious NVNT g 2462MHz Ant1 Ref

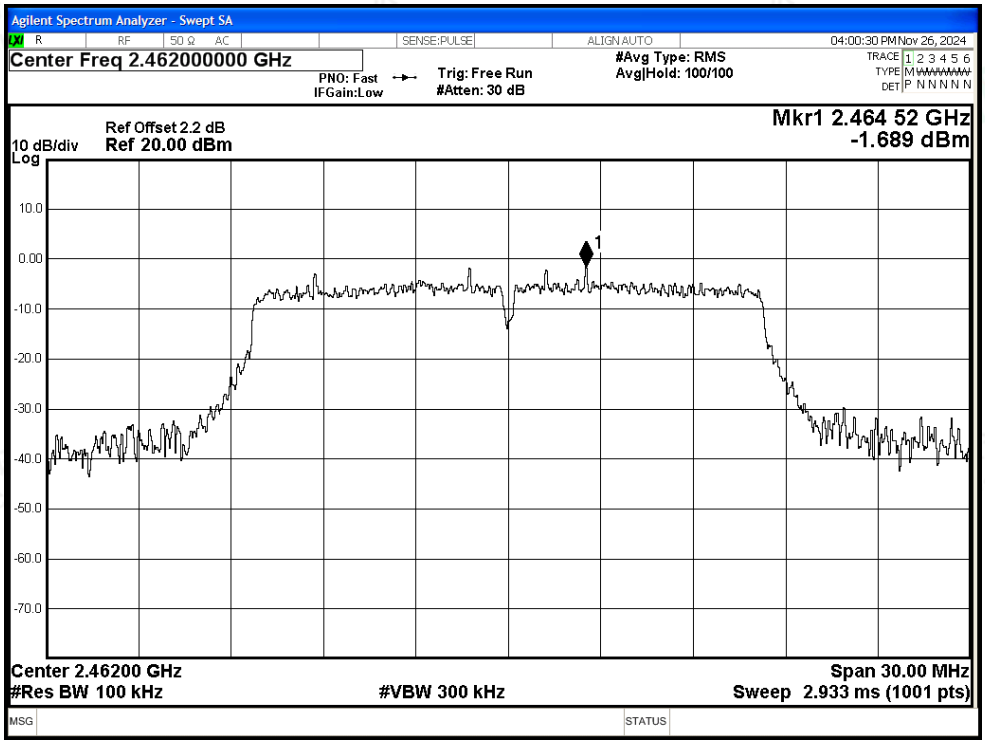

Tx. Spurious NVNT g 2462MHz Ant1 Emission

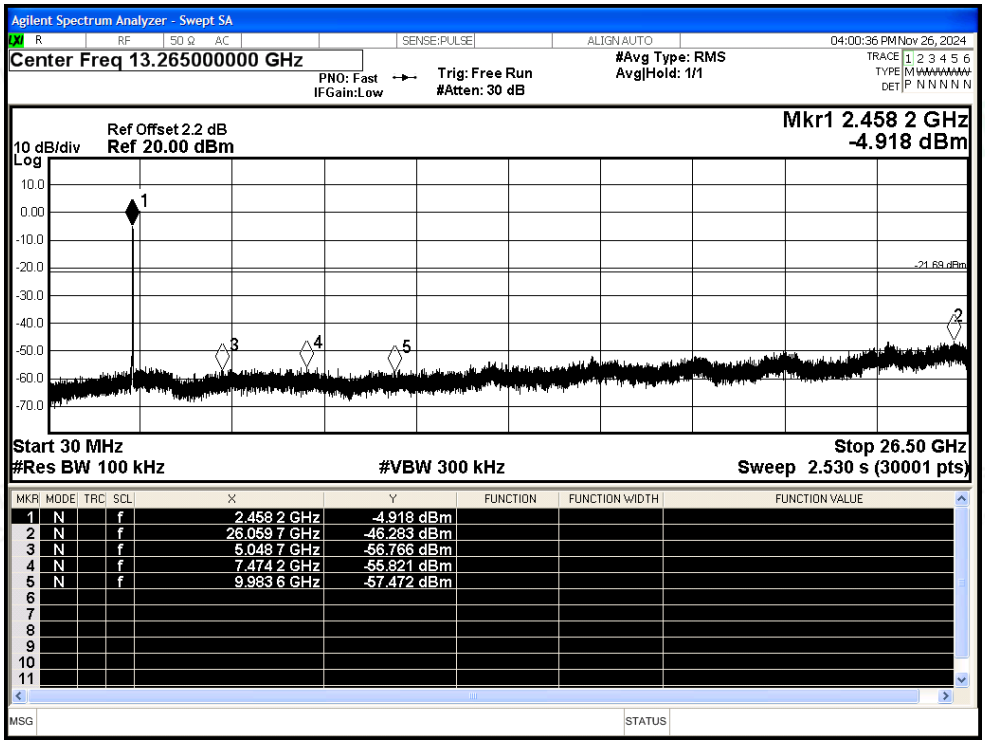

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.458 2 GHz	-4.918 dBm			
2	N		f	26.059 7 GHz	-46.283 dBm			
3	N		f	5.048 7 GHz	-56.766 dBm			
4	N		f	7.474 2 GHz	-55.821 dBm			
5	N		f	9.983 6 GHz	-57.472 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n20 2412MHz Ant1 Ref

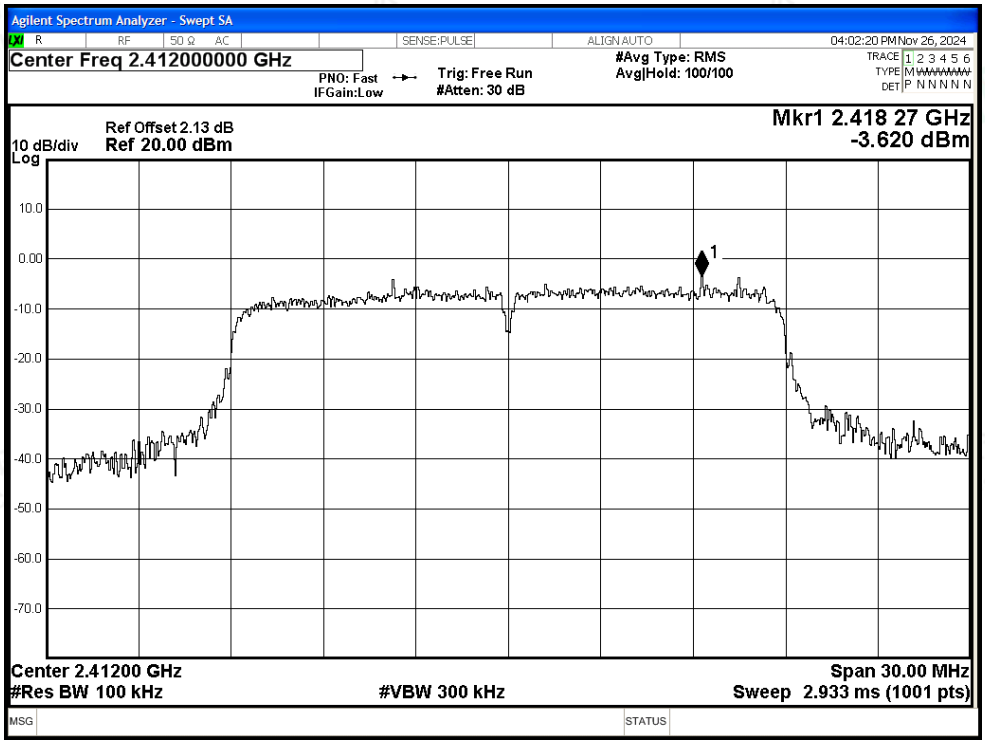

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

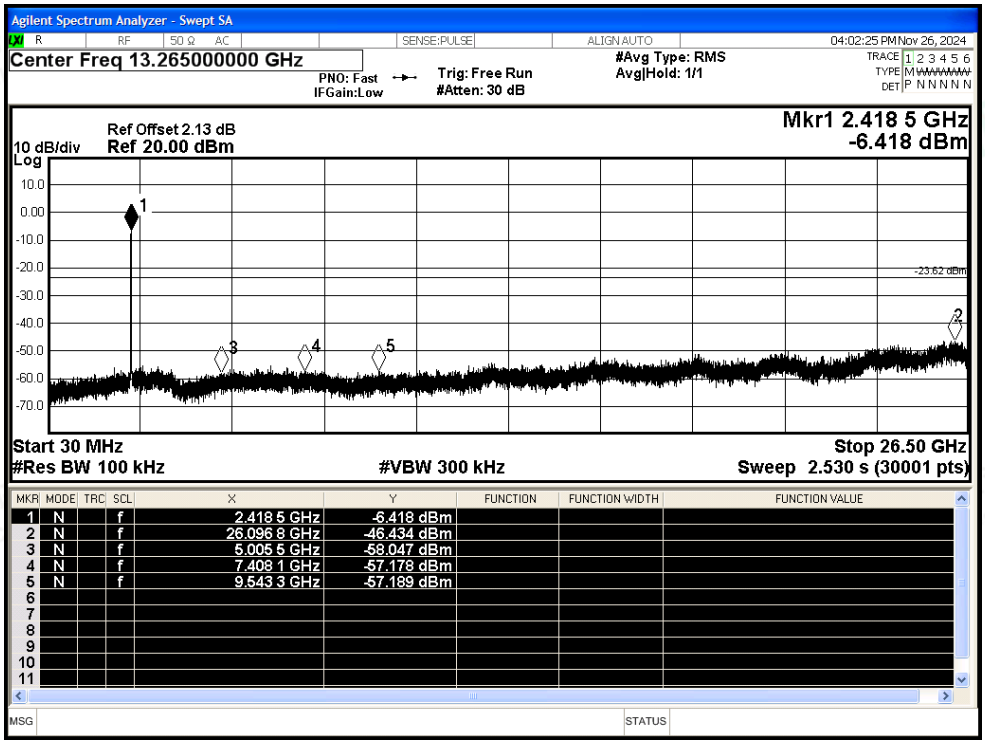

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.418 5 GHz	-6.418 dBm			
2	N		f	26.096 8 GHz	-46.434 dBm			
3	N		f	5.005 5 GHz	-58.047 dBm			
4	N		f	7.408 1 GHz	-57.178 dBm			
5	N		f	9.543 3 GHz	-57.189 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n20 2437MHz Ant1 Ref

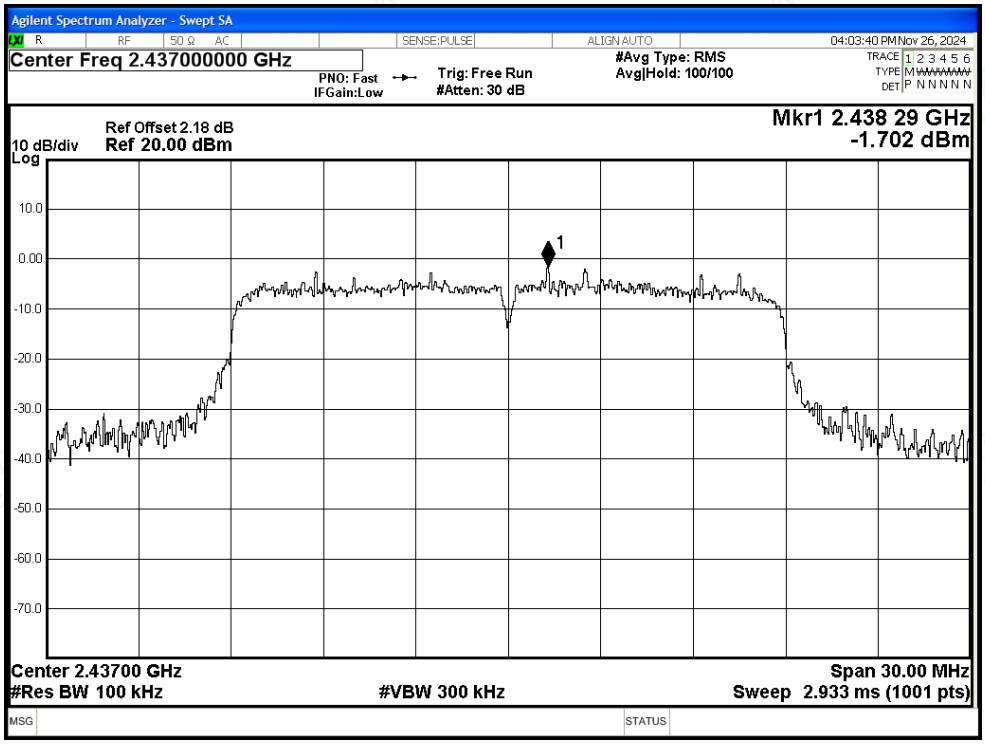

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

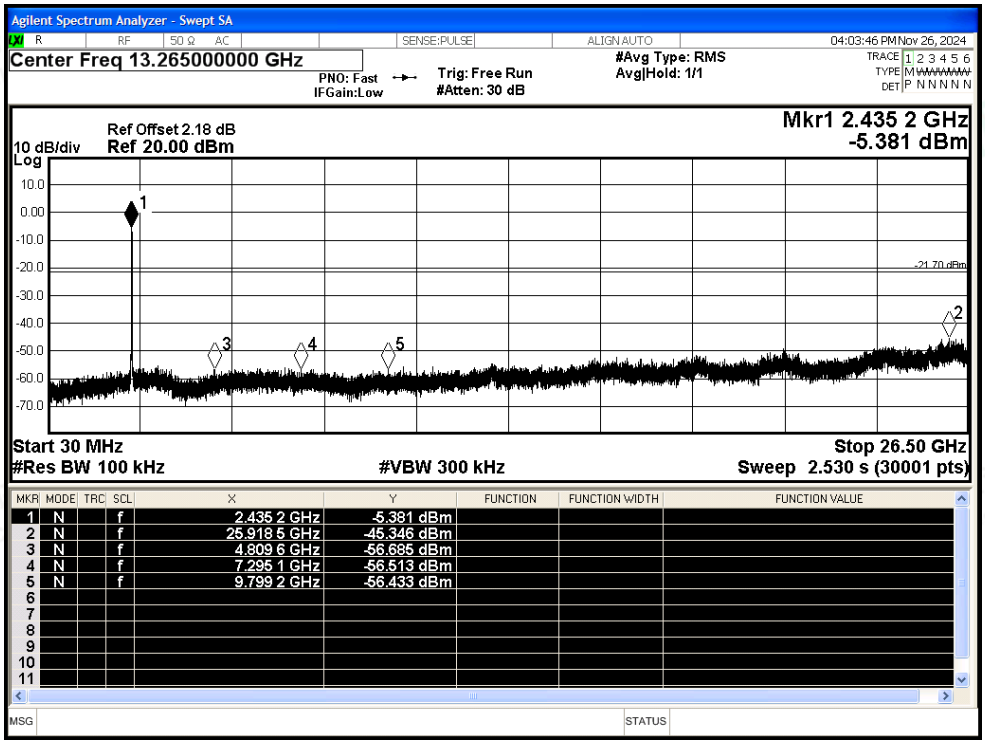

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.435 2 GHz	-5.381 dBm			
2	N		f	25.918 5 GHz	-45.346 dBm			
3	N		f	4.809 6 GHz	-56.685 dBm			
4	N		f	7.295 1 GHz	-56.513 dBm			
5	N		f	9.799 2 GHz	-56.433 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

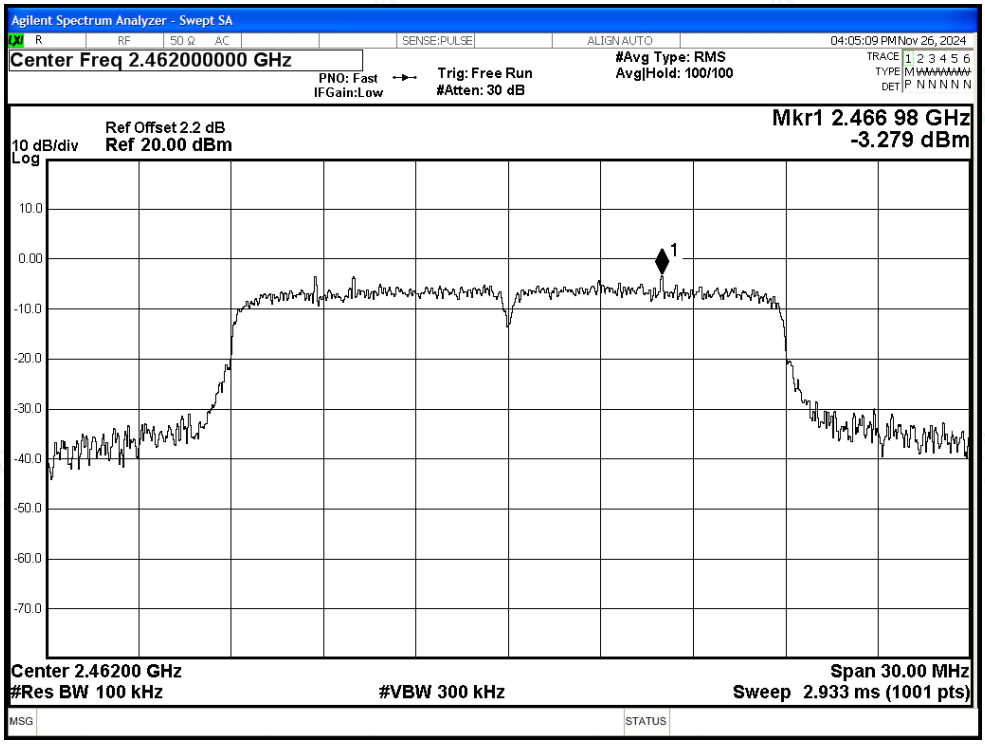

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

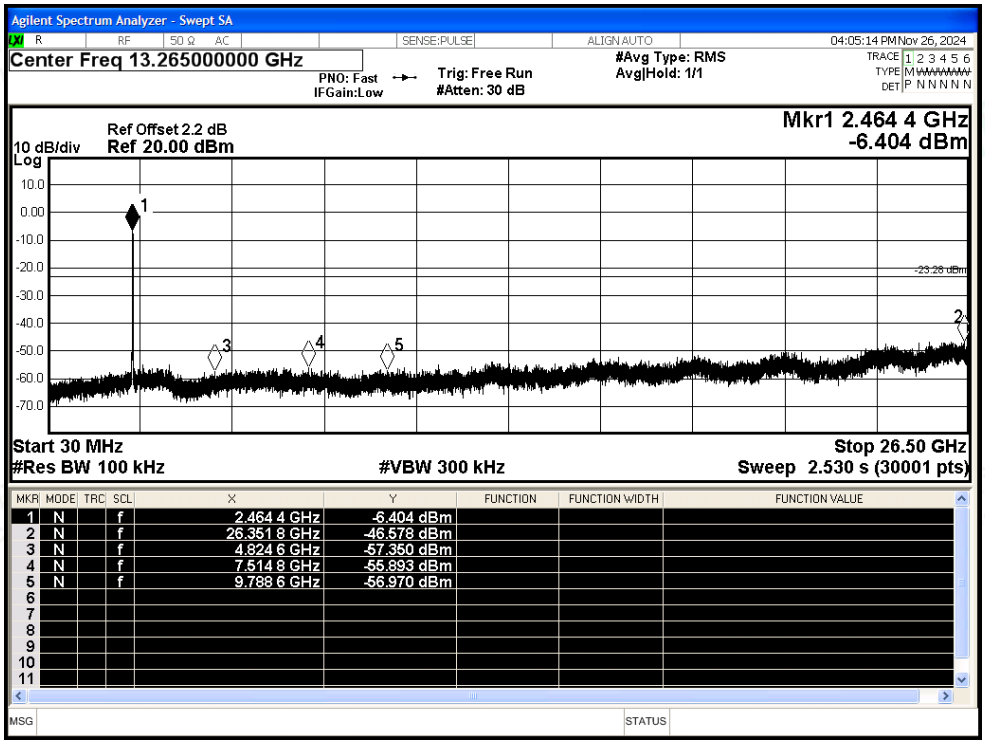

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.464 4 GHz	-6.404 dBm			
2	N		f	26.351 8 GHz	-46.578 dBm			
3	N		f	4.824 6 GHz	-57.350 dBm			
4	N		f	7.514 8 GHz	-55.893 dBm			
5	N		f	9.788 6 GHz	-56.970 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n40 2422MHz Ant1 Ref

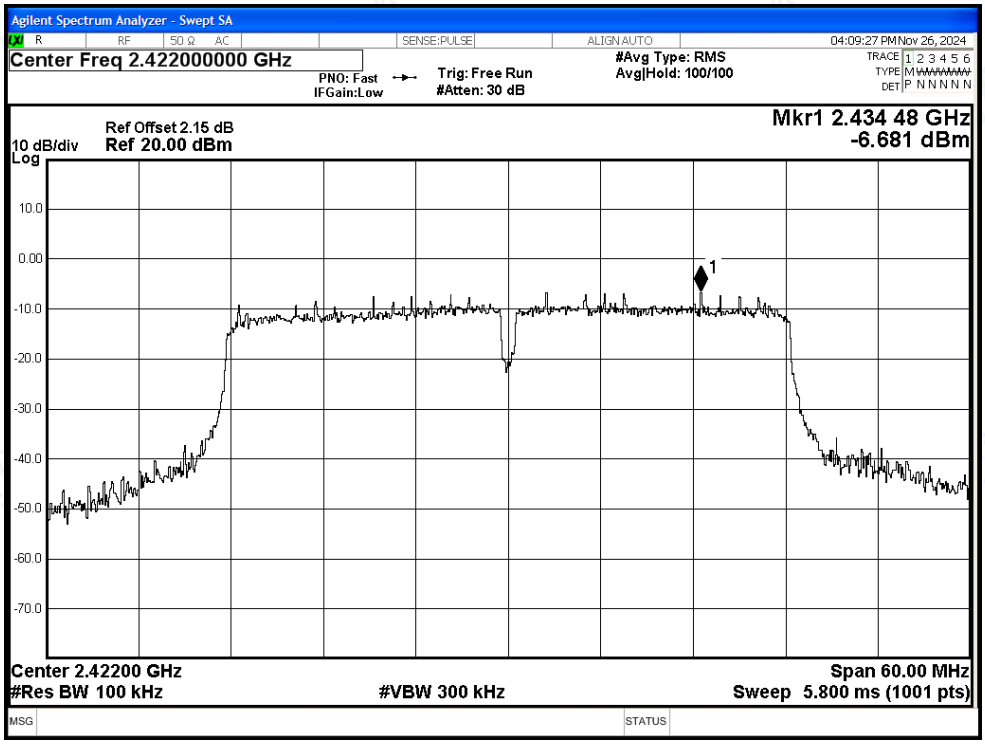

Tx. Spurious NVNT n40 2422MHz Ant1 Emission

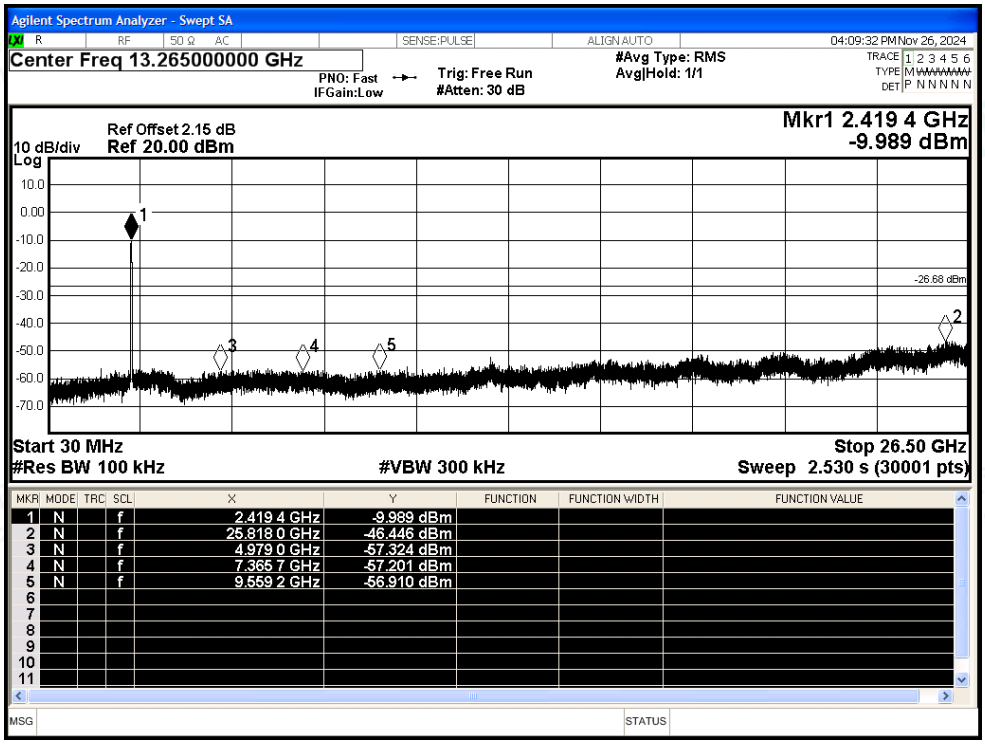

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.419 4 GHz	-9.989 dBm			
2	N		f	25.818 0 GHz	-46.446 dBm			
3	N		f	4.979 0 GHz	-57.324 dBm			
4	N		f	7.365 7 GHz	-57.201 dBm			
5	N		f	9.559 2 GHz	-56.910 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n40 2437MHz Ant1 Ref

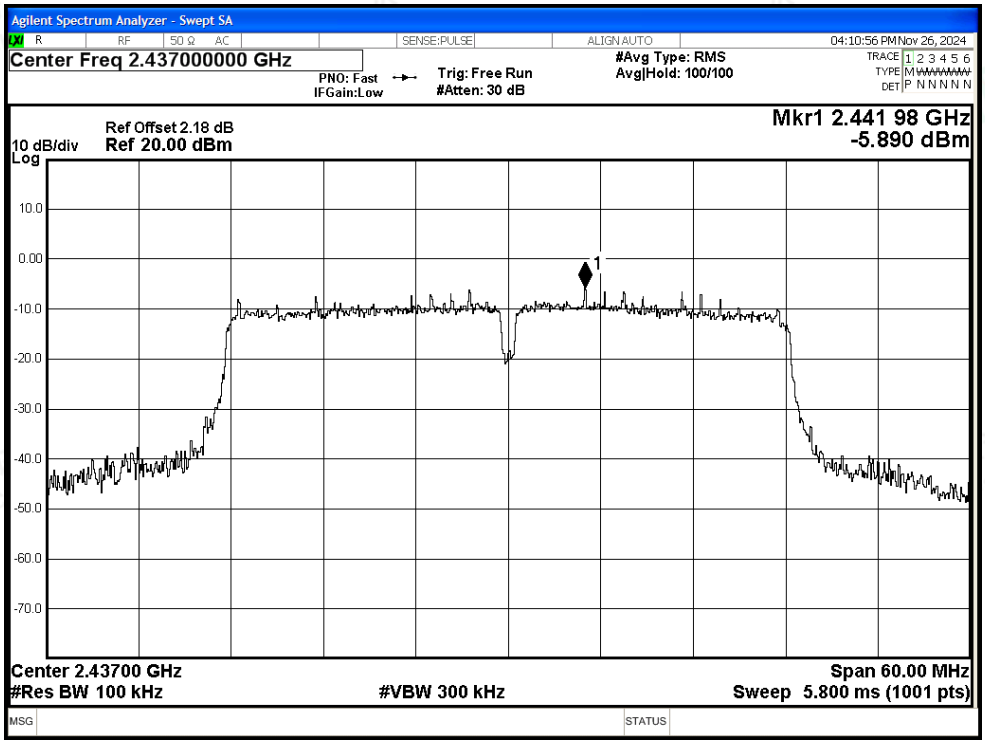

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

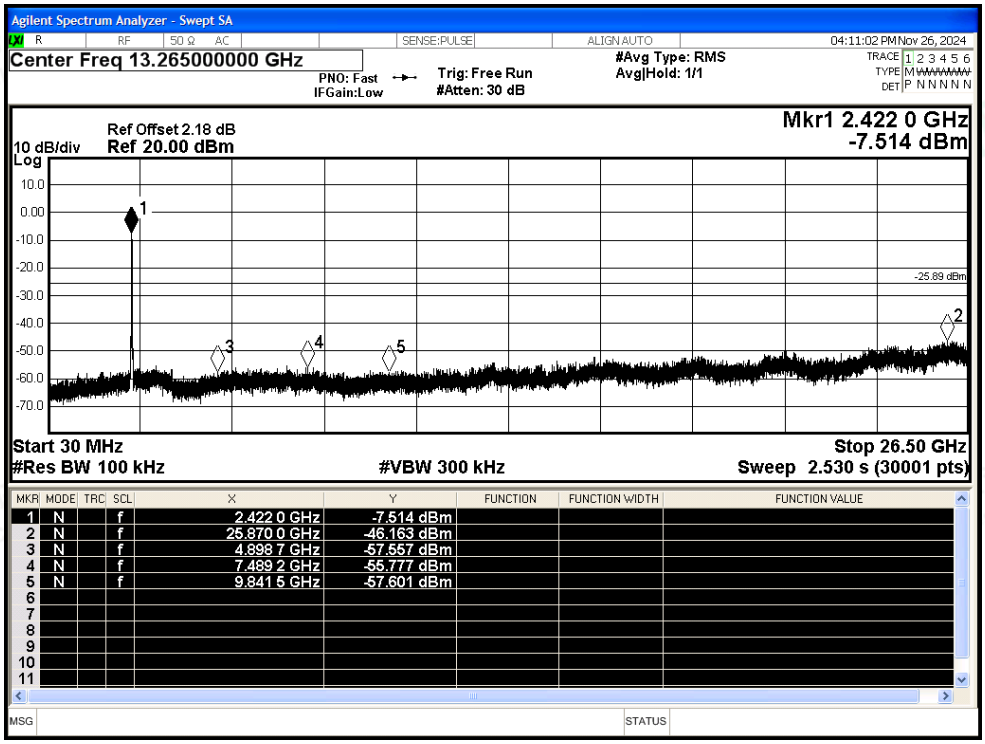

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.422 0 GHz	-7.514 dBm			
2	N		f	25.870 0 GHz	-46.163 dBm			
3	N		f	4.898 7 GHz	-57.557 dBm			
4	N		f	7.489 2 GHz	-55.777 dBm			
5	N		f	9.841 5 GHz	-57.601 dBm			
6								
7								
8								
9								
10								
11								

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

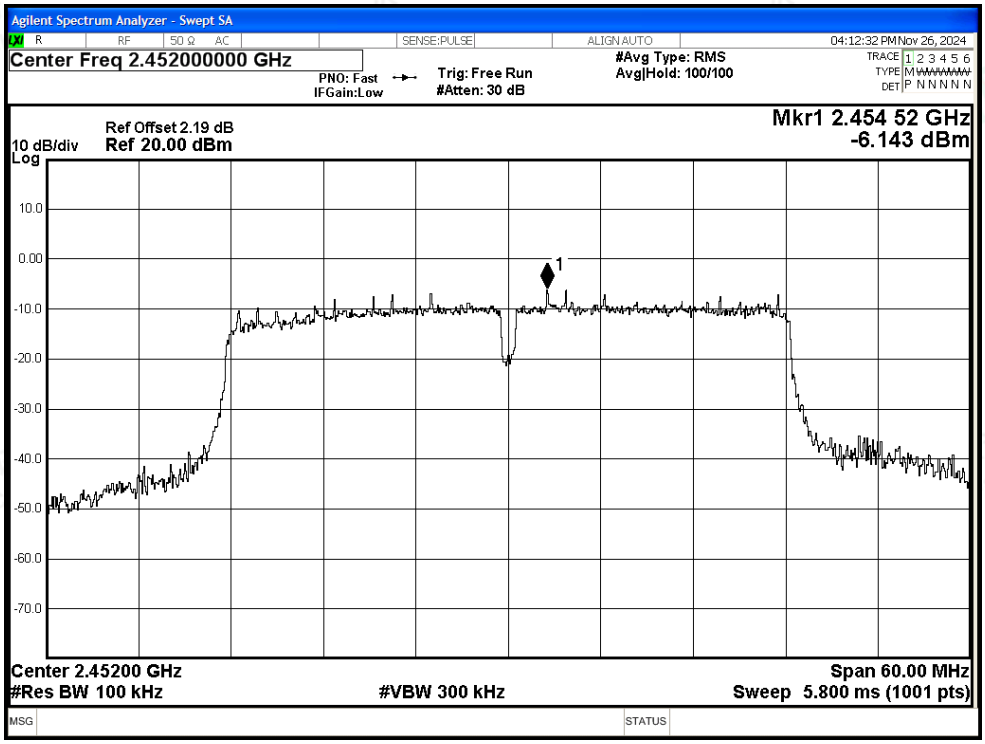

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

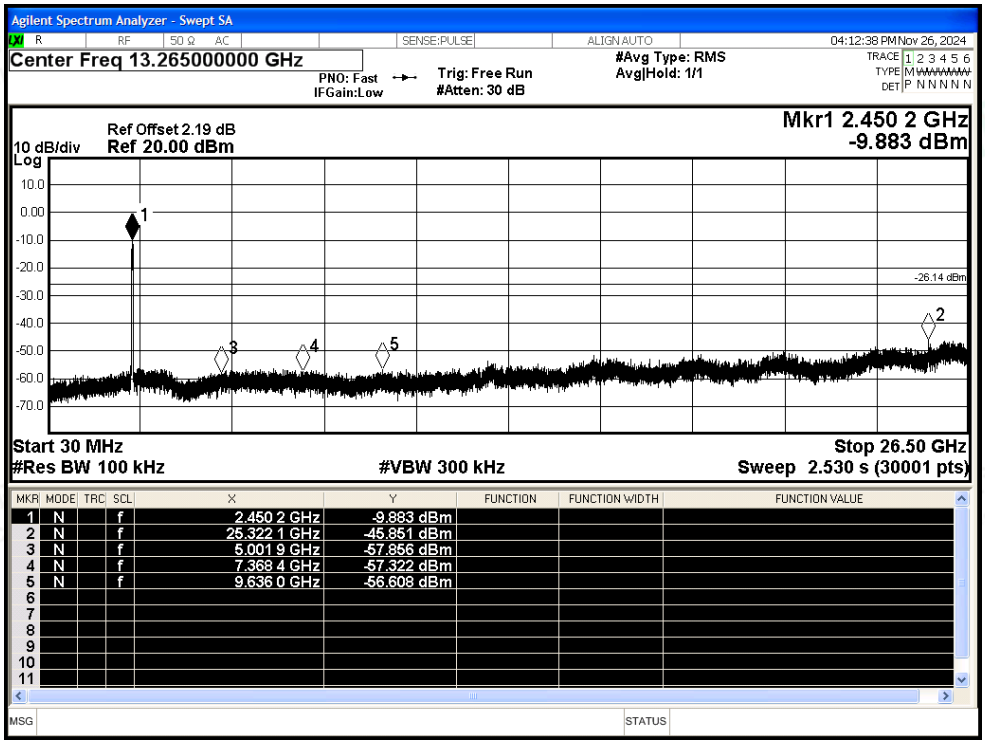

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N		f	2.450 2 GHz	-9.883 dBm			
2	N		f	25.322 1 GHz	-45.851 dBm			
3	N		f	5.001 9 GHz	-57.856 dBm			
4	N		f	7.368 4 GHz	-57.322 dBm			
5	N		f	9.636 0 GHz	-56.608 dBm			
6								
7								
8								
9								
10								
11								

C.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.13	0	0.15
NVNT	b	2437	Ant1	99.16	0	0.15
NVNT	b	2462	Ant1	99.16	0	0.15
NVNT	g	2412	Ant1	97.75	0.1	0.37
NVNT	g	2437	Ant1	97.75	0.1	0.37
NVNT	g	2462	Ant1	97.75	0.1	0.37
NVNT	n20	2412	Ant1	97.33	0.12	0.44
NVNT	n20	2437	Ant1	97.25	0.12	0.44
NVNT	n20	2462	Ant1	97.25	0.12	0.44
NVNT	n40	2422	Ant1	94.7	0.24	0.9
NVNT	n40	2437	Ant1	94.7	0.24	0.9
NVNT	n40	2452	Ant1	94.7	0.24	0.9

Test Graphs
Duty Cycle NVNT b 2412MHz Ant1

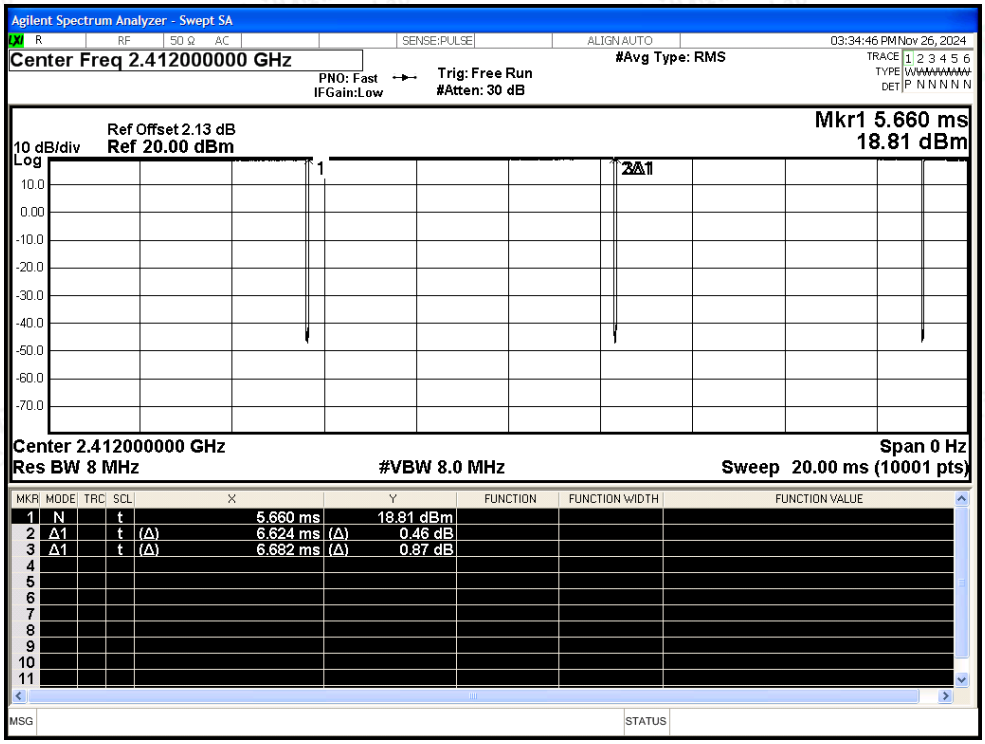

Duty Cycle NVNT b 2437MHz Ant1

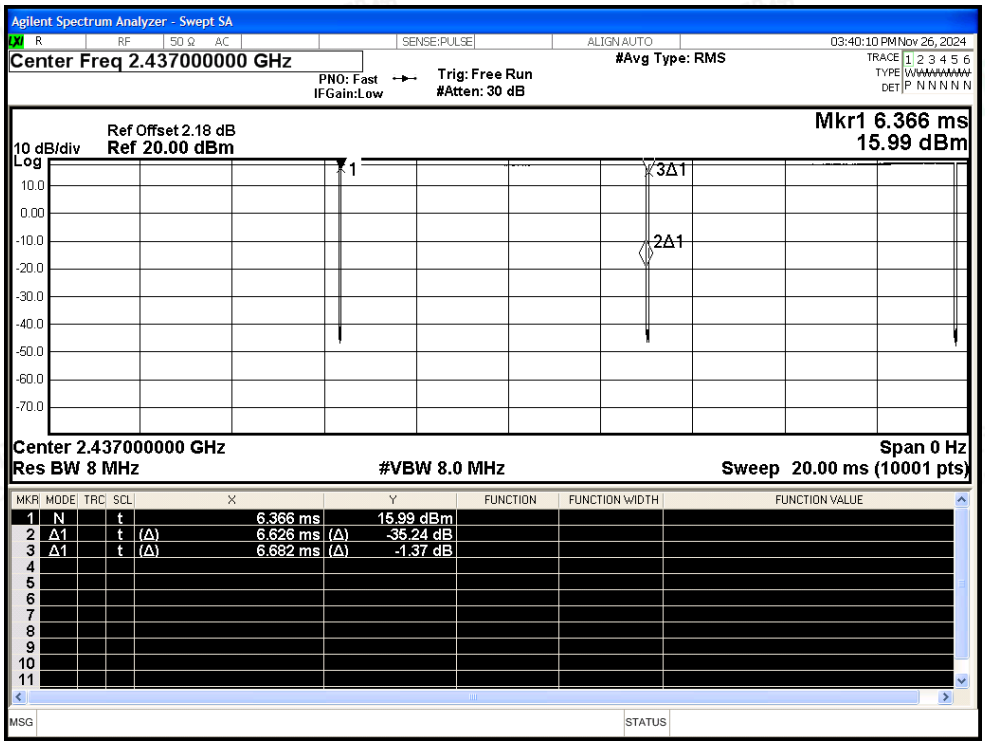

Duty Cycle NVNT b 2462MHz Ant1

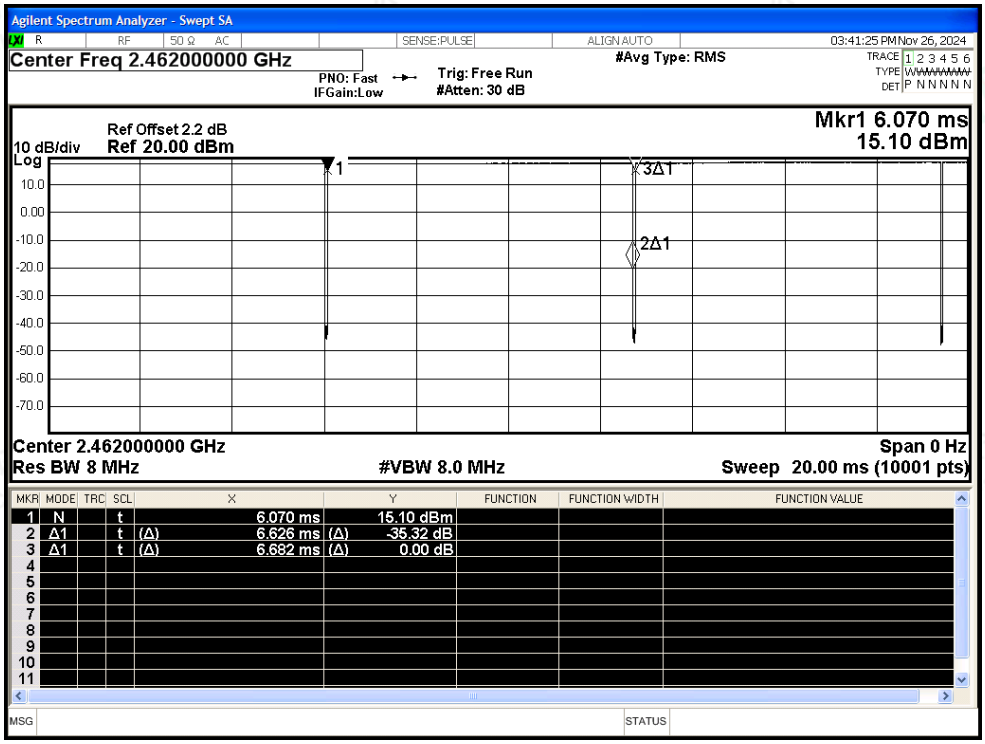

Duty Cycle NVNT g 2412MHz Ant1

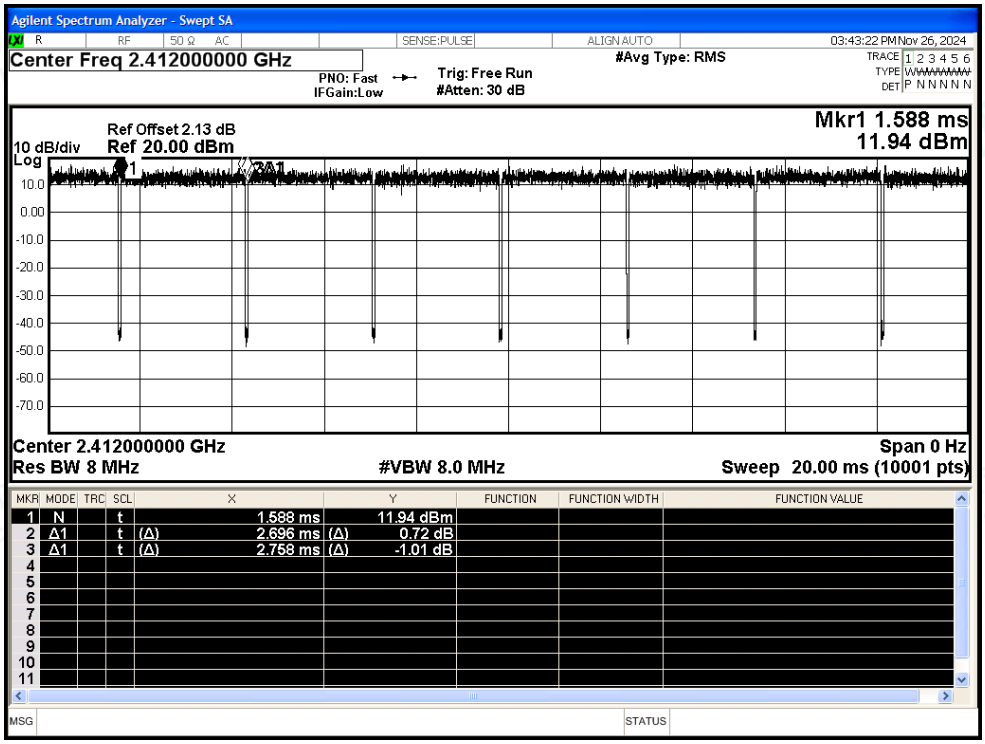

Duty Cycle NVNT g 2437MHz Ant1

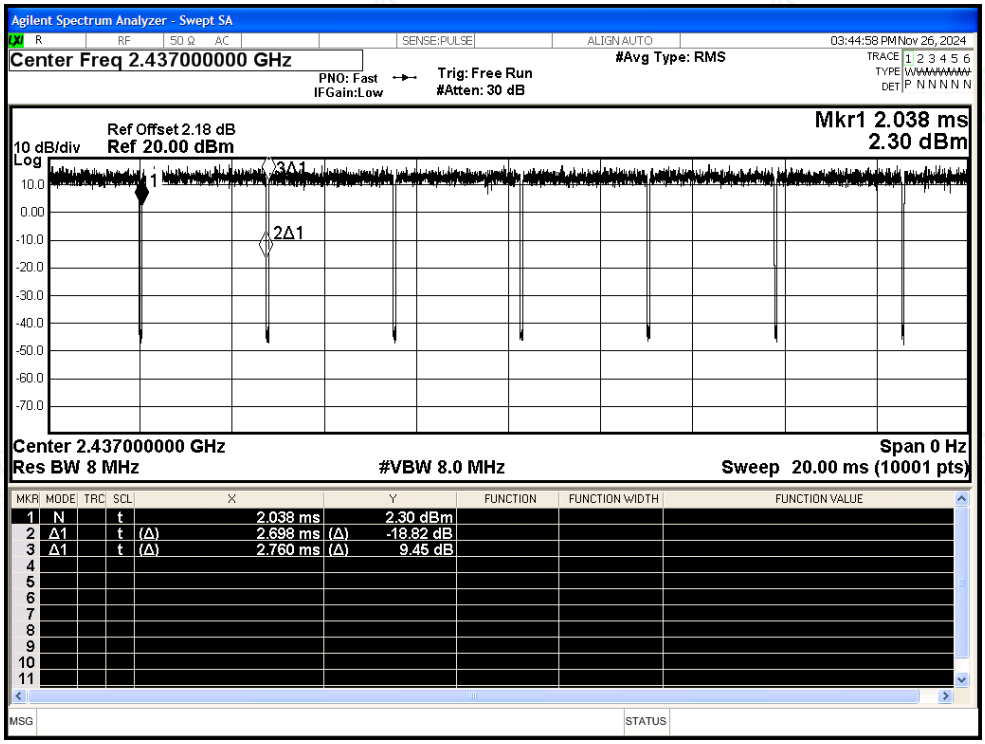

Duty Cycle NVNT g 2462MHz Ant1

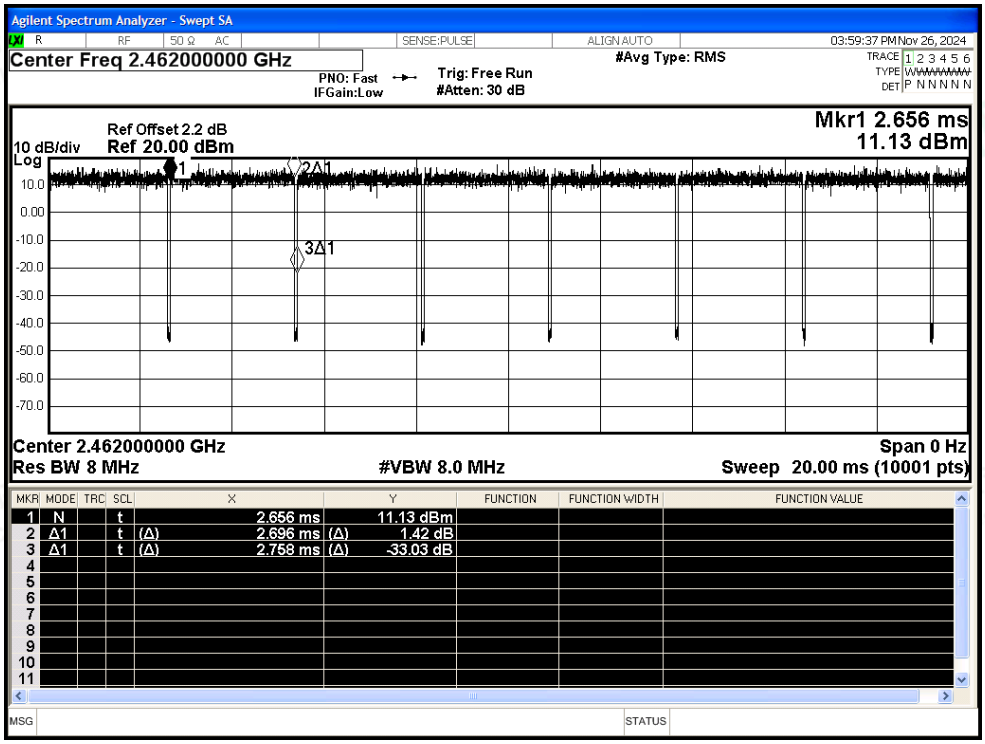

Duty Cycle NVNT n20 2412MHz Ant1

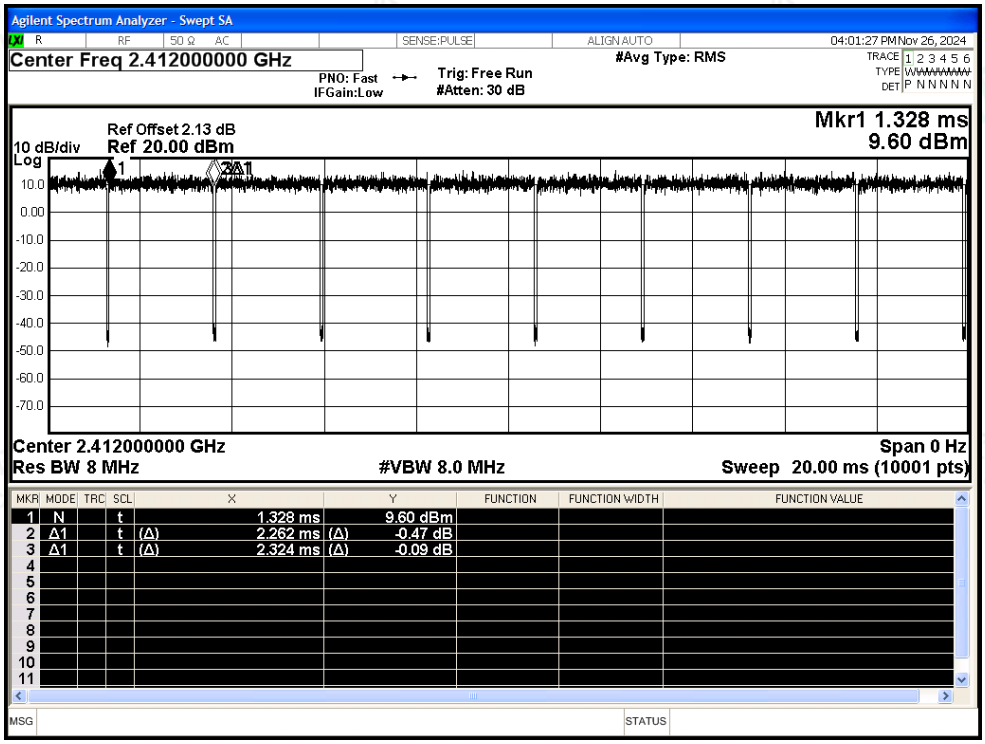

Duty Cycle NVNT n20 2437MHz Ant1

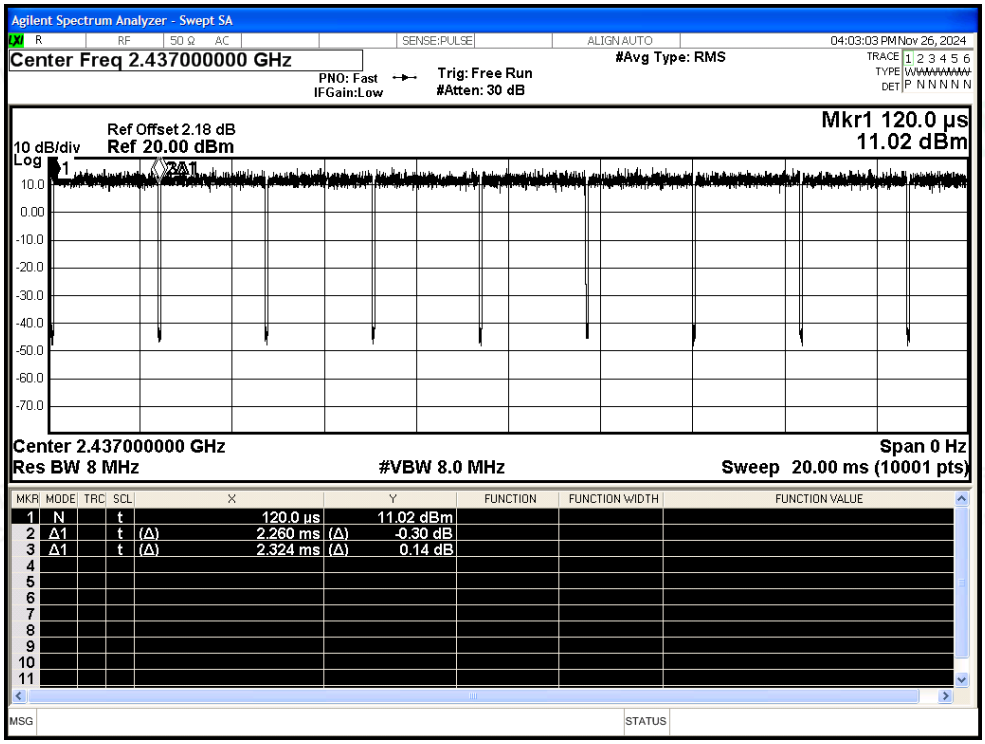

Duty Cycle NVNT n20 2462MHz Ant1

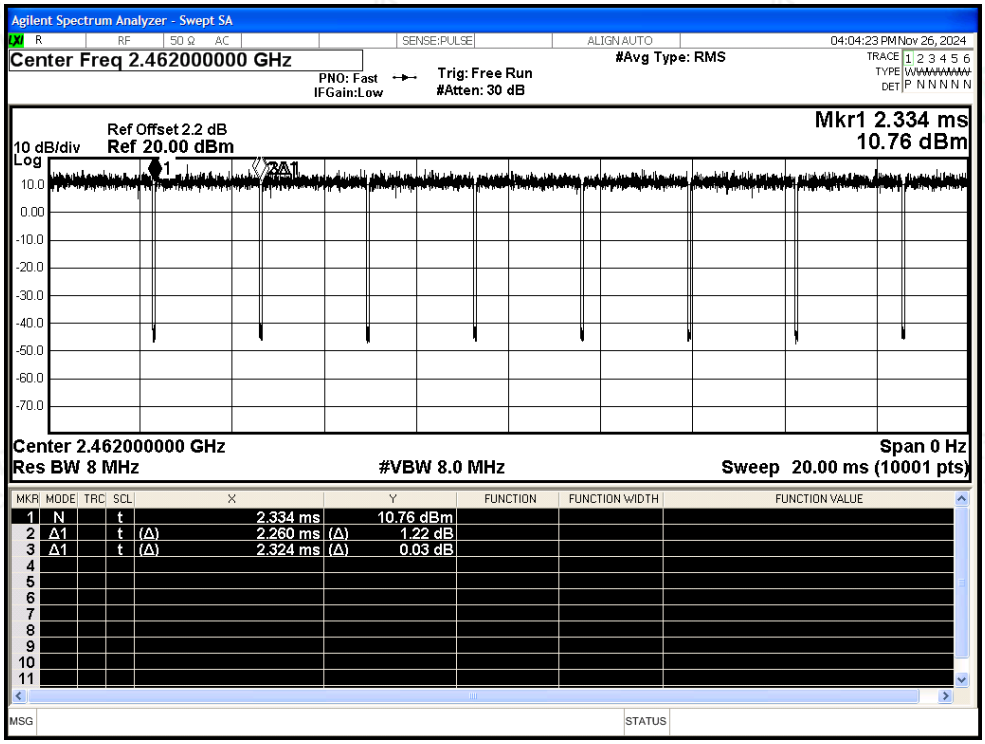

Duty Cycle NVNT n40 2422MHz Ant1

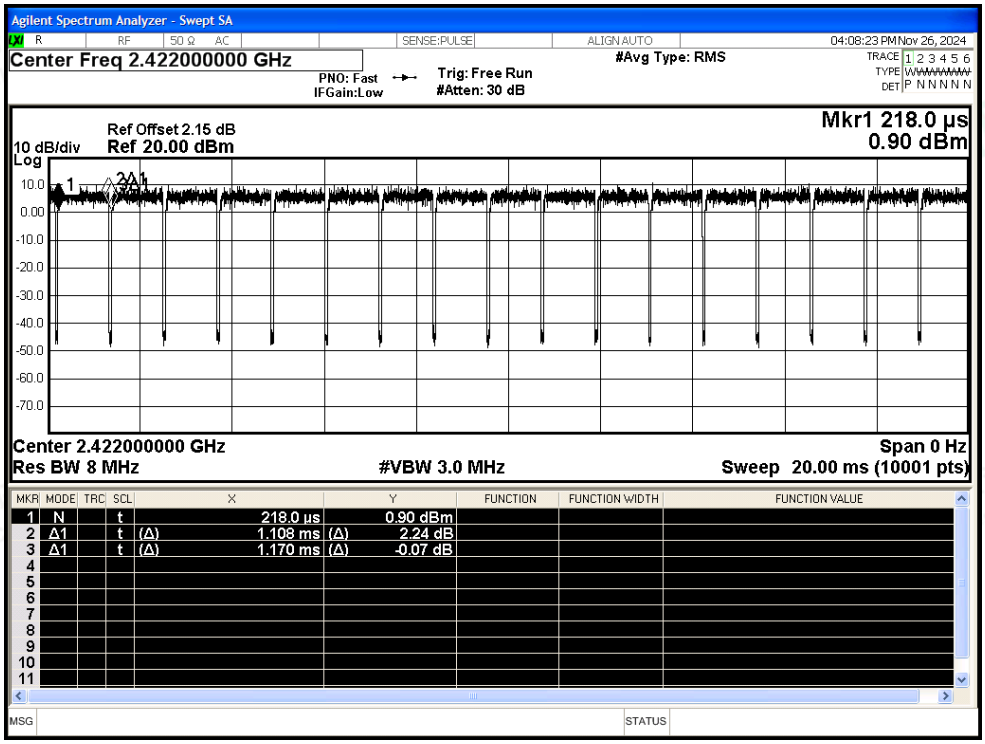

Duty Cycle NVNT n40 2437MHz Ant1

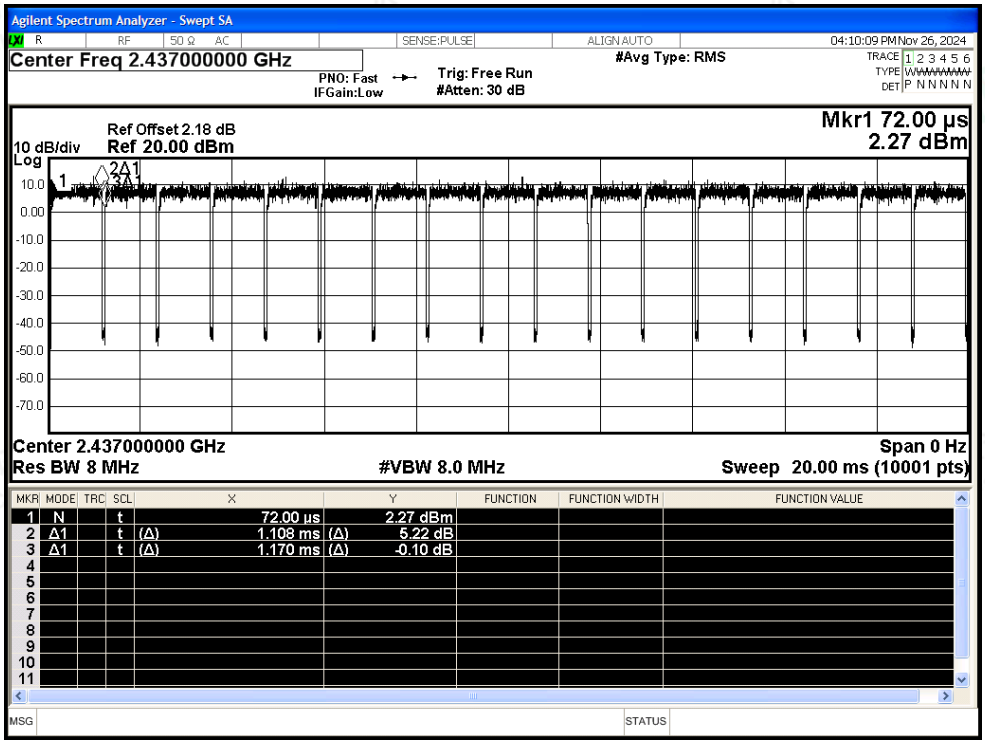

Duty Cycle NVNT n40 2452MHz Ant1

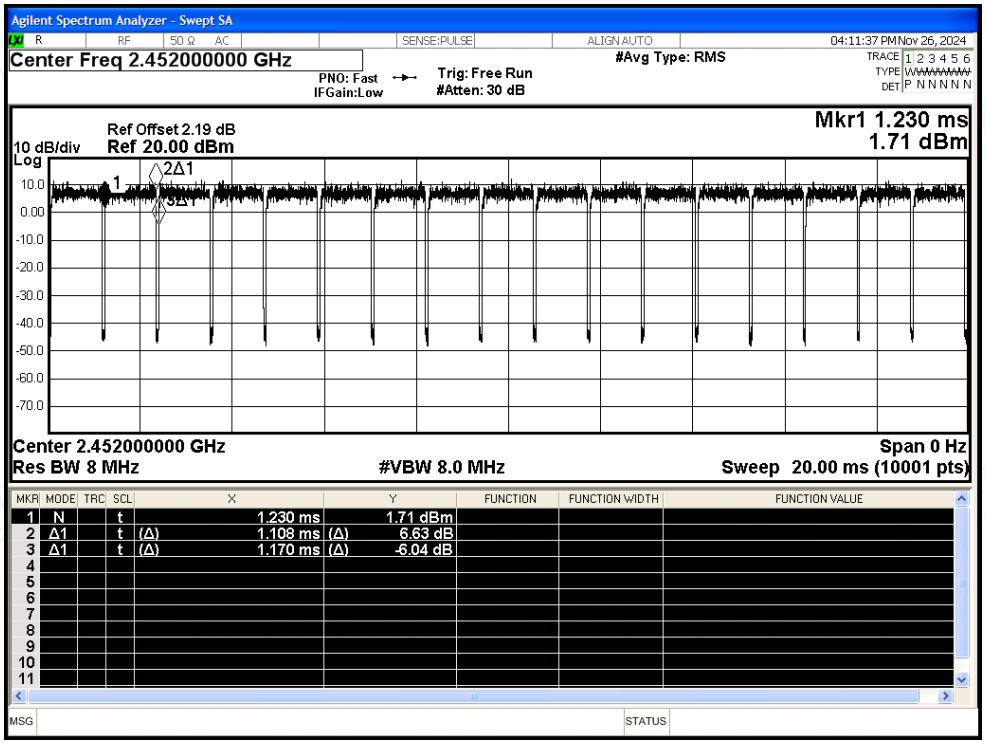

C.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-48.82	2	-	48.44	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-58.73	2	0	38.53	Average	54	Pass
NVNT	b	2412	Ant1	2384.178	-46.82	2	-	50.44	Peak	74	Pass
NVNT	b	2412	Ant1	2389.911	-55.74	2	0	41.52	Average	54	Pass
NVNT	b	2412	Ant1	2390	-48.61	2	-	48.65	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-55.23	2	0	42.03	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-46.37	2	-	50.89	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-53.73	2	0	43.53	Average	54	Pass
NVNT	b	2462	Ant1	2484.524	-44.68	2	-	52.58	Peak	74	Pass
NVNT	b	2462	Ant1	2483.676	-53.42	2	0	43.84	Average	54	Pass
NVNT	b	2462	Ant1	2500	-50.57	2	-	46.69	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-58.32	2	0	38.94	Average	54	Pass
NVNT	g	2412	Ant1	2310	-50.51	2	-	46.75	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-58.71	2	0.1	38.65	Average	54	Pass
NVNT	g	2412	Ant1	2388.858	-37.41	2	-	59.85	Peak	74	Pass
NVNT	g	2412	Ant1	2389.092	-52.73	2	0.1	44.63	Average	54	Pass
NVNT	g	2412	Ant1	2390	-41.96	2	-	55.3	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-52.53	2	0.1	44.83	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-37.88	2	-	59.38	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-53.04	2	0.1	44.32	Average	54	Pass
NVNT	g	2462	Ant1	2485.16	-36.12	2	-	61.14	Peak	74	Pass
NVNT	g	2462	Ant1	2483.57	-52.06	2	0.1	45.3	Average	54	Pass
NVNT	g	2462	Ant1	2500	-49.94	2	-	47.32	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-57.77	2	0.1	39.59	Average	54	Pass
NVNT	n20	2412	Ant1	2310	-51.02	2	-	46.24	Peak	74	Pass
NVNT	n20	2412	Ant1	2310	-58.44	2	0.12	38.94	Average	54	Pass
NVNT	n20	2412	Ant1	2389.209	-38.89	2	-	58.37	Peak	74	Pass
NVNT	n20	2412	Ant1	2389.56	-53.49	2	0.12	43.89	Average	54	Pass
NVNT	n20	2412	Ant1	2390	-39.57	2	-	57.69	Peak	74	Pass
NVNT	n20	2412	Ant1	2390	-53.9	2	0.12	43.48	Average	54	Pass
NVNT	n20	2462	Ant1	2483.5	-38.8	2	-	58.46	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.5	-51.94	2	0.12	45.44	Average	54	Pass
NVNT	n20	2462	Ant1	2483.623	-33.27	2	-	63.99	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.994	-50.71	2	0.12	46.67	Average	54	Pass
NVNT	n20	2462	Ant1	2500	-48.13	2	-	49.13	Peak	74	Pass
NVNT	n20	2462	Ant1	2500	-58.12	2	0.12	39.26	Average	54	Pass

NVNT	n40	2422	Ant1	2310	-48.53	2	-	48.73	Peak	74	Pass
NVNT	n40	2422	Ant1	2310	-58.57	2	0.24	38.93	Average	54	Pass
NVNT	n40	2422	Ant1	2389.946	-36.58	2	-	60.68	Peak	74	Pass
NVNT	n40	2422	Ant1	2389.236	-52.91	2	0.24	44.59	Average	54	Pass
NVNT	n40	2422	Ant1	2390	-36.58	2	-	60.68	Peak	74	Pass
NVNT	n40	2422	Ant1	2390	-52.97	2	0.24	44.53	Average	54	Pass
NVNT	n40	2452	Ant1	2483.5	-37.62	2	-	59.64	Peak	74	Pass
NVNT	n40	2452	Ant1	2483.5	-52.15	2	0.24	45.35	Average	54	Pass
NVNT	n40	2452	Ant1	2483.698	-35.99	2	-	61.27	Peak	74	Pass
NVNT	n40	2452	Ant1	2483.542	-50.54	2	0.24	46.96	Average	54	Pass
NVNT	n40	2452	Ant1	2500	-50.33	2	-	46.93	Peak	74	Pass
NVNT	n40	2452	Ant1	2500	-57.2	2	0.24	40.3	Average	54	Pass

Test Graphs

Restrict Band NVNT b 2412MHz Ant1 Peak

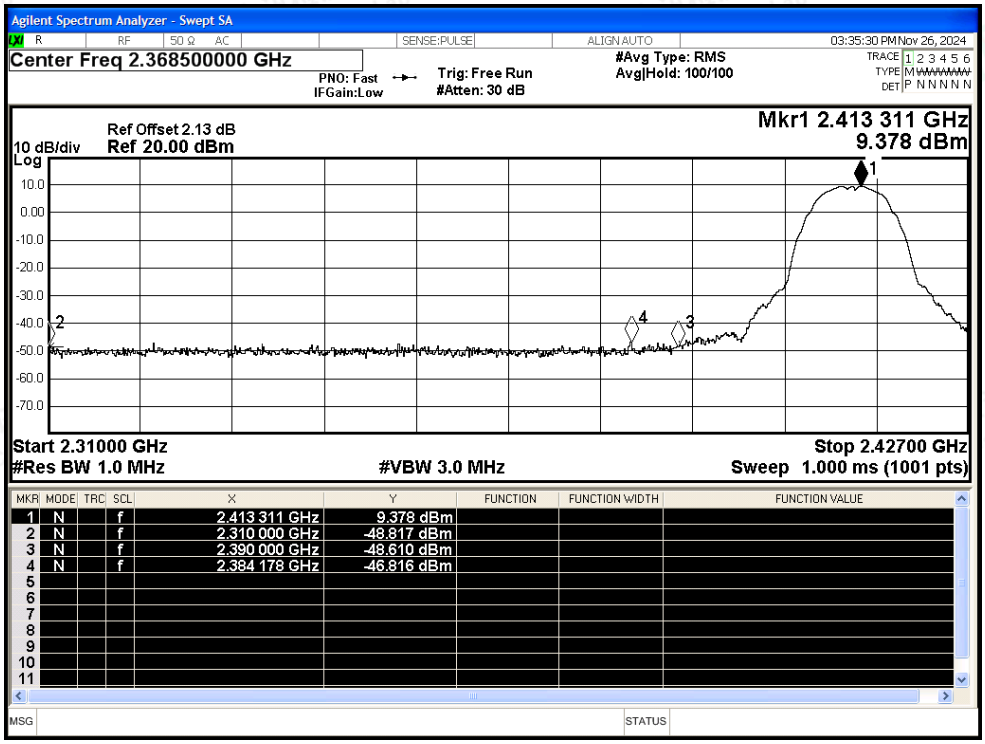

Restrict Band NVNT b 2412MHz Ant1 Average

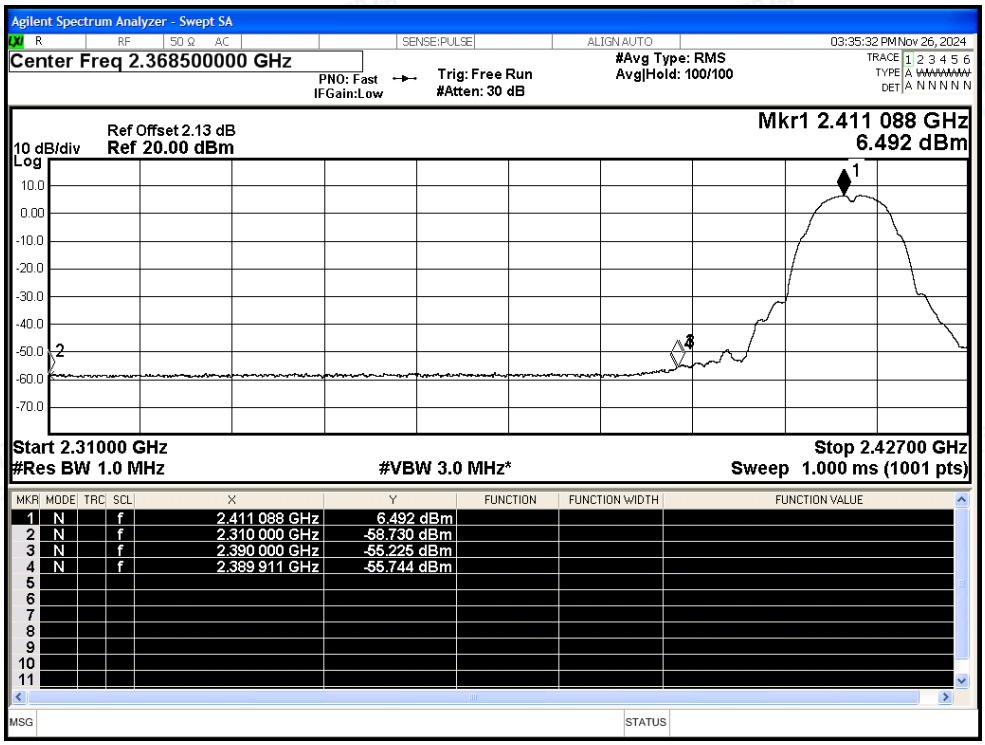

Restrict Band NVNT b 2462MHz Ant1 Peak

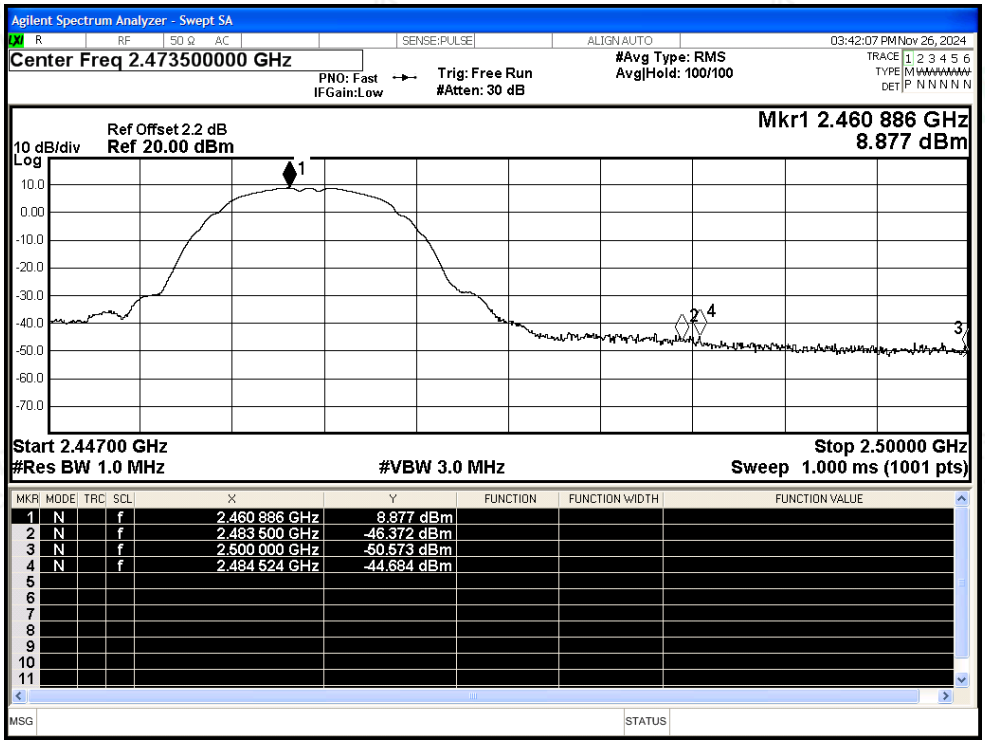

Restrict Band NVNT b 2462MHz Ant1 Average

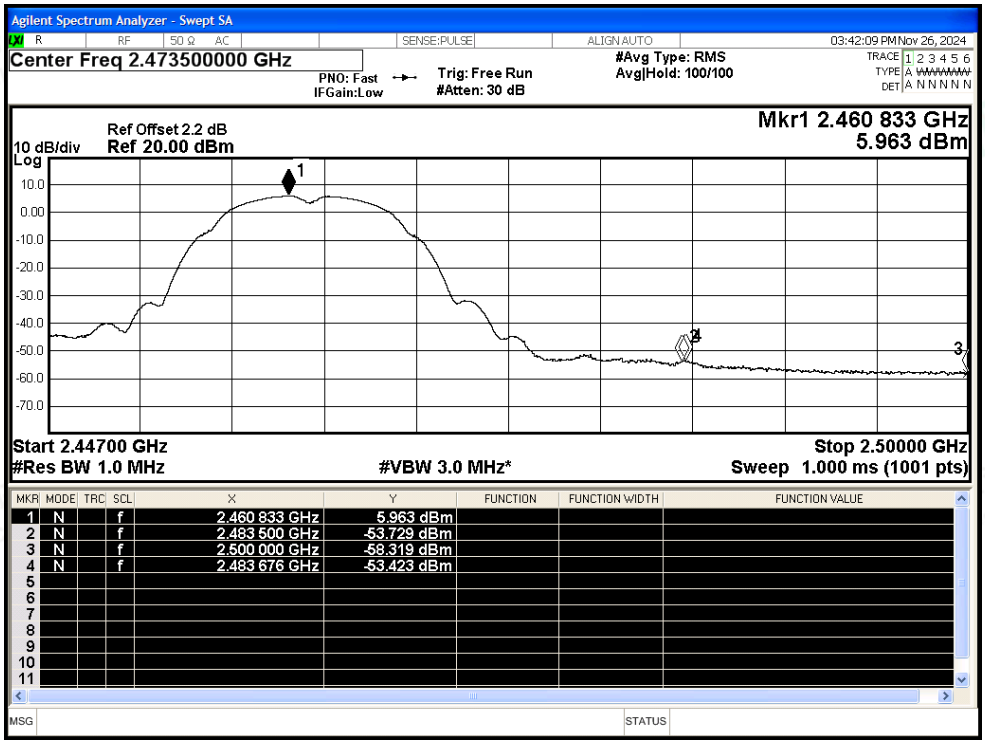

Restrict Band NVNT g 2412MHz Ant1 Peak

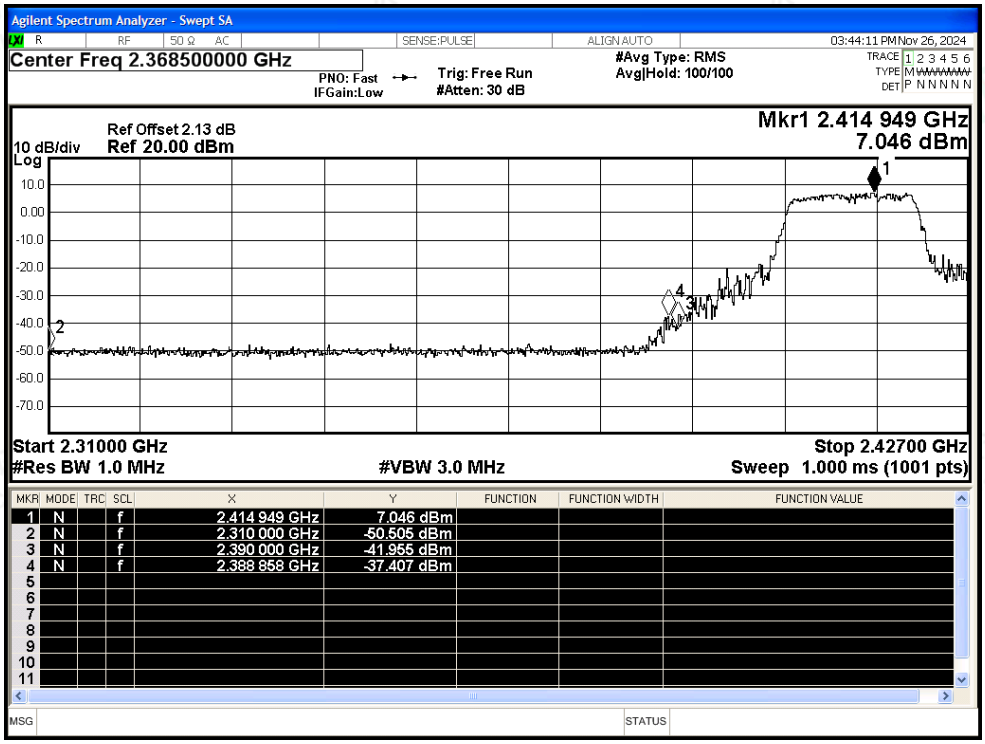

Restrict Band NVNT g 2412MHz Ant1 Average

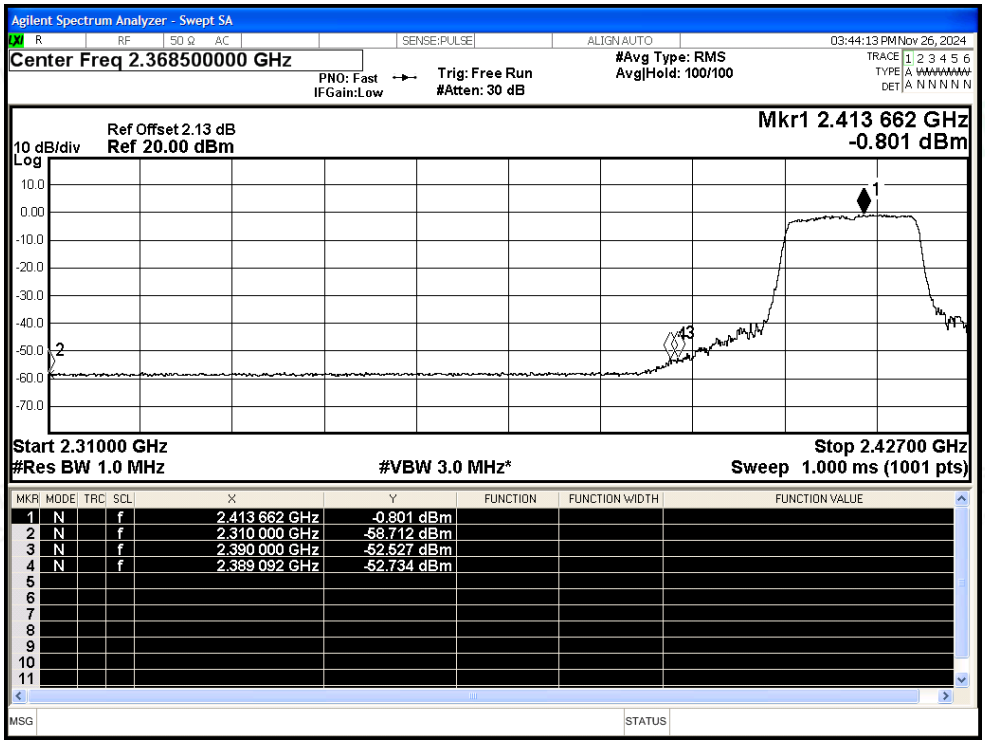

Restrict Band NVNT g 2462MHz Ant1 Peak

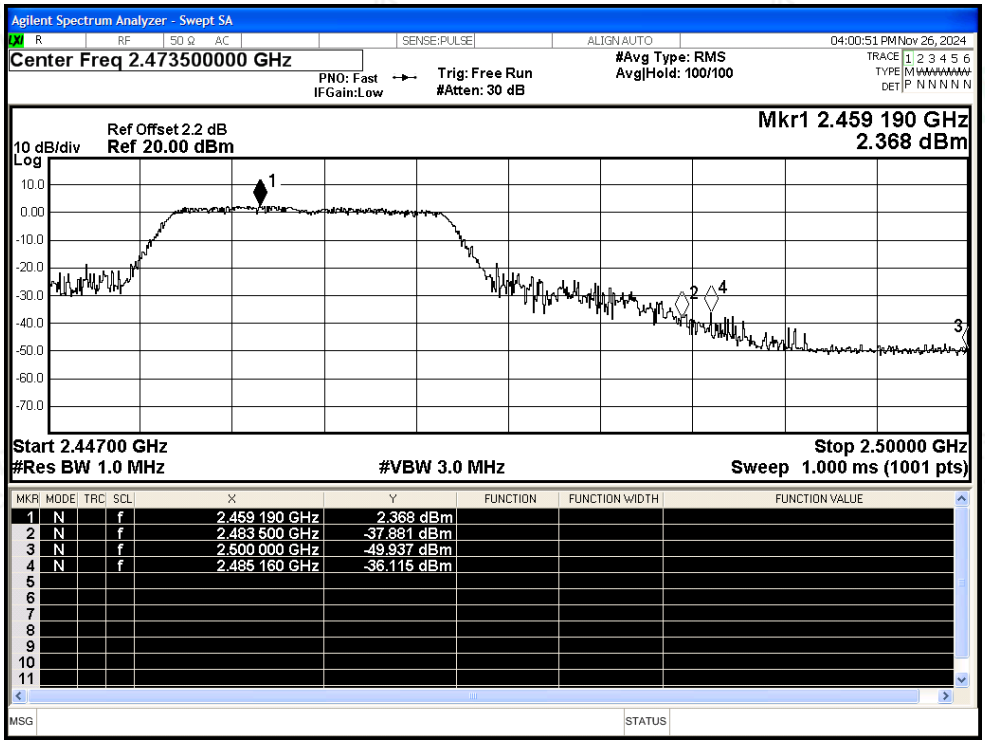

Restrict Band NVNT g 2462MHz Ant1 Average

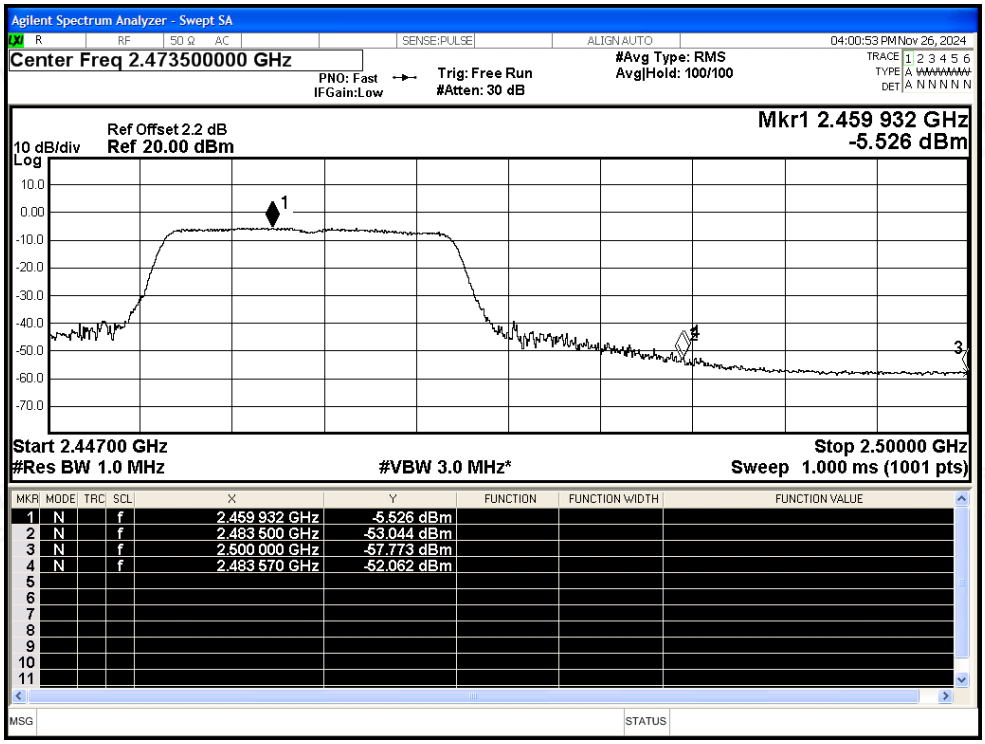

Restrict Band NVNT n20 2412MHz Ant1 Peak

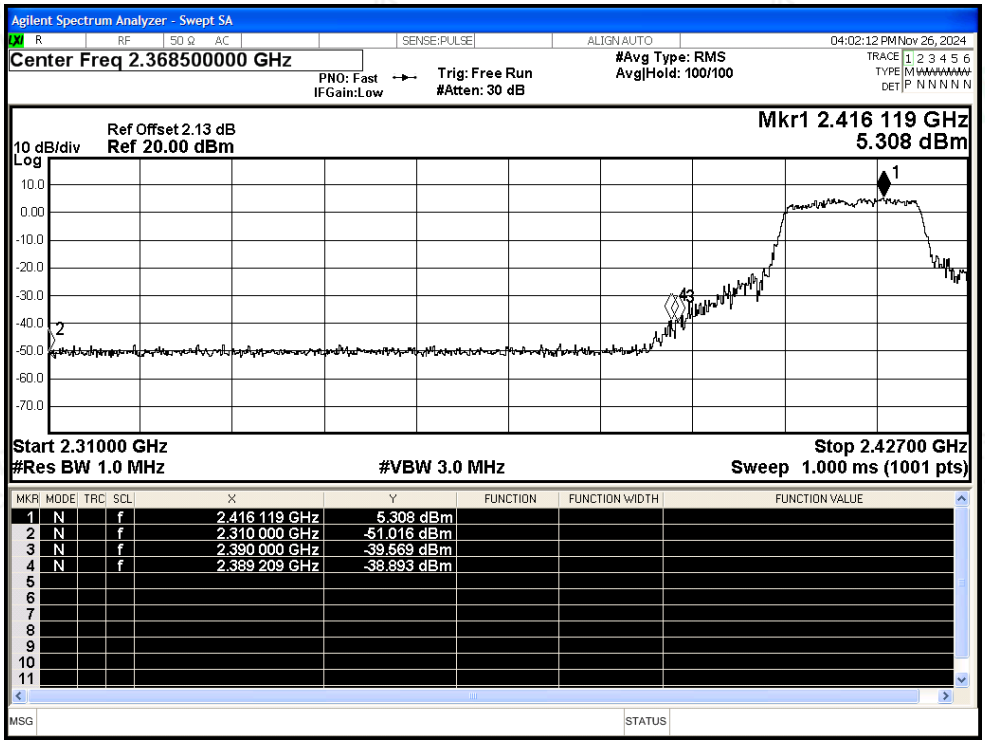

Restrict Band NVNT n20 2412MHz Ant1 Average

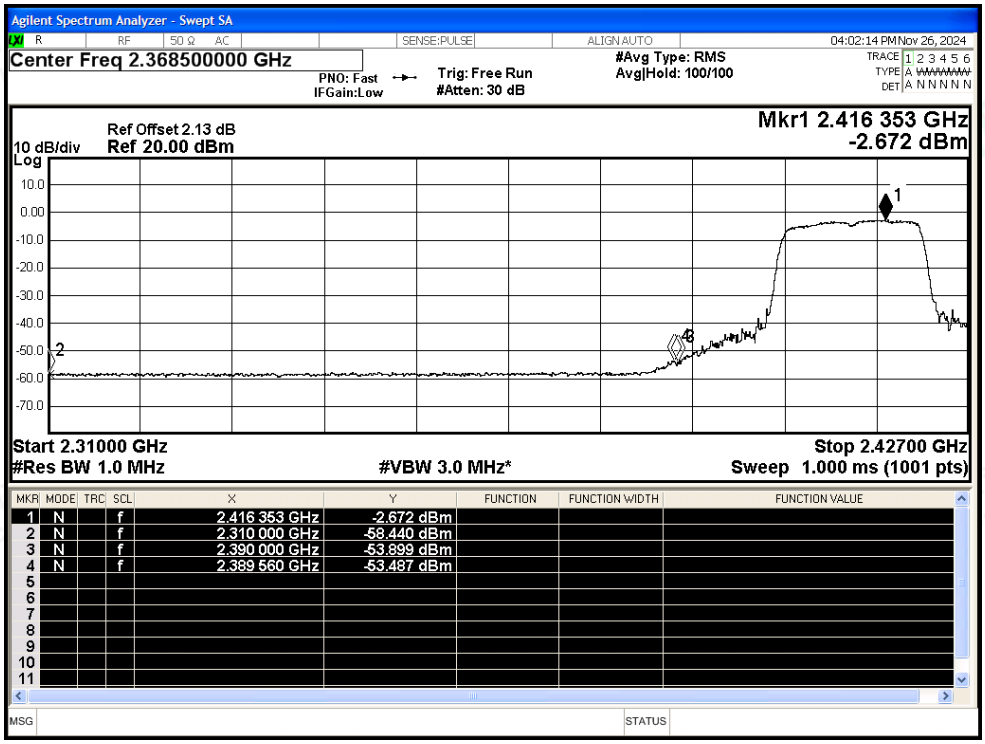

Restrict Band NVNT n20 2462MHz Ant1 Peak

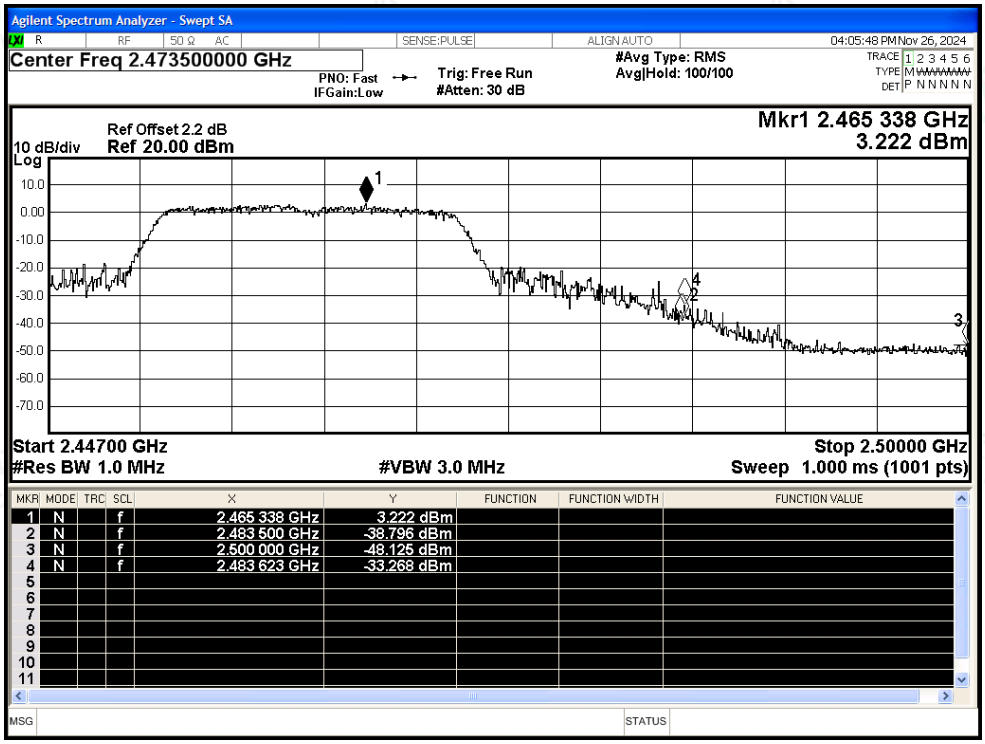

Restrict Band NVNT n20 2462MHz Ant1 Average

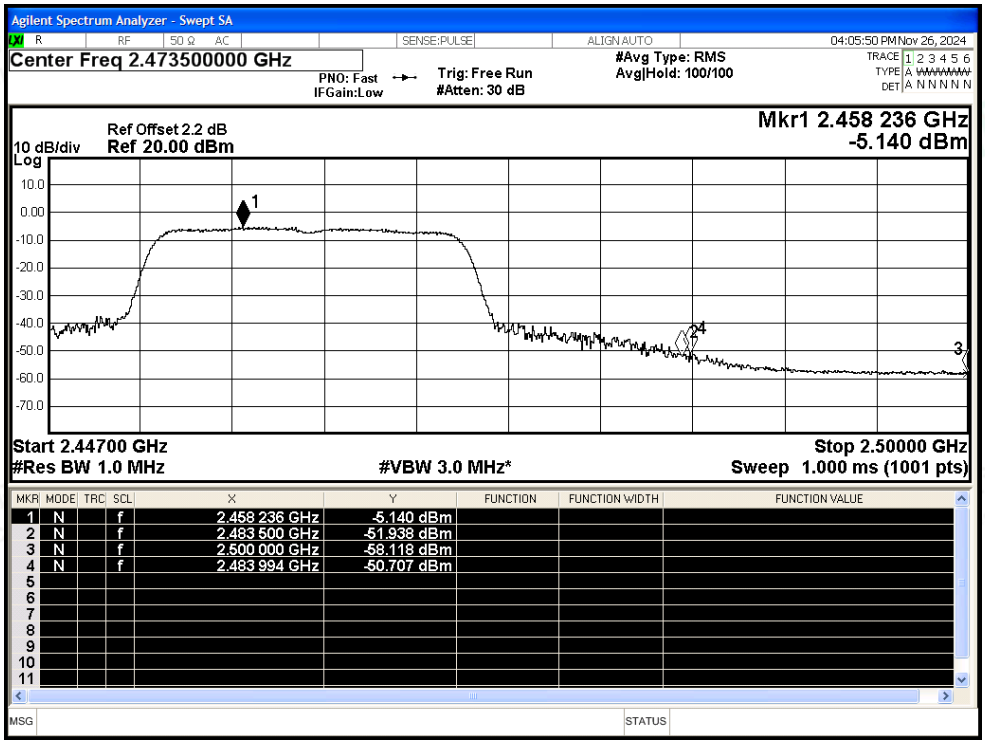

Restrict Band NVNT n40 2422MHz Ant1 Peak

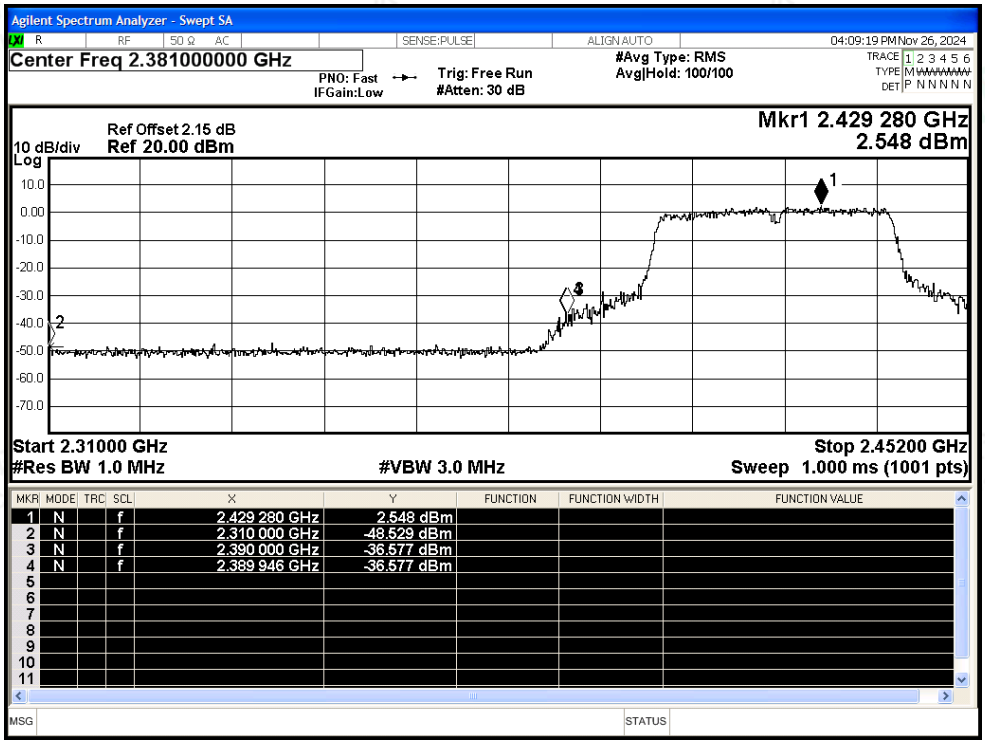

Restrict Band NVNT n40 2422MHz Ant1 Average

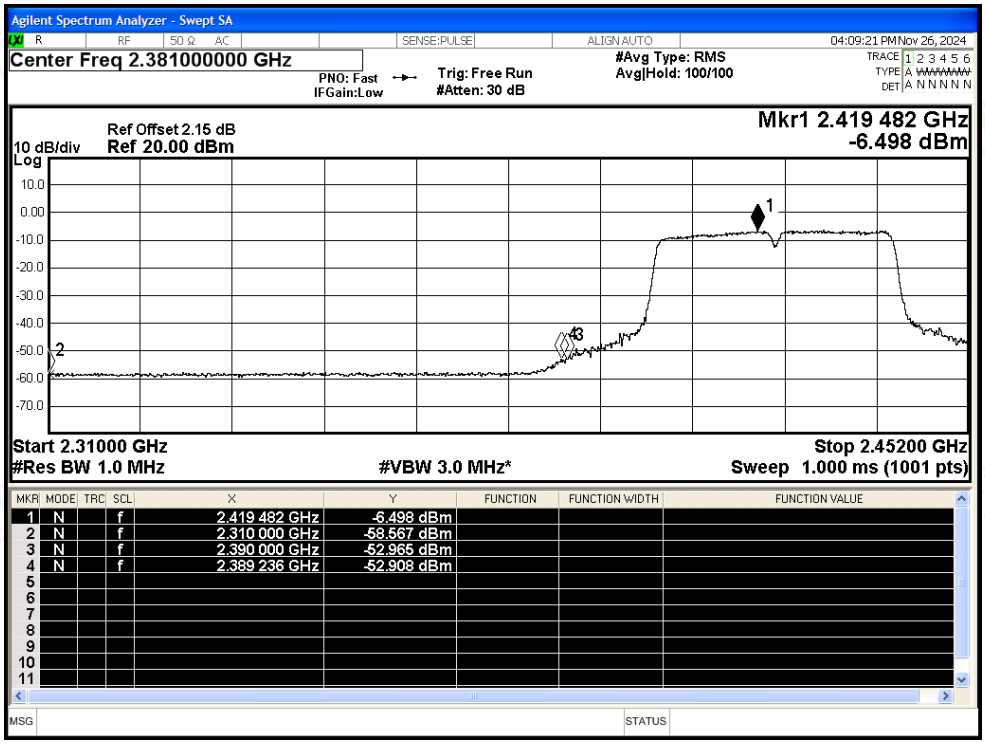

Restrict Band NVNT n40 2452MHz Ant1 Peak

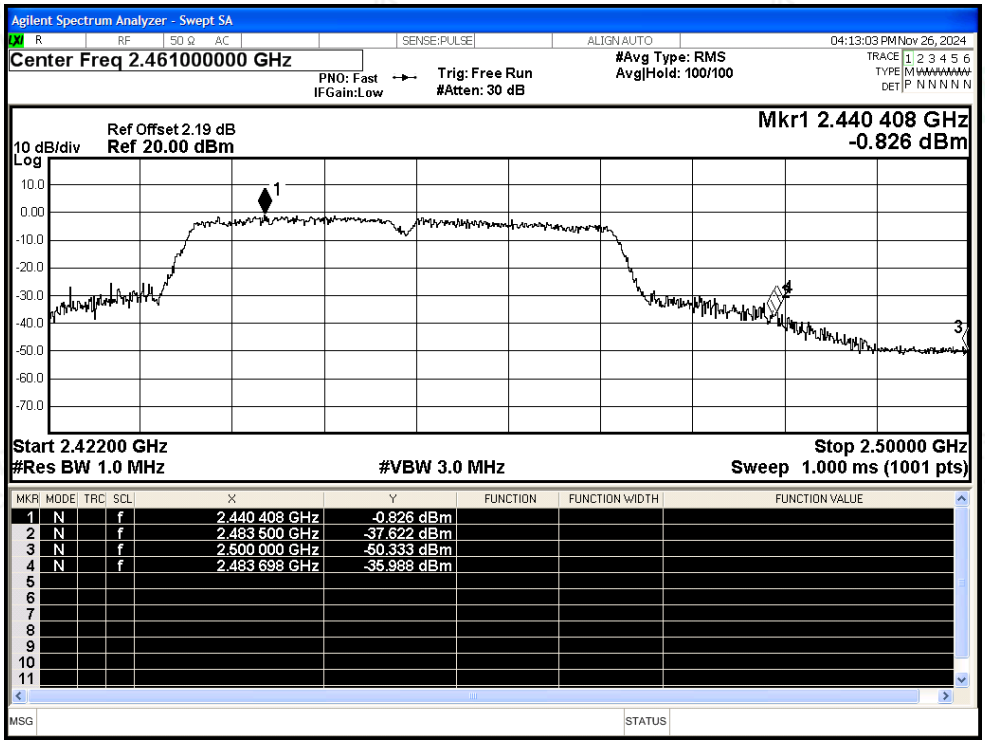
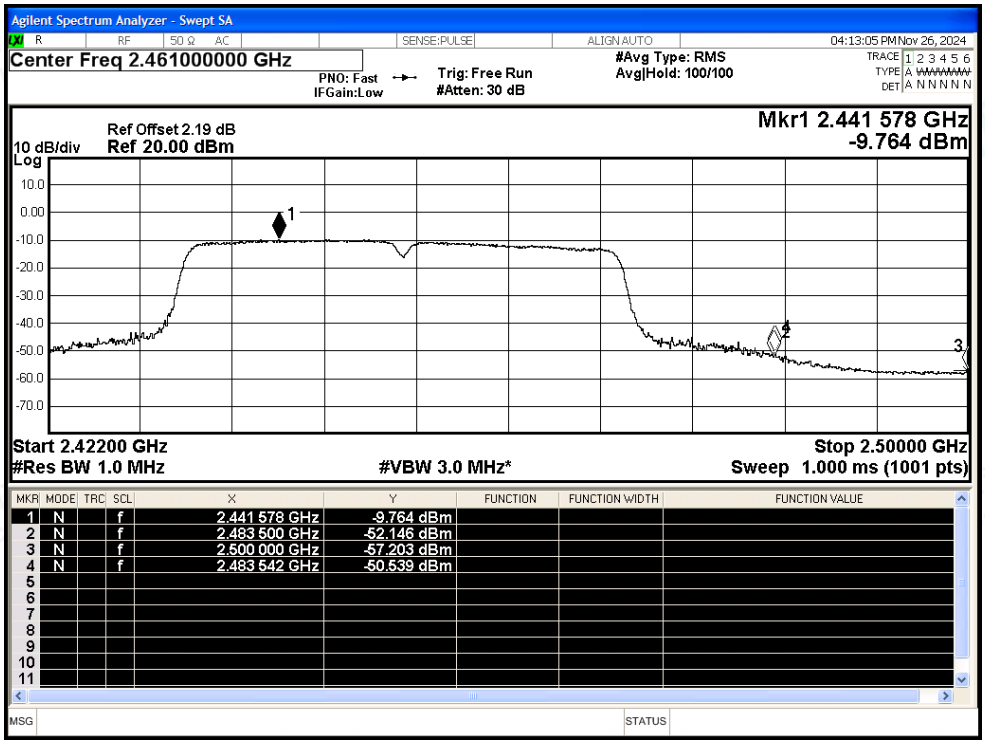
Restrict Band NVNT n40 2452MHz Ant1 Average