

尺寸：105x145mm 157g 双铜+内页 80g书纸+哑胶

Remote Dog Training Collar

User Manual

TZ-943




Please Read This Manual Carefully Before Use

Contents

Packaging List	1
Product Specifications	2
Main Features	3
How Does the Training Collar Work	4
Important Statement	5
Transmitter Introduction	6
Receiver Introduction	7
Charging Instructions	8
Operating Instructions	9
Receiver Fitting Instructions	14
Pairing Instructions	15
Frequently Asked Questions	16
Troubleshooting	17
Training Tips	18
Common Weights for Different Size Dogs	18
Common Sizes for Different Breeds of Dogs	19

Packaging List

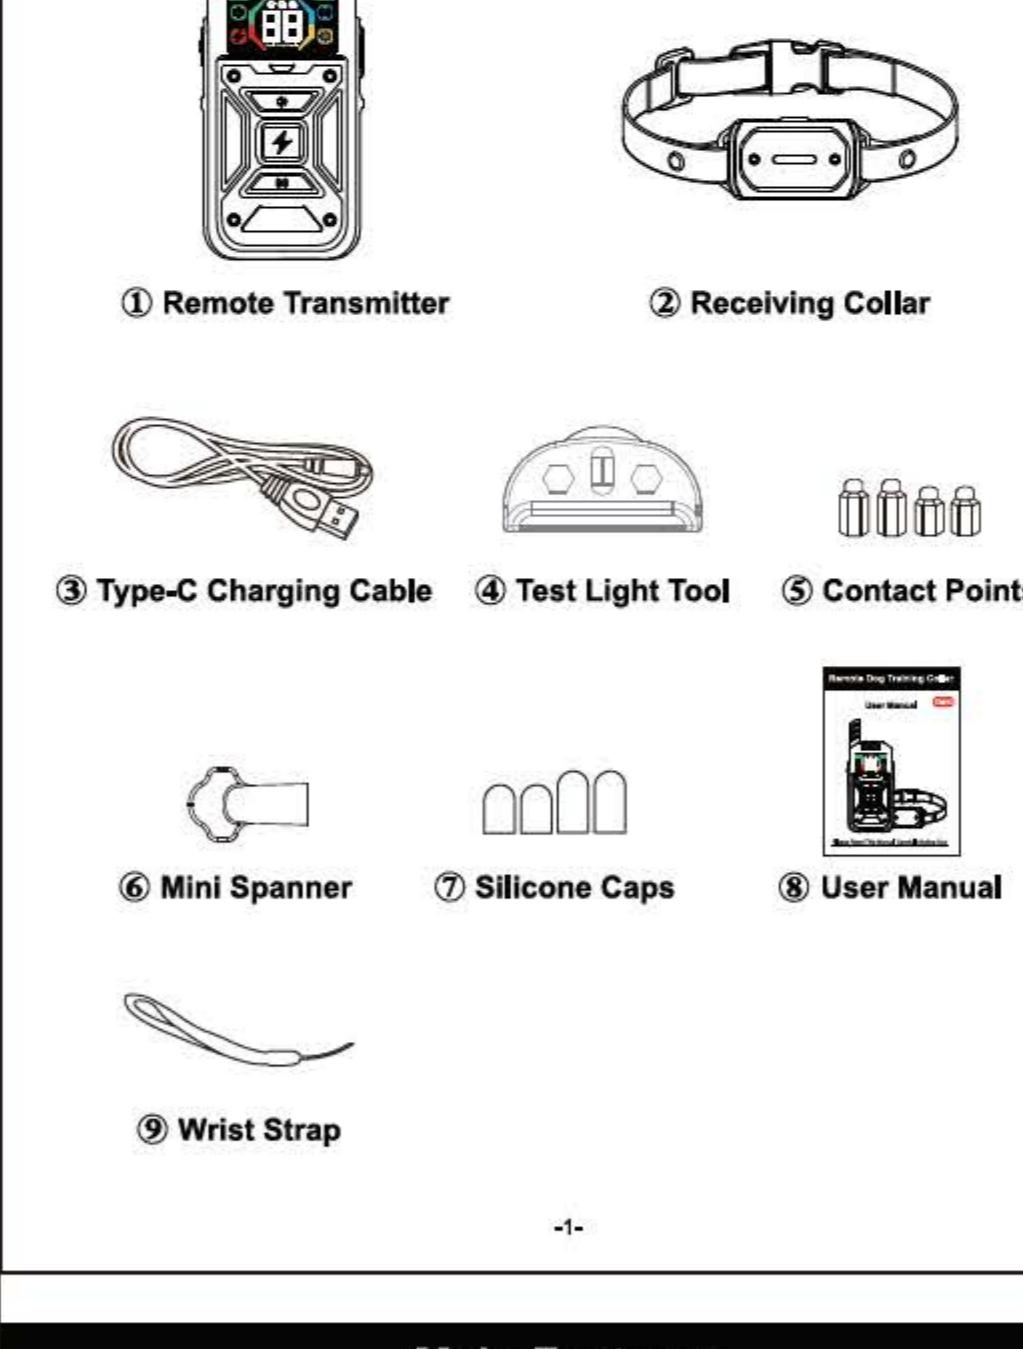

Product Specifications

Product Name: Remote Dog Training Collar
Product Model: TZ-943
Material: ABS+PC
Control Range: 800M(2600FT)
Charging Method: Type-C
Transmitter/ Receiver Charging Time: 2.5 Hours
Transmitter Standby Time: 10 months(full charge)
Receiver Standby Time: 20 months (full charge)
Transmitter Waterproofness: Not Waterproof
Receiver Waterproofness: Waterproof
Working temperature: -30°C~+70°C
Storage temperature: -30°C~+85°C
Relative Humidity: 20%

Main Features


1. The transmitter has a large color screen display.
2. Receiver is designed with safe LED light for locating your dog at night.
3. Remote controls range up to 800M(2600FT).
4. Working modes: beep, vibration, shock, LED light.
5. The volume of the beeper is adjustable from 1 to 9 levels.
6. Vibration and shock intensity is adjustable from level 1 to 99.
7. 6 adjustable LED lighting modes.
8. One transmitter can control up to 3 receivers.
9. Please note, the receiver is waterproof, and transmitter is not.
10. The screen displays the battery level of the transmitter and receiver.
11. With automatic switching to standby mode.
- In the absence of any activity, the transmitter enters the standby mode (the number icon on the screen will turn off within 30s, the screen will turn off within 3 minutes). Press any button to reactivate it from standby mode.
- The receiving collar will go into standby mode if it is inactive for more than 2 minutes. Gently shake the receiver or press the () button to activate it.
12. The transmitter has the lock button. Hence, you don't need to worry about false triggering.
- Push up the lock switch, the () will be flashing for 6 times then it switches into the key lock mode, and it won't be activated anymore. The () will start flashing for 6 times again if any button is pressed, to activate the Transmitter again, please push down the lock switch.

How Does the Training Collar Work

The remote training collar has been proven to be a safe, comfortable, and effective training system for all dogs over 15lbs. This system allows you to control your dog within a range up to 2600 feet. When you press the function button, the remote transmitter sends signal to the Receiving Collar and activates a beep, a vibration or a static shock correction output. By using the Training Collar properly, you can correct your dog's undesired behavior and teach basic and advanced commands.

Important: The Remote Training Collar has an effective range up to 2600 feet.

Hold the remote transmitter horizontally away from your body to achieve the optimum range. Terrain features, weather, vegetation, transmission from other radio devices and other factors may affect the range of the Remote Transmitter.

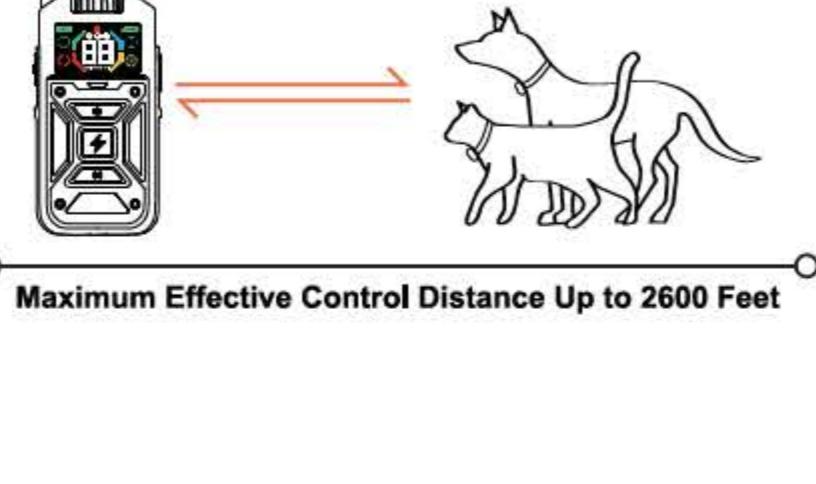

Maximum Effective Control Distance Up to 2600 Feet

Important Statement

⚠️ WARNING! ⚠️

- DO NOT use this product for aggressive dogs or vicious animals.
- When the receiving collar is turned on, it is not recommended to touch directly the points of contact with the human body.

The risk of skin damage, it's important to fit the collar properly. A collar that is fitted too tightly or worn for too long may harm your dog's skin. This condition, which ranges from redness to pressure ulcers, is commonly known as bed sores.

⚠️ CAUTIONS ⚠️

- The collar should not be worn for more than 12 hours per 24-hour period.
- If it is possible, gently change the position of the collar on the dog's neck every 1 or 2 hours.
- Never attach a leash to the receiver collar, as this would cause excessive pressure on the contact points.
- When using an ordinary collar to connect a leash, please ensure that it does not put excessive pressure on the electronic collar.
- Examine your dog's neck daily for signs of chafing or soreness.
- If a rash or sore is found, stop using the collar till the injured skin has been healed.
- If the rash or sore persists for more than 48 hours, consult your veterinarian.
- If possible, please use the beep or vibration mode for the first time. Then, you can try static shock function.

To extend battery life, if you don't plan to use your device every day, charge it monthly.

-3-

Important Statement

⚠️ WARNING! ⚠️

- DO NOT use this product for aggressive dogs or vicious animals.
- When the receiving collar is turned on, it is not recommended to touch directly the points of contact with the human body.

The risk of skin damage, it's important to fit the collar properly. A collar that is fitted too tightly or worn for too long may harm your dog's skin.

This condition, which ranges from redness to pressure ulcers, is commonly known as bed sores.

⚠️ CAUTIONS ⚠️

- The collar should not be worn for more than 12 hours per 24-hour period.
- If it is possible, gently change the position of the collar on the dog's neck every 1 or 2 hours.
- Never attach a leash to the receiver collar, as this would cause excessive pressure on the contact points.
- When using an ordinary collar to connect a leash, please ensure that it does not put excessive pressure on the electronic collar.
- Examine your dog's neck daily for signs of chafing or soreness.
- If a rash or sore is found, stop using the collar till the injured skin has been healed.
- If the rash or sore persists for more than 48 hours, consult your veterinarian.
- If possible, please use the beep or vibration mode for the first time.

To extend battery life, if you don't plan to use your device every day, charge it monthly.

-4-

-5-

Transmitter Introduction

Receiver Introduction

ON/OFF Button(Short press) Pairing Button (Long press) Indicator Light Charging port Charge the receiving collar

Contact Points Deliver vibration/safe static correction

LED Mode Indicator Light (The status of the light indicator in the corresponding mode is as follows)

Mode	LED Mode Indicator Light Status
Beep Mode	Mode Indicator lights up Green
Vibration Mode	Mode Indicator lights up Blue
Shock Mode	Mode Indicator lights up Red
LED Light Mode	red light steady on—red light flashing—green light steady on—green light flashing—blue light steady on—blue light flashing—light off

Transmitter Battery Level Receiver Battery Level Lock Key Icon Channel Display(1-3) Digital Display for Intensity Level

Beep Mode Shock Mode Vibration Mode LED Light Mode

Level Rotary Knob Rotate to adjust the beep volume or vibration/shock intensity

Color Screen Charging Indicator Light

Beep Button Shock Button Vibration Button

Charging Port Wrist Strap Eyelet

Signal Strength Levels

Large Dogs(Body height over 61cm, weight over 88lbs)

Medium Dogs(Height 40.7-61cm, Weight 24-86lbs)

Small Dogs(Height 25.5-40.7cm, Weight 8-22lbs)

Mini Dogs(Height under 25cm, Weight under 8lbs)

LED Mode Indicator Light (The status of the light indicator in the corresponding mode is as follows)

Mode	LED Mode Indicator Light Status
Beep Mode	Mode Indicator lights up Green
Vibration Mode	Mode Indicator lights up Blue
Shock Mode	Mode Indicator lights up Red
LED Light Mode	red light steady on—red light flashing—green light steady on—green light flashing—blue light steady on—blue light flashing—light off

Transmitter Battery Level Receiver Battery Level Lock Key Icon Channel Display(1-3) Digital Display for Intensity Level

Beep Mode Shock Mode Vibration Mode LED Light Mode

Level Rotary Knob Rotate to adjust the beep volume or vibration/shock intensity

Color Screen Charging Indicator Light

Beep Button Shock Button Vibration Button

Charging Port Wrist Strap Eyelet

Signal Strength Levels

Large Dogs(Body height over 61cm, weight over 88lbs)

Medium Dogs(Height 40.7-61cm, Weight 24-86lbs)

Small Dogs(Height 25.5-40.7cm, Weight 8-22lbs)

Mini Dogs(Height under 25cm, Weight under 8lbs)

LED Mode Indicator Light (The status of the light indicator in the corresponding mode is as follows)

Mode	LED Mode Indicator Light Status
Beep Mode	Mode Indicator lights up Green
Vibration Mode	Mode Indicator lights up Blue
Shock Mode	Mode Indicator lights up Red
LED Light Mode	red light steady on—red light flashing—green light steady on—green light flashing—blue light steady on—blue light flashing—light off

Transmitter Battery Level Receiver Battery Level Lock Key Icon Channel Display(1-3) Digital Display for Intensity Level

Beep Mode Shock Mode Vibration Mode LED Light Mode

Level Rotary Knob Rotate to adjust the beep volume or vibration/shock intensity

Color Screen Charging Indicator Light

Beep Button Shock Button Vibration Button

Charging Port Wrist Strap Eyelet

Signal Strength Levels

Large Dogs(Body height over 61cm, weight over 88lbs)

Medium Dogs(Height 40.7-61cm, Weight 24-86lbs)

Small Dogs(Height 25.5-40.7cm, Weight 8-22lbs)

Mini Dogs(Height under 25cm, Weight under 8lbs)

LED Mode Indicator Light (The status of the light indicator in the corresponding mode is as follows)

Mode	LED Mode Indicator Light Status
Beep Mode	Mode Indicator lights up Green
Vibration Mode	Mode Indicator lights up Blue
Shock Mode	Mode Indicator lights up Red
LED Light Mode	red light steady on—red light flashing—green light steady on—green light flashing—blue light steady on—blue light flashing—light off

Transmitter Battery Level Receiver Battery Level Lock Key Icon Channel Display(1-3) Digital Display for Intensity Level

Beep Mode Shock Mode Vibration Mode LED Light Mode

Level Rotary Knob Rotate to adjust the beep volume or vibration/shock intensity

Color Screen Charging Indicator Light

Beep Button Shock Button Vibration Button

Charging Port Wrist Strap Eyelet

Signal Strength Levels

Large Dogs(Body height over 61cm, weight over 88lbs)

Medium Dogs(Height 40.7-61cm, Weight 24-86lbs)

Small Dogs(Height 25.5-40.7cm, Weight 8-22lbs)

Mini Dogs(Height under 25cm, Weight under 8lbs)

LED Mode Indicator Light (The status of the light indicator in the corresponding mode is as follows)