



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. : CQASZ20210400020EX-02

Applicant: Shenzhen Ranboda Technology Co., Ltd

Address of Applicant: Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China

Manufacturer: Shenzhen Ranboda Technology Co., Ltd

Address of Manufacturer: Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China

Equipment Under Test (EUT):

Product: Android player

All Model No.: truDigital x3

Test Model No.: truDigital x3

Brand Name: /

FCC ID: 2AY9T-TRUDX3

Standards: 47 CFR FCC Part 15 Subpart C 15.247

Date of Test: Mar. 22, 2021 – Apr. 12, 2021

Date of Issue: Apr. 12, 2021

Test Result : PASS*

Tested By:

Jun Li

(Jun Li)

Reviewed By:

Ares Liu

(Ares Liu)

Approved By:

Sheek Luo

(Sheek Luo)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210400020EX-02	Rev.01	Initial report	Apr. 08, 2021

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

N/A: Not Applicable

3 Contents

	Page
COVER PAGE.....	1
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 ADDITIONAL INSTRUCTIONS.....	7
4.4 TEST ENVIRONMENT.....	8
4.5 DESCRIPTION OF SUPPORT UNITS.....	8
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	9
4.7 TEST LOCATION.....	10
4.8 TEST FACILITY.....	10
4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
4.11 EQUIPMENT LIST.....	11
5 TEST RESULTS AND MEASUREMENT DATA.....	12
5.1 ANTENNA REQUIREMENT.....	12
5.2 CONDUCTED EMISSIONS.....	13
5.3 CONDUCTED PEAK OUTPUT POWER.....	16
5.4 20dB OCCUPY BANDWIDTH.....	21
5.5 CARRIER FREQUENCIES SEPARATION.....	25
5.6 HOPPING CHANNEL NUMBER.....	30
5.7 DWELL TIME.....	33
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....	44
5.9 SPURIOUS RF CONDUCTED EMISSIONS.....	49
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM.....	60
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	62
5.11.1 Radiated Emission below 1GHz.....	65
5.11.2 Transmitter Emission above 1GHz.....	67
6 PHOTOGRAPHS - EUT TEST SETUP.....	69
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....	70

4 General Information

4.1 Client Information

Applicant:	Shenzhen Ranboda Technology Co., Ltd
Address of Applicant:	Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China
Manufacturer:	Shenzhen Ranboda Technology Co., Ltd
Address of Manufacturer:	Weishi Road No.2, Ailian, Longcheng Street, Longgang District, Shenzhen, Guangdong, China

4.2 General Description of EUT

Product Name:	Android player
Test Model No.:	
Trade Mark:	/
Hardware Version:	V1.1
Software Version:	V1.0
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	☐ Mobile ☐ Portable ☒ Fix Location
Antenna Type:	Glue stick antenna
Antenna Gain:	0dBi
Power Supply:	DC 5V from adapter
Adapter Information:	AC/DC ADAPTER MODEL: 05020002 INPUT:110-240V AC 50/60Hz 0.5A OUTPUT: DC 5V 2A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	☒ Special software is used. ☐ Through engineering command into the engineering mode. engineering command: ***#3646633#**	
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480
2DH1/2DH3/2DH5	CH0	2402
	CH39	2441
	CH78	2480
3DH1/3DH3/3DH5	CH0	2402
	CH39	2441
	CH78	2480

Run Software:

4.4 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	995mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
AC/DC ADAPTER	/	MODEL: 05020002 INPUT:110-240V 50/60Hz 0.5A OUTPUT: DC 5V 2A	Provide by applicant	SDOC
/	/	/	/	/

4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.7 Test Location

Shenzhen Huaxia Testing Technology Co., Ltd,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L5785)

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 4742.01)

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• FCC Registration No.: 522263

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List

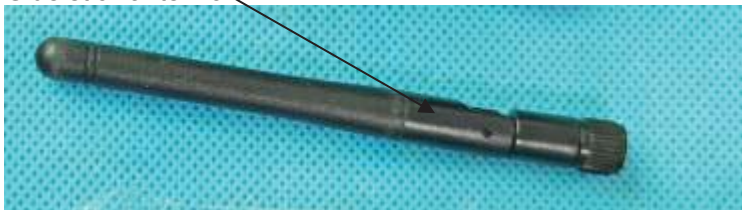
Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/25	2021/10/24
EXA spectrum analyzer	Keysight	N9010A	CQA-106	2020/9/26	2021/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/10/25	2021/10/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2020/10/21	2020/10/20
Bilog Antenna	R&S	HL562	CQA-011	2020/9/26	2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2020/9/26	2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2020/9/25	2021/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2020/9/26	2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2020/9/26	2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/26	2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26	2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/26	2021/9/25
EMI Test Receiver	R&S	ESR7	CQA-005	2020/10/25	2021/10/24
LISN	R&S	ENV216	CQA-003	2020/10/23	2021/10/22
Coaxial cable	CQA	N/A	CQA-C009	2020/9/26	2021/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data

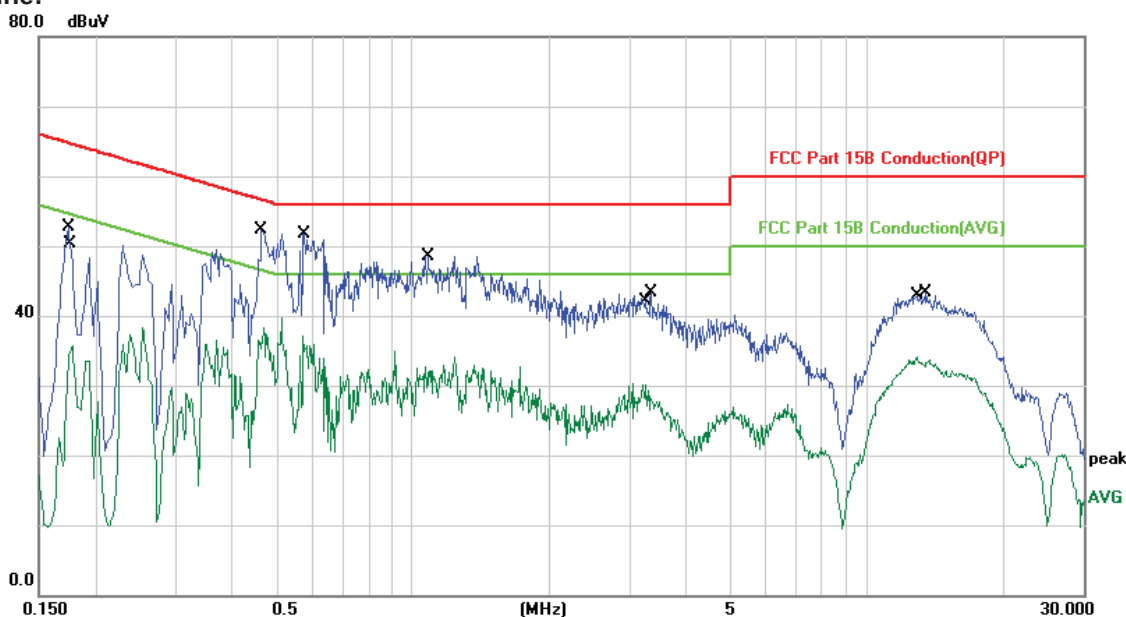
5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Glue stick antenna 
The antenna is Glue stick antenna. The best case gain of the antenna is 0dBi.	

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

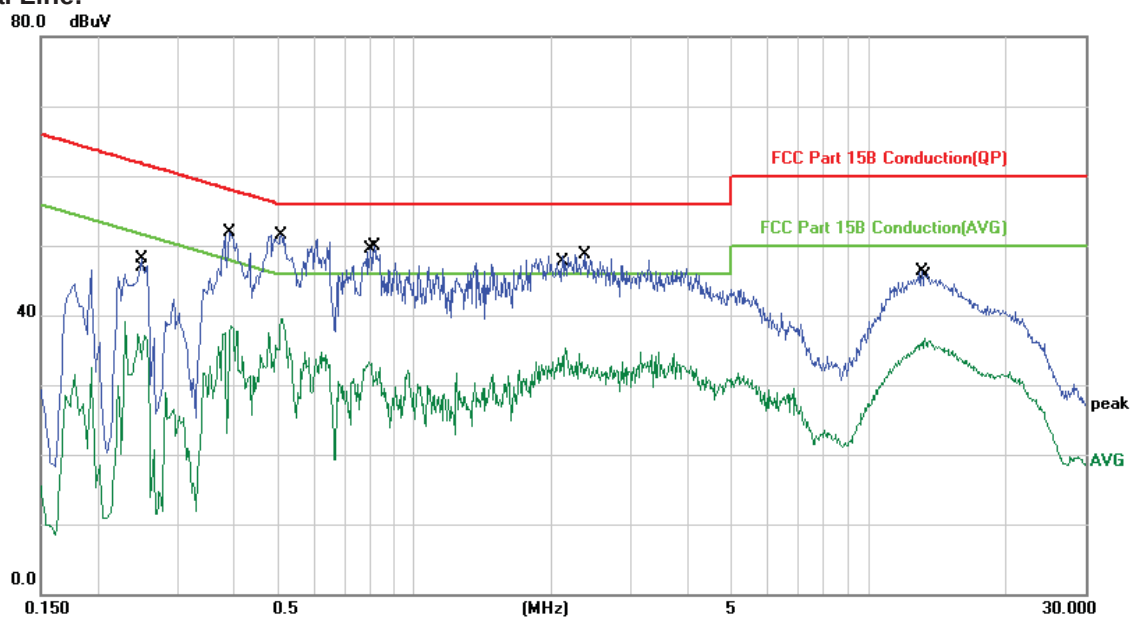


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1739	52.90	-0.13	52.77	64.77	-12.00	QP	
2		0.1779	35.93	-0.13	35.80	54.58	-18.78	AVG	
3	*	0.4660	52.37	-0.02	52.35	56.58	-4.23	QP	
4		0.4699	38.36	-0.02	38.34	46.52	-8.18	AVG	
5		0.5738	37.08	-0.04	37.04	46.00	-8.96	AVG	
6		0.5779	51.68	-0.04	51.64	56.00	-4.36	QP	
7		1.0700	32.78	-0.13	32.65	46.00	-13.35	AVG	
8		1.0820	48.63	-0.13	48.50	56.00	-7.50	QP	
9		3.2740	30.23	-0.19	30.04	46.00	-15.96	AVG	
10		3.3580	43.57	-0.19	43.38	56.00	-12.62	QP	
11		12.9699	34.23	-0.15	34.08	50.00	-15.92	AVG	
12		13.5379	43.37	-0.17	43.20	60.00	-16.80	QP	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

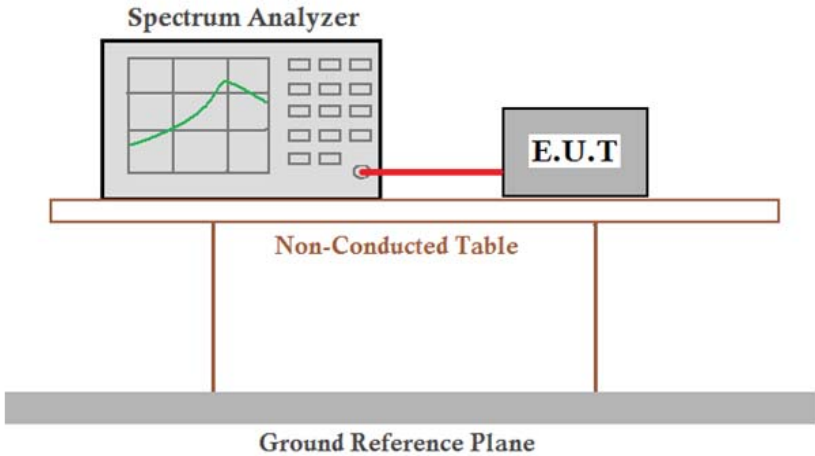


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2459	37.48	-0.11	37.37	51.89	-14.52	AVG	
2		0.2500	48.12	-0.11	48.01	61.75	-13.74	QP	
3		0.3899	51.95	-0.01	51.94	58.06	-6.12	QP	
4		0.3940	38.43	-0.01	38.42	47.98	-9.56	AVG	
5	*	0.5100	51.51	-0.03	51.48	56.00	-4.52	QP	
6		0.5100	39.48	-0.03	39.45	46.00	-6.55	AVG	
7		0.7940	33.28	-0.07	33.21	46.00	-12.79	AVG	
8		0.8139	50.00	-0.07	49.93	56.00	-6.07	QP	
9		2.1459	35.55	-0.24	35.31	46.00	-10.69	AVG	
10		2.3620	49.02	-0.25	48.77	56.00	-7.23	QP	
11		13.1138	46.48	-0.15	46.33	60.00	-13.67	QP	
12		13.2898	36.77	-0.15	36.62	50.00	-13.38	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

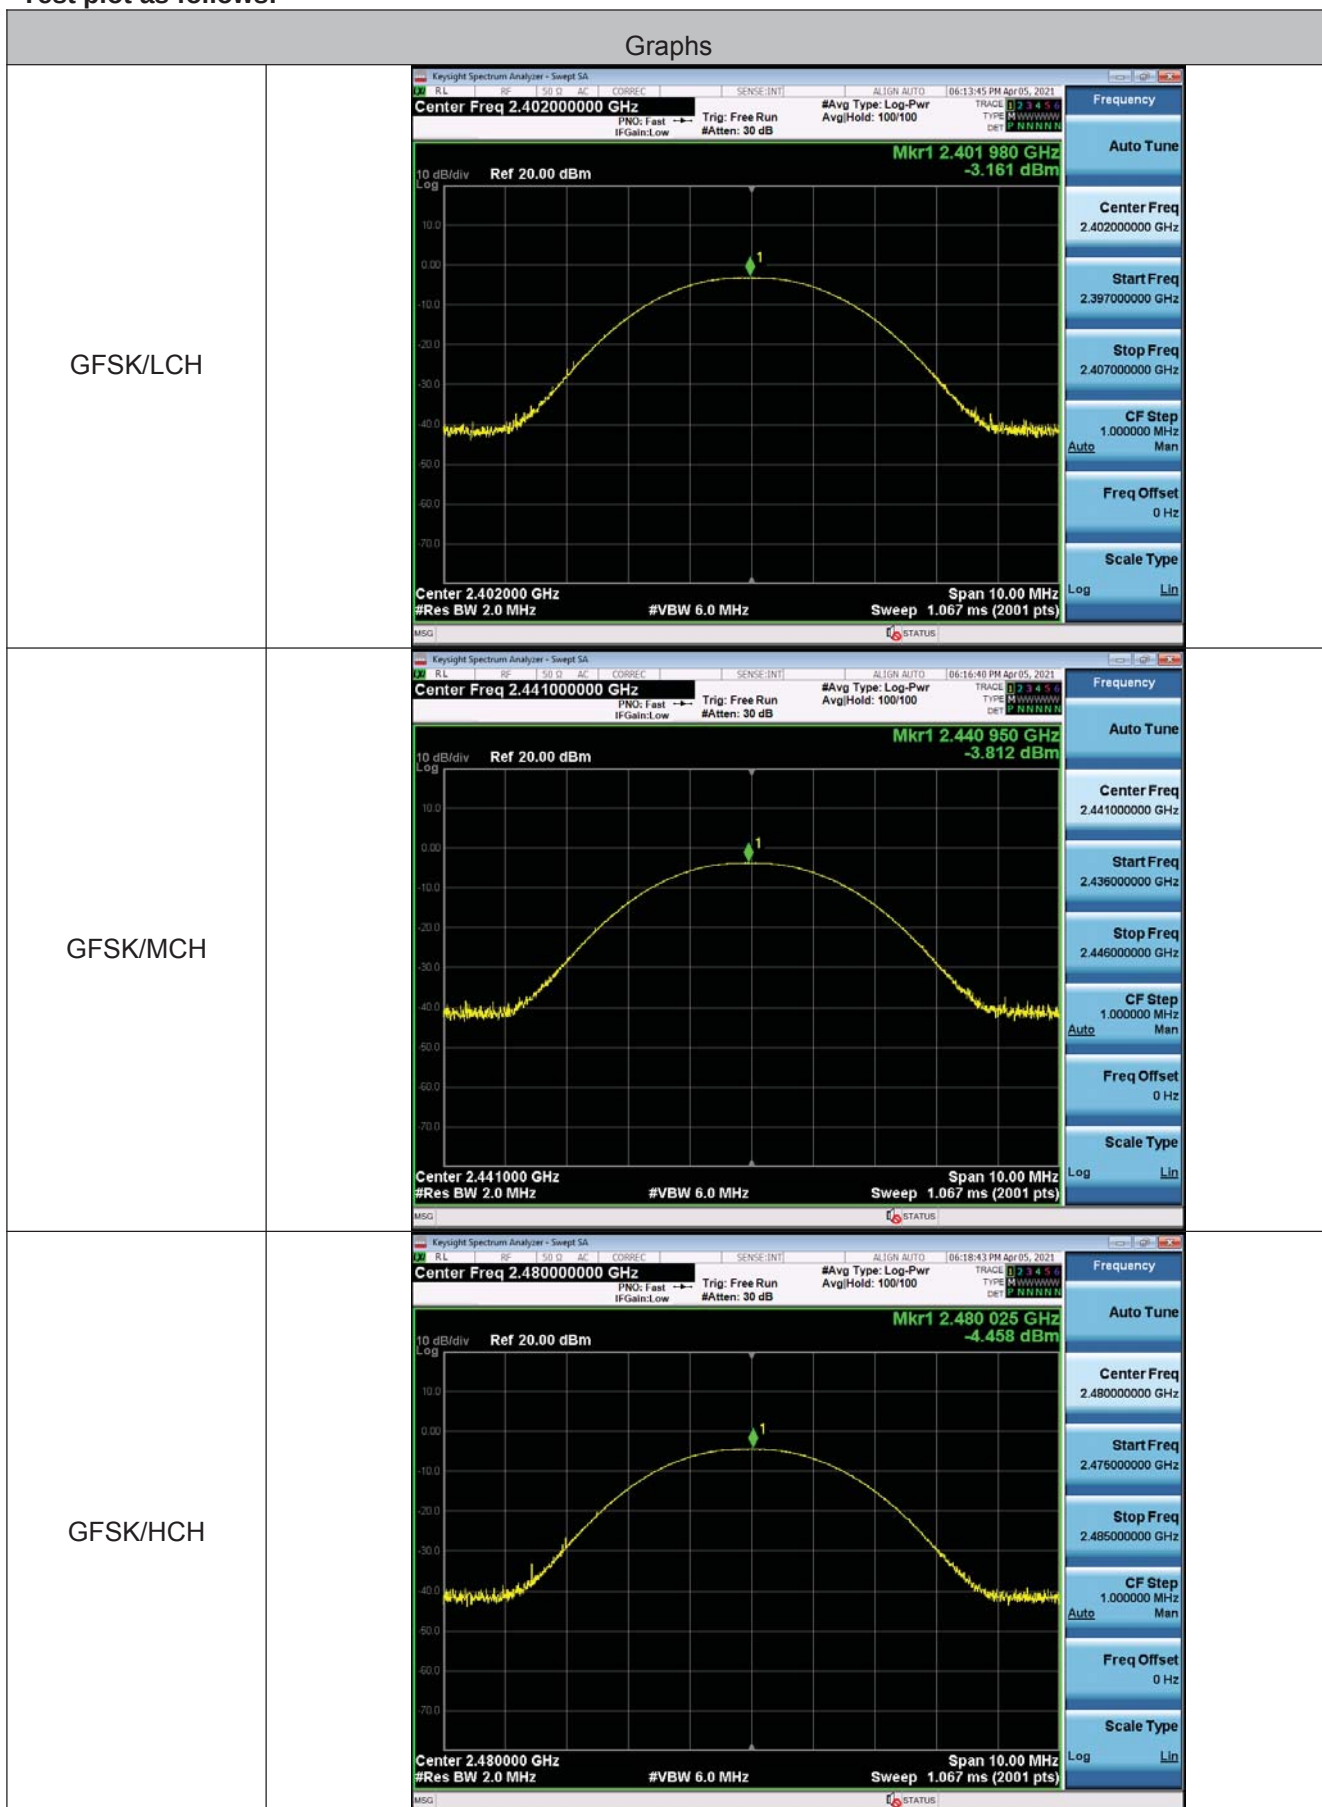
5.3 Conducted Peak Output Power

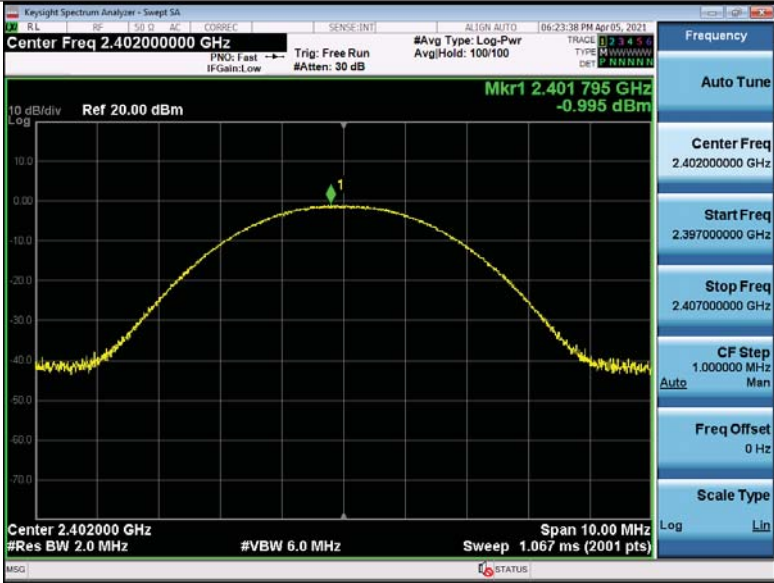
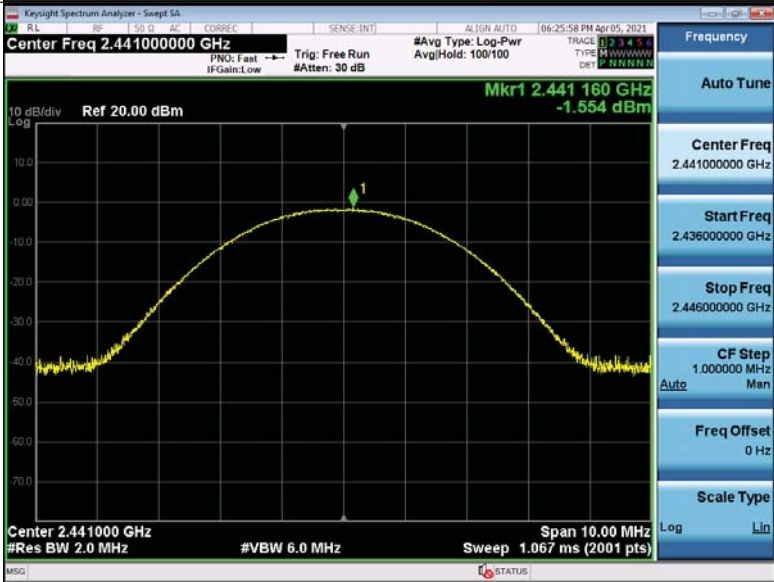
Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: $\text{Offset} = \text{Cable loss} + \text{attenuation factor}$.
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

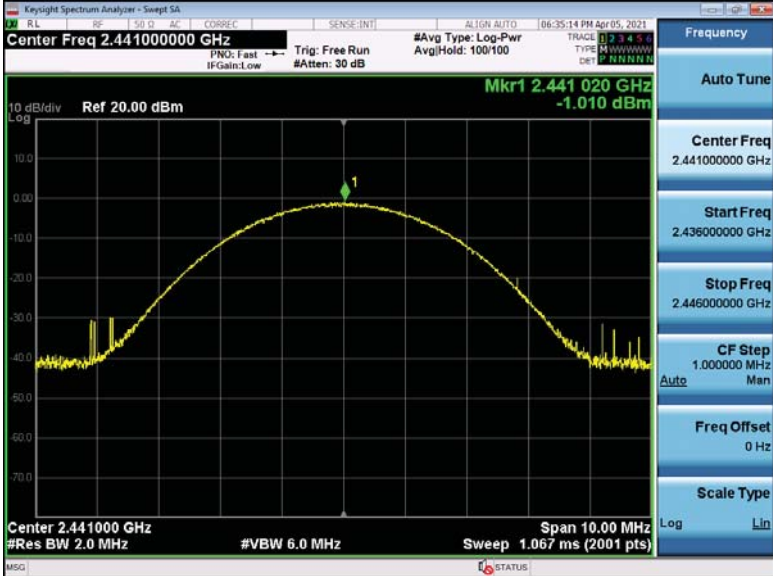
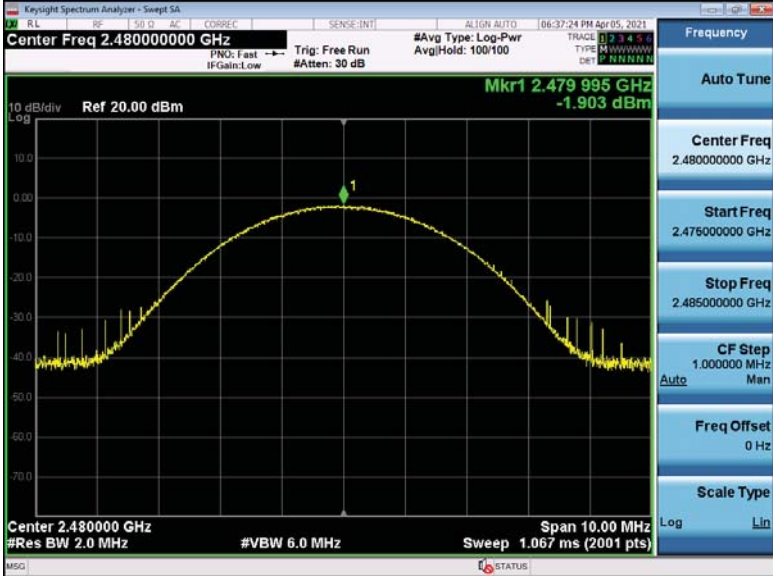
Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.161	30.00	Pass
Middle	-3.812	30.00	Pass
Highest	-4.458	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.995	30.00	Pass
Middle	-1.554	30.00	Pass
Highest	-2.209	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-0.524	30.00	Pass
Middle	-1.01	30.00	Pass
Highest	-1.903	30.00	Pass

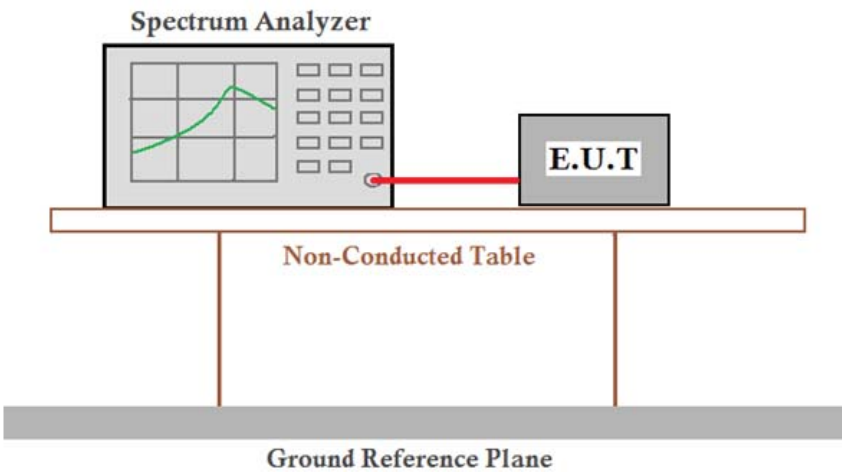
Test plot as follows:



$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

8DPSK/LCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Mkr1 2.401 940 GHz -0.524 dBm Ref 20.00 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.067 ms (2001 pts)
8DPSK/MCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Mkr1 2.441 020 GHz -1.010 dBm Ref 20.00 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.067 ms (2001 pts)
8DPSK/HCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Mkr1 2.479 995 GHz -1.903 dBm Ref 20.00 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.067 ms (2001 pts)

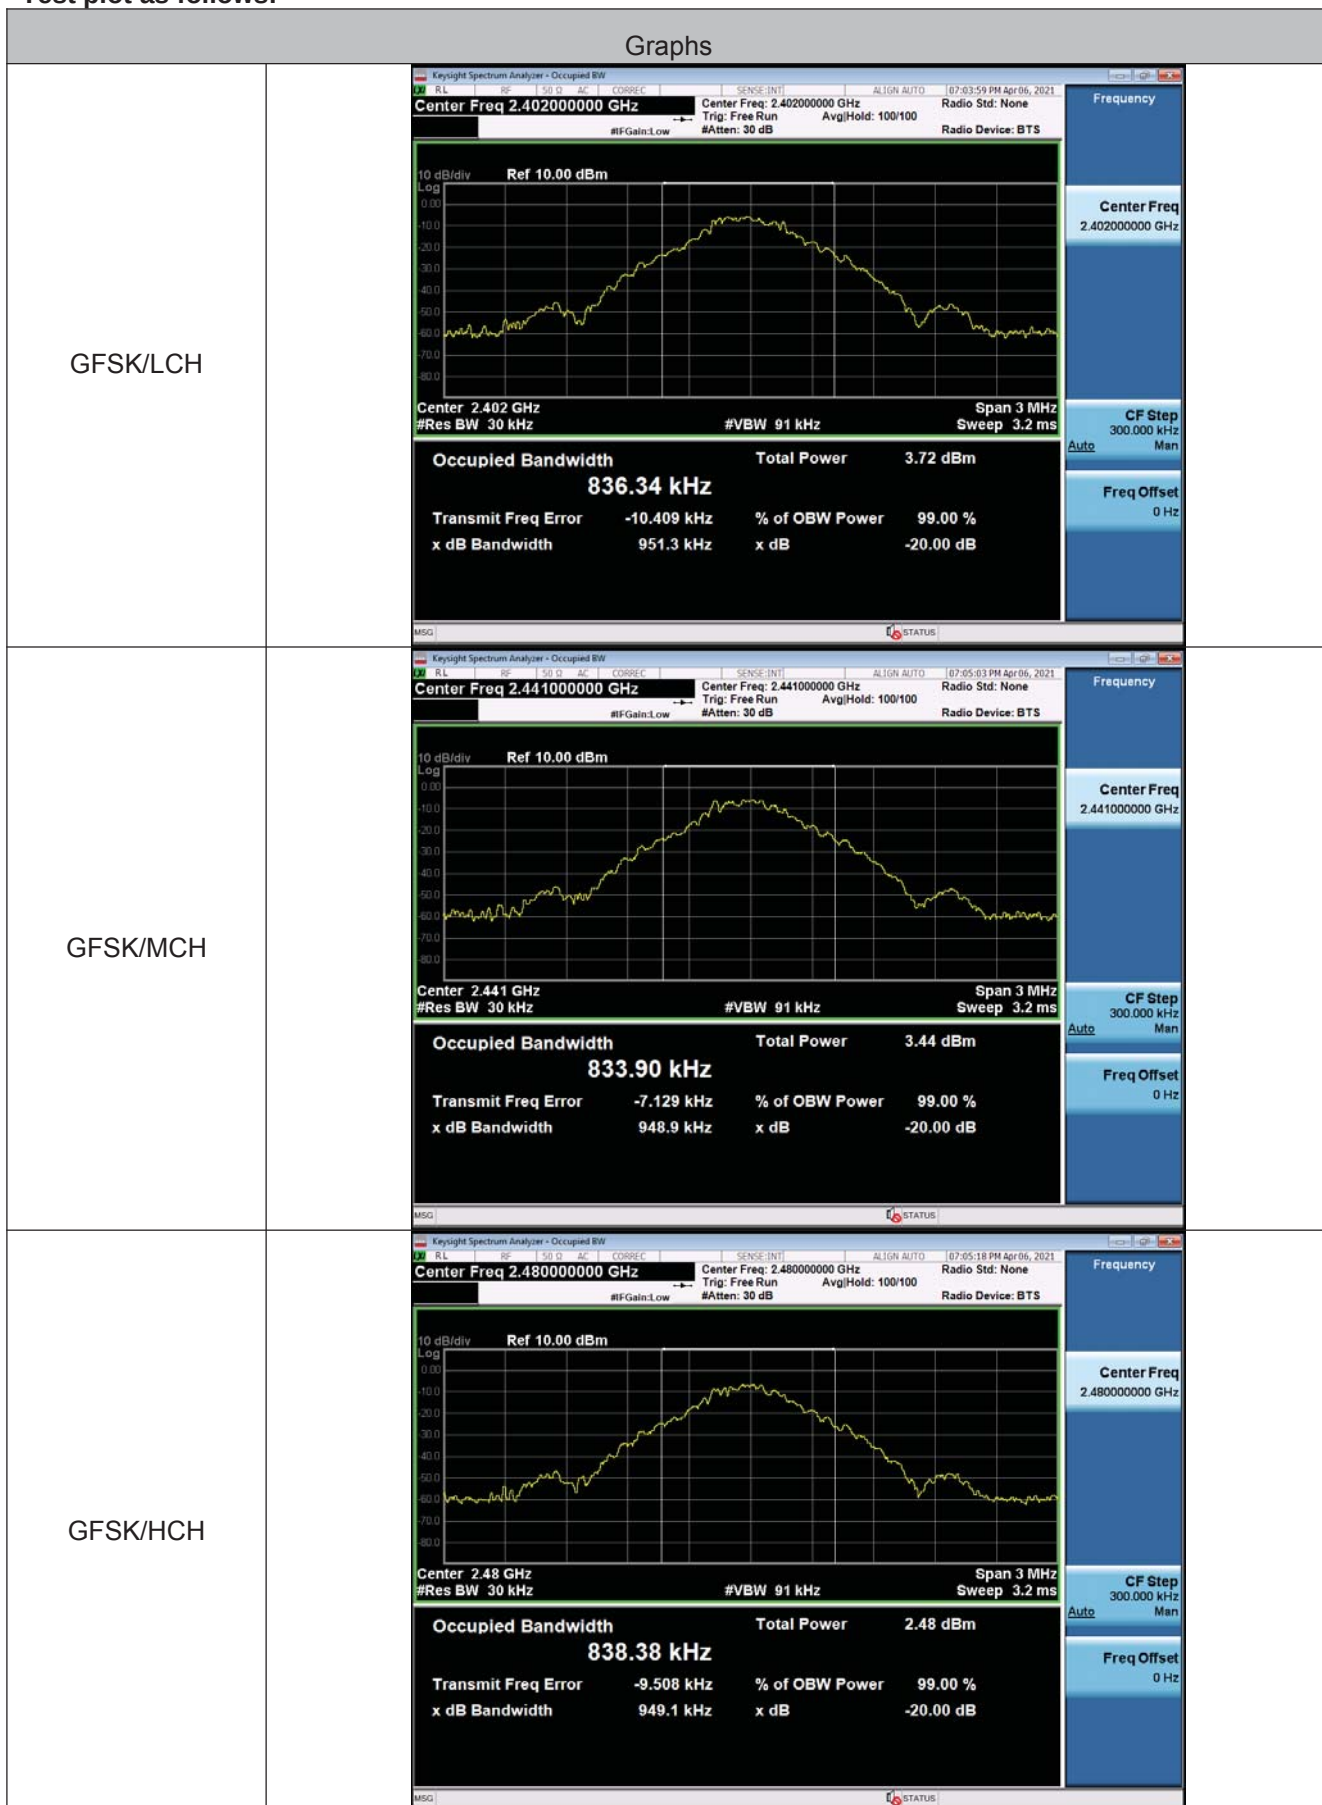
5.4 20dB Occupy Bandwidth

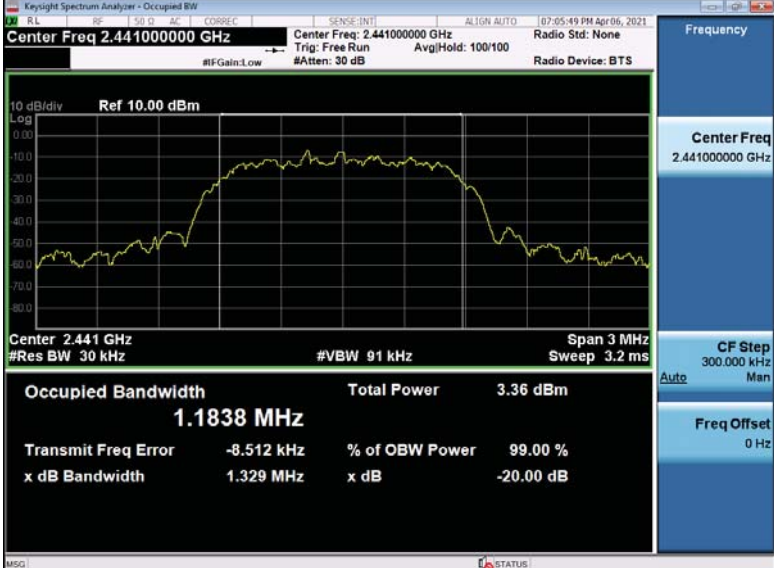
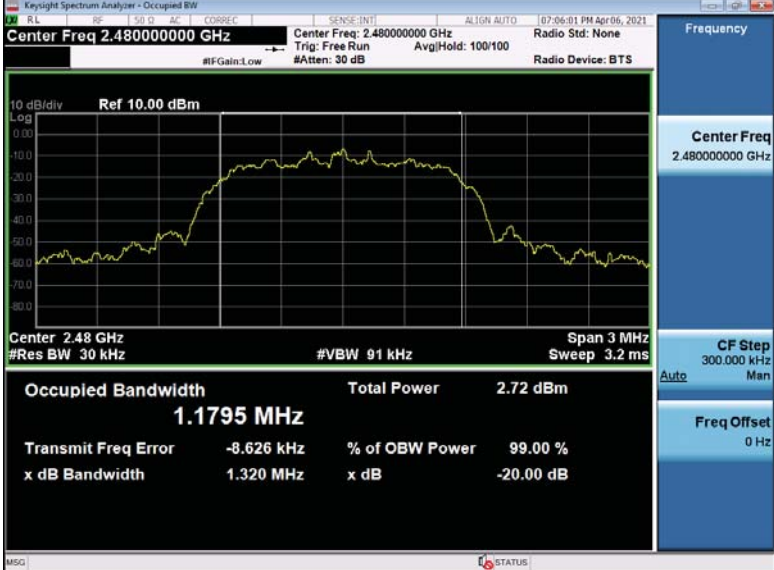
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

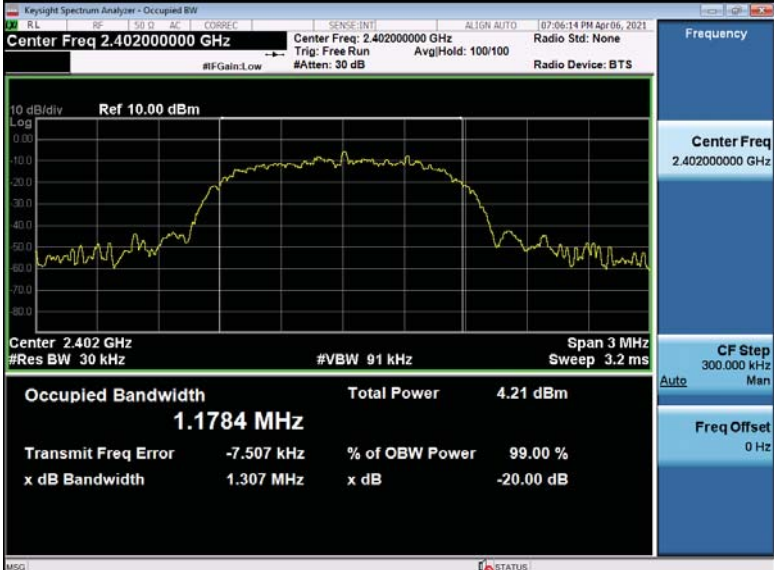
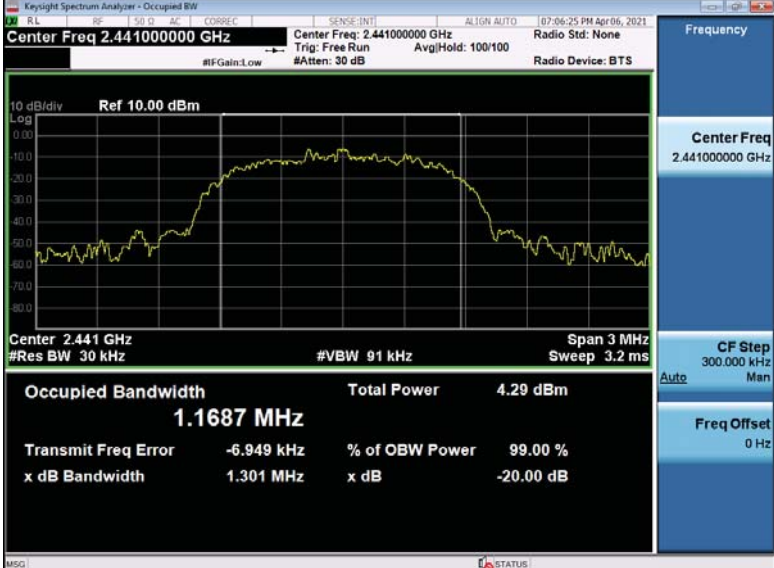
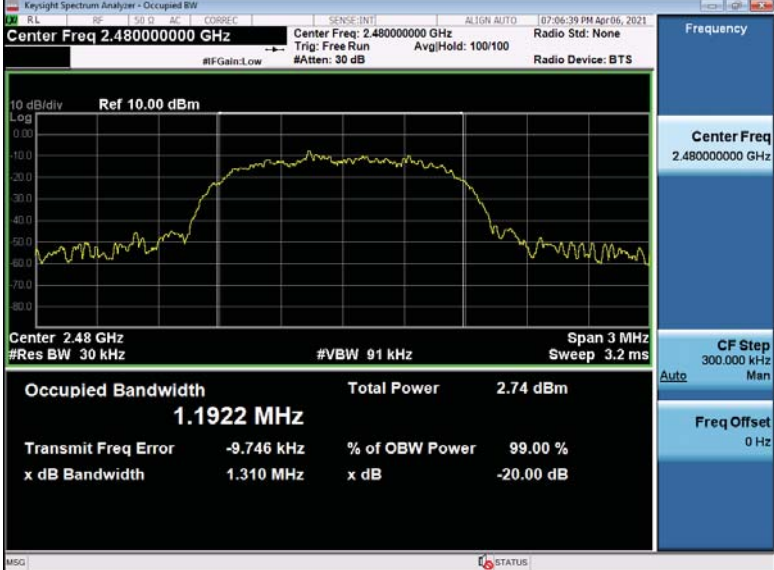
Measurement Data

Test channel	20dB Occupy Bandwidth (MHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	0.9513	1.324	1.307
Middle	0.9489	1.329	1.301
Highest	0.9491	1.320	1.310

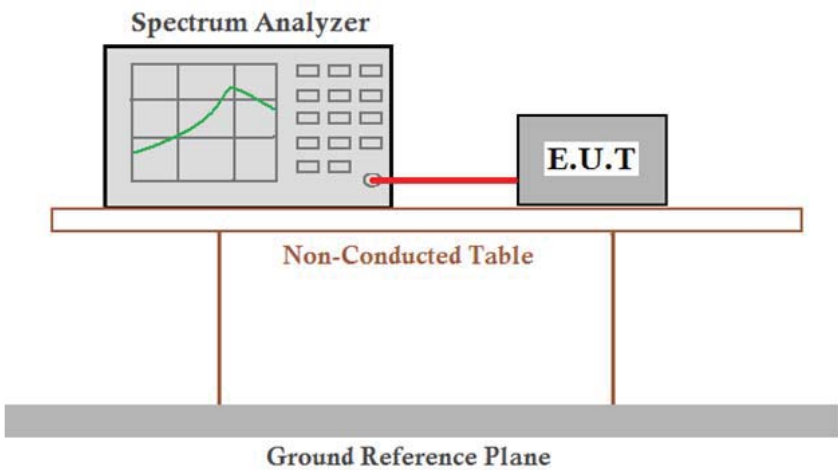
Test plot as follows:



$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

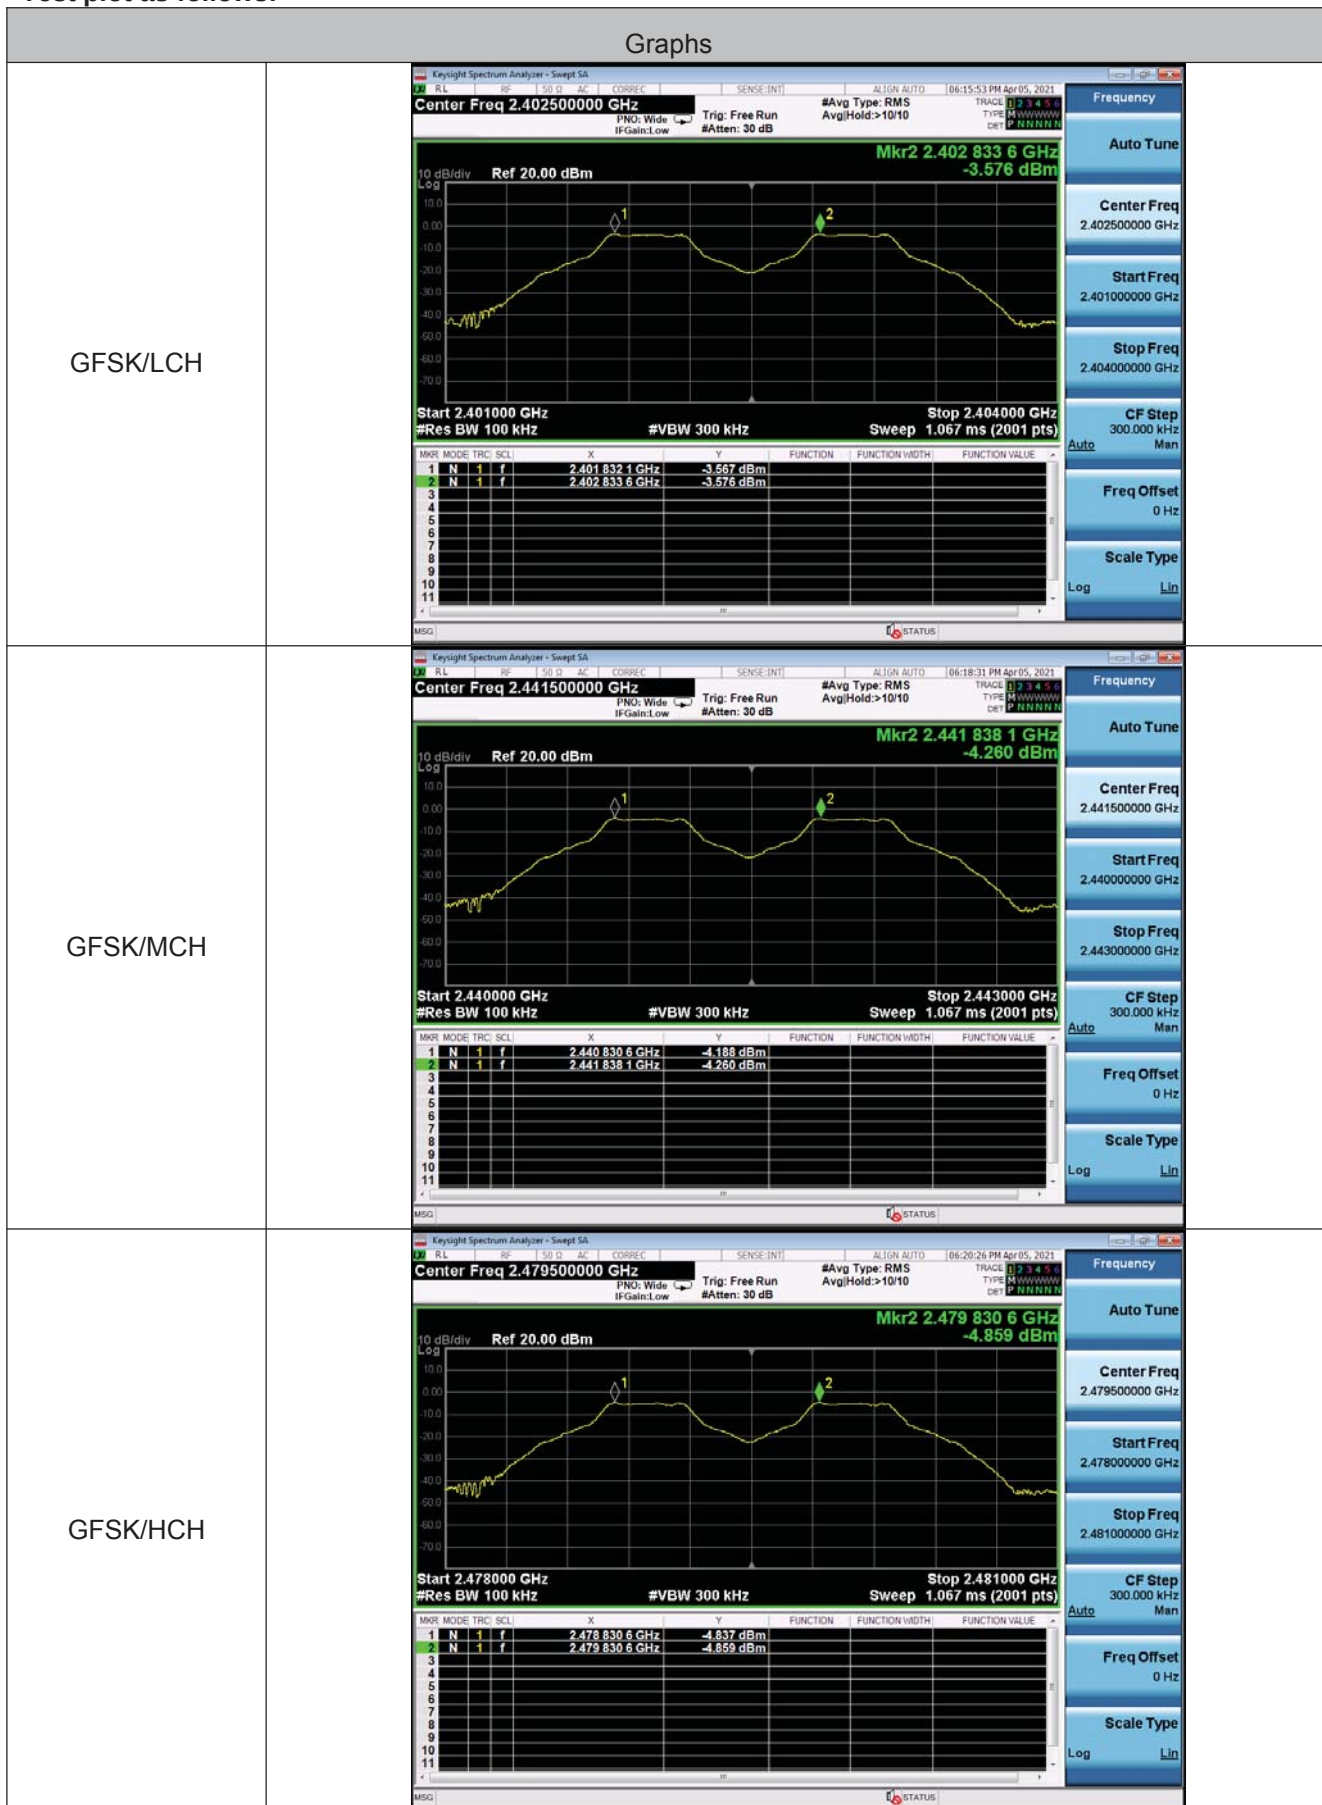
8DPSK/LCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref 10.00 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 91 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1784 MHz Total Power 4.21 dBm Transmit Freq Error -7.507 kHz % of OBW Power 99.00 % x dB Bandwidth 1.307 MHz x dB -20.00 dB Frequency Center Freq 2.402000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz
8DPSK/MCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref 10.00 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 91 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1687 MHz Total Power 4.29 dBm Transmit Freq Error -6.949 kHz % of OBW Power 99.00 % x dB Bandwidth 1.301 MHz x dB -20.00 dB Frequency Center Freq 2.441000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz
8DPSK/HCH	 KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref 10.00 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 91 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1922 MHz Total Power 2.74 dBm Transmit Freq Error -9.746 kHz % of OBW Power 99.00 % x dB Bandwidth 1.310 MHz x dB -20.00 dB Frequency Center Freq 2.480000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz

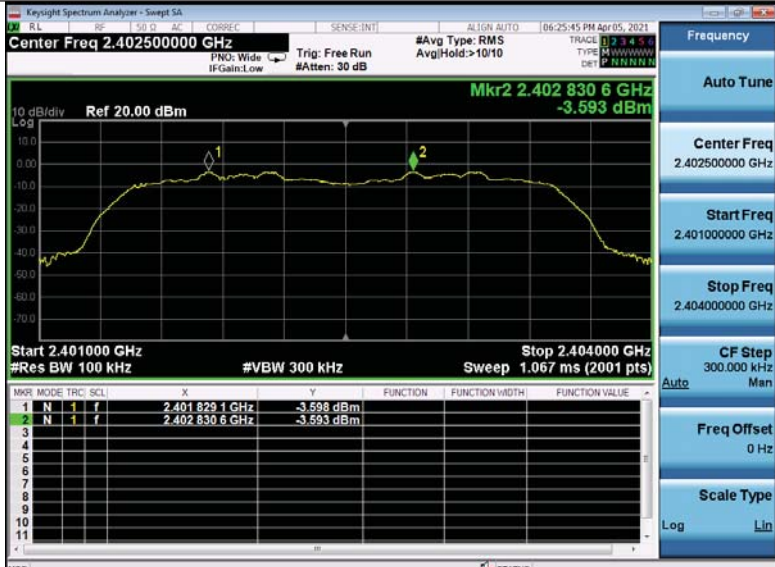
5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH00	1.001	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	1.007		
	CH40			
	CH77	1.000		
	CH78			
pi/4DQPSK	CH00	1.001	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	1.003		
	CH40			
	CH77	1.004		
	CH78			
8DPSK	CH00	1.001	25KHz or 2/3*20dB bandwidth	Pass
	CH01			
	CH39	1.000		
	CH40			
	CH77	0.999		
	CH78			

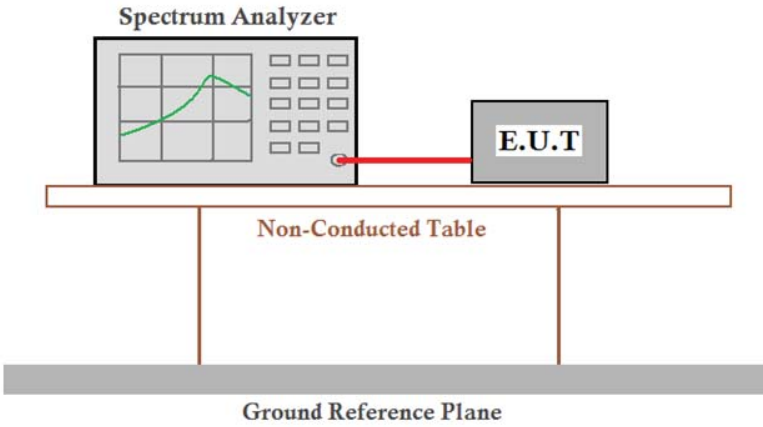
Test plot as follows:



$\pi/4$ DQPSK/LCH	 Center Freq 2.402500000 GHz Start 2.401000 GHz Stop 2.404000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401829 1 GHz</td><td>-3.598 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402830 6 GHz</td><td>-3.593 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401829 1 GHz	-3.598 dBm				2	N	1	f	2.402830 6 GHz	-3.593 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.401829 1 GHz	-3.598 dBm																							
2	N	1	f	2.402830 6 GHz	-3.593 dBm																							
$\pi/4$ DQPSK/MCH	 Center Freq 2.441500000 GHz Start 2.440000 GHz Stop 2.443000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440829 1 GHz</td><td>-4.141 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.441832 1 GHz</td><td>-4.127 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440829 1 GHz	-4.141 dBm				2	N	1	f	2.441832 1 GHz	-4.127 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.440829 1 GHz	-4.141 dBm																							
2	N	1	f	2.441832 1 GHz	-4.127 dBm																							
$\pi/4$ DQPSK/HCH	 Center Freq 2.479500000 GHz Start 2.478000 GHz Stop 2.481000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.478833 6 GHz</td><td>-4.796 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.479838 1 GHz</td><td>-4.894 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478833 6 GHz	-4.796 dBm				2	N	1	f	2.479838 1 GHz	-4.894 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.478833 6 GHz	-4.796 dBm																							
2	N	1	f	2.479838 1 GHz	-4.894 dBm																							

8DPSK/LCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.402500000 GHz Ref 20.00 dBm Mkr2 2.402 991 0 GHz -3.655 dBm Start 2.4010000 GHz Stop 2.4040000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 989 5 GHz</td><td>-3.647 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.402 991 0 GHz</td><td>-3.655 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 989 5 GHz	-3.647 dBm				2	N	1	f	2.402 991 0 GHz	-3.655 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.401 989 5 GHz	-3.647 dBm																							
2	N	1	f	2.402 991 0 GHz	-3.655 dBm																							
8DPSK/MCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.441500000 GHz Ref 20.00 dBm Mkr2 2.441 991 0 GHz -4.166 dBm Start 2.4400000 GHz Stop 2.4430000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 991 0 GHz</td><td>-4.195 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.441 991 0 GHz</td><td>-4.166 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 991 0 GHz	-4.195 dBm				2	N	1	f	2.441 991 0 GHz	-4.166 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.440 991 0 GHz	-4.195 dBm																							
2	N	1	f	2.441 991 0 GHz	-4.166 dBm																							
8DPSK/HCH	 KeySight Spectrum Analyzer - Swept SA Center Freq 2.479500000 GHz Ref 20.00 dBm Mkr2 2.479 989 5 GHz -4.884 dBm Start 2.4780000 GHz Stop 2.4810000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms (2001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.478 991 0 GHz</td><td>-4.842 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.479 989 5 GHz</td><td>-4.884 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 991 0 GHz	-4.842 dBm				2	N	1	f	2.479 989 5 GHz	-4.884 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.478 991 0 GHz	-4.842 dBm																							
2	N	1	f	2.479 989 5 GHz	-4.884 dBm																							

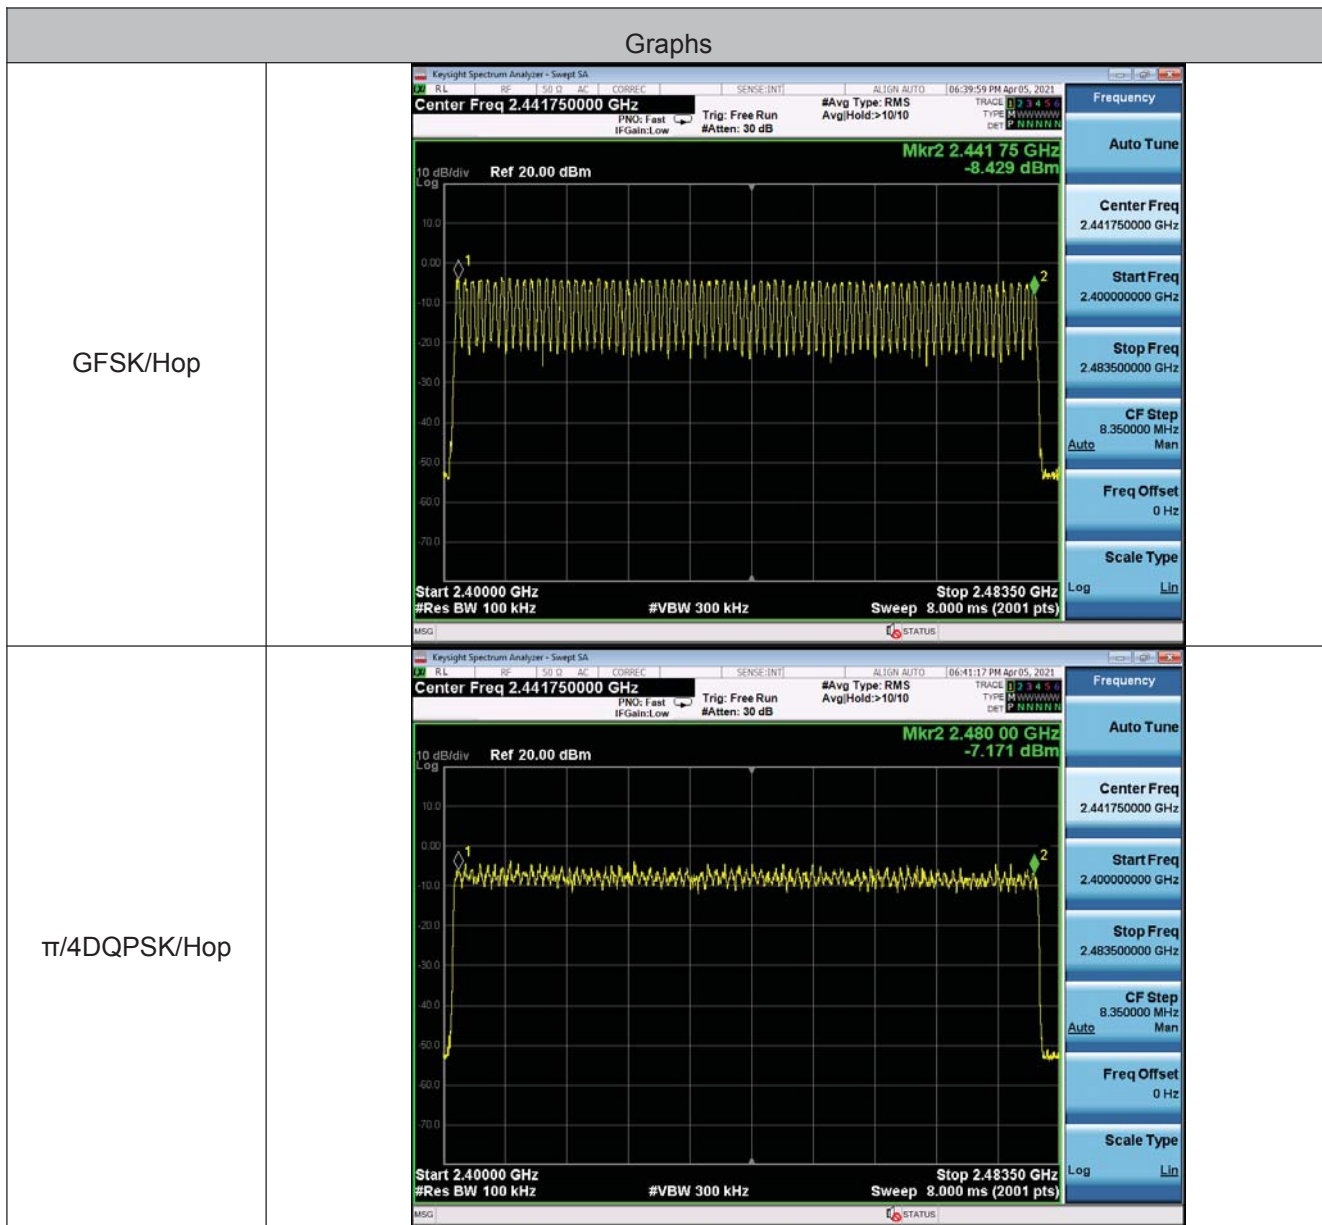
5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥ 15
$\pi/4$ DQPSK	79	≥ 15
8DPSK	79	≥ 15

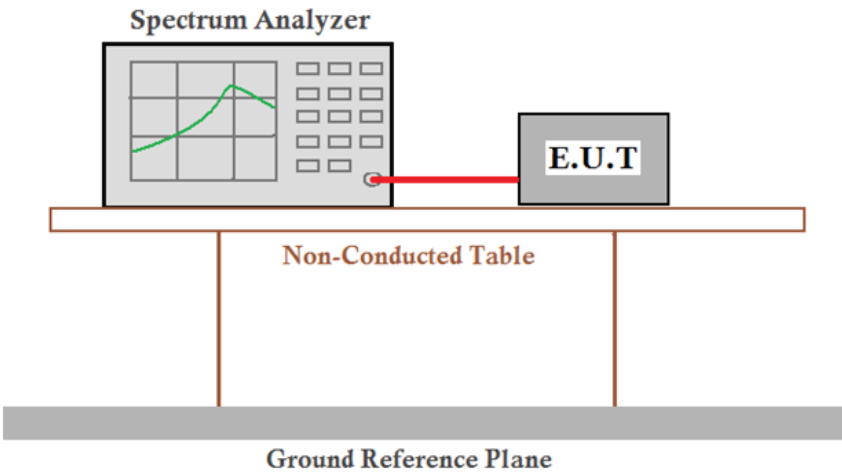
Test plot as follows:



8DPSK/Hop



5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Dwell Time[ms]	Limit (second)
GFSK	DH1	LCH	0.4026	128.832	≤0.4
GFSK	DH1	MCH	0.3990	127.680	≤0.4
GFSK	DH1	HCH	0.4021	128.672	≤0.4
GFSK	DH3	LCH	1.658	265.280	≤0.4
GFSK	DH3	MCH	1.655	264.800	≤0.4
GFSK	DH3	HCH	1.658	265.280	≤0.4
GFSK	DH5	LCH	2.903	309.653	≤0.4
GFSK	DH5	MCH	2.904	309.760	≤0.4
GFSK	DH5	HCH	2.907	310.080	≤0.4
π/4DQPSK	2DH1	LCH	0.4079	130.528	≤0.4
π/4DQPSK	2DH1	MCH	0.4081	130.592	≤0.4
π/4DQPSK	2DH1	HCH	0.4107	131.424	≤0.4
π/4DQPSK	2DH3	LCH	1.661	265.760	≤0.4
π/4DQPSK	2DH3	MCH	1.663	266.080	≤0.4
π/4DQPSK	2DH3	HCH	1.663	266.080	≤0.4
π/4DQPSK	2DH5	LCH	2.911	310.507	≤0.4
π/4DQPSK	2DH5	MCH	2.909	310.293	≤0.4
π/4DQPSK	2DH5	HCH	2.912	310.613	≤0.4
8DPSK	3DH1	LCH	0.4108	131.456	≤0.4
8DPSK	3DH1	MCH	0.4112	131.584	≤0.4
8DPSK	3DH1	HCH	0.4121	131.872	≤0.4
8DPSK	3DH3	LCH	1.662	265.920	≤0.4
8DPSK	3DH3	MCH	1.662	265.920	≤0.4
8DPSK	3DH3	HCH	1.662	265.920	≤0.4
8DPSK	3DH5	LCH	2.912	310.613	≤0.4
8DPSK	3DH5	MCH	2.914	310.827	≤0.4
8DPSK	3DH5	HCH	2.914	310.827	≤0.4

Remark:

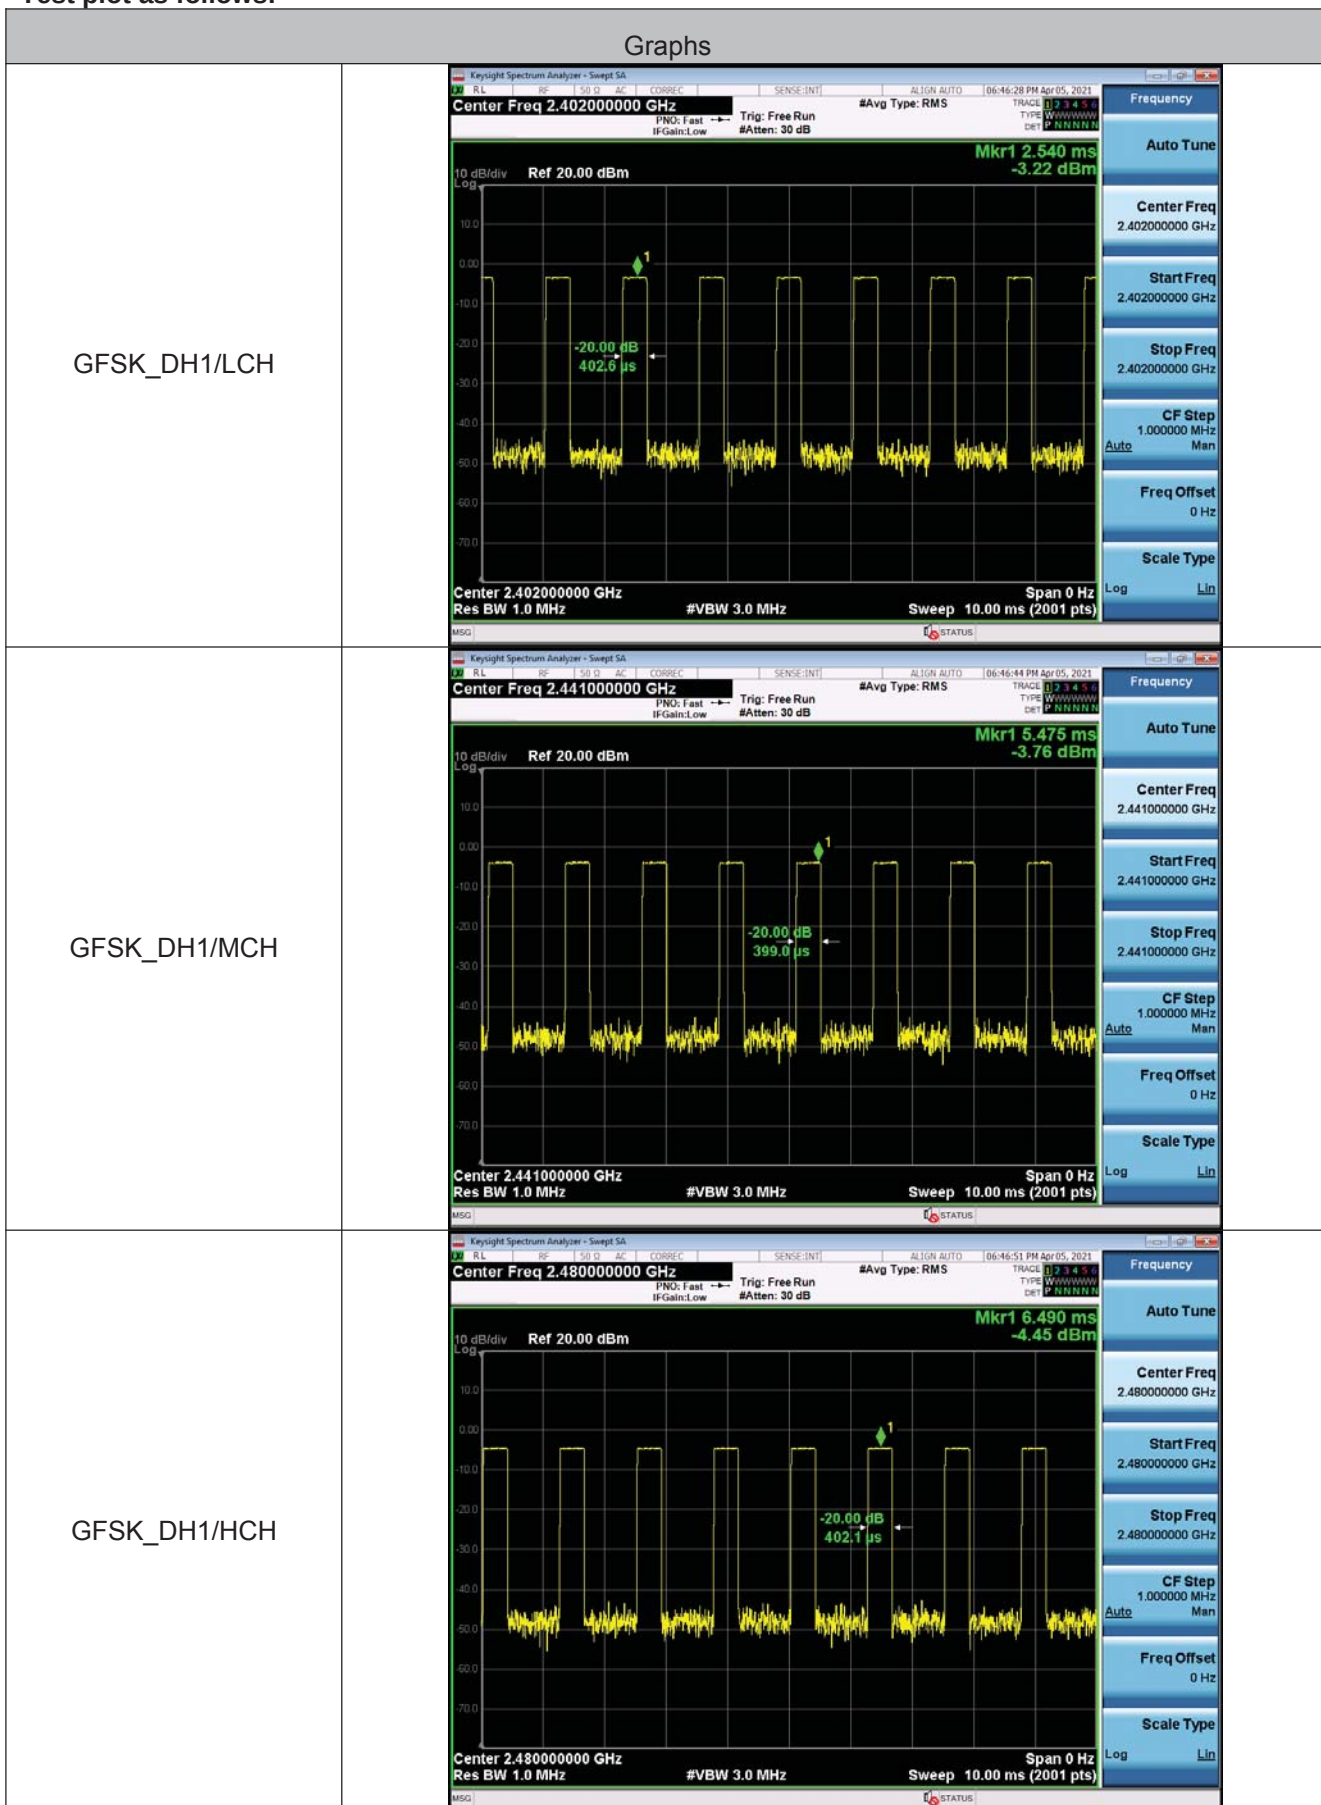
The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

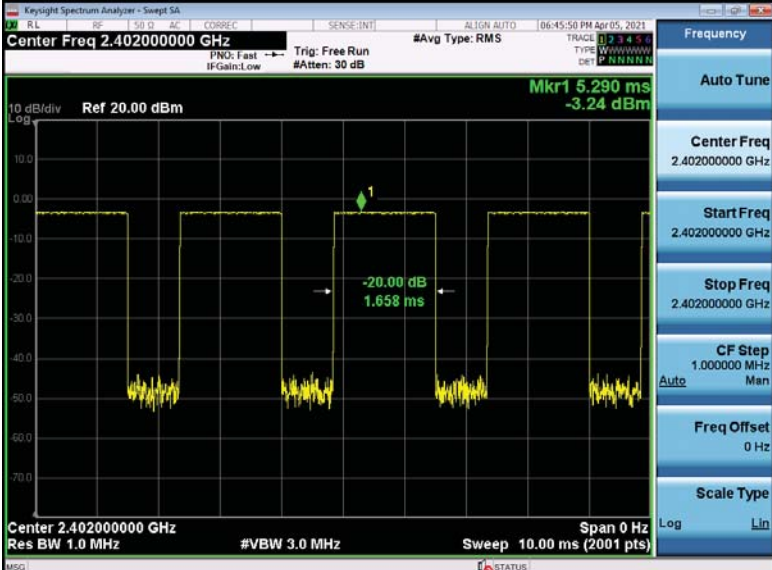
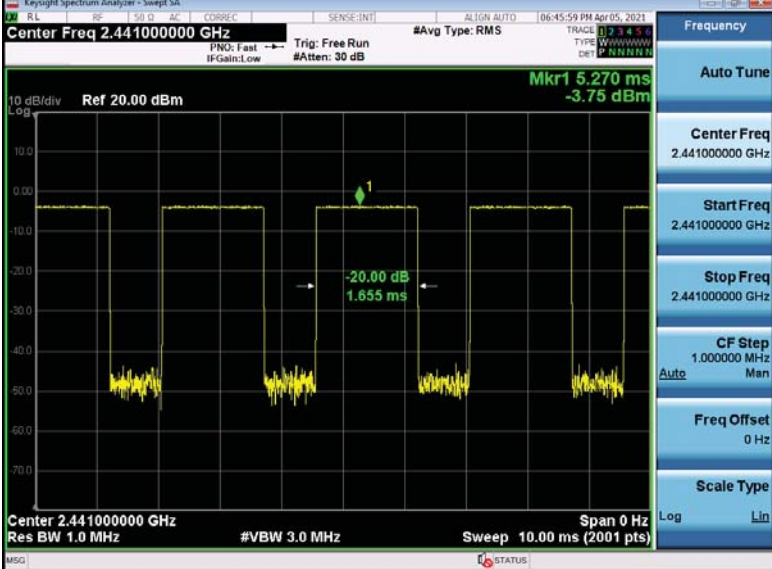
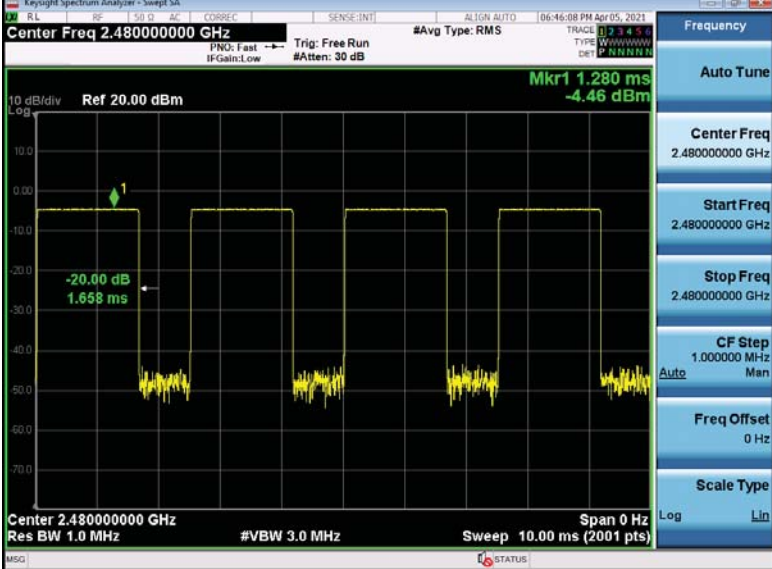
DH1/2DH1 Dwell time = Burst Width(ms)*(1600/ (2*79))*31.6

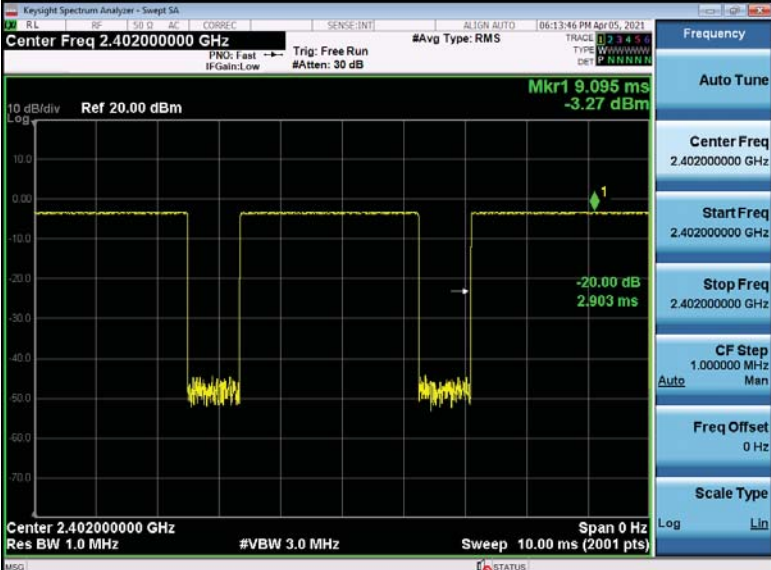
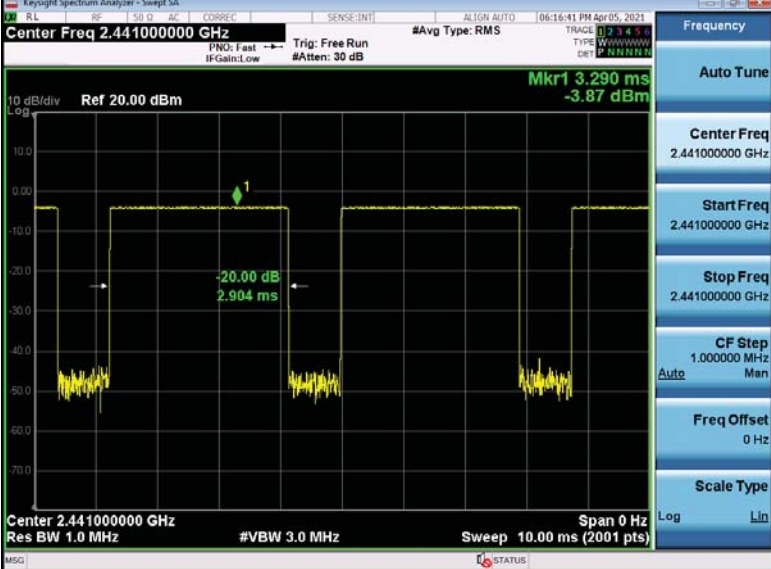
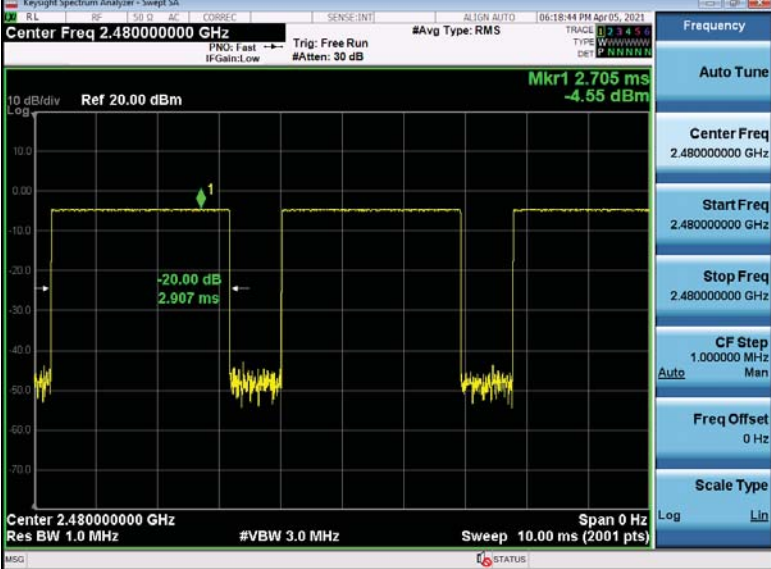
DH3/2DH3 Dwell time = Burst Width (ms)*(1600/ (4*79))*31.6

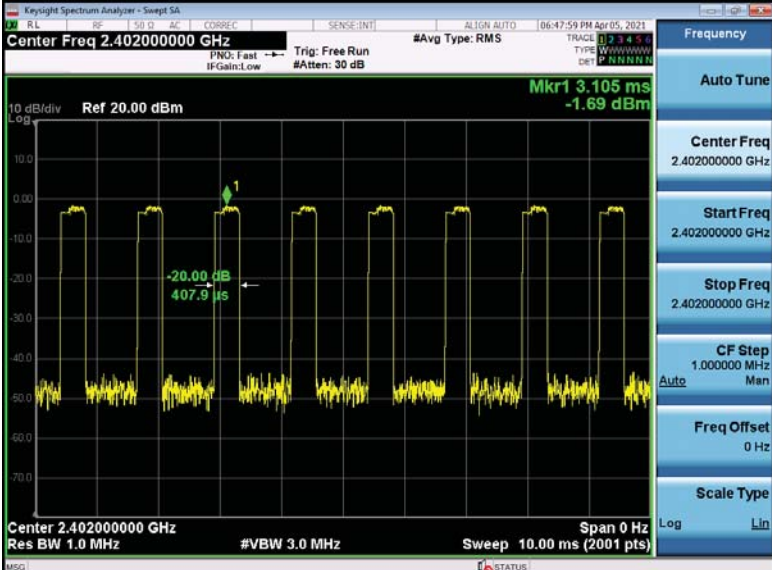
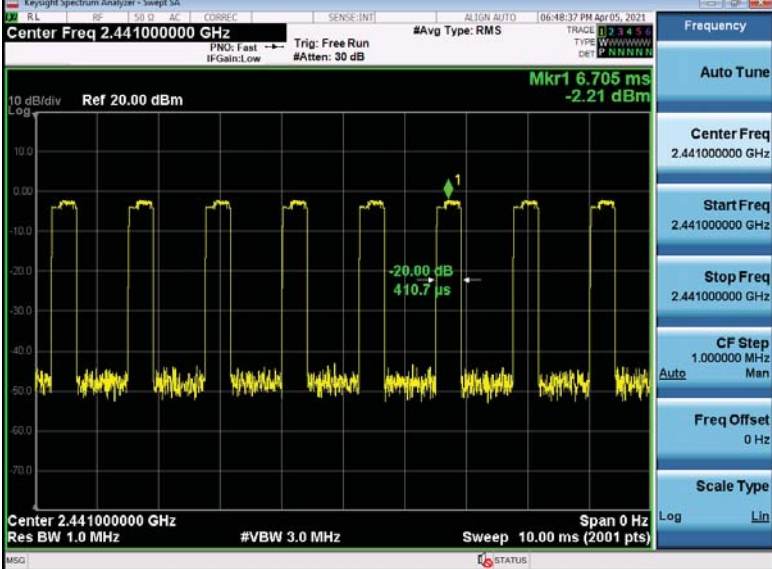
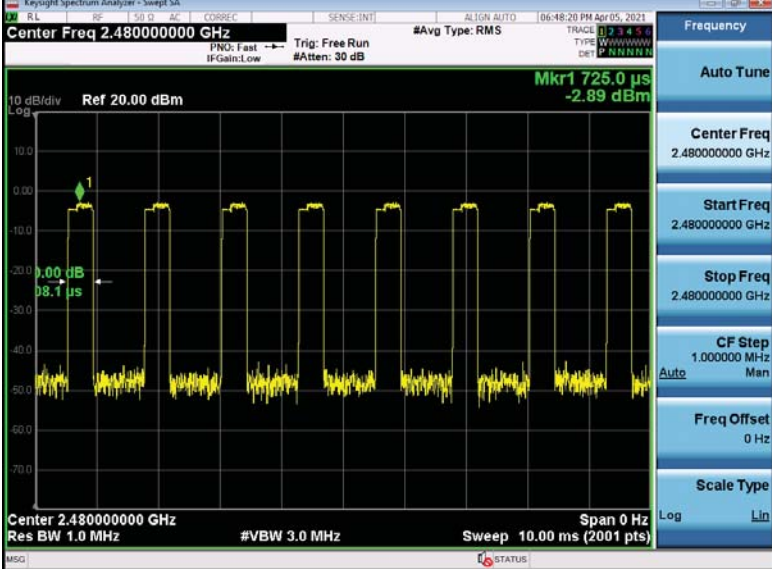
DH5/2DH5 Dwell time = Burst Width (ms)*(1600/ (6*79))*31.6

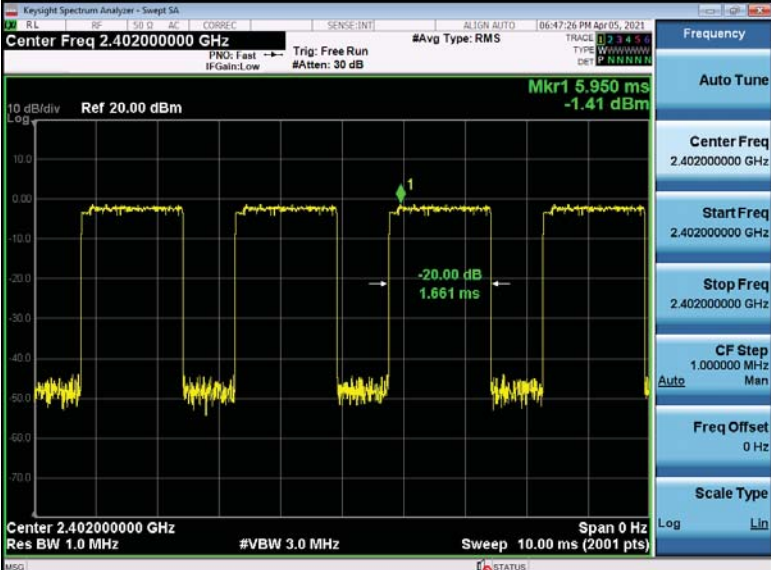
Test plot as follows:



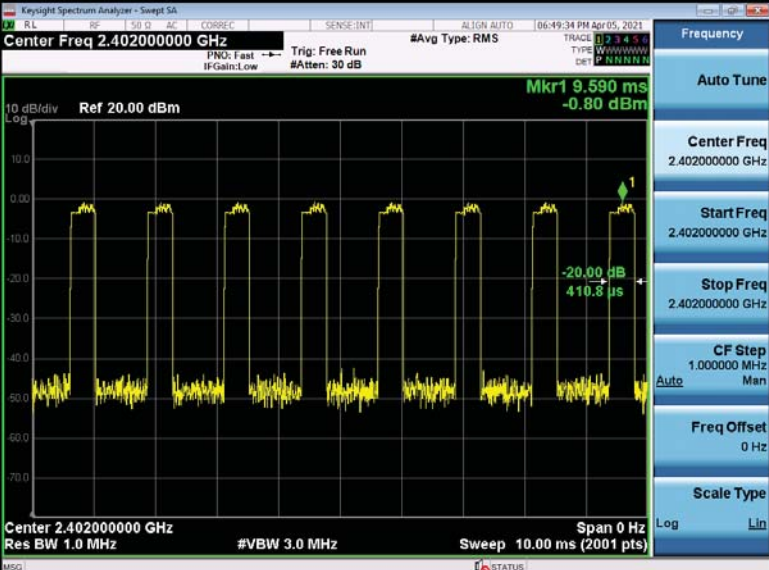
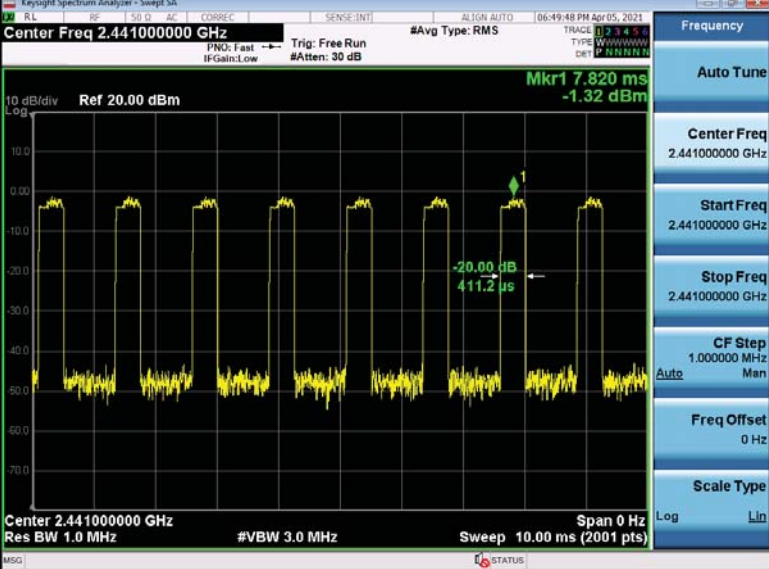
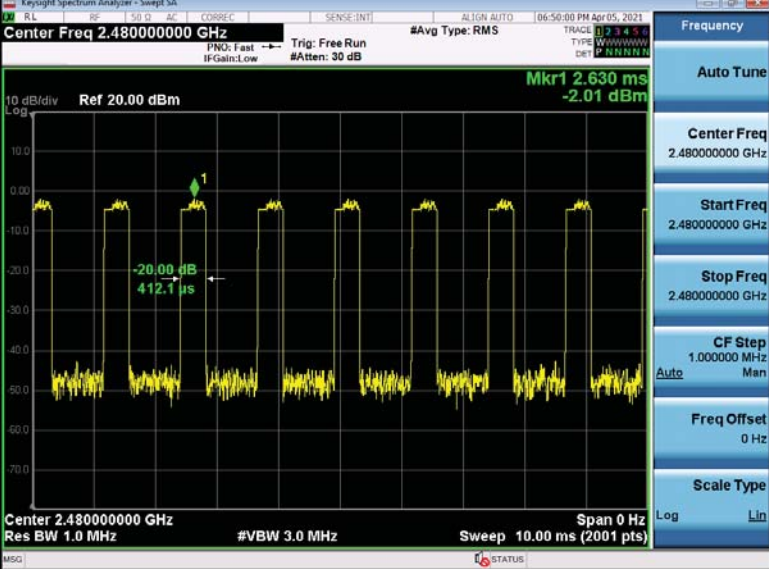
GFSK_DH3/LCH	 Key parameters for GFSK_DH3/LCH: - Center Freq: 2.402000000 GHz - Start Freq: 2.402000000 GHz - Stop Freq: 2.402000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Center: 2.402000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Mkr1: 5.290 ms, -3.24 dBm -20.00 dB, 1.658 ms
GFSK_DH3/MCH	 Key parameters for GFSK_DH3/MCH: - Center Freq: 2.441000000 GHz - Start Freq: 2.441000000 GHz - Stop Freq: 2.441000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Center: 2.441000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Mkr1: 5.270 ms, -3.75 dBm -20.00 dB, 1.655 ms
GFSK_DH3/HCH	 Key parameters for GFSK_DH3/HCH: - Center Freq: 2.480000000 GHz - Start Freq: 2.480000000 GHz - Stop Freq: 2.480000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Center: 2.480000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Mkr1: 1.280 ms, -4.46 dBm -20.00 dB, 1.658 ms

GFSK_DH5/LCH	 Key parameters for GFSK_DH5/LCH: - Center Freq: 2.402000000 GHz - Start Freq: 2.402000000 GHz - Stop Freq: 2.402000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Center Freq: 2.402000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Mkr1: 9.095 ms, -3.27 dBm -20.00 dB, 2.903 ms
GFSK_DH5/MCH	 Key parameters for GFSK_DH5/MCH: - Center Freq: 2.441000000 GHz - Start Freq: 2.441000000 GHz - Stop Freq: 2.441000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Center Freq: 2.441000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Mkr1: 3.290 ms, -3.87 dBm -20.00 dB, 2.904 ms
GFSK_DH5/HCH	 Key parameters for GFSK_DH5/HCH: - Center Freq: 2.480000000 GHz - Start Freq: 2.480000000 GHz - Stop Freq: 2.480000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Center Freq: 2.480000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Mkr1: 2.705 ms, -4.55 dBm -20.00 dB, 2.907 ms

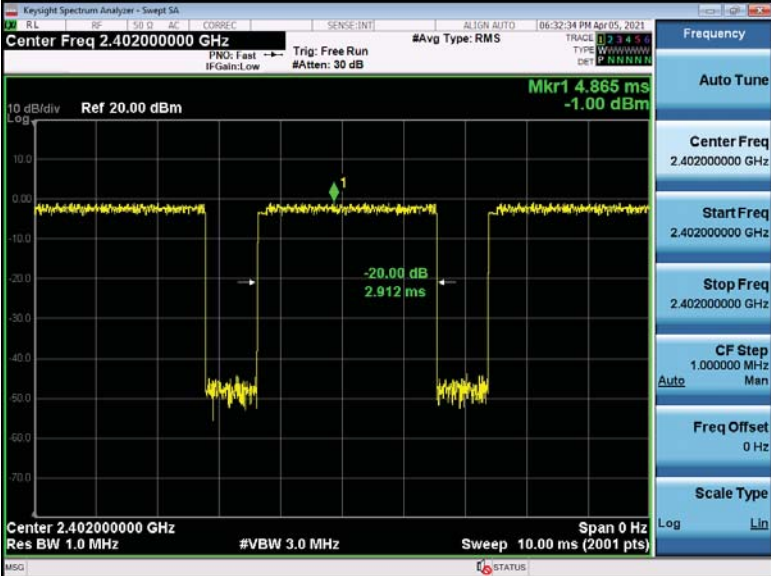
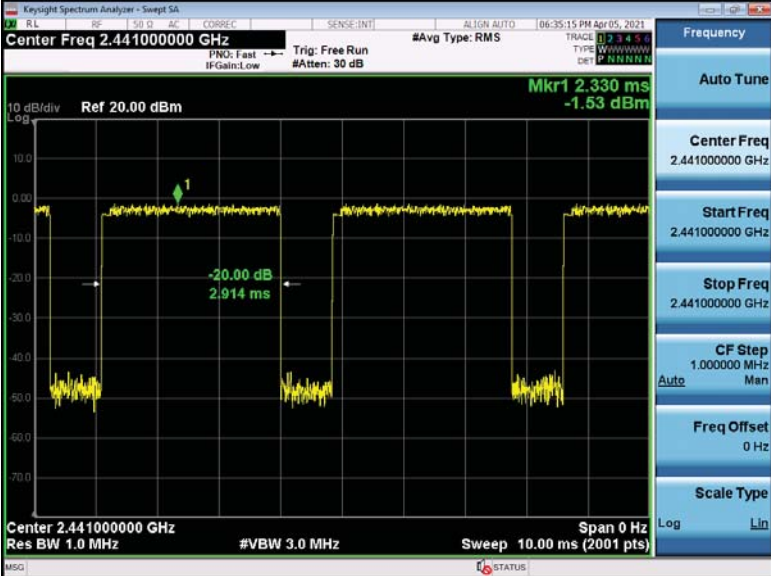
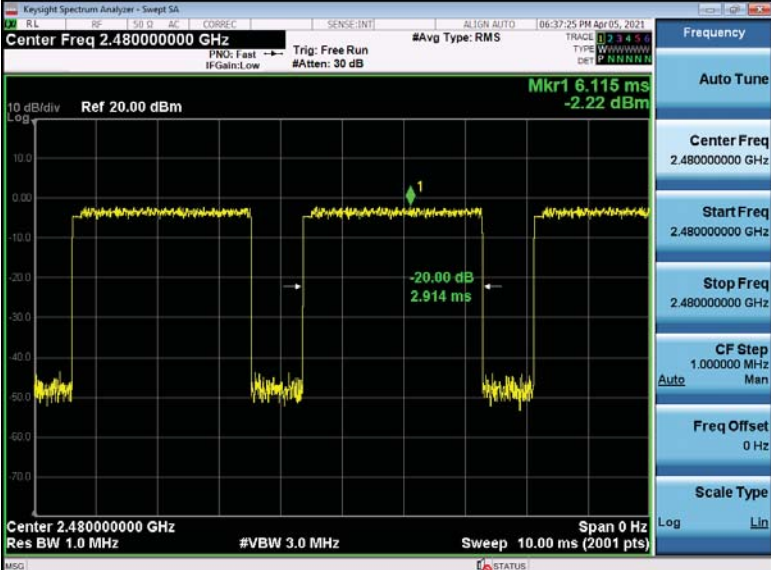
$\pi/4$DQPSK_2DH1/LCH	
$\pi/4$DQPSK_2DH1/MCH	
$\pi/4$DQPSK_2DH1/HCH	

$\pi/4$DQPSK_2DH3/LCH	 Key parameters for $\pi/4$DQPSK_2DH3/LCH: - Center Freq: 2.402000000 GHz - Start Freq: 2.402000000 GHz - Stop Freq: 2.402000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Ref: 20.00 dBm - Mkr1: 5.950 ms, -1.41 dBm - RBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts)
$\pi/4$DQPSK_2DH3/MCH	 Key parameters for $\pi/4$DQPSK_2DH3/MCH: - Center Freq: 2.441000000 GHz - Start Freq: 2.441000000 GHz - Stop Freq: 2.441000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Ref: 20.00 dBm - Mkr1: 485.0 μs, -1.97 dBm - RBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts)
$\pi/4$DQPSK_2DH3/HCH	 Key parameters for $\pi/4$DQPSK_2DH3/HCH: - Center Freq: 2.480000000 GHz - Start Freq: 2.480000000 GHz - Stop Freq: 2.480000000 GHz - CF Step: 1.000000 MHz - Freq Offset: 0 Hz - Scale Type: Log - Ref: 20.00 dBm - Mkr1: 2.370 ms, -2.67 dBm - RBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts)

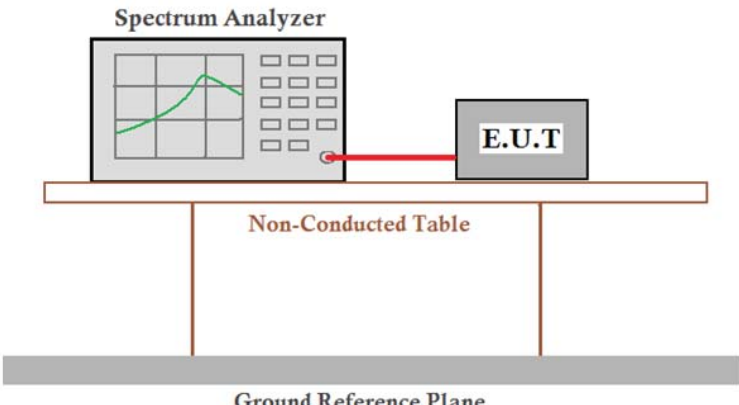
Page:40 of 70

8DPSK_3DH1/LCH	 Key parameters for 8DPSK_3DH1/LCH: - Center Freq: 2.402000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Peak Level: -0.80 dBm - Marker: Mkr1 9.590 ms, -0.80 dBm
8DPSK_3DH1/MCH	 Key parameters for 8DPSK_3DH1/MCH: - Center Freq: 2.441000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Peak Level: -1.32 dBm - Marker: Mkr1 7.820 ms, -1.32 dBm
8DPSK_3DH1/HCH	 Key parameters for 8DPSK_3DH1/HCH: - Center Freq: 2.480000000 GHz - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts) - Peak Level: -2.01 dBm - Marker: Mkr1 2.630 ms, -2.01 dBm

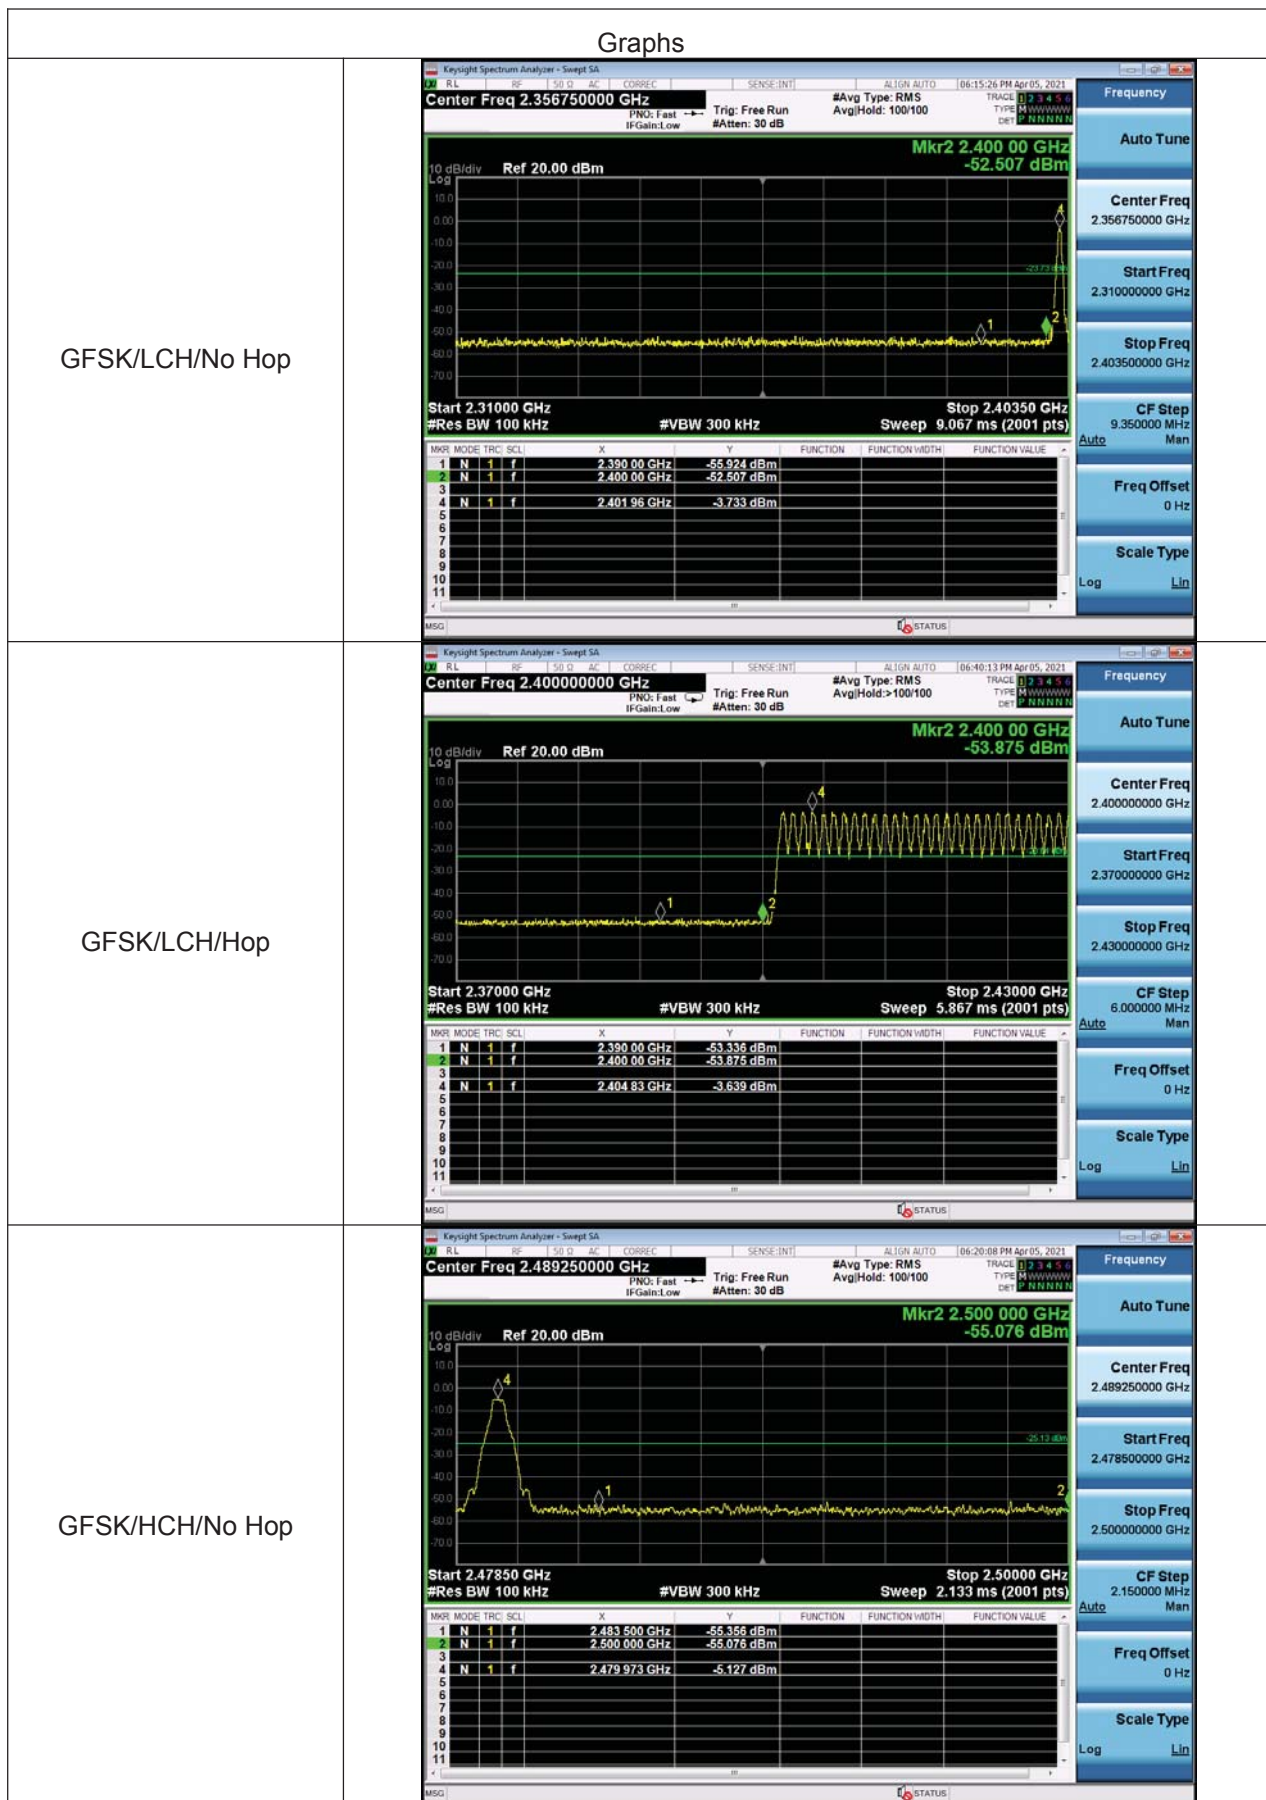
Page:42 of 70

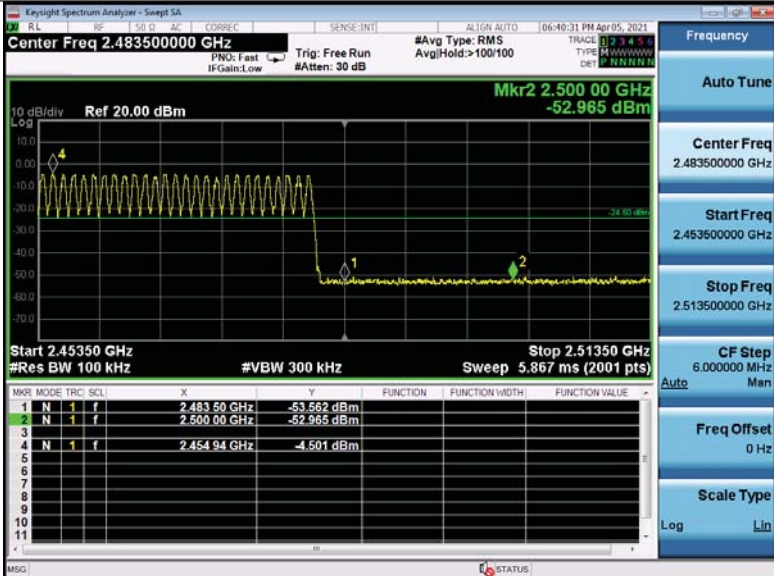
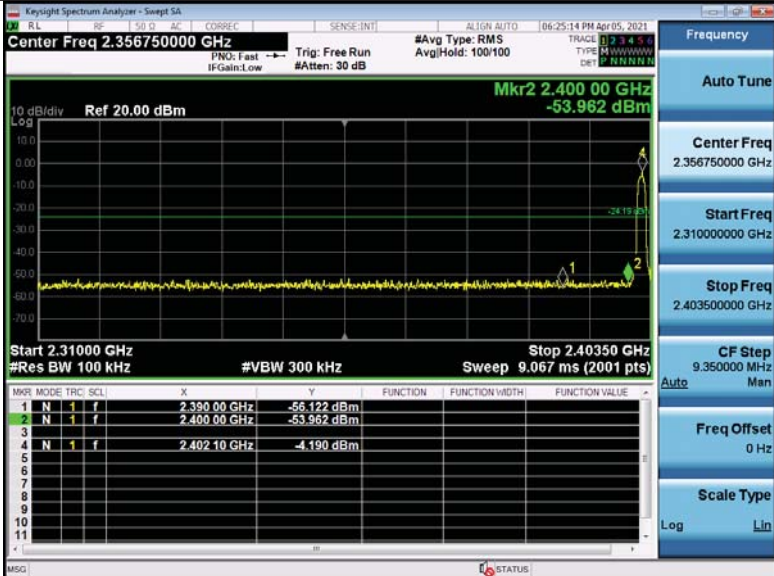
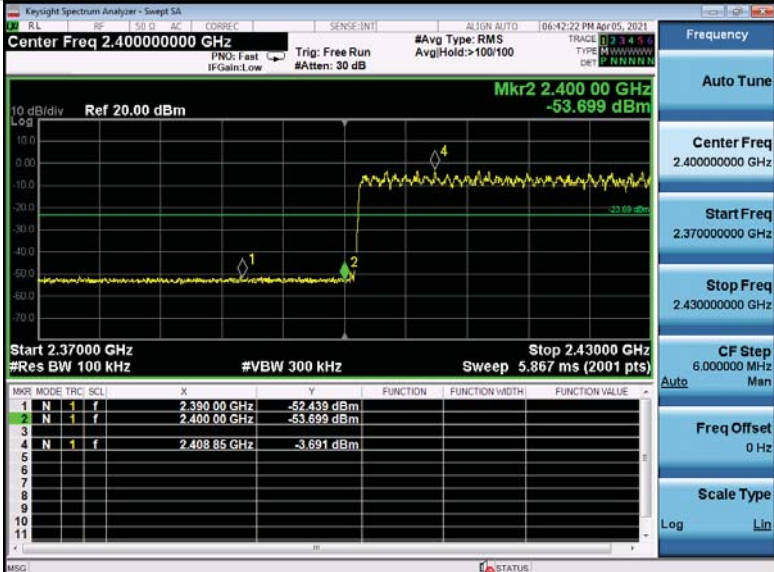
8DPSK_3DH5/LCH	 Key parameters for 8DPSK_3DH5/LCH: - Center Freq: 2.402000000 GHz - Ref: 20.00 dBm - Mkr1: 4.865 ms, -1.00 dBm - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts)
8DPSK_3DH5/MCH	 Key parameters for 8DPSK_3DH5/MCH: - Center Freq: 2.441000000 GHz - Ref: 20.00 dBm - Mkr1: 2.330 ms, -1.53 dBm - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts)
8DPSK_3DH5/HCH	 Key parameters for 8DPSK_3DH5/HCH: - Center Freq: 2.480000000 GHz - Ref: 20.00 dBm - Mkr1: 6.115 ms, -2.22 dBm - Res BW: 1.0 MHz #VBW: 3.0 MHz - Sweep: 10.00 ms (2001 pts)

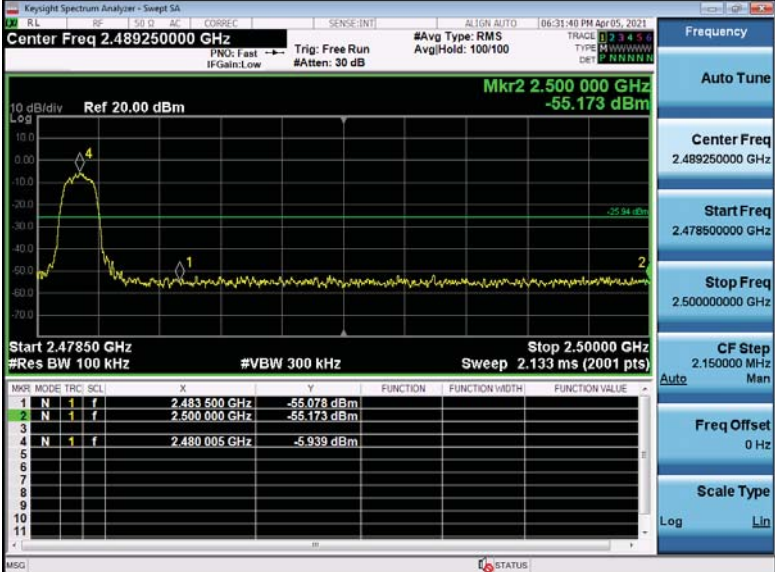
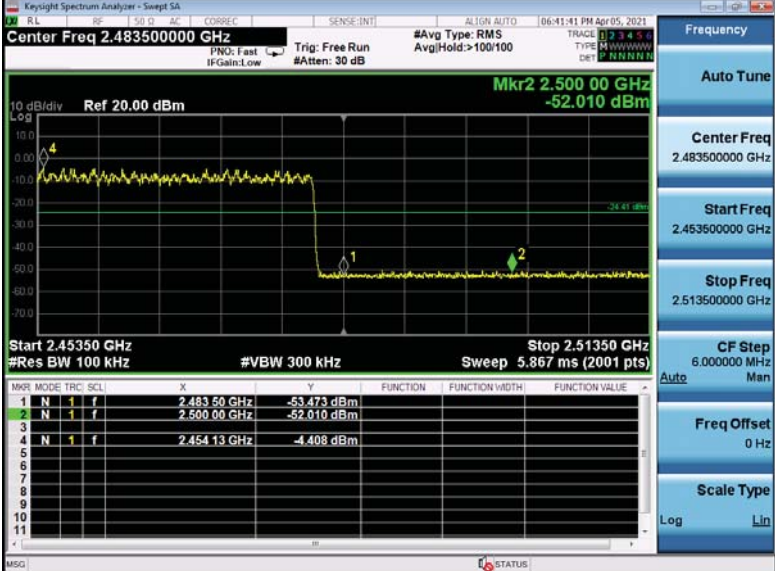
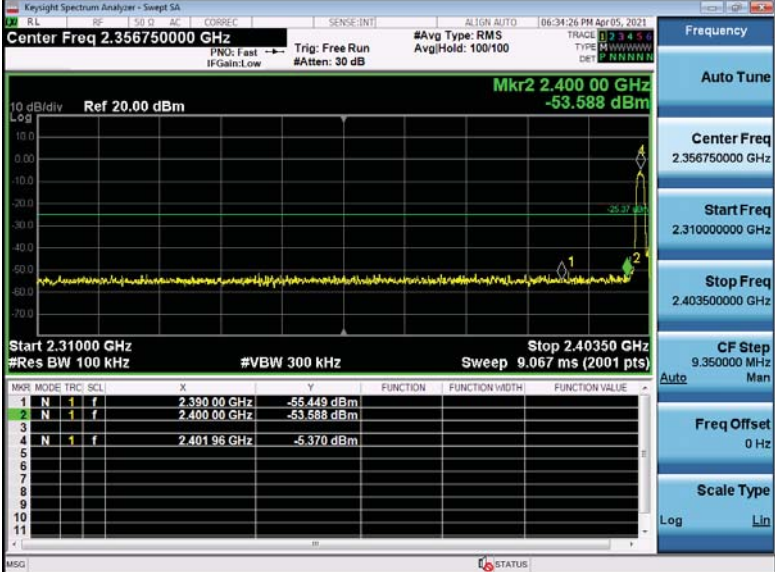
5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass

Test plot as follows:

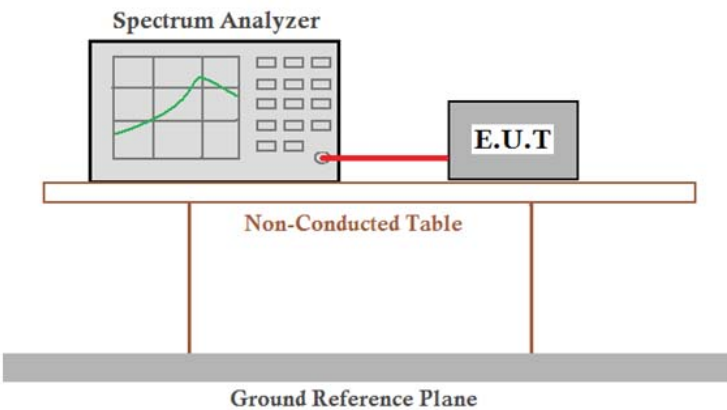


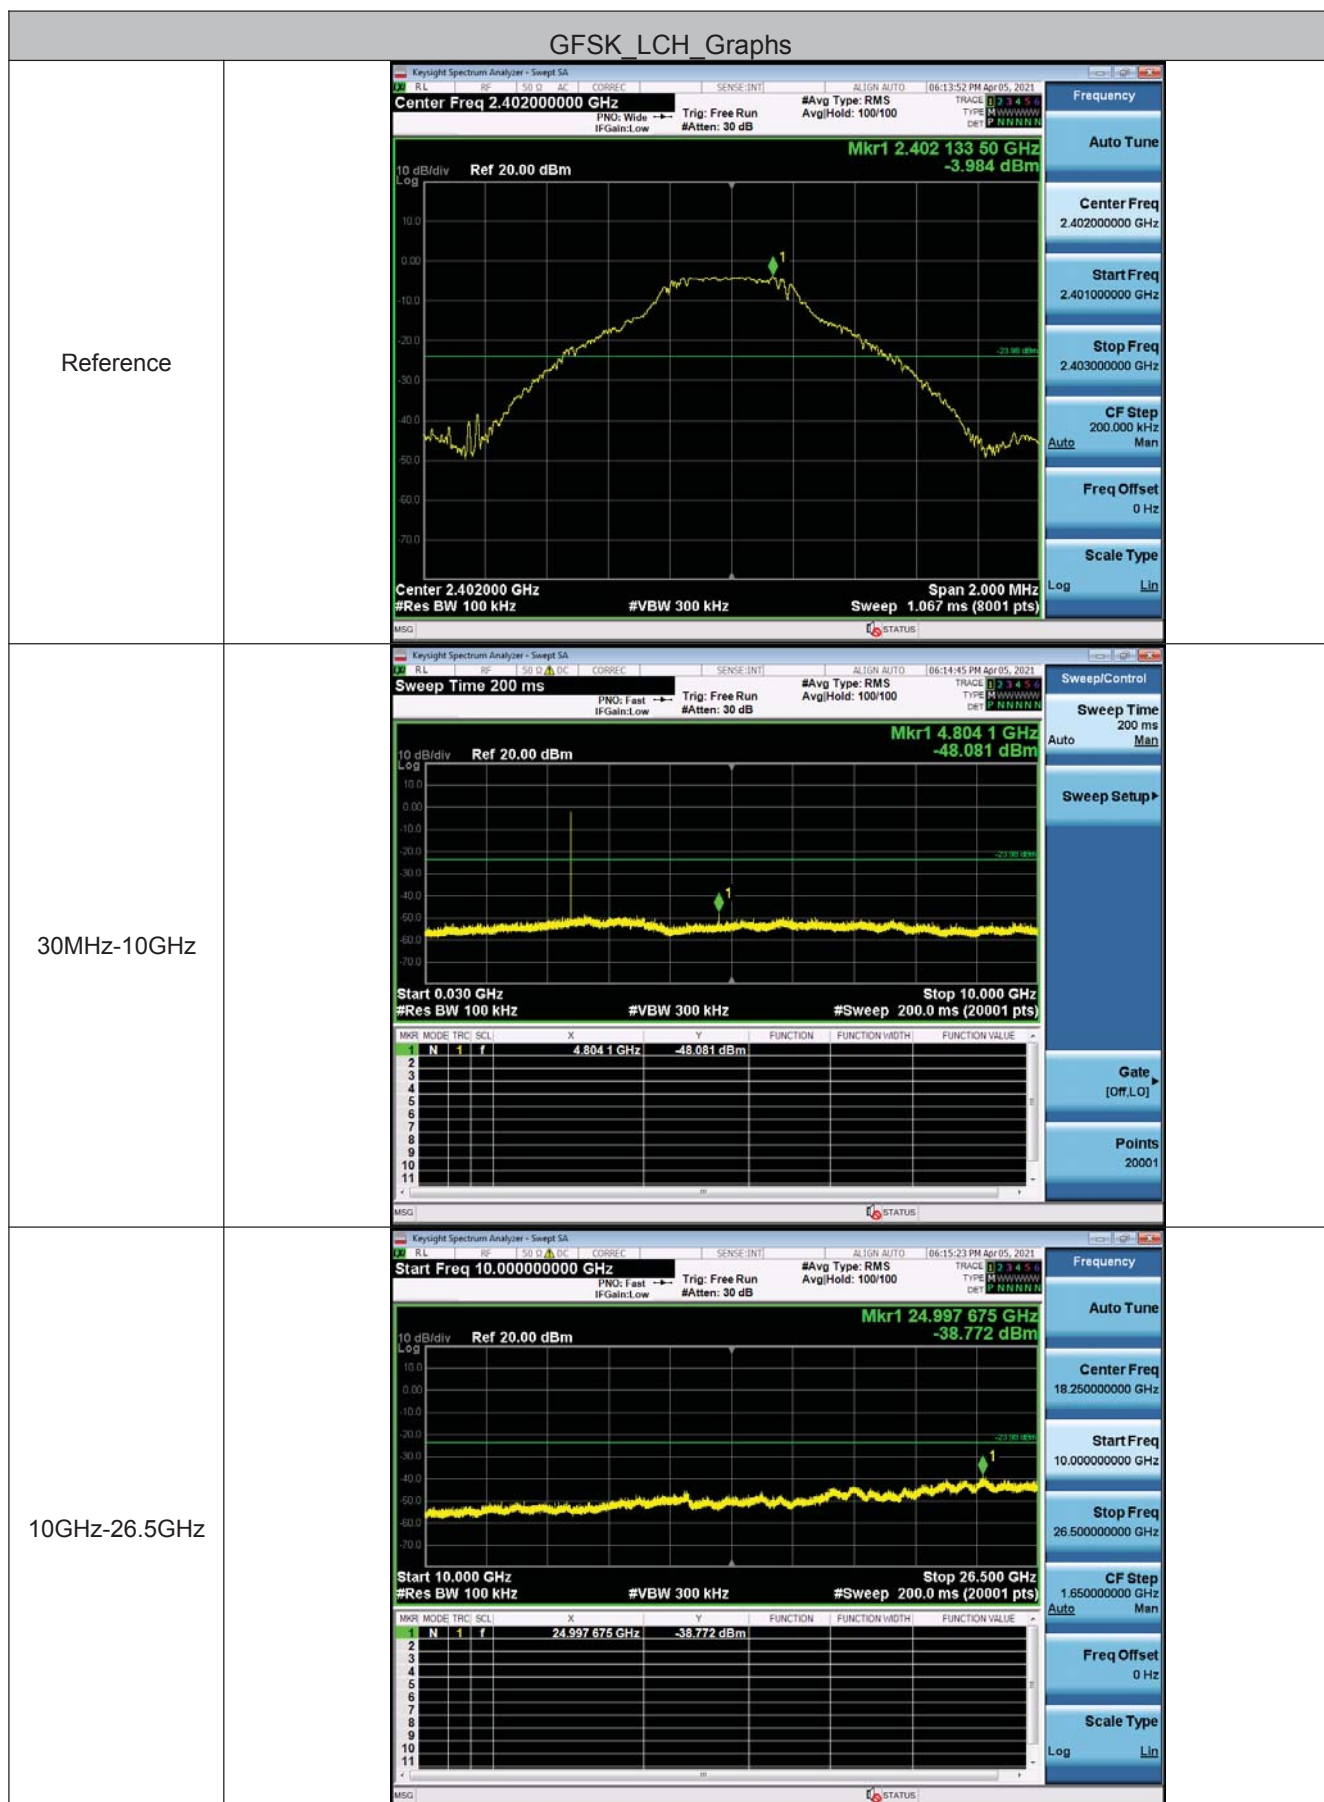
GFSK/HCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4835 GHz</td><td>-53.562 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.5000 GHz</td><td>-52.965 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.45494 GHz</td><td>-4.501 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4835 GHz	-53.562 dBm				2	N	1	f	2.5000 GHz	-52.965 dBm				4	N	1	f	2.45494 GHz	-4.501 dBm				Frequency Auto Tune Center Freq 2.48350000 GHz Start Freq 2.45350000 GHz Stop Freq 2.51350000 GHz CF Step 6.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	N	1	f	2.4835 GHz	-53.562 dBm																																	
2	N	1	f	2.5000 GHz	-52.965 dBm																																	
4	N	1	f	2.45494 GHz	-4.501 dBm																																	
$\pi/4$ DQPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.3900 GHz</td><td>-56.122 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-53.962 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.40210 GHz</td><td>-4.190 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.3900 GHz	-56.122 dBm				2	N	1	f	2.4000 GHz	-53.962 dBm				4	N	1	f	2.40210 GHz	-4.190 dBm				Frequency Auto Tune Center Freq 2.35675000 GHz Start Freq 2.31000000 GHz Stop Freq 2.40350000 GHz CF Step 9.350000 MHz Man Freq Offset 0 Hz Scale Type Log Lin
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	N	1	f	2.3900 GHz	-56.122 dBm																																	
2	N	1	f	2.4000 GHz	-53.962 dBm																																	
4	N	1	f	2.40210 GHz	-4.190 dBm																																	
$\pi/4$ DQPSK/LCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.3900 GHz</td><td>-52.439 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-53.699 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.40885 GHz</td><td>-3.691 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.3900 GHz	-52.439 dBm				2	N	1	f	2.4000 GHz	-53.699 dBm				4	N	1	f	2.40885 GHz	-3.691 dBm				Frequency Auto Tune Center Freq 2.40000000 GHz Start Freq 2.37000000 GHz Stop Freq 2.43000000 GHz CF Step 6.000000 MHz Man Freq Offset 0 Hz Scale Type Log Lin
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																														
1	N	1	f	2.3900 GHz	-52.439 dBm																																	
2	N	1	f	2.4000 GHz	-53.699 dBm																																	
4	N	1	f	2.40885 GHz	-3.691 dBm																																	

$\pi/4$DQPSK/HCH/No Hop	
$\pi/4$DQPSK/HCH/Hop	
8DPSK/LCH/ No Hop	

8DPSK /LCH/Hop	KeySight Spectrum Analyzer - Sweep SA RL 10.000000 AC CORREC SENSE (INT) AL (ON) AUTO 06:43:08 PM Apr 05, 2021 Center Freq 2.400000000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: >100/100 TRAC: 1 2 3 4 5 TYPE: M W W W W W W W DET: P N N N N N N 10 dB/div Ref 20.00 dBm Mkr2 2.400 00 GHz -53.559 dBm -23.70 dBm Start 2.37000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.867 ms (2001 pts) Stop 2.43000 GHz 1 N 1 f 2.390 00 GHz -53.555 dBm 2 N 1 f 2.400 00 GHz -53.559 dBm 4 N 1 f 2.406 99 GHz -3.696 dBm Frequency Auto Tune Center Freq 2.400000000 GHz Start Freq 2.370000000 GHz Stop Freq 2.430000000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin
8DPSK/HCH/No Hop	KeySight Spectrum Analyzer - Sweep SA RL 10.000000 AC CORREC SENSE (INT) AL (ON) AUTO 06:38:51 PM Apr 05, 2021 Center Freq 2.489250000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: 100/100 TRAC: 1 2 3 4 5 TYPE: M W W W W W W W DET: P N N N N N N 10 dB/div Ref 20.00 dBm Mkr2 2.500 000 GHz -56.210 dBm -24.90 dBm Start 2.47850 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.133 ms (2001 pts) Stop 2.50000 GHz 1 N 1 f 2.483 500 GHz -54.876 dBm 2 N 1 f 2.500 000 GHz -56.210 dBm 4 N 1 f 2.479 994 GHz -4.804 dBm Frequency Auto Tune Center Freq 2.489250000 GHz Start Freq 2.478500000 GHz Stop Freq 2.500000000 GHz CF Step 2.1500000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin
8DPSK/HCH/Hop	KeySight Spectrum Analyzer - Sweep SA RL 10.000000 AC CORREC SENSE (INT) AL (ON) AUTO 06:43:34 PM Apr 05, 2021 Center Freq 2.483500000 GHz PN0: Fast IF Gain: Low Trig: Free Run #Atten: 30 dB #Avg Type: RMS Avg/Hold: >100/100 TRAC: 1 2 3 4 5 TYPE: M W W W W W W W DET: P N N N N N N 10 dB/div Ref 20.00 dBm Mkr2 2.500 00 GHz -54.062 dBm -24.90 dBm Start 2.45350 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 5.867 ms (2001 pts) Stop 2.51350 GHz 1 N 1 f 2.483 50 GHz -52.808 dBm 2 N 1 f 2.500 00 GHz -54.062 dBm 4 N 1 f 2.476 00 GHz -4.801 dBm Frequency Auto Tune Center Freq 2.483500000 GHz Start Freq 2.453500000 GHz Stop Freq 2.513500000 GHz CF Step 6.0000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin

5.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 Remark: Offset=cable loss+ attenuation factor.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass

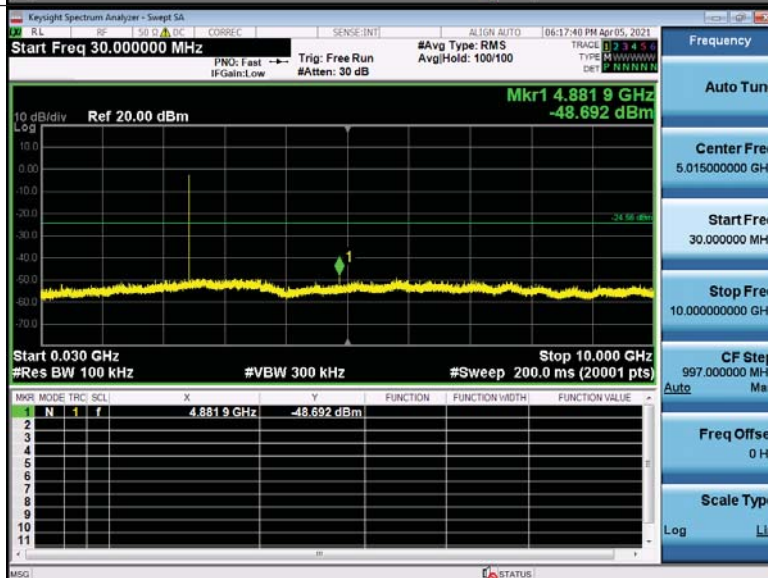


GFSK_MCH_Graphs

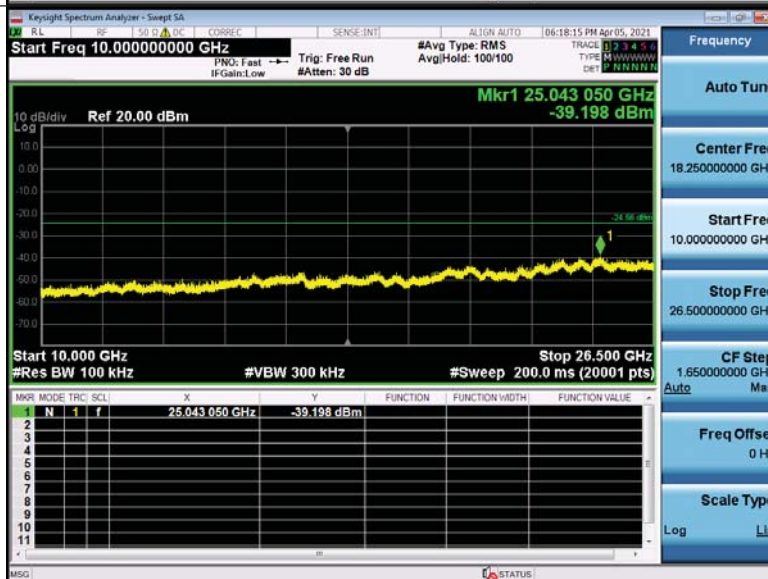
Reference



30MHz-10GHz



10GHz-26.5GHz

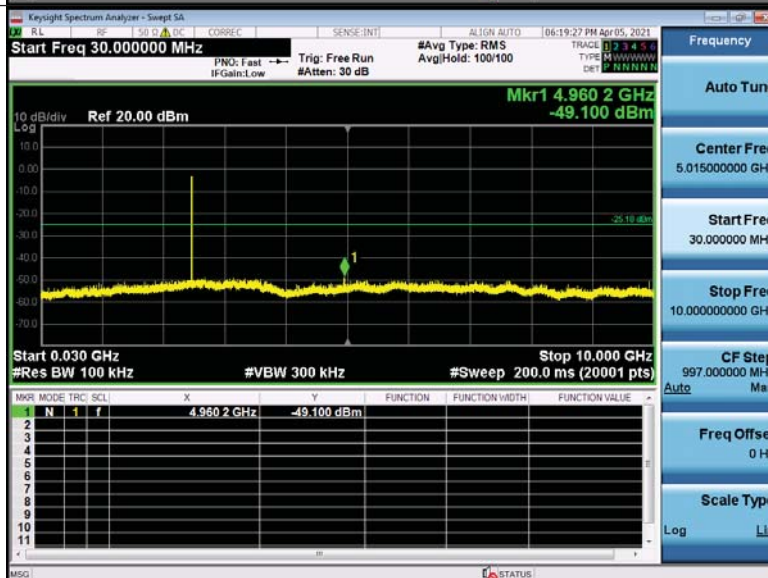


GFSK_HCH_Graphs

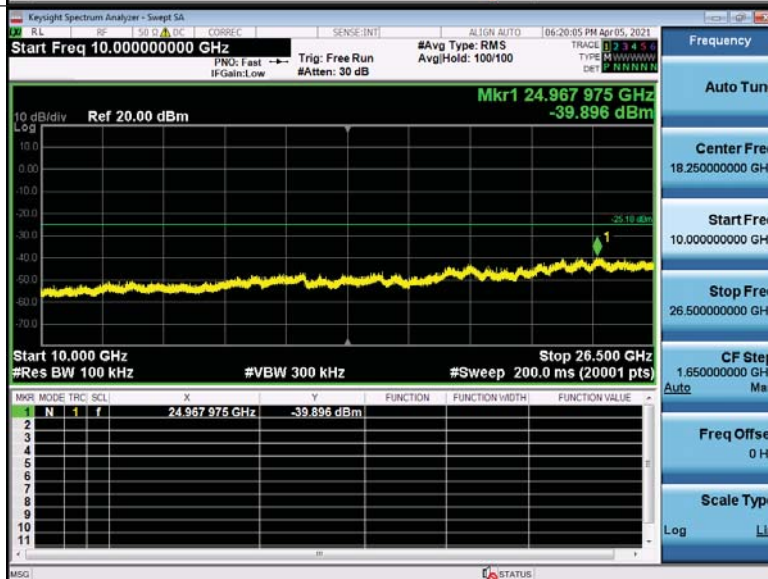
Reference

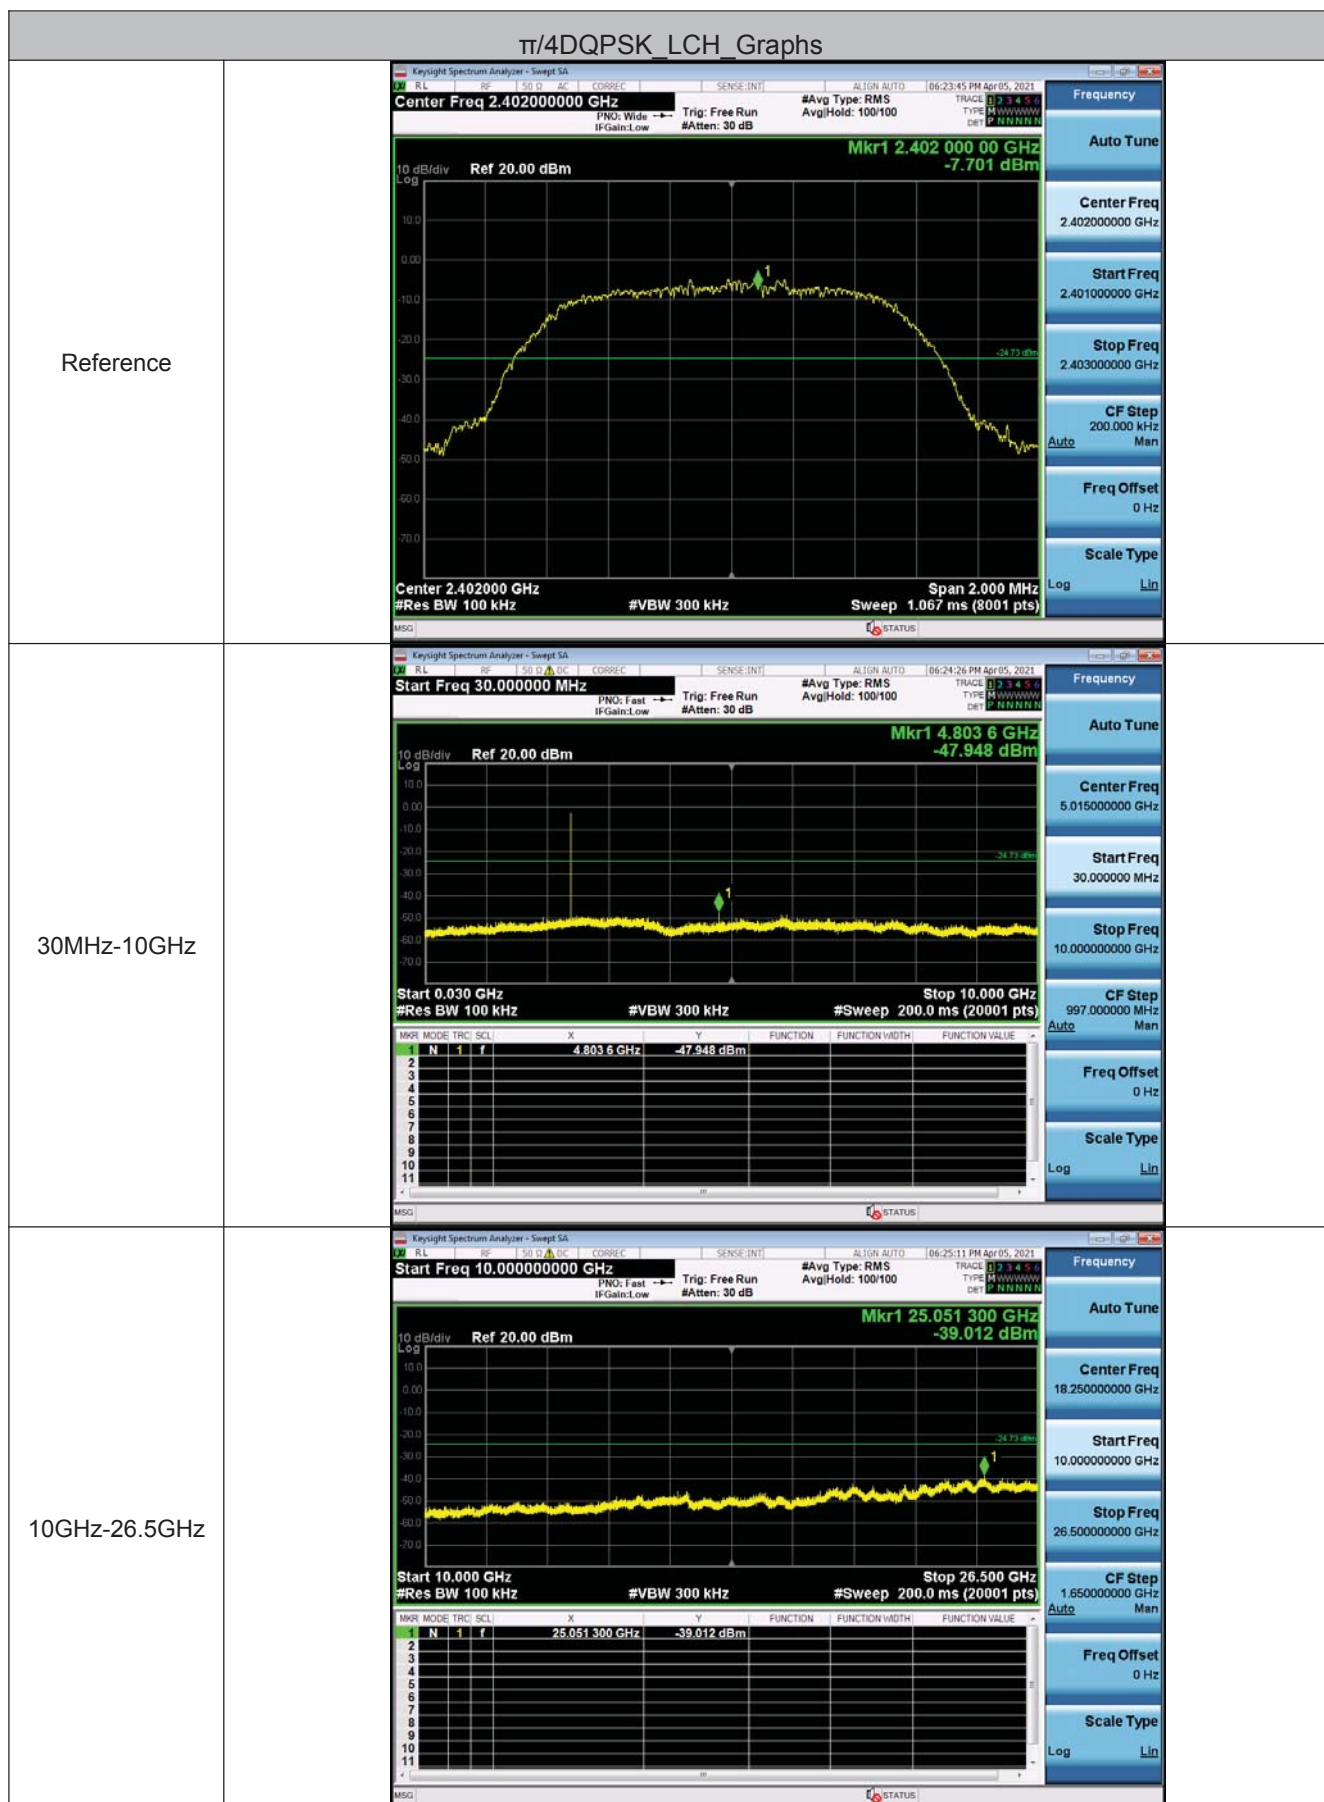


30MHz-10GHz

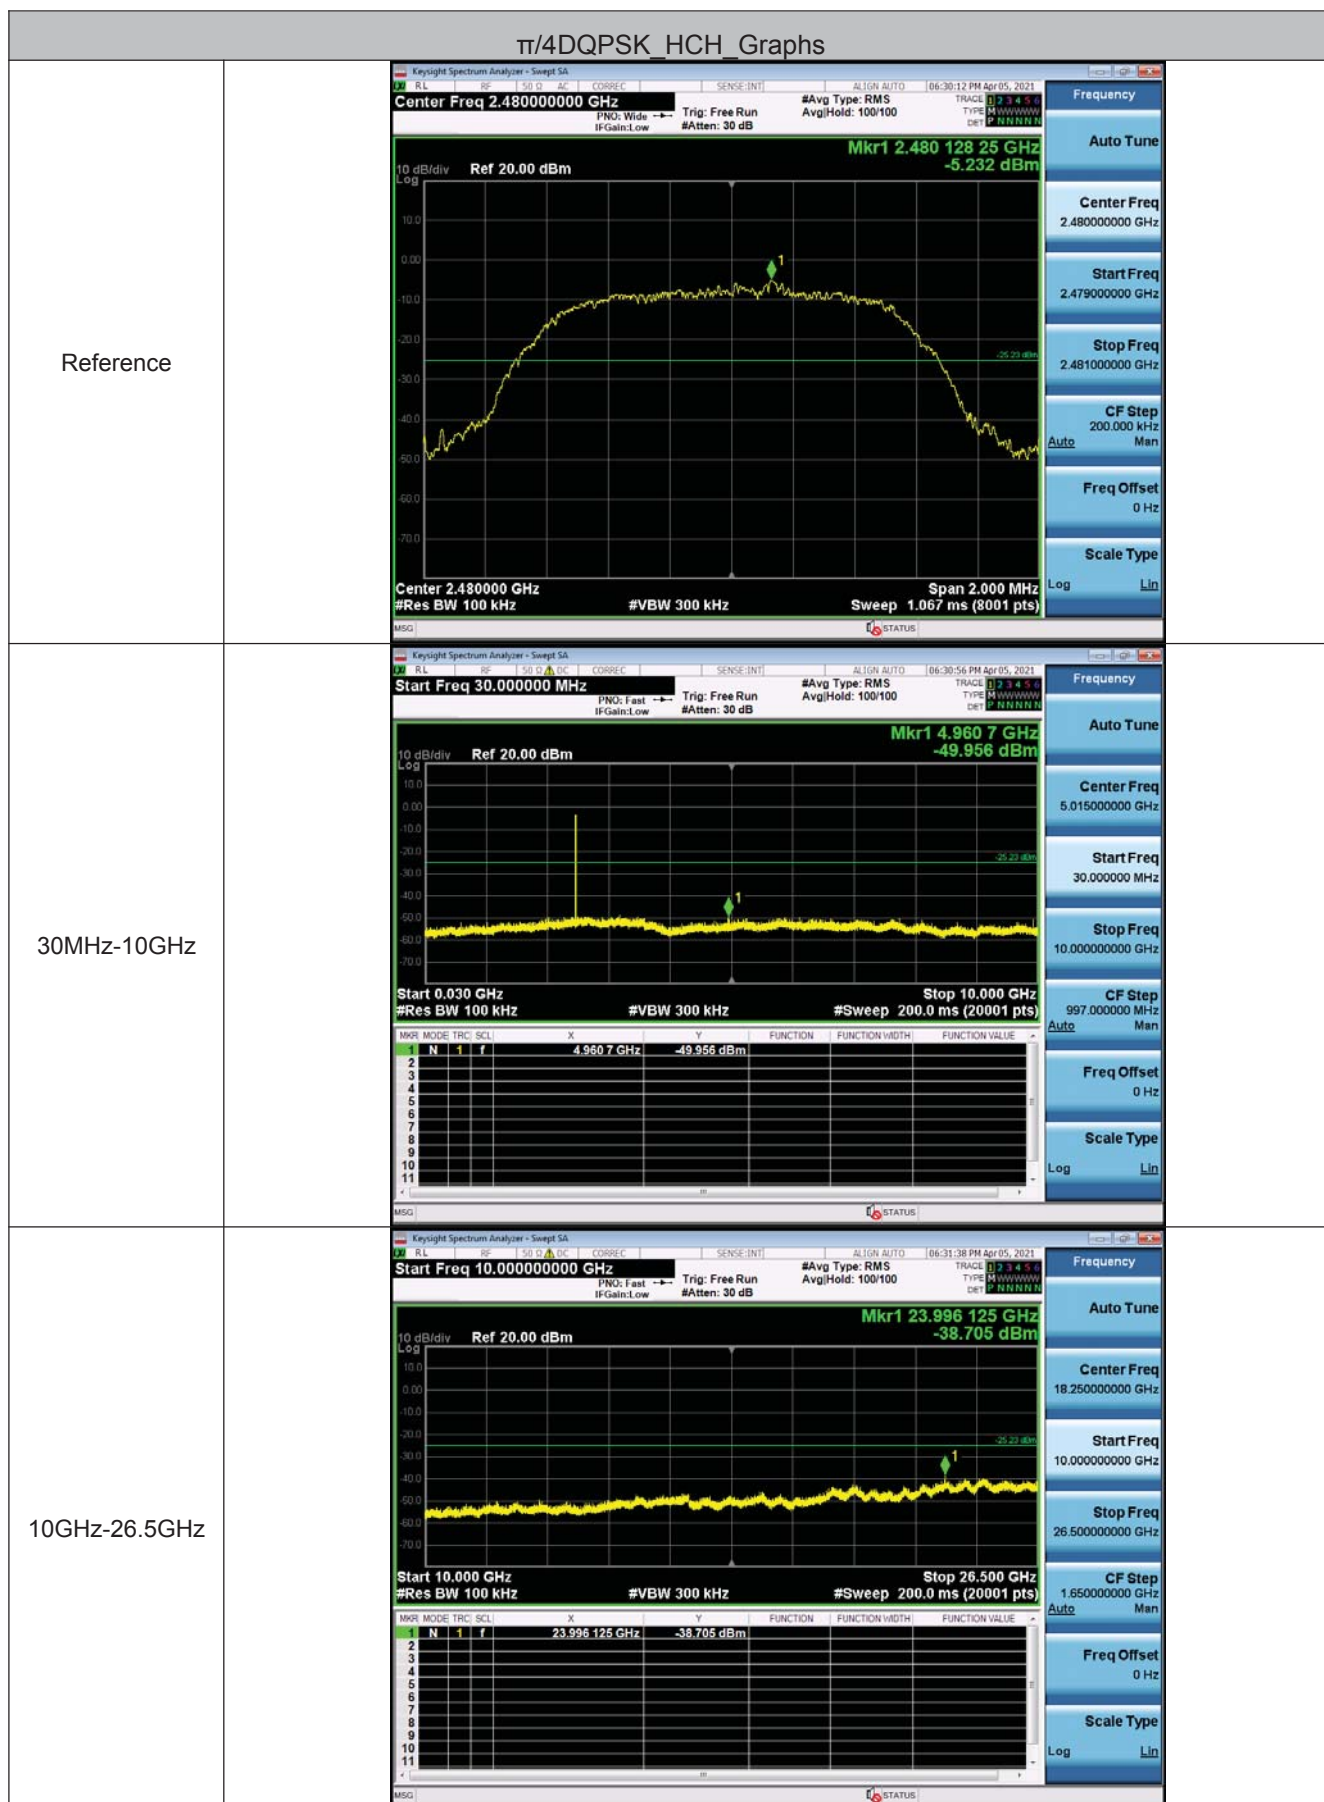


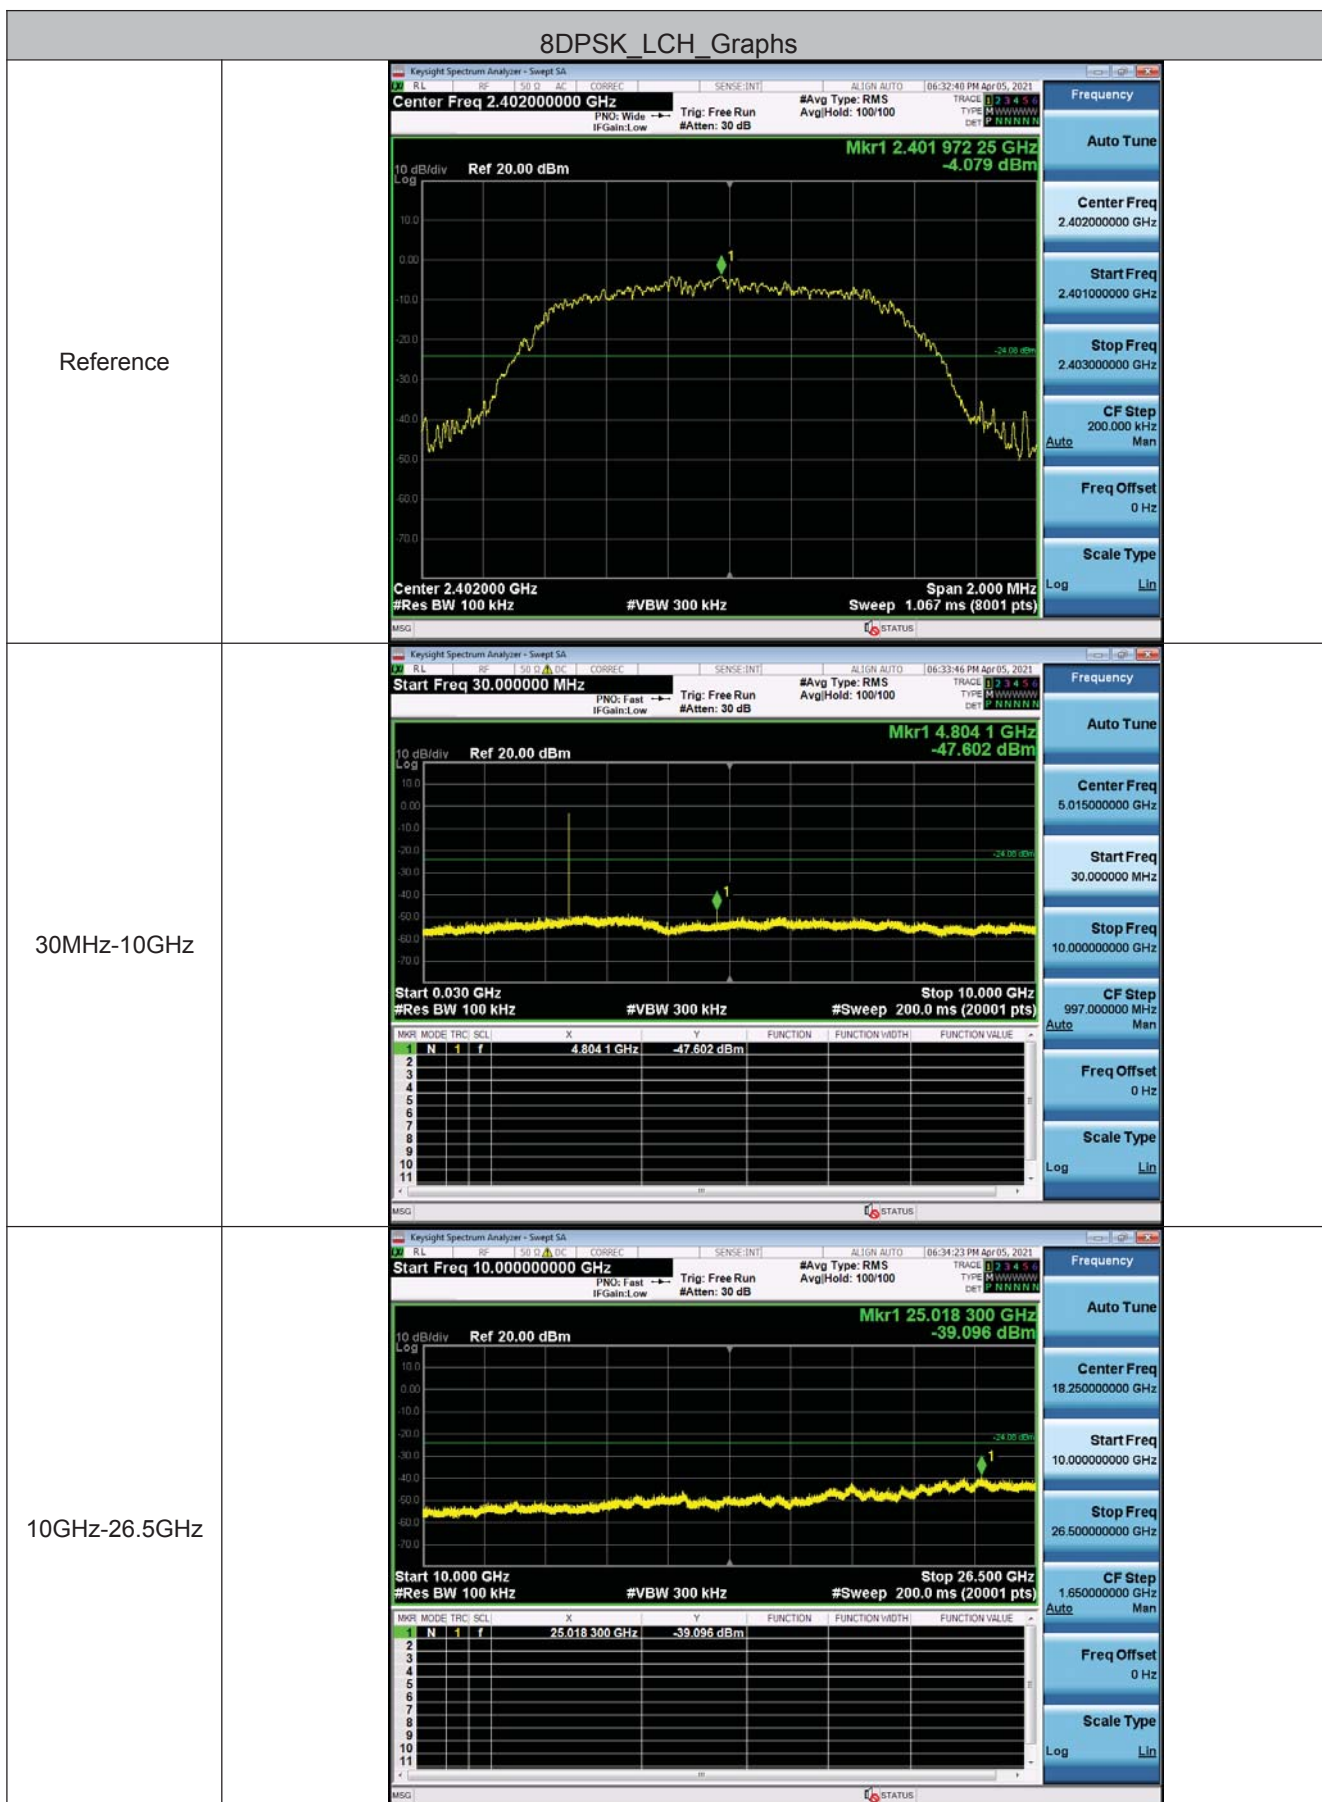
10GHz-26.5GHz









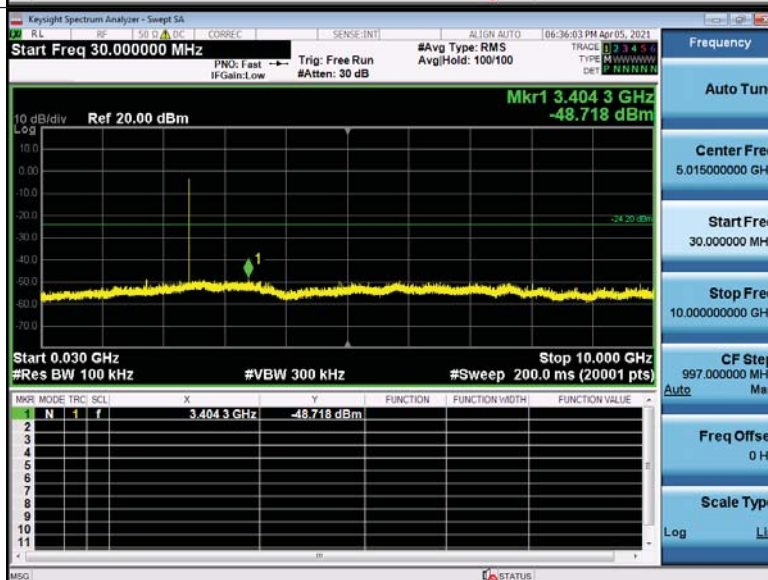


8DPSK_MCH_Graphs

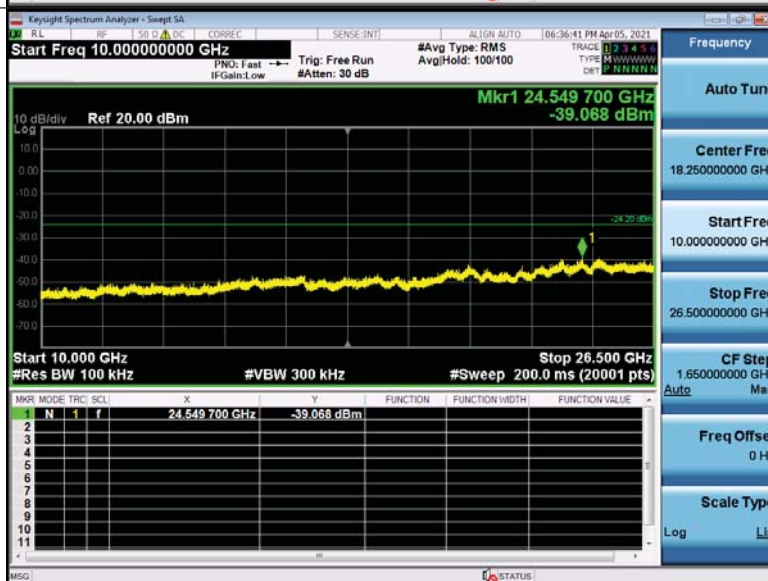
Reference



30MHz-10GHz



10GHz-26.5GHz

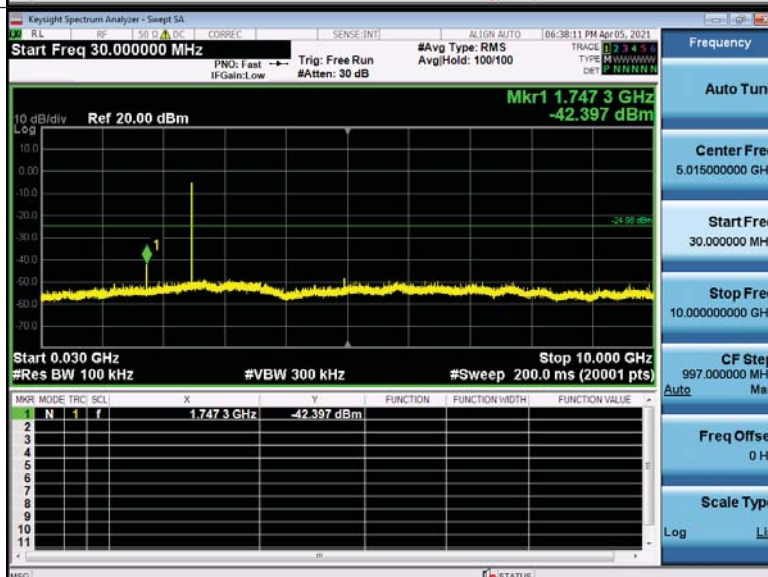


8DPSK_HCH_Graphs

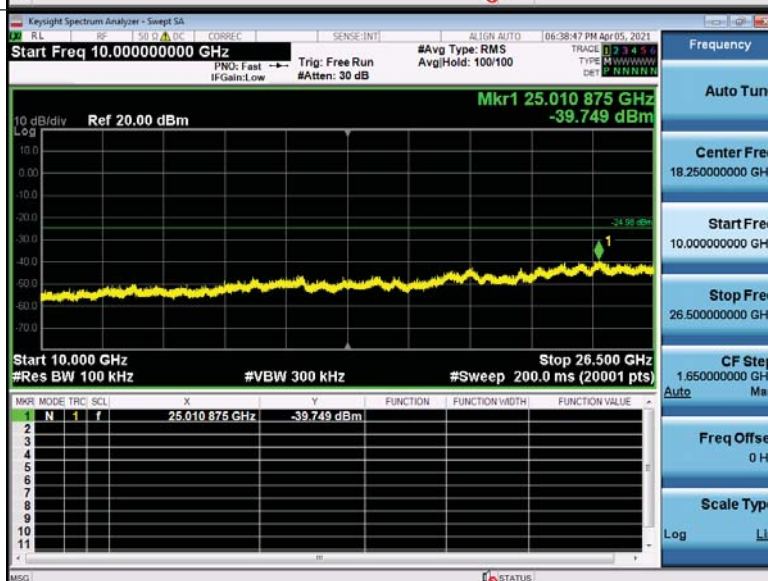
Reference



30MHz-10GHz



10GHz-26.5GHz



Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals. Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section. The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.	
Compliance for section 15.247(a)(1)	
According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.	
Compliance for section 15.247(g)	
According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.	

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

5.11 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

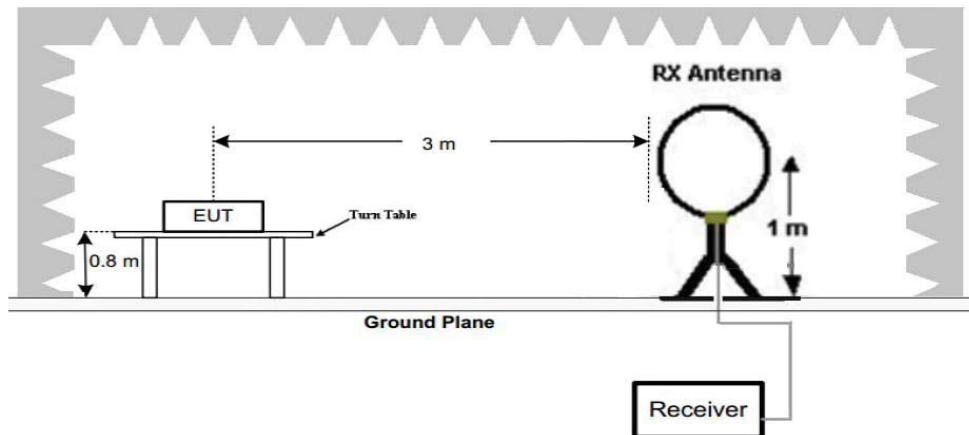


Figure 1. Below 30MHz

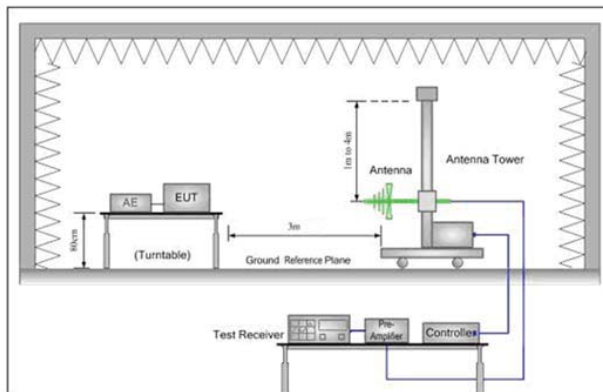


Figure 2. 30MHz to 1GHz

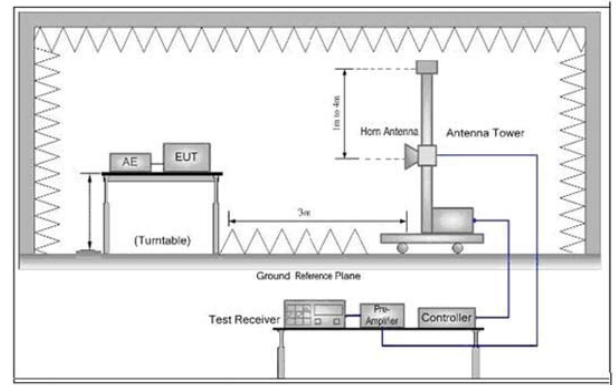


Figure 3. Above 1 GHz

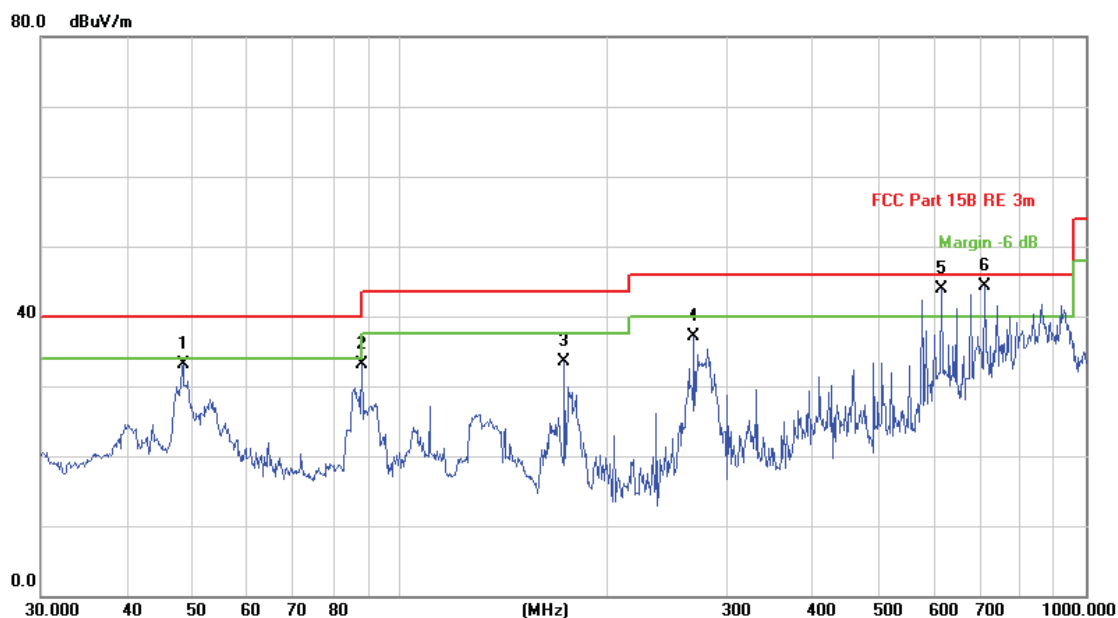
Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the 3DH5 –low channel data type is the worst case. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the 3DH5- low channel- Transmitting mode is recorded in the report.
Test Results:	Pass

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	3DH5-2402MHz	Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		48.3318	49.40	-16.27	33.13	40.00	-6.87	QP			
2		88.0327	52.95	-19.83	33.12	43.50	-10.38	QP			
3		173.8135	50.31	-16.84	33.47	43.50	-10.03	QP			
4		268.4852	49.57	-12.43	37.14	46.00	-8.86	QP			
5	!	616.3718	44.87	-0.96	43.91	46.00	-2.09	QP			
6	*	711.6734	41.39	2.94	44.33	46.00	-1.67	QP			

Remark:

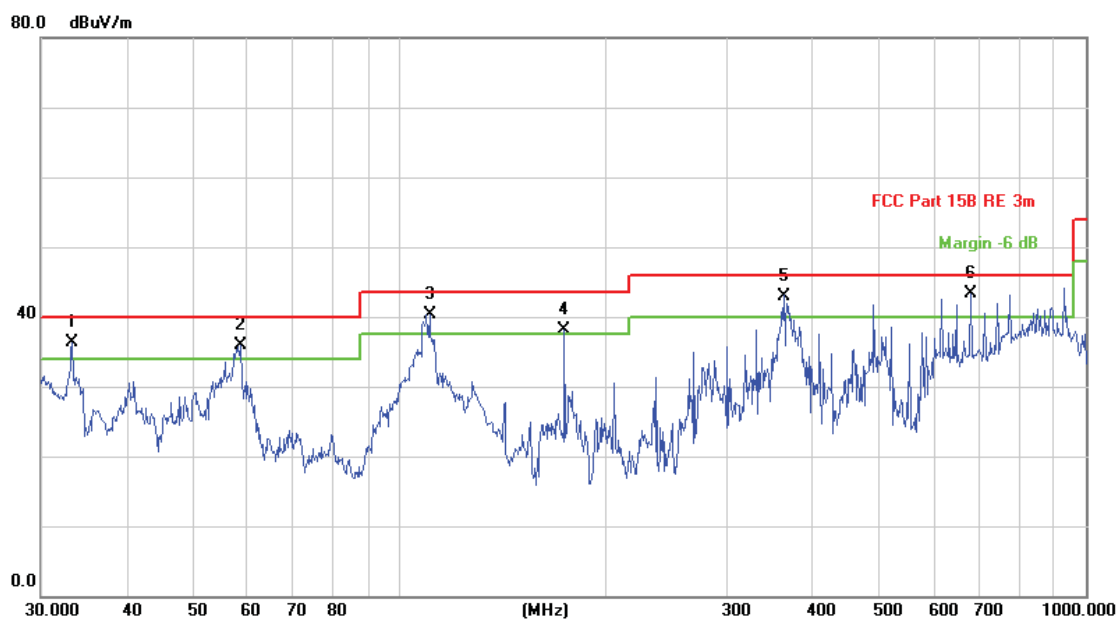
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	3DH5-2402MHz	Horizontal
------------	--------------	------------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	!	33.3278	48.44	-12.21	36.23	40.00	-3.77	QP			
2	!	58.6126	52.55	-16.67	35.88	40.00	-4.12	QP			
3	!	110.5687	56.86	-16.50	40.36	43.50	-3.14	QP			
4	!	173.8135	54.92	-16.84	38.08	43.50	-5.42	QP			
5	!	362.9844	51.98	-8.98	43.00	46.00	-3.00	QP			
6	*	679.9600	41.37	1.89	43.26	46.00	-2.74	QP			

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

5.11.2 Transmitter Emission above 1GHz

Worse case mode:		GFSK(DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	61.58	-9.2	52.38	74	-21.62	Peak	H
2400	63.92	-9.39	54.53	74	-19.47	Peak	H
4804	54.84	-4.33	50.51	74	-23.49	Peak	H
7206	54.04	1.01	55.05	74	-18.95	Peak	H
2390	61.01	-9.2	51.81	74	-22.19	Peak	V
2400	63.46	-9.39	54.07	74	-19.93	Peak	V
4804	56.58	-4.33	52.25	74	-21.75	Peak	V
7206	53.87	1.01	54.88	74	-19.12	Peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4882	54.86	-4.11	50.75	74	-23.25	peak	H
7323	51.51	1.51	53.02	74	-20.98	peak	H
4882	55.86	-4.11	51.75	74	-22.25	peak	V
7323	52.00	1.51	53.51	74	-20.49	peak	V

Worse case mode:		GFSK(DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.5	59.92	-9.29	50.63	74	-23.37	Peak	H
4960	58.18	-4.04	54.14	74	-19.86	Peak	H
7440	53.08	1.57	54.65	74	-19.35	Peak	H
2483.5	61.68	-9.29	52.39	74	-21.61	Peak	V
4960	59.38	-4.04	55.34	74	-18.66	Peak	V
7440	53.79	1.57	55.36	74	-18.64	Peak	V

Worse case mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2390	58.24	-9.2	49.04	74	-24.96	Peak	H
2400	65.09	-9.39	55.70	74	-18.30	Peak	H
4804	55.35	-4.33	51.02	74	-22.98	Peak	H
7206	55.03	1.01	56.04	74	-17.96	Peak	H
2390	58.23	-9.2	49.03	74	-24.97	Peak	V
2400	65.02	-9.39	55.63	74	-18.37	Peak	V
4804	56.42	-4.33	52.09	74	-21.91	Peak	V
7206	55.55	1.01	56.56	74	-17.44	Peak	V

Worse case mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4882	56.23	-4.11	52.12	74	-21.88	peak	H
7323	53.34	1.51	54.85	74	-19.15	peak	H
4882	56.07	-4.11	51.96	74	-22.04	peak	V
7323	51.45	1.51	52.96	74	-21.04	peak	V

Worse case mode:		$\pi/4$ DQPSK (2DH5)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
2483.5	61.73	-9.29	52.44	74	-21.56	Peak	H
4960	57.54	-4.04	53.50	74	-20.50	Peak	H
7440	54.03	1.57	55.60	74	-18.40	Peak	H
2483.5	60.93	-9.29	51.64	74	-22.36	Peak	V
4960	58.71	-4.04	54.67	74	-19.33	Peak	V
7440	53.10	1.57	54.67	74	-19.33	Peak	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6 Photographs - EUT Test Setup

Please refer to test setup file

7 Photographs - EUT Constructional Details

Please refer to the report No.: CQASZ20210400020EX-01

The End