

FCC SAR TEST REPORT

For
Caxon Technology
Tablet PC

Model No.: LQ-M7863

List Models: LQ-M1063, LQ-M8863, LQ-M1062, LQ-M7765, LQ-M7832

FCC ID: 2AYCA-LQM78N

Prepared For : Caxon Technology
Address : Pedro Ruiz 1058 int. 06 cercado Chiclayo Lambayeque Peru

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China
Tel: (86)755-26066440 Fax: (86)755-26014772

Report Number : 18220WC00157301
Date of Test : Dec.28, 2020 ~ Dec.30, 2020
Date of Report : Dec.31, 2020

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

Contents

1. Statement of Compliance	6
2. General Information	7
2.1 Client Information	7
2.2 Testing Laboratory Information	7
2.3 Description of Equipment Under Test(EUT)	7
2.4 Device Category and SAR Limits	9
2.5 Applied Standard	9
2.6 Environment of Test Site	9
2.7 Test Configuration	10
3. Specific Absorption Rate (SAR)	11
3.1 Introduction	11
3.2 SAR Definition	11
4. SAR Measurement System	12
4.1 E-Field Probe	13
4.2 Data Acquisition Electronics (DAE)	13
4.3 Robot	14
4.4 Measurement Server	14
4.5 Phantom	15
4.6 Device Holder	16
4.7 Data Storage and Evaluation	17
5. Test Equipment List	19
6. Tissue Simulating Liquids	20
7. System Verification Procedures	22
8. EUT Testing Position	24
8.1 Define two imaginary lines on the handset	24
8.2 Position for Cheek/Touch	25
8.3 Position for Ear / 15°Tilt	25
8.4 Body Worn Position	26
9. Measurement Procedures	27
9.1 Spatial Peak SAR Evaluation	27
9.2 Power Reference Measurement	28
9.3 Area & Zoom Scan Procedures	28
9.4 Zoom Scan Procedures	28
9.5 Volume Scan Procedures	29
9.6 Power Drift Monitoring	29
10. Conducted Power	30
11. Maximum Tune-up Limit	39
12. Antenna Location	42
13. SAR Test Results Summary	43

14. SAR Measurement Variability	62
15. Simultaneous Transmission Analysis	63
16. Measurement Uncertainty	69
Appendix A. EUT Photos and Test Setup Photos	71
Appendix B. Plots of SAR System Check	73
Appendix C. Plots of SAR Test Data	77
Appendix D. DASY System Calibration Certificate	93
Appendix E. Extended Calibration SAR Dipole	142

TEST REPORT

Applicant : Caxon Technology
Manufacturer : Shenzhen Longqi Technology Co., Ltd
Product Name : Tablet PC
Model No. : LQ-M7863
Listed Models : LQ-M1063, LQ-M8863, LQ-M1062, LQ-M7765, LQ-M7832
Trade Mark : Caxon Technology
Rating(s) : DC 3.7V from battery

Test Standard(s) : IEEE 1528-2013; IEC 62209-2:2010; ANSI/IEEE C95.1:2005; FCC 47 CFR Part 2 (2.1093:2013);

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the IEEE 1528-2013, IEC 62209-2:2010, FCC 47 CFR Part 2 (2.1093:2013), ANSI/IEEE C95.1:2005 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Dec.28, 2020 ~ Dec.30, 2020

Prepared By



Bobby Wang

(Engineer/Bobby Wang)

Reviewer

Calvin Liu

(Supervisor / Calvin Liu)

Approved & Authorized Signer

Tom Chen

(Manager/TomChen)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

Version

Version No.	Date	Description
01	Dec.31, 2020	Original

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline
400-003-0500
www.anbotek.com

1. Statement of Compliance

The maximum result of Specific Absorption Rate (SAR) found during testing areas follows.

<Highest SAR Summary>

Frequency Band	Highest Reported 1g-SAR(W/Kg)			SAR Test Limit (W/Kg)
	Head	Body	Hotspot	
GSM850	0.474	0.533	0.533	1.6
PCS1900	0.252	1.036	1.036	1.6
WCDMA II	0.381	1.264	1.264	1.6
WCDMA V	0.311	0.965	0.965	1.6
LTE Band 2	0.41	1.095	1.095	1.6
LTE Band 5	0.278	0.604	0.604	1.6
LTE Band 7	0.114	0.768	0.768	1.6
WIFI2.4G	0.338	0.274	0.274	1.6
Simultaneous SAR	Head		0.785	1.6
	Body		1.538	1.6
	Hotspot		1.538	1.6
Test Result	Pass			

Note:

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

2. General Information

2.1 Client Information

Applicant:	Caxon Technology
Address of Applicant:	Pedro Ruiz 1058 int. 06 cercado Chiclayo Lambayeque Peru
Manufacture:	Shenzhen Longqi Technology Co., Ltd
Address of Manufacture:	16-701, Yayuan Road, Bantian, Longgang Dist. Shenzhen, Guangdong, China

2.2 Testing Laboratory Information

Test Site:	Shenzhen Anbotek Compliance Laboratory Limited
Address:	1/F., Building 1, SEC Industrial Park, No. 0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2.3 Description of Equipment Under Test(EUT)

Product Name	Tablet PC
Trade Mark	Caxon Technology
Model/Type reference	LQ-M7863
List Models	LQ-M1063, LQ-M8863, LQ-M1062, LQ-M7765, LQ-M7832
Model Declaration	PCB board, structure and internal of these model(s) are the same, Only the model name is different, So no additional models were tested.
Power supply:	DC 3.7V by battery Recharged by DC 5.0V/2.0A
Sample ID	GTS20201211011-1 -1#
2G	
Support Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
Release Version	R99
GPRS Class	Class 12
EGPRS Class	Class 12
GSM/EDGE/GPRS Power	GSM850:Power Class 4/ PCS1900:Power Class 1

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com

Class	
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Type Of Modulation	GMSK for GSM/GPRS; GMSK/8PSK for EGPRS
Antenna Description	FPC Antenna; -2.50dBi (max.) For GSM 850; -2.40dBi (max.) For DCS 1900;
3G	
UMTS Operation Frequency Band	UMTS FDD Band 2(1850 MHz -1910MHz) UMTS FDD Band 5(824 MHz -849MHz)
WCDMA Release Version	R6
HSDPA Release Version	Release 6
Modulation Type	QPSK for UMTS
Antenna Description	FPC Antenna; -2.20dBi (max.) For WCDMA Band 2; -2.50dBi (max.) For WCDMA Band 5;
LTE	
LTE Operation Frequency Band	E-UTRA Band 2(1850 MHz -1910MHz) E-UTRA Band 5(824 MHz -849MHz) E-UTRA Band 7(2500 MHz -2570MHz)
LTE Release Version	R9
Type Of Modulation	QPSK/16QAM
Antenna Description	FPC Antenna; -2.20dBi (max.) For LTE Band 2; -2.50dBi (max.) For LTE Band 5; -2.70dBi (max.) For LTE Band 7;
Bluetooth	
Operation frequency	2402-2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WIFI(2.4G Band)	
Frequency Range	2412MHz ~ 2462MHz
Channel Spacing	5MHz
Channel Number	11 Channel for 20MHz bandwidth(2412~2462MHz)
Modulation Type	802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	FPC Antenna,1.50dBi(Max.) for 2.4G Band

2.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. according to IEEE Std C95.1, 1999:((IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz).

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices bei ng used within 20 cm of the user in the uncontrolled environment.

2.5 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- IEEE 1528-2013
- FCC 47 CFR Part 2 (2.1093:2013)
- ANSI/IEEE C95.1:2005
- IEC 62209-2:2010
- IEC 62209-2:2010
- KDB 248227 D01
- KDB 447498 D01
- KDB 648474 D04
- KDB 865664 D01
- KDB 941225 D01
- KDB 941225 D06
- KDB 941225 D07

2.6 Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotek.com

2.7 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

3. Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement System

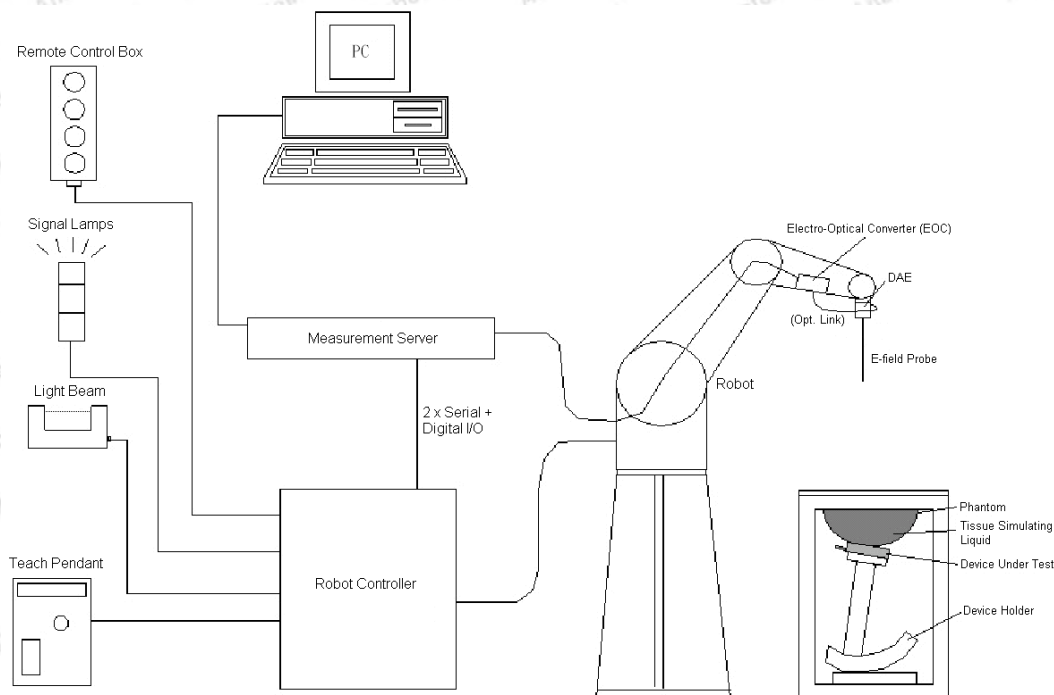

DASy System Configurations

The DASy system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASy software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

4.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 Photo of EX3DV4
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

**Photo of DAE**

4.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

**Photo of DASY5**

4.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Photo of Server for DASY5

4.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
 Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.
 Tel:(86)755-26066440 Fax:(86)755-26014772 Email:service@anbotek.com

 Hotline
 400-003-0500
www.anbotek.com

frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7 Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-loss media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcp_i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

Shenzhen Anbotek Compliance Laboratory Limited

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

U_i = input signal of channel i , ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d154	Jun. 16, 2018	Jun. 15, 2021
SPEAG	1900MHz System Validation Kit	D1900V2	5d175	Jun. 15, 2019	Jun. 14, 2022
SPEAG	2450MHz System Validation Kit	D2450V2	910	Jun. 15, 2018	Jun. 14, 2021
SPEAG	2600MHz System Validation Kit	D2600V2	1058	Jun. 19, 2018	Jun. 18, 2021
SPEAG	Data Acquisition Electronics	DAE4	387	Sep. 06, 2020	Sep. 05, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7396	May. 06, 2020	May. 05, 2021
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Nov. 02, 2020	Nov. 01, 2021
SPEAG	DAK	DAK-3.5	1226	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
AR	Amplifier	ZHL-42W	QA1118004	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	Nov. 02, 2020	Nov. 01, 2021
Agilent	Power Sensor	N8481H	MY51240001	Nov. 02, 2020	Nov. 01, 2021
R&S	Spectrum Analyzer	N9020A	MY51170037	Nov. 02, 2020	Nov. 01, 2021
Agilent	Signal Generation	N5182A	MY48180656	Nov. 02, 2020	Nov. 01, 2021
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Nov. 02, 2020	Nov. 01, 2021

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com




Hotline
400-003-0500


www.anbotech.com

6. Tissue Simulating Liquids


For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:

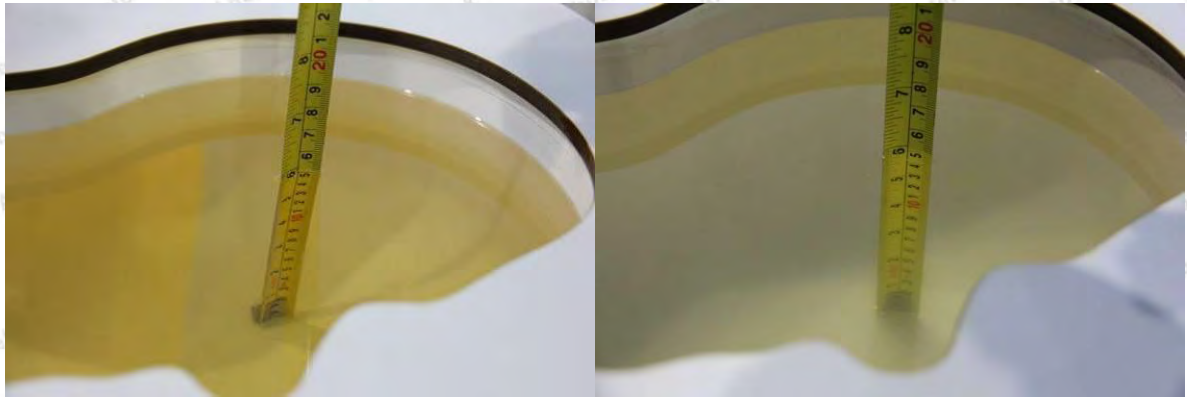

Liquid depth in the Head Phantom (750MHz) Liquid depth in the Head Phantom (835MHz)

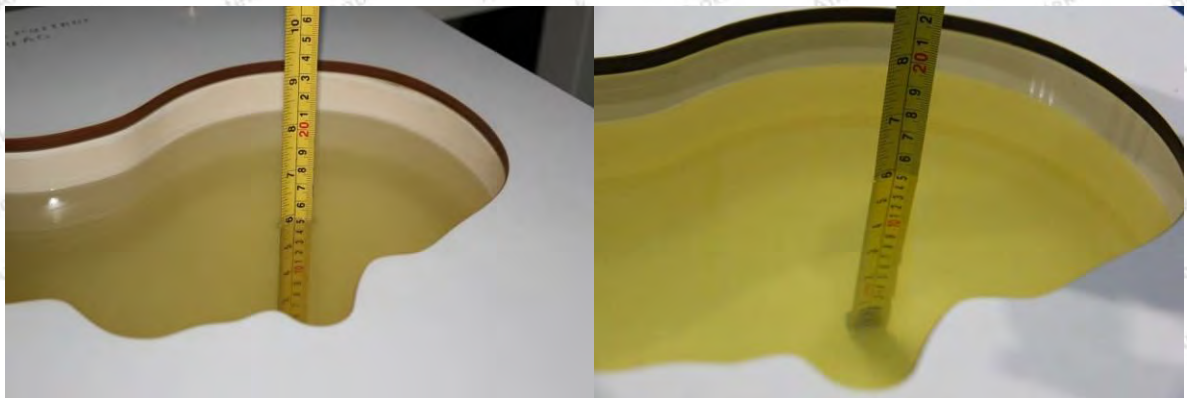

Liquid depth in the Head Phantom (1750MHz) Liquid depth in the Head Phantom (1900MHz)

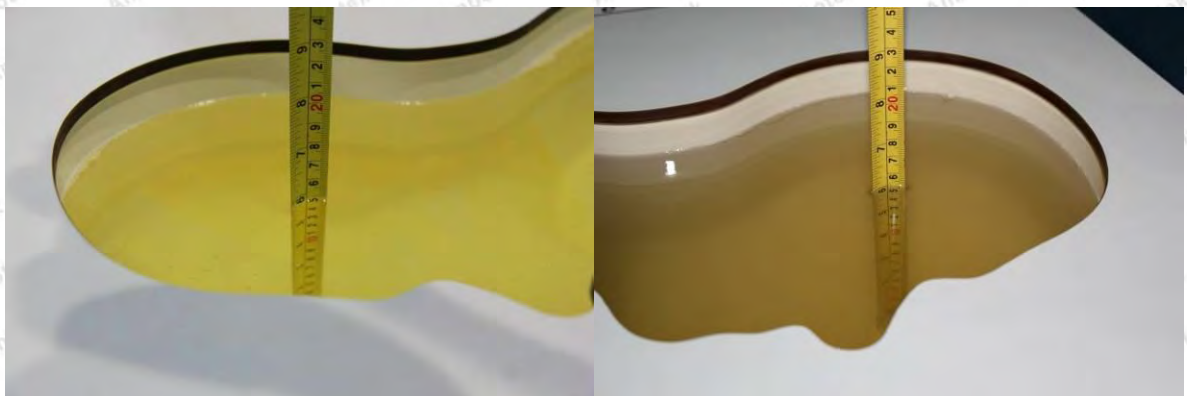

Liquid depth in the Head Phantom (2450MHz) Liquid depth in the Head Phantom (2600MHz)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1750	55.2	0	0	0.3	0	44.5	1.37	40.1
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
900	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1750	70.2	0	0	0.4	0	29.4	1.49	53.4
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

The following table shows the measuring results for simulating liquid.

Dielectric Performance of Tissue Simulating Liquid

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
		σ	ϵ_r	σ	Dev. ($\pm 5\%$)	ϵ_r	Dev. ($\pm 5\%$)		
835H	900	0.90	41.5	0.95	5.56%	42.32	1.98%	22.3	12/28/2020
1900H	1900	1.40	40.0	1.35	-3.57%	40.15	0.37%	22.6	12/29/2020
2450H	2450	1.80	39.2	1.76	-2.22%	38.93	-0.69%	22.4	12/30/2020
2600H	2600	1.96	39.0	1.89	-3.57%	38.55	-1.15%	22.3	12/30/2020

7. System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

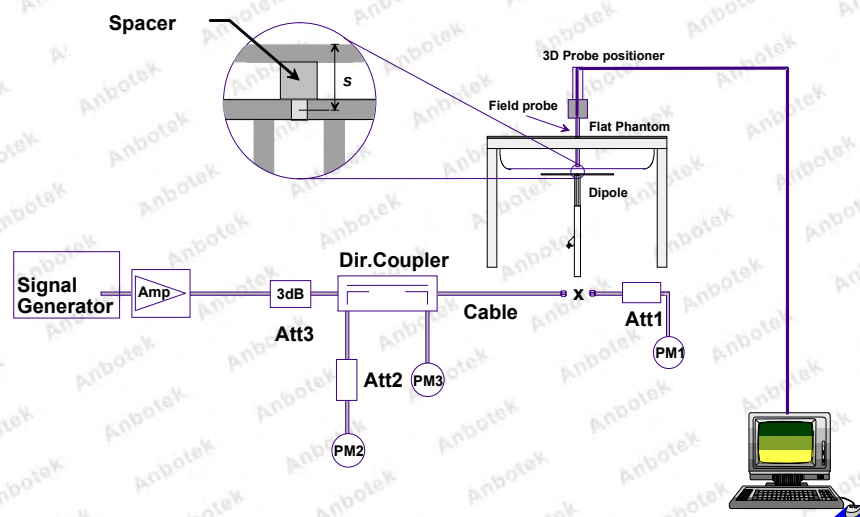

System Setup for System Evaluation

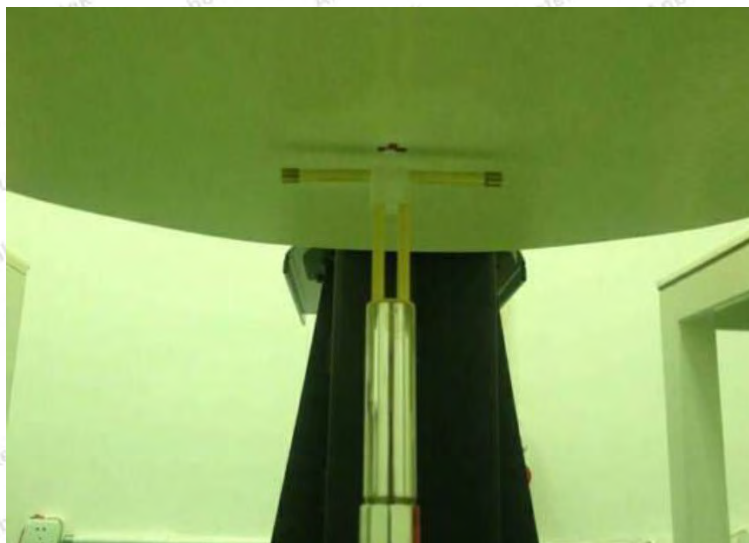


Photo of Dipole Setup

➤ Validation Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)	Date
835H	Head	250	9.24	2.32	9.28	0.43%	12/28/2020
1900H	Head	250	40.4	10.12	40.48	0.20%	12/29/2020
2450H	Head	250	52.4	13.08	52.32	-0.15%	12/30/2020
2600H	Head	250	57.2	14.27	57.08	-0.21%	12/30/2020



Note:

1. The graph results see system check.
2. Target Values used derive from the calibration certificate.

8. EUT Testing Position

8.1. Define two imaginary lines on the handset


- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

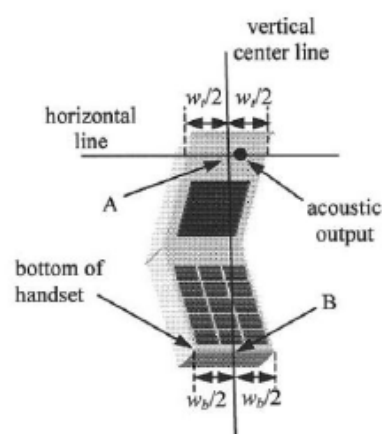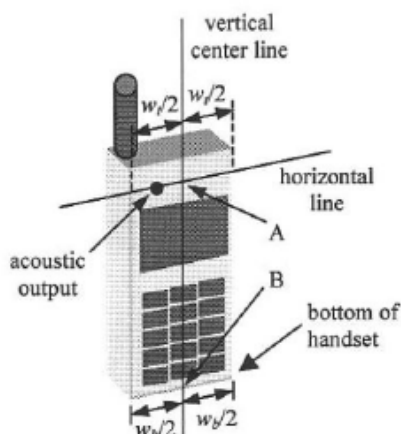

Handset Vertical and Horizontal Reference Lines

8.2. Position for Cheek/Touch


- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

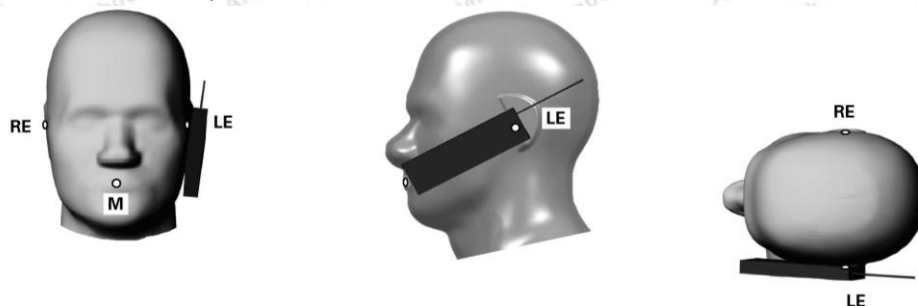

Cheek Position

8.3. Position for Ear / 15° Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

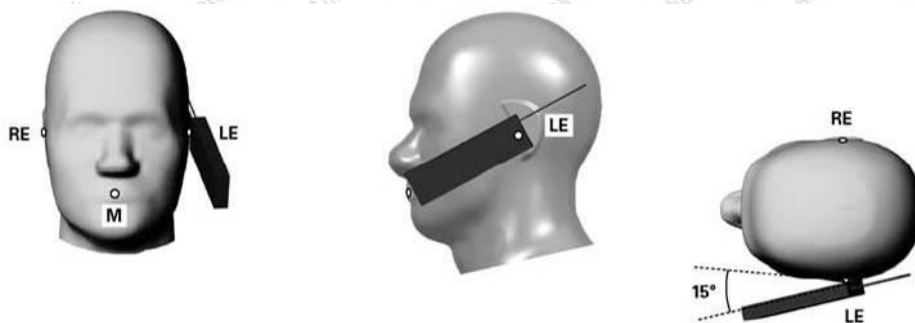


Tilt Position

8.4. Body Worn Position

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

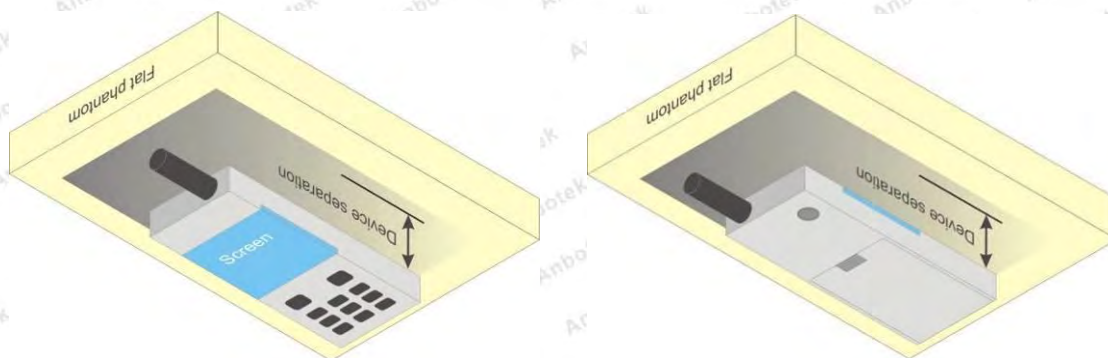

Body Worn Position

9. Measurement Procedures

The measurement procedures are as follows:

- Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- Measure output power through RF cable and power meter.
- Place the EUT in the positions as setup photos demonstrates.
- Set scan area, grid size and other setting on the DASY software.
- Measure SAR transmitting at the middle channel for all applicable exposure positions.
- Identify the exposure position and device configuration resulting the highest SAR
- Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- Generation of a high-resolution mesh within the measured volume
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to

surface

- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

10. Conducted Power

<GSM Conducted power>

Conducted power measurement results (GSM850/1900)

Band GSM850	Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	CH128	CH190	CH251	CH128	CH190	CH251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, 1 Tx slot)	32.63	32.42	32.62	23.60	23.39	23.59
GPRS (GMSK, 1 Tx slot) – CS1	32.61	32.58	32.60	23.58	23.55	23.57
GPRS (GMSK, 2 Tx slots) – CS1	31.51	31.49	31.48	25.49	25.47	25.46
GPRS (GMSK, 3 Tx slots) – CS1	30.01	29.98	29.99	25.75	25.72	25.73
GPRS (GMSK, 4 Tx slots) – CS1	29.02	29.02	28.99	26.01	26.01	25.98
EDGE (8PSK, 1 Tx slot) – MCS1	28.02	28.00	28.01	18.99	18.97	18.98
EDGE (8PSK, 2 Tx slots) – MCS1	26.97	26.98	27.00	20.95	20.96	20.98
EDGE (8PSK, 3 Tx slots) – MCS1	24.51	24.52	24.52	20.25	20.26	20.26
EDGE (8PSK, 4 Tx slots) – MCS1	22.99	23.02	22.99	19.98	20.01	19.98
Band GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
TX Channel	CH512	CH661	CH810	CH512	CH661	CH810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	30.15	29.75	29.81	21.12	20.72	20.78
GPRS (GMSK, 1 Tx slot) – CS1	29.61	29.58	29.60	20.58	20.55	20.57
GPRS (GMSK, 2 Tx slots) – CS1	28.03	27.98	27.98	22.01	21.96	21.96
GPRS (GMSK, 3 Tx slots) – CS1	27.00	27.01	27.01	22.74	22.75	22.75
GPRS (GMSK, 4 Tx slots) – CS1	26.00	26.03	26.02	22.99	23.02	23.01
EDGE (8PSK, 1 Tx slot) – MCS1	25.01	25.02	25.03	15.98	15.99	16.00
EDGE (8PSK, 2 Tx slots) – MCS1	24.01	23.99	24.02	17.99	17.97	18.00
EDGE (8PSK, 3 Tx slots) – MCS1	23.01	22.97	23.02	18.75	18.71	18.76
EDGE (8PSK, 4 Tx slots) – MCS1	21.99	21.98	22.00	18.98	18.97	18.99

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

2) According to the conducted power as above, the GPRS/EGPRS measurements are performed with 3Txslots for GPRS/EGPRS 850 and GPRS/EGPRS 1900.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

<WCDMA Conducted power>

Conducted power measurement results (WCDMA Band II/V)

Band	WCDMA II		
TX Channel	CH9262	CH9400	CH9538
Frequency (MHz)	1852.4	1880	1907.6
RMC 12.2Kbps	23.62	23.59	23.50
HSDPA Subtest-1	23.43	23.49	23.49
HSDPA Subtest-2	22.60	22.51	22.56
HSDPA Subtest-3	21.36	21.42	21.43
HSDPA Subtest-4	20.57	20.53	20.59
HSUPA Subtest-1	21.63	21.68	21.53
HSUPA Subtest-2	21.01	21.16	21.18
HSUPA Subtest-3	20.28	20.22	20.16
HSUPA Subtest-4	19.61	19.63	19.69
HSUPA Subtest-5	19.18	19.04	19.13
HSPA+	18.62	18.51	18.66

Band	WCDMA V		
TX Channel	CH4132	CH4183	CH4233
Frequency (MHz)	826.4	836.6	846.6
RMC 12.2Kbps	23.54	23.51	23.49
HSDPA Subtest-1	23.56	23.47	23.42
HSDPA Subtest-2	22.59	22.66	22.58
HSDPA Subtest-3	21.40	21.34	21.42
HSDPA Subtest-4	20.66	20.62	20.54
HSUPA Subtest-1	21.69	21.68	21.65
HSUPA Subtest-2	21.07	21.13	21.10
HSUPA Subtest-3	20.10	20.11	20.12
HSUPA Subtest-4	19.67	19.68	19.70
HSUPA Subtest-5	19.00	19.02	19.04
HSPA+	18.58	18.53	18.60

Per KDB 941225 D01 v02, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com

 Hotline
400-003-0500
www.anbotek.com

<LTE Conducted Power>

Conducted Power Measurement Results (LTE FDD Band 2)

LTE-FDD Band 2				Actual output Power (dBm)		
Band-width	RBAallocation	RBOffset	Modulation	Low	Middle	High
1.4 MHz				1850.7MHz	1880MHz	1909.3MHz
	1RB	High	QPSK	23.44	23.48	23.45
			16QAM	22.47	22.5	22.48
		Middle	QPSK	23.43	23.47	23.42
			16QAM	22.48	22.52	22.49
		Low	QPSK	23.45	23.44	23.42
			16QAM	22.5	22.52	22.5
	3RB	High	QPSK	23.32	23.37	23.32
			16QAM	22.24	22.26	22.23
		Middle	QPSK	23.33	23.35	23.33
			16QAM	22.26	22.29	22.24
		Low	QPSK	23.32	23.38	23.35
16QAM			22.24	22.28	22.25	
6RB	/	QPSK	22.49	22.54	22.48	
		16QAM	21.33	21.37	21.34	
3 MHz				1851.5MHz	1880MHz	1908.5MHz
	1RB	High	QPSK	23.42	23.45	23.43
			16QAM	22.51	22.53	22.51
		Middle	QPSK	23.4	23.45	23.41
			16QAM	22.52	22.56	22.52
		Low	QPSK	23.42	23.46	23.43
			16QAM	22.5	22.53	22.5
	8RB	High	QPSK	22.77	22.8	22.76
			16QAM	21.62	21.65	21.63
		Middle	QPSK	22.72	22.73	22.73
			16QAM	21.61	21.65	21.61
		Low	QPSK	22.73	22.76	22.74
			16QAM	21.63	21.65	21.65
	15RB	/	QPSK	22.69	22.74	22.71
			16QAM	21.6	21.66	21.59
	5 MHz				1852.5MHz	1880MHz
1RB		High	QPSK	23.4	23.43	23.41
			16QAM	22.5	22.53	22.51
		Middle	QPSK	23.42	23.46	23.43
			16QAM	22.52	22.56	22.51

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

		Low	QPSK	23.41	23.43	23.4	
			16QAM	22.5	22.53	22.51	
		12RB	High	QPSK	22.78	22.83	22.76
				16QAM	21.67	21.74	21.68
			Middle	QPSK	22.78	22.82	22.79
				16QAM	21.68	21.72	21.67
			Low	QPSK	22.77	22.8	22.78
				16QAM	21.7	21.73	21.71
		25RB		QPSK	22.75	22.79	22.76
				16QAM	21.64	21.67	21.64
10 MHz				1855MHz	1880MHz	1905MHz	
	1RB	High	QPSK	23.41	23.44	23.41	
			16QAM	22.49	22.52	22.5	
		Middle	QPSK	23.42	23.46	23.42	
			16QAM	22.51	22.55	22.5	
		Low	QPSK	23.42	23.46	23.42	
			16QAM	22.51	22.53	22.51	
	25RB	High	QPSK	22.74	22.79	22.76	
			16QAM	21.67	21.71	21.68	
		Middle	QPSK	22.74	22.79	22.76	
			16QAM	21.71	21.73	21.7	
		Low	QPSK	22.73	22.77	22.74	
			16QAM	21.69	21.72	21.7	
	50RB	/	QPSK	22.76	22.79	22.75	
			16QAM	21.65	21.68	21.64	
	15 MHz				1857.5MHz	1880MHz	1902.5MHz
		1RB	High	QPSK	23.44	23.47	23.45
				16QAM	22.5	22.53	22.51
Middle			QPSK	23.41	23.47	23.41	
			16QAM	22.51	22.56	22.51	
Low			QPSK	23.43	23.46	23.44	
			16QAM	22.52	22.55	22.53	
36RB		High	QPSK	22.76	22.8	22.77	
			16QAM	21.67	21.69	21.67	
		Middle	QPSK	22.74	22.79	22.73	
			16QAM	21.69	21.72	21.68	
		Low	QPSK	22.77	22.82	22.79	
			16QAM	21.65	21.69	21.66	
75RB		/	QPSK	22.67	22.71	22.68	
			16QAM	21.6	21.65	21.61	

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

20 MHz	1RB	High	QPSK	1860MHz	1880MHz	1900MHz
			16QAM	23.4	23.46	23.41
		Middle	QPSK	22.5	22.55	22.52
			16QAM	23.43	23.47	23.44
		Low	QPSK	22.53	22.55	22.51
			16QAM	23.45	23.48	23.46
	50RB	High	QPSK	22.53	22.56	22.54
			16QAM	22.77	22.83	22.69
		Middle	QPSK	21.65	21.71	21.66
			16QAM	22.76	22.8	22.77
		Low	QPSK	21.71	21.75	21.72
			16QAM	22.77	22.8	22.78
	100RB	/	QPSK	21.72	21.75	21.73
			16QAM	22.7	22.76	22.69
			QPSK	21.59	21.65	21.58
			16QAM			

Conducted Power Measurement Results (LTE FDD Band 5)

LTE-FDD Band 5				Actual output Power (dBm)		
Band-width	RB allocation	RB offset	Modulation	Low	Middle	High
1.4 MHz	1RB	High	QPSK	824.7MHz	836.5MHz	848.3MHz
			16QAM	23.1	23.13	23.08
		Middle	QPSK	22.31	22.33	22.26
			16QAM	23.12	23.14	23.11
		Low	QPSK	22.31	22.35	22.3
			16QAM	22.31	22.35	22.3
	3RB	High	QPSK	23.09	23.14	23.12
			16QAM	22.3	22.31	22.29
		Middle	QPSK	22.93	22.92	22.9
			16QAM	22	22.02	22.03
		Low	QPSK	22.93	22.92	22.9
			16QAM	22	22.02	22.03
	6RB	/	QPSK	22.9	22.92	22.91
			16QAM	22.06	22.07	22.02
3 MHz	1RB	High	QPSK	21.92	21.96	21.92
			16QAM	21.05	21.1	21.03
		Middle	QPSK	825.5MHz	836.5MHz	847.5MHz
			16QAM	23.09	23.13	23.08
		Low	QPSK	22.31	22.31	22.3
			16QAM	23.12	23.16	23.11
			QPSK	22.3	22.32	22.31
			16QAM	22.3	22.32	22.31

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

	8RB	High	16QAM	22.3	22.34	22.28	
			QPSK	21.95	21.94	21.93	
		Middle	16QAM	21.03	21.04	21.07	
			QPSK	21.93	21.95	21.93	
		Low	16QAM	21.07	21.06	21.06	
			QPSK	21.92	21.97	21.91	
		15RB	/	16QAM	21.01	21.08	21
				QPSK	21.94	21.93	21.91
5 MHz			QPSK	21.03	21.05	21.01	
			16QAM	21.94	21.93	21.91	
				826.5MHz	836.5MHz	846.5MHz	
	1RB	High	QPSK	23.05	23.07	23.07	
			16QAM	22.29	22.29	22.28	
		Middle	QPSK	23.11	23.13	23.08	
			16QAM	22.29	22.31	22.32	
		Low	QPSK	23.11	23.14	23.12	
			16QAM	22.32	22.31	22.32	
	12RB	High	QPSK	21.99	21.97	21.98	
			16QAM	21.09	21.06	21.1	
		Middle	QPSK	22	22.02	21.97	
			16QAM	21.04	21.08	21.09	
		Low	QPSK	22.03	22.05	22	
			16QAM	21.08	21.09	21.03	
	25RB	/	QPSK	21.99	21.98	21.93	
			16QAM	21.09	21.1	21.06	
10 MHz			QPSK	21.99	21.98	21.93	
			16QAM	21.09	21.1	21.06	
				829MHz	836.5MHz	844MHz	
	1RB	High	QPSK	23.13	23.16	23.09	
			16QAM	22.34	22.35	22.32	
		Middle	QPSK	23.13	23.17	23.13	
			16QAM	22.31	22.34	22.29	
		Low	QPSK	23.12	23.14	23.11	
			16QAM	22.31	22.35	22.3	
	25RB	High	QPSK	22.02	22.03	21.98	
			16QAM	21.03	21.05	21.01	
		Middle	QPSK	22	22.02	21.98	
			16QAM	21.07	21.12	21.07	
		Low	QPSK	21.99	22.03	21.99	
			16QAM	21.1	21.07	21.05	
	50RB	/	QPSK	22.04	22	21.93	
			16QAM	21.1	21.12	21.07	

Conducted Power Measurement Results (LTE FDD Band 7)

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE-FDD Band 7				Actual output Power (dBm)		
Band-width	RBallocation	RBoffset	Modulation	Low	Middle	High
5 MHz				2502.5MHz	2535MHz	2567.5MHz
	1RB	High	QPSK	23.20	23.27	23.22
			16QAM	22.19	22.23	22.18
		Middle	QPSK	23.22	23.27	23.21
			16QAM	22.24	22.29	22.25
		Low	QPSK	23.22	23.22	23.23
			16QAM	22.23	22.25	22.25
	12RB	High	QPSK	22.08	22.1	22.04
			16QAM	20.89	20.94	20.88
		Middle	QPSK	22.11	22.15	22.11
			16QAM	20.9	20.96	20.88
		Low	QPSK	22.11	22.12	22.04
			16QAM	20.98	20.99	20.86
	25RB		QPSK	22.1	22.18	22.06
			16QAM	20.95	20.99	20.91
10 MHz				2505MHz	2535MHz	2565MHz
	1RB	High	QPSK	23.26	23.28	23.2
			16QAM	22.23	22.27	22.22
		Middle	QPSK	23.26	23.24	23.17
			16QAM	22.27	22.28	22.22
		Low	QPSK	23.21	23.21	23.18
			16QAM	22.24	22.26	22.23
	25RB	High	QPSK	22.06	22.1	22.07
			16QAM	21.08	21.09	21.05
		Middle	QPSK	22.13	22.13	22.07
			16QAM	21.14	21.15	21.12
		Low	QPSK	22.12	22.16	22.03
			16QAM	21.08	21.11	21.09
	50RB		QPSK	22.12	22.12	22.06
			16QAM	21.1	21.13	21.08
15 MHz				2507.5MHz	2535MHz	2562.5MHz
	1RB	High	QPSK	23.21	23.26	23.2
			16QAM	22.23	22.26	22.23
		Middle	QPSK	23.19	23.29	23.22
			16QAM	22.25	22.29	22.25
		Low	QPSK	23.24	23.26	23.2
			16QAM	22.22	22.26	22.25
	36RB	High	QPSK	22.04	22.13	22.06

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

		Middle	16QAM	21.09	21.13	21.06
			QPSK	22.08	22.14	22.08
		Low	16QAM	21.1	21.15	21.07
			QPSK	22.09	22.09	22.06
	75RB		16QAM	21.16	21.18	21.05
			QPSK	22.1	22.16	22.1
			16QAM	21.13	21.15	21.07
20 MHz	1RB	High		2510MHz	2535MHz	2560MHz
			QPSK	23.22	23.3	23.23
		Middle	16QAM	22.26	22.28	22.23
			QPSK	23.24	23.32	23.28
		Low	16QAM	22.25	22.31	22.26
			QPSK	23.25	23.3	23.25
	50RB	High	16QAM	22.23	22.26	22.22
			QPSK	22.28	22.31	22.26
		Middle	16QAM	21.1	21.16	21.07
			QPSK	22.1	22.15	22.1
		Low	16QAM	21.12	21.16	21.09
			QPSK	22.08	22.11	22.12
	100RB		16QAM	21.09	21.16	21.09
			QPSK	22.13	22.19	22.12
			16QAM	21.12	21.18	21.21

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

<WIFI 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Data rate
802.11b	01	2412	16.93	13.60	1 Mbps
	06	2437	16.27	13.61	1 Mbps
	11	2462	16.65	13.70	1 Mbps
802.11g	01	2412	16.54	13.23	6 Mbps
	06	2437	16.18	13.47	6 Mbps
	11	2462	16.25	13.59	6 Mbps
802.11n(20MHz)	01	2412	16.22	12.62	6.5 Mbps
	06	2437	16.39	12.18	6.5 Mbps
	11	2462	16.72	12.13	6.5 Mbps

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted power (dBm)
GFSK	0	2402	6.13
	39	2441	6.53
	78	2480	6.91
$\pi/4$ QPSK	0	2402	6.14
	39	2441	5.09
	78	2480	5.00
8DPSK	0	2402	6.56
	39	2441	5.62
	78	2480	5.30
BLE(GFSK)	0	2402	-2.64
	19	2440	-1.22
	39	2480	-0.53

11. Maximum Tune-up Limit

Mode	Burst Average Power (dBm)	
	GSM850	PCS1900
GSM (GMSK, 1Tx Slot)	33.00	30.50
GPRS (GMSK, 1Tx Slot)	33.00	30.50
GPRS (GMSK, 2Tx Slot)	32.00	28.50
GPRS (GMSK, 3Tx Slot)	30.50	27.50
GPRS (GMSK, 4Tx Slot)	29.50	26.50
EGPRS (8PSK, 1Tx Slot)	28.50	25.50
EGPRS (8PSK, 2Tx Slot)	27.50	25.00
EGPRS (8PSK, 3Tx Slot)	25.00	24.00
EGPRS (8PSK, 4Tx Slot)	23.50	23.00

Mode	Burst Average Power (dBm)	
	WCDMA Band II	WCDMA Band V
RMC 12.2Kbps	24.00	24.00
HSDPA Subtest-1	24.00	24.00
HSDPA Subtest-2	24.00	24.00
HSDPA Subtest-3	23.00	23.00
HSDPA Subtest-4	22.00	22.00
HSUPA Subtest-1	22.00	22.00
HSUPA Subtest-2	22.00	22.00
HSUPA Subtest-3	22.00	22.00
HSUPA Subtest-4	21.00	21.00
HSUPA Subtest-5	21.00	21.00
HSPA+	20.00	20.00

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE

LTE Band 2			
Channel	L	M	H
Tune-up(dB)	24	24	24
LTE Band 5			
Channel	L	M	H
Tune-up(dB)	23.5	23.5	23.5
LTE Band 7			
Channel	L	M	H
Tune-up(dB)	23.5	23.5	23.5

LTE MPR will follow up 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

WLAN 2.4G

Mode	Peak Power (dBm)	Burst Average Power (dBm)
802.11b	17.50	14.00
802.11g	17.50	14.00
802.11n(HT20)	17.50	13.00

BT

Mode	Channel	Frequency (MHz)	Conducted power (dBm)
GFSK	0	2402	7.0
	39	2441	7.0
	78	2480	7.0
π/4QPSK	0	2402	7.0
	39	2441	7.0
	78	2480	7.0
8DPSK	0	2402	7.0
	39	2441	7.0
	78	2480	7.0
BLE(GFSK)	0	2402	-2.0

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

	19	2440	-1.0
	39	2480	-0.0

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\geq 50\text{mm}$ are determined by:

$$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.45	Head	9.6	7	5.01	Yes
		Body	9.6	7	5.01	Yes

Per KDB 447498 D01, when the minimum test separation distance is $< 5\text{mm}$, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

12. Antenna Location



Distance of The Antenna to the EUT surface and edge						
Antennas	Front	Back	Top Side	Bottom Side	Left Side	Right Side
WWAN	<25mm	<25mm	>25mm	<25mm	>25mm	<25mm
BT&WLAN	<25mm	<25mm	<25mm	>25mm	>25mm	<25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top side	Bottom side	Left Side	Right Side
WWAN	Yes	Yes	No	Yes	No	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General Note: Referring to KDB 941225 D06 v02, SAR must be measured for all sides and surfaces with a transmitting antenna located with 25mm from that surface or edge.

13. SAR Test Results Summary

General Note:

1. Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
$$\text{Scaling Factor} = \text{tune-up limit power (mW)} / \text{EUT RF power (mW)}, \text{ where tune-up limit is the maximum rated power among all production units.}$$
$$\text{Reported SAR(W/kg)} = \text{Measured SAR(W/kg)} * \text{Scaling Factor}$$
2. Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.
1. Per KDB 865664 D01, for each frequency band, **repeated SAR measurement is required** only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.

<Head SAR>

<GSM>

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GSM	Right-Cheek	128	824.2	32.63	33.00	1.09	-	-	-	-
		190	836.6	32.42	33.00	1.14	0.07	0.415	0.474	#1
		251	848.8	32.62	33.00	1.09	-	-	-	-
	Right-Tilt	128	824.2	32.63	33.00	1.09	-	-	-	-
		190	836.6	32.42	33.00	1.14	-0.08	0.317	0.363	-
		251	848.8	32.62	33.00	1.09	-	-	-	-
	Left-Cheek	128	824.2	32.63	33.00	1.09	-	-	-	-
		190	836.6	32.42	33.00	1.14	-0.03	0.391	0.447	-
		251	848.8	32.62	33.00	1.09	-	-	-	-
	Left-Tilt	128	824.2	32.63	33.00	1.09	-	-	-	-
		190	836.6	32.42	33.00	1.14	0.04	0.312	0.356	-
		251	848.8	32.62	33.00	1.09	-	-	-	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GSM	Left-Cheek	512	1850.2	30.15	30.50	1.08	-	-	-	-
		661	1880.0	29.75	30.50	1.19	0.04	0.212	0.252	#2
		810	1909.8	29.81	30.50	1.17	-	-	-	-
	Left-Tilt	512	1850.2	30.15	30.50	1.08	-	-	-	-
		661	1880.0	29.75	30.50	1.19	0.03	0.158	0.187	-
		810	1909.8	29.81	30.50	1.17	-	-	-	-
	Right-Cheek	512	1850.2	30.15	30.50	1.08	-	-	-	-
		661	1880.0	29.75	30.50	1.19	-0.02	0.194	0.231	-
		810	1909.8	29.81	30.50	1.17	-	-	-	-
	Right-Tilt	512	1850.2	30.15	30.50	1.08	-	-	-	-
		661	1880.0	29.75	30.50	1.19	-0.03	0.148	0.176	-
		810	1909.8	29.81	30.50	1.17	-	-	-	-

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2K bps	Left-Cheek	9262	1852.4	23.62	24.00	1.09	-	-	-	-
		9400	1880.0	23.59	24.00	1.10	-0.05	0.347	0.381	#3
		9538	1907.6	23.50	24.00	1.12	-	-	-	-
	Left-Tilt	9262	1852.4	23.62	24.00	1.09	-	-	-	-
		9400	1880.0	23.59	24.00	1.10	-0.03	0.279	0.307	-
		9538	1907.6	23.50	24.00	1.12	-	-	-	-
	Right-Cheek	9262	1852.4	23.62	24.00	1.09	-	-	-	-
		9400	1880.0	23.59	24.00	1.10	0.09	0.331	0.364	-
		9538	1907.6	23.50	24.00	1.12	-	-	-	-
	Right-Tilt	9262	1852.4	23.62	24.00	1.09	-	-	-	-
		9400	1880.0	23.59	24.00	1.10	0.03	0.253	0.278	-
		9538	1907.6	23.50	24.00	1.12	-	-	-	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2K bps	Right-Cheek	4132	826.4	23.54	24.00	1.11	-	-	-	-
		4183	836.6	23.51	24.00	1.12	0.14	0.278	0.311	#4
		4233	846.6	23.49	24.00	1.12	-	-	-	-
	Right-Tilt	4132	826.4	23.54	24.00	1.11	-	-	-	-
		4183	836.6	23.51	24.00	1.12	0.12	0.229	0.256	-
		4233	846.6	23.49	24.00	1.12	-	-	-	-
	Left-Cheek	4132	826.4	23.54	24.00	1.11	-	-	-	-
		4183	836.6	23.51	24.00	1.12	0.19	0.263	0.295	-
		4233	846.6	23.49	24.00	1.12	-	-	-	-
	Left-Tilt	4132	826.4	23.54	24.00	1.11	-	-	-	-
		4183	836.6	23.51	24.00	1.12	-0.06	0.213	0.238	-
		4233	846.6	23.49	24.00	1.12	-	-	-	-

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Left-Cheek	18700	1860.0	23.45	24.00	1.14	-	-	-	-
		18900	1880.0	23.48	24.00	1.13	0.16	0.364	0.410	#5
		19100	1900.0	23.46	24.00	1.13	-	-	-	-
	Left-Tilt	18700	1860.0	23.45	24.00	1.14	-	-	-	-
		18900	1880.0	23.48	24.00	1.13	-0.18	0.278	0.314	-
		19100	1900.0	23.46	24.00	1.13	-	-	-	-
	Right-Cheek	18700	1860.0	23.45	24.00	1.14	-	-	-	-
		18900	1880.0	23.48	24.00	1.13	-0.07	0.343	0.387	-
		19100	1900.0	23.46	24.00	1.13	-	-	-	-
	Right-Tilt	18700	1860.0	23.45	24.00	1.14	-	-	-	-
		18900	1880.0	23.48	24.00	1.13	0.09	0.274	0.308	-
		19100	1900.0	23.46	24.00	1.13	-	-	-	-
20M_5 ORB	Left-Cheek	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	0.13	0.302	0.317	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
	Left-Tilt	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	-0.07	0.265	0.278	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
	Right-Cheek	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	-0.06	0.280	0.293	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
	Right-Tilt	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	0.05	0.162	0.170	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1 RB	Right-Ch eek	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	-0.15	0.258	0.278	#6
		20600	844	23.13	23.50	1.09	-	-	-	-
	Right-Tilt	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	0.00	0.193	0.208	-
		20600	844	23.13	23.50	1.09	-	-	-	-
	Left-Che ek	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	0.07	0.226	0.244	-
		20600	844	23.13	23.50	1.09	-	-	-	-
	Left-Tilt	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	-0.04	0.131	0.142	-
		20600	844	23.13	23.50	1.09	-	-	-	-
10M_2 5RB	Right-Ch eek	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	-0.12	0.214	0.239	-
		20600	844	21.98	22.50	1.13	-	-	-	-
	Right-Tilt	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	0.14	0.164	0.183	-
		20600	844	21.98	22.50	1.13	-	-	-	-
	Left-Che ek	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	0.06	0.202	0.225	-
		20600	844	21.98	22.50	1.13	-	-	-	-
	Left-Tilt	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	-0.07	0.161	0.180	-
		20600	844	21.98	22.50	1.13	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1RB	Left-Cheek	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	-0.06	0.109	0.114	#7
		21350	2560	23.25	23.50	1.06	-	-	-	-
	Left-Tilt	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	-0.01	0.085	0.089	-
		21350	2560	23.25	23.50	1.06	-	-	-	-
	Right-Cheek	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	0.03	0.099	0.103	-
		21350	2560	23.25	23.50	1.06	-	-	-	-
	Right-Tilt	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	-0.02	0.074	0.077	-
		21350	2560	23.25	23.50	1.06	-	-	-	-
10M_25RB	Left-Cheek	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	-0.05	0.091	0.095	-
		21350	2560	22.26	22.50	1.06	-	-	-	-
	Left-Tilt	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	0.02	0.079	0.083	-
		21350	2560	22.26	22.50	1.06	-	-	-	-
	Right-Cheek	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	-0.01	0.084	0.087	-
		21350	2560	22.26	22.50	1.06	-	-	-	-
	Right-Tilt	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	0.02	0.067	0.070	-
		21350	2560	22.26	22.50	1.06	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WLAN 2.4G										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift (dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11b 1Mbps	Left-Cheek	01	2412	13.6	14	1.10	-	-	-	-
		06	2437	13.61	14	1.09	-	-	-	-
		11	2462	13.7	14	1.07	0.09	0.312	0.334	#8
	Left-Tilt	01	2412	13.6	14	1.10	-	-	-	-
		06	2437	13.61	14	1.09	-	-	-	-
		11	2462	13.7	14	1.07	-0.12	0.264	0.283	-
	Right-Cheek	01	2412	13.6	14	1.10	-	-	-	-
		06	2437	13.61	14	1.09	-	-	-	-
		11	2462	13.7	14	1.07	-0.05	0.284	0.304	-
	Right-Tilt	01	2412	13.6	14	1.10	-	-	-	-
		06	2437	13.61	14	1.09	-	-	-	-
		11	2462	13.7	14	1.07	0.06	0.247	0.265	-

Note:

- According to the above table, the initial test position for head is "LeftCheek", and its reported SAR is $\leq 0.4\text{W/kg}$. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$, the 802.11g/n is not required.

WLAN- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Left-Cheek	11	2462	98.96%	100%	0.334	0.338
	Left-Tilt	11	2462	98.96%	100%	0.283	0.286
	Right-Cheek	11	2462	98.96%	100%	0.304	0.307
	Right-Tilt	11	2462	98.96%	100%	0.265	0.268

Note:

- According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to **Shenzhen Anbotek Compliance Laboratory Limited**

determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.96% is achievable for WLAN in this project.

<Body SAR>

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	128	824.2	29.02	29.50	1.12	-	-	-	-
		190	836.6	29.02	29.50	1.12	-0.06	0.315	0.352	-
		251	848.8	28.99	29.50	1.12	-	-	-	-
	Back	128	824.2	29.02	29.50	1.12	-	-	-	-
		190	836.6	29.02	29.50	1.12	0.12	0.477	0.533	#9
		251	848.8	28.99	29.50	1.12	-	-	-	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	512	1850.2	26.00	26.50	1.12	-	-	-	-
		661	1880.0	26.03	26.50	1.11	-0.01	0.607	0.676	-
		810	1909.8	26.02	26.50	1.12	-	-	-	-
	Back	512	1850.2	26.00	26.50	1.12	0.03	0.921	1.033	-
		661	1880.0	26.03	26.50	1.11	0.01	0.930	1.036	#10
		810	1909.8	26.02	26.50	1.12	0.06	0.926	1.034	-

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC	Front	9262	1852.40	23.62	24.00	1.09	-	-	-	-
		9400	1880.00	23.59	24.00	1.10	0.01	0.789	0.867	-
		9538	1907.60	23.50	24.00	1.12	-	-	-	-
	Back	9262	1852.40	23.62	24.00	1.09	0.09	1.14	1.244	-
		9400	1880.00	23.59	24.00	1.10	0.03	1.15	1.264	#11
		9538	1907.60	23.50	24.00	1.12	0.08	1.11	1.245	-

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC	Front	4132	826.40	23.54	24.00	1.11	-	-	-	-
		4182	836.40	23.51	24.00	1.12	-0.02	0.613	0.687	-
		4233	846.60	23.49	24.00	1.12	-	-	-	-
	Back	4132	826.40	23.54	24.00	1.11	0.07	0.857	0.953	-
		4182	836.40	23.51	24.00	1.12	0.05	0.862	0.965	#12
		4233	846.60	23.49	24.00	1.12	0.03	0.849	0.955	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Front	18700	1860.0	23.45	24.00	1.14	-	-	-	-
		18900	1880.0	23.48	24.00	1.13	-0.02	0.641	0.722	-
		19100	1900.0	23.46	24.00	1.13	-	-	-	-
	Back	18700	1860.0	23.45	24.00	1.14	0.01	0.963	1.093	-
		18900	1880.0	23.48	24.00	1.13	0.04	0.971	1.095	#13
		19100	1900.0	23.46	24.00	1.13	0.02	0.965	1.093	-
20M_5 0RB	Front	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	0.02	0.229	0.240	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
	Back	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	-0.16	0.405	0.424	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
20M_1 00RB	Front	18700	1860.0	22.70	23.00	1.07	-	-	-	-
		18900	1880.0	22.76	23.00	1.06	0.10	0.185	0.196	-
		19100	1900.0	22.69	23.00	1.07	-	-	-	-
	Back	18700	1860.0	22.70	23.00	1.07	-	-	-	-
		18900	1880.0	22.76	23.00	1.06	-0.16	0.397	0.420	-
		19100	1900.0	22.69	23.00	1.07	-	-	-	-

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1 RB	Front	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	0.00	0.261	0.282	-
		20600	844	23.13	23.50	1.09	-	-	-	-
	Back	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	-0.02	0.56	0.604	#14
		20600	844	23.13	23.50	1.09	-	-	-	-
10M_2 5RB	Front	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	0.02	0.148	0.165	-
		20600	844	21.98	22.50	1.13	-	-	-	-

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

	Back	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	-0.16	0.405	0.451	-
		20600	844	21.98	22.50	1.13	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Front	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	0.01	0.452	0.473	-
		21350	2560	23.25	23.50	1.06	-	-	-	-
	Back	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	-0.04	0.733	0.768	#15
		21350	2560	23.25	23.50	1.06	-	-	-	-
20M_5 0RB	Front	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	0.04	0.245	0.256	-
		21350	2560	22.26	22.50	1.06	-	-	-	-
	Back	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	-0.16	0.405	0.423	-
		21350	2560	22.26	22.50	1.06	-	-	-	-

WLAN 2.4G										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11b 1Mbps	Front	1	2412	13.60	14.00	1.10	-	-	-	-
		6	2437	13.61	14.00	1.09	-	-	-	-
		11	2462	13.70	14.00	1.07	0.18	0.155	0.166	-
	Back	1	2412	13.60	14.00	1.10	-	-	-	-
		6	2437	13.61	14.00	1.09	-	-	-	-
		11	2462	13.70	14.00	1.07	-0.12	0.253	0.271	#16

Note:

According to the above table, the initial test position for body is "Back", and its reported SAR is $\leq 0.4\text{W/kg}$. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

the following 2.4 GHz OFDM conditions.

When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.

When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, the 802.11g/n is not required

WLAN- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Front	11	2462	98.96%	100%	0.166	0.168
	Back	11	2462	98.96%	100%	0.271	0.274

Note:

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.96% is achievable for WLAN in this project.

Hotspot SAR

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top side	Bottom side	Left Side	Right Side
WWAN	Yes	Yes	No	Yes	No	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

General note:

Referring to KDB941225 D06, when the overall device length and width are >9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	128	824.2	29.02	29.50	1.12	-	-	-	-
		190	836.6	29.02	29.50	1.12	-0.06	0.315	0.352	-
		251	848.8	28.99	29.50	1.12	-	-	-	-
	Back	128	824.2	29.02	29.50	1.12	-	-	-	-
		190	836.6	29.02	29.50	1.12	0.12	0.477	0.533	#9
		251	848.8	28.99	29.50	1.12	-	-	-	-
	Left	190	836.6	29.02	29.50	1.12	-	-	-	-
	Right	190	836.6	29.02	29.50	1.12	0.04	0.152	0.170	-
	Top	190	836.6	29.02	29.50	1.12	-	-	-	-
	Bottom	190	836.6	29.02	29.50	1.12	0.16	0.272	0.304	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	512	1850.2	26.00	26.50	1.12	-	-	-	-
		661	1880.0	26.03	26.50	1.11	-0.01	0.607	0.676	-
		810	1909.8	26.02	26.50	1.12	-	-	-	-
	Back	512	1850.2	26.00	26.50	1.12	0.03	0.921	1.033	-
		661	1880.0	26.03	26.50	1.11	0.01	0.930	1.036	#10
		810	1909.8	26.02	26.50	1.12	0.06	0.926	1.034	-

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

	Left	661	1880.0	26.03	26.50	1.11	-	-	-	-
	Right	661	1880.0	26.03	26.50	1.11	0.00	0.309	0.344	-
	Top	661	1880.0	26.03	26.50	1.11	-	-	-	-
	Bottom	661	1880.0	26.03	26.50	1.11	0.01	0.530	0.591	-

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC	Front	9262	1852.40	23.62	24.00	1.09	-	-	-	-
		9400	1880.00	23.59	24.00	1.10	0.01	0.789	0.867	-
		9538	1907.60	23.50	24.00	1.12	-	-	-	-
	Back	9262	1852.40	23.62	24.00	1.09	0.09	1.14	1.244	-
		9400	1880.00	23.59	24.00	1.10	0.03	1.15	1.264	#11
		9538	1907.60	23.50	24.00	1.12	0.08	1.11	1.245	-
	Left	9400	1880.00	23.59	24.00	1.10	-	-	-	-
	Right	9400	1880.00	23.59	24.00	1.10	0.04	0.620	0.681	-
	Top	9400	1880.00	23.59	24.00	1.10	-	-	-	-
	Bottom	9400	1880.00	23.59	24.00	1.10	0.02	0.595	0.653	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC	Front	4132	826.40	23.54	24.00	1.11	-	-	-	-
		4182	836.40	23.51	24.00	1.12	-0.02	0.613	0.687	-
		4233	846.60	23.49	24.00	1.12	-	-	-	-
	Back	4132	826.40	23.54	24.00	1.11	0.07	0.857	0.953	-
		4182	836.40	23.51	24.00	1.12	0.05	0.862	0.965	#12
		4233	846.60	23.49	24.00	1.12	0.03	0.849	0.955	-
	Left	4182	836.40	23.51	24.00	1.12	-	-	-	-
	Right	4182	836.40	23.51	24.00	1.12	-0.05	0.380	0.426	-
	Top	4182	836.40	23.51	24.00	1.12	-	-	-	-
	Bottom	4182	836.40	23.51	24.00	1.12	-0.02	0.491	0.550	-

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Front	18700	1860.0	23.45	24.00	1.14	-	-	-	-
		18900	1880.0	23.48	24.00	1.13	-0.02	0.641	0.722	-
		19100	1900.0	23.46	24.00	1.13	-	-	-	-
	Back	18700	1860.0	23.45	24.00	1.14	0.01	0.963	1.093	-
		18900	1880.0	23.48	24.00	1.13	0.04	0.971	1.095	#13
		19100	1900.0	23.46	24.00	1.13	0.02	0.965	1.093	-
	Left	18900	1880.0	23.48	24.00	1.13	-	-	-	-
	Right	18900	1880.0	23.48	24.00	1.13	0.01	0.310	0.349	-
	Top	18900	1880.0	23.48	24.00	1.13	-	-	-	-
	Bottom	18900	1880.0	23.48	24.00	1.13	0.05	0.553	0.624	-
20M_5 ORB	Front	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	0.02	0.229	0.240	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
	Back	18700	1860.0	22.77	23.00	1.05	-	-	-	-
		18900	1880.0	22.80	23.00	1.05	-0.16	0.405	0.424	-
		19100	1900.0	22.78	23.00	1.05	-	-	-	-
	Left	18900	1880.0	22.80	23.00	1.05	-	-	-	-
	Right	18900	1880.0	22.80	23.00	1.05	0.04	0.134	0.141	-
	Top	18900	1880.0	22.80	23.00	1.05	-	-	-	-
	Bottom	18900	1880.0	22.80	23.00	1.05	-0.17	0.185	0.194	-
20M_1 00RB	Front	18700	1860.0	22.70	23.00	1.07	-	-	-	
		18900	1880.0	22.76	23.00	1.06	0.10	0.185	0.196	
		19100	1900.0	22.69	23.00	1.07	-	-	-	
	Back	18700	1860.0	22.70	23.00	1.07	-	-	-	
		18900	1880.0	22.76	23.00	1.06	-0.16	0.397	0.420	
		19100	1900.0	22.69	23.00	1.07	-	-	-	
	Left	18900	1880.0	22.76	23.00	1.06	-	-	-	
	Right	18900	1880.0	22.76	23.00	1.06	-0.06	0.211	0.223	
	Top	18900	1880.0	22.76	23.00	1.06	-	-	-	
	Bottom	18900	1880.0	22.76	23.00	1.06	-0.02	0.181	0.192	

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1 RB	Front	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	0.00	0.261	0.282	-
		20600	844	23.13	23.50	1.09	-	-	-	-
	Back	20450	829	23.13	23.50	1.09	-	-	-	-
		20525	836.5	23.17	23.50	1.08	-0.02	0.56	0.604	#14
		20600	844	23.13	23.50	1.09	-	-	-	-
	Left	20525	836.5	23.17	23.50	1.08	-	-	-	-
	Right	20525	836.5	23.17	23.50	1.08	0.00	0.130	0.140	-
	Top	20525	836.5	23.17	23.50	1.08	-	-	-	-
	Bottom	20525	836.5	23.17	23.50	1.08	-0.01	0.200	0.216	-
10M_2 5RB	Front	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	0.02	0.148	0.165	-
		20600	844	21.98	22.50	1.13	-	-	-	-
	Back	20450	829	22.02	22.50	1.12	-	-	-	-
		20525	836.5	22.03	22.50	1.11	-0.16	0.405	0.451	-
		20600	844	21.98	22.50	1.13	-	-	-	-
	Left	20525	836.5	22.03	22.50	1.11	-	-	-	-
	Right	20525	836.5	22.03	22.50	1.11	-0.02	0.175	0.195	-
	Top	20525	836.5	22.03	22.50	1.11	-	-	-	-
	Bottom	20525	836.5	22.03	22.50	1.11	-0.04	0.145	0.161	-

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Front	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	0.01	0.452	0.473	-
		21350	2560	23.25	23.50	1.06	-	-	-	-
	Back	20850	2510	23.25	23.50	1.06	-	-	-	-
		21100	2535	23.30	23.50	1.05	-0.04	0.733	0.768	#15
		21350	2560	23.25	23.50	1.06	-	-	-	-
	Left	21100	2535	23.30	23.50	1.05	-	-	-	-
	Right	21100	2535	23.30	23.50	1.05	-0.01	0.307	0.321	-
	Top	21100	2535	23.30	23.50	1.05	-	-	-	-
	Bottom	21100	2535	23.30	23.50	1.05	-0.01	0.379	0.397	-
20M_5 ORB	Front	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	0.04	0.245	0.256	-
		21350	2560	22.26	22.50	1.06	-	-	-	-
	Back	20850	2510	22.28	22.50	1.05	-	-	-	-
		21100	2535	22.31	22.50	1.04	-0.16	0.405	0.423	-
		21350	2560	22.26	22.50	1.06	-	-	-	-
	Left	21100	2535	22.31	22.50	1.04	-	-	-	-
	Right	21100	2535	22.31	22.50	1.04	-0.05	0.094	0.098	-
	Top	21100	2535	22.31	22.50	1.04	-	-	-	-
	Bottom	21100	2535	22.31	22.50	1.04	-0.22	0.231	0.241	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WLAN										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11b 1Mbps	Front	1	2412	13.60	14.00	1.10	-	-	-	-
		6	2437	13.61	14.00	1.09	-	-	-	-
		11	2462	13.70	14.00	1.07	0.18	0.155	0.166	-
	Back	1	2412	13.60	14.00	1.10	-	-	-	-
		6	2437	13.61	14.00	1.09	-	-	-	-
		11	2462	13.70	14.00	1.07	-0.12	0.253	0.271	#16
	Left	11	2462	13.70	14.00	1.07	-	-	-	-
	Right	11	2462	13.70	14.00	1.07	-0.16	0.131	0.143	-
	Top	11	2462	13.70	14.00	1.07	0.18	0.155	0.166	-
	Bottom	11	2462	13.70	14.00	1.07	-	-	-	-

Note:

According to the above table, the initial test position for body is "Back", and its reported SAR is $\leq 0.4\text{W/kg}$. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8\text{W/kg}$, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.

When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$, the 802.11g/n is not required

WLAN- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Front	11	2462	98.96%	100%	0.166	0.168
	Back	11	2462	98.96%	100%	0.271	0.274
	Right	11	2462	98.96%	100%	0.143	0.145
	Top	11	2462	98.96%	100%	0.166	0.168

Note:

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.96% is achievable for WLAN in this project.

14. SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

SAR Measurement Variability for Body GSM 1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
CH	MHz						
661	1880.0	Rear	0	0.930	0.921	1.01	/

SAR Measurement Variability for Body W1900 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
CH	MHz						
9400	1880.00	Rear	0	1.15	1.13	1.02	/

SAR Measurement Variability for Body W850 (1g)

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
CH	MHz						
4182	836.40	Rear	0	0.862	0.850	1.01	/

SAR Measurement Variability for Body LTE Band 2 (1g)

Frequency		Configuration	Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
CH	MHz							
18900	1880.0	20MHz_1RB	Rear	0	0.971	0.953	1.02	/

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

15. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note
1	GSM(voice) + Bluetooth (data)	No	No	No	
2	GSM(voice) + WIFI 2.4G(data)	Yes	Yes	No	
3	WCDMA(voice) + Bluetooth (data)	No	No	No	
4	WCDMA(voice) + WIFI 2.4G (data)	Yes	Yes	No	
5	WCDMA (data) + Bluetooth (data)	No	No	No	
6	WCDMA (data) + WIFI 2.4G (data)	Yes	Yes	Yes	
7	LTE + Bluetooth (data)	No	No	No	
8	LTE + WIFI FI.4G (data)	Yes	Yes	Yes	

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}]/\text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Head	Hotspot	Body worn
	Test separation	0mm	0mm	0mm
7.0 dBm	Estimated SAR (W/kg)	0.209 W/kg	0.209 W/kg	0.209 W/kg

Simultaneous and Hotspot SAR test exclusion considerations:**Head Exposure condition**

WWAN PCE + WIFI DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Sum SAR (W/kg)
			WWAN	WIFI 2.4G	
GSM	GSM850	Left Cheek	0.447	0.338	0.785
		Left Tilt	0.356	0.286	0.642
		Right Cheek	0.474	0.307	0.781
		Right Tilt	0.363	0.268	0.631
	PCS1900	Left Cheek	0.252	0.338	0.59
		Left Tilt	0.187	0.286	0.473
		Right Cheek	0.231	0.307	0.538
		Right Tilt	0.176	0.268	0.444
WCDMA	Band II	Left Cheek	0.381	0.338	0.719
		Left Tilt	0.307	0.286	0.593
		Right Cheek	0.364	0.307	0.671
		Right Tilt	0.278	0.268	0.546
	Band V	Left Cheek	0.295	0.338	0.633
		Left Tilt	0.238	0.286	0.524
		Right Cheek	0.311	0.307	0.618
		Right Tilt	0.256	0.268	0.524
LTE	Band 2	Left Cheek	0.41	0.338	0.748
		Left Tilt	0.314	0.286	0.6
		Right Cheek	0.387	0.307	0.694
		Right Tilt	0.308	0.268	0.576
	Band 5	Left Cheek	0.244	0.338	0.582
		Left Tilt	0.142	0.286	0.428
		Right Cheek	0.278	0.307	0.585
		Right Tilt	0.208	0.268	0.476
	Band 7	Left Cheek	0.114	0.338	0.452
		Left Tilt	0.089	0.286	0.375
		Right Cheek	0.103	0.307	0.41
		Right Tilt	0.077	0.268	0.345

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WWAN PCE +BT					
WWAN Band		Exposure Position	Max SAR (W/kg)		Sum SAR
			WWAN	BT	(W/kg)
GSM	GSM850	Right Cheek	0.474	0.209	0.683
		Right Tilt	0.363	0.209	0.572
		Left Cheek	0.447	0.209	0.656
		Left Tilt	0.356	0.209	0.565
	PCS1900	Right Cheek	0.252	0.209	0.461
		Right Tilt	0.187	0.209	0.396
		Left Cheek	0.231	0.209	0.44
		Left Tilt	0.176	0.209	0.385
WCDMA	Band II	Right Cheek	0.381	0.209	0.59
		Right Tilt	0.307	0.209	0.516
		Left Cheek	0.364	0.209	0.573
		Left Tilt	0.278	0.209	0.487
	Band V	Right Cheek	0.311	0.209	0.52
		Right Tilt	0.256	0.209	0.465
		Left Cheek	0.295	0.209	0.504
		Left Tilt	0.238	0.209	0.447
LTE	Band 2	Right Cheek	0.410	0.209	0.619
		Right Tilt	0.314	0.209	0.523
		Left Cheek	0.387	0.209	0.596
		Left Tilt	0.308	0.209	0.517
	Band 5	Right Cheek	0.278	0.209	0.487
		Right Tilt	0.208	0.209	0.417
		Left Cheek	0.244	0.209	0.453
		Left Tilt	0.142	0.209	0.351
	Band 7	Right Cheek	0.114	0.209	0.323
		Right Tilt	0.089	0.209	0.298
		Left Cheek	0.103	0.209	0.312
		Left Tilt	0.077	0.209	0.286

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Body-Worn Accessory Exposure condition

WWAN Band		Exposure Position	Max SAR (W/kg)		Sum SAR (W/kg)
			WWAN PCS*	Wifi	
GSM	GSM850	Front	0.352	0.168	0.520
		Back	0.533	0.274	0.807
	PCS1900	Front	0.676	0.168	0.844
		Back	1.036	0.274	1.31
WCDMA	Band II	Front	0.867	0.168	1.035
		Back	1.264	0.274	1.538
	Band V	Front	0.687	0.168	0.855
		Back	0.965	0.274	1.239
LTE	Band 2	Front	0.722	0.168	0.89
		Back	1.095	0.274	1.369
	Band 5	Front	0.282	0.168	0.45
		Back	0.604	0.274	0.878
	Band 7	Front	0.473	0.168	0.641
		Back	0.768	0.274	1.042

WWAN Band		Exposure Position	Max SAR (W/kg)		Sum SAR (W/kg)
			WWAN PCS*	BT	
GSM	GSM850	Front	0.352	0.209	0.561
		Back	0.533	0.209	0.742
	PCS1900	Front	0.676	0.209	0.885
		Back	1.036	0.209	1.245
WCDMA	Band II	Front	0.867	0.209	1.076
		Back	1.264	0.209	1.473
	Band V	Front	0.687	0.209	0.896
		Back	0.965	0.209	1.174
LTE	Band 2	Front	0.722	0.209	0.931
		Back	1.095	0.209	1.304
	Band 5	Front	0.282	0.209	0.491
		Back	0.604	0.209	0.813
	Band 7	Front	0.473	0.209	0.682
		Back	0.768	0.209	0.977

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Maximum reported SAR value for Hotspot mode

WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN	WLAN 2.4G	(W/kg)
GSM	GSM850	Front	0.352	0.168	0.52
		Back	0.533	0.274	0.807
		Left side	-	-	-
		Right side	0.17	0.145	0.315
		Top side	-	0.168	0.168
		Bottom side	0.304	-	0.304
	PCS1900	Front	0.676	0.168	0.844
		Back	1.036	0.274	1.31
		Left side	-	-	-
		Right side	0.344	0.145	0.489
		Top side	-	0.168	0.168
		Bottom side	0.591	-	0.591
WCDMA	Band II	Front	0.867	0.168	1.035
		Back	1.264	0.274	1.538
		Left side	-	-	-
		Right side	0.681	0.145	0.826
		Top side	-	0.168	0.168
		Bottom side	0.653	-	0.653
	Band V	Front	0.687	0.168	0.855
		Back	0.965	0.274	1.239
		Left side	-	-	-
		Right side	0.426	0.145	0.571
		Top side	-	0.168	0.168
		Bottom side	0.55	-	0.55
LTE	B2	Front	0.722	0.168	0.89
		Back	1.095	0.274	1.369
		Left side	-	-	-
		Right side	0.349	0.145	0.494
		Top side	-	0.168	0.168
		Bottom side	0.624	-	0.624
	B5	Front	0.282	0.168	0.45
		Back	0.604	0.274	0.878
		Left side	-	-	-
		Right side	0.14	0.145	0.285

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

B7	Top side	-	0.168	0.168
	Bottom side	0.216	-	0.216
	Front	0.473	0.168	0.641
	Back	0.768	0.274	1.042
	Left side	-	-	-
	Right side	0.321	0.145	0.466
	Top side	-	0.168	0.168
	Bottom side	0.397	-	0.397

16. Measurement Uncertainty

NO	Source	Uncert. ai (%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	Stand. Un cert. ui (1g)	Stand. Un cert. ui (10g)	Veff
1	Repeat	0.4	N	1	1	1	0.4	0.4	9
Instrument									
2	Probe calibration	7	N	2	1	1	3.5	3.5	∞
3	Axial isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
4	Hemispherical isotropy	9.4	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	∞
5	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
7	Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
8	Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
9	Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
10	Integration time	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Probe positioner mech. restrictions	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

Test sample related									
16	Device positioning	3.8	N	1	1	1	3.8	3.8	99
17	Device holder	5.1	N	1	1	1	5.1	5.1	5
18	Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
20	Liquid conductivity (target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
21	Liquid conductivity (meas)	2.5	N	1	0.64	0.43	1.6	1.2	∞
22	Liquid Permittivity (target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.5	∞
23	Liquid Permittivity (meas)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			11.4%	11.3%	236
Expanded uncertainty(P=95%)		$U = k U_c$,k=2					22.8%	22.6%	

Appendix A. EUT Photos and Test Setup Photos



Left Head Touch



Right Head Touch



Left Head Tilt (15°)



Right Head Tilt (15°)



Body-worn Front Side (0mm)



Body-worn Rear Side (0mm)



Front Side (0mm)



Rear Side (0mm)



Left Side (0mm)



Right Side (0mm)



Top Side (0mm)



Bottom Side (0mm)

Appendix B. Plots of SAR System Check

System Performance Check at 835 MHz Head

Date: 12/28/2020

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d154

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f=835\text{MHz}$; $\sigma=0.95\text{ mho/m}$; $\epsilon_r=42.32$; $\rho=1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(9.71, 9.71, 9.71); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (61x61x1): Measurement grid: $dx=15.00\text{ mm}$, $dy=15.00\text{ mm}$

Maximum value of SAR (interpolated) = 2.82 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.523 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.068 W/kg

SAR(1 g) = 2.32 mW/g ; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.90 mW/g

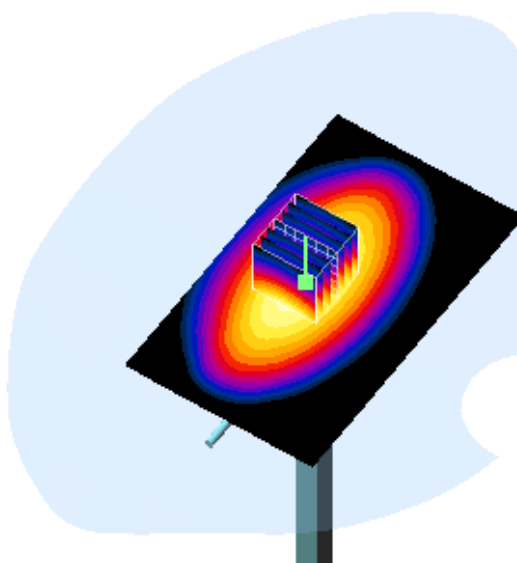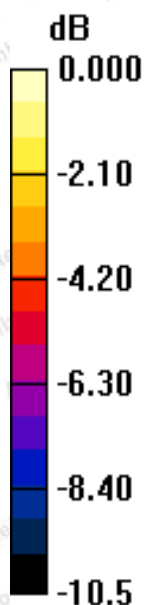

System Performance Check 835MHz Head 250mW

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

System Performance Check at 1900 MHz Head

Date: 12/29/2020

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d175



Communication System: CW; Frequency: 1900MHz; Duty Cycle: 1:1

Medium parameters used: $f=1900\text{MHz}$; $\sigma=1.35\text{ mho/m}$; $\epsilon_r=40.15$; $\rho=1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(8.13, 8.13, 8.13); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

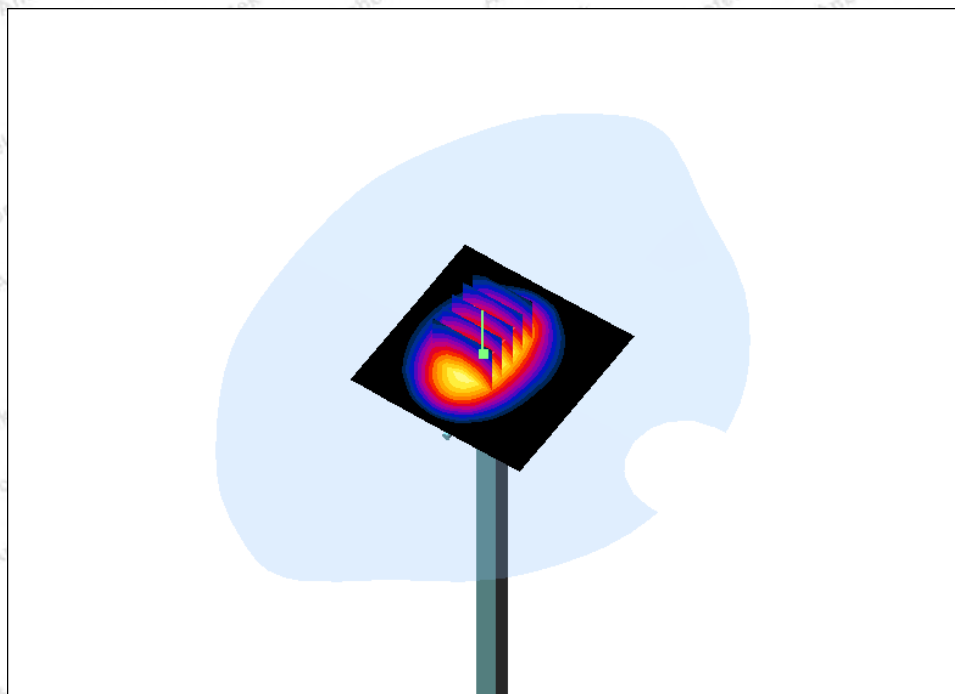Area Scan (61x61x1): Measurement grid: $dx=15.00\text{ mm}$, $dy=15.00\text{ mm}$ Maximum value of SAR (interpolated) = 11.3 mW/g **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 80.6 V/m ; Power Drift = -0.005 dB Peak SAR (extrapolated) = 17.5 W/kg **SAR(1 g) = 10.12mW/g ; SAR(10 g) = 5.28mW/g** Maximum value of SAR (measured) = 11.24 mW/g 

System Performance Check 1900MHz Head 250mW

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

System Performance Check at 2450 MHz Head

Date: 12/30/2020

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 910



Communication System: CW; Frequency: 2450MHz; Duty Cycle: 1:1

Medium parameters used: $f=2450\text{MHz}$; $\sigma=1.76\text{ mho/m}$; $\epsilon_r=38.93$; $\rho=1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.57, 7.57, 7.57); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

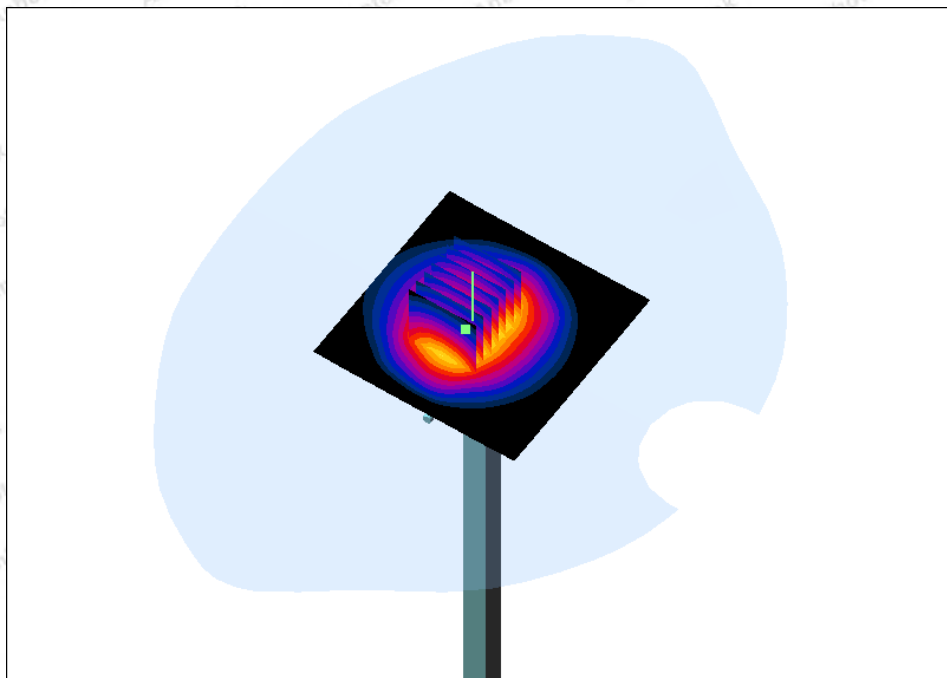Area Scan (61x61x1): Measurement grid: $dx=15.00\text{ mm}$, $dy=15.00\text{ mm}$ Maximum value of SAR (interpolated) = 16.7 mW/g **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 87.0 V/m ; Power Drift = 0.019 dB Peak SAR (extrapolated) = 30.7 W/kg **SAR(1 g) = 13.08mW/g ; SAR(10 g) = 6.24mW/g** Maximum value of SAR (measured) = 16.07mW/g 

System Performance Check 2450MHz Head 250mW

Shenzhen Anbotek Compliance Laboratory LimitedAddress: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community,
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

System Performance Check at 2600 MHz Head

Date: 12/30/2020

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1058



Communication System: CW; Frequency: 2600MHz; Duty Cycle: 1:1

Medium parameters used: $f=2600\text{MHz}$; $\sigma=1.89\text{ mho/m}$; $\epsilon_r=38.55$; $\rho=1000\text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.38, 7.38, 7.38); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

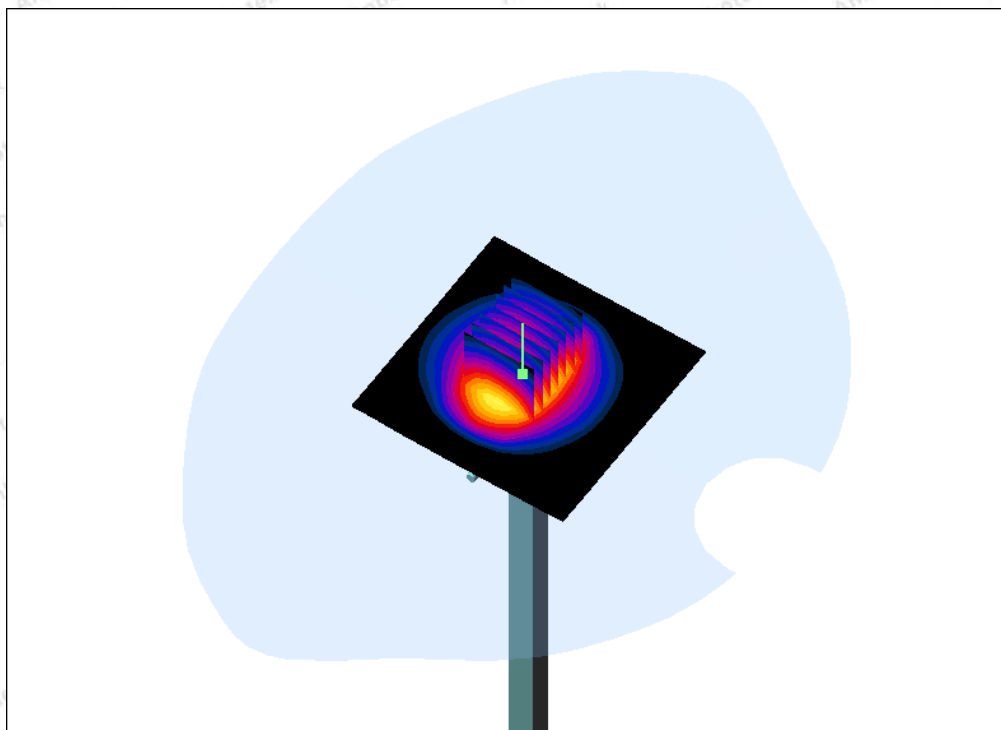Area Scan (61x61x1): Measurement grid: $dx=15.00\text{ mm}$, $dy=15.00\text{ mm}$ Maximum value of SAR (interpolated) = 21.1 mW/g **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 84.1 V/m ; Power Drift = 0.032 dB Peak SAR (extrapolated) = 30.2 W/kg **SAR(1 g) = 14.27mW/g ; SAR(10 g) = 6.50mW/g** Maximum value of SAR (measured) = 19.73mW/g 

System Performance Check 2600MHz Head 250mW

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Appendix C. Plots of SAR Test Data

SAR plots for the **highest measured SAR** in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

GSM850_GSM Voice

Communication System: Customer System; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.91$ S/m; $\epsilon_r=41.48$; $\rho=1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(9.71, 9.71, 9.71); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.537 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.245 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.470 W/kg

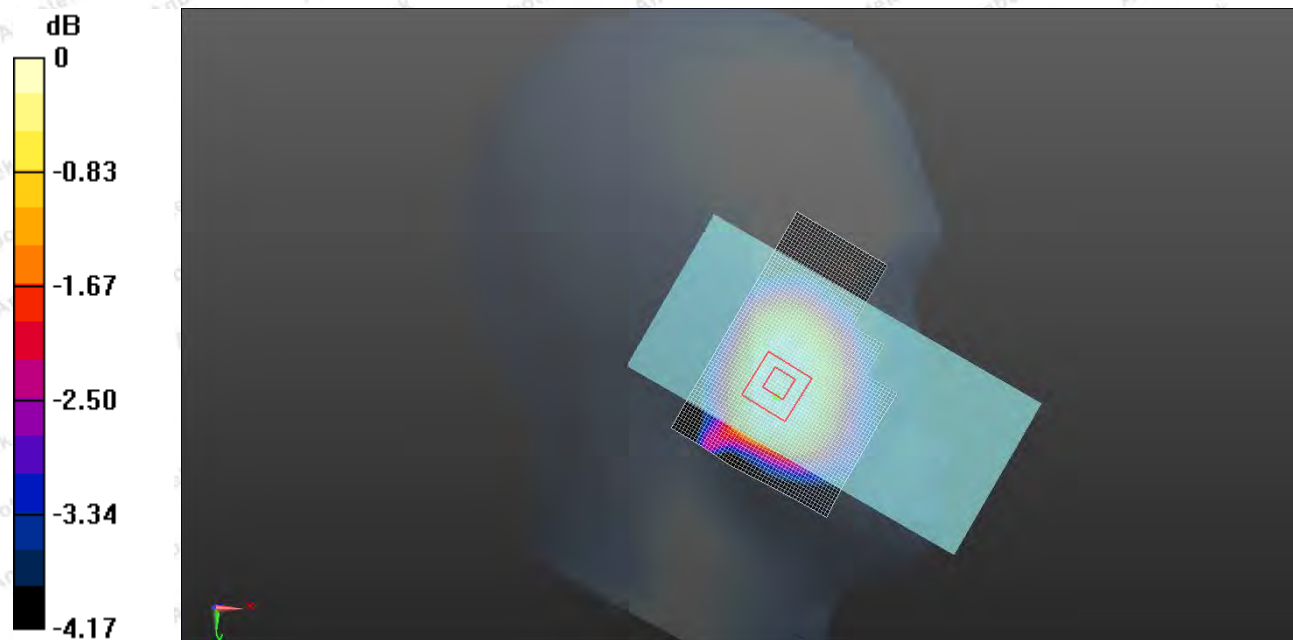

0 dB = 0.470 W/kg = -3.28 dBW/kg

Figure 1: GSM850_GSM Voice

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

GSM1900_GSM Voice_Left Cheek

Date: 12/29/2020

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.405$ mho/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(8.13, 8.13, 8.13); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.280 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.092 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

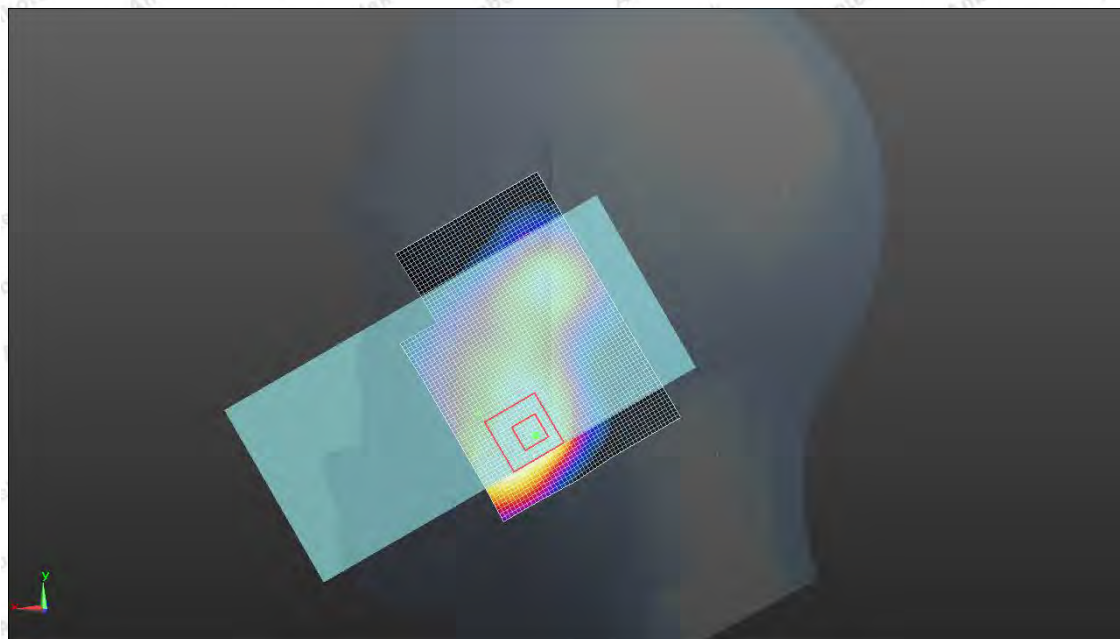

0 dB = 0.221 W/kg = -6.56 dBW/kg

Figure 2: GSM1900_GSM Voice_Left Cheek

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WCDMA Band II_RCM_Left Check

Date: 12/29/2020

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(8.13, 8.13, 8.13); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.510 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.726 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.364 W/kg

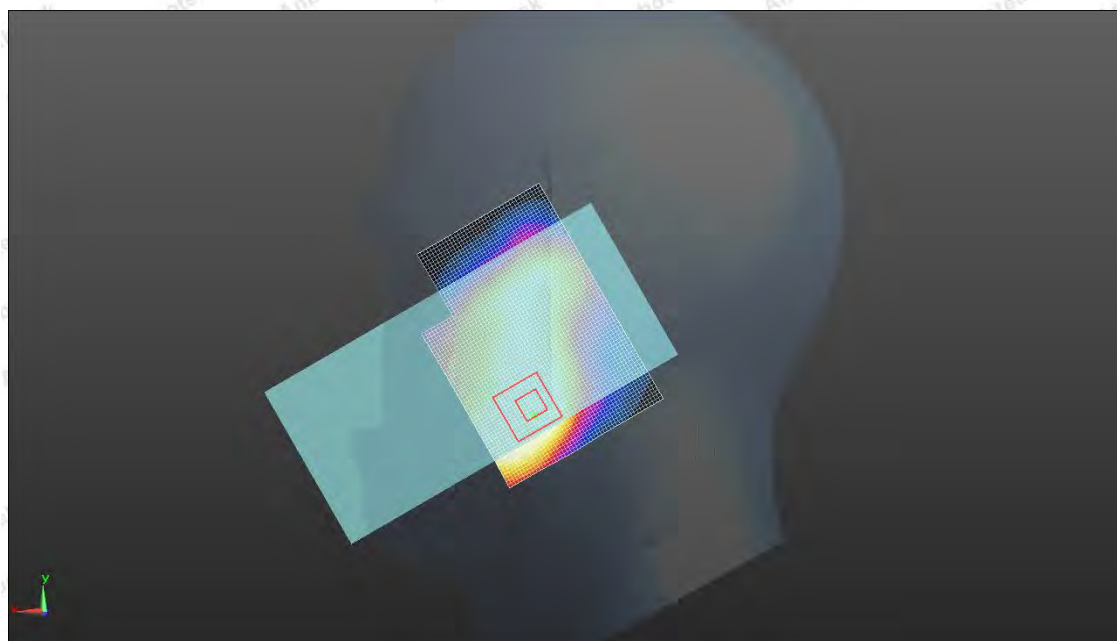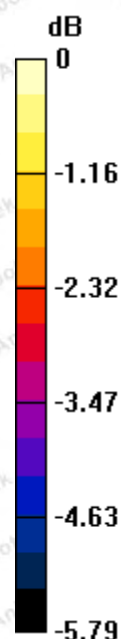

0 dB = 0.364 W/kg = -4.39 dBW/kg

Figure 3: WCDMA Band II_RCM_Left Check

WCDMA Band V

Date: 12/28/2020

Communication System: W850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.898$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(9.71, 9.71, 9.71); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.357 W/kg



Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.683 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.367 W/kg

SAR(1 g) = 0.278 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.351 W/kg

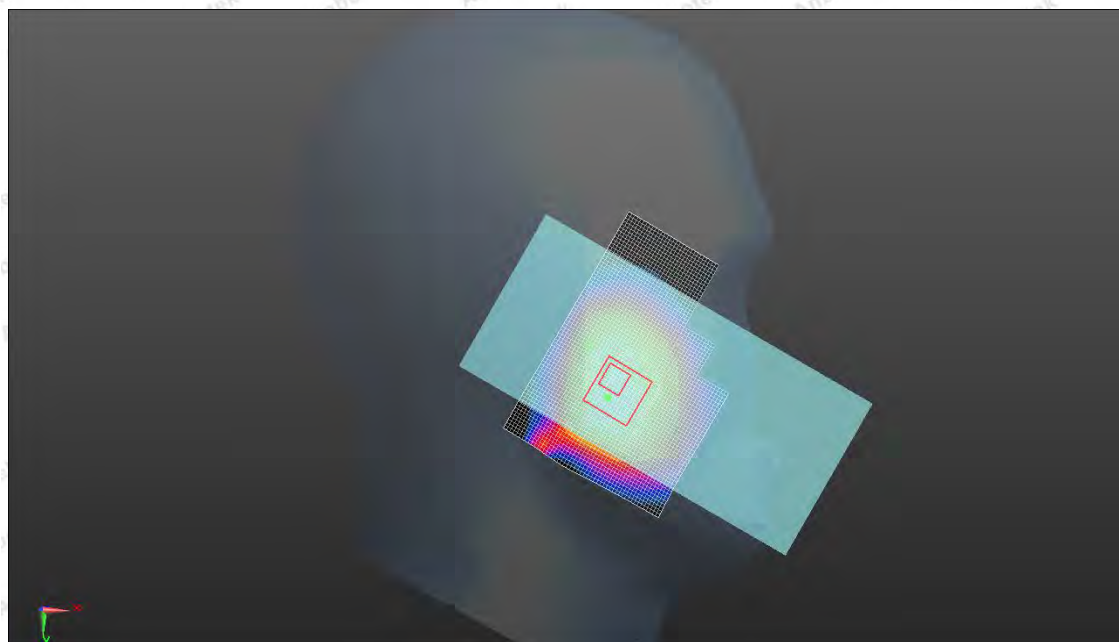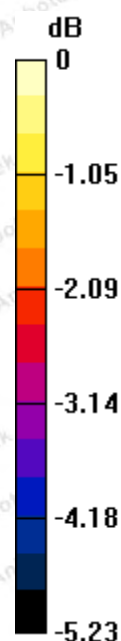

0 dB = 0.351 W/kg = -4.55 dBW/kg

Figure 4: WCDMA Band V

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 2_QPSK_Left Check

Date: 12/29/2020

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1880.0$ MHz; $\sigma=1.41$ mho/m; $\epsilon=40.01$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(8.13, 8.13, 8.13); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.473 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.696 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.384 W/kg

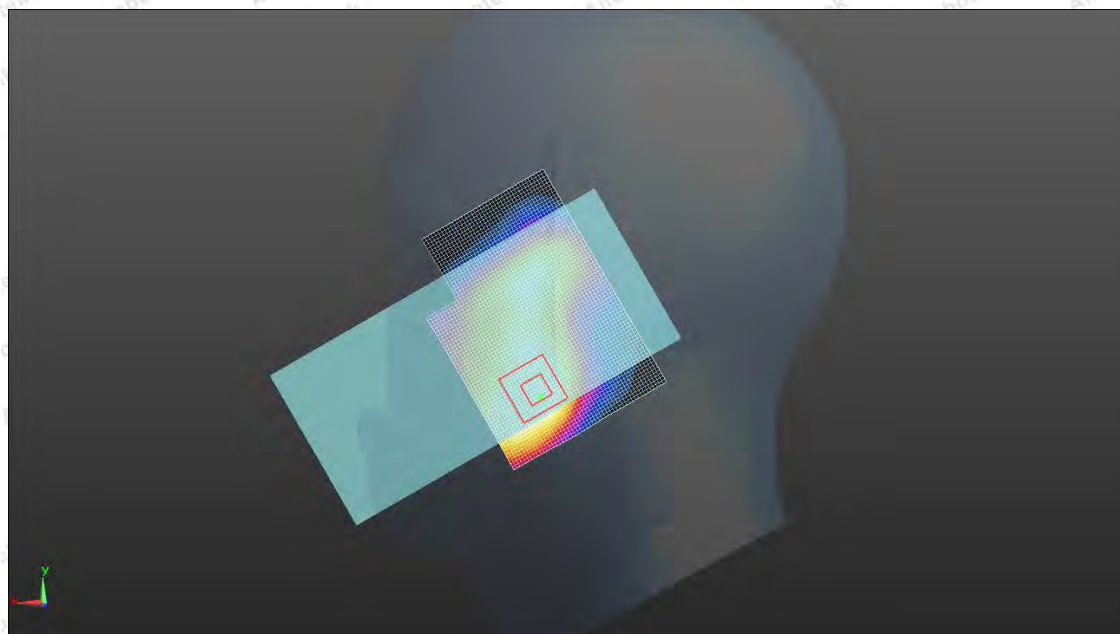

0 dB = 0.384 W/kg = -4.16 dBW/kg

Figure 5: LTE Band 2_QPSK_Left Check

LTE Band 5_QPSK

Date: 12/28/2020

Communication System: Customer System; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=836.5$ MHz; $\sigma=1.91$ mho/m; $\epsilon_r=41.48$; $\rho=1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4-7396; ConvF(9.71, 9.71, 9.71); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.297 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.329 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

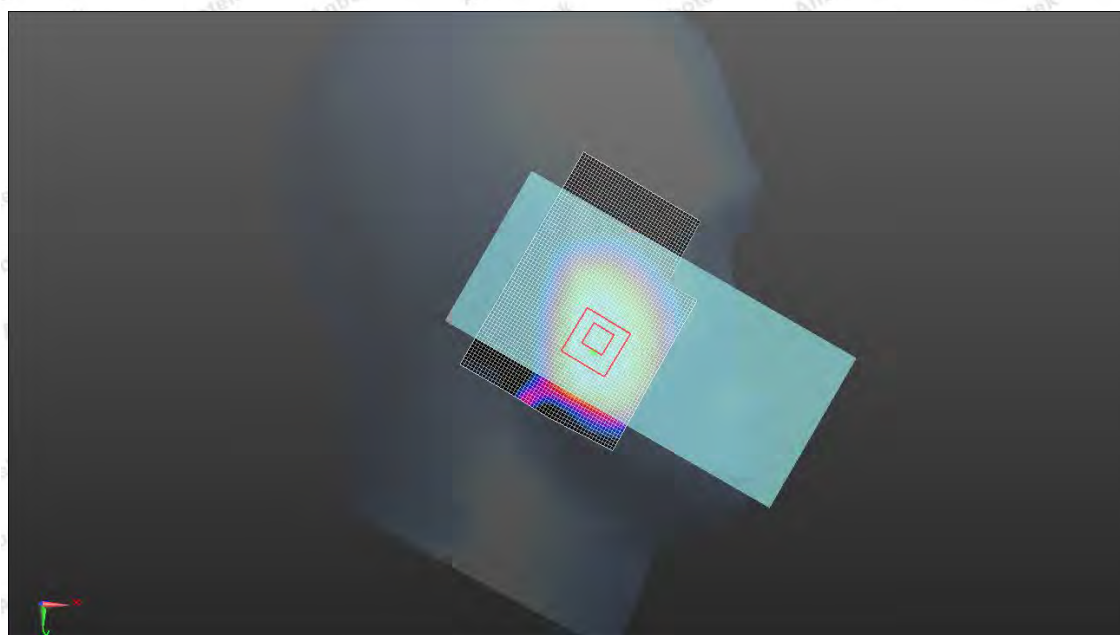

0 dB = 0.261 W/kg = -5.83 dBW/kg

Figure 6: LTE Band 5_QPSK _ Left Check

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

LTE Band 7_QPSK

Date: 12/30/2020

Communication System: Customer System; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=2535$ MHz; $\sigma=1.77$ S/m; $\epsilon_r=39.37$; $\rho=1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.38, 7.38, 7.38); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.117 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.205 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

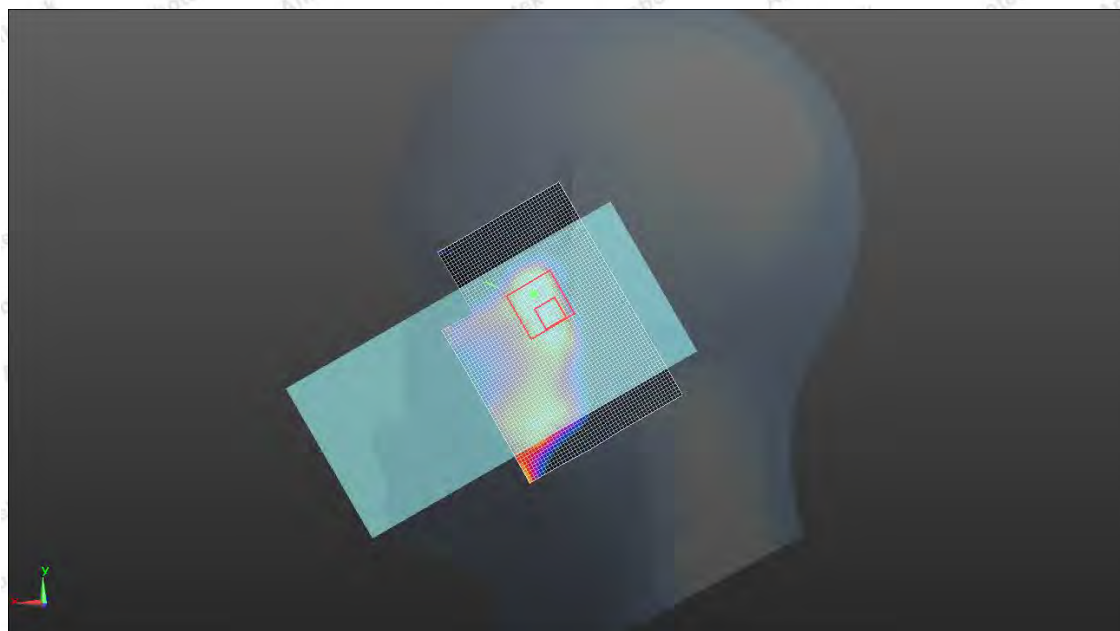

0 dB = 0.113 W/kg = -9.47 dBW/kg

Figure 7: LTE Band 7_QPSK

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WLAN2.4G_Right Check

Date: 12/30/2020

Communication System: 802.11; Frequency: 2472 MHz;

Medium parameters used: $f = 2472$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section:

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.57, 7.57, 7.57); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.511 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.710 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.468 W/kg

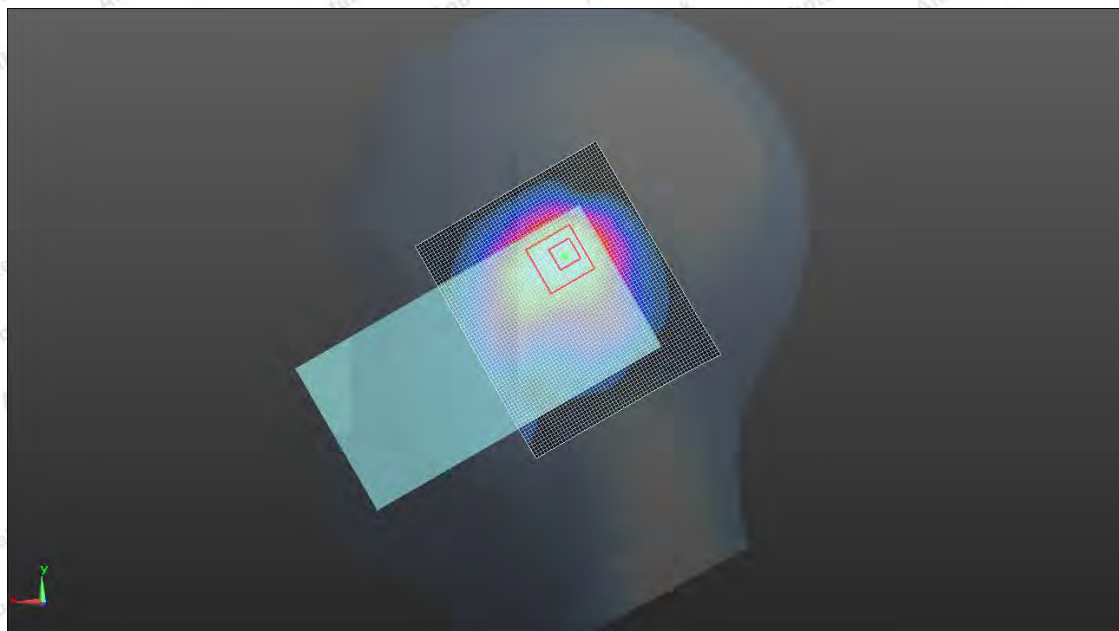
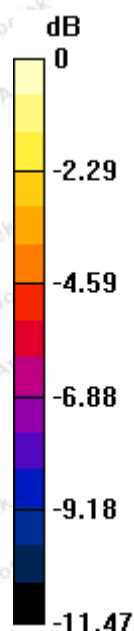


Figure 8: WLAN

GSM850

Date: 12/28/2020

Communication System: GSM 850; Frequency: 836.6 MHz;

Medium parameters used (interpolated): $f=836.6$ MHz; $\sigma=0.965$ mho/m; $\epsilon_r=55.94$; $\rho=1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(9.88, 9.88, 9.88); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.617 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.208 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.275 W/kg

Maximum value of SAR (measured) = 0.518 W/kg

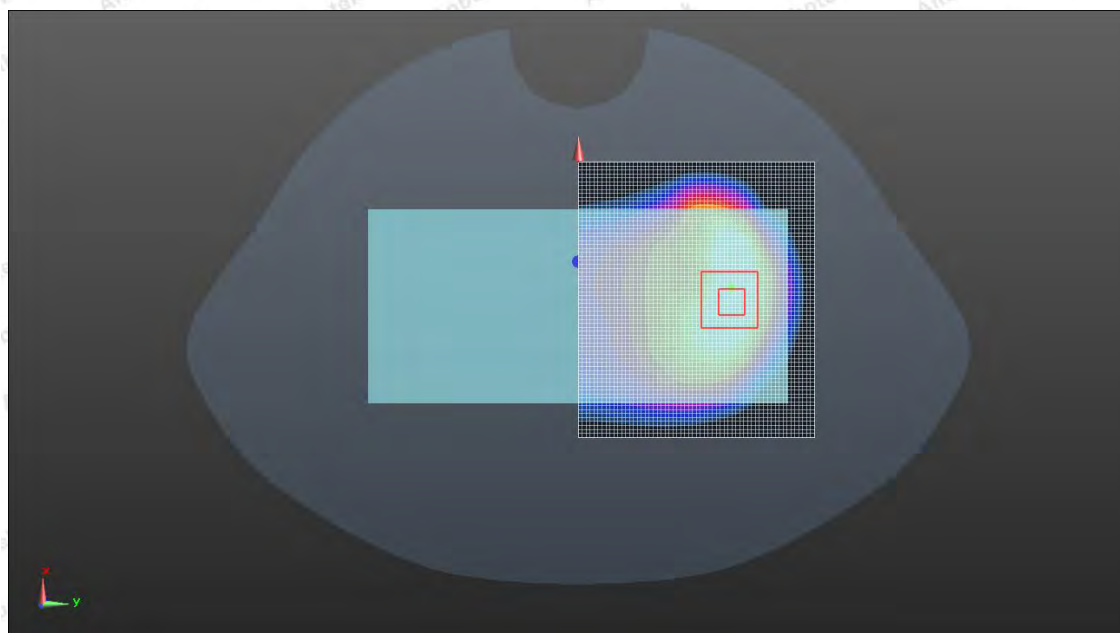



Figure 9: GSM850

GSM1900

Date: 12/29/2020

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.558$ mho/m; $\epsilon_r = 52.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.97, 7.97, 7.97); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.48 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.76 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 0.997 W/kg

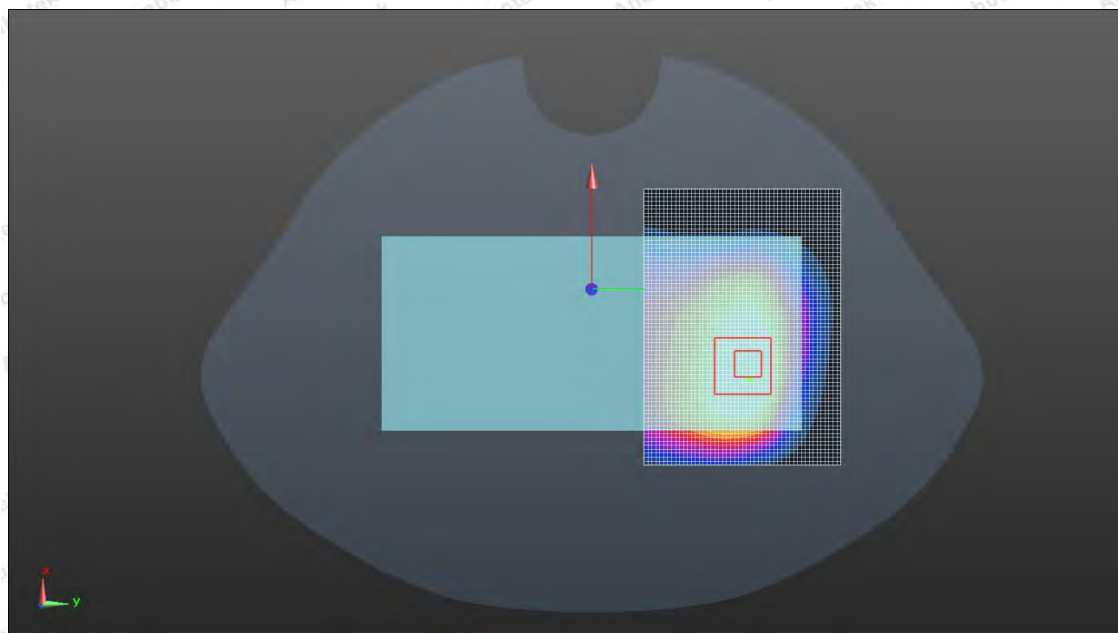

0 dB = 0.997 W/kg = -0.01 dBW/kg

Figure 10: GSM1900

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

WCDMA Band II_RCM

Date: 12/29/2020

Communication System: W1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.97, 7.97, 7.97); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.68 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.78 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.757 W/kg

Maximum value of SAR (measured) = 1.57 W/kg

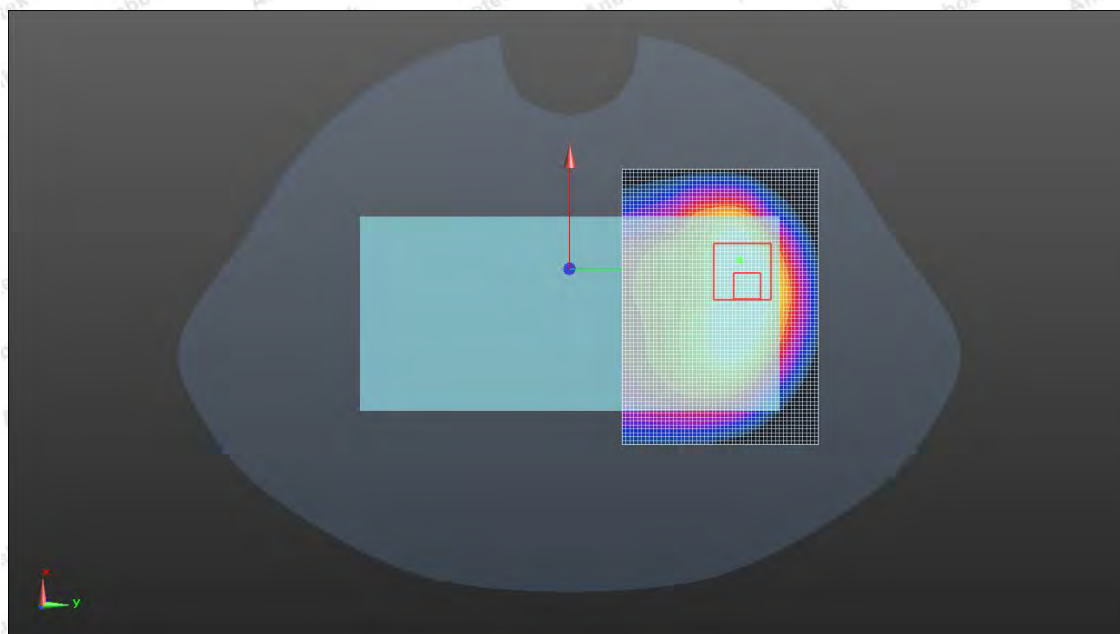
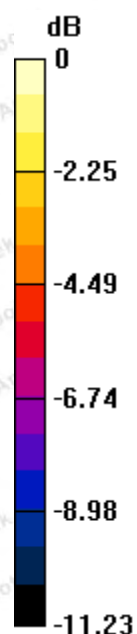


Figure 11: WCDMA Band II_RCM

WCDMA Band V_RCM

Date: 12/28/2020

Communication System: W850; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(9.88, 9.88, 9.88); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.30 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.36 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.557 W/kg

Maximum value of SAR (measured) = 0.941 W/kg

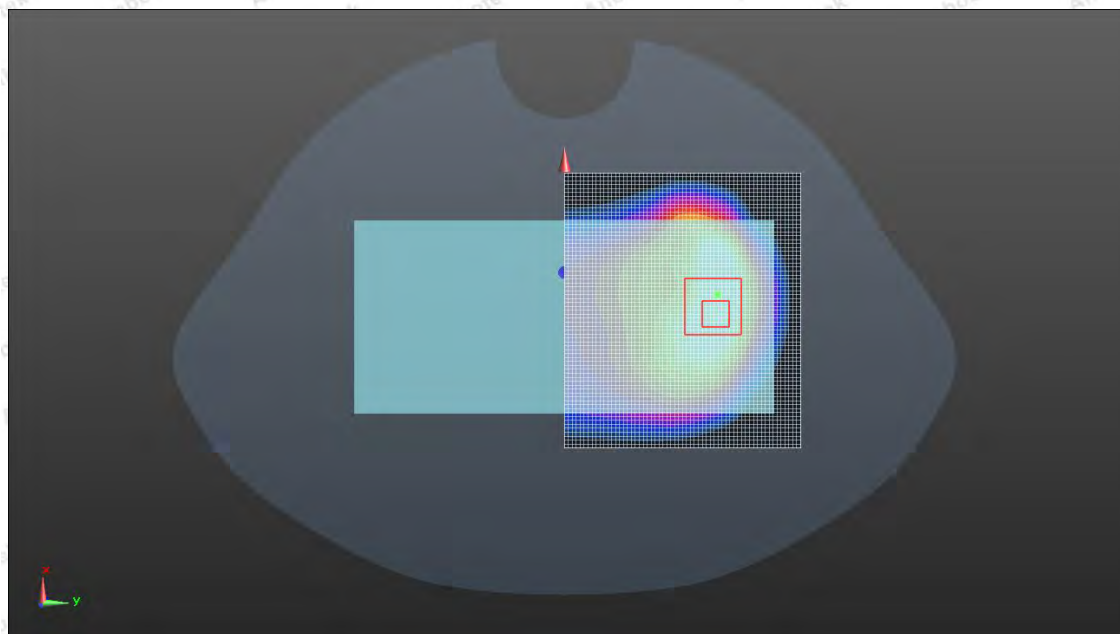

0 dB = 0.941 W/kg = -0.26 dBW/kg

Figure 12: WCDMA Band V_RCM_Rear side_0mm

LTE Band 2_QPSK

Date: 12/29/2020

Communication System: Customer System; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=1880.0$ MHz; $\sigma=1.41$ mho/m; $\epsilon=40.01$; $\rho=1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.97, 7.97, 7.97); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.76 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.971 W/kg; SAR(10 g) = 0.578 W/kg

Maximum value of SAR (measured) = 0.990 W/kg

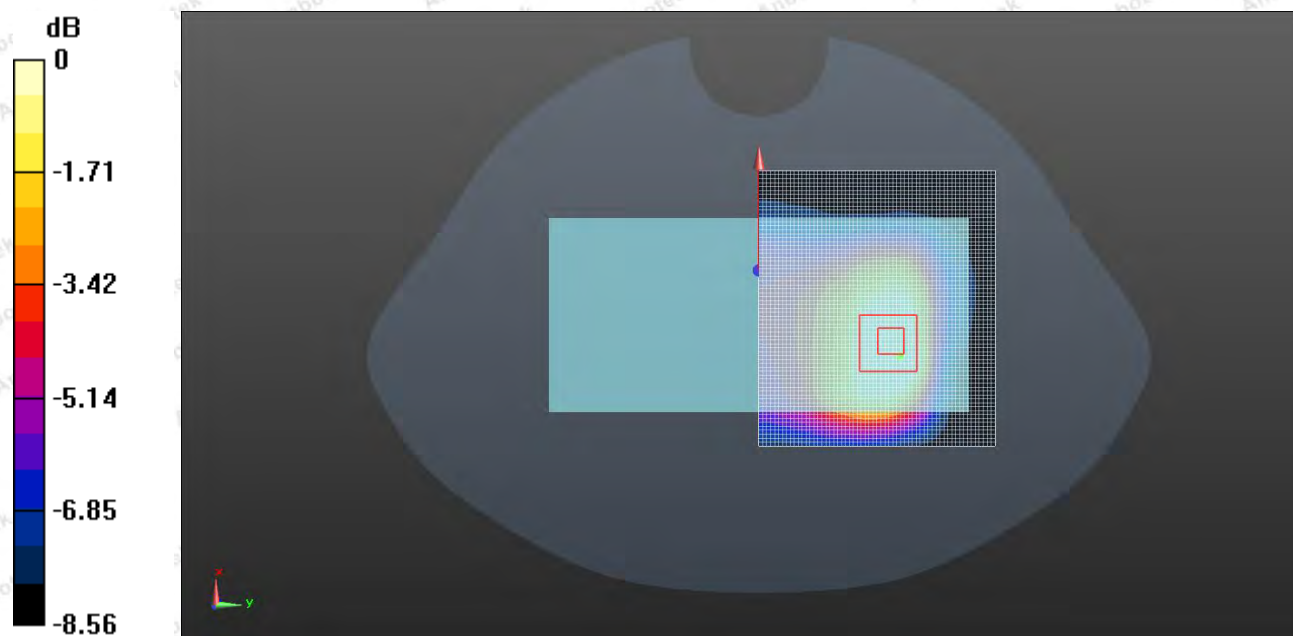

0 dB = 0.790 W/kg = -1.02 dBW/kg

Figure 13: LTE Band 2_QPSK

Date: 12/28/2020

Communication System: Customer System; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=836.5$ MHz; $\sigma=1.91$ mho/m; $\epsilon_r=41.48$; $\rho=1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(9.88, 9.88, 9.88); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.918 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.343 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 0.605 W/kg

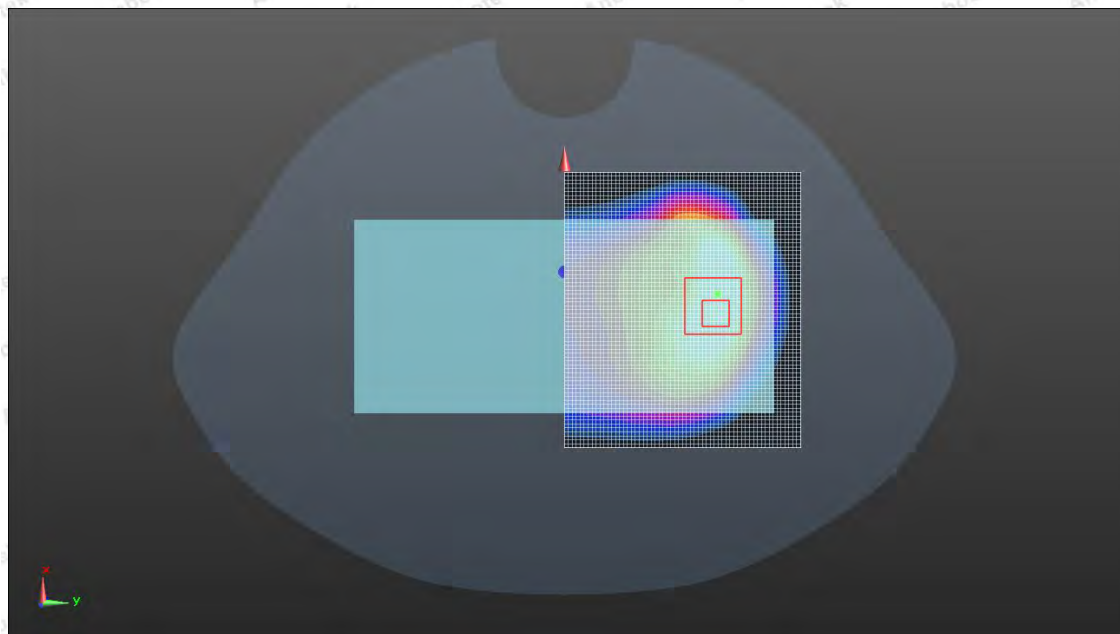



Figure 14: LTE Band 5_QPSK _Rear side

LTE Band 7_QPSK

Date: 12/30/2020

Communication System: Customer System; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f=2535$ MHz; $\sigma=1.77$ S/m; $\epsilon_r=39.37$; $\rho=1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.38, 7.38, 7.38); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.97 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 0.790 W/kg

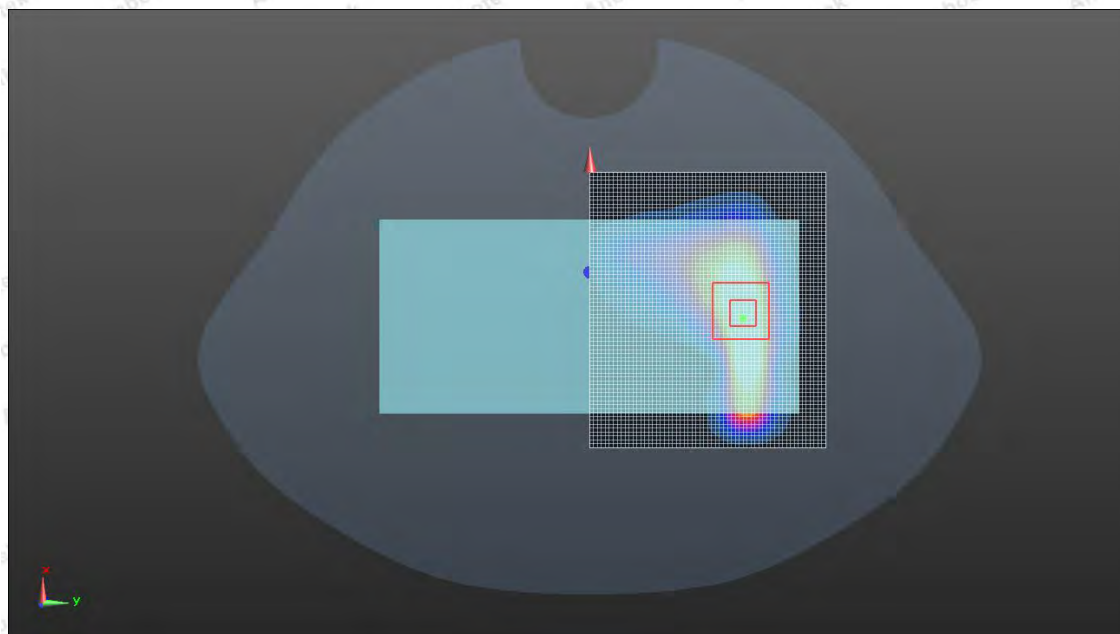



Figure 15: LTE Band 7_QPSK _ Rear side

WLAN2.4G_Rear side

Date: 12/30/2020

Communication System: 802.11; Frequency: 2472 MHz;

Medium parameters used: $f = 2472$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 37.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 -7396; ConvF(7.53, 7.53, 7.53); Calibrated: 5/6/2020;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 387; Calibrated: 9/6/2020
- Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.284 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.042 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.491 mW/g

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (measured) = 0.288 W/kg



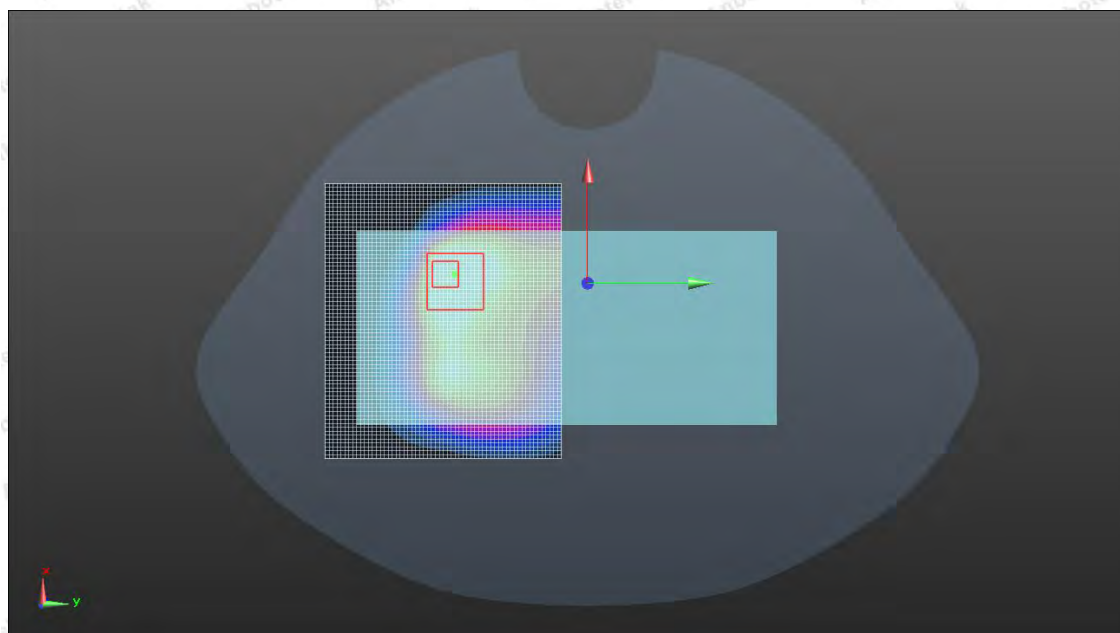


Figure 16: WLAN 2.4G_Rear side_0mm

Appendix D. DASY System Calibration Certificate


In Collaboration with




中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Client **Anbotek (Auden)** Certificate No: **Z20-68716**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7396**

Calibration Procedure(s) **FF-Z11-007-03**
Calibration Procedures for Dosimetric E-field Probes




Calibration date: **May06, 2020**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.

Calibration Equipment used (M&T critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	20-Jun-19 (CTTL, No.J18X07447)	Jun-20
Power sensor NRP-Z91	101547	20-Jun-19 (CTTL, No.J18X07447)	Jun-20
Power sensor NRP-Z91	101548	20-Jun-19 (CTTL, No.J18X07447)	Jun-20
Reference10dBAttenuator	18N50W-10dB	13-Mar-20(CTTL, No.J19X01547)	Mar-21
Reference20dBAttenuator	18N50W-20dB	13-Mar-20(CTTL, No.J19X01548)	Mar-21
Reference Probe EX3DV4	SN 7433	26-Sep-19(SPEAG, No.EX3-7433_Sep18)	Sep-20
DAE4	SN 549	13-Dec-19(SPEAG, No.DAE4-549_Dec18)	Dec -20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGeneratorMG3700A	6201052605	27-Jun-19 (CTTL, No.J18X04776)	Jun-20
Network Analyzer E5071C	MY46110673	13-Jan-20 (CTTL, No.J19X00285)	Jan -21

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: May07, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
 CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2218

Fax: +86-10-62304633-2209

E-mail: ttl@chinattl.com

Http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), $\theta=0$ is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}:** Assessed for E-field polarization $\theta=0$ (fs900MHz in TEM-cell; f>1800MHz: waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for fs800MHz) and inside waveguide using analytical field distributions based on power measurements for f>800MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty valued are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).





In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyun Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ttl@chinatl.com [Http://www.chinatl.cn](http://www.chinatl.cn)

Probe EX3DV4

SN: 7396

Calibrated: May 06, 2020

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: Z20-68716

Page 3 of 11





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ttl@chinattl.com Http://www.chinattl.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7396

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.54	0.53	0.50	$\pm 10.0\%$
DCP(mV) ^B	97.8	104.5	102.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	199.9	$\pm 2.4\%$
		Y	0.0	0.0	1.0		203.3	
		Z	0.0	0.0	1.0		195.0	

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 5 and Page 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



In Collaboration with

s p e a g
 CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2218

Fax: +86-10-62304633-2209

E-mail: ttl@chinattl.com

Http://www.chinattl.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7396

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unct. (k=2)
750	41.9	0.89	9.82	9.82	9.82	0.30	0.85	± 12.1%
835	41.5	0.90	9.71	9.71	9.71	0.15	1.36	± 12.1%
900	41.5	0.97	9.87	9.87	9.87	0.16	1.37	± 12.1%
1750	40.1	1.37	8.61	8.61	8.61	0.25	1.04	± 12.1%
1900	40.0	1.40	8.13	8.13	8.13	0.24	1.01	± 12.1%
2100	39.8	1.49	8.14	8.14	8.14	0.24	1.04	± 12.1%
2300	39.5	1.67	7.85	7.85	7.85	0.40	0.75	± 12.1%
2450	39.2	1.80	7.57	7.57	7.57	0.50	0.75	± 12.1%
2600	39.0	1.96	7.38	7.38	7.38	0.64	0.68	± 12.1%
5250	35.9	4.71	5.33	5.33	5.33	0.45	1.30	± 13.3%
5600	35.5	5.07	4.89	4.89	4.89	0.45	1.35	± 13.3%
5750	35.4	5.22	4.92	4.92	4.92	0.45	1.45	± 13.3%

^c Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.





In Collaboration with

s p e a g
 CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2218

Fax: +86-10-62304633-2209

E-mail: ttl@chinattl.com

Http://www.chinattl.cn

DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7396

Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	55.5	0.96	10.09	10.09	10.09	0.30	0.90	±12.1%
835	55.2	0.97	9.88	9.88	9.88	0.19	1.32	±12.1%
900	55.0	1.05	9.82	9.82	9.82	0.23	1.15	±12.1%
1750	53.4	1.49	8.24	8.24	8.24	0.24	1.06	±12.1%
1900	53.3	1.52	7.97	7.97	7.97	0.19	1.24	±12.1%
2100	53.2	1.62	8.18	8.18	8.18	0.19	1.39	±12.1%
2300	52.9	1.81	7.88	7.88	7.88	0.55	0.80	±12.1%
2450	52.7	1.95	7.53	7.53	7.53	0.46	0.89	±12.1%
2600	52.5	2.16	7.38	7.38	7.38	0.52	0.80	±12.1%
5250	48.9	5.36	4.93	4.93	4.93	0.45	1.80	±13.3%
5600	48.5	5.77	4.19	4.19	4.19	0.48	1.90	±13.3%
5750	48.3	5.94	4.52	4.52	4.52	0.48	1.95	±13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ttl@chinatll.com [Http://www.chinatll.cn](http://www.chinatll.cn)

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

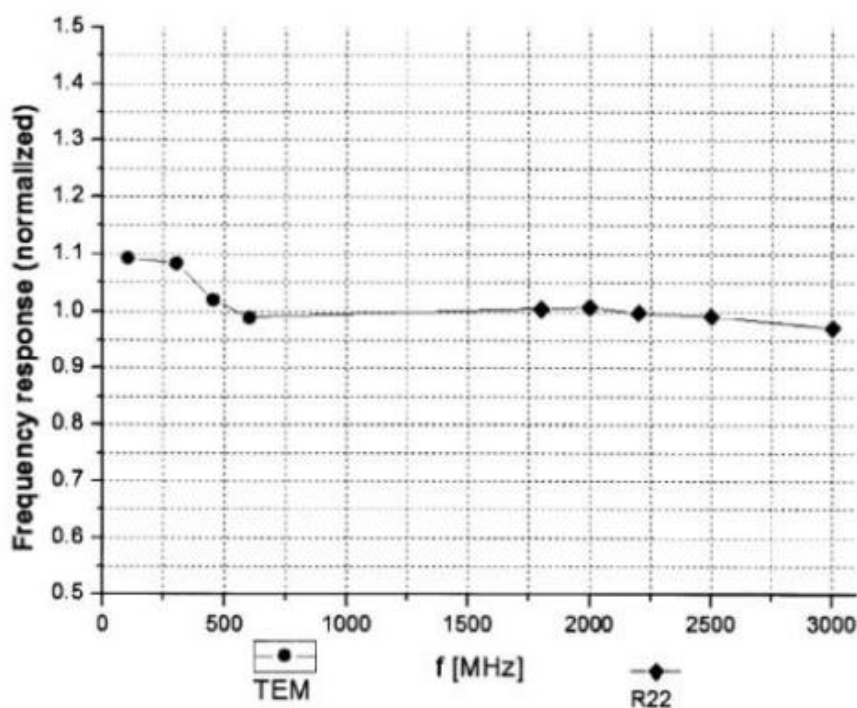


Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cml@chinattl.com Http://www.chinattl.cn

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

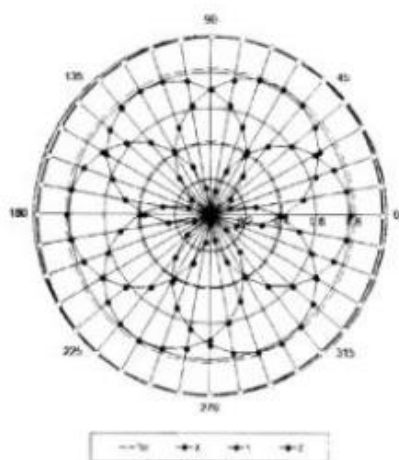



f=1800 MHz, R22

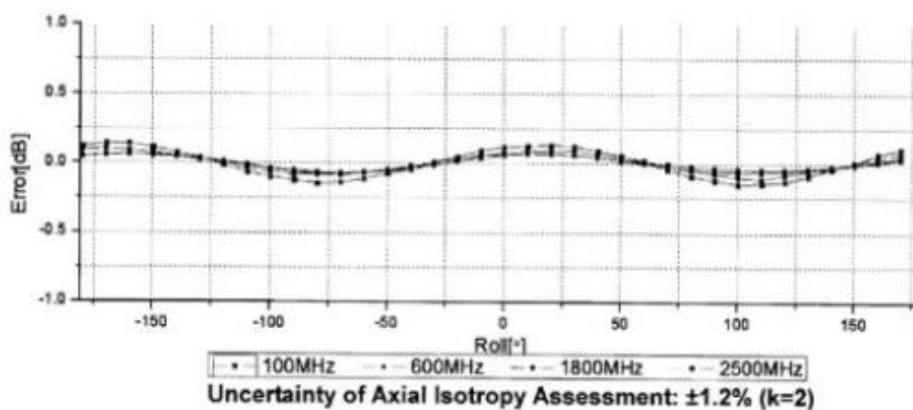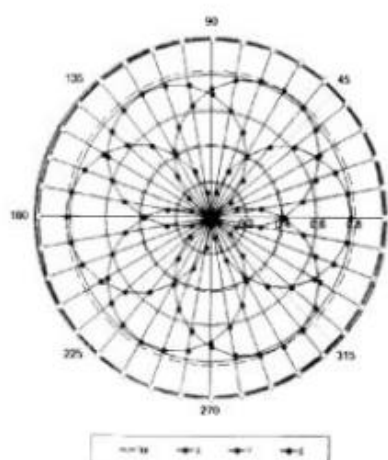



Add: No. 51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn


Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f = 900 \text{ MHz}$)

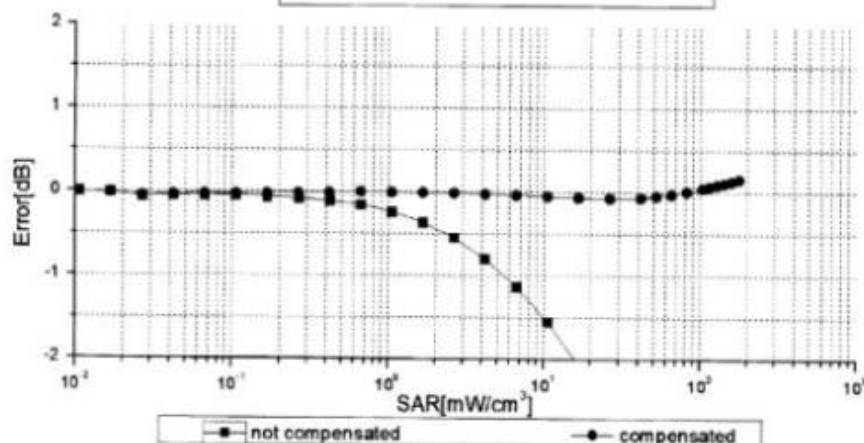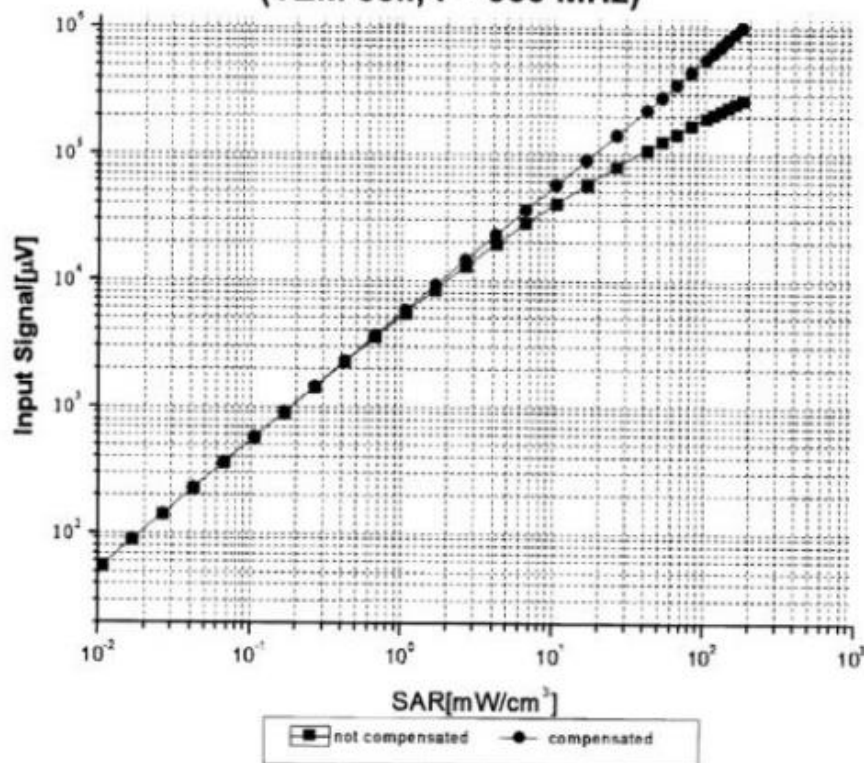

Uncertainty of Linearity Assessment: $\pm 0.9\%$ ($k=2$)

Certificate No: Z20-68716

Page 9 of 11





Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: ttl@chinattl.com Http://www.chinattl.cn


Conversion Factor Assessment

f=900 MHz, WGLS R9(H_convF)

f=1750 MHz, WGLS R22(H_convF)

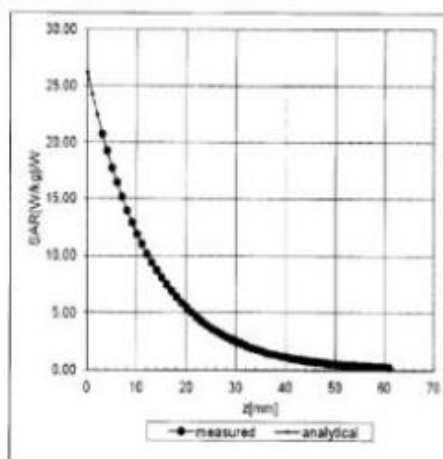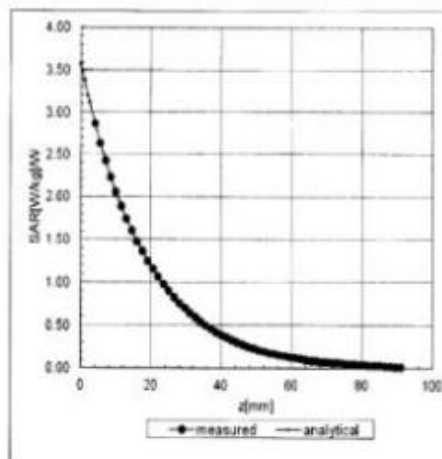

Deviation from Isotropy in Liquid

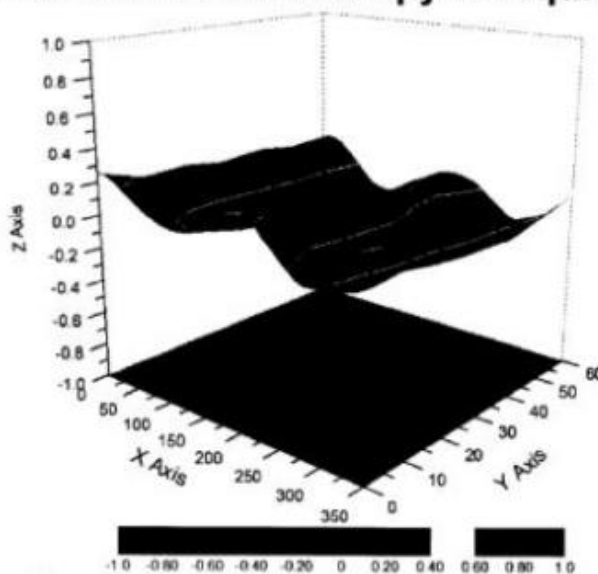

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\%$ (K=2)



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No. 51 Xueyuan Road, Haidian District, Beijing, 100191, China

Tel: +86-10-62304633-2218

Fax: +86-10-62304633-2209

E-mail: ettl@chinattl.com[Http://www.chinattl.cn](http://www.chinattl.cn)**DASY/EASY – Parameters of Probe: EX3DV4 – SN: 7396****Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	156.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland

Phone +41 44 245 9700, Fax +41 44 245 9779

info@speag.com, http://www.speag.com

IMPORTANT NOTICE

USAGE OF THE DAE 4

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE4 unit is closed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

Schmid & Partner Engineering

TN_BR040315AD DAE4.doc

11.12.2009

Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F, Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86)755-26066440 Fax: (86)755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 0108

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **Anbotek (Auden)**

Certificate No: **DAE4-387_Sep10**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BM - SN: 387**

Calibration procedure(s) **QA CAL-06.v29**
Calibration procedure for the data acquisition electronics (DAE)

Calibration date: **September 06, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	15-Aug-20 (No:21092)	Aug-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Auto DAE Calibration Unit	SE UWS 053 AA 1001	05-Jan-20 (in house check)	In house check: Jan-21
Calibrator Box V2.1	SE UMS 006 AA 1002	05-Jan-20 (in house check)	In house check: Jan-21

Calibrated by:	Name Dominique Steffen	Function Laboratory Technician	Signature
Approved by:	Sven Kühn	Deputy Manager	

Issued: September 06, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.



DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.489 $\pm$ 0.02% (k=2)	404.852 $\pm$ 0.02% (k=2)	404.862 $\pm$ 0.02% (k=2)
Low Range	3.97827 $\pm$ 1.50% (k=2)	3.95875 $\pm$ 1.50% (k=2)	3.97982 $\pm$ 1.50% (k=2)

Connector Angle

Connector Angle to be used in DASY system	53.0 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	------------------------------------

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	200032.85	-3.31	-0.00
Channel X + Input	20007.64	1.88	0.01
Channel X - Input	-20003.48	1.18	-0.01
Channel Y + Input	200034.23	-1.43	-0.00
Channel Y + Input	20006.60	0.91	0.00
Channel Y - Input	-20004.04	0.72	-0.00
Channel Z + Input	200035.38	-0.83	-0.00
Channel Z + Input	20003.69	-2.11	-0.01
Channel Z - Input	-20006.38	-1.59	0.01

Low Range	Reading (μV)	Difference (μV)	Error (%)
Channel X + Input	2001.63	0.08	0.00
Channel X + Input	202.29	0.70	0.35
Channel X - Input	-197.90	0.60	-0.30
Channel Y + Input	2001.33	-0.07	-0.00
Channel Y + Input	200.86	-0.60	-0.30
Channel Y - Input	-199.87	-1.23	0.62
Channel Z + Input	2001.61	0.27	0.01
Channel Z + Input	200.60	-0.70	-0.35
Channel Z - Input	-199.51	-0.85	0.43

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	13.50	11.56
	- 200	-8.64	-11.18
Channel Y	200	-0.81	-1.28
	- 200	1.05	0.09
Channel Z	200	7.17	6.91
	- 200	-9.46	-9.01

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	-1.70	0.33
Channel Y	200	10.70	-	-0.38
Channel Z	200	7.11	7.89	-