


C:70, M:0, Y:39, K:0

C:50, M:0, Y:25, K:0

## Smart USB Outlet

### USER MANUAL

**01 | PRODUCT OUTLINE**

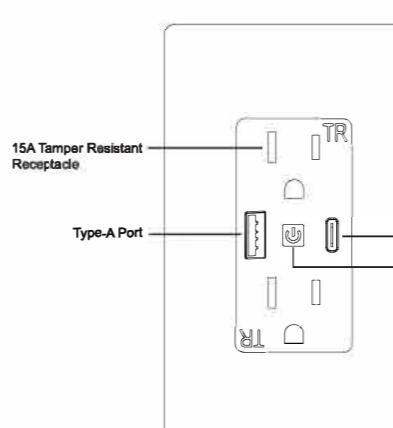

**02 | INDICATOR LIGHT STATUS**

| Light Type            | Light Color | Light Status  | Outlet Status                        |
|-----------------------|-------------|---------------|--------------------------------------|
| Power Indicator Light | White       | OFF           | Power OFF                            |
| Wi-Fi Indicator Light | Orange      | Blink quickly | Ready for default configuration mode |

**03 | MANUAL OPERATION OF THE WALL OUTLET**

**Pairing Setup**

- Press and hold the ON/OFF switch for 5s until the Wi-Fi indicator light blinks orange quickly to initiate default configuration; press and hold the switch for 5s again until the Wi-Fi indicator light blinks orange slowly to initiate AP configuration.

**04 | SAFETY INFORMATION**

**WARNINGS AND CAUTIONS**

- TO AVOID FIRE, SHOCK, OR DEATH: TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!**

To be installed by a licensed electrician in accordance with appropriate electrical codes and regulations. If you are not sure about any part of these instructions, consult an electrician. This device **CANNOT** be used for separate feed applications. If the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers, you cannot use this device. Use this device with copper or copper clad wire only.

**05 | INSTALLATION**

**Tools You'll Need**


- Screwdriver
- Pliers
- Electrical tester

**Caution**

- Make sure that the power at the circuit breaker is off before wiring.
- Neutral Wire is required. Confirm the wall box contains a Neutral Wire (typically white).
- The wire colors indicated in this manual are the usual colors and may differ in some homes.
- Ensure the wire conductors are securely fastened to each wire. Turn off the circuit breaker and test the power going to the switch is off before wiring.
- This device is to be installed in a wall box measuring at least 3" x 2" x 2-1/2" (standard single gang electrical wall box) and wired in accordance with NEC article 314 box fill requirements.

**STEP 1**

Turn OFF the circuit breaker and test the power going to the outlet is off before wiring.



**STEP 2**


Remove the existing wall plate, turn on the power at the circuit breaker and use an electrical tester to check which wire is live wire; the tester will flash and/or chirp when it comes close to a live wire.

**STEP 3**

Turn off the power at the circuit breaker and use the electric tester to test if the power is off, and then pull the existing switch out; label the Live Wire and other wires; disconnect the wires from the existing outlet with pliers.

**STEP 4**

Follow the wiring diagram to connect the wires of the outlet to the wires in the wall box using the wire conductors.

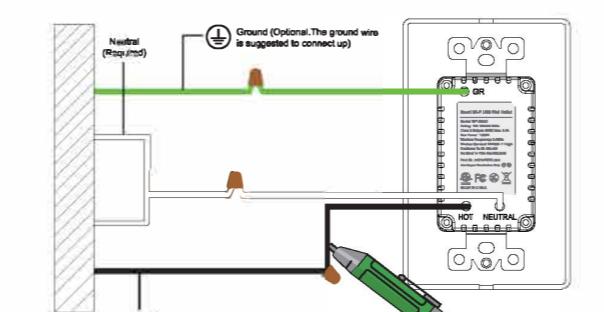

**STEP 5**

Mount the outlet with screws and snap the wall plate on it.

**STEP 6**

Turn on the power at the circuit breaker and outlet on.

**06 | ADD DEVICES**

**1. Download Smart Life APP**



**2. Registration or Log In**


**3. Configure the APP to the Outlet**

**3.1 Default Configuration Mode**

- Press and hold the manual switch for 5 seconds until the orange indicator light blinks quickly (2 times per second).
- Tap "Confirm indicator rapidly blink"; enter WiFi Password; wait for completing the connection.
- Devices have added successfully.


**3.2 AP Mode**

- If you cannot configure successfully with the default mode, please try to connect with AP Mode.
- Tap "AP Mode" on the top right corner.
- Press and hold the manual outlet for 5 seconds, you can see the red indicator light blinks quickly. Then press and hold for 5s again until the indicator light blinks slowly (once every 3 seconds).
- Tap "Confirm indicator slowly blink"

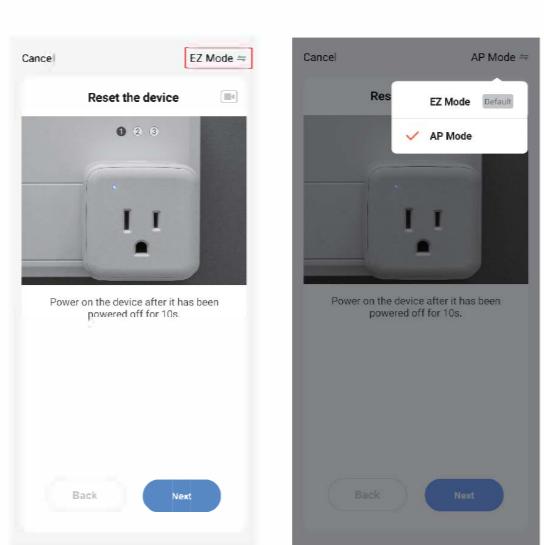

**07 | Link "Smart Life" to Alexa / Google Assistant**

Go to Smart Life > > More for instructions to link Alexa/Google Assistant. Note: Please log in with your Smart Life account.

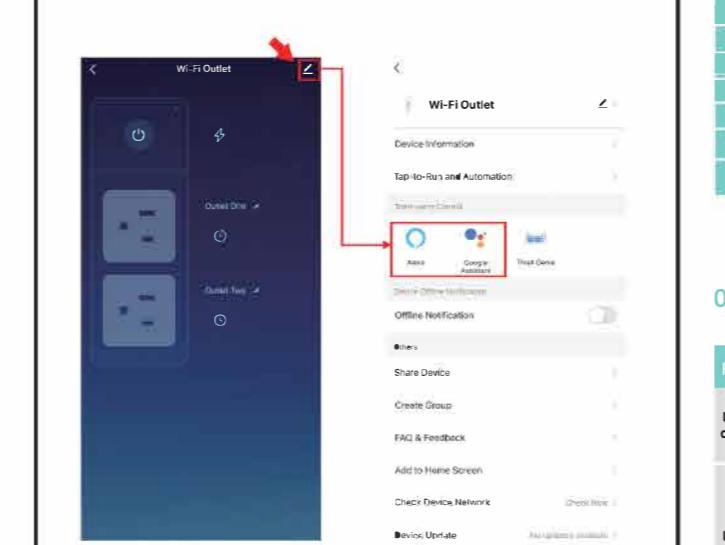

**08 | SPECIFICATION**

| Model              | WF15230C                                   |
|--------------------|--|
| Receptacle Rating  | 15Amp/125VAC                               |
| Input Voltage      | 100-125VAC 50/60 Hz                        |
| Maximum Loads      | 1675W                                      |
| USB Rating         | Total 3.1Amp, 5VDC                         |
| Tamper Resistant   | Yes  |
| Wireless Frequency | 2.4GHz Only                                |
| Wireless Standard  | IEEE802.11 b/g/n                           |
| Support System     | Android 4.1 and above or iOS 8.0 and above |
| Number of Poles    | 3(Hot, Neutral and Ground wire)            |

**09 | TROUBLESHOOTING GUIDE**

| Possible Problem                          | Possible Cause   | Solution  |
|---|--|---|
| Unable to connect outlet with the phone   | The outlet is not allowed for connection or the outlet has been connected.     | Press and hold the outlet for 5s, the outlet will initiate pairing. |
| Unable to turn the switch on/off manually | Incorrect wiring   | Make sure the outlet is wired correctly.                            |
| No electricity                            | Check the circuit breaker; make sure that the power is restored to the outlet. |   |
| The outlet won't respond to APP control   | Network delay or is disconnected   | Check your network connectivity.                                    |

**FCC Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and stores radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

**FCC RF Radiation Exposure Statement**

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

\*To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

**THANK YOU**

If you have any question, please feel free to contact us first. We are always here for you