



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15 C (15.225)

Report Reference No. : GTS20250603010-2-08

FCC ID. : 2AYD5-I25D02

Compiled by

(position+printed name+signature) .: File administrators Peter Xiao

Peter Xiao

Supervised by

(position+printed name+signature) .: Test Engineer Evan Ouyang

Evan Ouyang

Approved by

(position+printed name+signature) .: Manager Jason Hu

Jason Hu

Date of issue : Aug.8, 2025

Representative Laboratory Name.: Shenzhen Global Test Service Co.,Ltd.

Address : No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name..... : Imin Technology Pte Ltd

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test specification

Standard..... : **FCC Part 15 C (15.225)**

TRF Originator..... : Shenzhen Global Test Service Co.,Ltd.

Master TRF : Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description POS Device

Trade Mark..... : 

Manufacturer : Imin Technology Pte Ltd

Model/Type reference : I25D02

List Model : N/A

Modulation Type..... : ASK

Operation Frequency : 13.56 MHz

Hardware Version : N/A

Software Version..... : N/A

Rating : DC 24V/2.5A by Adapter

Result : **PASS**

TEST REPORT

Test Report No.:	GTS20250603010-2-08	Aug.8, 2025
		Date of issue

Equipment under Test : POS Device

Model /Type : I25D02

List Model : N/A

Applicant : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Manufacturer : **Imin Technology Pte Ltd**

Address : 11 Bishan Street 21, #03-05 Bosch Building, Singapore 573943

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	5
2. SUMMARY	6
2.1. General Remarks	6
2.2. Product Description	6
2.3. Equipment Under Test	7
2.4. Short description of the Equipment under Test (EUT)	7
2.5. Block Diagram of Test Setup	8
2.6. Related Submittal(s) / Grant (s)	8
2.7. EUT Exercise Software	8
2.8. Special Accessories	8
2.9. External I/O Cable	8
2.10. Modifications	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	9
3.5. Summary of measurement results	10
3.6. Equipments Used during the Test.....	11
4. RADIATED MEASUREMENT	12
4.1. Standard Applicable	12
4.2. Measuring Instruments and Setting	12
4.3. Test Procedures	13
4.4. Test Setup Layout	15
4.5. Test Results	16
5. FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	37
5.1. Block Diagram of Test Setup	37
5.2. Field strength of fundamental emissions limit and Mask limit	37
5.3. Test Results	38
6. BANDWIDTH OF THE OPERATING FREQUENCY	41
6.1. Standard Applicable	41
6.2. Test Result	41
7. FREQUENCY STABILITY MEASUREMENT	42
7.1. Standard Applicable	42
7.2. Test Result	42
8. LINE CONDUCTED EMISSIONS	43
8.1. Standard Applicable	43
8.2. Block Diagram of Test Setup	43
8.3. Test Results	43
9. ANTENNA REQUIREMENTS	62
9.1. Standard Applicable	62
9.2. Antenna Connected Construction	62
9.2.1. Standard Applicable	62
9.2.2. Antenna Connector Construction	62
9.2.3. Results: Compliance.	62
10. TEST SETUP PHOTOS OF THE EUT	63

11. EXTERNAL AND INTERNAL PHOTOS OF THE EUT64

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.225](#): RADIO FREQUENCY DEVICES.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul.17, 2025
	:	
Testing commenced on	:	Jul.17, 2025
	:	
Testing concluded on	:	Aug.7, 2025

2.2. Product Description

Product Name:	POS Device
Trade Mark:	
Model/Type reference:	I25D02
List Model:	N/A
Model Declaration	N/A
Power supply:	DC 24V/2.5A by Adapter
Hardware Version	N/A
Software Version	N/A
Sample ID	GTS20250603010-2-S001-1# GTS20250603010-2-S001-2#(Version A) GTS20250603010-2-S001-3#(Version B) GTS20250603010-2-S001-4#(Version C)
Bluetooth	
Frequency Range	2402MHz ~ 2480MHz
Channel Number	79 channels for Bluetooth (DSS) 40 channels for Bluetooth (DTS)
Channel Spacing	1MHz for Bluetooth (DSS) 2MHz for Bluetooth (DTS)
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK for Bluetooth (DSS) GFSK for Bluetooth (DTS)
2.4GWLAN	
WLAN Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz IEEE 802.11ax HE20:2412-2462MHz IEEE 802.11ax HE40:2422-2452MHz
WLAN Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel number:	11 Channel for IEEE 802.11b/g/n/ax (HT20) 7 Channel for IEEE 802.11n/ax (HT40)
Channel separation:	5MHz
WIFI(5.2G/5.3G/5.7G/5.8G Band)	
WLAN Operation frequency	5180-5240MHz/ 5260MHz to 5320MHz/ 5500MHz to 5700MHz/ 5745MHz to 5825MHz

WLAN Modulation Type	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT20: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE20: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT40: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE40: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ac VHT80: OFDM (256QAM,64QAM, 16QAM, QPSK,BPSK) IEEE 802.11ax HE80: OFDMA (1024QAM,256QAM,64QAM, 16QAM, QPSK,BPSK)
Channel number:	4 Channels for 20MHz bandwidth(5180-5240MHz) 4 Channels for 20MHz bandwidth(5260-5320MHz) 11 Channels for 20MHz bandwidth(5500-5700MHz) 5 channels for 20MHz bandwidth(5745-5825MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 2 channels for 40MHz bandwidth(5270~5310MHz) 5 Channels for 40MHz bandwidth(5510-5670MHz) 2 channels for 40MHz bandwidth(5755~5795MHz) 1 channels for 80MHz bandwidth(5210MHz) 1 channels for 80MHz bandwidth(5290MHz) 2 Channels for 80MHz bandwidth(5530-5610MHz) 1 channels for 80MHz bandwidth(5775MHz)
Antenna Description	Internal Antenna, 3.36dBi(Max.) for 2.4G Band and 5.11dBi(Max.) for 5G Band
RFID(13.56MHz) (Optional)	
Frequency Range	13.56MHz
Channel Number	1
Modulation Type	ASK
Antenna Description	Internal Antenna, 0dBi (Max.), NFC has three optional antennas, antenna 1(Model:DS2-52) , antenna 2 (Model:DS2-51) and antenna 3 (Model:DS2-55).
Remark:The I25D02 model has 3 versions; Version A: One large display and one small display; Version B: Double large display ; Version C: Only one large display;	

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☒ 24 V DC
		☐ Other (specified in blank below)	

DC 24.0V

2.4. Short description of the Equipment under Test (EUT)

This is a POS Device

For more details, refer to the user's manual of the EUT.

2.5. Block Diagram of Test Setup



2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AYD5-I25D02** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. EUT Exercise Software

N/A.

2.8. Special Accessories

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN HONOR ELECTRONIC CO.,LTD.	Adapter	ADS-65HI-19A-124060F	--	SDOC
Jiangsu Chenyang Electron Co.,Ltd.	Adapter	CYSE65-240250	--	SDOC
LENOVO	PC	DESKYOP-EUIVCNR	--	SDOC
LENOVO	Keyboard	T460S	--	SDOC
LENOVO	Mouse	Howard	--	SDOC
aigo	USB flash disk	U330	--	SDOC
SONY	Earphone	MDR-XB550AP	--	SDOC
--	Electronic Scale	--	--	SDOC
--	Cashbox	--	--	SDOC

Note: The PC, Electronic Scale, Cashbox, Keyboard, Mouse, Earphone and USB flash disk is only used for auxiliary testing.

2.9. External I/O Cable

I/O Port Description	Quantity	Cable
DC IN Port	1	Non-Shielded, 1.0m
USB Port	4	N/A
RJ11 Port	1	N/A
RJ12 Port	1	N/A
RJ45 Port	1	Non-Shielded, 10m
HDMI Port	1	N/A
Type-C Port	1	N/A
Earphone Port	1	N/A

2.10. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2019 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

Industry Canada Registration Number. is 24189.

FCC Designation Number is CN1401.

FCC Registered Test Site Number is 684561.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	-20-50 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.5. Summary of measurement results

Applied Standard: FCC Part 15 Subpart C			
Test Items	FCC Rules	Test Sample	Result
Line Conducted Emissions	§15.207(a)	GTS20250603010-2-S001-2# GTS20250603010-2-S001-3# GTS20250603010-2-S001-4#	PASS
Field Strength of Fundamental Emissions	§15.225(a)(b)(c)	GTS20250603010-2-S001-1#	PASS
Radiated Emissions	§15.225(d) & §15.209	GTS20250603010-2-S001-1# GTS20250603010-2-S001-2# GTS20250603010-2-S001-3# GTS20250603010-2-S001-4#	PASS
20dB Bandwidth	§ 15.215	GTS20250603010-2-S001-1#	PASS
Frequency Stability	§15.225(e)	GTS20250603010-2-S001-1#	PASS
Antenna Requirement	§15.203	GTS20250603010-2-S001-1#	PASS

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. Note 1 – Test results inside test report;
4. Note 2 – Test results in other test report (MPE Report).
5. We tested all test mode and recorded worst case in report

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Artificial Mains	CYBERTEK	EM5040A	E1850400205	2025/07/07	2026/07/06
LISN	R&S	ESH2-Z5	893606/008	2025/07/07	2026/07/06
EMI Test Receiver	R&S	ESPI 3	/	2025/07/04	2026/07/03
Test Receiver	R&S	ESCI 7	101102	2025/07/04	2026/07/03
Spectrum Analyzer	Agilent	N9020A	MY48010425	2025/07/04	2026/07/03
Spectrum Analyzer	R&S	FSV40-N	101800	2025/07/04	2026/07/03
Vector Signal generator	Agilent	N5181A	MY49060502	2025/07/15	2026/07/14
Signal generator	Agilent	N5182A	MY50141550	2025/07/04	2026/07/03
Climate Chamber	ESPEC	EL-10KA	A20120523	2025/07/15	2026/07/14
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2024/12/16	2025/12/15
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	/	2025/07/04	2026/07/03
By-log Antenna	SCHWARZBECK	VULB9163	00976	2025/07/15	2026/07/14
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2025/07/15	2026/07/14
Amplifier	SKET	LAPA_30M01G-32	SK20240104001	2025/01/21	2026/01/20
Amplifier	EMCI	EMC012645SE	980340	2025/01/21	2026/01/20
Amplifier	Schwarzbeck	BBV9179	9719-025	2025/01/21	2026/01/20
Temperature/Humidity Meter	HUATU	HTC-1	/	2025/07/16	2026/07/15
High-Pass Filter	Stest	1	/	2025/07/04	2026/07/03
High-Pass Filter	Stest	2	/	2025/07/04	2026/07/03
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2025/07/15	2026/07/14
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2025/07/15	2026/07/14
Data acquisition card	Agilent	U2531A	TW53323507	2025/07/15	2026/07/14
Power Sensor	Keysight	E9301A	MY41495308	2025/07/04	2026/07/03
Control Unit	Tonscend	JS0806-2	/	2025/07/07	2026/07/06
Control Unit	Tonscend	JS0806-2	/	2025/07/07	2026/07/06
integrated measuring instrument	R&S	CMW500	107519	2025/07/04	2026/07/03
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

4. RADIATED MEASUREMENT

4.1. Standard Applicable

According to §15.209/ §15.205

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

4.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

Field Strength Calculation


The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CL - AG$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$Transd=AF +CL-AG$

4.4. Test Setup Layout

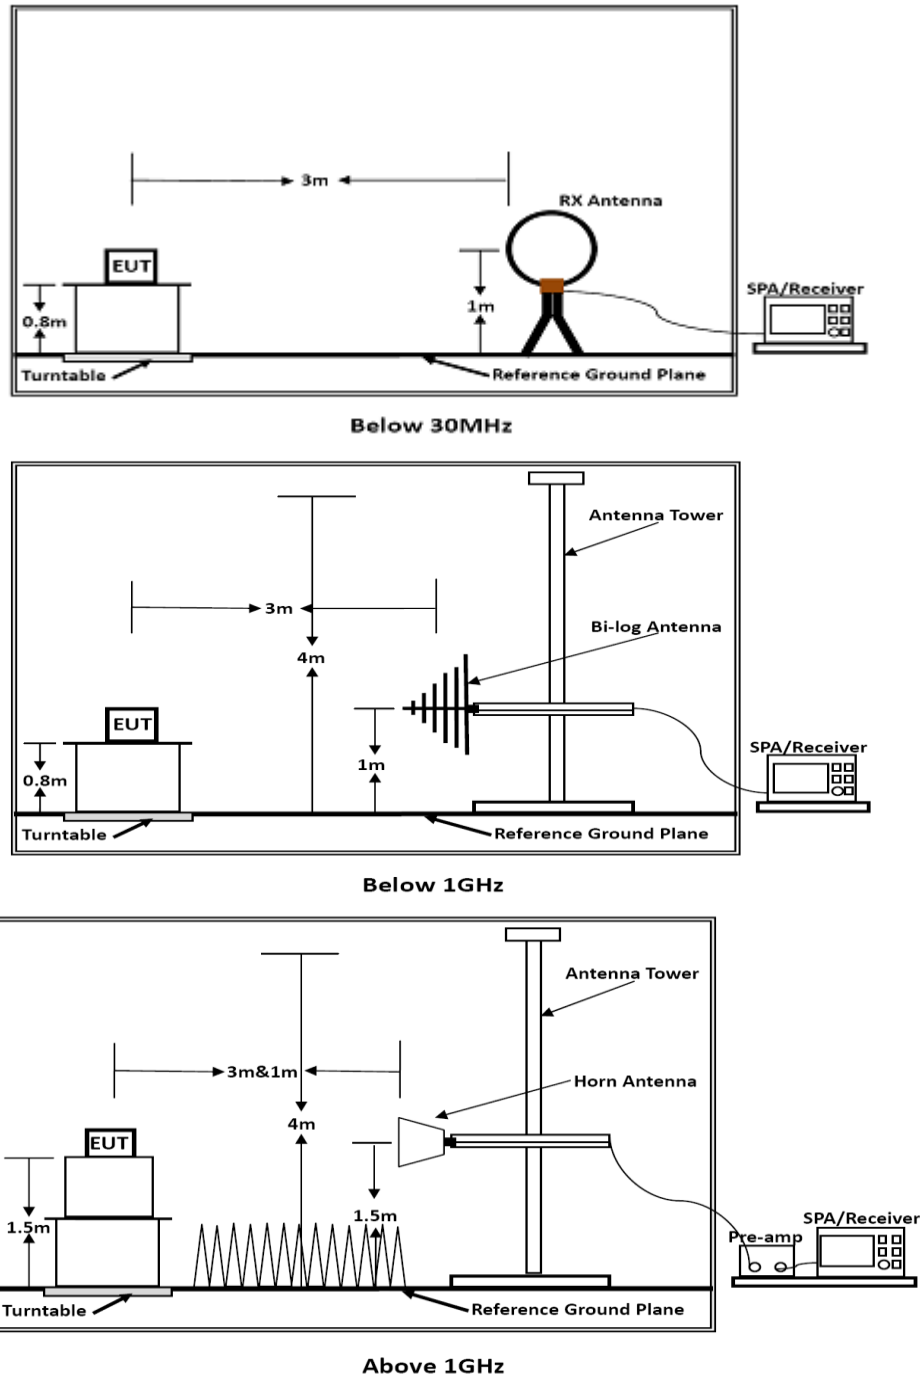

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5. Test Results

Temperature	24.5℃	Humidity	53.7%
Test Engineer	Evan Ouyang	Configurations	NFC

PASS.

The test data please refer to following page:

9 KHz~30MHz

Version A(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-52):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.17	35.18	20.54	55.72	103.14	47.42	QP
0.93	32.11	20.48	52.59	83.14	30.55	QP
2.00	25.52	20.30	45.82	69.54	23.72	QP
5.04	34.12	20.32	54.44	69.54	15.10	QP
13.56	45.28	20.18	65.46	124.00	58.54	QP
15.01	31.61	20.12	51.73	69.54	17.81	QP
22.00	34.88	19.94	54.82	69.54	14.72	QP
25.98	33.02	19.95	52.97	69.54	16.57	QP

Version A(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-51):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.18	30.66	20.54	51.20	102.48	51.27	QP
0.85	30.41	20.48	50.89	82.48	31.59	QP
2.04	26.94	20.30	47.24	69.54	22.30	QP
4.96	29.62	20.32	49.94	69.54	19.60	QP
13.56	36.44	20.18	56.62	124.00	67.38	QP
14.96	35.50	20.12	55.62	69.54	13.92	QP
22.03	27.26	19.94	47.20	69.54	22.34	QP
25.98	30.77	19.95	50.72	69.54	18.82	QP

Version A(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-55):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.21	33.77	20.54	54.31	101.27	46.95	QP
0.91	34.11	20.48	54.59	81.27	26.68	QP
2.04	30.42	20.30	50.72	69.54	18.82	QP
4.97	33.01	20.32	53.33	69.54	16.21	QP
13.56	39.56	20.18	59.74	124.00	64.26	QP
14.96	27.29	20.12	47.41	69.54	22.13	QP
22.02	26.91	19.94	46.85	69.54	22.69	QP
25.97	27.64	19.95	47.59	69.54	21.95	QP

Version B(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-52):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.23	30.28	20.54	50.82	100.27	49.45	QP
0.87	30.28	20.48	50.76	80.27	29.51	QP
1.97	26.79	20.30	47.09	69.54	22.45	QP
4.98	34.84	20.32	55.16	69.54	14.38	QP
13.56	50.82	20.18	71.00	124.00	53.00	QP
14.97	29.34	20.12	49.46	69.54	20.08	QP
21.99	28.09	19.94	48.03	69.54	21.51	QP
25.99	24.66	19.95	44.61	69.54	24.93	QP

Version B(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-51):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.15	29.92	20.54	50.46	103.86	53.40	QP
0.91	35.66	20.48	56.14	83.86	27.72	QP
1.97	32.99	20.30	53.29	69.54	16.25	QP
5.03	34.47	20.32	54.79	69.54	14.75	QP
13.56	40.47	20.18	60.65	124.00	63.35	QP
15.01	35.42	20.12	55.54	69.54	14.00	QP
22.01	33.98	19.94	53.92	69.54	15.62	QP
26.01	29.98	19.95	49.93	69.54	19.61	QP

Version B(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-55):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.24	30.90	20.54	51.44	100.09	48.65	QP
0.84	33.27	20.48	53.75	80.09	26.34	QP
2.04	26.63	20.30	46.93	69.54	22.61	QP
4.96	25.42	20.32	45.74	69.54	23.80	QP
13.56	43.24	20.18	63.42	124.00	60.58	QP
14.98	32.22	20.12	52.34	69.54	17.20	QP
21.99	30.01	19.94	49.95	69.54	19.59	QP
25.99	32.04	19.95	51.99	69.54	17.55	QP

Version C(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-52):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.24	28.64	20.54	49.18	100.07	50.89	QP
0.92	34.56	20.48	55.04	80.07	25.02	QP
1.99	25.18	20.30	45.48	69.54	24.06	QP
5.04	30.37	20.32	50.69	69.54	18.85	QP
13.56	44.28	20.18	64.46	124.00	59.54	QP
14.95	34.80	20.12	54.92	69.54	14.62	QP
22.02	27.72	19.94	47.66	69.54	21.88	QP
25.96	24.16	19.95	44.11	69.54	25.43	QP

Version C(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-51):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.21	36.04	20.54	56.58	101.32	44.74	QP
0.90	34.56	20.48	55.04	81.32	26.28	QP
1.97	26.94	20.30	47.24	69.54	22.30	QP
4.96	27.31	20.32	47.63	69.54	21.91	QP
13.56	40.17	20.18	60.35	124.00	63.65	QP
15.01	31.29	20.12	51.41	69.54	18.13	QP
22.03	34.27	19.94	54.21	69.54	15.33	QP
25.98	25.04	19.95	44.99	69.54	24.55	QP

Version C(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-55):

Freq. MHz	Reading dBuV	Factor dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark
0.22	36.02	20.54	56.56	100.89	44.33	QP
0.89	32.00	20.48	52.48	80.89	28.41	QP
2.00	25.93	20.30	46.23	69.54	23.31	QP
5.02	32.45	20.32	52.77	69.54	16.77	QP
13.56	40.54	20.18	60.72	124.00	63.28	QP
15.02	34.55	20.12	54.67	69.54	14.87	QP
22.03	29.20	19.94	49.14	69.54	20.40	QP
25.97	31.22	19.95	51.17	69.54	18.37	QP

*Note: Emission Level= Reading Level + Factor

Factor= Antenna Factor + Cable Loss

Margin = Emission Level Limit – Measured Values


“--” means noise floor.

NOTE: All the modes have been tested and recorded worst mode in the report.

For 30MHz-1GHz
Version A:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-52)

Horizontal

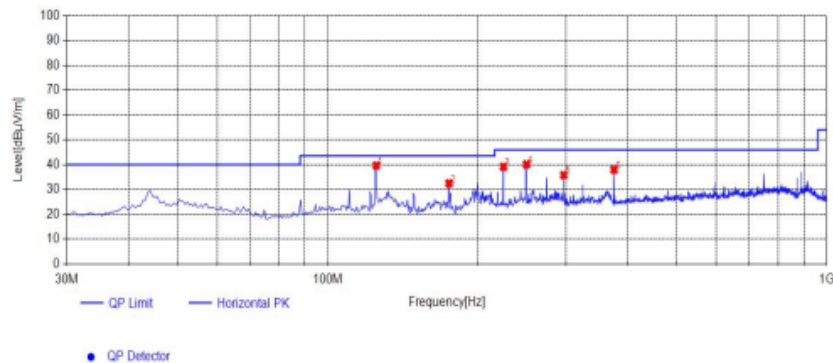


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.01	-7.36	39.65	43.50	3.85	100	41	PK	Horizontal	PASS
2	175.015	38.89	-6.43	32.46	43.50	11.04	100	142	PK	Horizontal	PASS
3	224.97	43.55	-4.40	39.15	46.00	6.85	100	310	PK	Horizontal	PASS
4	250.19	43.41	-3.33	40.08	46.00	5.92	100	121	PK	Horizontal	PASS
5	297.235	38.24	-2.45	35.79	46.00	10.21	100	64	PK	Horizontal	PASS
6	374.835	38.66	-0.72	37.94	46.00	8.06	100	358	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

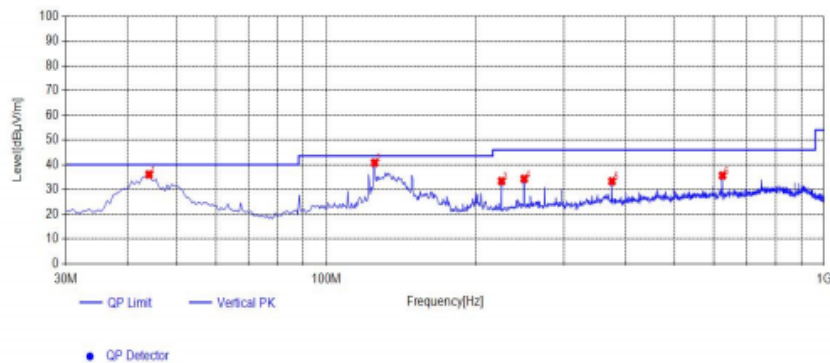

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	39.45	-3.41	36.04	40.00	3.96	100	357	PK	Vertical	PASS
2	125.06	48.14	-7.36	40.78	43.50	2.72	100	314	PK	Vertical	PASS
3	224.97	37.77	-4.40	33.37	46.00	12.63	100	108	PK	Vertical	PASS
4	249.705	37.64	-3.35	34.29	46.00	11.71	100	44	PK	Vertical	PASS
5	374.835	34.02	-0.72	33.30	46.00	12.70	100	23	PK	Vertical	PASS
6	625.095	31.11	4.53	35.64	46.00	10.36	100	357	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-52)

Horizontal

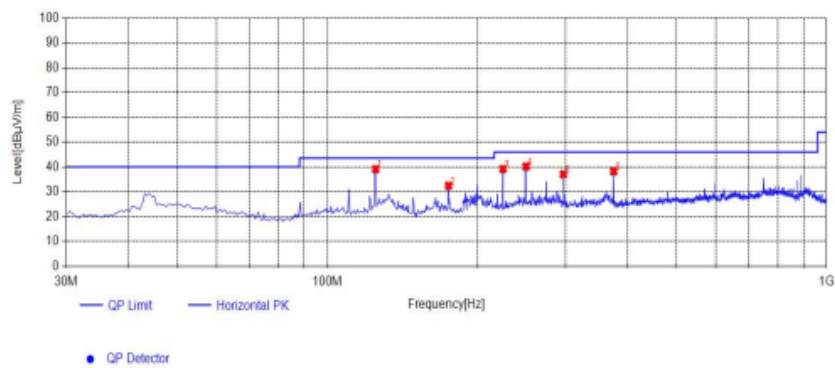


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	46.46	-7.36	39.10	43.50	4.40	100	131	PK	Horizontal	PASS
2	175.015	38.88	-6.43	32.45	43.50	11.05	100	145	PK	Horizontal	PASS
3	224.97	43.58	-4.40	39.18	46.00	6.82	100	319	PK	Horizontal	PASS
4	250.19	43.48	-3.33	40.15	46.00	5.85	100	138	PK	Horizontal	PASS
5	297.235	39.49	-2.45	37.04	46.00	8.96	100	67	PK	Horizontal	PASS
6	374.835	38.91	-0.72	38.19	46.00	7.81	100	2	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

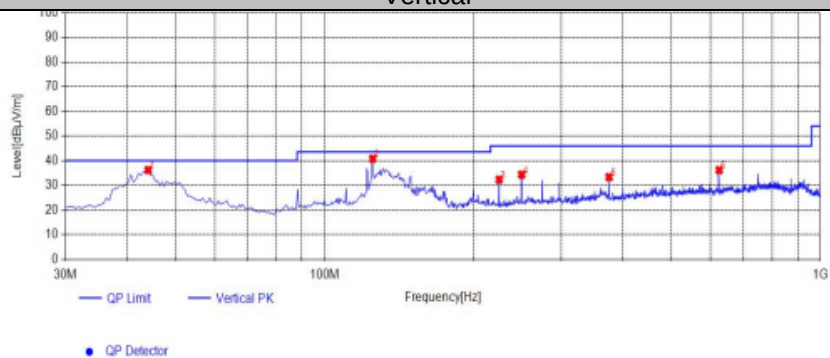

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	39.62	-3.41	36.21	40.00	3.79	100	206	PK	Vertical	PASS
2	125.06	48.17	-7.36	40.81	43.50	2.69	100	344	PK	Vertical	PASS
3	224.97	36.75	-4.40	32.35	46.00	13.65	100	115	PK	Vertical	PASS
4	249.705	37.71	-3.35	34.36	46.00	11.64	100	48	PK	Vertical	PASS
5	374.835	34.04	-0.72	33.32	46.00	12.68	100	14	PK	Vertical	PASS
6	625.095	31.67	4.53	36.20	46.00	9.80	100	358	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version B:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-52)

Horizontal

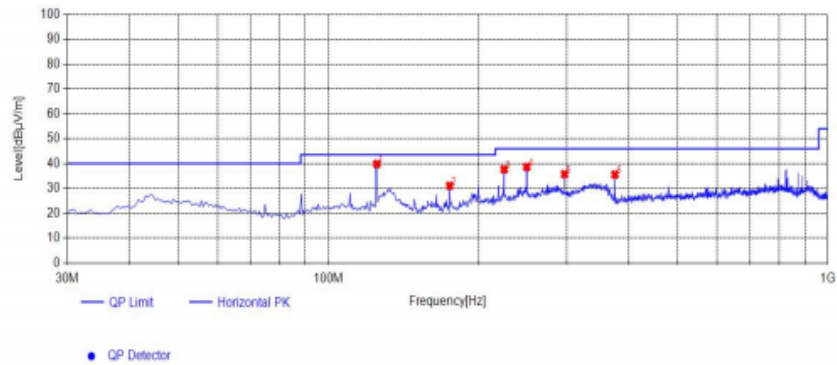


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.19	-7.36	39.83	43.50	3.67	100	27	PK	Horizontal	PASS
2	175.015	37.50	-6.43	31.07	43.50	12.43	100	320	PK	Horizontal	PASS
3	224.97	42.06	-4.40	37.66	46.00	8.34	100	303	PK	Horizontal	PASS
4	249.705	42.01	-3.35	38.66	46.00	7.34	100	358	PK	Horizontal	PASS
5	297.235	38.18	-2.45	35.73	46.00	10.27	100	81	PK	Horizontal	PASS
6	374.835	36.25	-0.72	35.53	46.00	10.47	100	358	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

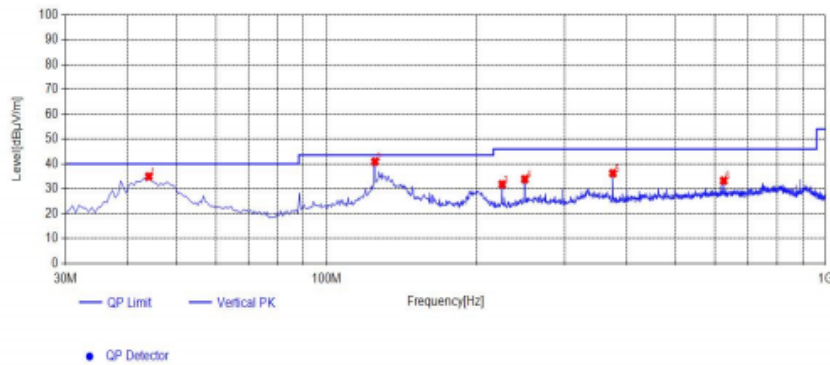

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	38.38	-3.41	34.97	40.00	5.03	100	178	PK	Vertical	PASS
2	125.06	48.28	-7.36	40.92	43.50	2.58	100	316	PK	Vertical	PASS
3	224.97	36.20	-4.40	31.80	46.00	14.20	100	103	PK	Vertical	PASS
4	249.705	37.21	-3.35	33.86	46.00	12.14	100	87	PK	Vertical	PASS
5	374.835	36.95	-0.72	36.23	46.00	9.77	100	2	PK	Vertical	PASS
6	625.095	28.73	4.53	33.26	46.00	12.74	100	16	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-52)

Horizontal

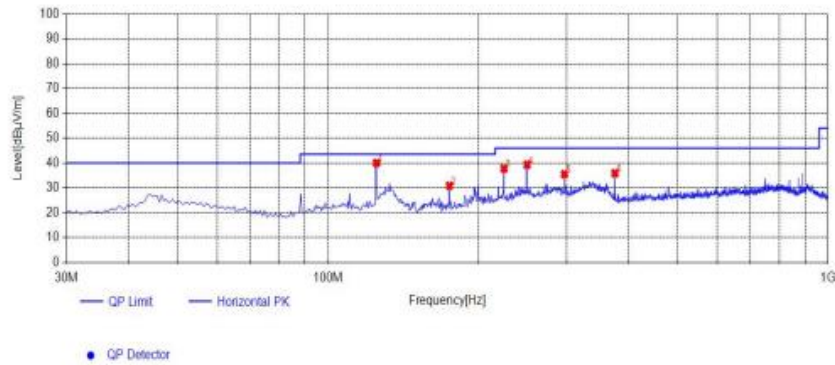


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.39	-7.36	40.03	43.50	3.47	100	26	PK	Horizontal	PASS
2	175.015	37.28	-6.43	30.85	43.50	12.65	100	337	PK	Horizontal	PASS
3	224.97	42.19	-4.40	37.79	46.00	8.21	100	310	PK	Horizontal	PASS
4	250.19	42.69	-3.33	39.36	46.00	6.64	100	359	PK	Horizontal	PASS
5	297.235	37.96	-2.45	35.51	46.00	10.49	100	68	PK	Horizontal	PASS
6	374.835	36.58	-0.72	35.86	46.00	10.14	100	143	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

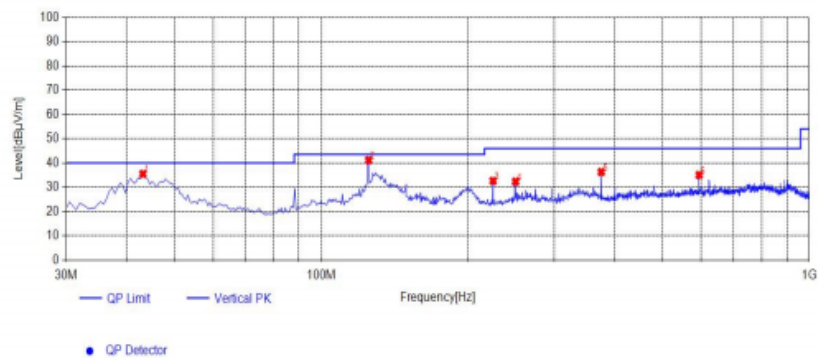

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.095	39.06	-3.58	35.48	40.00	4.52	100	150	PK	Vertical	PASS
2	125.06	48.52	-7.36	41.16	43.50	2.34	100	347	PK	Vertical	PASS
3	224.97	37.03	-4.40	32.63	46.00	13.37	100	123	PK	Vertical	PASS
4	250.19	35.65	-3.33	32.32	46.00	13.68	100	80	PK	Vertical	PASS
5	374.835	37.00	-0.72	36.28	46.00	9.72	100	1	PK	Vertical	PASS
6	595.025	30.66	4.39	35.05	46.00	10.95	100	36	PK	Vertical	PASS


Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version C:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-52)

Horizontal

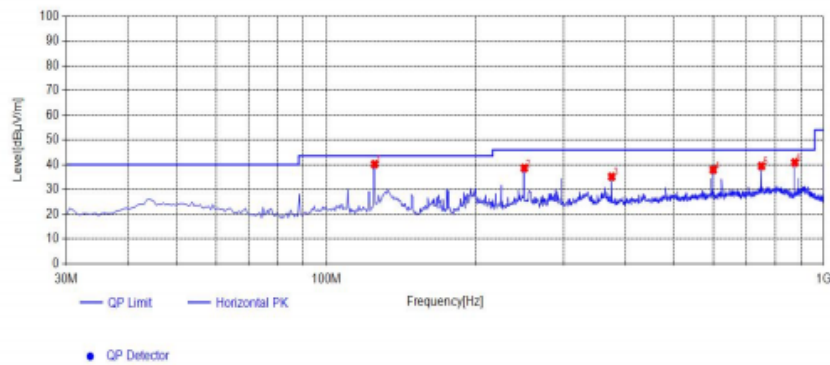


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.55	-7.36	40.19	43.50	3.31	100	51	PK	Horizontal	PASS
2	250.19	41.96	-3.33	38.63	46.00	7.37	100	351	PK	Horizontal	PASS
3	374.835	35.85	-0.72	35.13	46.00	10.87	100	0	PK	Horizontal	PASS
4	599.875	33.48	4.46	37.94	46.00	8.06	100	37	PK	Horizontal	PASS
5	750.225	32.65	6.79	39.44	46.00	6.56	100	307	PK	Horizontal	PASS
6	875.355	34.58	6.28	40.86	46.00	5.14	100	51	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

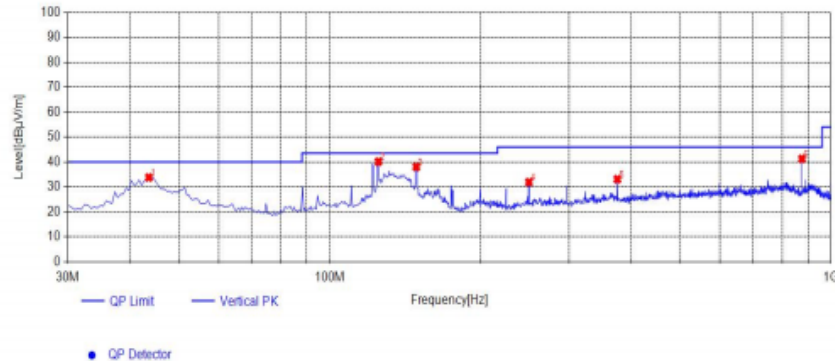

Suspected List


NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.58	37.28	-3.49	33.79	40.00	6.21	100	2	PK	Vertical	PASS
2	125.06	47.50	-7.36	40.14	43.50	3.36	100	346	PK	Vertical	PASS
3	148.825	46.48	-8.44	38.04	43.50	5.46	100	190	PK	Vertical	PASS
4	249.705	35.26	-3.35	31.91	46.00	14.09	100	197	PK	Vertical	PASS
5	374.835	33.82	-0.72	33.10	46.00	12.90	100	290	PK	Vertical	PASS
6	875.355	34.99	6.28	41.27	46.00	4.73	100	353	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-52)

Horizontal

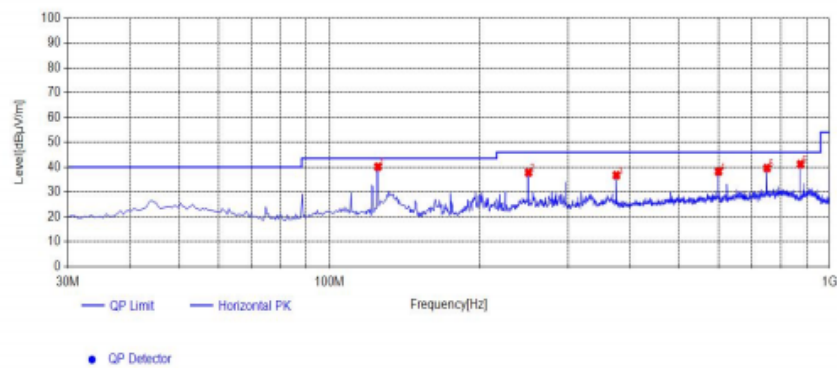


Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.51	-7.36	40.15	43.50	3.35	100	84	PK	Horizontal	PASS
2	250.19	41.17	-3.33	37.84	46.00	8.16	100	2	PK	Horizontal	PASS
3	374.835	37.45	-0.72	36.73	46.00	9.27	100	53	PK	Horizontal	PASS
4	599.875	33.75	4.46	38.21	46.00	7.79	100	40	PK	Horizontal	PASS
5	750.225	32.83	6.79	39.62	46.00	6.38	100	312	PK	Horizontal	PASS
6	875.355	34.90	6.28	41.18	46.00	4.82	100	53	PK	Horizontal	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

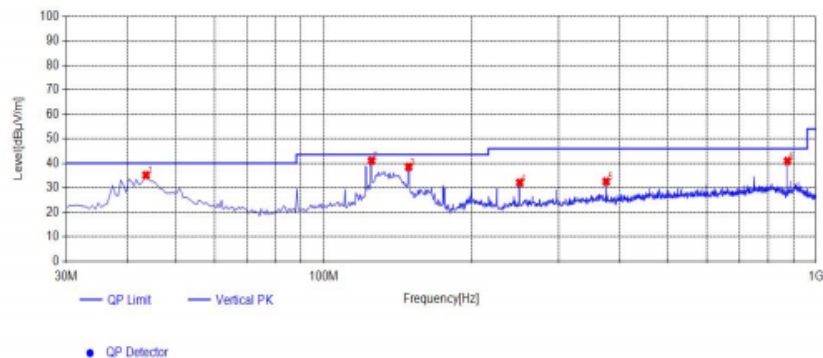

Suspected List

NO.	Frequency [MHz]	Reading [dBμV/m]	Factor [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.58	38.62	-3.49	35.13	40.00	4.87	100	264	PK	Vertical	PASS
2	125.06	48.38	-7.36	41.02	43.50	2.48	100	330	PK	Vertical	PASS
3	148.825	46.94	-8.44	38.50	43.50	5.00	100	194	PK	Vertical	PASS
4	250.19	35.43	-3.33	32.10	46.00	13.90	100	84	PK	Vertical	PASS
5	374.835	33.22	-0.72	32.50	46.00	13.50	100	264	PK	Vertical	PASS
6	875.355	34.60	6.28	40.88	46.00	5.12	100	358	PK	Vertical	PASS

Note:1. Result (dBμV/m) = Reading(dBμV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version A:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-51)

Horizontal

Test Graph

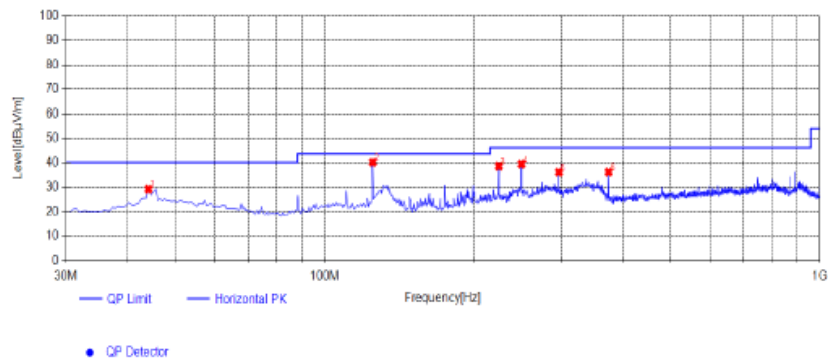

Suspected List


N.O.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	32.63	-3.41	29.22	40.00	10.78	100	276	PK	Horizontal	PASS
2	125.06	47.43	-7.36	40.07	43.50	3.43	100	35	PK	Horizontal	PASS
3	224.97	42.93	-4.40	38.53	46.00	7.47	100	317	PK	Horizontal	PASS
4	249.705	42.71	-3.35	39.36	46.00	6.64	100	351	PK	Horizontal	PASS
5	297.235	38.55	-2.45	36.10	46.00	9.90	100	76	PK	Horizontal	PASS
6	374.835	36.86	-0.72	36.14	46.00	9.86	100	66	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

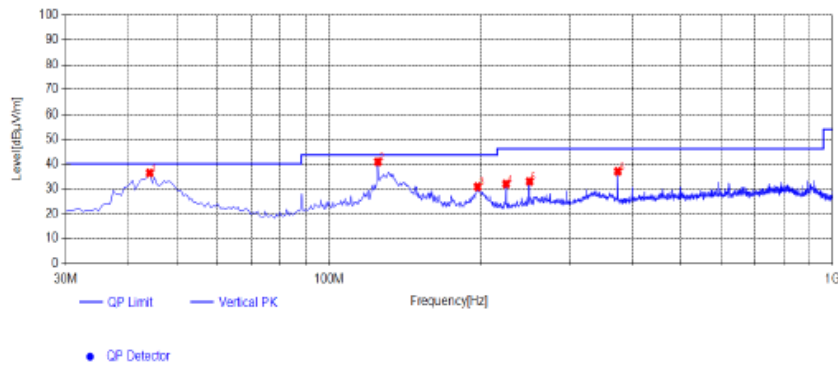

Suspected List

N.O.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	39.77	-3.41	36.36	40.00	3.64	100	306	PK	Vertical	PASS
2	125.06	48.15	-7.36	40.79	43.50	2.71	100	340	PK	Vertical	PASS
3	197.325	35.36	-4.50	30.86	43.50	12.64	100	68	PK	Vertical	PASS
4	224.97	36.39	-4.40	31.99	46.00	14.01	100	124	PK	Vertical	PASS
5	250.19	36.31	-3.33	32.98	46.00	13.02	100	111	PK	Vertical	PASS
6	374.835	37.71	-0.72	36.99	46.00	9.01	100	10	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-51)

Horizontal

Test Graph

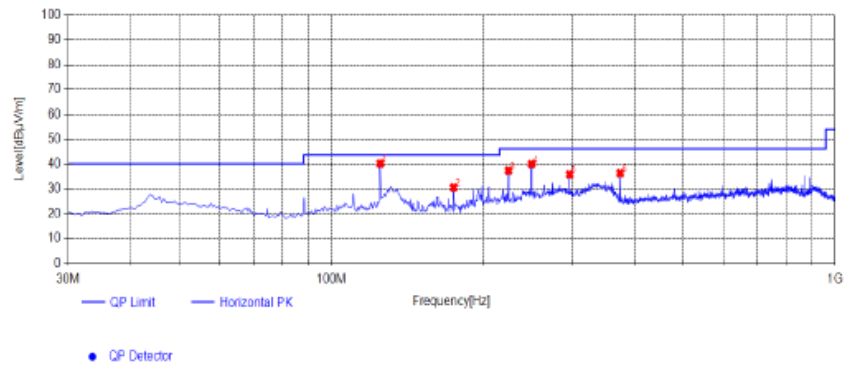

Suspected List


N.O.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.47	-7.36	40.11	43.50	3.39	100	44	PK	Horizontal	PASS
2	175.015	37.01	-6.43	30.58	43.50	12.92	100	340	PK	Horizontal	PASS
3	224.97	41.72	-4.40	37.32	46.00	8.68	100	303	PK	Horizontal	PASS
4	249.705	43.27	-3.35	39.92	46.00	6.08	100	353	PK	Horizontal	PASS
5	297.235	38.24	-2.45	35.79	46.00	10.21	100	77	PK	Horizontal	PASS
6	374.835	36.98	-0.72	36.26	46.00	9.74	100	141	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

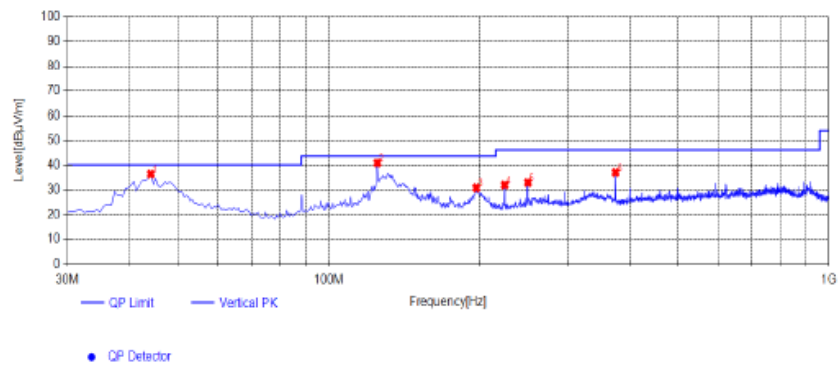

Suspected List

N.O.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	39.77	-3.41	36.36	40.00	3.64	100	306	PK	Vertical	PASS
2	125.06	48.15	-7.36	40.79	43.50	2.71	100	340	PK	Vertical	PASS
3	197.325	35.36	-4.50	30.86	43.50	12.64	100	68	PK	Vertical	PASS
4	224.97	36.39	-4.40	31.99	46.00	14.01	100	124	PK	Vertical	PASS
5	250.19	36.31	-3.33	32.98	46.00	13.02	100	111	PK	Vertical	PASS
6	374.835	37.71	-0.72	36.99	46.00	9.01	100	10	PK	Vertical	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version B:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-51)

Horizontal

Test Graph

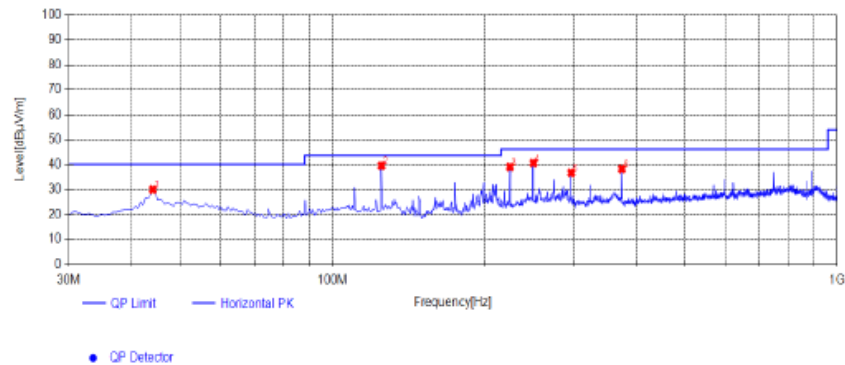

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	33.40	-3.41	29.99	40.00	10.01	100	202	PK	Horizontal	PASS
2	125.06	46.84	-7.36	39.48	43.50	4.02	100	117	PK	Horizontal	PASS
3	224.97	43.36	-4.40	38.96	46.00	7.04	100	323	PK	Horizontal	PASS
4	250.19	43.88	-3.33	40.55	46.00	5.45	100	128	PK	Horizontal	PASS
5	297.235	39.09	-2.45	36.64	46.00	9.36	100	84	PK	Horizontal	PASS
6	374.835	38.90	-0.72	38.18	46.00	7.82	100	2	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

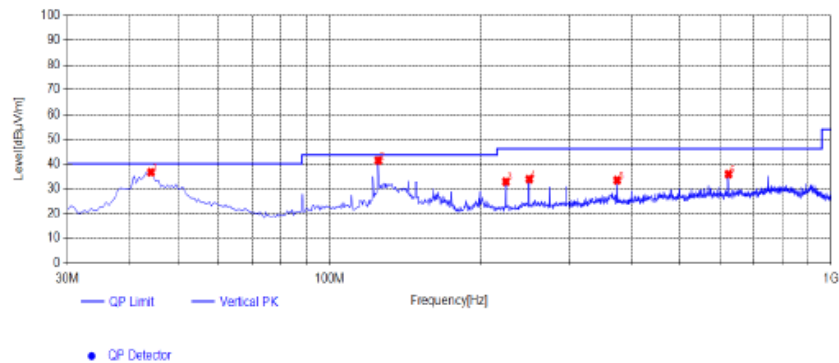

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	40.01	-3.41	36.60	40.00	3.40	100	220	PK	Vertical	PASS
2	125.06	48.68	-7.36	41.32	43.50	2.18	100	320	PK	Vertical	PASS
3	224.97	37.25	-4.40	32.85	46.00	13.15	100	105	PK	Vertical	PASS
4	250.19	37.18	-3.33	33.85	46.00	12.15	100	78	PK	Vertical	PASS
5	374.835	34.12	-0.72	33.40	46.00	12.60	100	12	PK	Vertical	PASS
6	625.095	31.32	4.53	35.85	46.00	10.15	100	0	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-51)

Horizontal

Test Graph

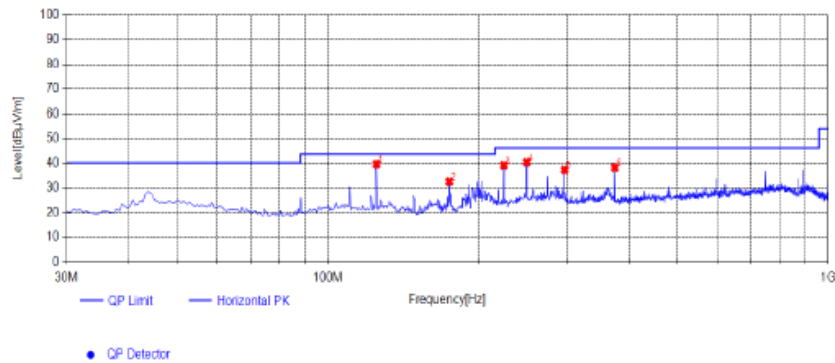

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	46.89	-7.36	39.53	43.50	3.97	100	42	PK	Horizontal	PASS
2	175.015	38.93	-6.43	32.50	43.50	11.00	100	123	PK	Horizontal	PASS
3	224.97	43.44	-4.40	39.04	46.00	6.96	100	317	PK	Horizontal	PASS
4	249.705	43.66	-3.35	40.31	46.00	5.69	100	126	PK	Horizontal	PASS
5	297.235	39.72	-2.45	37.27	46.00	8.73	100	106	PK	Horizontal	PASS
6	374.835	38.83	-0.72	38.11	46.00	7.89	100	358	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

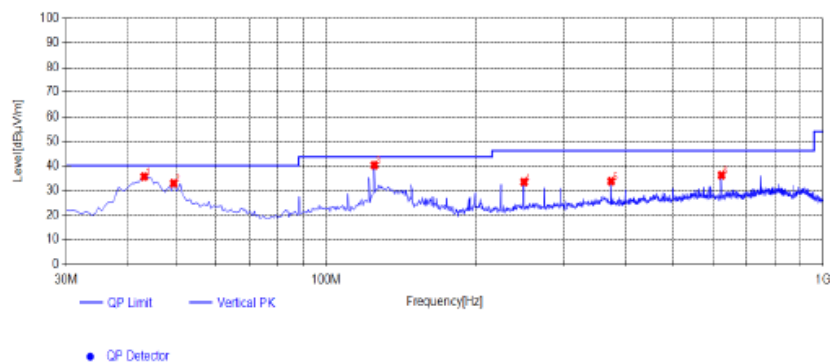

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.095	39.16	-3.58	35.58	40.00	4.42	100	158	PK	Vertical	PASS
2	49.4	36.01	-3.12	32.89	40.00	7.11	100	295	PK	Vertical	PASS
3	125.06	47.52	-7.36	40.16	43.50	3.34	100	308	PK	Vertical	PASS
4	250.19	36.75	-3.33	33.42	46.00	12.58	100	57	PK	Vertical	PASS
5	374.835	34.44	-0.72	33.72	46.00	12.28	100	20	PK	Vertical	PASS
6	625.095	31.63	4.53	36.16	46.00	9.84	100	359	PK	Vertical	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version C:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-51)

Horizontal

Test Graph

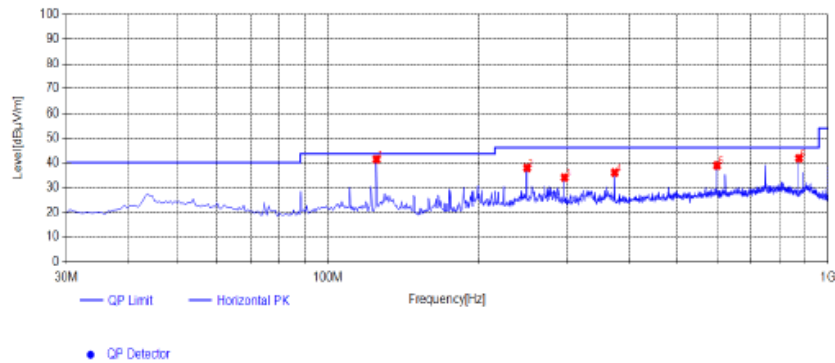

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	48.67	-7.36	41.31	43.50	2.19	100	22	PK	Horizontal	PASS
2	250.19	41.22	-3.33	37.89	46.00	8.11	100	358	PK	Horizontal	PASS
3	297.235	36.47	-2.45	34.02	46.00	11.98	100	73	PK	Horizontal	PASS
4	374.835	36.72	-0.72	36.00	46.00	10.00	100	19	PK	Horizontal	PASS
5	600.36	34.39	4.45	38.84	46.00	7.16	100	39	PK	Horizontal	PASS
6	875.355	35.46	6.28	41.74	46.00	4.26	100	49	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

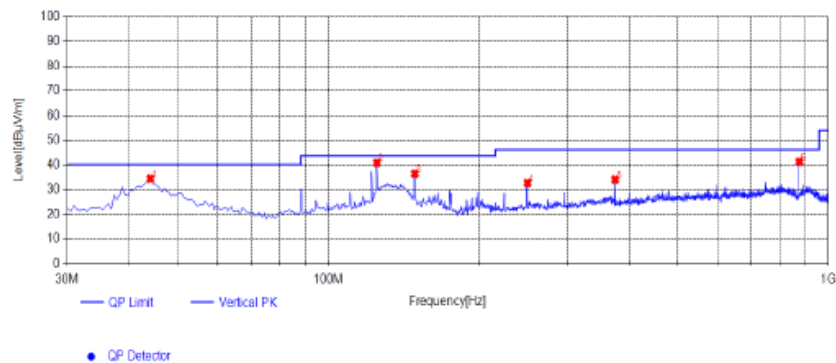

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	37.81	-3.41	34.40	40.00	5.60	100	345	PK	Vertical	PASS
2	125.06	48.12	-7.36	40.76	43.50	2.74	100	311	PK	Vertical	PASS
3	148.825	44.82	-8.44	36.38	43.50	7.12	100	173	PK	Vertical	PASS
4	250.19	36.03	-3.33	32.70	46.00	13.30	100	216	PK	Vertical	PASS
5	374.835	34.74	-0.72	34.02	46.00	11.98	100	264	PK	Vertical	PASS
6	875.355	34.87	6.28	41.15	46.00	4.85	100	3	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-51)

Horizontal

Test Graph

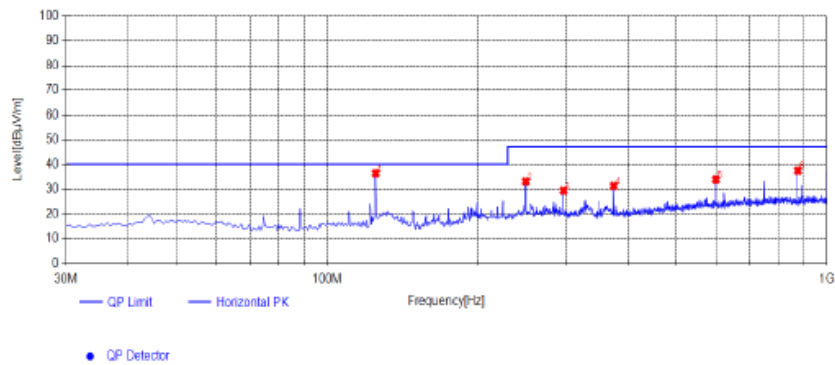

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	49.61	-13.24	36.37	40.00	3.63	100	42	PK	Horizontal	PASS
2	249.705	41.83	-8.72	33.11	47.00	13.89	100	360	PK	Horizontal	PASS
3	297.235	37.01	-7.55	29.46	47.00	17.54	100	72	PK	Horizontal	PASS
4	374.835	37.02	-5.71	31.31	47.00	15.69	100	22	PK	Horizontal	PASS
5	600.36	34.43	-0.55	33.88	47.00	13.12	100	42	PK	Horizontal	PASS
6	875.355	35.81	1.64	37.45	47.00	9.55	100	49	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

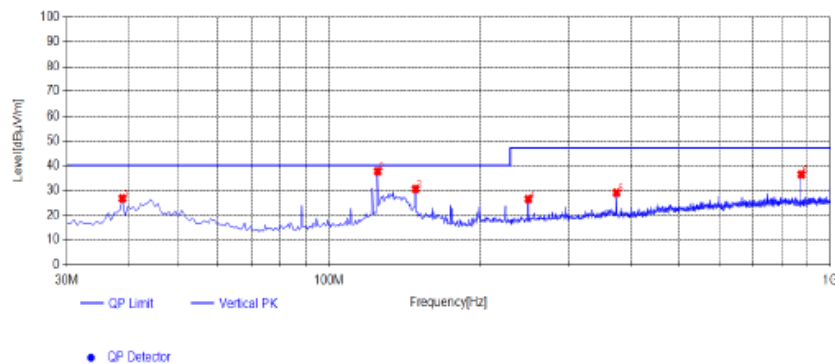

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	38.73	38.79	-11.99	26.80	40.00	13.20	100	71	PK	Vertical	PASS
2	125.06	50.87	-13.24	37.63	40.00	2.37	100	331	PK	Vertical	PASS
3	148.825	44.80	-14.21	30.59	40.00	9.41	100	165	PK	Vertical	PASS
4	249.705	35.27	-8.72	26.55	47.00	20.45	100	231	PK	Vertical	PASS
5	374.835	34.77	-5.71	29.06	47.00	17.94	100	278	PK	Vertical	PASS
6	875.355	34.73	1.64	36.37	47.00	10.63	100	2	PK	Vertical	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version A:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-55)

Horizontal

Test Graph

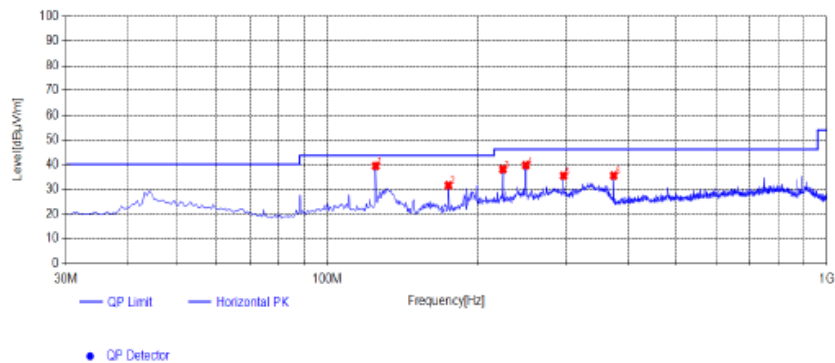

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	46.73	-7.36	39.37	43.50	4.13	100	11	PK	Horizontal	PASS
2	175.015	37.99	-6.43	31.56	43.50	11.94	100	330	PK	Horizontal	PASS
3	224.97	42.41	-4.40	38.01	46.00	7.99	100	317	PK	Horizontal	PASS
4	249.705	42.96	-3.35	39.61	46.00	6.39	100	358	PK	Horizontal	PASS
5	297.235	37.89	-2.45	35.44	46.00	10.56	100	75	PK	Horizontal	PASS
6	374.835	36.19	-0.72	35.47	46.00	10.53	100	89	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

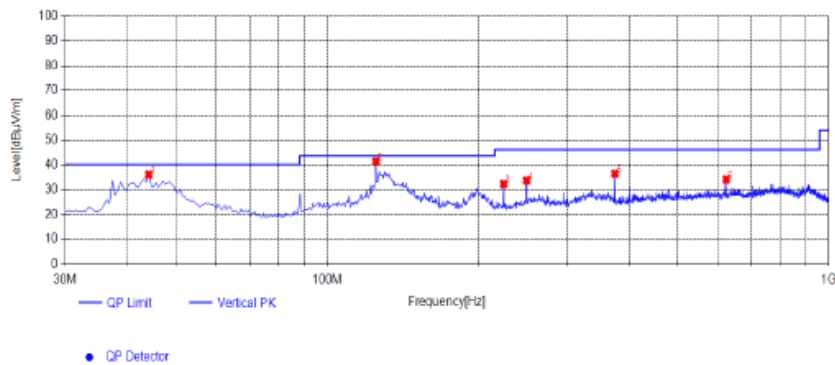

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	39.49	-3.41	36.08	40.00	3.92	100	238	PK	Vertical	PASS
2	125.06	48.66	-7.36	41.30	43.50	2.20	100	268	PK	Vertical	PASS
3	224.97	36.72	-4.40	32.32	46.00	13.68	100	114	PK	Vertical	PASS
4	249.705	37.07	-3.35	33.72	46.00	12.28	100	107	PK	Vertical	PASS
5	374.835	37.14	-0.72	36.42	46.00	9.58	100	20	PK	Vertical	PASS
6	625.095	29.57	4.53	34.10	46.00	11.90	100	255	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-55)

Horizontal

Test Graph

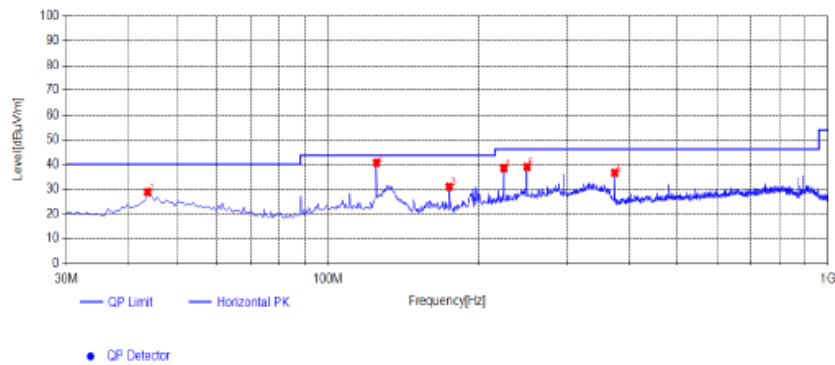

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.68	32.38	-3.49	28.89	40.00	11.11	100	303	PK	Horizontal	PASS
2	125.06	47.99	-7.36	40.63	43.50	2.87	100	137	PK	Horizontal	PASS
3	175.015	37.41	-6.43	30.98	43.50	12.52	100	343	PK	Horizontal	PASS
4	224.97	42.80	-4.40	38.40	46.00	7.60	100	313	PK	Horizontal	PASS
5	250.19	42.28	-3.33	38.95	46.00	7.05	100	360	PK	Horizontal	PASS
6	374.835	37.32	-0.72	36.60	46.00	9.40	100	59	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

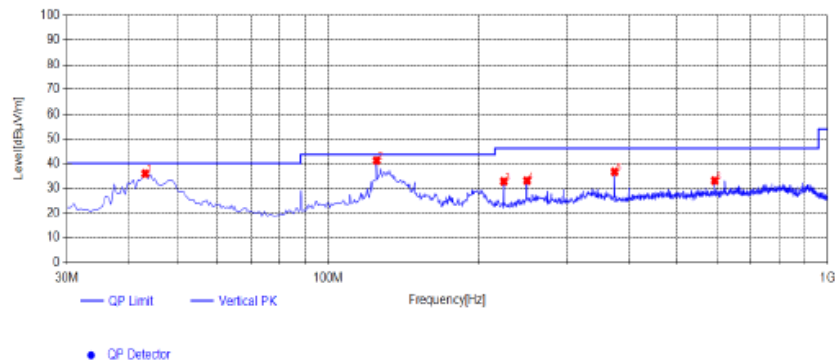

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.095	39.46	-3.58	35.87	40.00	4.13	100	195	PK	Vertical	PASS
2	125.06	48.46	-7.36	41.10	43.50	2.40	100	347	PK	Vertical	PASS
3	224.97	37.16	-4.40	32.76	46.00	13.24	100	94	PK	Vertical	PASS
4	250.19	36.41	-3.33	33.08	46.00	12.92	100	117	PK	Vertical	PASS
5	374.835	37.31	-0.72	36.59	46.00	9.41	100	358	PK	Vertical	PASS
6	595.025	28.67	4.39	33.06	46.00	12.94	100	43	PK	Vertical	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version B:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-55)

Horizontal

Test Graph

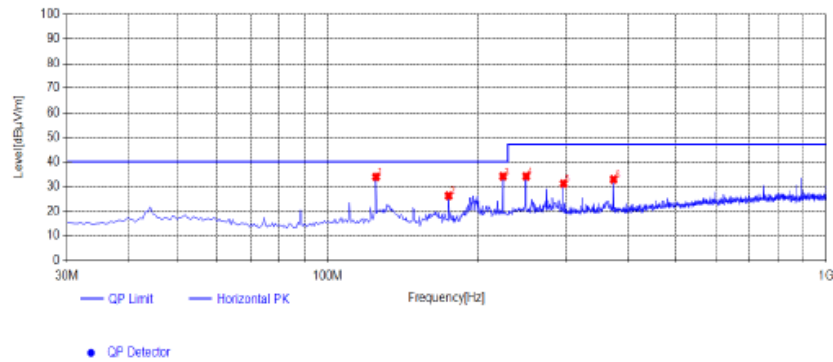

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.16	-13.24	33.92	40.00	6.08	100	127	PK	Horizontal	PASS
2	175.015	38.85	-12.53	26.32	40.00	13.68	100	134	PK	Horizontal	PASS
3	224.97	43.55	-9.43	34.12	40.00	5.88	100	311	PK	Horizontal	PASS
4	250.19	42.84	-8.70	34.14	47.00	12.86	100	355	PK	Horizontal	PASS
5	297.235	38.74	-7.55	31.19	47.00	15.81	100	77	PK	Horizontal	PASS
6	374.835	38.61	-5.71	32.90	47.00	14.10	100	2	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

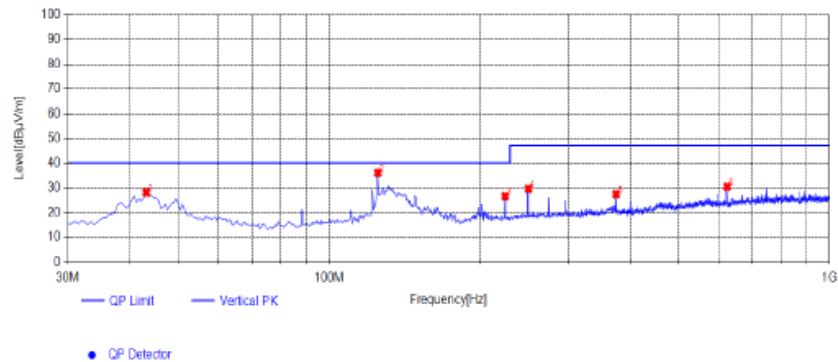

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.095	39.71	-11.52	28.19	40.00	11.81	100	154	PK	Vertical	PASS
2	125.06	49.32	-13.24	36.08	40.00	3.92	100	324	PK	Vertical	PASS
3	224.97	36.12	-9.43	26.69	40.00	13.31	100	101	PK	Vertical	PASS
4	250.19	38.37	-8.70	29.67	47.00	17.33	100	38	PK	Vertical	PASS
5	374.835	33.20	-5.71	27.49	47.00	19.51	100	61	PK	Vertical	PASS
6	625.095	30.85	-0.34	30.51	47.00	16.49	100	348	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-55)

Horizontal

Test Graph

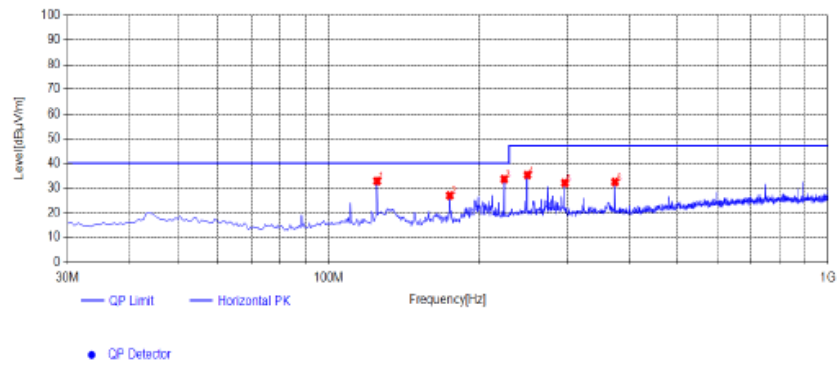

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	46.08	-13.24	32.84	40.00	7.16	100	26	PK	Horizontal	PASS
2	175.015	39.55	-12.53	27.02	40.00	12.98	100	154	PK	Horizontal	PASS
3	224.97	43.03	-9.43	33.60	40.00	6.40	100	321	PK	Horizontal	PASS
4	250.19	43.97	-8.70	35.27	47.00	11.73	100	130	PK	Horizontal	PASS
5	297.235	39.64	-7.55	32.09	47.00	14.91	100	66	PK	Horizontal	PASS
6	374.835	38.14	-5.71	32.43	47.00	14.57	100	3	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading (dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

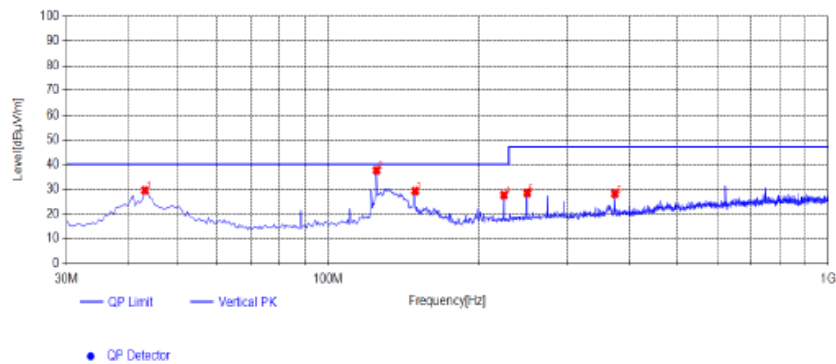

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.095	41.08	-11.52	29.56	40.00	10.44	100	221	PK	Vertical	PASS
2	125.06	50.81	-13.24	37.57	40.00	2.43	100	324	PK	Vertical	PASS
3	149.31	43.51	-14.21	29.30	40.00	10.70	100	197	PK	Vertical	PASS
4	224.97	37.11	-9.43	27.68	40.00	12.32	100	101	PK	Vertical	PASS
5	250.19	37.17	-8.70	28.47	47.00	18.53	100	101	PK	Vertical	PASS
6	374.835	33.93	-5.71	28.22	47.00	18.78	100	51	PK	Vertical	PASS

Note:1. Result (dBuV/m) = Reading (dBuV/m) + Factor (dB) .


2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Version C:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-55)

Horizontal

Test Graph

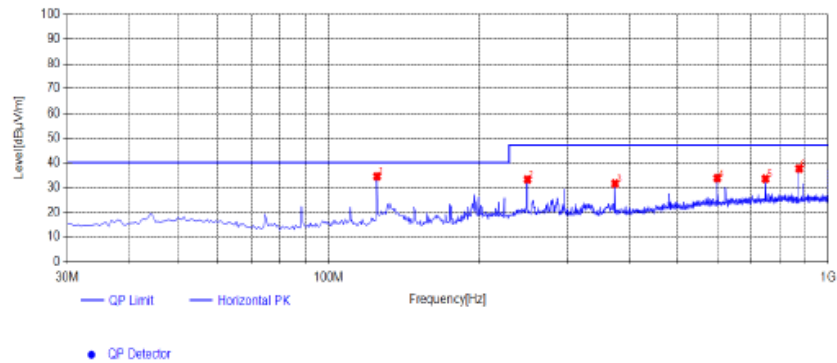

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	47.72	-13.24	34.48	40.00	5.52	100	120	PK	Horizontal	PASS
2	250.19	41.95	-8.70	33.26	47.00	13.74	100	358	PK	Horizontal	PASS
3	374.835	37.32	-5.71	31.61	47.00	15.39	100	6	PK	Horizontal	PASS
4	600.36	34.31	-0.55	33.76	47.00	13.24	100	36	PK	Horizontal	PASS
5	750.225	32.23	1.28	33.51	47.00	13.49	100	320	PK	Horizontal	PASS
6	875.355	35.96	1.64	37.60	47.00	9.40	100	50	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

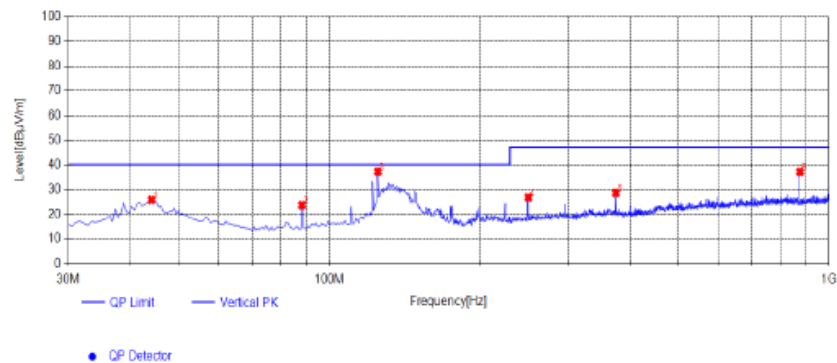

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	44.065	37.37	-11.45	25.92	40.00	14.08	100	42	PK	Vertical	PASS
2	88.2	37.28	-13.50	23.78	40.00	16.22	100	114	PK	Vertical	PASS
3	125.06	50.46	-13.24	37.22	40.00	2.78	100	328	PK	Vertical	PASS
4	250.19	35.61	-8.70	26.91	47.00	20.09	100	207	PK	Vertical	PASS
5	374.835	34.39	-5.71	28.68	47.00	18.32	100	304	PK	Vertical	PASS
6	875.355	35.46	1.64	37.10	47.00	9.90	100	2	PK	Vertical	PASS


Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-55)

Horizontal

Test Graph

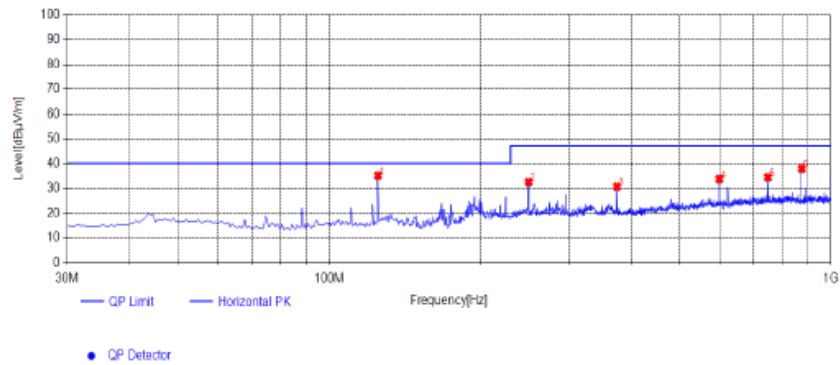

Suspected List


N.O.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	125.06	48.35	-13.24	35.11	40.00	4.89	100	113	PK	Horizontal	PASS
2	249.705	41.26	-8.72	32.54	47.00	14.46	100	154	PK	Horizontal	PASS
3	374.835	36.42	-5.71	30.71	47.00	16.29	100	6	PK	Horizontal	PASS
4	599.875	34.27	-0.54	33.73	47.00	13.27	100	40	PK	Horizontal	PASS
5	750.225	33.13	1.28	34.41	47.00	12.59	100	310	PK	Horizontal	PASS
6	875.355	36.21	1.64	37.85	47.00	9.15	100	56	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Vertical

Test Graph

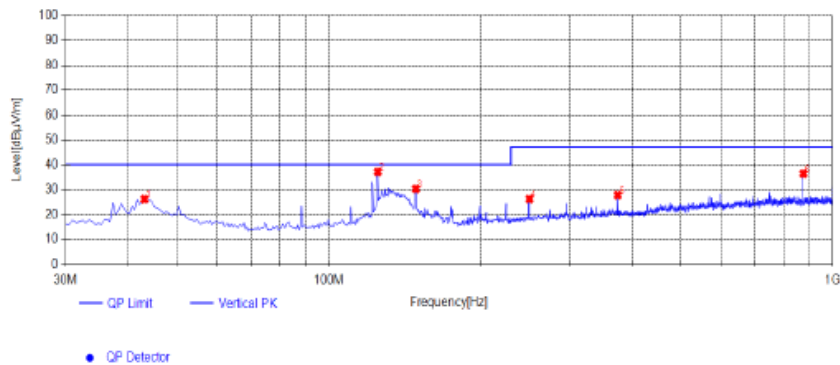

Suspected List


N.O.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	43.095	37.79	-11.52	26.27	40.00	13.73	100	31	PK	Vertical	PASS
2	125.06	50.34	-13.24	37.10	40.00	2.90	100	307	PK	Vertical	PASS
3	148.825	44.56	-14.21	30.35	40.00	9.65	100	354	PK	Vertical	PASS
4	250.19	35.05	-8.70	26.35	47.00	20.65	100	214	PK	Vertical	PASS
5	374.835	33.57	-5.71	27.86	47.00	19.14	100	281	PK	Vertical	PASS
6	875.355	34.76	1.64	36.40	47.00	10.60	100	357	PK	Vertical	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

5. FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT

5.1. Block Diagram of Test Setup

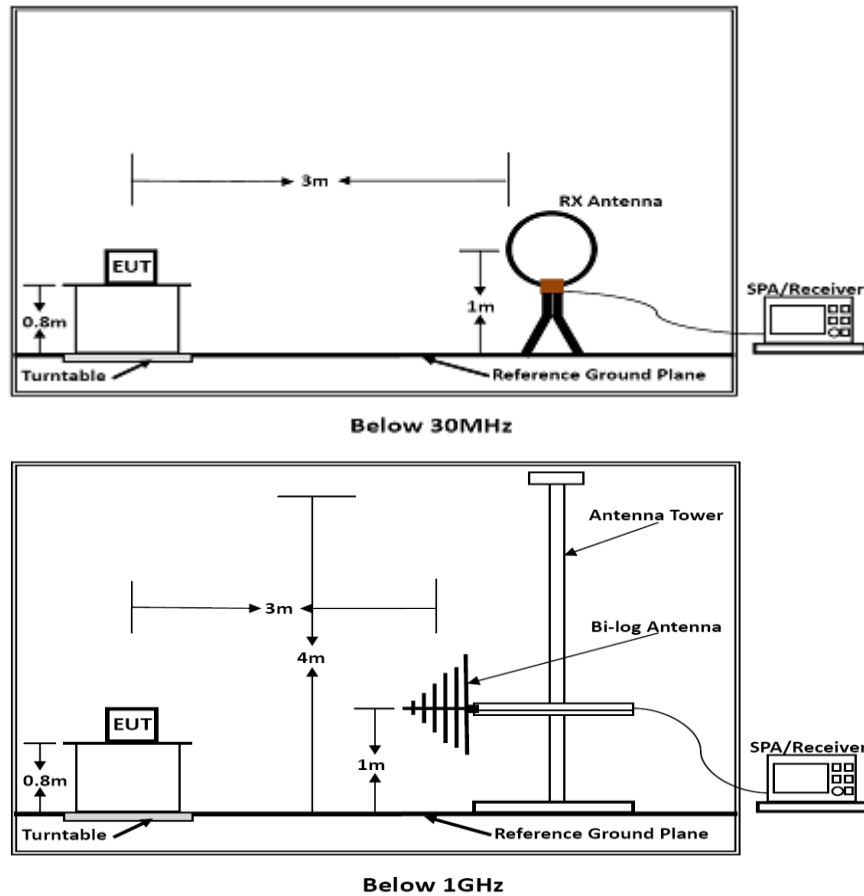

5.2. Field strength of fundamental emissions limit and Mask limit

The field strength of fundamental emissions shall not exceed 15848 microvolts/meter at 30 meters. The emissions limit in this paragraph is based on measurement instrumentation employing a QP detector.

Frequencies (MHz)	Field Strength (microvolts/meter)	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
13.553 ~ 13.567MHz	15848 at 30m	103.08 (QP)	124 (QP)

Mask Limit:

Frequency (MHz)	Limit (dB μ V/m)	Distance (m)
1.705-13.110	69.5	3
13.110-13.410	80.5	3
13.410-13.553	90.5	3
13.553-13.567	124.0	3
13.567-13.710	90.5	3
13.710-14.010	80.5	3
14.010-30.000	69.5	3

5.3. Test Results

Temperature	24.5℃	Humidity	53.7%
Test Engineer	Evan Ouyang	Configurations	NFC

PASS.

The test data please refer to following page:

Version A(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-52):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.18	33.95	20.18	54.13	80.50	26.37	QP
2	13.45	30.86	20.18	51.04	90.50	39.46	QP
3	13.56	45.28	20.18	65.46	124.00	58.54	QP
4	13.59	27.22	20.18	47.40	90.50	43.10	QP
5	13.67	27.14	20.18	47.32	90.50	43.18	QP
6	14.69	33.07	21.18	54.25	69.50	15.25	QP

Version A(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-51):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.24	33.45	20.18	53.63	80.50	26.87	QP
2	13.46	31.41	20.18	51.59	90.50	38.91	QP
3	13.56	36.44	20.18	56.62	124.00	67.38	QP
4	13.59	32.39	20.18	52.57	90.50	37.93	QP
5	13.66	30.80	20.18	50.98	90.50	39.52	QP
6	14.74	28.27	21.18	49.45	69.50	20.05	QP

Version A(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-55):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.15	29.10	20.18	49.28	80.50	31.22	QP
2	13.40	35.67	20.18	55.85	90.50	34.65	QP
3	13.56	39.56	20.18	59.74	124.00	64.26	QP
4	13.57	32.91	20.18	53.09	90.50	37.41	QP
5	13.68	33.78	20.18	53.96	90.50	36.54	QP
6	14.73	29.44	21.18	50.62	69.50	18.88	QP

Version B(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-52):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.17	35.71	20.18	55.89	80.50	24.61	QP
2	13.47	28.99	20.18	49.17	90.50	41.33	QP
3	13.56	50.82	20.18	71.00	124.00	53.00	QP
4	13.59	33.42	20.18	53.60	90.50	36.90	QP
5	13.65	32.32	20.18	52.50	90.50	38.00	QP
6	14.70	27.23	21.18	48.41	69.50	21.09	QP

Version B(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-51):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.25	33.46	20.18	53.64	80.50	26.86	QP
2	13.47	28.22	20.18	48.40	90.50	42.10	QP
3	13.56	40.47	20.18	60.65	124.00	63.35	QP
4	13.54	28.76	20.18	48.94	90.50	41.56	QP
5	13.60	32.22	20.18	52.40	90.50	38.10	QP
6	14.71	30.07	21.18	51.25	69.50	18.25	QP

Version B(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-55):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.23	35.64	20.18	55.82	80.50	24.68	QP
2	13.41	31.71	20.18	51.89	90.50	38.61	QP
3	13.56	43.24	20.18	63.42	124.00	60.58	QP
4	13.60	28.69	20.18	48.87	90.50	41.63	QP
5	13.62	34.33	20.18	54.51	90.50	35.99	QP
6	14.75	33.33	21.18	54.51	69.50	14.99	QP

Version C(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-52):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.23	36.55	20.18	56.73	80.50	23.77	QP
2	13.42	31.24	20.18	51.42	90.50	39.08	QP
3	13.56	44.28	20.18	64.46	124.00	59.54	QP
4	13.59	29.62	20.18	49.80	90.50	40.70	QP
5	13.58	34.67	20.18	54.85	90.50	35.65	QP
6	14.72	33.76	21.18	54.94	69.50	14.56	QP

Version C(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-51):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.22	28.52	20.18	48.70	80.50	31.80	QP
2	13.42	35.00	20.18	55.18	90.50	35.32	QP
3	13.56	40.17	20.18	60.35	124.00	63.65	QP
4	13.63	32.39	20.18	52.57	90.50	37.93	QP
5	13.63	29.40	20.18	49.58	90.50	40.92	QP
6	14.75	30.16	21.18	51.34	69.50	18.16	QP

Version C(Adapter: ADS-65HI-19A-124060F, NFC antenna Model:DS2-55):

	Freq.(MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin dB	Remark
1	13.16	28.08	20.18	48.26	80.50	32.24	QP
2	13.41	29.83	20.18	50.01	90.50	40.49	QP
3	13.56	40.54	20.18	60.72	124.00	63.28	QP
4	13.55	29.00	20.18	49.18	90.50	41.32	QP
5	13.62	34.29	20.18	54.47	90.50	36.03	QP
6	14.71	31.69	21.18	52.87	69.50	16.63	QP

*Note: Factor= Antenna Factor + Cable Loss

Emission level (dBuV/m) = 20 log Emission level (μV/m).

Measured distance is 3m.

All emissions emit from non-NFC function of digital unintentional emissions. All NFC's spurious emissions are below 20dB of limits.

NOTE: All the modes have been tested and recorded worst mode in the report.

6. BANDWIDTH OF THE OPERATING FREQUENCY

6.1. Standard Applicable


Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 ~ 13.567MHz).

6.2. Test Result

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Evan Ouyang	Configurations	NFC

Carrier Frequency (MHz)	20dB Bandwidth (KHz)	F _L (MHz)	F _H (MHz)
13.56	0.116	13.502320	13.61832

Please refer to the test plot:

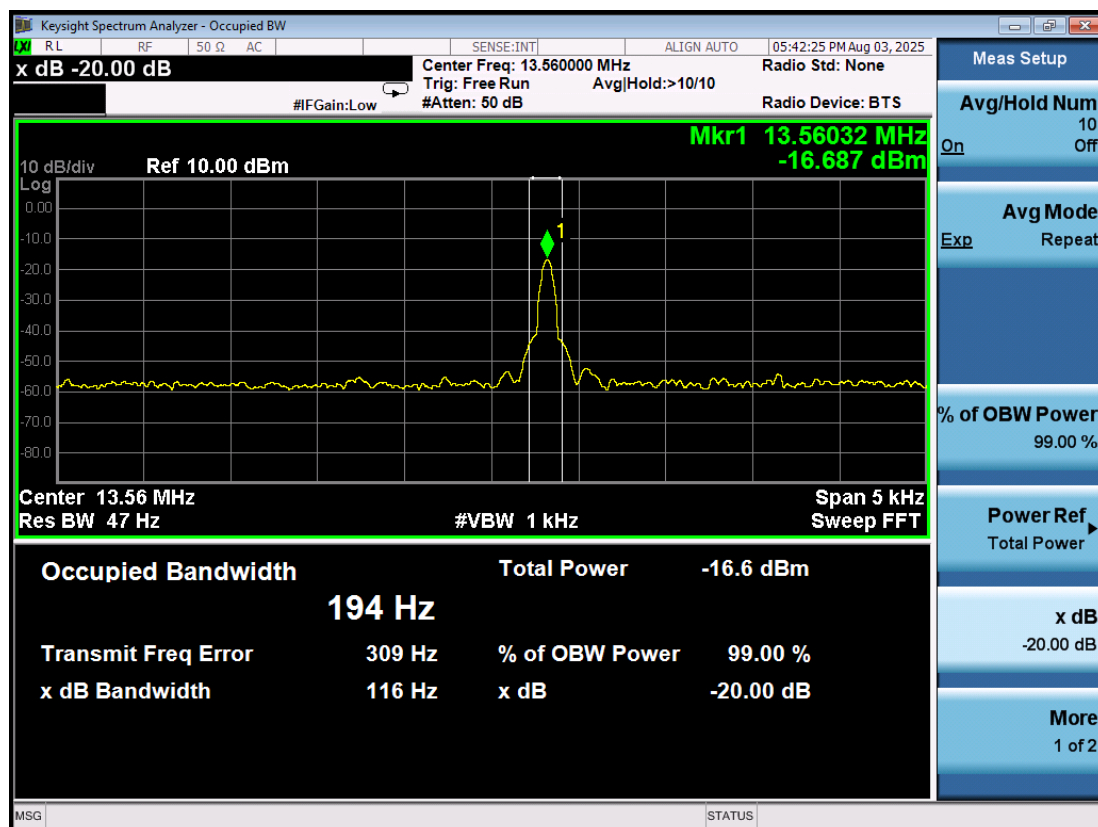

7. FREQUENCY STABILITY MEASUREMENT

7.1. Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a full charged battery.

7.2. Test Result

Temperature	24.5°C	Humidity	53.7%
Test Engineer	Evan Ouyang	Configurations	NFC

Voltage vs. Frequency Stability

Voltage(V)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
DC 26.4V	13.560021	0.021	1.54	100
DC 24.0V	13.560029	0.029	2.17	100
DC 21.6V	13.560045	0.045	3.33	100

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)	Deviation (KHz)	Deviation (ppm)	Limit (ppm)
-20	13.560056	0.056	4.10	100
-10	13.560059	0.059	4.35	100
0	13.560032	0.032	2.34	100
10	13.560045	0.045	3.31	100
20	13.560022	0.022	1.65	100
30	13.560038	0.038	2.79	100
40	13.560038	0.038	2.83	100
45	13.560033	0.033	2.45	100

8. LINE CONDUCTED EMISSIONS

8.1. Standard Applicable

According to §15.207(a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency


DISTURBANCE Calculation

The AC mains conducted disturbance is calculated by adding the 10dB Pulse Limiter and Cable Factor and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$CD \text{ (dBμV)} = RA \text{ (dBμV)} + PL \text{ (dB)} + CL \text{ (dB)}$$

Where CD = Conducted Disturbance	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	PL = 10 dB Pulse Limiter Factor

8.2. Block Diagram of Test Setup

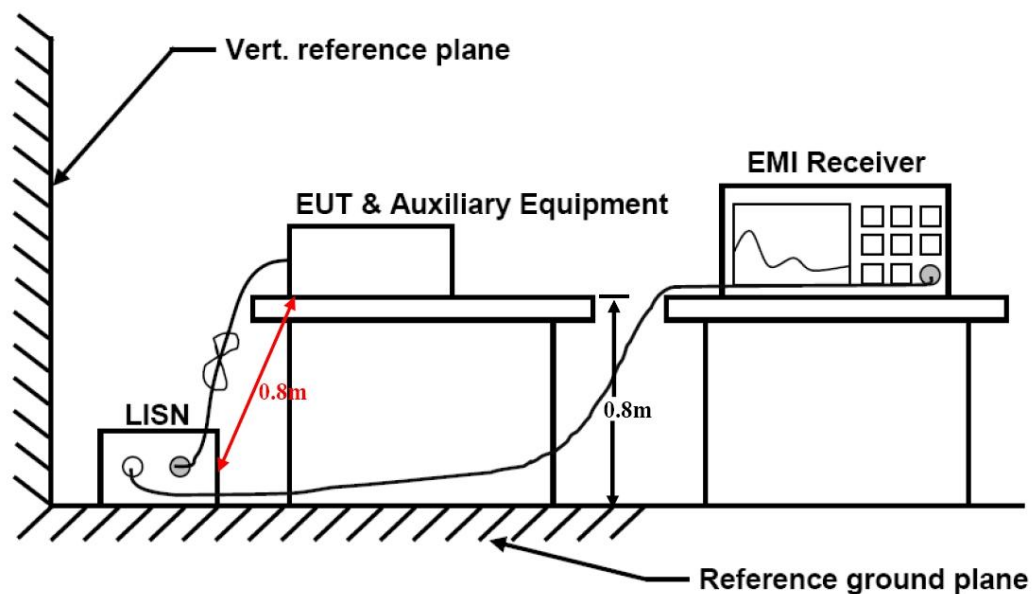


8.3. Test Results

Temperature	25°C	Humidity	60%
Test Engineer	Evan Ouyang	Configurations	NFC

Version A:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-52)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

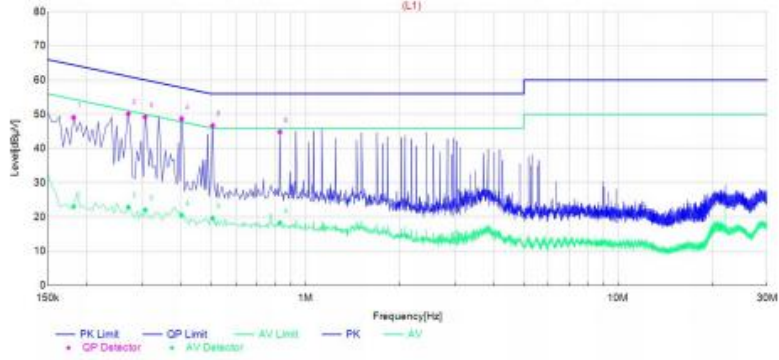


Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1815	38.89	12.86	10.20	49.09	23.06	64.42	54.42	15.33	31.36	L1	PASS
2	0.2715	40.04	12.75	10.11	50.15	22.86	61.07	51.07	10.92	28.21	L1	PASS
3	0.3075	39.14	12.02	10.11	49.25	22.13	60.04	50.04	10.79	27.91	L1	PASS
4	0.402	38.49	10.34	10.17	48.66	20.51	57.81	47.81	9.15	27.30	L1	PASS
5	0.5055	36.40	9.41	10.25	46.65	19.66	56.00	46.00	9.35	26.34	L1	PASS
6	0.8295	34.60	8.08	10.24	44.84	18.32	56.00	46.00	11.16	27.68	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

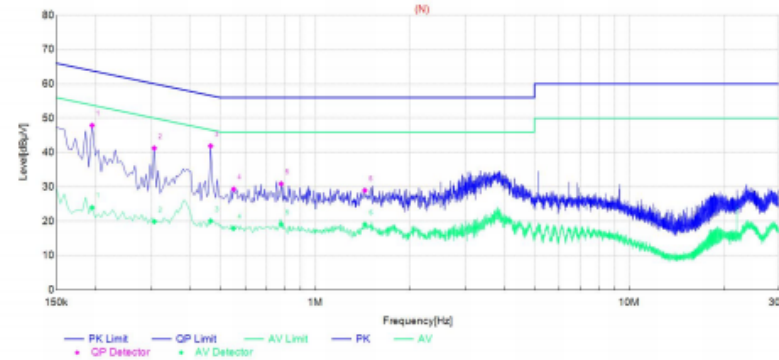

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.195	37.76	13.83	10.16	47.92	23.99	63.82	53.82	15.90	29.83	N	PASS
2	0.3075	31.17	9.80	10.11	41.28	19.91	60.04	50.04	18.76	30.13	N	PASS
3	0.465	31.69	9.88	10.23	41.92	20.11	56.60	46.60	14.68	26.49	N	PASS
4	0.5505	19.16	7.70	10.22	29.38	17.92	56.00	46.00	26.62	28.08	N	PASS
5	0.78	20.65	8.88	10.25	30.90	19.13	56.00	46.00	25.10	26.87	N	PASS
6	1.4415	18.75	8.87	10.23	28.98	19.10	56.00	46.00	27.02	26.90	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-52)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.159	39.83	18.80	10.31	50.14	29.11	65.52	55.52	15.38	26.41	L1	PASS
2	0.519	25.77	8.21	10.24	36.01	18.45	56.00	46.00	19.99	27.55	L1	PASS
3	0.717	17.26	11.52	10.23	27.49	21.75	56.00	46.00	28.51	24.25	L1	PASS
4	2.031	13.77	6.13	10.27	24.04	16.40	56.00	46.00	31.96	29.60	L1	PASS
5	2.031	13.17	5.62	10.27	23.44	15.89	56.00	46.00	32.56	30.11	L1	PASS
6	3.894	12.90	6.88	10.37	23.27	17.25	56.00	46.00	32.73	28.75	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version B:


Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-52)

Power supply:

AC 120V/60Hz

Polarization

L

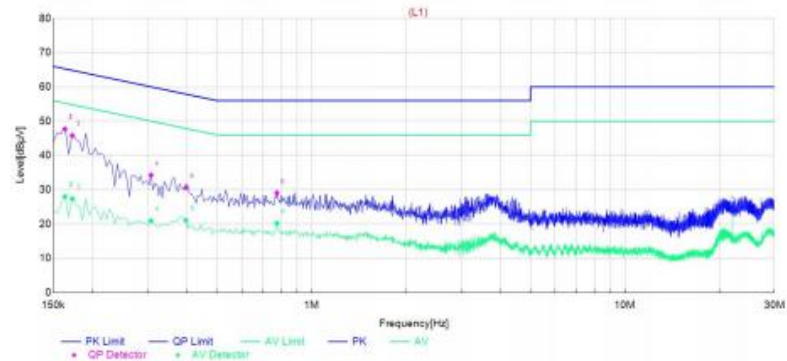

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1635	37.45	17.74	10.29	47.74	28.03	65.28	55.28	17.54	27.25	L1	PASS
2	0.1635	37.45	17.74	10.29	47.74	28.03	65.28	55.28	17.54	27.25	L1	PASS
3	0.1725	35.59	17.15	10.24	45.83	27.39	64.84	54.84	19.01	27.45	L1	PASS
4	0.3075	24.17	10.85	10.11	34.28	20.96	60.04	50.04	25.76	29.08	L1	PASS
5	0.3975	20.49	10.96	10.16	30.65	21.12	57.91	47.91	27.26	26.79	L1	PASS
6	0.7755	18.80	9.98	10.25	29.05	20.23	56.00	46.00	26.95	25.77	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).


2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:

AC 120V/60Hz

Polarization

N

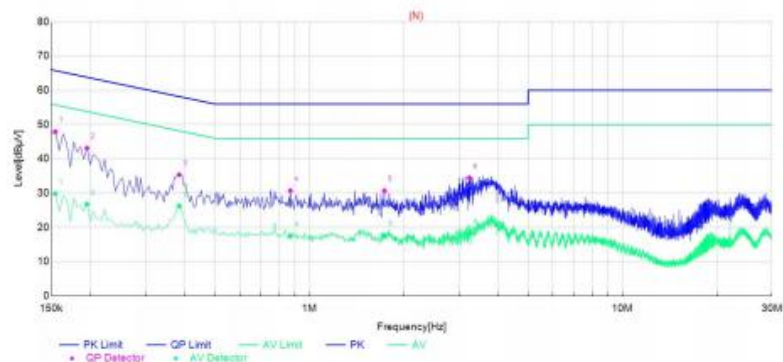

Final Data List


NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	37.59	19.51	10.33	47.92	29.84	65.75	55.75	17.83	25.91	N	PASS
2	0.195	32.99	16.63	10.16	43.15	26.79	63.82	53.82	20.67	27.03	N	PASS
3	0.384	25.21	16.02	10.15	35.36	26.17	58.19	48.19	22.83	22.02	N	PASS
4	0.87	20.50	7.21	10.23	30.73	17.44	56.00	46.00	25.27	28.56	N	PASS
5	1.7385	20.43	7.33	10.25	30.68	17.58	56.00	46.00	25.32	28.42	N	PASS
6	3.246	24.09	7.92	10.35	34.44	18.27	56.00	46.00	21.56	27.73	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-52)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

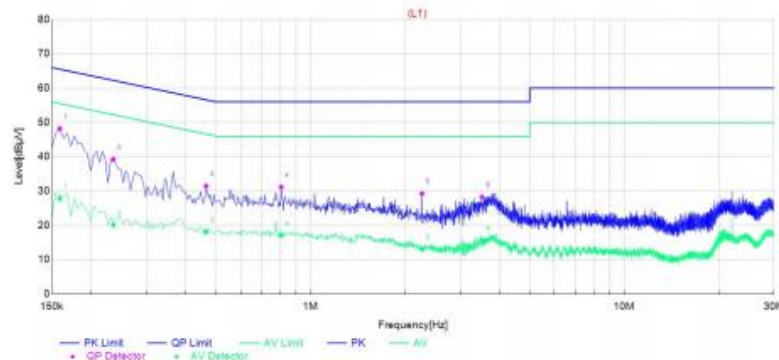


Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.159	37.88	17.48	10.31	48.19	27.79	65.52	55.52	17.33	27.73	L1	PASS
2	0.2355	29.14	9.99	10.13	39.27	20.12	62.25	52.25	22.98	32.13	L1	PASS
3	0.465	21.23	7.84	10.23	31.46	18.07	56.60	46.60	25.14	28.53	L1	PASS
4	0.807	20.90	6.84	10.25	31.15	17.09	56.00	46.00	24.85	28.91	L1	PASS
5	2.2695	18.99	2.78	10.29	29.28	13.07	56.00	46.00	26.72	32.93	L1	PASS
6	3.525	17.91	5.36	10.36	28.27	15.72	56.00	46.00	27.73	30.28	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

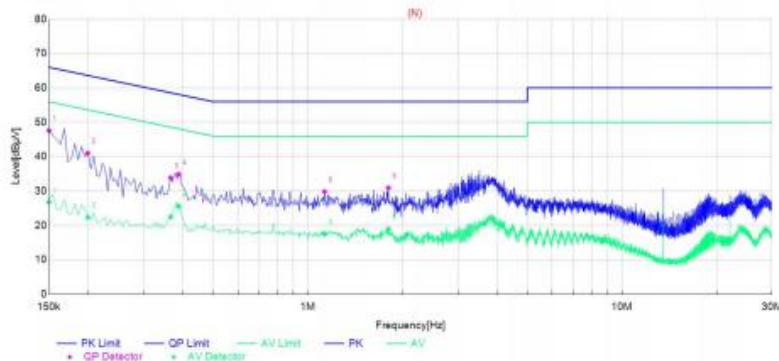

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.15	37.26	16.43	10.35	47.61	26.78	66.00	56.00	18.39	29.22	N	PASS
2	0.1995	30.88	12.27	10.15	41.03	22.42	63.63	53.63	22.60	31.21	N	PASS
3	0.366	23.75	12.35	10.14	33.89	22.49	58.59	48.59	24.70	26.10	N	PASS
4	0.3885	24.75	15.38	10.15	34.90	25.53	58.10	48.10	23.20	22.57	N	PASS
5	1.131	19.64	7.28	10.21	29.85	17.49	56.00	46.00	26.15	28.51	N	PASS
6	1.806	20.65	8.75	10.26	30.91	19.01	56.00	46.00	25.09	26.99	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version C:


Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-52)

Power supply:

AC 120V/60Hz

Polarization

L

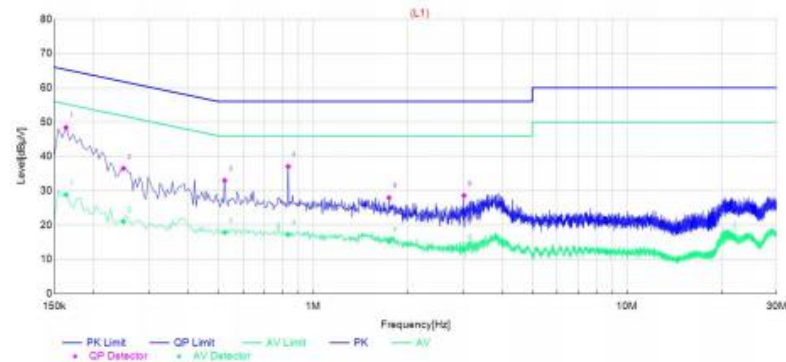

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1635	38.15	18.60	10.29	48.44	28.89	65.28	55.28	16.84	26.39	L1	PASS
2	0.249	26.42	10.89	10.12	36.54	21.01	61.79	51.79	25.25	30.78	L1	PASS
3	0.5235	22.75	7.61	10.24	32.99	17.85	56.00	46.00	23.01	28.15	L1	PASS
4	0.834	26.83	7.10	10.24	37.07	17.34	56.00	46.00	18.93	28.66	L1	PASS
5	1.7475	17.72	4.94	10.25	27.97	15.19	56.00	46.00	28.03	30.81	L1	PASS
6	3.03	18.27	2.61	10.34	28.61	12.95	56.00	46.00	27.39	33.05	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).


2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:

AC 120V/60Hz

Polarization

N

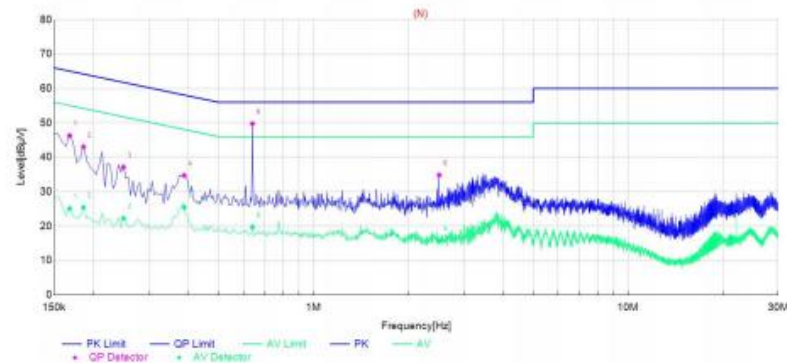

Final Data List


NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.168	36.03	14.84	10.27	46.30	25.11	65.06	55.06	18.76	29.95	N	PASS
2	0.186	32.89	15.24	10.18	43.07	25.42	64.21	54.21	21.14	28.79	N	PASS
3	0.249	27.04	12.13	10.12	37.16	22.25	61.79	51.79	24.63	29.54	N	PASS
4	0.3885	24.61	15.31	10.15	34.76	25.46	58.10	48.10	23.34	22.64	N	PASS
5	0.6405	39.57	9.48	10.21	49.78	19.69	56.00	46.00	6.22	26.31	N	PASS
6	2.5125	24.51	5.42	10.31	34.82	15.73	56.00	46.00	21.18	30.27	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-52)


Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

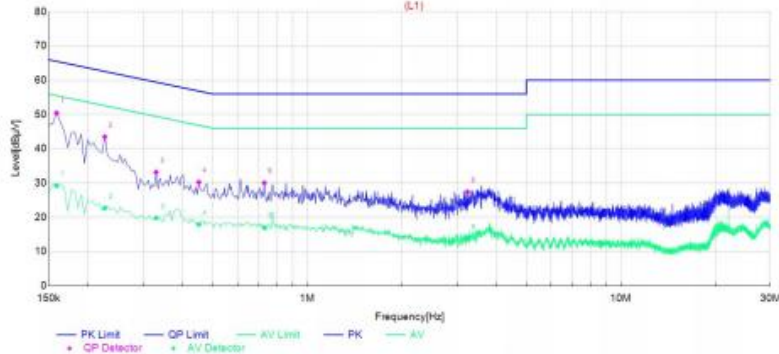

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.159	40.15	18.93	10.31	50.46	29.24	65.52	55.52	15.06	26.28	L1	PASS
2	0.2265	33.34	12.57	10.14	43.48	22.71	62.58	52.58	19.10	29.87	L1	PASS
3	0.33	23.07	9.68	10.12	33.19	19.80	59.45	49.45	26.26	29.65	L1	PASS
4	0.4515	20.04	7.72	10.22	30.26	17.94	56.85	46.85	26.59	28.91	L1	PASS
5	0.7305	19.83	6.80	10.23	30.06	17.03	56.00	46.00	25.94	28.97	L1	PASS
6	3.246	17.07	3.55	10.35	27.42	13.90	56.00	46.00	28.58	32.10	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

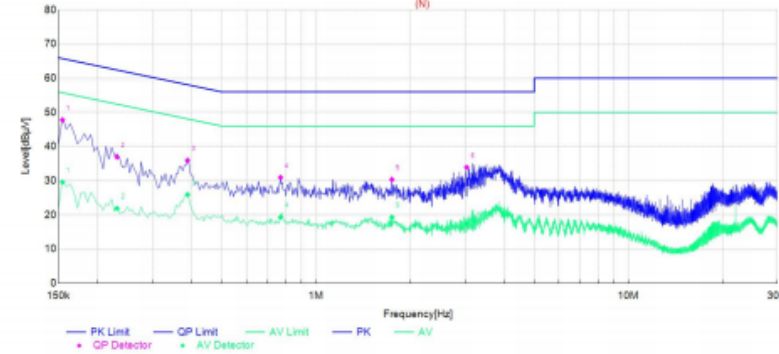

Version A:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-51)


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

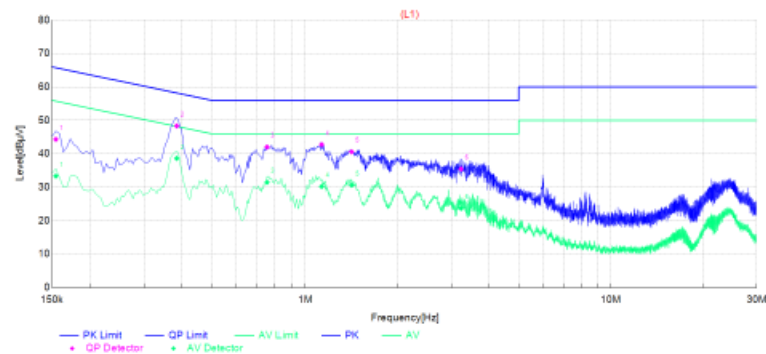

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	33.99	23.01	10.33	44.32	33.34	65.75	55.75	21.43	22.41	L1	PASS
2	0.384	38.18	28.48	10.15	48.33	38.63	58.19	48.19	9.86	9.56	L1	PASS
3	0.7575	31.79	21.23	10.24	42.03	31.47	56.00	46.00	13.97	14.53	L1	PASS
4	1.131	32.55	20.00	10.21	42.76	30.21	56.00	46.00	13.24	15.79	L1	PASS
5	1.419	30.37	20.39	10.23	40.60	30.62	56.00	46.00	15.40	15.38	L1	PASS
6	3.2325	25.12	13.32	10.35	35.47	23.67	56.00	46.00	20.53	22.33	L1	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

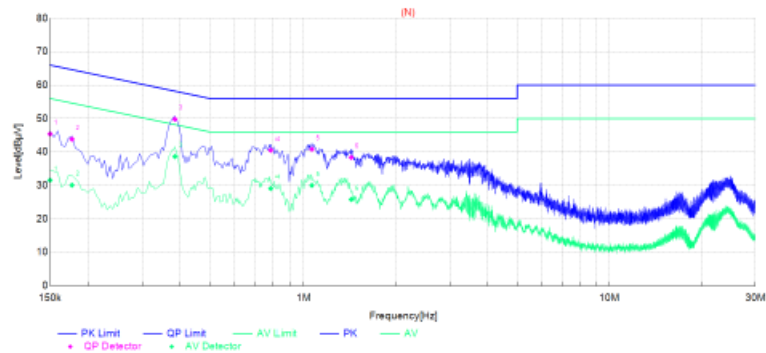

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.15	35.04	21.21	10.35	45.39	31.56	66.00	56.00	20.61	24.44	N	PASS
2	0.177	33.60	19.86	10.22	43.82	30.08	64.63	54.63	20.81	24.55	N	PASS
3	0.384	39.65	28.49	10.15	49.80	38.64	58.19	48.19	8.39	9.55	N	PASS
4	0.789	30.28	18.83	10.25	40.53	29.08	56.00	46.00	15.47	16.92	N	PASS
5	1.0635	30.64	19.81	10.20	40.84	30.01	56.00	46.00	15.16	15.99	N	PASS
6	1.4325	28.14	15.56	10.23	38.37	25.79	56.00	46.00	17.63	20.21	N	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-51)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	35.19	20.84	10.33	45.52	31.17	65.75	55.75	20.23	24.58	L1	PASS
2	0.177	32.60	18.39	10.22	42.82	28.61	64.63	54.63	21.81	26.02	L1	PASS
3	0.384	34.31	24.18	10.15	44.46	34.33	58.19	48.19	13.73	13.86	L1	PASS
4	0.5055	24.46	13.56	10.25	34.71	23.81	56.00	46.00	21.29	22.19	L1	PASS
5	1.0725	24.34	13.51	10.21	34.55	23.72	56.00	46.00	21.45	22.28	L1	PASS
6	1.671	22.53	13.80	10.25	32.78	24.05	56.00	46.00	23.22	21.95	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1725	32.00	21.86	10.24	42.24	32.10	64.84	54.84	22.60	22.74	N	PASS
2	0.3795	38.36	29.85	10.15	48.51	40.00	58.29	48.29	9.78	8.29	N	PASS
3	0.699	30.13	20.41	10.22	40.35	30.63	56.00	46.00	15.65	15.37	N	PASS
4	1.0725	29.43	21.32	10.21	39.64	31.53	56.00	46.00	16.36	14.47	N	PASS
5	2.0175	26.85	15.33	10.27	37.12	25.60	56.00	46.00	18.88	20.40	N	PASS
6	5.9505	19.88	5.40	10.48	30.36	15.88	60.00	50.00	29.64	34.12	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version B:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-51)


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

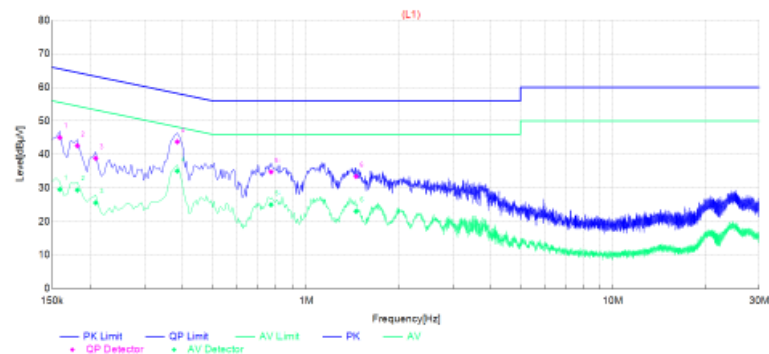

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.159	34.72	19.26	10.31	45.03	29.57	65.52	55.52	20.49	25.95	L1	PASS
2	0.1815	32.39	19.18	10.20	42.59	29.38	64.42	54.42	21.83	25.04	L1	PASS
3	0.2085	28.72	15.43	10.15	38.87	25.58	63.26	53.26	24.39	27.68	L1	PASS
4	0.384	33.63	24.91	10.15	43.78	35.06	58.19	48.19	14.41	13.13	L1	PASS
5	0.7755	24.54	14.76	10.25	34.79	25.01	56.00	46.00	21.21	20.99	L1	PASS
6	1.455	23.21	12.80	10.23	33.44	23.03	56.00	46.00	22.56	22.97	L1	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

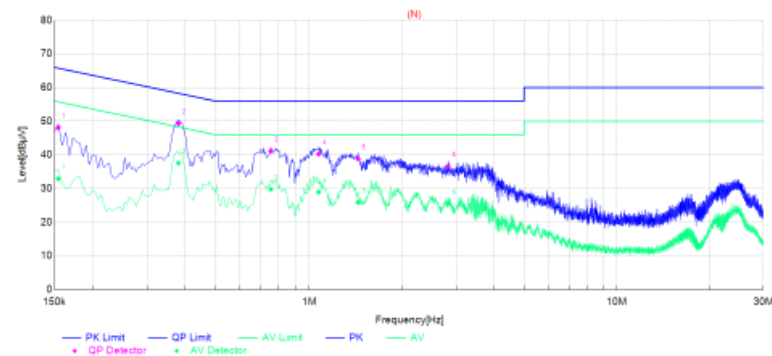

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	37.77	22.59	10.33	48.10	32.92	65.75	55.75	17.65	22.83	N	PASS
2	0.3795	39.19	27.41	10.15	49.34	37.56	58.29	48.29	8.95	10.73	N	PASS
3	0.7575	30.92	19.56	10.24	41.16	29.80	56.00	46.00	14.84	16.20	N	PASS
4	1.0725	30.04	18.74	10.21	40.25	28.95	56.00	46.00	15.75	17.05	N	PASS
5	1.4415	28.58	15.67	10.23	38.81	25.90	56.00	46.00	17.19	20.10	N	PASS
6	2.8275	26.23	15.21	10.33	36.56	25.54	56.00	46.00	19.44	20.46	N	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-51)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.159	35.37	21.04	10.31	45.68	31.35	65.52	55.52	19.84	24.17	L1	PASS
2	0.186	32.98	19.54	10.18	43.16	29.72	64.21	54.21	21.05	24.49	L1	PASS
3	0.3795	35.30	25.75	10.15	45.45	35.90	58.29	48.29	12.84	12.39	L1	PASS
4	0.8025	25.21	13.26	10.25	35.46	23.51	56.00	46.00	20.54	22.49	L1	PASS
5	1.0455	24.75	12.64	10.20	34.95	22.84	56.00	46.00	21.05	23.16	L1	PASS
6	1.473	24.13	11.87	10.23	34.36	22.10	56.00	46.00	21.64	23.90	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	34.33	22.59	10.33	44.66	32.92	65.75	55.75	21.09	22.83	N	PASS
2	0.1725	31.44	20.67	10.24	41.68	30.91	64.84	54.84	23.16	23.93	N	PASS
3	0.384	37.71	28.43	10.15	47.86	38.58	58.19	48.19	10.33	9.61	N	PASS
4	0.7035	29.96	20.11	10.22	40.18	30.33	56.00	46.00	15.82	15.67	N	PASS
5	1.077	30.50	20.09	10.21	40.71	30.30	56.00	46.00	15.29	15.70	N	PASS
6	1.635	27.44	20.50	10.24	37.68	30.74	56.00	46.00	18.32	15.26	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).
2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version C:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-51)


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

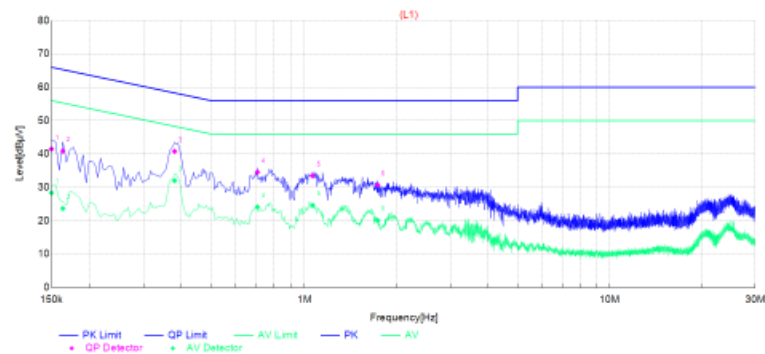

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.15	31.14	17.99	10.35	41.49	28.34	66.00	56.00	24.51	27.66	L1	PASS
2	0.1635	30.60	13.38	10.29	40.89	23.67	65.28	55.28	24.39	31.61	L1	PASS
3	0.3795	30.66	21.85	10.15	40.81	32.00	58.29	48.29	17.48	16.29	L1	PASS
4	0.708	24.35	13.92	10.23	34.58	24.15	56.00	46.00	21.42	21.85	L1	PASS
5	1.0635	23.28	14.41	10.20	33.48	24.61	56.00	46.00	22.52	21.39	L1	PASS
6	1.7385	20.50	9.89	10.25	30.75	20.14	56.00	46.00	25.25	25.86	L1	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

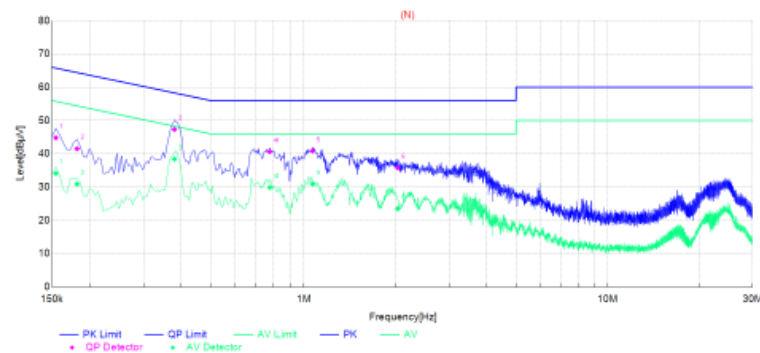

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	34.47	23.77	10.33	44.80	34.10	65.75	55.75	20.95	21.65	N	PASS
2	0.1815	31.32	20.71	10.20	41.52	30.91	64.42	54.42	22.90	23.51	N	PASS
3	0.3795	37.17	28.27	10.15	47.32	38.42	58.29	48.29	10.97	9.87	N	PASS
4	0.78	30.43	19.63	10.25	40.68	29.88	56.00	46.00	15.32	16.12	N	PASS
5	1.068	30.66	20.71	10.20	40.86	30.91	56.00	46.00	15.14	15.09	N	PASS
6	2.031	25.51	13.21	10.27	35.78	23.48	56.00	46.00	20.22	22.52	N	PASS


Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-51)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

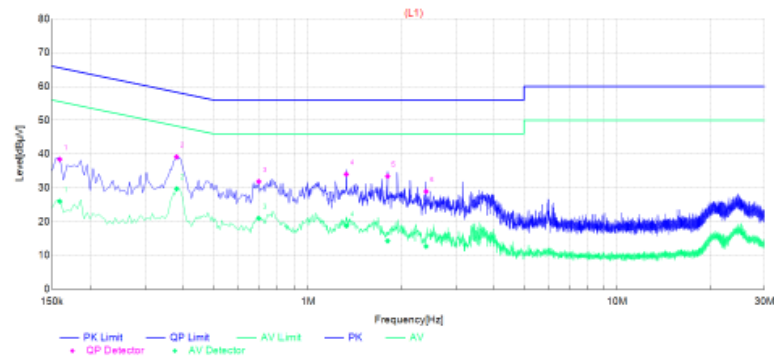


Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.159	28.14	15.69	10.31	38.45	26.00	65.52	55.52	27.07	29.52	L1	PASS
2	0.3795	29.02	19.55	10.15	39.17	29.70	58.29	48.29	19.12	18.59	L1	PASS
3	0.699	21.66	10.75	10.22	31.88	20.97	56.00	46.00	24.12	25.03	L1	PASS
4	1.329	23.79	8.55	10.22	34.01	18.77	56.00	46.00	21.99	27.23	L1	PASS
5	1.8105	23.16	4.04	10.26	33.42	14.30	56.00	46.00	22.58	31.70	L1	PASS
6	2.4045	18.62	2.40	10.30	28.92	12.70	56.00	46.00	27.08	33.30	L1	PASS

Note:1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

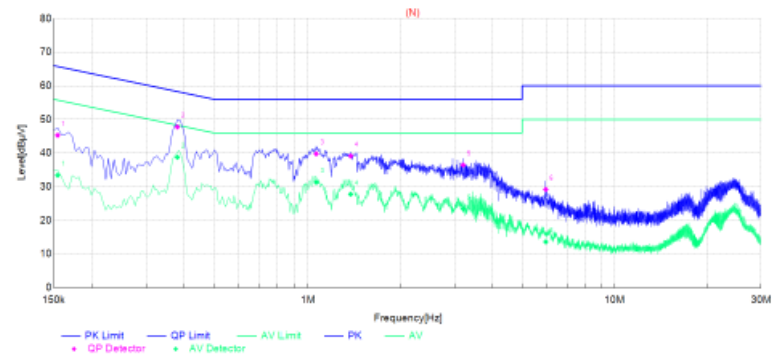

Final Data List												
NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.1545	34.97	23.08	10.33	45.30	33.41	65.75	55.75	20.45	22.34	N	PASS
2	0.3795	37.64	28.61	10.15	47.79	38.76	58.29	48.29	10.50	9.63	N	PASS
3	1.0635	29.58	21.10	10.20	39.78	31.30	56.00	46.00	16.22	14.70	N	PASS
4	1.3795	28.90	17.55	10.23	39.13	27.78	56.00	46.00	16.87	18.22	N	PASS
5	3.2055	26.10	13.09	10.35	36.45	23.44	56.00	46.00	19.55	22.56	N	PASS
6	5.9505	18.72	3.15	10.48	29.20	13.63	60.00	50.00	30.80	36.37	N	PASS

Note:1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version A:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-55)


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

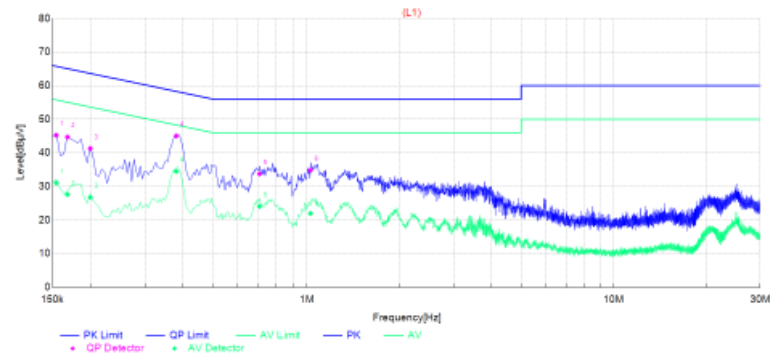

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	34.90	20.71	10.33	45.23	31.04	65.75	55.75	20.52	24.71	L1	PASS
2	0.168	34.44	17.34	10.27	44.71	27.61	65.06	55.06	20.35	27.45	L1	PASS
3	0.1995	31.16	16.63	10.15	41.31	26.78	63.63	53.63	22.32	26.85	L1	PASS
4	0.3795	34.87	24.34	10.15	45.02	34.49	58.29	48.29	13.27	13.80	L1	PASS
5	0.708	23.52	13.83	10.23	33.75	24.06	56.00	46.00	22.25	21.94	L1	PASS
6	1.0275	24.64	11.76	10.20	34.84	21.96	56.00	46.00	21.16	24.04	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

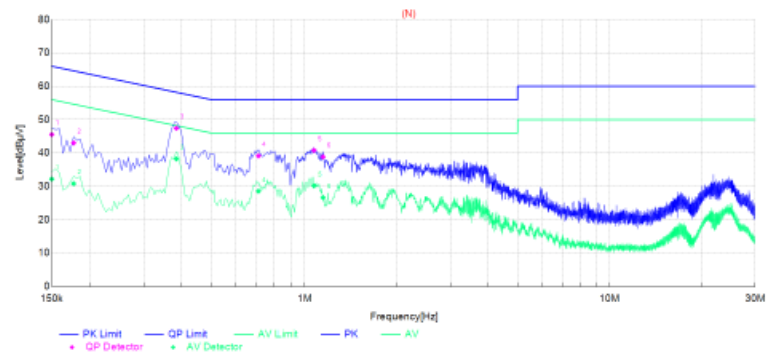

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.15	35.19	21.85	10.35	45.54	32.20	66.00	56.00	20.46	23.80	N	PASS
2	0.177	32.80	20.60	10.22	43.02	30.82	64.63	54.63	21.61	23.81	N	PASS
3	0.384	37.28	28.08	10.15	47.43	38.23	58.19	48.19	10.76	9.96	N	PASS
4	0.7125	28.89	18.33	10.23	39.12	28.56	56.00	46.00	16.88	17.44	N	PASS
5	1.0725	30.60	19.94	10.21	40.81	30.15	56.00	46.00	15.19	15.85	N	PASS
6	1.149	28.62	16.42	10.21	38.83	26.63	56.00	46.00	17.17	19.37	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-55)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.15	37.29	21.38	10.35	47.64	31.73	66.00	56.00	18.36	24.27	L1	PASS
2	0.2085	31.33	15.69	10.15	41.48	25.84	63.26	53.26	21.78	27.42	L1	PASS
3	0.3795	33.60	24.45	10.15	43.75	34.60	58.29	48.29	14.54	13.69	L1	PASS
4	0.789	25.25	14.34	10.25	35.50	24.59	56.00	46.00	20.50	21.41	L1	PASS
5	1.041	24.69	15.42	10.20	34.89	25.62	56.00	46.00	21.11	20.38	L1	PASS
6	1.3155	22.33	12.71	10.22	32.55	22.93	56.00	46.00	23.45	23.07	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	36.57	22.15	10.33	46.90	32.48	65.75	55.75	18.85	23.27	N	PASS
2	0.1815	35.20	20.15	10.20	45.40	30.35	64.42	54.42	19.02	24.07	N	PASS
3	0.384	37.59	27.92	10.15	47.74	38.07	58.19	48.19	10.45	10.12	N	PASS
4	0.7945	27.92	18.75	10.25	38.17	29.00	56.00	46.00	17.83	17.00	N	PASS
5	1.0725	28.93	18.25	10.21	39.14	28.46	56.00	46.00	18.86	17.54	N	PASS
6	1.4055	28.99	16.16	10.23	39.22	26.39	56.00	46.00	16.78	19.61	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Version B:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-55)


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

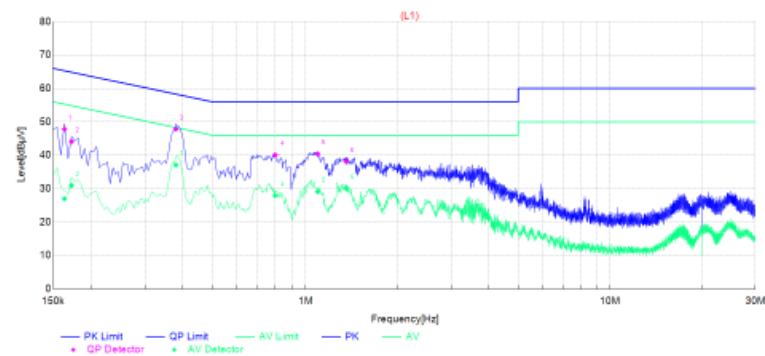

Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1635	37.53	16.69	10.29	47.82	26.98	65.28	55.28	17.46	28.30	L1	PASS
2	0.1725	33.88	20.71	10.24	44.12	30.95	64.84	54.84	20.72	23.89	L1	PASS
3	0.3795	37.71	26.91	10.15	47.86	37.06	58.29	48.29	10.43	11.23	L1	PASS
4	0.8025	29.85	17.67	10.25	40.10	27.92	56.00	46.00	15.90	18.08	L1	PASS
5	1.095	30.21	18.88	10.21	40.42	29.09	56.00	46.00	15.58	16.91	L1	PASS
6	1.3605	27.91	19.85	10.23	38.14	30.08	56.00	46.00	17.86	15.92	L1	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

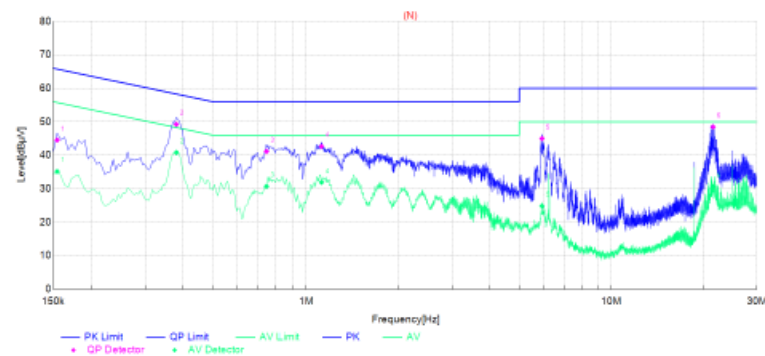


Final Data List

NO.	Frequency	QP Reading	AVG. Reading	Factor	QP Result	AVG. Result	QP Limit	AVG. Limit	QP Margin	AVG. Margin	Line	Remark
1	0.1545	34.19	24.80	10.33	44.52	35.13	65.75	55.75	21.23	20.62	N	PASS
2	0.3795	39.08	30.64	10.15	49.23	40.79	58.29	48.29	9.06	7.50	N	PASS
3	0.7485	30.90	20.48	10.24	41.14	30.72	56.00	46.00	14.86	15.28	N	PASS
4	1.122	32.43	21.71	10.21	42.64	31.92	56.00	46.00	13.36	14.08	N	PASS
5	5.9145	34.52	14.37	10.47	44.99	24.84	60.00	50.00	15.01	25.16	N	PASS
6	21.525	37.00	19.10	11.47	48.47	30.57	60.00	50.00	11.53	19.43	N	PASS

Note:1. Result (dBuV) = Reading (dBuV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-55)

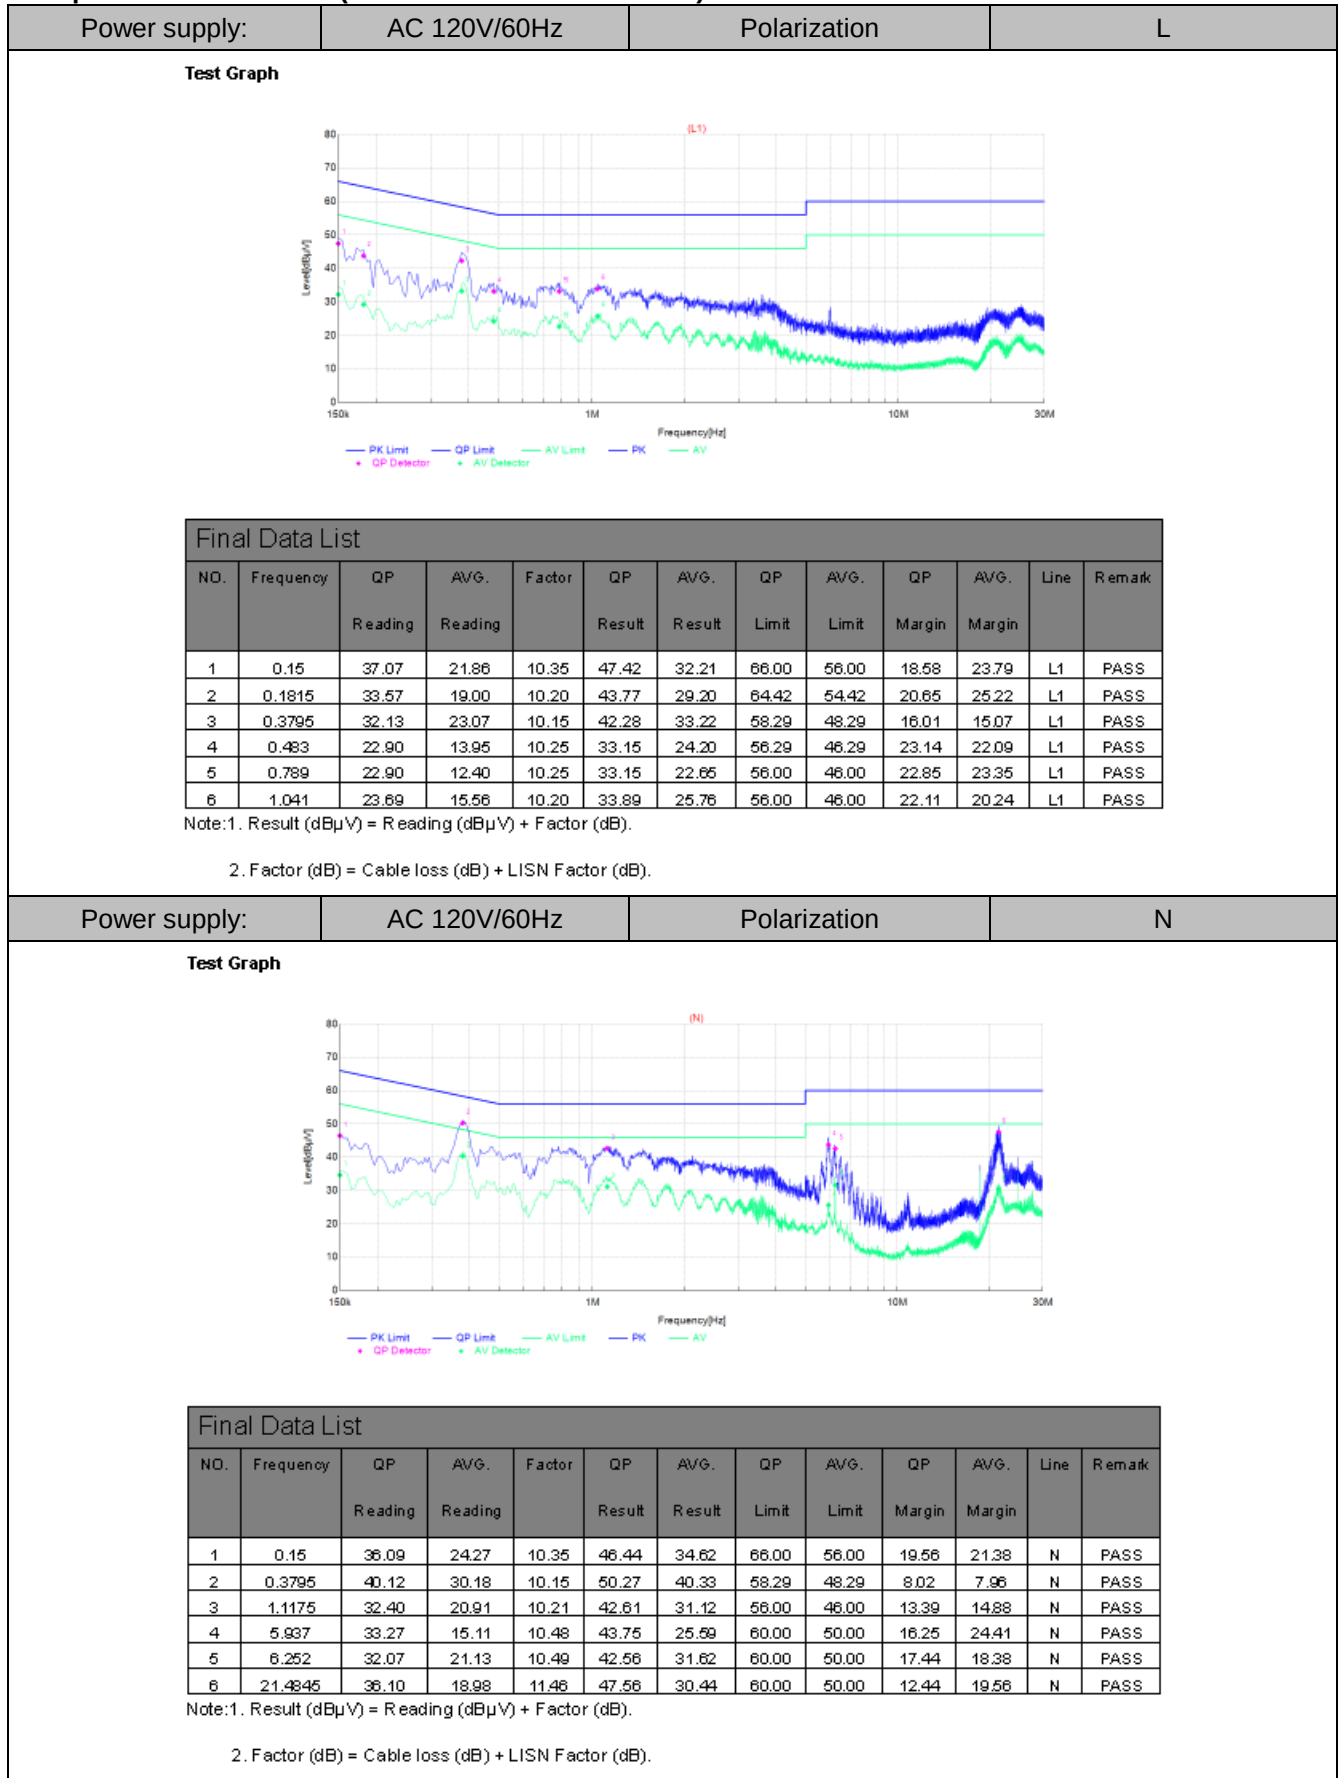

Version C:

Adapter: ADS-65HI-19A-124060F(NFC antenna Model:DS2-55)


Power supply:

AC 120V/60Hz

Polarization

L

Test Graph

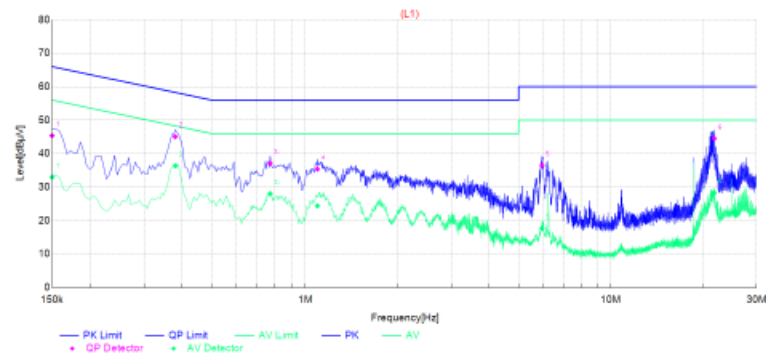

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	35.02	22.60	10.35	45.37	32.95	66.00	56.00	20.63	23.05	L1	PASS
2	0.3795	34.91	26.18	10.15	45.06	36.33	58.29	48.29	13.23	11.96	L1	PASS
3	0.7755	26.85	17.78	10.25	37.10	28.03	56.00	46.00	18.90	17.97	L1	PASS
4	1.095	25.18	14.19	10.21	35.39	24.40	56.00	46.00	20.61	21.60	L1	PASS
5	5.946	26.05	7.22	10.48	36.53	17.70	60.00	50.00	23.47	32.30	L1	PASS
6	21.7995	32.95	16.75	11.55	44.50	28.30	60.00	50.00	15.50	21.70	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


Power supply:

AC 120V/60Hz

Polarization

N

Test Graph

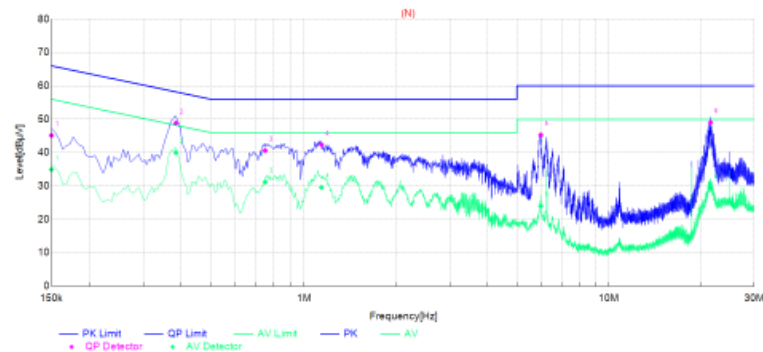

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.15	34.78	24.58	10.35	45.13	34.93	66.00	56.00	20.87	21.07	N	PASS
2	0.384	38.68	29.87	10.15	48.83	40.02	58.19	48.19	9.36	8.17	N	PASS
3	0.753	30.36	20.95	10.24	40.60	31.19	56.00	46.00	15.40	14.81	N	PASS
4	1.14	32.17	19.34	10.21	42.38	29.55	56.00	46.00	13.62	16.45	N	PASS
5	5.9685	34.77	13.53	10.48	45.25	24.01	60.00	50.00	14.75	25.99	N	PASS
6	21.5475	37.54	18.00	11.47	49.01	29.47	60.00	50.00	10.99	20.53	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Adapter: CYSE65-240250(NFC antenna Model:DS2-55)

Power supply:	AC 120V/60Hz	Polarization	L
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.3795	36.40	25.89	10.15	46.55	36.04	58.29	48.29	11.74	12.25	L1	PASS
2	0.4895	27.51	15.13	10.24	37.75	25.37	56.52	46.52	18.77	21.15	L1	PASS
3	0.7575	26.39	17.00	10.24	36.63	27.24	56.00	46.00	19.37	18.76	L1	PASS
4	1.122	26.61	16.22	10.21	36.82	26.43	56.00	46.00	19.18	19.57	L1	PASS
5	5.919	28.92	8.62	10.48	39.40	19.10	60.00	50.00	20.60	30.90	L1	PASS
6	21.489	34.74	14.23	11.55	46.29	25.78	60.00	50.00	13.71	24.22	L1	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Power supply:	AC 120V/60Hz	Polarization	N
---------------	--------------	--------------	---

Test Graph

Final Data List

NO.	Frequency	QP	AVG.	Factor	QP	AVG.	QP	AVG.	QP	AVG.	Line	Remark
		Reading	Reading		Result	Result	Limit	Limit	Margin	Margin		
1	0.3795	40.52	28.75	10.15	50.67	38.90	58.29	48.29	7.62	9.39	N	PASS
2	0.474	32.44	19.03	10.24	42.68	29.27	56.44	46.44	13.76	17.17	N	PASS
3	0.7575	30.26	21.74	10.24	40.50	31.98	56.00	46.00	15.50	14.02	N	PASS
4	1.131	31.36	22.53	10.21	41.57	32.74	56.00	46.00	14.43	13.26	N	PASS
5	5.9235	33.17	13.10	10.48	43.65	23.68	60.00	50.00	16.35	26.42	N	PASS
6	21.534	37.30	19.15	11.47	48.77	30.62	60.00	50.00	11.23	19.38	N	PASS

Note:1. Result (dBμV) = Reading (dBμV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

9. ANTENNA REQUIREMENTS

9.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

9.2. Antenna Connected Construction

9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2.2. Antenna Connector Construction

The gains of antenna used for transmitting is 0dBi, and the antenna is a Loop antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

9.2.3. Results: Compliance.

10. TEST SETUP PHOTOS OF THE EUT

Photo of Radiated Emissions Measurement

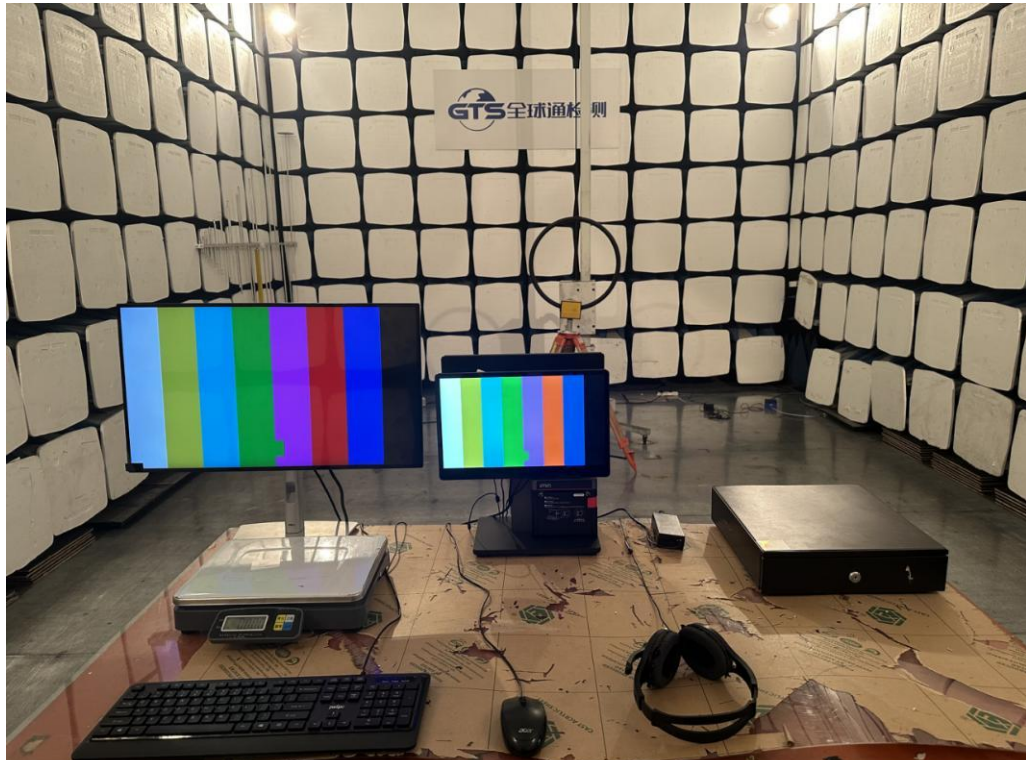


Fig. 1

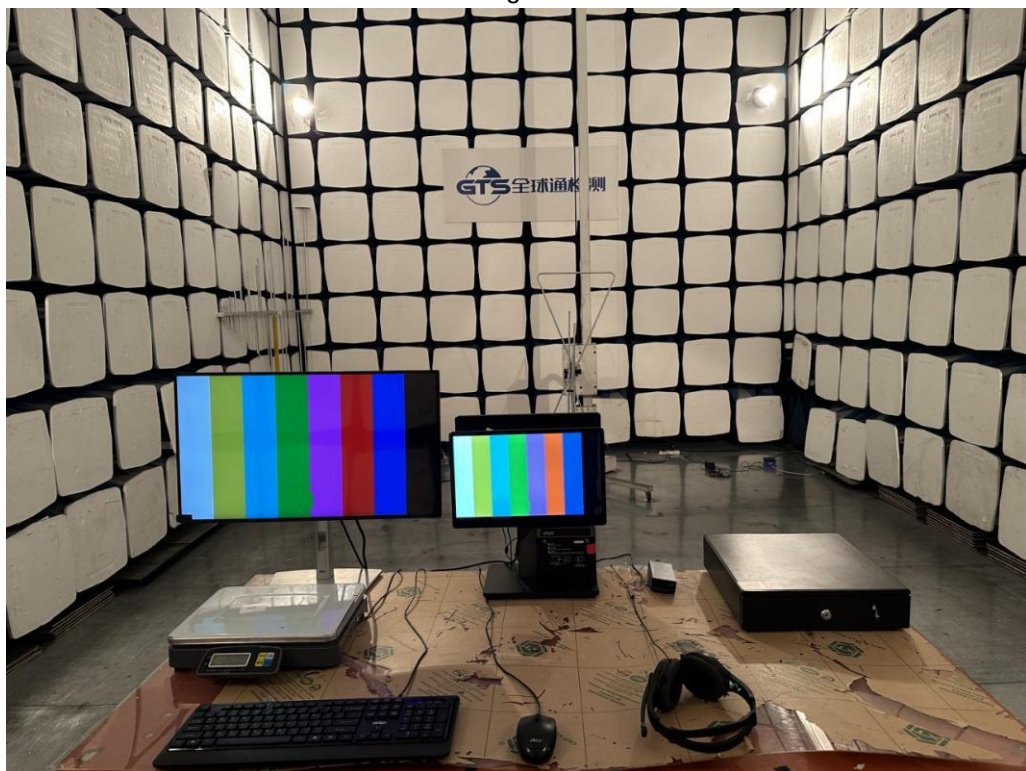


Fig. 2

Photo of Conducted Emission Measurement



Fig. 3

11. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the GTS20250603010-2-03.

.....End of Report.....