



TEST REPORT FCC Part 27

Report Reference No.....: HK2011193870-2E

FCC ID.....: 2AYD7-INB1

Compiled by

(position+printed name+signature): File administrators Gary Qian

Gary Qian

Supervised by

(position+printed name+signature): Technique principal Eden Hu

Eden Hu

Approved by

(position+printed name+signature): Manager Jason Zhou

Jason Zhou

Date of issue.....: Dec. 24, 2020

Testing Laboratory Name: Shenzhen HUAKE Testing Technology Co., Ltd.

Address: 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation
Park, Heping Community, Fuhai Street, Bao 'an District, Shenzhen,
China

Applicant's name: igloocompany Pte. Ltd.

Address: 67 Ayer Rajah Crescent #06-14/21, Singapore 139950

Test specification:

Standard: FCC CFR Title 47 Part 2, Part 27

TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Smart IoT Deadbolt

Trade Mark: N/A

Manufacturer.....: igloocompany Pte. Ltd.

Model/Type reference.....: INB1

Listed Models: N/A

Modulation Type: QPSK, 16QAM

Rating: DC 6V from Battery

Hardware version: V1.06

Software version: V1.06

Result.....: PASS

**TEST REPORT**

Test Report No. :	HK2011193870-2E	Dec. 24, 2020
		Date of issue

Equipment under Test : Smart IoT Deadbolt

Model /Type : INB1

Listed Models : N/A

Applicant : **igloocompany Pte. Ltd.**

Address : 67 Ayer Rajah Crescent #06-14/21, Singapore 139950

Manufacturer : **igloocompany Pte. Ltd.**

Address : 67 Ayer Rajah Crescent #06-14/21, Singapore 139950

Test result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Revision History

Revision	Issue Date	Revisions	Revised By
V1.0	Dec. 24, 2020	Initial Issue	Jasou Zhou



Contents

<u>1</u>	<u>SUMMARY</u>	<u>5</u>
1.1	TEST STANDARDS	5
1.2	Test Description	5
1.3	Test Facility	6
1.4	Statement of the measurement uncertainty	6
<u>2</u>	<u>GENERAL INFORMATION</u>	<u>7</u>
2.1	Environmental conditions	7
2.2	Description of Test Modes	7
2.3	Test frequency list	7
2.4	Equipments Used during the Test	8
2.5	Related Submittal(s) / Grant (s)	8
2.6	Modifications	8
<u>3</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
3.1	Output Power	9
3.3	Peak-to-Average Ratio (PAR)	15
3.4	Occupied Bandwidth and Emission Bandwidth	22
3.5	Band Edge compliance	30
3.6	Spurious Emission	37
3.7	Frequency Stability under Temperature & Voltage Variations	71
<u>4</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>73</u>



1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 27](#) : MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[KDB971168 D01: v02r02](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[FCC KDB 971168D01 v03r01](#) Power Meas License Digital Systems

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 27.50(d)(4)	Pass
Peak-to-Average Ratio	Part 27.50(d)(4)	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 27.53(h)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 27.53(h)	Pass
Out of band emission, Band Edge	Part 2.1051 Part 27.53(h)	Pass
Frequency stability	Part 2.1055 Part 27.54	Pass



1.3 Test Facility

1.3.1 Address of the test laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street,
Bao'an District, Shenzhen, China

1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 Description of Test Modes

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

2.3 Test frequency list

TX Channel Bandwidth	Frequency (MHz)	channel
1.4 MHz	1710.7	19957
	1732.5	20175
	1754.3	20393
3 MHz	1711.5	19965
	1732.5	20175
	1753.5	20385
5 MHz	1712.5	19975
	1732.5	20175
	1752.5	20375
10 MHz	1715.0	20000
	1732.5	20175
	1750.0	20350
15 MHz	1717.5	20025
	1732.5	20175
	1747.5	20325
20 MHz	1720.0	20050
	1732.5	20175
	1745.0	20300



2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	Jun. 18, 2020	Jun. 17, 2021
LISN	R&S	ENV216	HKE-002	Jun. 18, 2020	Jun. 17, 2021
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Jun. 18, 2020	Jun. 17, 2021
Receiver	R&S	ESCI 7	HKE-010	Jun. 18, 2020	Jun. 17, 2021
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021
Horn antenna	Schwarzbeck	9120D	HKE-013	Jun. 18, 2020	Jun. 17, 2021
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	EMCI	EMC051845SE	HKE-015	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	Agilent	83051A	HKE-016	Jun. 18, 2020	Jun. 17, 2021
Temperature and humidity meter	Boyang	HTC-1	HKE-075	Jun. 18, 2020	Jun. 17, 2021
High pass filter unit	Tonscend	JS0806-F	HKE-055	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
Power meter	Agilent	E4419B	HKE-085	Jun. 18, 2020	Jun. 17, 2021
Power Sensor	Agilent	E9300A	HKE-086	Jun. 18, 2020	Jun. 17, 2021
Wireless Communication Test Set	R&S	CMW500	HKE-026	Jun. 18, 2020	Jun. 17, 2021
Wireless Communication Test Set	R&S	CMU200	HKE-029	Jun. 18, 2020	Jun. 17, 2021
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Jun. 18, 2020	Jun. 17, 2021

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AYD7-INB1 filing to comply with of the FCC Part 27 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.

3 TEST CONDITIONS AND RESULTS


3.1 Output Power

LIMIT


According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

TEST CONFIGURATION

Conducted Power Measurement

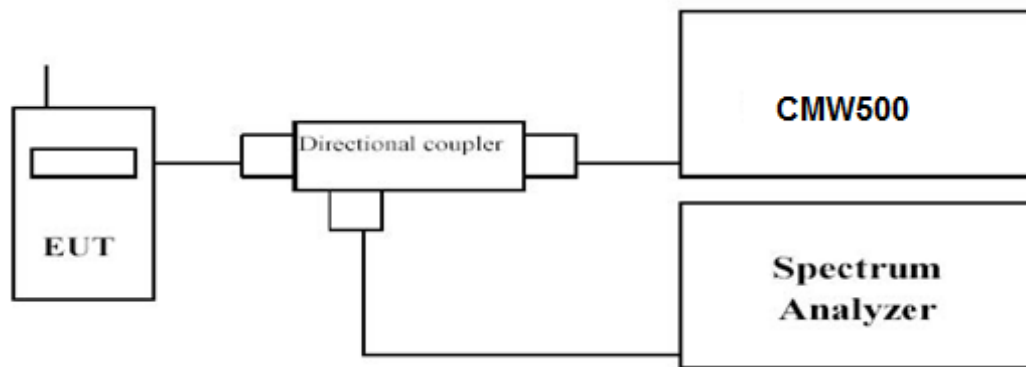

Radiated Power Measurement:

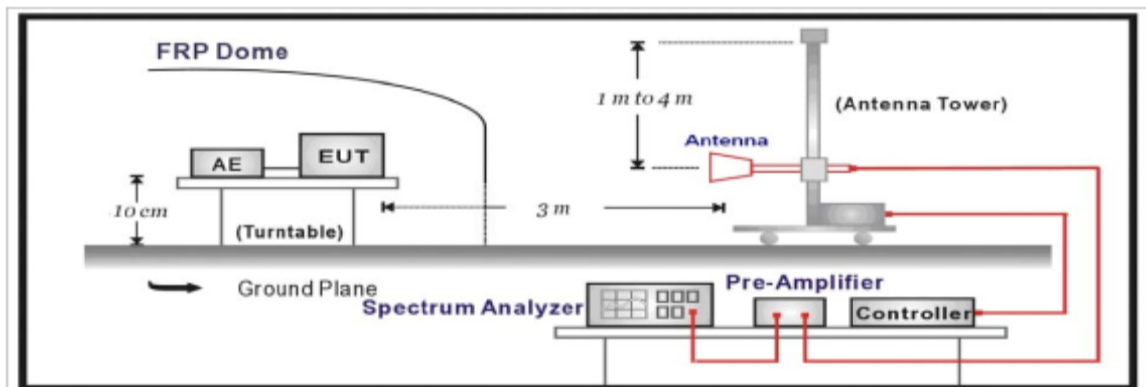

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.



- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

LTE FDD Band 4				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1710.7	1 RB low	23.74	23.17
		1 RB high	23.74	22.96
		50% RB mid	23.97	22.65
		100% RB	24.04	22.58
	1732.5	1 RB low	24.19	23.83
		1 RB high	24.20	23.63
		50% RB mid	24.26	22.92
		100% RB	24.08	23.04
	1754.3	1 RB low	24.05	22.72
		1 RB high	24.09	22.83
		50% RB mid	24.03	22.55
		100% RB	24.31	22.81
3 MHz	1711.5	1 RB low	24.08	22.81
		1 RB high	24.06	22.92
		50% RB mid	22.91	22.20
		100% RB	23.06	22.23
	1732.5	1 RB low	23.99	23.11
		1 RB high	24.06	23.12
		50% RB mid	23.10	22.65
		100% RB	23.11	22.47
	1753.5	1 RB low	24.00	22.79
		1 RB high	22.61	23.29
		50% RB mid	23.68	22.94
		100% RB	23.62	22.92
5 MHz	1712.5	1 RB low	22.61	23.29
		1 RB high	22.66	23.46
		50% RB mid	23.59	22.64
		100% RB	23.17	22.18
	1732.5	1 RB low	22.50	22.48
		1 RB high	22.47	22.64
		50% RB mid	23.14	22.37
		100% RB	23.32	22.32
	1752.5	1 RB low	23.93	23.36
		1 RB high	23.94	23.51
		50% RB mid	23.14	22.50
		100% RB	23.04	22.16



10 MHz	1715.0	1 RB low	24.08	23.21
		1 RB high	24.17	23.00
		50% RB mid	23.24	22.34
		100% RB	23.05	22.38
	1732.5	1 RB low	23.95	22.94
		1 RB high	24.18	23.14
		50% RB mid	23.20	22.02
		100% RB	23.21	22.05
	1750.0	1 RB low	24.18	22.62
		1 RB high	24.27	22.53
		50% RB mid	23.06	21.06
		100% RB	23.29	21.14
15 MHz	1717.5	1 RB low	24.30	22.97
		1 RB high	24.37	23.08
		50% RB mid	22.84	21.51
		100% RB	22.98	22.25
	1732.5	1 RB low	24.21	23.06
		1 RB high	24.19	23.04
		50% RB mid	22.92	21.60
		100% RB	23.06	21.34
	1747.5	1 RB low	23.81	23.19
		1 RB high	24.36	23.59
		50% RB mid	23.64	23.09
		100% RB	23.55	23.07
20 MHz	1720.0	1 RB low	22.94	24.08
		1 RB high	24.47	23.91
		50% RB mid	23.86	23.00
		100% RB	23.23	22.23
	1732.5	1 RB low	22.47	22.96
		1 RB high	22.44	23.18
		50% RB mid	23.14	22.38
		100% RB	23.26	22.37
	1745.0	1 RB low	24.09	23.68
		1 RB high	24.22	23.55
		50% RB mid	23.10	22.09
		100% RB	23.25	22.43

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

LTE FDD Band 4_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-21.43	3.06	9.68	34.80	19.99	30.00	10.01	V
1732.5	-22.38	3.17	9.68	34.80	18.93	30.00	11.07	V
1754.3	-20.93	3.22	9.75	34.80	20.40	30.00	9.60	V
1710.7	-21.64	3.06	9.68	34.80	19.78	30.00	10.22	H
1732.5	-20.61	3.17	9.68	34.80	20.70	30.00	9.30	H
1754.3	-20.63	3.22	9.75	34.80	20.70	30.00	9.30	H

LTE FDD Band 4_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-21.45	3.06	9.68	34.80	19.97	30.00	10.03	V
1732.5	-21.58	3.17	9.68	34.80	19.73	30.00	10.27	V
1753.5	-20.93	3.22	9.75	34.80	20.40	30.00	9.60	V
1711.5	-20.94	3.06	9.68	34.80	20.48	30.00	9.52	H
1732.5	-20.94	3.17	9.68	34.80	20.37	30.00	9.63	H
1753.5	-20.70	3.22	9.75	34.80	20.63	30.00	9.37	H

LTE FDD Band 4_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-21.29	3.06	9.68	34.80	20.13	30.00	9.87	V
1732.5	-21.62	3.17	9.68	34.80	19.69	30.00	10.31	V
1752.5	-21.27	3.22	9.75	34.80	20.06	30.00	9.94	V
1712.5	-21.22	3.06	9.68	34.80	20.20	30.00	9.80	H
1732.5	-20.63	3.17	9.68	34.80	20.68	30.00	9.32	H
1752.5	-20.92	3.22	9.75	34.80	20.41	30.00	9.59	H

LTE FDD Band 4_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715.0	-21.62	3.06	9.68	34.80	19.80	30.00	10.20	V
1732.5	-21.71	3.17	9.68	34.80	19.60	30.00	10.40	V
1750.0	-20.77	3.22	9.75	34.80	20.56	30.00	9.44	V
1715.0	-21.11	3.06	9.68	34.80	20.31	30.00	9.69	H
1732.5	-20.64	3.17	9.68	34.80	20.67	30.00	9.33	H
1750.0	-20.70	3.22	9.75	34.80	20.63	30.00	9.37	H

LTE FDD Band 4_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-21.96	3.06	9.68	34.80	19.46	30.00	10.54	V
1732.5	-22.05	3.17	9.68	34.80	19.26	30.00	10.74	V
1747.5	-20.97	3.22	9.75	34.80	20.36	30.00	9.64	V
1717.5	-21.03	3.06	9.68	34.80	20.39	30.00	9.61	H
1732.5	-20.91	3.17	9.68	34.80	20.40	30.00	9.60	H
1747.5	-20.62	3.22	9.75	34.80	20.71	30.00	9.29	H

*LTE FDD Band 4_Channel Bandwidth 20MHz_QPSK*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720.0	-21.95	3.06	9.68	34.80	19.47	30.00	10.53	V
1732.5	-21.87	3.17	9.68	34.80	19.44	30.00	10.56	V
1745.0	-20.83	3.22	9.75	34.80	20.50	30.00	9.50	V
1720.0	-21.57	3.06	9.68	34.80	19.85	30.00	10.15	H
1732.5	-21.28	3.17	9.68	34.80	20.03	30.00	9.97	H
1745.0	-20.91	3.22	9.75	34.80	20.42	30.00	9.58	H

LTE FDD Band 4_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1710.7	-21.69	3.06	9.68	34.80	19.73	30.00	10.27	V
1732.5	-21.84	3.17	9.68	34.80	19.47	30.00	10.53	V
1754.3	-20.68	3.22	9.75	34.80	20.65	30.00	9.35	V
1710.7	-21.22	3.06	9.68	34.80	20.20	30.00	9.80	H
1732.5	-21.23	3.17	9.68	34.80	20.08	30.00	9.92	H
1754.3	-21.16	3.22	9.75	34.80	20.17	30.00	9.83	H

LTE FDD Band 4_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1711.5	-21.16	3.06	9.68	34.80	20.26	30.00	9.74	V
1732.5	-22.45	3.17	9.68	34.80	18.86	30.00	11.14	V
1753.5	-20.69	3.22	9.75	34.80	20.64	30.00	9.36	V
1711.5	-20.68	3.06	9.68	34.80	20.74	30.00	9.26	H
1732.5	-21.45	3.17	9.68	34.80	19.86	30.00	10.14	H
1753.5	-20.94	3.22	9.75	34.80	20.39	30.00	9.61	H

LTE FDD Band 4_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1712.5	-21.03	3.06	9.68	34.80	20.39	30.00	9.61	V
1732.5	-21.67	3.17	9.68	34.80	19.64	30.00	10.36	V
1752.5	-21.02	3.22	9.75	34.80	20.31	30.00	9.69	V
1712.5	-21.14	3.06	9.68	34.80	20.28	30.00	9.72	H
1732.5	-20.63	3.17	9.68	34.80	20.68	30.00	9.32	H
1752.5	-20.92	3.22	9.75	34.80	20.41	30.00	9.59	H

LTE FDD Band 4_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1715.0	-21.66	3.06	9.68	34.80	19.76	30.00	10.24	V
1732.5	-22.02	3.17	9.68	34.80	19.29	30.00	10.71	V
1750.0	-20.75	3.22	9.75	34.80	20.58	30.00	9.42	V
1715.0	-21.65	3.06	9.68	34.80	19.77	30.00	10.23	H
1732.5	-21.44	3.17	9.68	34.80	19.87	30.00	10.13	H
1750.0	-21.22	3.22	9.75	34.80	20.11	30.00	9.89	H

*LTE FDD Band 4_Channel Bandwidth 15MHz_16QAM*

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1717.5	-21.20	3.06	9.68	34.80	20.22	30.00	9.78	V
1732.5	-22.13	3.17	9.68	34.80	19.18	30.00	10.82	V
1747.5	-21.58	3.22	9.75	34.80	19.75	30.00	10.25	V
1717.5	-21.19	3.06	9.68	34.80	20.23	30.00	9.77	H
1732.5	-20.50	3.17	9.68	34.80	20.81	30.00	9.19	H
1747.5	-20.61	3.22	9.75	34.80	20.72	30.00	9.28	H

LTE FDD Band 4_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Ag} (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1720.0	-21.30	3.06	9.68	34.80	20.12	30.00	9.88	V
1732.5	-22.12	3.17	9.68	34.80	19.19	30.00	10.81	V
1745.0	-21.44	3.22	9.75	34.80	19.89	30.00	10.11	V
1720.0	-20.87	3.06	9.68	34.80	20.55	30.00	9.45	H
1732.5	-20.99	3.17	9.68	34.80	20.32	30.00	9.68	H
1745.0	-20.73	3.22	9.75	34.80	20.60	30.00	9.40	H




3.3 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

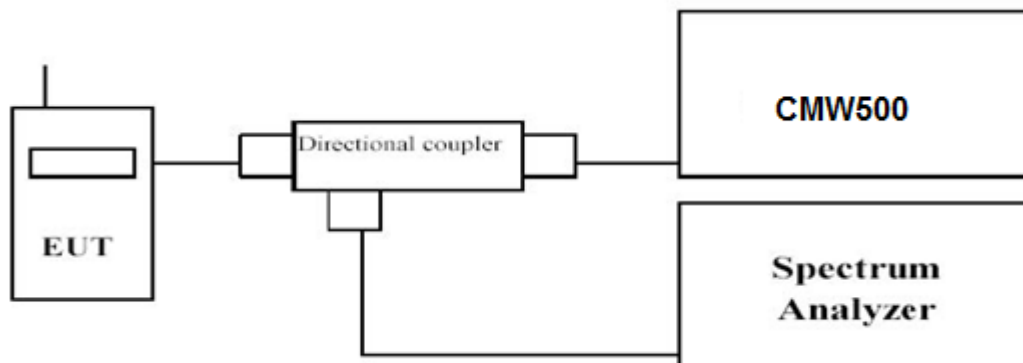

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.

LTE FDD Band 4				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	1710.7	1RB#0	8.91	10.93
	1732.5		10.50	11.26
	1754.3		8.83	9.30
3 MHz	1711.5	1RB#0	8.03	9.67
	1732.5		7.62	8.93
	1753.5		7.84	9.13
5 MHz	1712.5	1RB#0	8.93	8.71
	1732.5		8.05	8.51
	1752.5		8.46	8.50
10 MHz	1715.0	1RB#0	8.06	8.83
	1732.5		8.21	8.75
	1750.0		8.75	8.43
15 MHz	1717.5	1RB#0	8.04	8.20
	1732.5		8.20	8.16
	1747.5		8.09	8.11
20 MHz	1720.0	1RB#0	8.47	8.45
	1732.5		8.47	8.47
	1745.0		8.47	8.45



LTE FDD Band 4-1.4MHz Channel Bandwidth PAPR

QPSK

16QAM



1RB#0

1RB#0

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



LTE FDD Band 4-3MHz Channel Bandwidth PAPR

QPSK



1RB#0

16QAM



1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel



LTE FDD Band 4-5MHz Channel Bandwidth PAPR

QPSK




1RB#0

16QAM



1RB#0

Low Channel

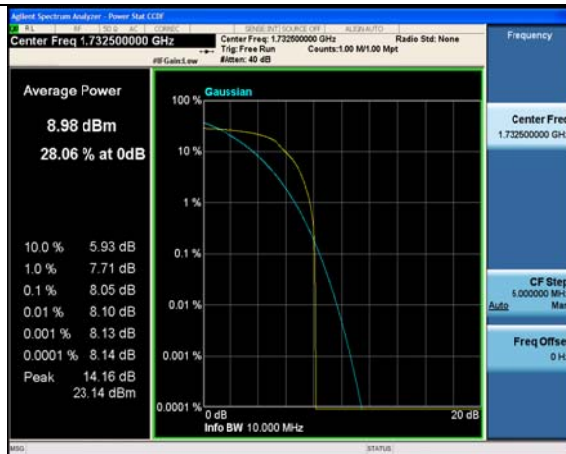

1RB#0



1RB#0

Middle Channel



1RB#0




1RB#0

High Channel




LTE FDD Band 4-10MHz Channel Bandwidth PAPR

QPSK

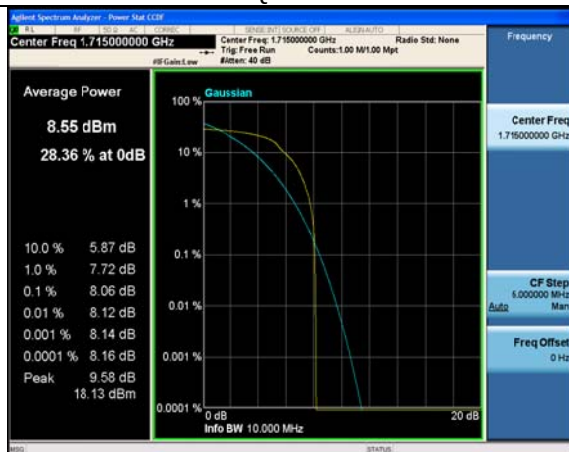

1RB#0

16QAM

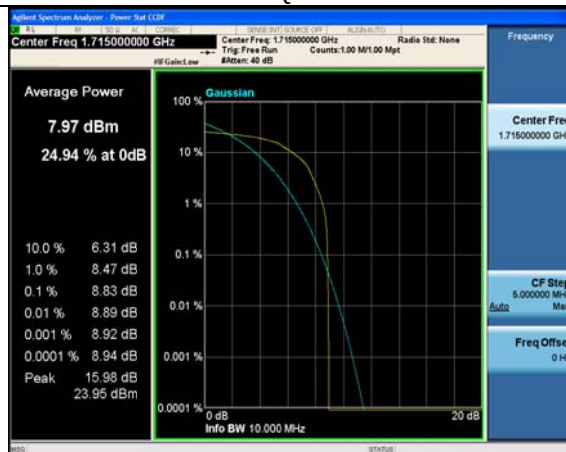

1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0




1RB#0

High Channel




LTE FDD Band 4-15MHz Channel Bandwidth PAPR

QPSK

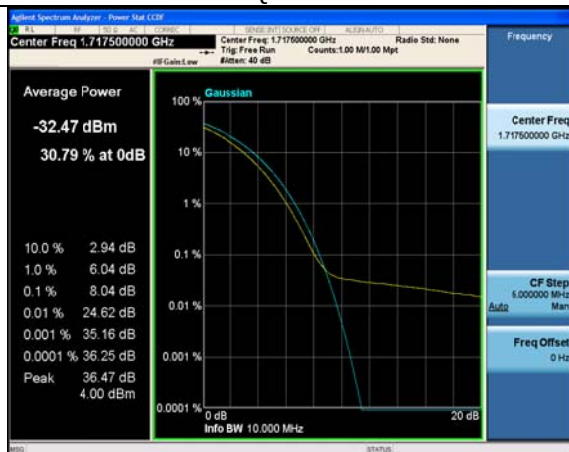

1RB#0

16QAM

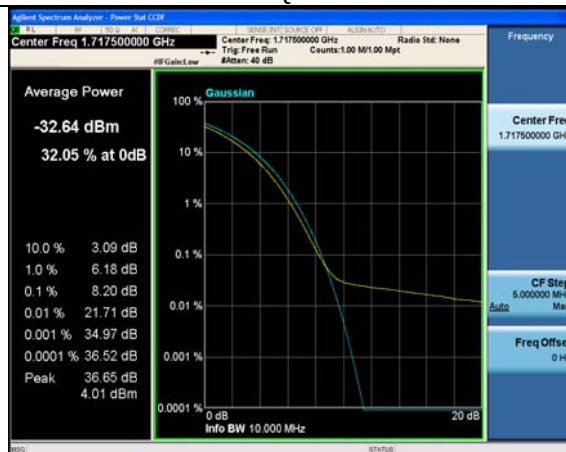

1RB#0

Low Channel




1RB#0



1RB#0

Middle Channel

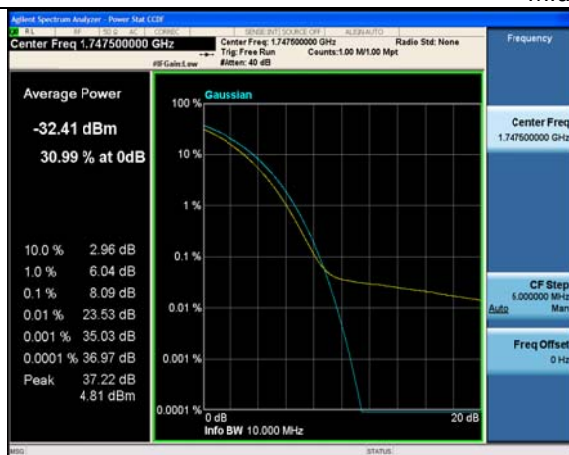

1RB#0




1RB#0

High Channel



LTE FDD Band 4-20MHz Channel Bandwidth PAPR

QPSK

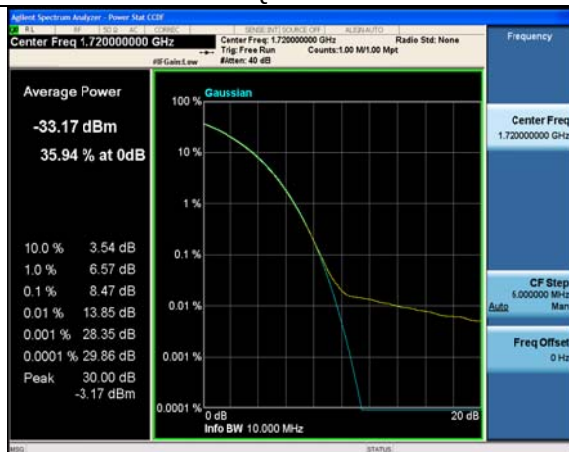

1RB#0

16QAM



1RB#0

Low Channel



1RB#0



1RB#0

Middle Channel



1RB#0



1RB#0

High Channel




3.4 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

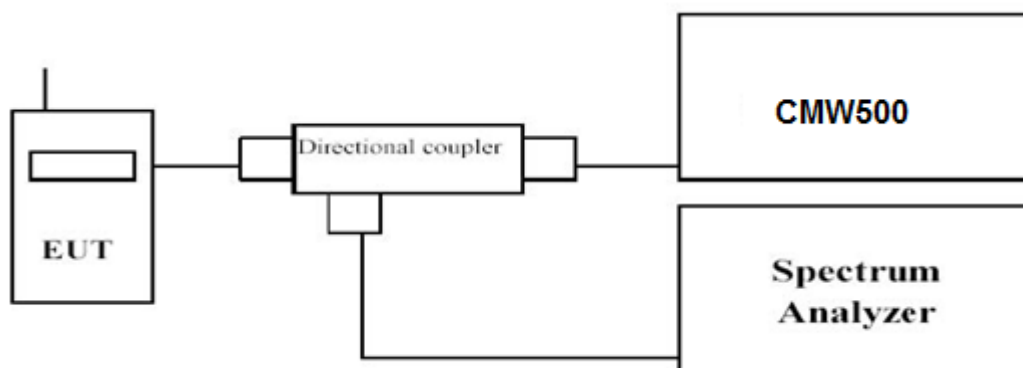

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.


LTE FDD Band 4				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	99% Occupied bandwidth (MHz)	-26dBc Emission bandwidth (MHz)
			QPSK	QPSK
1.4 MHz	6RB#0	1710.7	1.0883	1.227
		1732.5	1.0881	1.233
		1754.3	1.0879	1.226
3 MHz	6RB#0	1711.5	1.1090	1.268
		1732.5	1.1083	1.274
		1753.5	1.1097	1.283
5 MHz	6RB#0	1712.5	1.1627	1.338
		1732.5	1.1584	1.350
		1752.5	1.1623	1.363
10 MHz	6RB#0	1715.0	1.2942	1.564
		1732.5	1.2918	1.555
		1750.0	1.2922	1.563
15 MHz	6RB#0	1717.5	1.4553	1.838
		1732.5	1.4534	1.824
		1747.5	1.4430	1.830
20 MHz	6RB#0	1720.0	1.7882	2.328
		1732.5	1.7801	2.319
		1745.0	1.7918	2.326



LTE FDD Band 4				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	99% Occupied bandwidth (MHz)	-26dBc Emission bandwidth (MHz)
			16QAM	16QAM
1.4 MHz	6RB#0	1710.7	1.0878	1.230
		1732.5	1.0894	1.233
		1754.3	1.0867	1.227
3 MHz	6RB#0	1711.5	1.1065	1.265
		1732.5	1.1044	1.256
		1753.5	1.1070	1.266
5 MHz	6RB#0	1712.5	1.1605	1.349
		1732.5	1.1592	1.361
		1752.5	1.1512	1.343
10 MHz	6RB#0	1715.0	1.2879	1.562
		1732.5	1.2871	1.575
		1750.0	1.2967	1.558
15 MHz	6RB#0	1717.5	1.4451	1.828
		1732.5	1.4446	1.821
		1747.5	1.4527	1.837
20 MHz	6RB#0	1720.0	1.7839	2.288
		1732.5	1.7781	2.301
		1745.0	1.7674	2.325


LTE FDD Band 4-1.4MHz Channel Bandwidth

QPSK

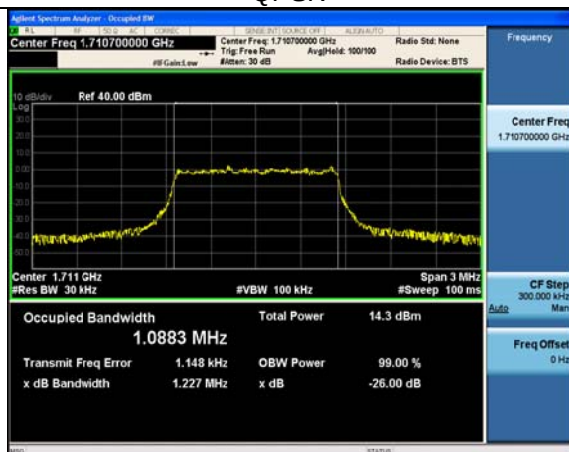


6RB#0

16QAM

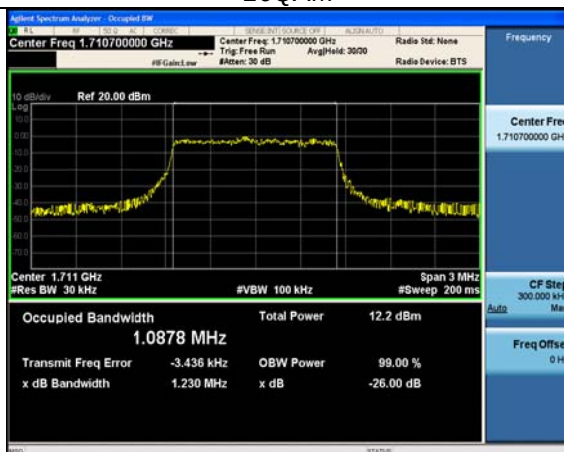


6RB#0

Low Channel

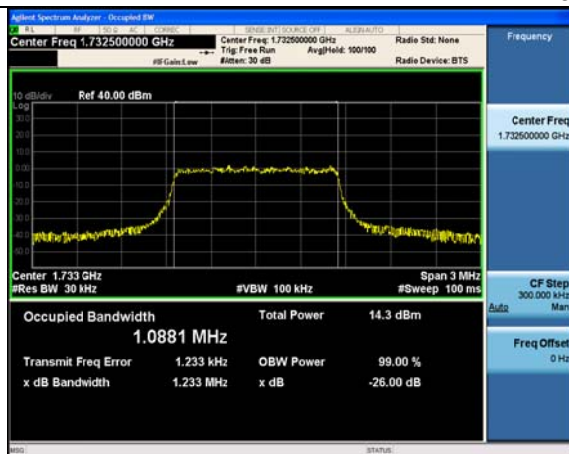


6RB#0

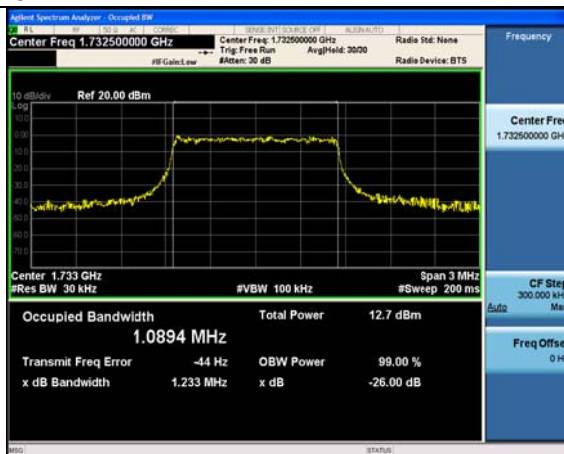


6RB#0

Middle Channel

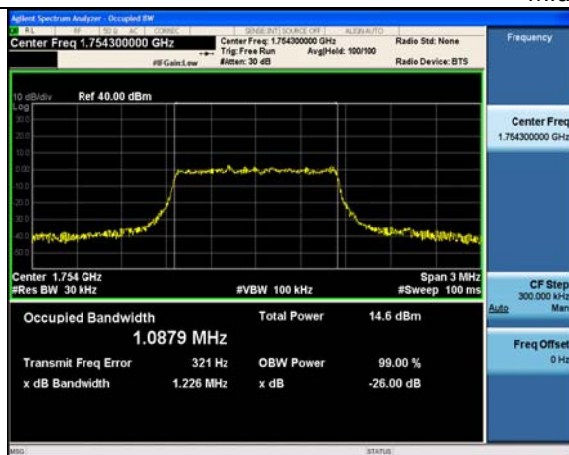

6RB#0

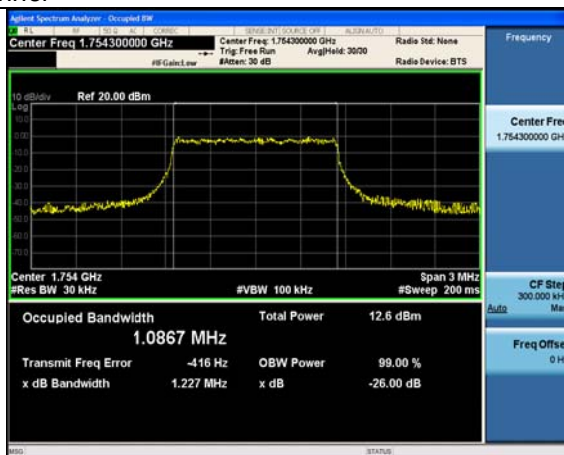


6RB#0

High Channel




LTE FDD Band 4-3MHz Channel Bandwidth

QPSK

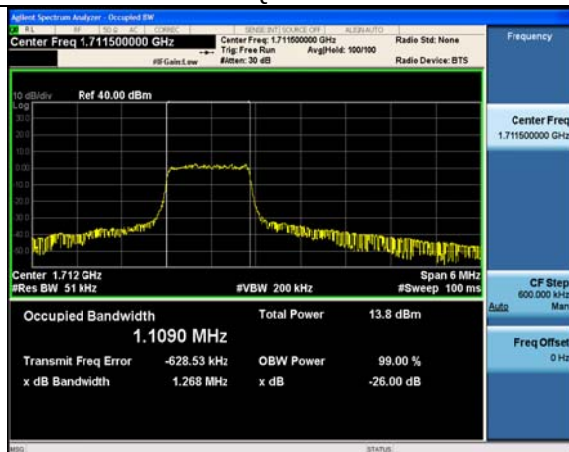



16QAM

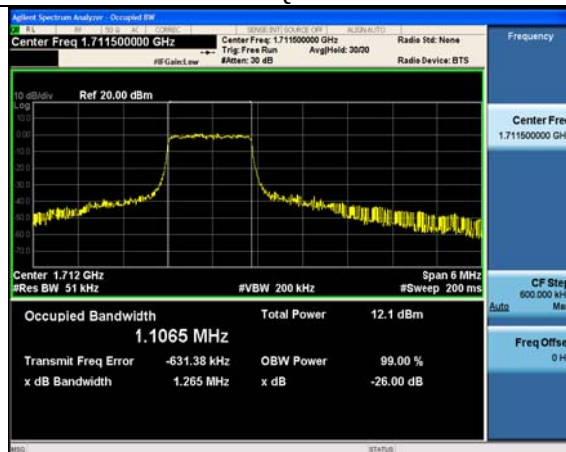

6RB#0

6RB#0


Low Channel

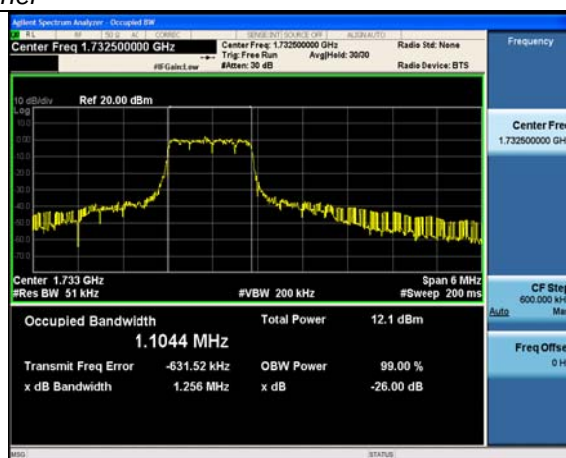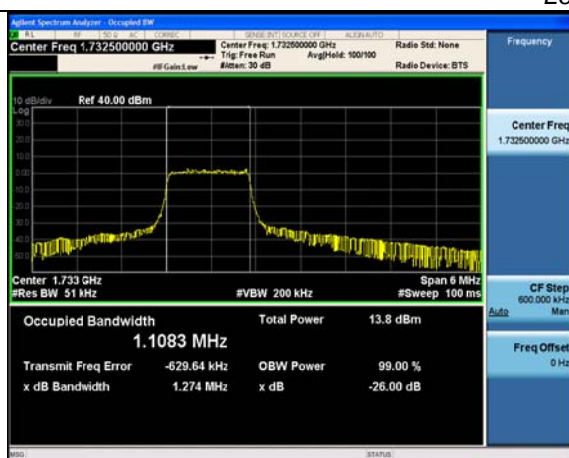

6RB#0

6RB#0

Middle Channel

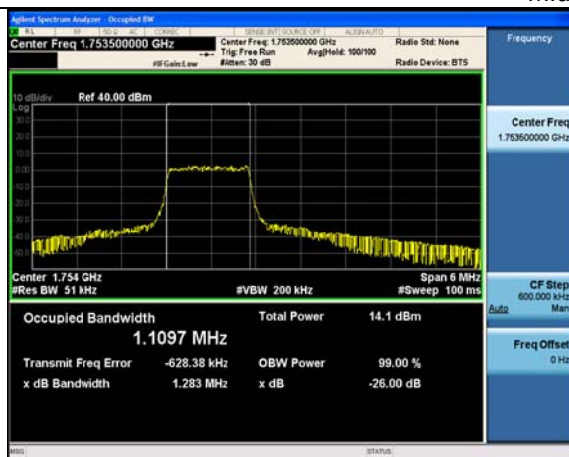

6RB#0

6RB#0

High Channel




LTE FDD Band 4-5MHz Channel Bandwidth

QPSK




16QAM

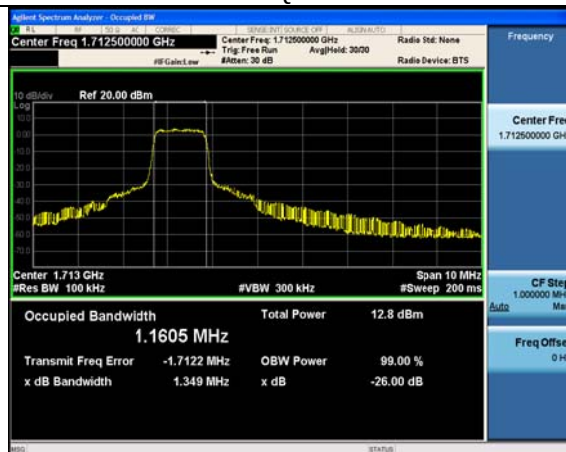


6RB#0

6RB#0

Low Channel

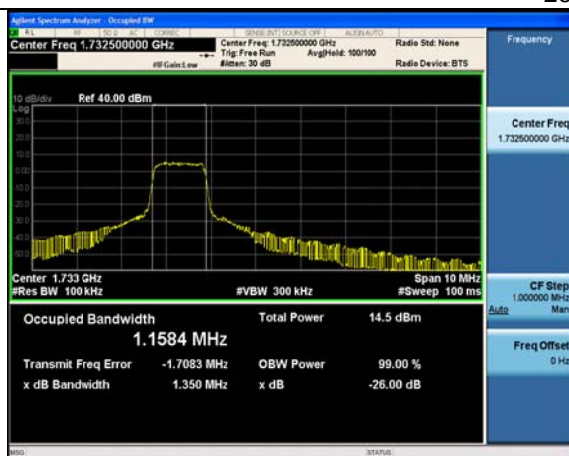


6RB#0

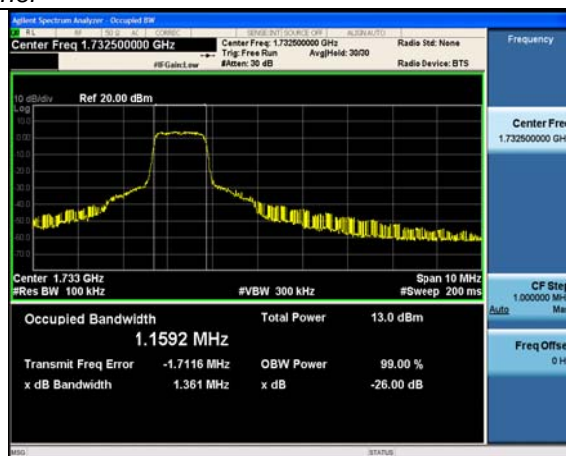


6RB#0

Middle Channel

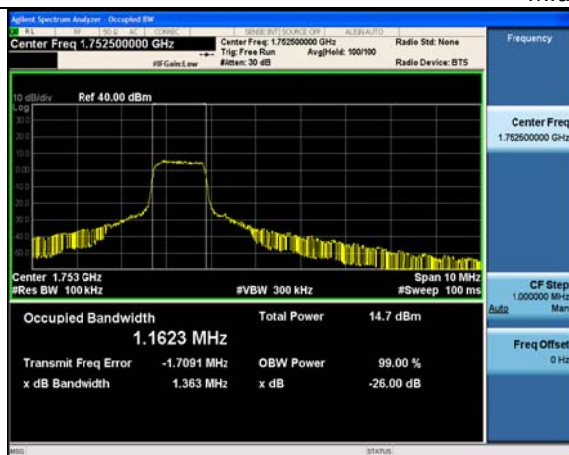

6RB#0

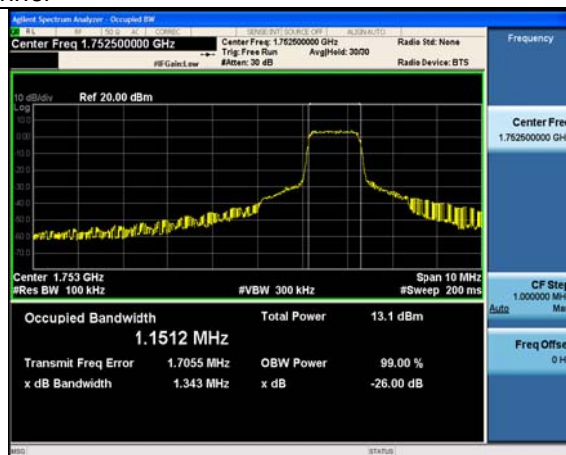


6RB#0

High Channel




LTE FDD Band 4-10MHz Channel Bandwidth

QPSK

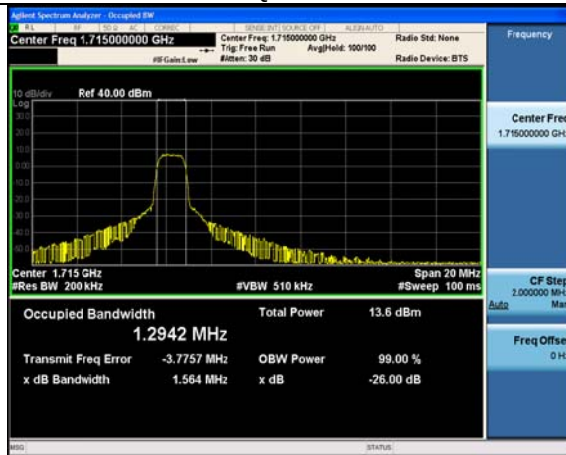


16QAM

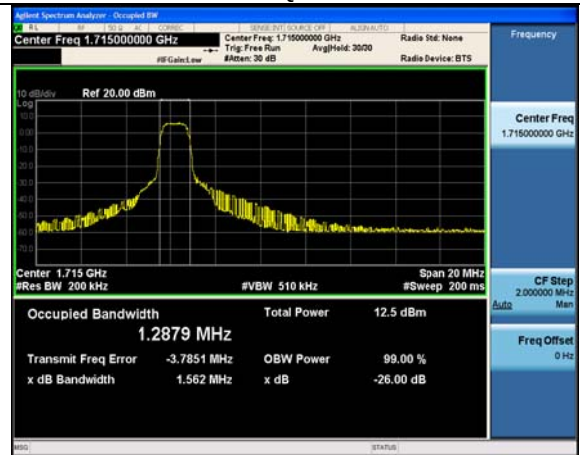


6RB#0

6RB#0

Low Channel

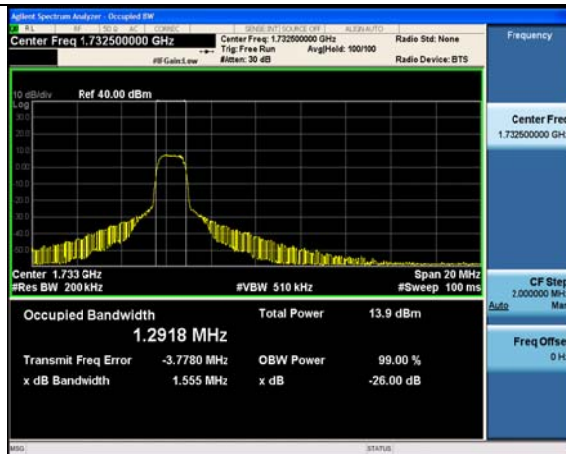


6RB#0

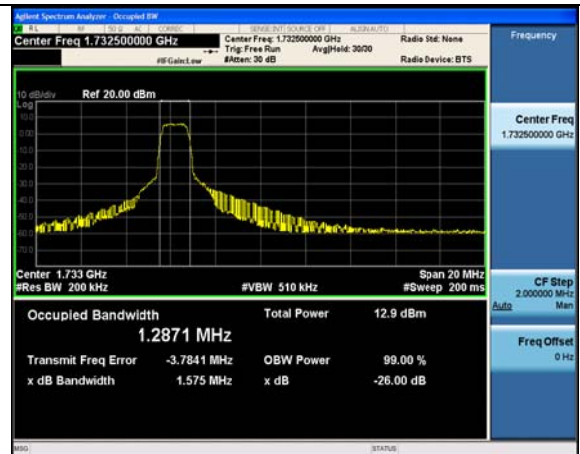


6RB#0

Middle Channel

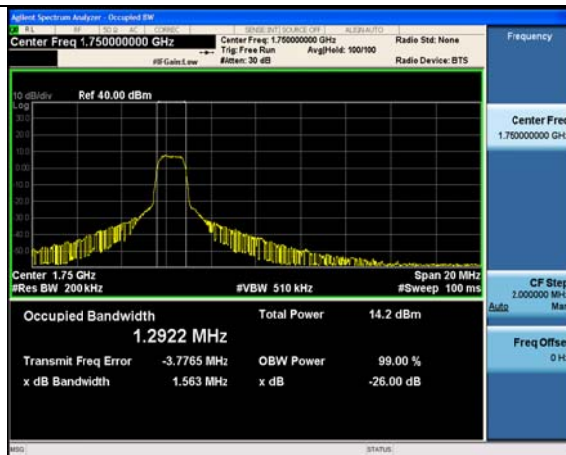

6RB#0

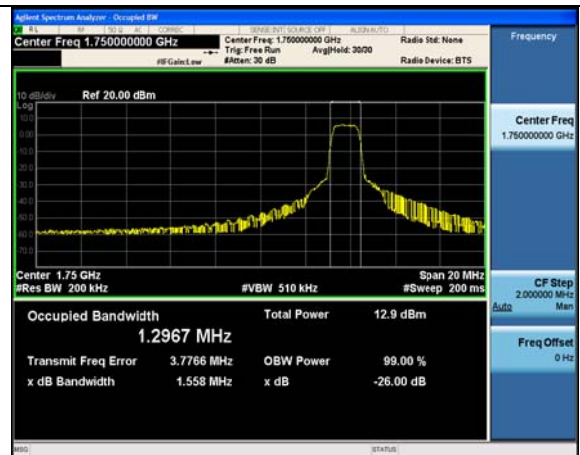


6RB#0

High Channel




LTE FDD Band 4-15MHz Channel Bandwidth

QPSK

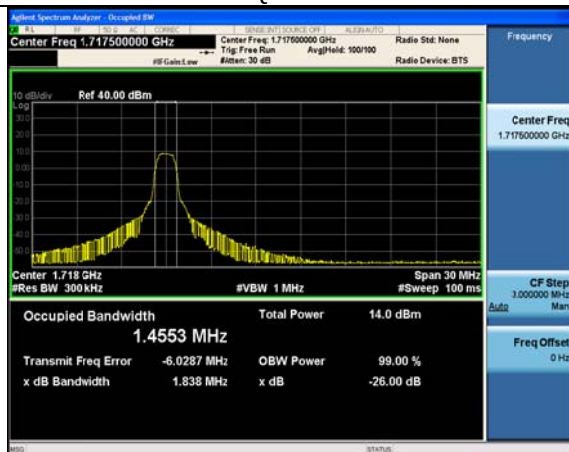


16QAM

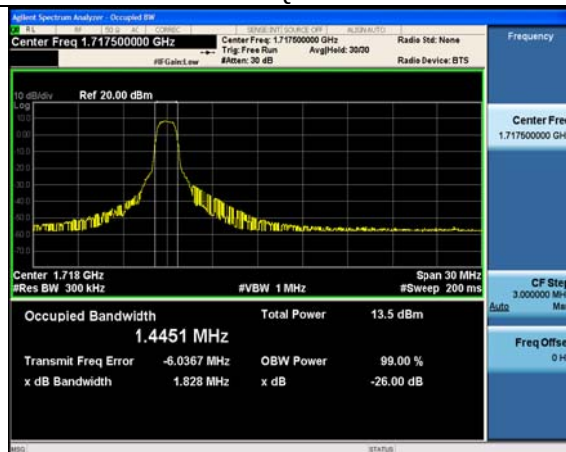


6RB#0

6RB#0

Low Channel

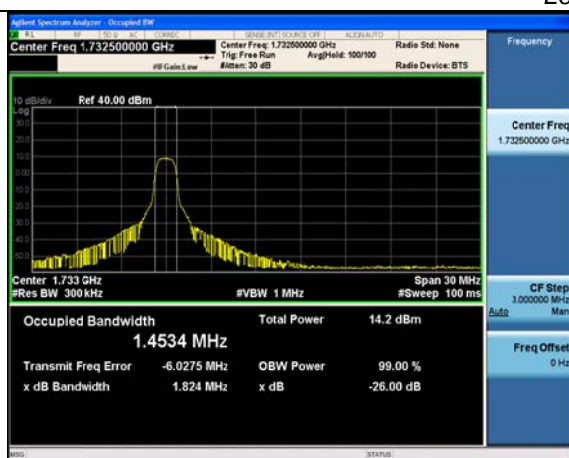


6RB#0

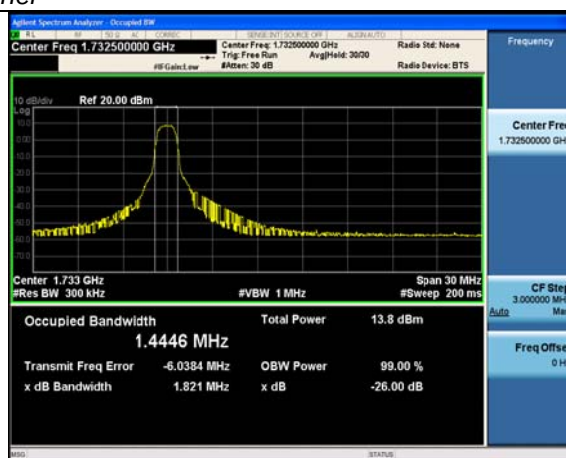


6RB#0

Middle Channel

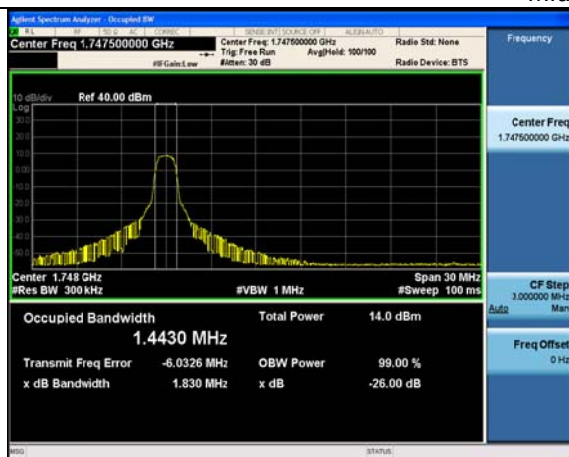

6RB#0

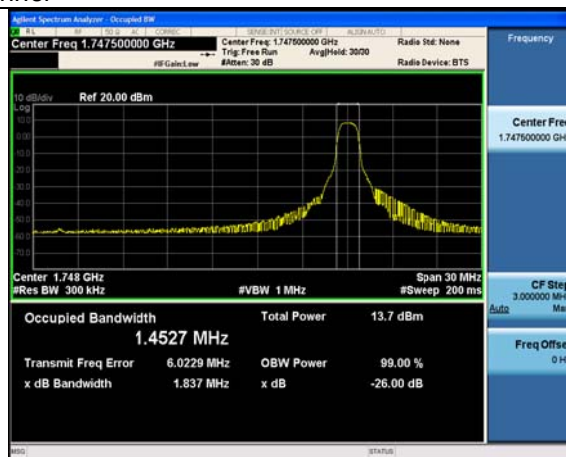


6RB#0

High Channel




LTE FDD Band 4-20MHz Channel Bandwidth

QPSK

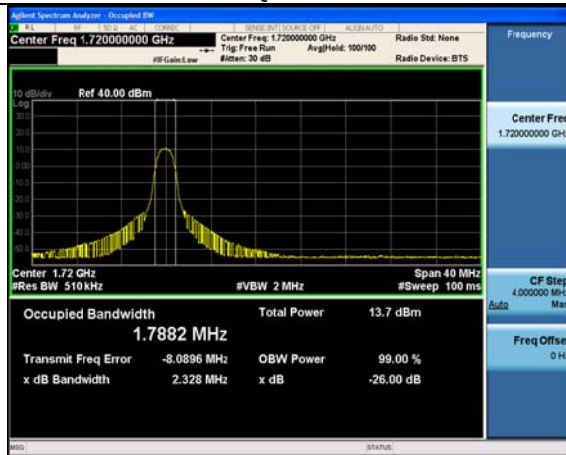


16QAM

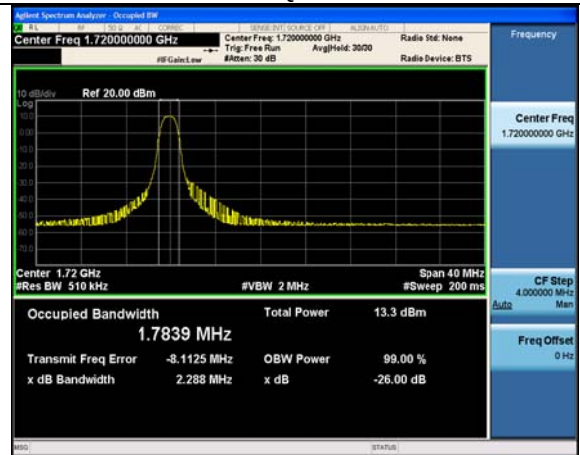


6RB#0

6RB#0

Low Channel

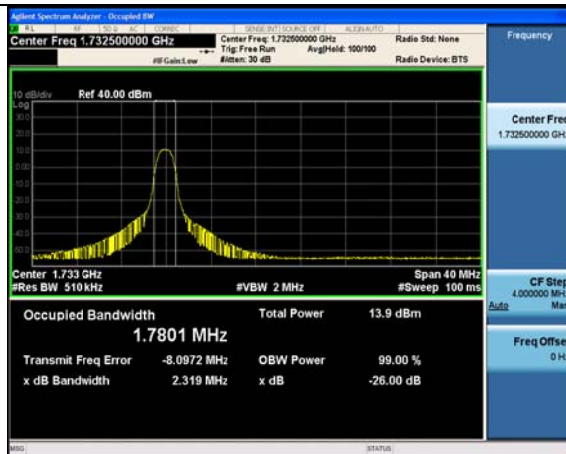


6RB#0

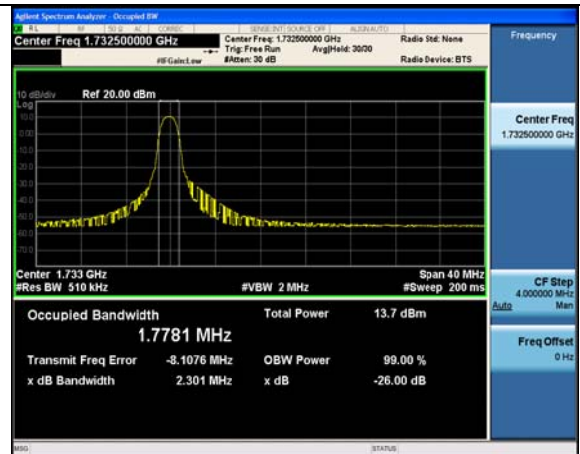


6RB#0

Middle Channel

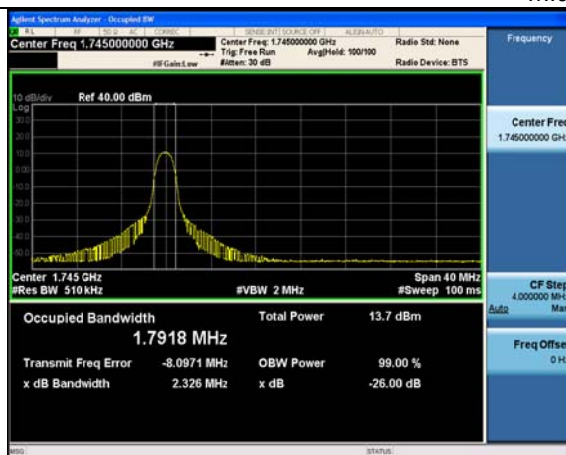

6RB#0

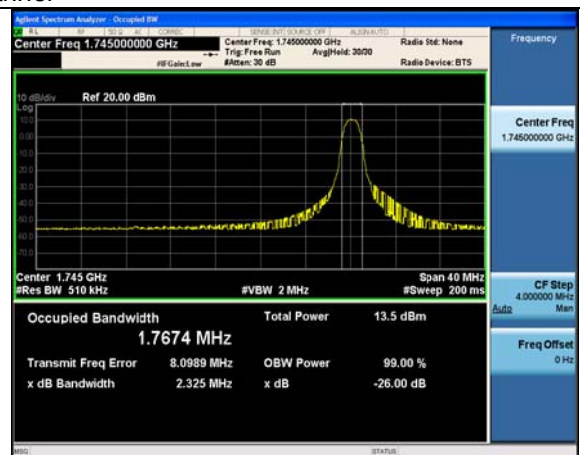

6RB#0

High Channel




3.5 Band Edge compliance

LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST CONFIGURATION

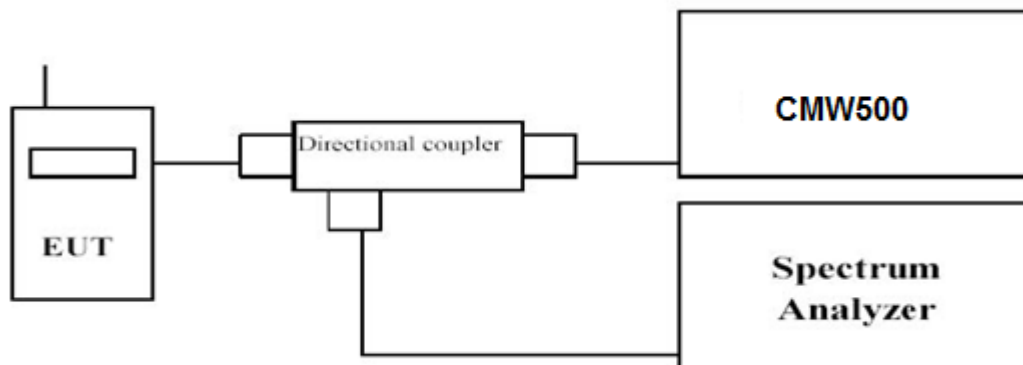

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.




LTE FDD Band 4-1.4MHz Channel Bandwidth Band Edge Compliance

QPSK

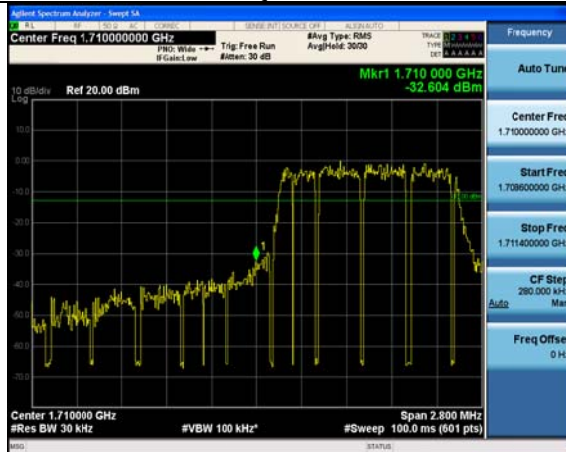


6RB#0

16QAM

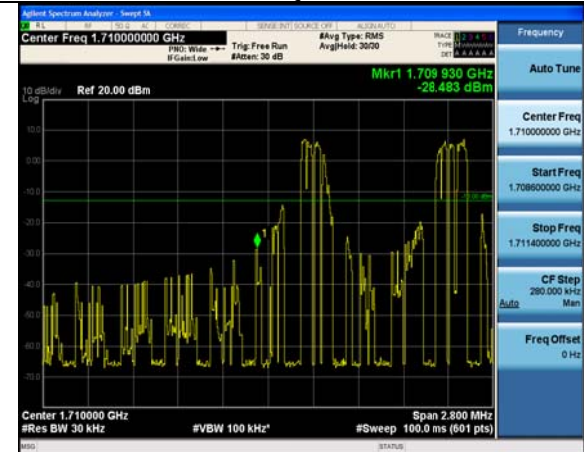


6RB#0

Low Channel

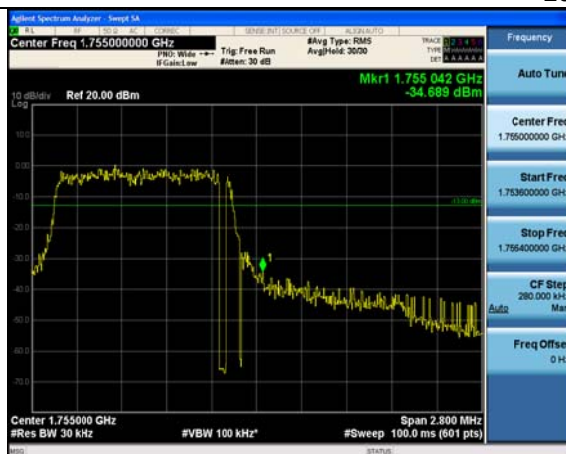

6RB#0

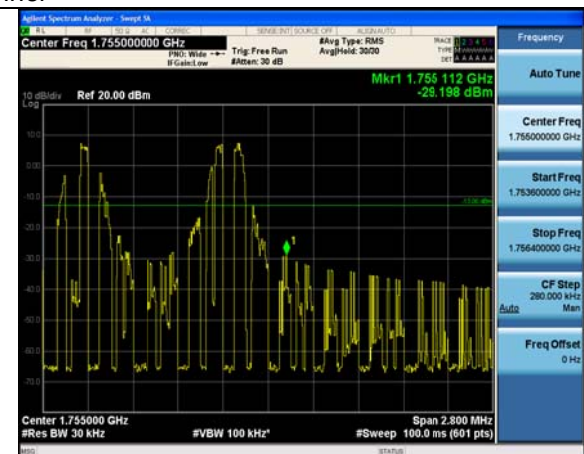


6RB#0

High Channel



LTE FDD Band 4-3MHz Channel Bandwidth Band Edge Compliance

QPSK

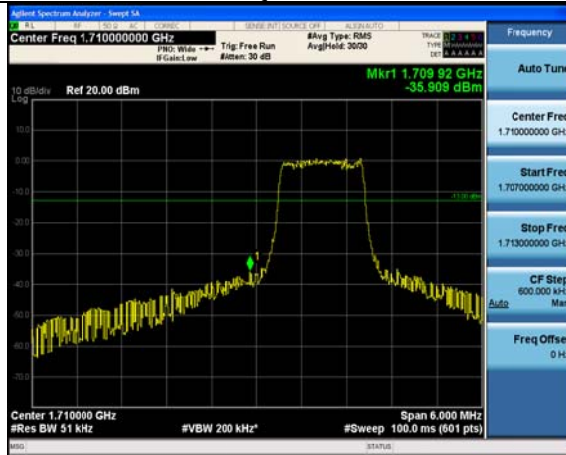


6RB#0

16QAM



6RB#0

Low Channel

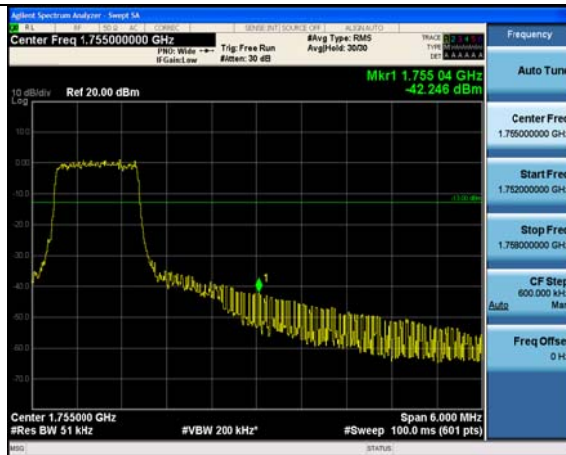

6RB#0




6RB#0

High Channel



LTE FDD Band 4-5MHz Channel Bandwidth Band Edge Compliance

QPSK

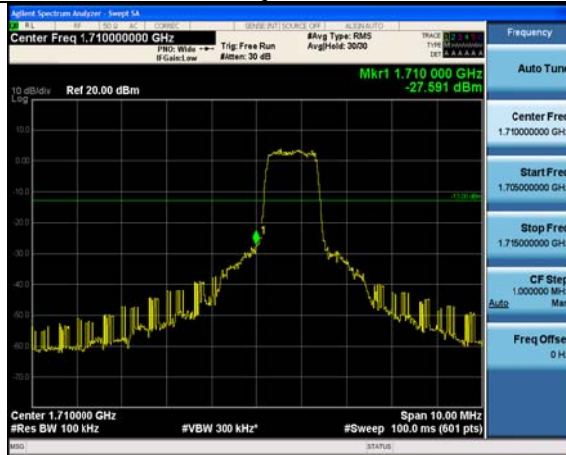

6RB#0

16QAM




6RB#0

Low Channel



6RB#0

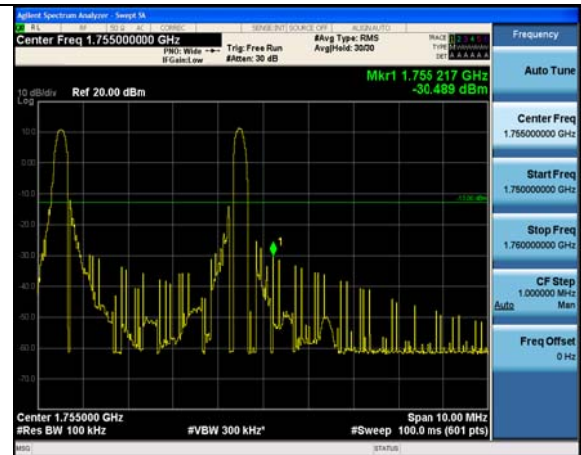


6RB#0

High Channel




LTE FDD Band 4-10MHz Channel Bandwidth Band Edge Compliance

QPSK

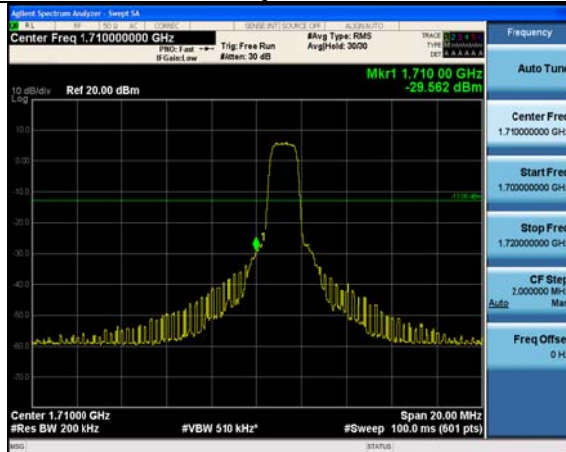


6RB#0

16QAM

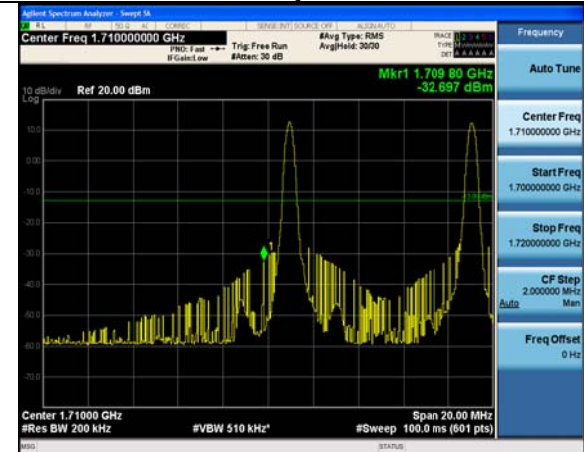


6RB#0

Low Channel

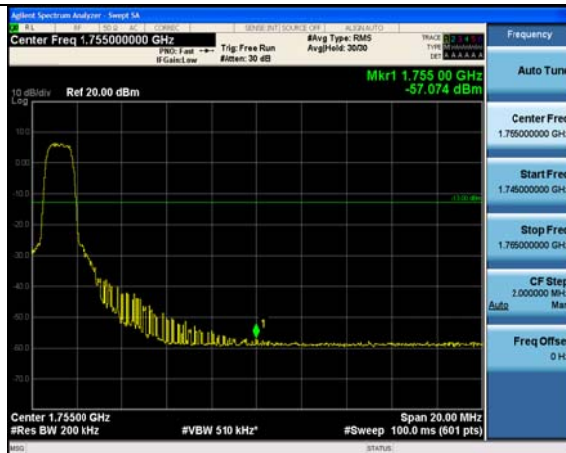

6RB#0

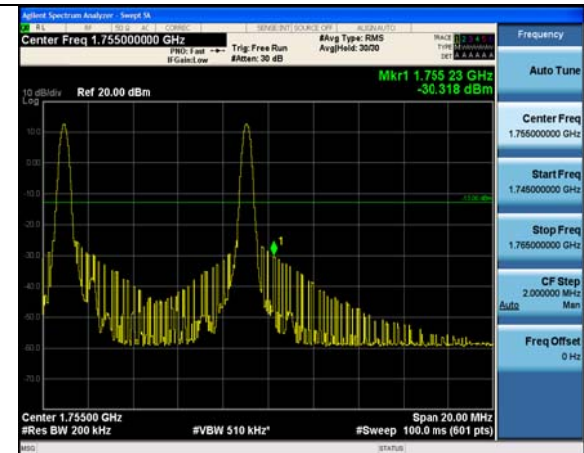


6RB#0

High Channel




LTE FDD Band 4-15MHz Channel Bandwidth Band Edge Compliance

QPSK

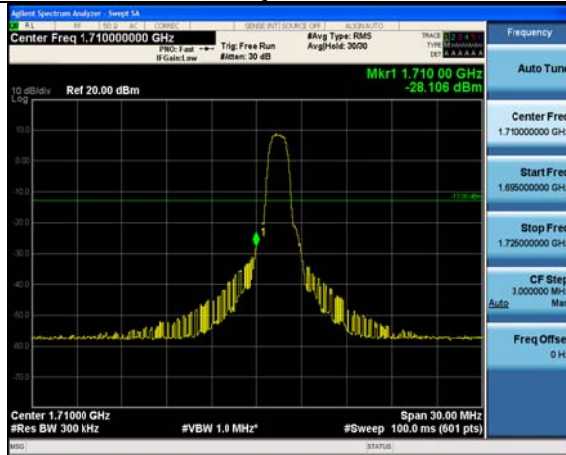

6RB#0

16QAM

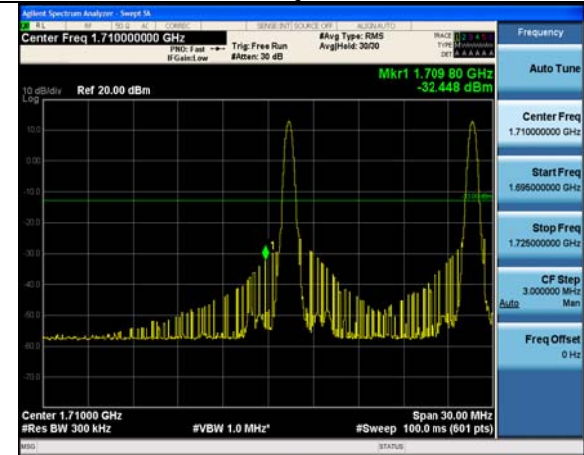


6RB#0

Low Channel



6RB#0

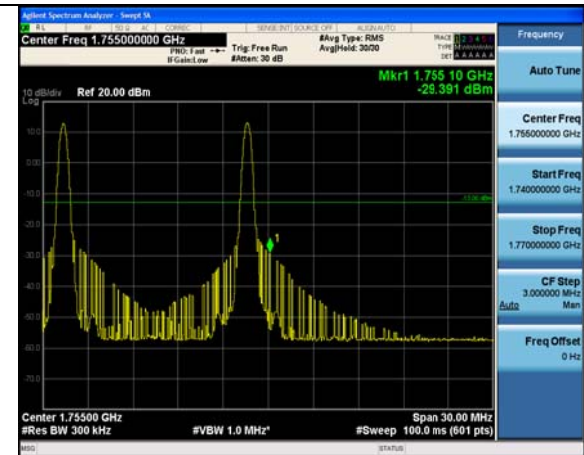


6RB#0

High Channel




LTE FDD Band 4-20MHz Channel Bandwidth Band Edge Compliance

QPSK

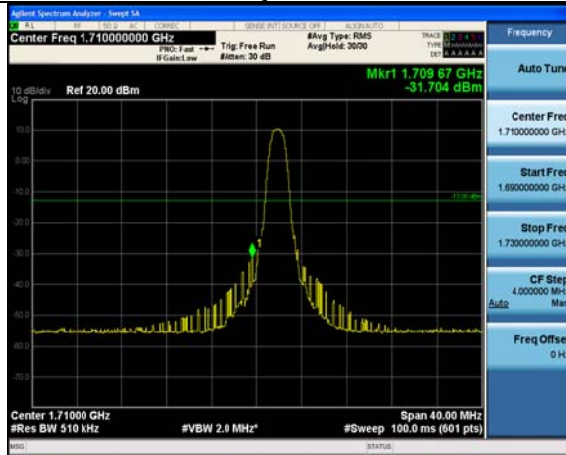

6RB#0

16QAM

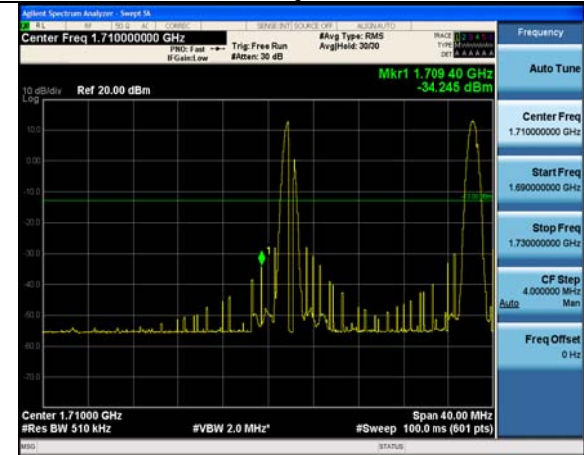


6RB#0

Low Channel



6RB#0

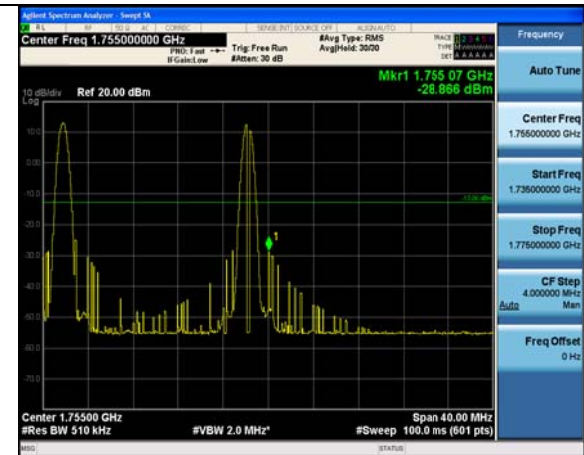

6RB#0

High Channel