


Wireless Expansion Microphone

User's Manual

Model No.: KS-WM1B, KS-WM1S

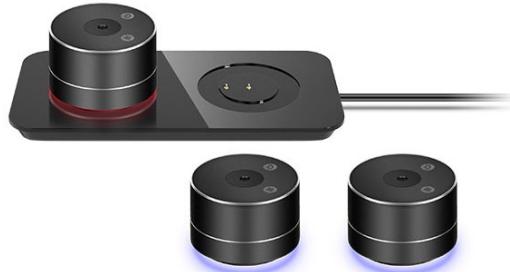

It is optional to use A, B or C wireless microphones compound with your main unit KS-V3B-XXH, please make sure only one piece of A, B, also C microphones working with your main unit device.

Rechargeable Lithium Battery (Microphone unit)

Stand-by up to 150 days

Talk time up to 8-10 hours

Provided 1Ah fast recharging

800mA Battery Capacity

Specification sheet

Expansion Microphone: SG1-A, SG1-B, SG1-C		
	Type	Digital silicon Microphone
	Sensitivity	-26dBFS @1kHz 1Pa
	SN	60 dB
	Frequency response	100Hz - 16kHz
	Sampling frequency	Record: 48kHz
	Voice pick up range	3M
	Wireless Transmission Model	2.4G ISM
	Wireless transmit power	2.4G: +5dBm
	Microphone power	0.2W MAX
	Charge Jack	USB type-c /Charging board contact charging
	Control Mode	Touch button control
	Button function	ON/OFF, Microphone Mute, paring microphones
	status Display	Two-color LED indicator
	Power adapter	Charging boardDC5V±0.2V,2A

Battery	800mAH
Standby time	6 month
work time	>8hours
working temperature	-10 - 40 °C
environment humidity	0-95% RH
length*width*height	φ70x49mm
Weight	300g

Name	Charging Board
Input voltage/current	5V/2A
Maximum number of Microphone get charged	2 pcs
Single output current	600mA
Dimension	200x100x16 (mm)
weight	170g
Interface	USB-TYPE-C

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.