


2.4G Remote Control User Manual

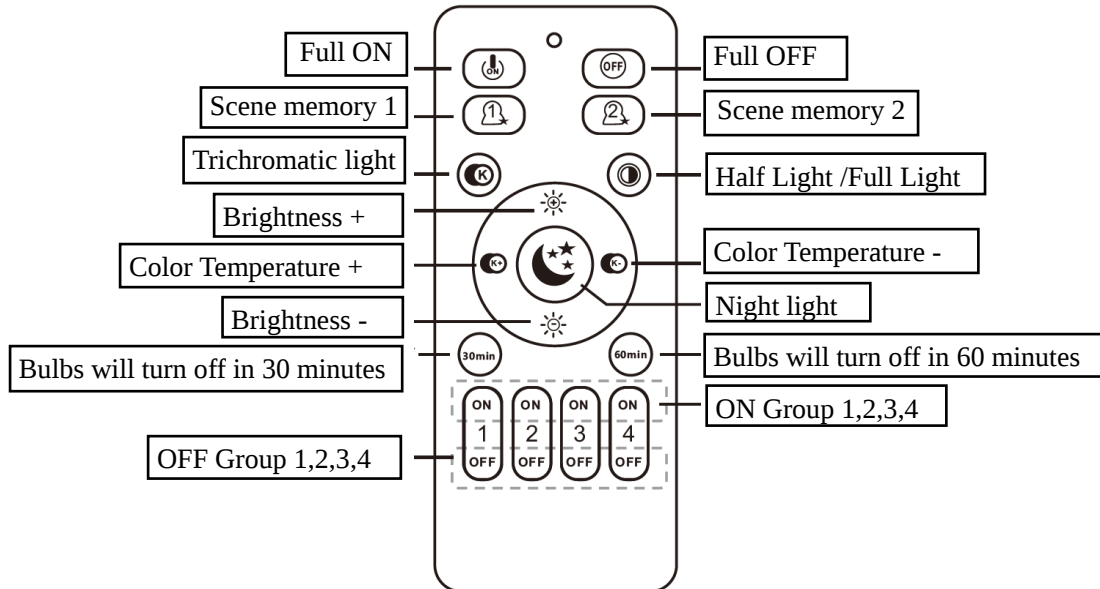

I. Pairing (In two ways)

一. Total pairing

1. Turn off the lamp power for more than 10 seconds.
2. Turn on the power, turn on the lamps, and quickly press the 'Full ON' button on the remote control for 3 times (complete within 3 seconds after the lights are turned on).
3. The light flashes 3 times to indicate that the total code matching is successful. (This fixture is in the total switch pairing mode: no grouping , four groups of switching functions the same).

二. Group pairing

1. Turn off the lamp power for more than 10 seconds.
2. Turn on the power, turn on the lamps, and quickly press the ON button of one of the groups of 'group 1--group 4' on the remote control 3 times (completed within three seconds after the light is on).
3. The light will flash 3 times to indicate that the pairing is successful. (This fixture is in group pairing mode: the remote control 'group 1-group 4' can only control the on and off of this light with the corresponding group button).

II. Overall closing code

1. Turn off the lamp power for more than 10 seconds.
2. Turn on the power, turn on the lamps, and quickly press the 'OFF' button on the remote control for 5 times (complete within three seconds after the lights are turned on).
3. The light will flash 3 times to indicate that the total clearing is successful. (After clearing the code, this lamp cannot be controlled by the remote control).

III. Buttons

1. Press any group ' ON' key, Brightness and Color temperature can adjust for the group of lamps
2. Press the 'Full ON' key, Brightness and Color temperatures can be adjusted for all groups of lamps
3. Long press the 'Scene memory 1', the lamp will flash once, indicating that the current lighting scene state of the lamp has been saved to this button. Short press this key in the future, the light of the fixture will switch to the saved light scene mode.
4. Long press the 'Scene memory 2', the light will flash once, indicating that the current light scene state of the light has been saved to this key. Short press this key in the future, the light of the fixture will switch to the saved light scene mode.
5. Short press the K, to quickly switch between: white light, warm light, neutral light.
6. Short press the half-bright/full-bright key, to quickly switch between half power and full power.
7. Press the K +, the color temperature will increase---- white
8. Press the K-, the color temperature will decrease---- yellow
9. Press the +, the brightness increases----brightens
10. Press the -, the brightness decreases ---- dims
11. Press the night light moon symbol to enter the night light state. (Press the brightness + key, or the brightness - key to exit the night light)
12. Press the 30min key, the lamp will automatically turn off after 30 minutes.
13. Press the 60min key, the lamp will automatically turn off after 60 minutes (Press any other key during this period to exit the timed light-off state)
14. Press the group key: group 1--group 4, corresponding to the lighting/turning off of the lamps in the group

Notes on using the remote control:

1. When the remote control is not used for a long time, the battery should be taken out to prevent leakage and damage to the remote control.
2. Do not place the remote control near electric blankets or objects with high temperature
3. The remote control should be more than one meter away from the TV or speaker equipment
4. Do not let liquids such as water splash on the remote control
5. Do not place the remote control in a place exposed to direct sunlight or strong light

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.