

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

Sensor System

MODEL NUMBER: FRD2488_25

REPORT NUMBER: 4791826590-6-RF-2

ISSUE DATE: July 28, 2025

FCC ID: 2A46G-FRD248825

Prepared for

**Guangzhou Xaircraft Technology CO.,LTD
Block C, No.115, Gaopu Road, Tianhe District, GuangzhouCity, Guangdong, P.R.
510663 China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	July 28, 2025	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	20dB Bandwidth	FCC Part 2.215(c)	Pass
2	99%dB Bandwidth	ISED RSS-Gen Clause 6.7	Pass
3	TX Spurious Emission	CFR 47 FCC §15.249 (a)(d)(e) CFR 47 FCC §15.205 and §15.209	Pass

Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.
 Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY.....	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5. EQUIPMENT UNDER TEST.....	8
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>8</i>
5.2. <i>SUPPORT UNITS FOR SYSTEM TEST.....</i>	<i>9</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED	10
7. TEST RESULTS	12
7.1. <i>ON TIME AND DUTY CYCLE</i>	<i>12</i>
7.2. <i>20 DB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH</i>	<i>15</i>
7.3. <i>RADIATED TEST RESULTS.....</i>	<i>18</i>
7.3.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS	32
7.3.2. RESTRICTED BANDEDGE	33
7.3.3. SPURIOUS EMISSIONS(9 kHz~30 MHz).....	35
7.3.4. SPURIOUS EMISSIONS(30 MHz~1 GHz).....	38
7.3.5. SPURIOUS EMISSIONS(1 GHz~3 GHz).....	40
7.3.6. SPURIOUS EMISSIONS(3 GHz~18 GHz).....	42
7.3.7. SPURIOUS EMISSIONS(18 GHz~26.5 GHz).....	44
7.3.8. SPURIOUS EMISSIONS(26.5 GHz~40 GHz).....	46
7.3.9. SPURIOUS EMISSIONS (40 GHz ~ 60 GHz).....	48
7.3.10. SPURIOUS EMISSIONS (60 GHz ~ 90 GHz)	49
7.3.11. SPURIOUS EMISSIONS (90 GHz ~ 110 GHz)	50
8. ANTENNA REQUIREMENTS	51

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Guangzhou Xaircraft Technology CO.,LTD
Address: Block C, No.115, Gaopu Road, Tianhe District, GuangzhouCity,
Guangdong, P.R.
510663 China

Manufacturer Information

Company Name: Guangzhou Xaircraft Technology CO.,LTD
Address: Block C, No.115, Gaopu Road, Tianhe District, GuangzhouCity,
Guangdong, P.R.
510663 China

EUT Description

EUT Name: Sensor System
Model: FRD2488_25
Brand: XAG
Sample Received Date: June 9, 2025
Sample Status: Normal
Sample ID: 8564579
Date of Tested: June 10, 2025 to July 27, 2025

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Prepared By:

Daniel Zhang

Daniel Zhang
Project Engineer

Checked By:

kebo.zhang

Kebo Zhang
Senior Project Engineer

Approved By:

Stephen Guo

Stephen Guo
Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.2dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.78dB (1GHz-18GHz) 5.23dB (18GHz-26GHz)
Radiated Emission (Included Fundamental Emission) (40 GHz to 110 GHz)	5.385 dB (40 GHz ~ 60 GHz) 5.320 dB (60 GHz ~ 90 GHz) 5.312 dB (90 GHz ~ 110 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Sensor System
Model	FRD2488_25

Frequency Range:	24 ~ 24.25 GHz
Channel Number:	1
Center Frequency:	24.15GHz
Type of Modulation:	FMCW
Antenna Type:	Linear Antenna
Antenna Gain:	10 dBi
Normal Test Voltage:	DC 24 V

5.2. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	/	/	/	/	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software installed in EUT.

SETUP DIAGRAM FOR TESTS

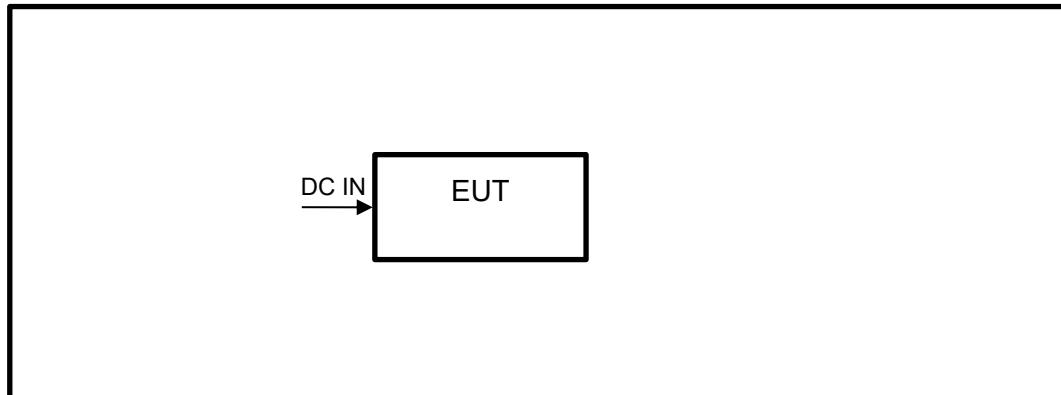

6. MEASURING EQUIPMENT AND SOFTWARE USED

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June 27, 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	June 30, 2024	June 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.28, 2024	Sep.27, 2025
Software					
Description		Manufacturer	Name	Version	
Test Software for Radiated Emissions		Farad	EZ-EMC	Ver. UL-3A1	

Radiated Emissions for above 40GHz					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
MXA Signal Analyzer	KESIGHT	N9020A	MY54432249	Dem.27, 2024	Dem.26, 2025
Millimeter Wave Frequency Conversion Receiving Unit and Antenna (40-60GHz)	Tonscend	Tonscend MMFC-R190-L0F0	202305240000	May 14, 2024	May 13, 2027
Millimeter Wave Frequency Conversion Receiving Unit and Antenna (60-90GHz)	Tonscend	Tonscend MMFC-R120-L0F0	202305240000	May 08, 2024	May 07, 2027
Millimeter Wave Frequency Conversion Receiving Unit and Antenna (75-110GHz)	Tonscend	Tonscend MMFC-R100-L0F0	202305240000	May 09, 2024	May 08, 2027
Software					
Description	Manufacturer	Name		Version	
mmWave Test Software	Tonscend	JS1120-mmWave Test Software		V1.0	

7. TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

TEST SETUP

Above 1 GHz

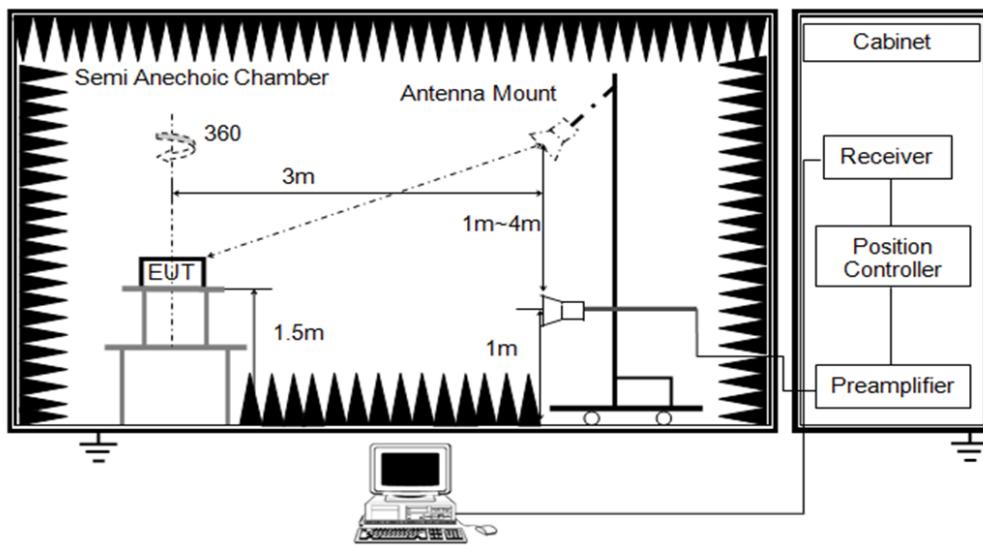

- Set RBW of spectrum analyzer to 8 MHz and VBW to 50MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is at least a 100 ms.
- Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- Measure the maximum time duration of one single pulse.

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 24 V

RESULTS


Ton1 (ms)	Ton2 (ms)	Total Ton times (ms)
0.0004	0.0257	0.0261

Total Ton times (ms)	Period (ms)	Duty Cycle (Linear)	Duty Cycle Correction Factor
0.0261	0.2693	0.097	-20.26

Note: Duty Cycle Correction Factor=20log(x).

Where: x is Duty Cycle

Ton

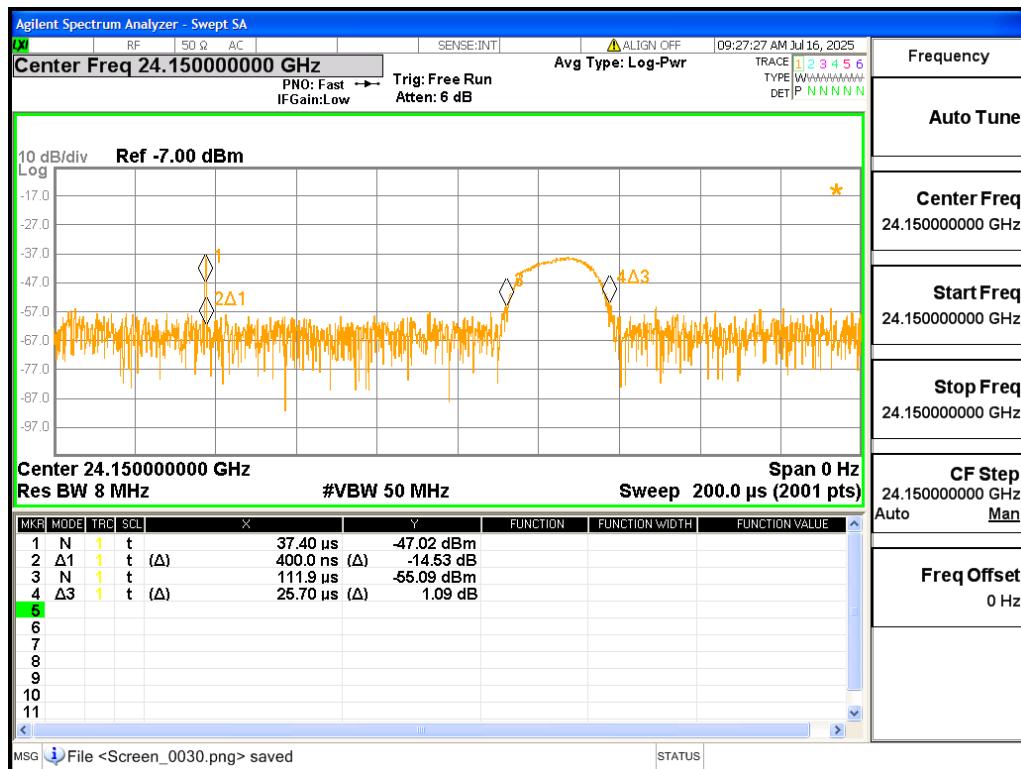

Period
(ms)



7.2. 20 DB BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.249) Subpart C			
Section	Test Item	Limit	Frequency Range (GHz)
CFR 47 FCC 15.249(d)	20dB Bandwidth	for reporting purposes only	24~24.25 GHz
ISED RSS-Gen Clause 6.7	99% Bandwidth	N/A	24~24.25 GHz

Note: There is no relative section in CFR 47 FCC Part15 (15.247) Subpart C for 99 % Occupied Bandwidth. 99 % Occupied Bandwidth is tested for reporting purposes using RSS-Gen section.

TEST PROCEDURE


Spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 % to 5 % of the occupied bandwidth
VBW	approximately 3×RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB / 99 % relative to the maximum level measured in the fundamental emission.

TEST SETUP

Above 1 GHz

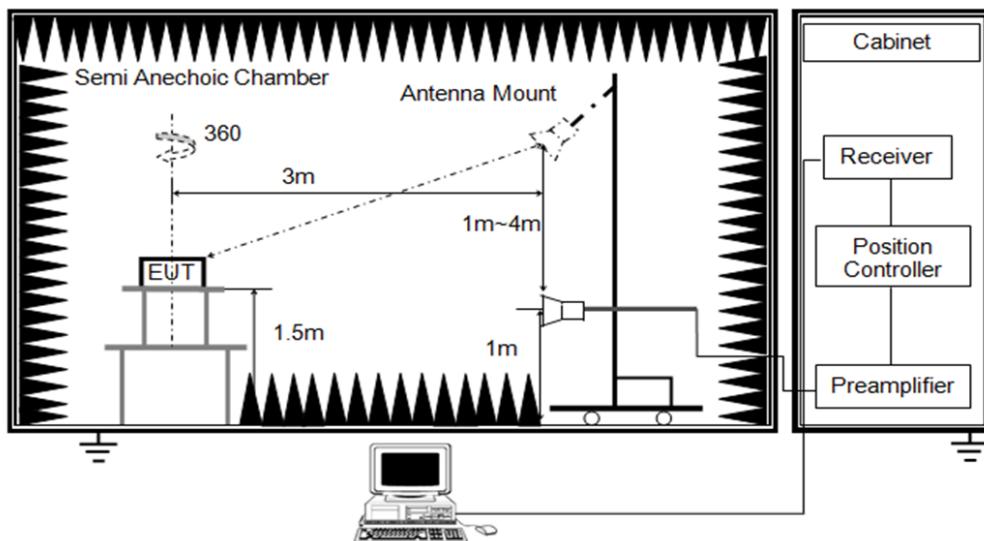


TEST ENVIRONMENT

Temperature	25 °C	Relative Humidity	60 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 24 V

RESULTS

Channel	20 dB bandwidth (MHz)	99 % bandwidth (MHz)	Result
1	146.9	141.89	PASS

BANDWIDTH CH1

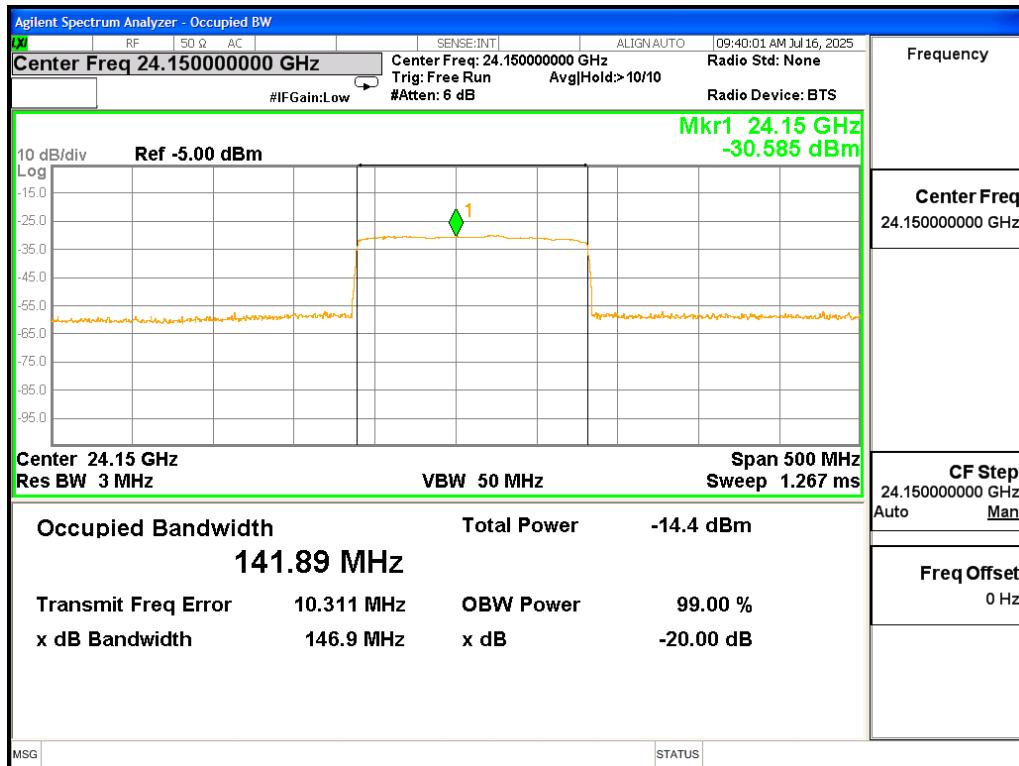

7.3. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

CFR 47 FCC §15.249 (a)(d)(c)(e)

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

The field strength of emissions from intentional radiators operated within these frequency bands			
Frequency (MHz)	Average Field strength of Fundamental	Average Field strength of Harmonics	Distance (m)
24000 - 24250	250 mV/m (107.96dB _{UV} /m)	2500 uV/m (67.96dB _{UV} /m)	3
	Peak Field strength of Fundamental	Peak Field strength of Harmonics	3
	127.96dB _{UV} /m	87.96dB _{UV} /m	3

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Emissions radiated outside of the specified frequency bands above 30 MHz					
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit	Field Strength Limit	Field Strength Limit	Field Strength Limit
		(dB μ V/m) at 3 m	(dB μ V/m) at 1 m	(dB μ V/m) at 0.75 m	Quasi-Peak
		Quasi-Peak	Quasi-Peak	Quasi-Peak	Quasi-Peak
30 - 88	100	40	/	/	/
88 - 216	150	43.5	/	/	/
216 - 960	200	46	/	/	/
Above 960	500	54	/	/	/
Above 1000	500	Peak	Average	Peak	Average
		74	54	83.5	63.5
				86	66

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right) \quad (20)$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in dB μ V/m
 E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m
 d_{Meas} is the measurement distance, in m
 $d_{\text{SpecLimit}}$ is the distance specified by the limit, in m

Distance factor:

40 GHz to 110 GHz=20log (1.00 m/3.00 m) = -9.5 dB

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Maximum Radiated measurement distance

Refer to ANSI C63.10-2013 clause 9, All measurements shall be performed in the far-field of the measurement antenna. The distance of the far field was calculated from follow equation:

$$r = \frac{2D^2}{\lambda}$$

Where

r is the distance from the radiating element of the EUT to the edge of the far field, in m.

D is the largest dimension of the measurement antenna (horn), in m.

λ is the wavelength in m.

Frequency	Wavelength (λ)	Maximum Dimension (D)	Far Field Boundary (r)
(GHz)	(mm)	(m)	(m)
40~60	5.000	0.051	1.0
60~90	3.333	0.039	0.9
90~110	2.727	0.032	0.8

For above 40 GHz, measurement is performed at a minimum distance of 1.0m > Rfar Field)

Refer to ANSI C63.10-2013 clause 9.8, to determine the maximum measurement distance for final radiated emissions measurements as flows:

- Measure the ambient system noise floor power with the instruments set to the proper values applicable to the measurement.
- Apply all the procedures and equations applicable to the measurement, based on the measured ambient system noise floor power and a candidate measurement distance equal to the distance specified by the limit.
- If the corrected system noise floor level is 6 dB or more below the limit, then the validated maximum measurement distance is the distance specified by the limit.

The final radiated measurement was performed based on as above guide to confirm the maximum measurement distance 1m can meet the corrected system noise floor level is 6 dB or more below the limit.

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dB_V/m, which is equivalent to $Y - 51.5 = Z$ dB_A/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz to 40 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average value=peak average + Duty Correction Factor

For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.

Above 40 GHz to 90 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 9.9.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 1 meter from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average value=peak average + Duty Correction Factor

For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.

Above 90 GHz to 110 GHz


The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 9.9.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 1 meter from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average value=peak average + Duty Correction Factor

For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

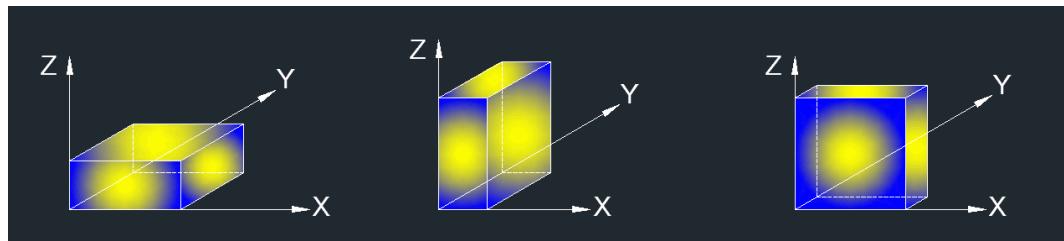

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis for Upward Radar, Z axis for Forward Radar, Z axis for Simultaneously Transmission) data recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Level=Reading+Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Level=Reading+Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

1. Level=Reading+Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $\text{VBW} = 1/\text{Ton}$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:

1. Level=Reading+Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG Result=Peak Result + Duty Cycle Correction Factor.
5. For the transmitting duration, please refer to clause 7.7.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 40 GHz):

Note:


1. Level=Reading+Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG Result=Peak Result + Duty Cycle Correction Factor.
5. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (40 GHz ~ 110 GHz):


Note:

1. Level=Reading+Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG Result=Peak Result + Duty Cycle Correction Factor.
5. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

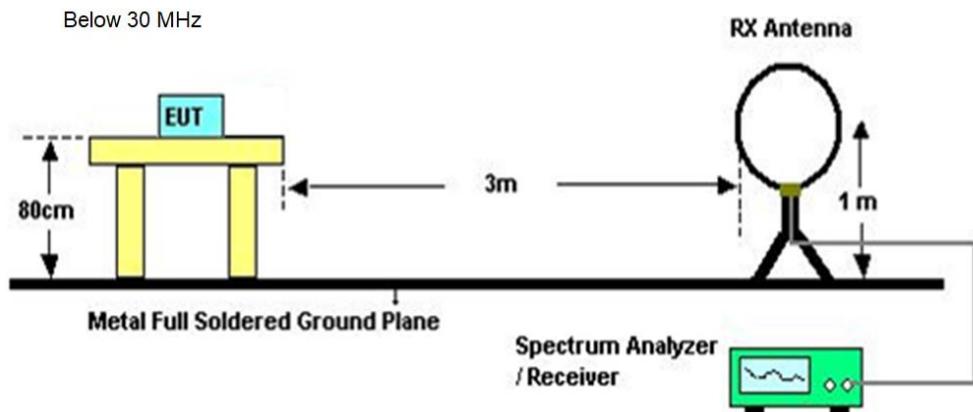


Below 1 GHz and above 30 MHz

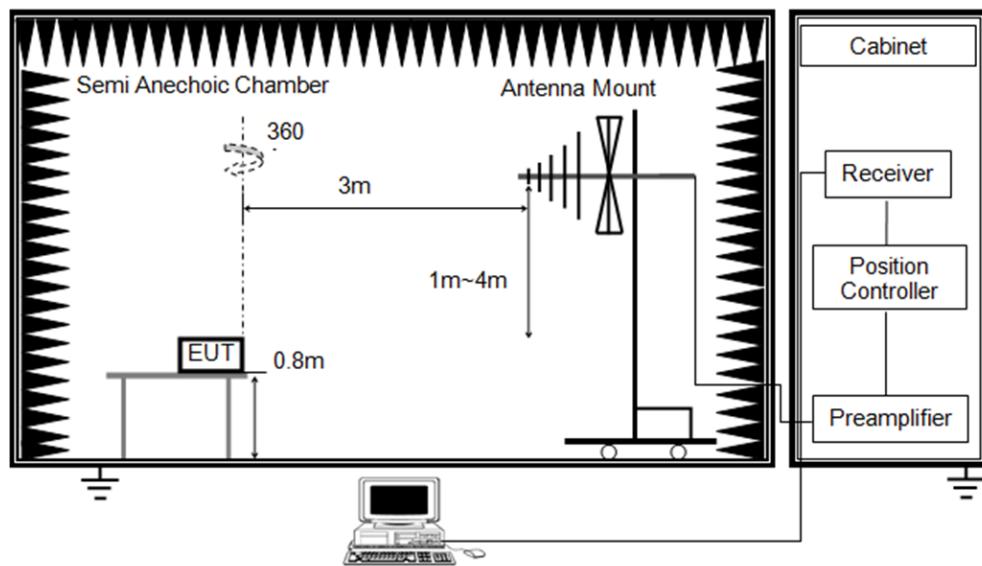


Above 1~40 GHz

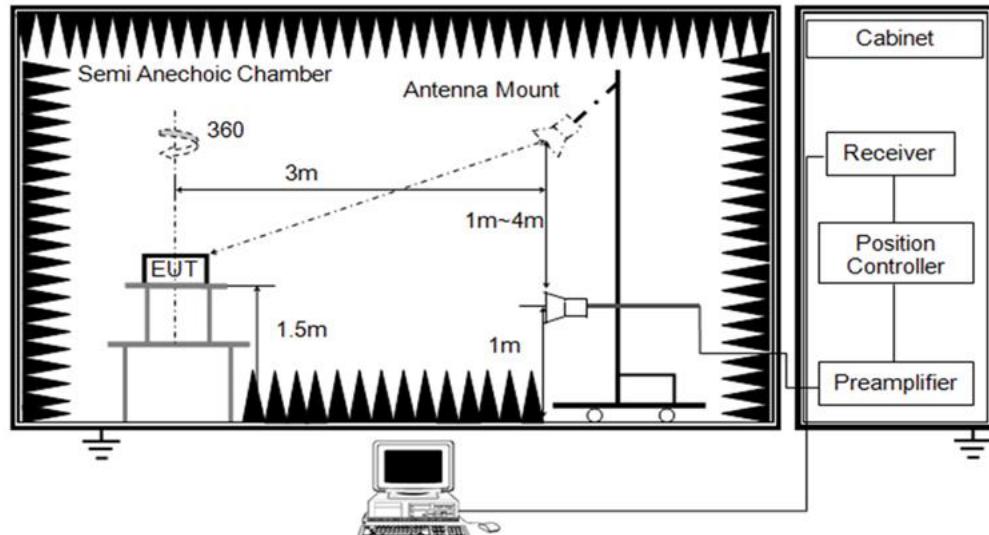


Above 40~90 GHz

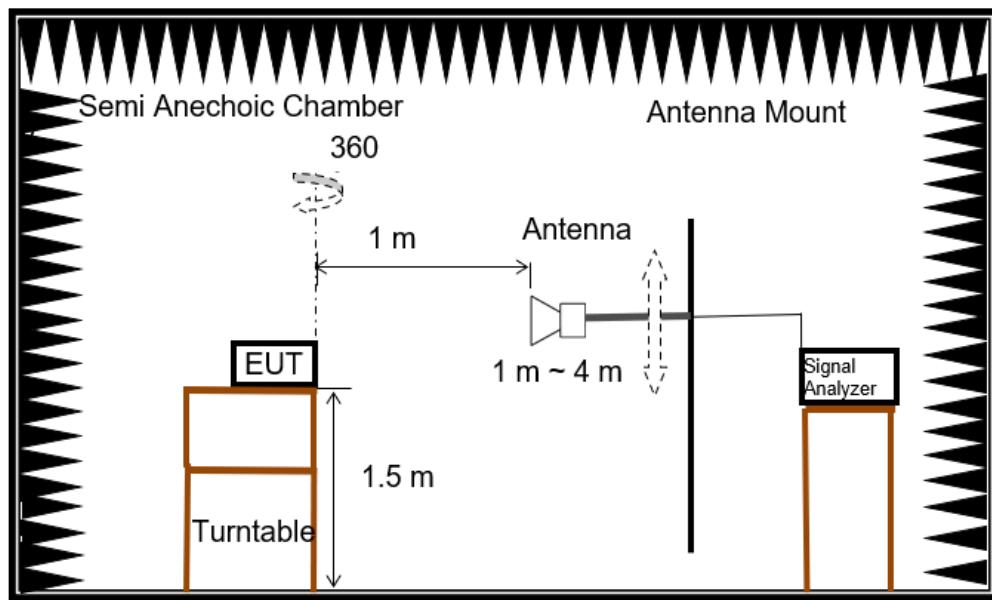

Above 90~110 GHz

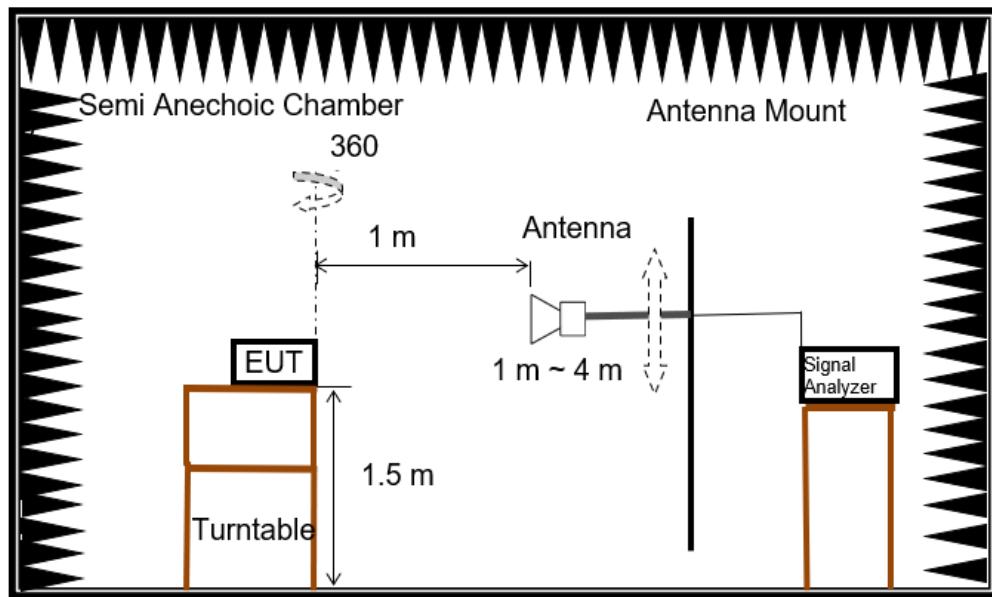

For Bandedge and Fundamental

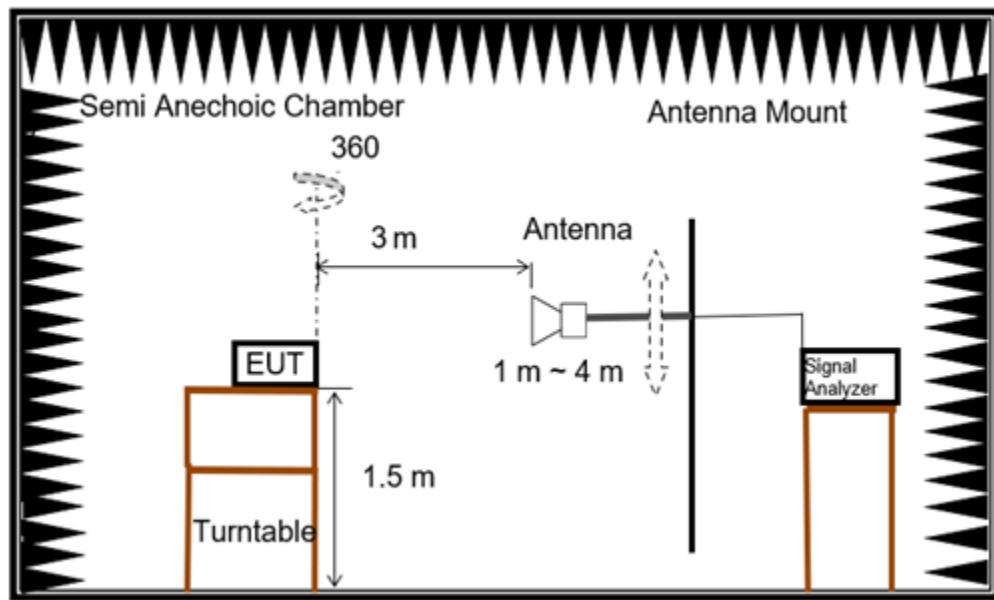
TEST ENVIRONMENT

Temperature	22 °C	Relative Humidity	64%
Atmosphere Pressure	101 kPa	Test Voltage	DC 24 V


TEST RESULTS

7.3.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

Frequency (MHz)	Reading (dBuV)	Correct	Peak Result@3m	AVG Result@3m	Peak	AVG	Margin Peak	Margin AVG	Polarity
					Limit@3m	Limit@3m			
24150	119.92	-4.81	115.11	94.85	127.96	107.96	-12.85	-13.11	H
	100.68	-4.85	95.83	75.57	127.96	107.96	-32.13	-32.39	V

7.3.2. RESTRICTED BANDEDGE


Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

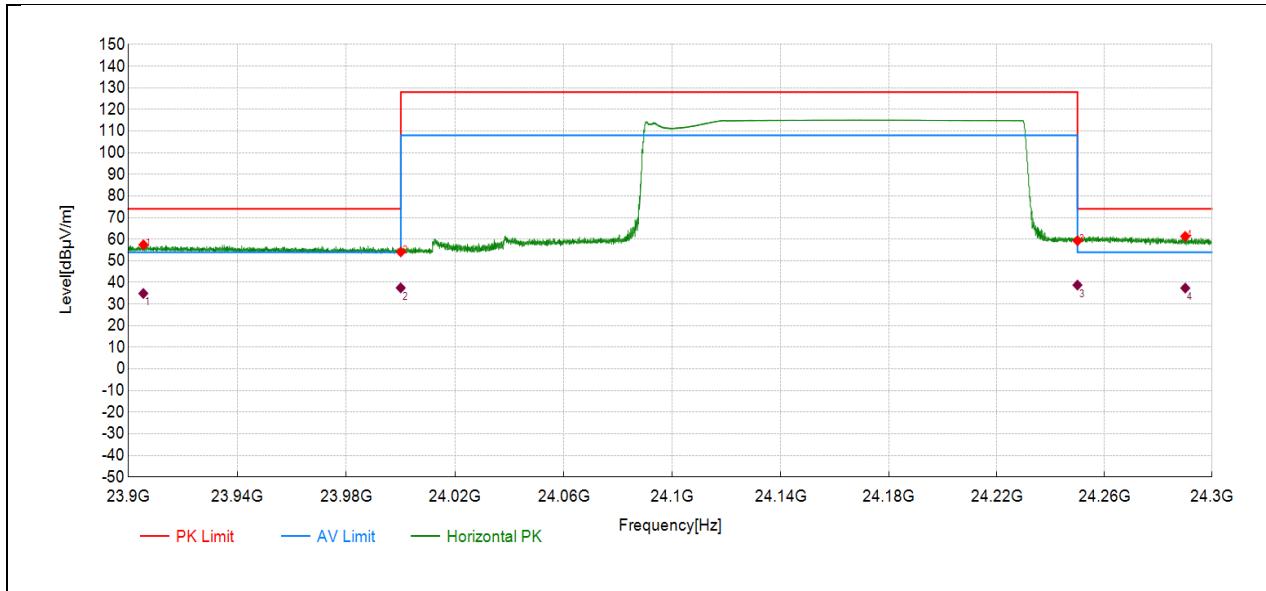

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol
1	23905.60	62.03	57.42	-4.61	74.00	16.58	PK	Horizontal
2	24000.00	59.36	54.10	-5.26	74.00	19.90	PK	Horizontal
3	24250.00	64.17	59.30	-4.87	74.00	14.70	PK	Horizontal
4	24290.00	66.25	61.29	-4.96	74.00	12.71	PK	Horizontal

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol
1	23905.60	-4.61	41.77	37.16	54.00	16.84	Horizontal
2	24000.00	-5.26	39.1	33.84	54.00	20.16	Horizontal
3	24250.00	-4.87	43.91	39.04	54.00	14.96	Horizontal
4	24290.00	-4.96	45.99	41.03	54.00	12.97	Horizontal

Test Mode:	FMCW	Test Channel:	1
Polarity:	Vertical	Test Voltage:	DC 24 V

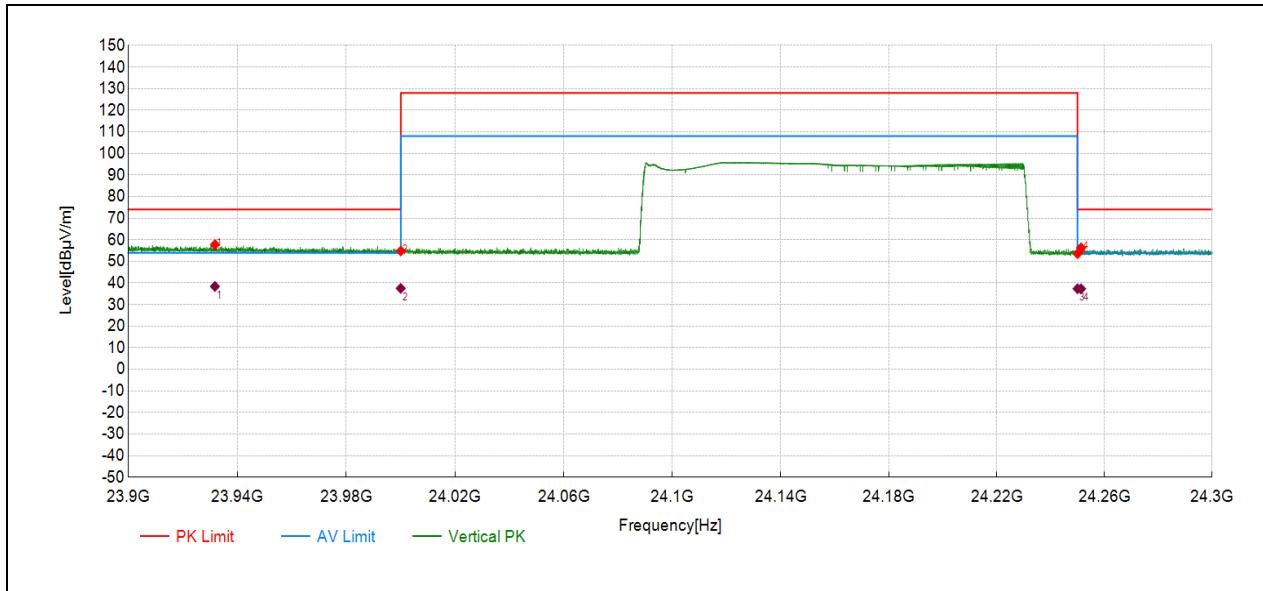


NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol
1	23931.80	62.56	57.77	-4.79	74.00	16.23	PK	Vertical
2	24000.00	60.08	54.82	-5.26	74.00	19.18	PK	Vertical
3	24250.00	58.42	53.55	-4.87	74.00	20.45	PK	Vertical
4	24251.32	61.17	56.30	-4.87	74.00	17.70	PK	Vertical

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V/m]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol
1	23931.80	-4.79	42.3	38.39	54.00	16.49	Vertical
2	24000.00	-5.26	39.82	37.49	54.00	19.44	Vertical
3	24250.00	-4.87	38.16	37.32	54.00	20.71	Vertical
4	24251.32	-4.87	40.91	37.29	54.00	17.96	Vertical


7.3.3. SPURIOUS EMISSIONS(9 kHz~30 MHz)

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

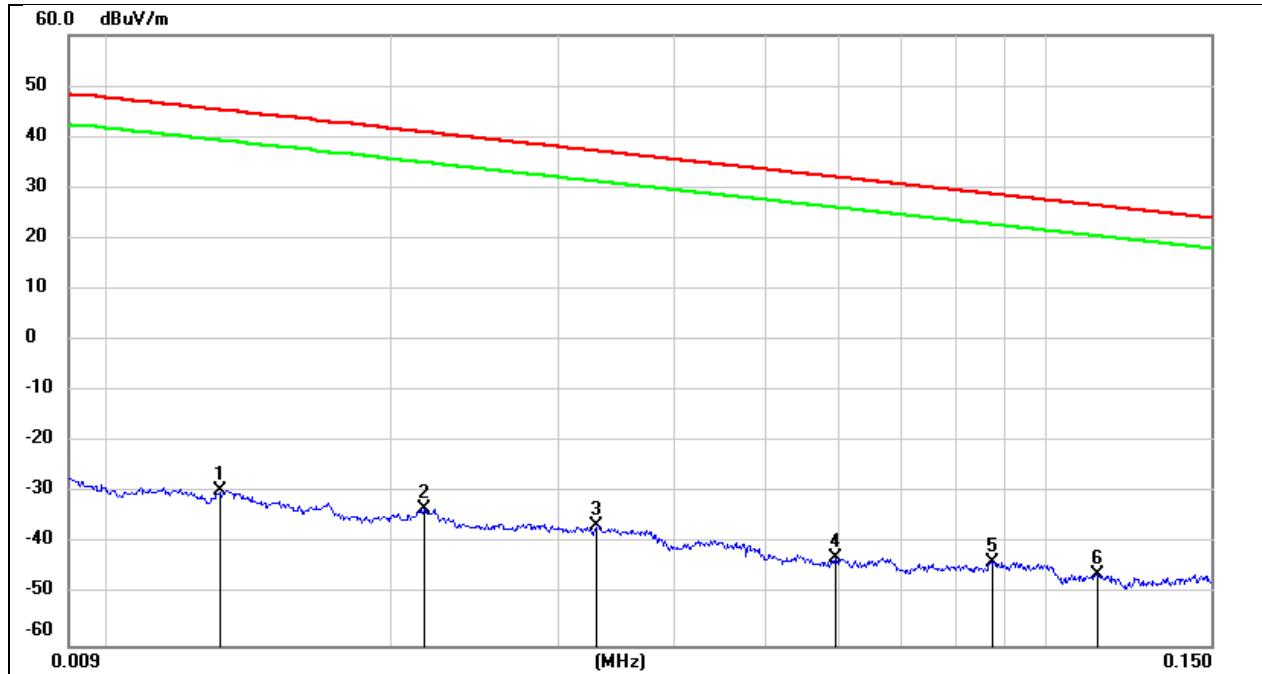


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0131	71.95	-101.38	-29.43	45.25	-74.68	peak
2	0.0216	68.19	-101.35	-33.16	40.91	-74.07	peak
3	0.0330	64.88	-101.40	-36.52	37.23	-73.75	peak
4	0.0594	58.81	-101.52	-42.71	32.13	-74.84	peak
5	0.0874	58.08	-101.69	-43.61	28.77	-72.38	peak
6	0.1131	55.83	-101.76	-45.93	26.54	-72.47	peak

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

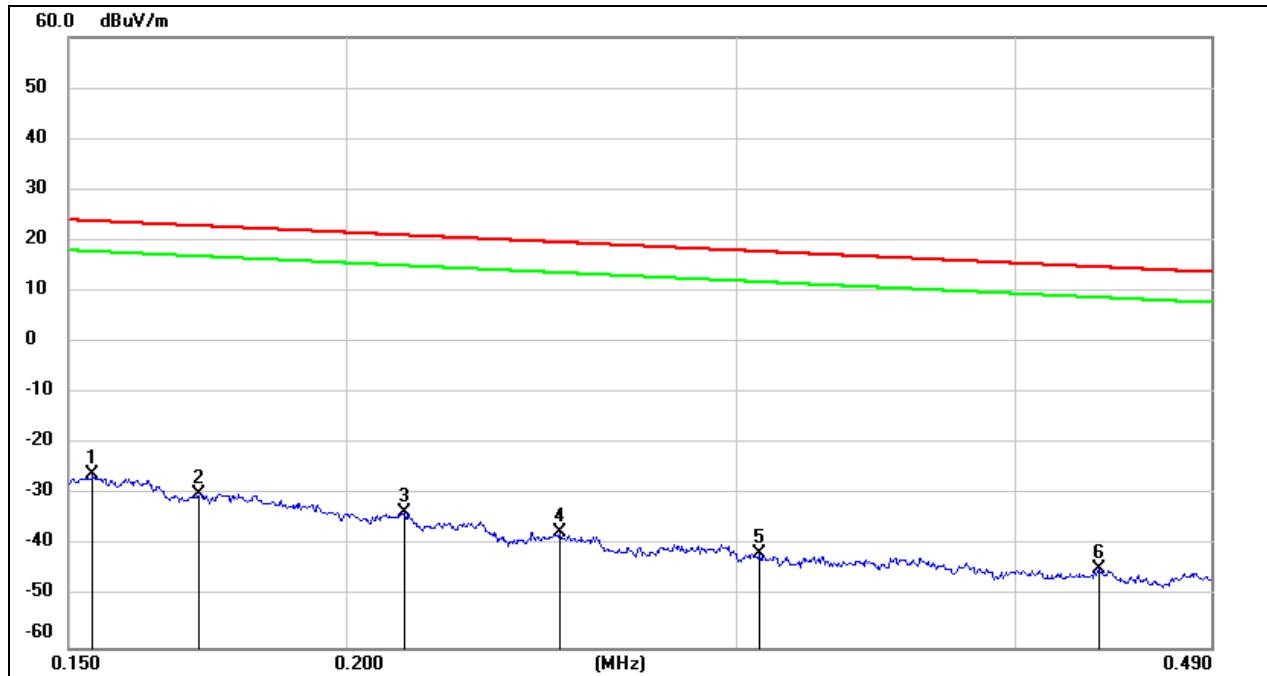

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1537	75.73	-101.64	-25.91	23.87	-49.78	peak
2	0.1718	71.86	-101.67	-29.81	22.91	-52.72	peak
3	0.2126	68.39	-101.74	-33.35	21.05	-54.40	peak
4	0.2494	64.46	-101.80	-37.34	19.66	-57.00	peak
5	0.3069	60.43	-101.86	-41.43	17.86	-59.29	peak
6	0.4364	57.36	-101.99	-44.63	14.80	-59.43	peak

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

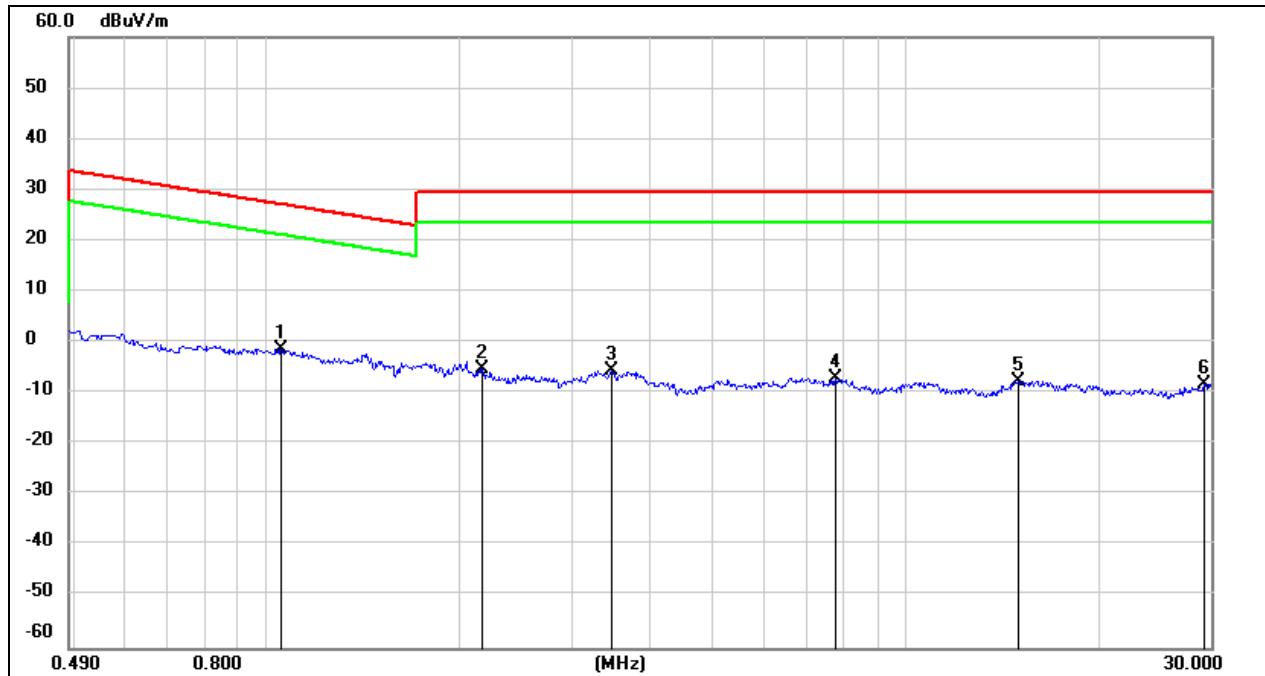


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1.0524	60.94	-62.24	-1.30	27.16	-28.46	peak
2	2.1730	56.48	-61.78	-5.30	29.54	-34.84	peak
3	3.4704	55.85	-61.46	-5.61	29.54	-35.15	peak
4	7.7495	53.98	-61.11	-7.13	29.54	-36.67	peak
5	15.0089	53.42	-61.02	-7.60	29.54	-37.14	peak
6	29.3213	51.80	-60.02	-8.22	29.54	-37.76	peak

Note: All modes had been tested, only the worst data recorded in the report.


7.3.4. SPURIOUS EMISSIONS(30 MHz~1 GHz)

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

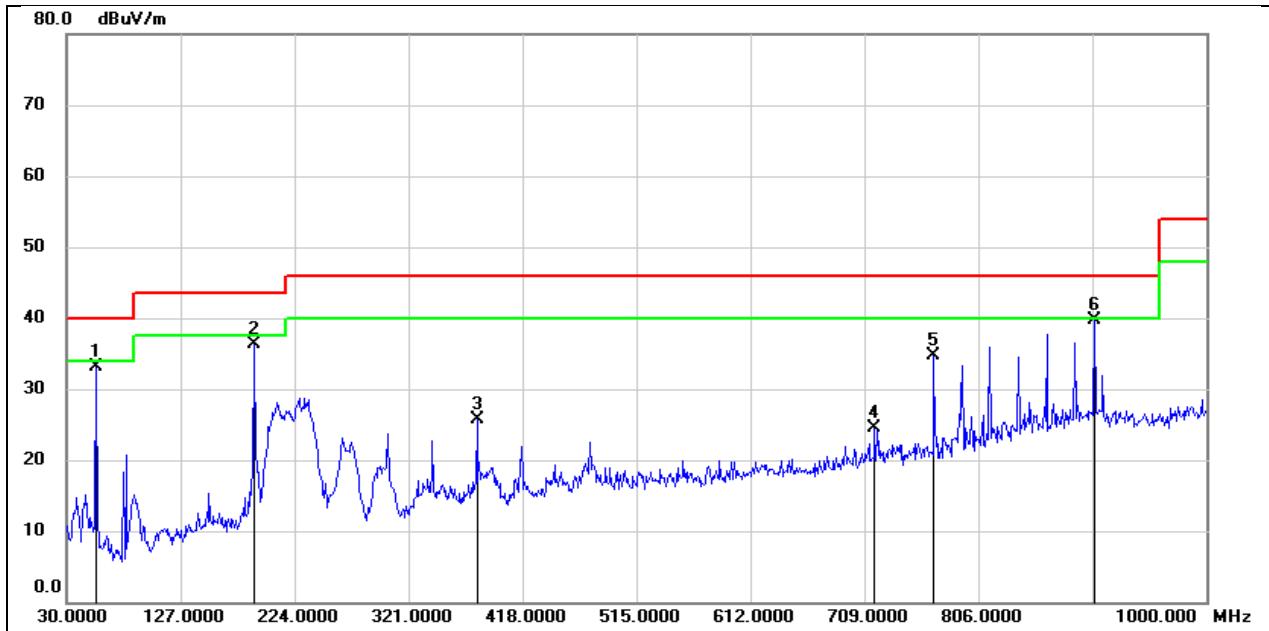

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	55.2200	48.10	-15.00	33.10	40.00	-6.90	QP
2	189.0800	48.21	-11.94	36.27	43.50	-7.23	QP
3	379.2000	35.21	-9.57	25.64	46.00	-20.36	QP
4	717.7300	28.41	-3.98	24.43	46.00	-21.57	QP
5	768.1700	37.82	-3.21	34.61	46.00	-11.39	QP
6	904.9400	40.15	-0.47	39.68	46.00	-6.32	QP

Test Mode:	FMCW	Test Channel:	1
Polarity:	Vertical	Test Voltage:	DC 24 V

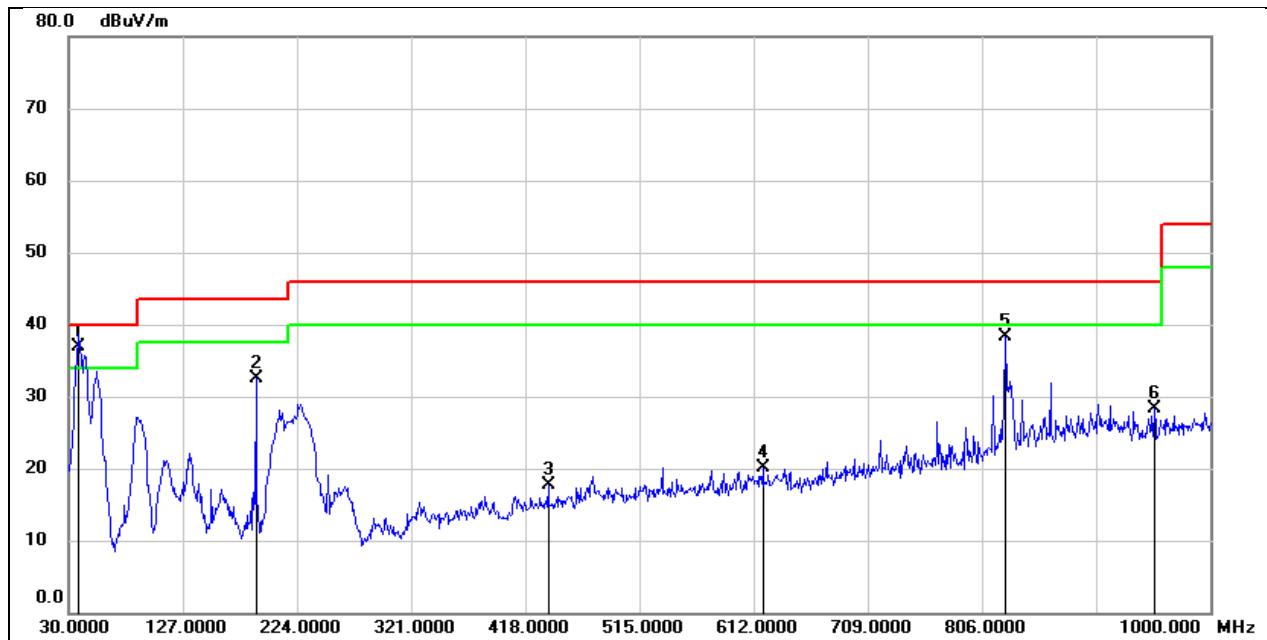


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.7300	51.62	-14.69	36.93	40.00	-3.07	QP
2	189.0800	44.37	-11.94	32.43	43.50	-11.07	QP
3	437.4000	26.18	-8.51	17.67	46.00	-28.33	QP
4	619.7600	25.81	-5.68	20.13	46.00	-25.87	QP
5	826.3700	40.18	-1.92	38.26	46.00	-7.74	QP
6	952.4700	29.06	-0.80	28.26	46.00	-17.74	QP

Note: All modes had been tested, only the worst data recorded in the report.


7.3.5. SPURIOUS EMISSIONS(1 GHz~3 GHz)

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

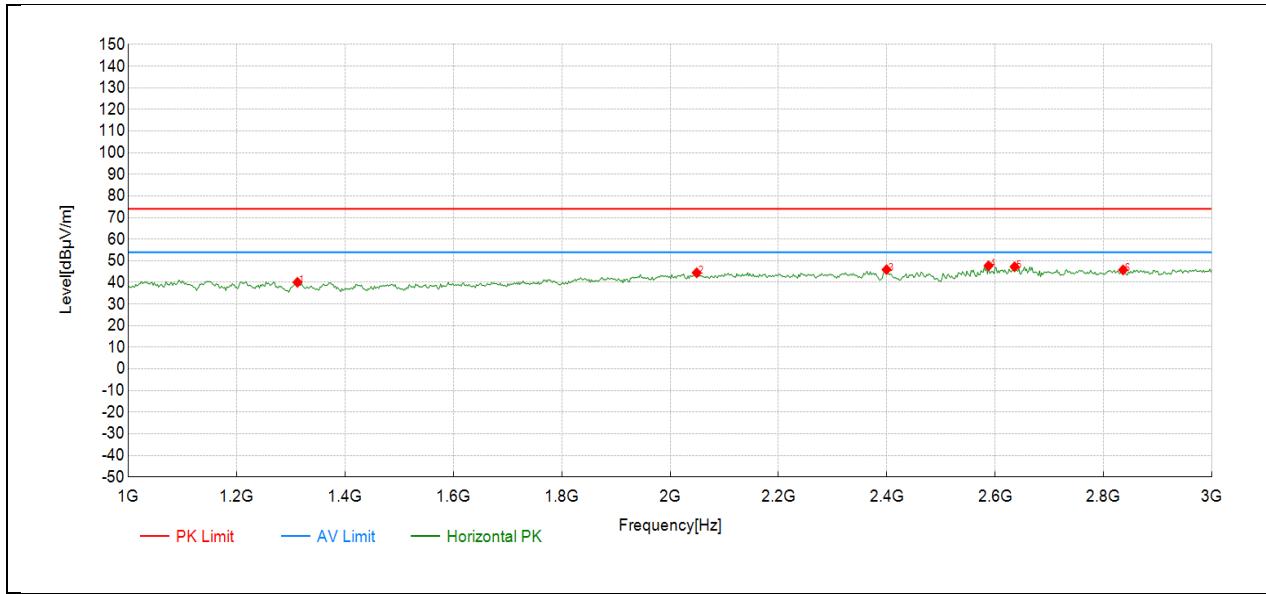

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol
1	1312.31	52.23	40.06	-12.17	74.00	33.94	PK	Horizontal
2	2049.05	51.70	44.45	-7.25	74.00	29.55	PK	Horizontal
3	2399.40	52.38	45.93	-6.45	74.00	28.07	PK	Horizontal
4	2587.59	53.77	47.70	-6.07	74.00	26.30	PK	Horizontal
5	2635.64	53.15	47.24	-5.91	74.00	26.76	PK	Horizontal
6	2835.84	51.13	45.80	-5.33	74.00	28.20	PK	Horizontal


Test Mode:	FMCW	Test Channel:	1
Polarity:	Vertical	Test Voltage:	DC 24 V

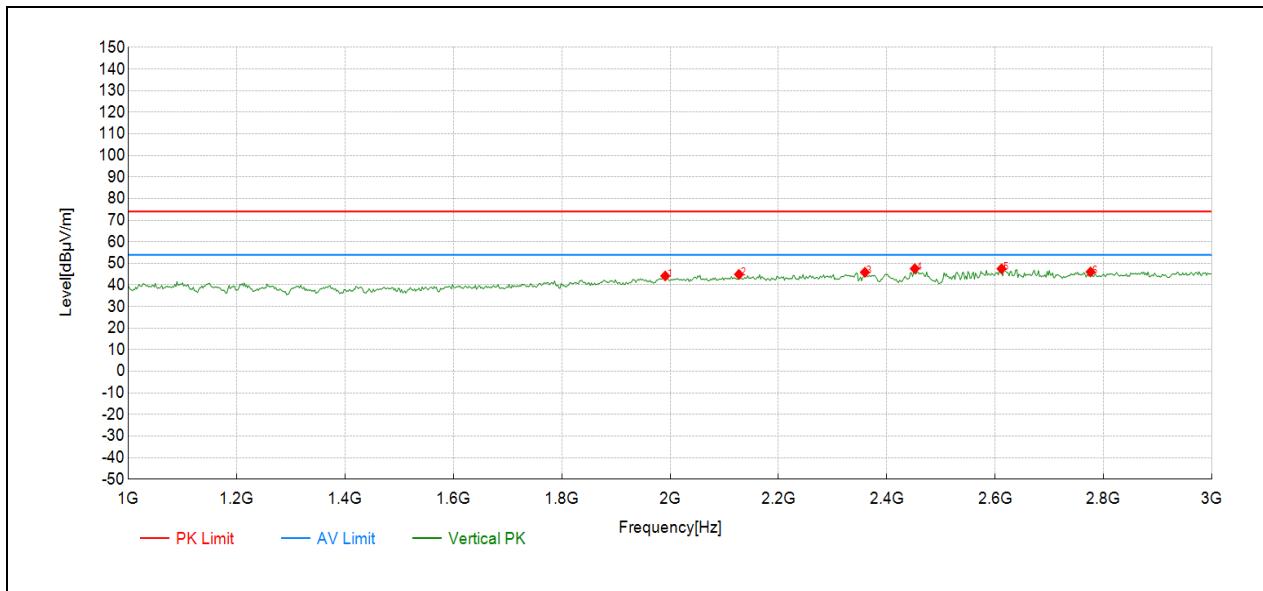

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol
1	1990.99	51.68	44.17	-7.51	74.00	29.83	PK	Vertical
2	2127.13	51.90	44.89	-7.01	74.00	29.11	PK	Vertical
3	2359.36	52.39	45.87	-6.52	74.00	28.13	PK	Vertical
4	2451.45	53.92	47.54	-6.38	74.00	26.46	PK	Vertical
5	2611.61	53.48	47.49	-5.99	74.00	26.51	PK	Vertical
6	2775.78	51.52	46.04	-5.48	74.00	27.96	PK	Vertical


7.3.6. SPURIOUS EMISSIONS(3 GHz~18 GHz)

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

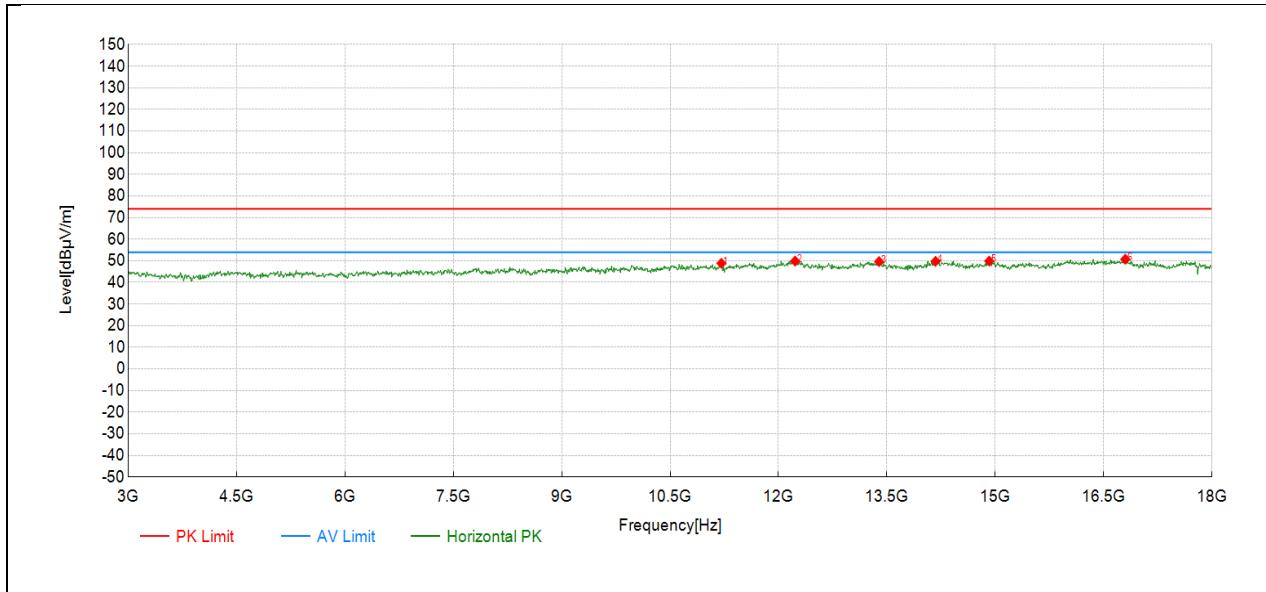

NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol
1	11209.10	44.09	48.85	4.76	74.00	25.15	PK	Horizontal
2	12229.61	43.32	49.88	6.56	74.00	24.12	PK	Horizontal
3	13392.70	41.60	49.65	8.05	74.00	24.35	PK	Horizontal
4	14173.09	40.98	49.74	8.76	74.00	24.26	PK	Horizontal
5	14915.96	41.98	49.88	7.90	74.00	24.12	PK	Horizontal
6	16799.40	40.21	50.74	10.53	74.00	23.26	PK	Horizontal


Test Mode:	FMCW	Test Channel:	1
Polarity:	Vertical	Test Voltage:	DC 24 V

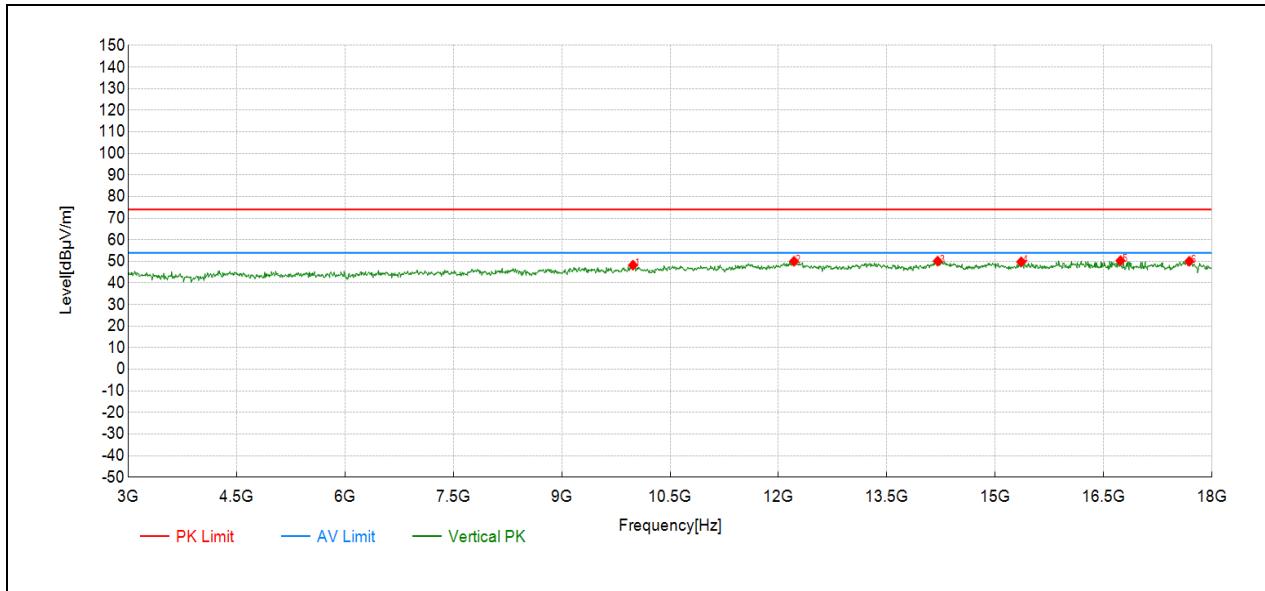

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol
1	9985.99	43.77	48.23	4.46	74.00	25.77	PK	Vertical
2	12214.61	43.41	50.02	6.61	74.00	23.98	PK	Vertical
3	14203.10	41.21	50.09	8.88	74.00	23.91	PK	Vertical
4	15358.68	41.63	49.78	8.15	74.00	24.22	PK	Vertical
5	16731.87	39.73	50.32	10.59	74.00	23.68	PK	Vertical
6	17684.84	37.68	50.05	12.37	74.00	23.95	PK	Vertical

7.3.7. SPURIOUS EMISSIONS(18 GHz~26.5 GHz)


Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

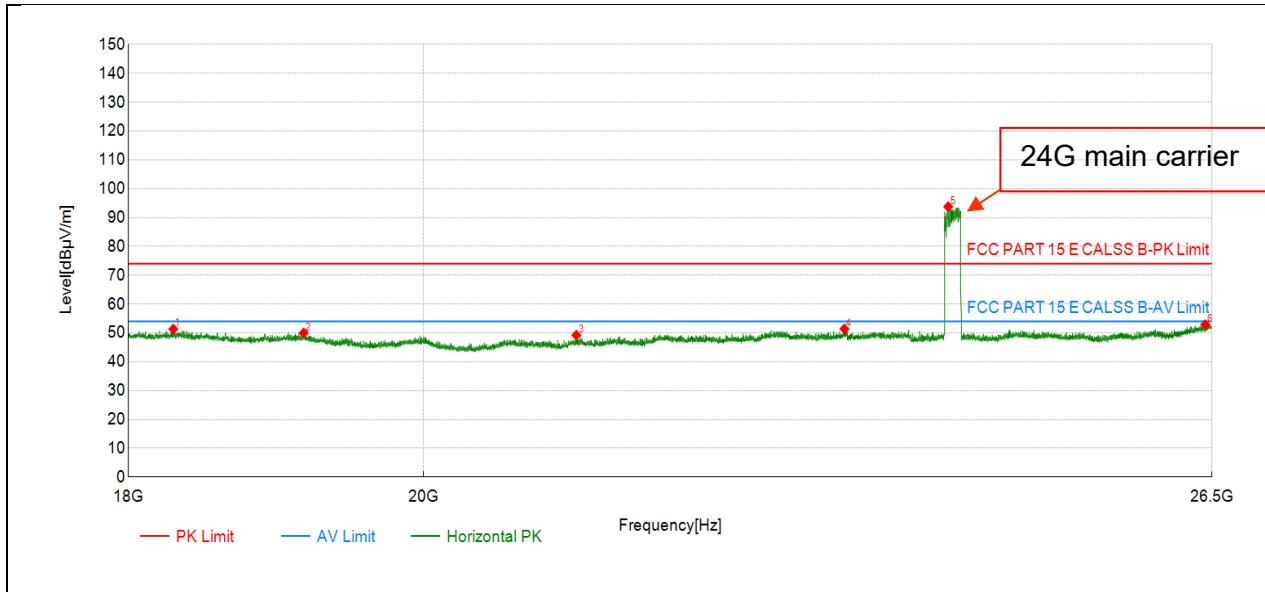

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol
1	18292.40	55.85	51.34	-4.51	74.00	22.66	PK	Horizontal
2	19163.65	54.64	49.99	-4.65	74.00	24.01	PK	Horizontal
3	21122.05	55.20	49.22	-5.98	74.00	24.78	PK	Horizontal
4	23241.95	56.41	51.36	-5.05	74.00	22.64	PK	Horizontal
5	24119.15	98.62	93.77	-4.85	/	/	PK	Horizontal
6	26435.40	54.96	52.85	-2.11	74.00	21.15	PK	Horizontal

Note: Point 5 is the fundamental emission of 24G radar.

Test Mode:	FMCW	Test Channel:	1
Polarity:	Vertical	Test Voltage:	DC 24 V

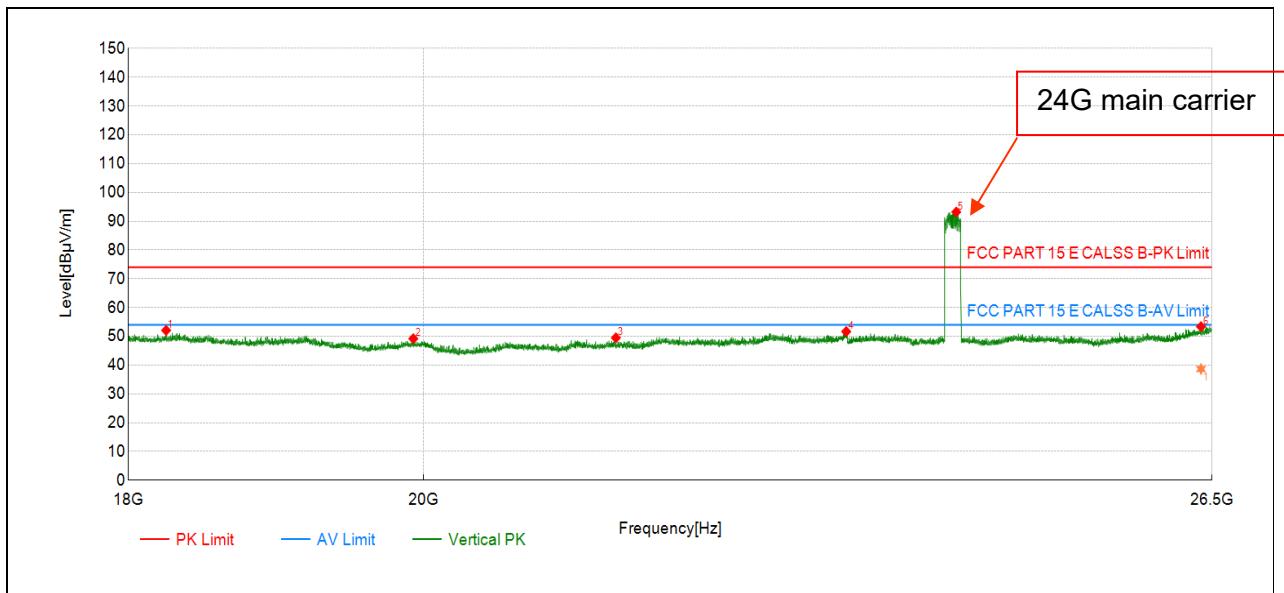


NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol
1	18245.65	56.50	52.08	-4.42	74.00	21.92	PK	Vertical
2	19927.80	54.96	49.18	-5.78	74.00	24.82	PK	Vertical
3	21422.10	56.25	49.49	-6.76	74.00	24.51	PK	Vertical
4	23257.25	56.59	51.66	-4.93	74.00	22.34	PK	Vertical
5	24188.00	97.97	93.20	-4.77	/	/	PK	Vertical
6	26395.45	55.62	53.37	-2.25	74.00	20.63	PK	Vertical

Note: Point 5 is the fundamental emission of 24G radar.

7.3.8. SPURIOUS EMISSIONS(26.5 GHz~40 GHz)


Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal	Test Voltage:	DC 24 V

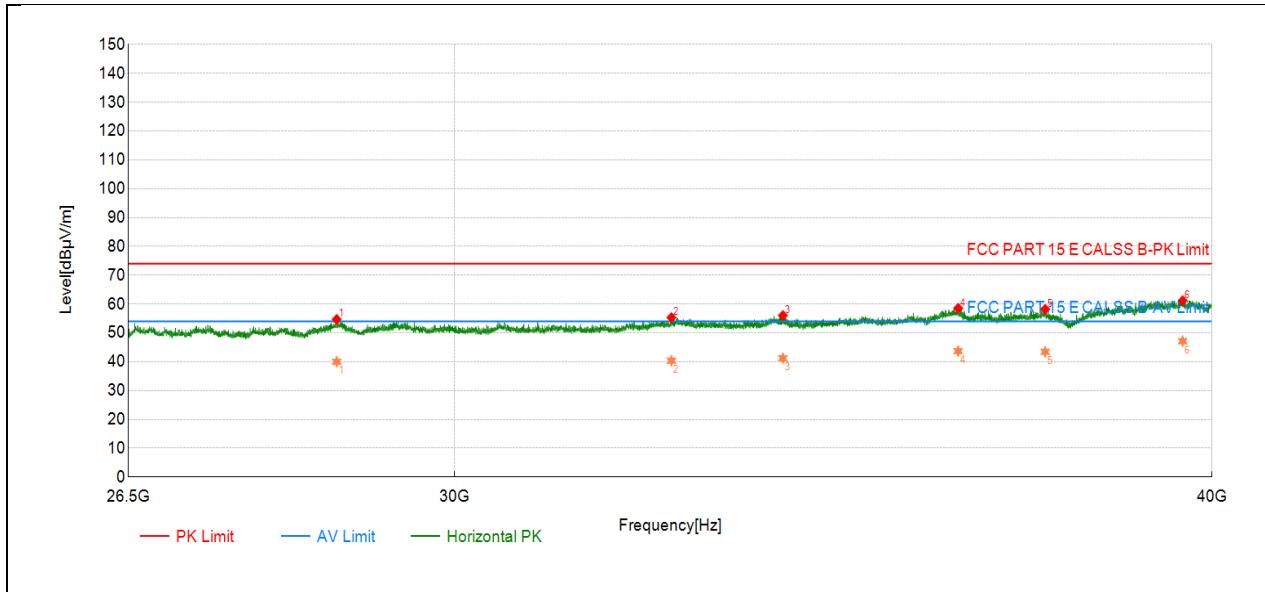

NO.	Frequency [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Factor [dB/m]	Limit [dB μ V/m]	Margin [dB]	Det	Pol
1	28684.30	54.58	54.70	0.12	74.00	19.30	PK	Horizontal
2	32573.65	55.72	55.31	-0.41	74.00	18.69	PK	Horizontal
3	33983.05	54.37	56.03	1.66	74.00	17.97	PK	Horizontal
4	36322.60	53.12	58.52	5.40	74.00	15.48	PK	Horizontal
5	37543.00	53.41	58.19	4.78	74.00	15.81	PK	Horizontal
6	39555.85	52.69	61.18	8.49	74.00	12.82	PK	Horizontal

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dB μ V]	AV Value [dB μ V/m]	AV Limit [dB μ V/m]	AV Margin [dB]	Pol
1	28684.30	0.12	34.32	34.44	54.00	19.56	Horizontal
2	32573.65	-0.41	35.46	35.05	54.00	18.95	Horizontal
3	33983.05	1.66	34.11	35.77	54.00	18.23	Horizontal
4	36322.60	5.40	32.86	38.26	54.00	15.74	Horizontal
5	37543.00	4.78	33.15	37.93	54.00	16.07	Horizontal
6	39555.85	8.49	32.43	40.92	54.00	13.08	Horizontal

Test Mode:	FMCW	Test Channel:	1
Polarity:	Vertical	Test Voltage:	DC 24 V

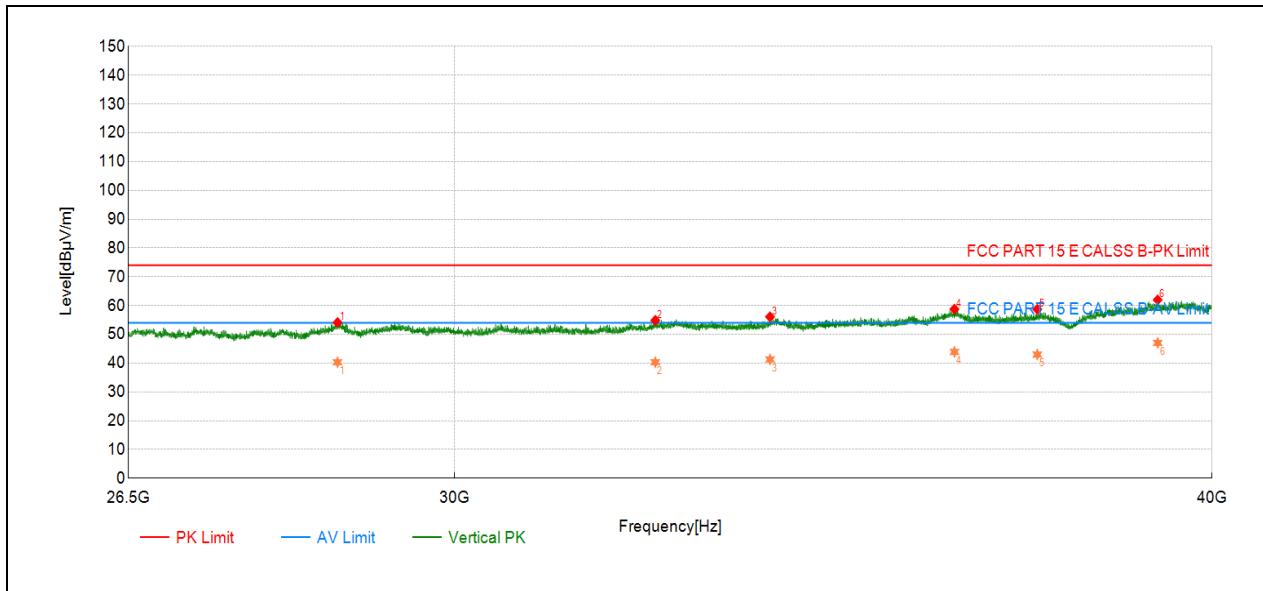


NO.	Frequency [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol
1	28693.75	53.88	54.11	0.23	74.00	19.89	PK	Vertical
2	32375.20	55.79	54.86	-0.93	74.00	19.14	PK	Vertical
3	33817.00	54.71	56.09	1.38	74.00	17.91	PK	Vertical
4	36271.30	53.35	58.76	5.41	74.00	15.24	PK	Vertical
5	37430.95	54.12	58.69	4.57	74.00	15.31	PK	Vertical
6	39181.90	55.24	61.97	6.73	74.00	12.03	PK	Vertical

NO.	Frequency [MHz]	Factor [dB/m]	AV Reading [dBμV]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Pol
1	28693.75	0.23	33.62	33.85	54.00	20.15	Vertical
2	32375.20	-0.93	35.53	34.6	54.00	19.4	Vertical
3	33817.00	1.38	34.45	35.83	54.00	18.17	Vertical
4	36271.30	5.41	33.09	38.5	54.00	15.5	Vertical
5	37430.95	4.57	33.86	38.43	54.00	15.57	Vertical
6	39181.90	6.73	34.98	41.71	54.00	12.29	Vertical

7.3.9. SPURIOUS EMISSIONS (40 GHz ~ 60 GHz)

Test Mode:	FMCW PK	Test Channel:	1
Polarity:	Horizontal/Vertical	Test Voltage:	DC 24 V

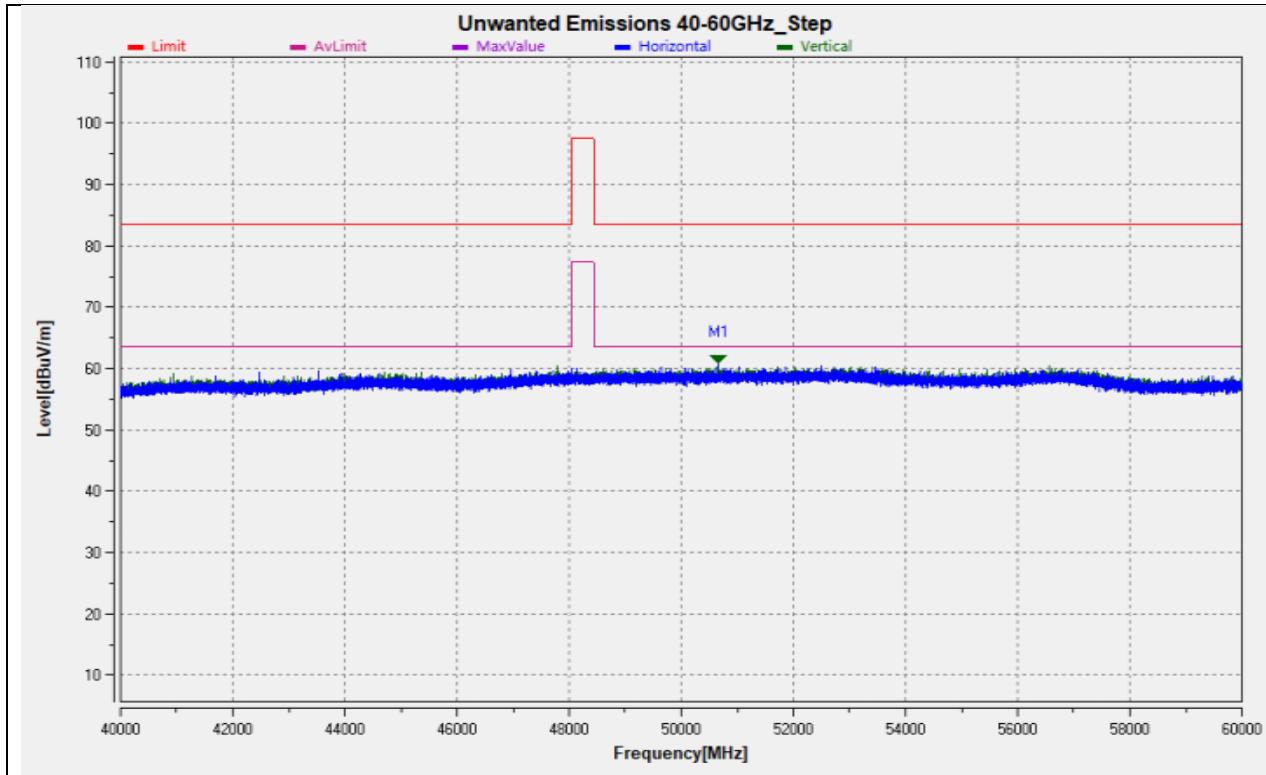


No.	Frequency	Reading	Correct	Result@1m	Limit@1m	Result@3m	Limit@3m	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	50668	21.388	39.398	60.786	83.5	51.286	74	-22.714	Horizontal

Distance correct factor=20log (1.00 m/3.00 m) = -9.5 dB

7.3.10. SPURIOUS EMISSIONS (60 GHz ~ 90 GHz)

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal/Vertical	Test Voltage:	DC 24 V

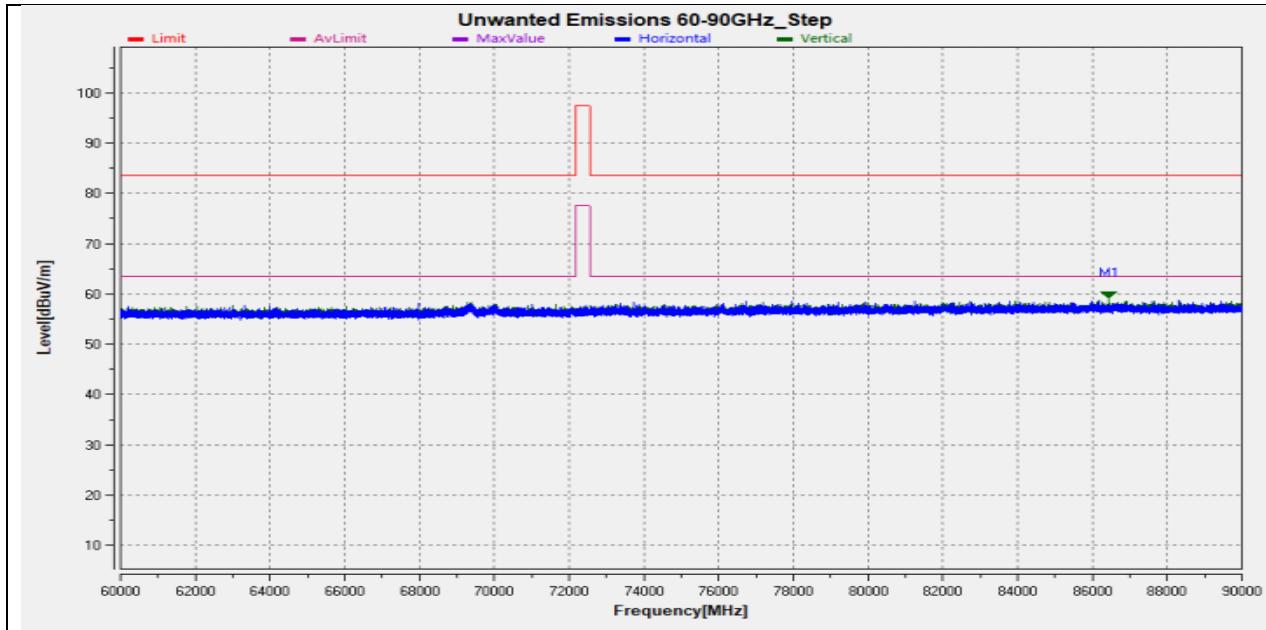


No.	Frequency	Reading	Correct	Result@1m	Limit@1m	Result@3m	Limit@3m	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	86425	16.130	42.926	59.056	83.5	49.556	74	-24.444	Vertical

Distance correct factor=20log (1.00 m/3.00 m) = -9.5 dB

7.3.11. SPURIOUS EMISSIONS (90 GHz ~ 110 GHz)

Test Mode:	FMCW	Test Channel:	1
Polarity:	Horizontal/Vertical	Test Voltage:	DC 24 V

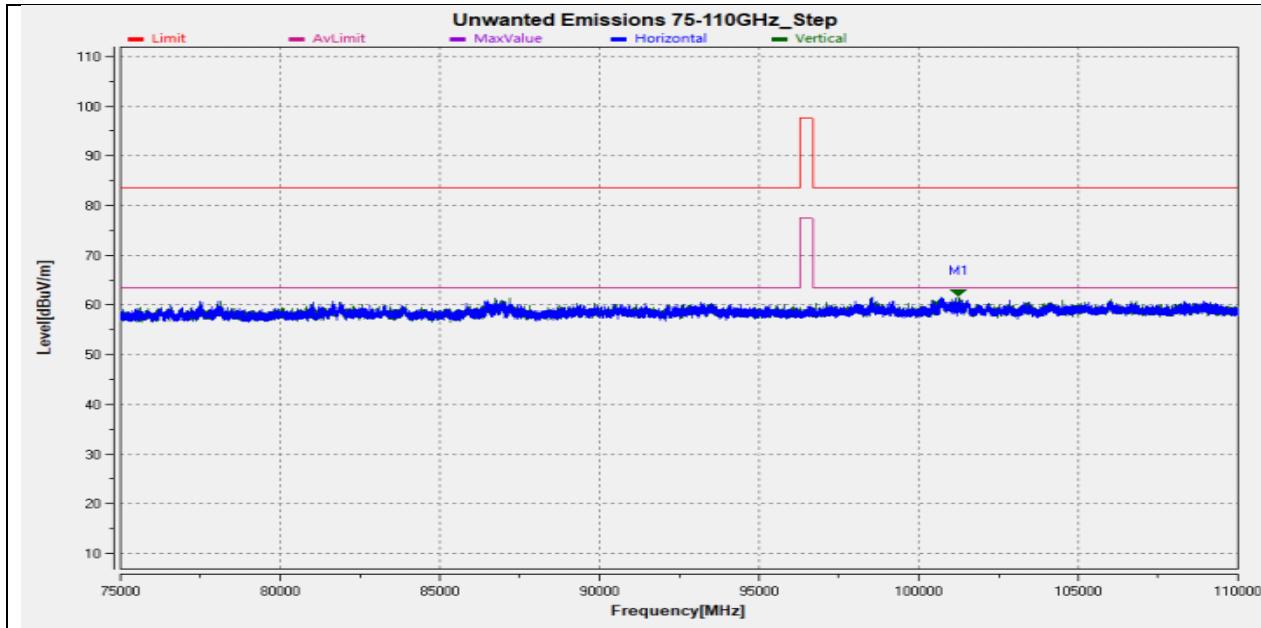

No.	Frequency	Reading	Correct	Result@1m	Limit@1m	Result@3m	Limit@3m	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	101231	17.471	44.382	61.853	83.5	52.353	74	-21.647	Vertical

Distance correct factor=20log (1.00 m/3.00 m) = -9.5 dB

8. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

RESULTS

Complies

END OF REPORT