



Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Privacy Labs Server v2

Test Model: HPS20-1T-W-US

Environmental Conditions

Temperature:	23.5℃
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Kay Hu
Supervised by:	Li Huan



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	22.356	--	Pass
NVNT	a	5200	Ant0	25.587	--	Pass
NVNT	a	5240	Ant0	26.53	--	Pass
NVNT	n20	5180	Ant0	24.003	--	Pass
NVNT	n20	5200	Ant0	26.933	--	Pass
NVNT	n20	5240	Ant0	29.457	--	Pass
NVNT	n40	5190	Ant0	40.294	--	Pass
NVNT	n40	5230	Ant0	47.828	--	Pass
NVNT	ac20	5180	Ant0	25.234	--	Pass
NVNT	ac20	5200	Ant0	23.75	--	Pass
NVNT	ac20	5240	Ant0	25.524	--	Pass
NVNT	ac40	5190	Ant0	42.669	--	Pass
NVNT	ac40	5230	Ant0	48.927	--	Pass
NVNT	ac80	5210	Ant0	79.302	--	Pass






Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0



-26dB Bandwidth NVNT a 5200MHz Ant0

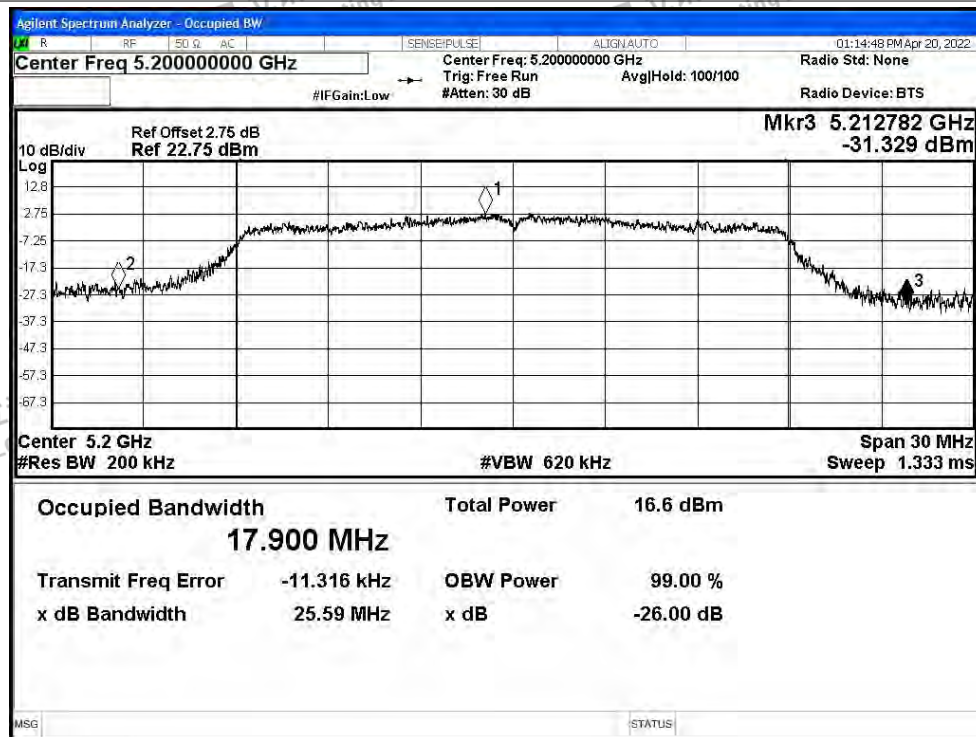



-26dB Bandwidth NVNT a 5240MHz Ant0




-26dB Bandwidth NVNT n20 5180MHz Ant0






-26dB Bandwidth NVNT n20 5200MHz Ant0

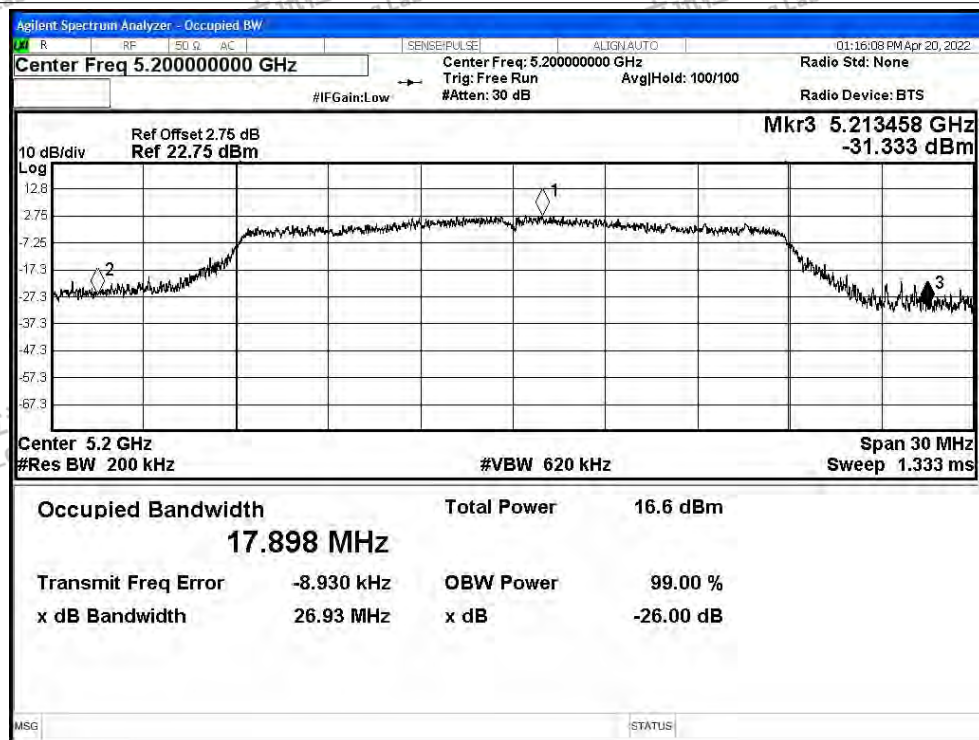

-26dB Bandwidth NVNT n20 5240MHz Ant0

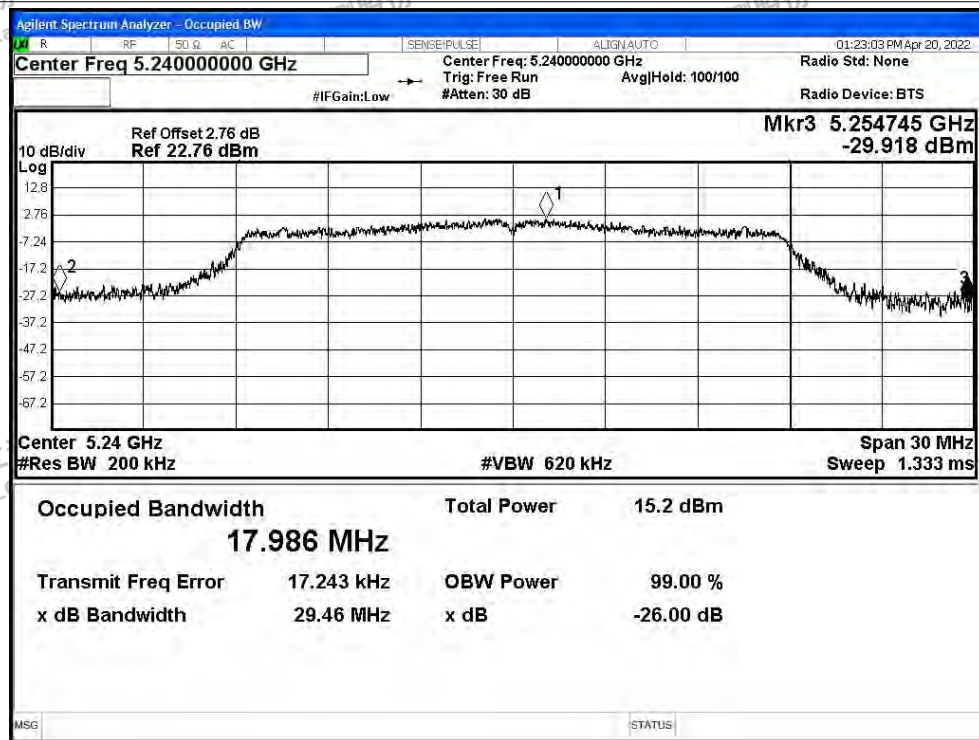




-26dB Bandwidth NVNT n40 5190MHz Ant0



-26dB Bandwidth NVNT n40 5230MHz Ant0

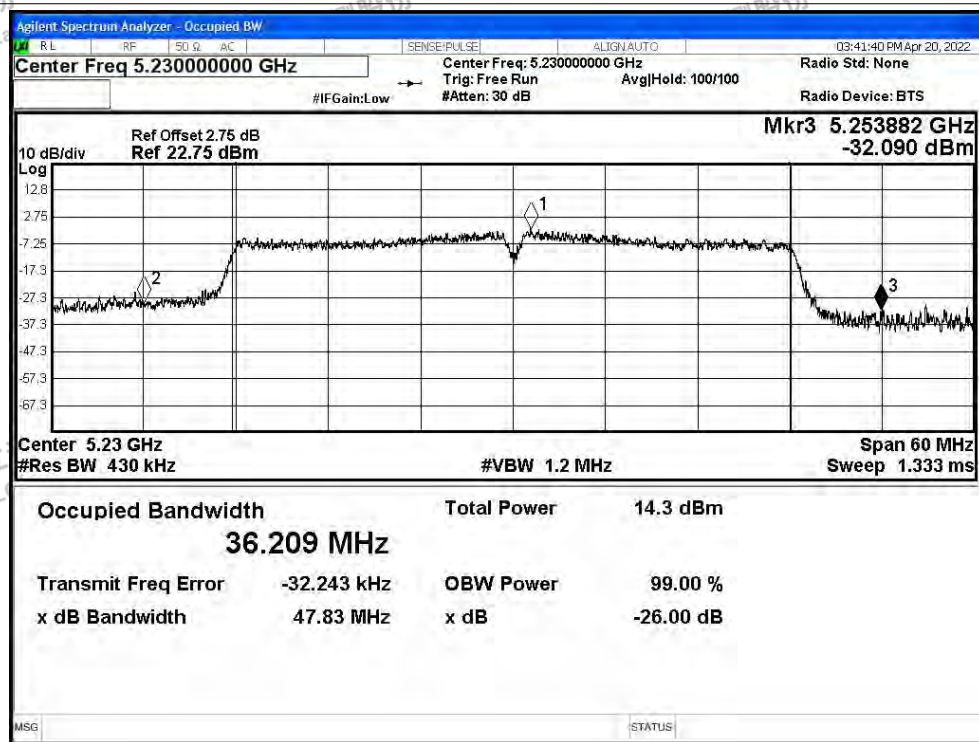




-26dB Bandwidth NVNT ac20 5180MHz Ant0




-26dB Bandwidth NVNT ac20 5200MHz Ant0

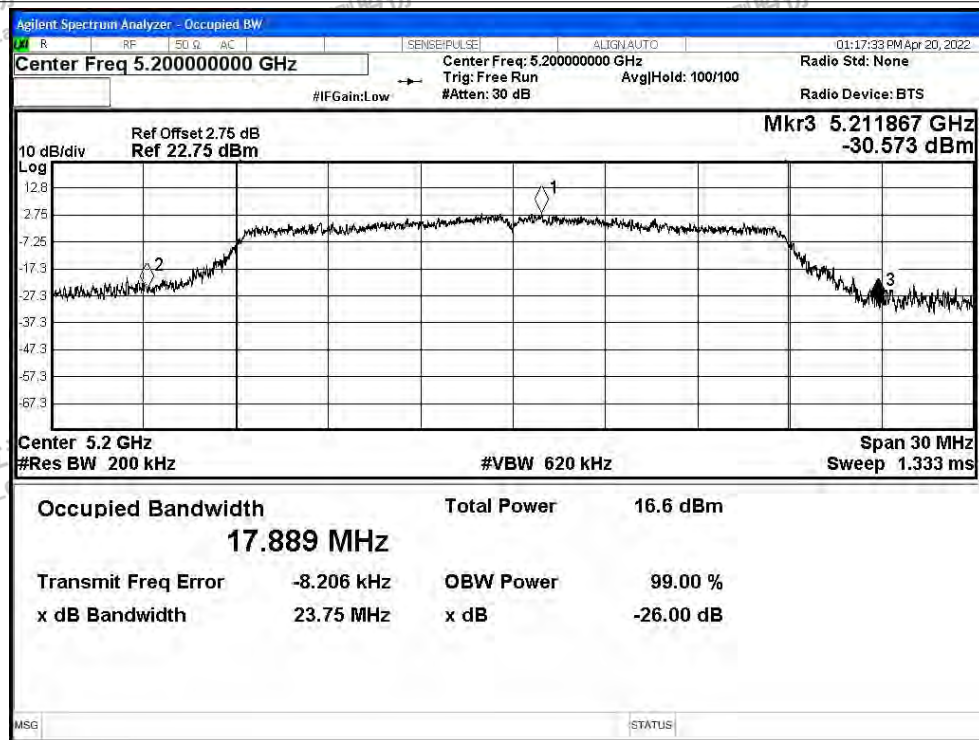




-26dB Bandwidth NVNT ac20 5240MHz Ant0

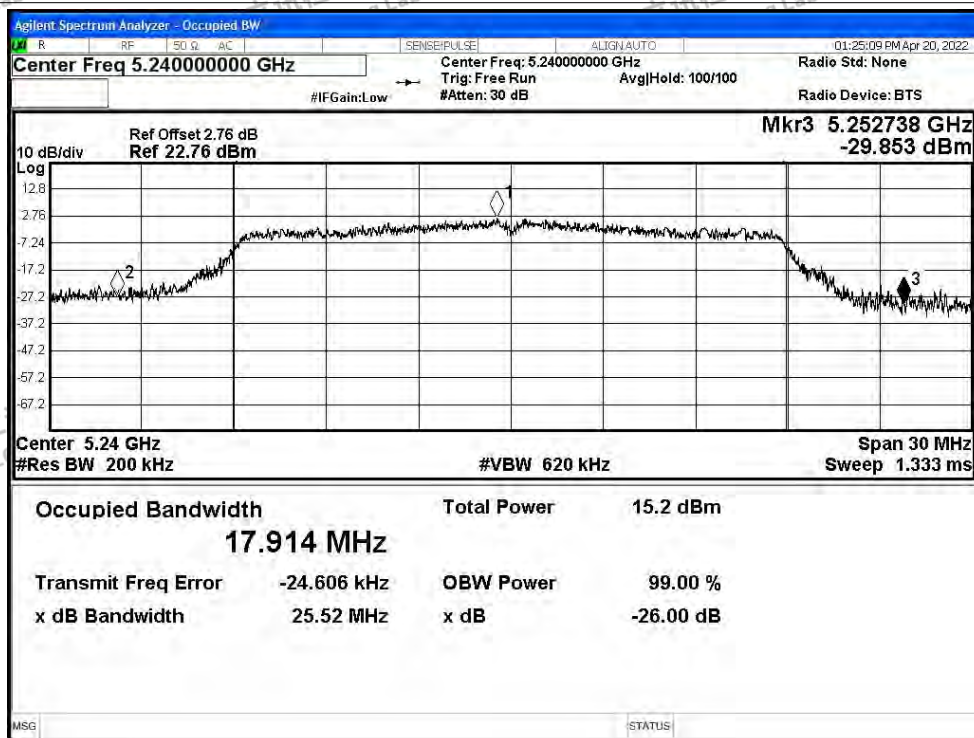


-26dB Bandwidth NVNT ac40 5190MHz Ant0

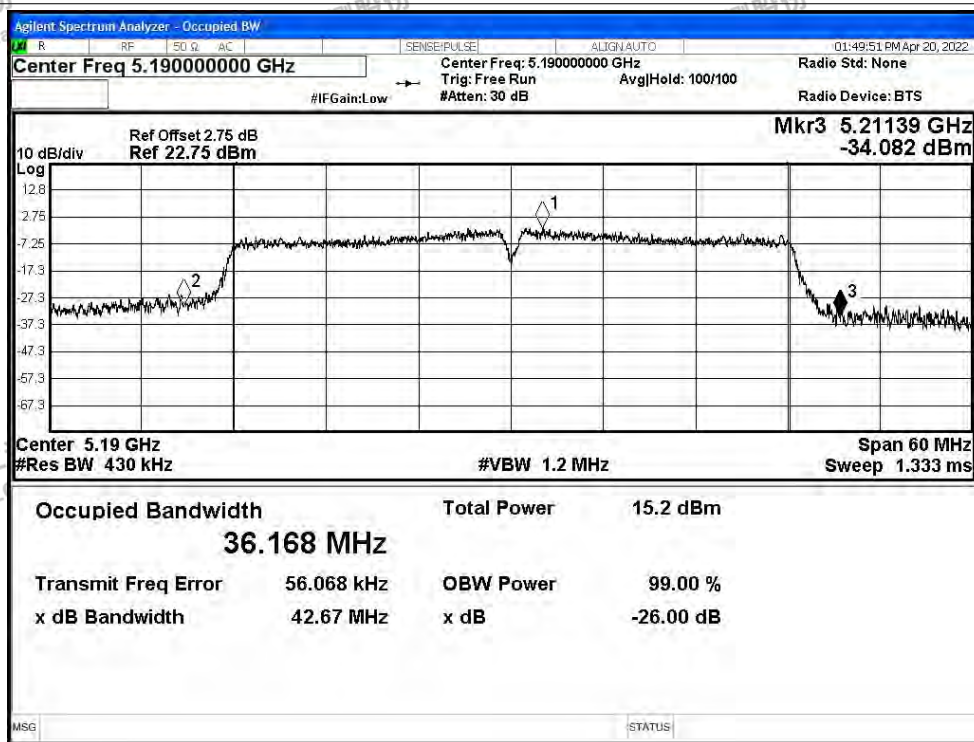




-26dB Bandwidth NVNT ac40 5230MHz Ant0

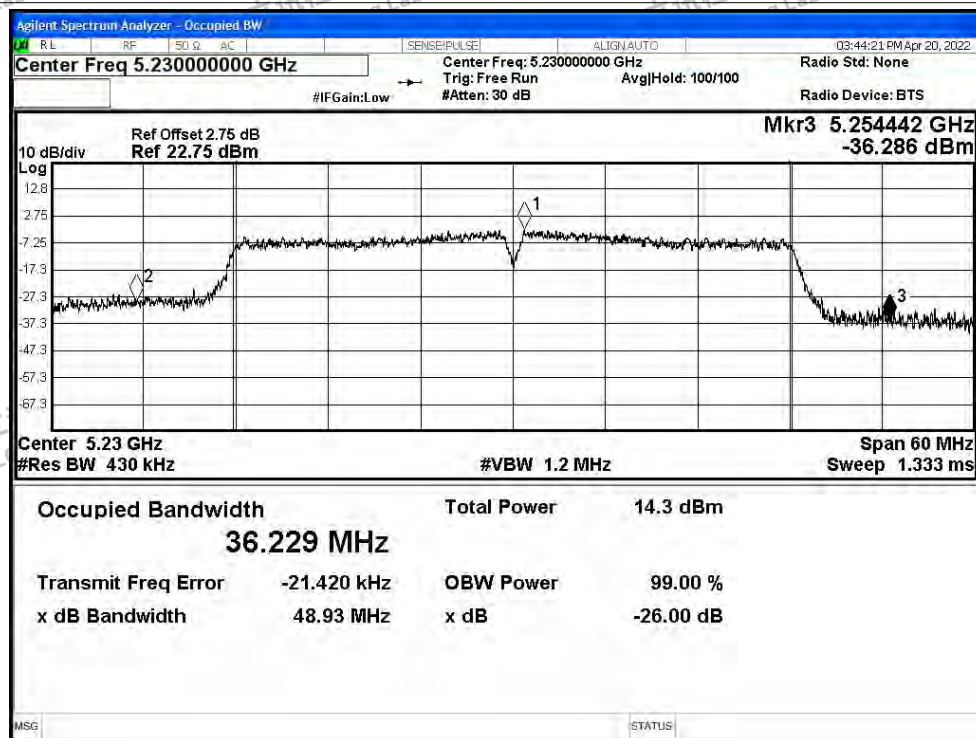

-26dB Bandwidth NVNT ac80 5210MHz Ant0

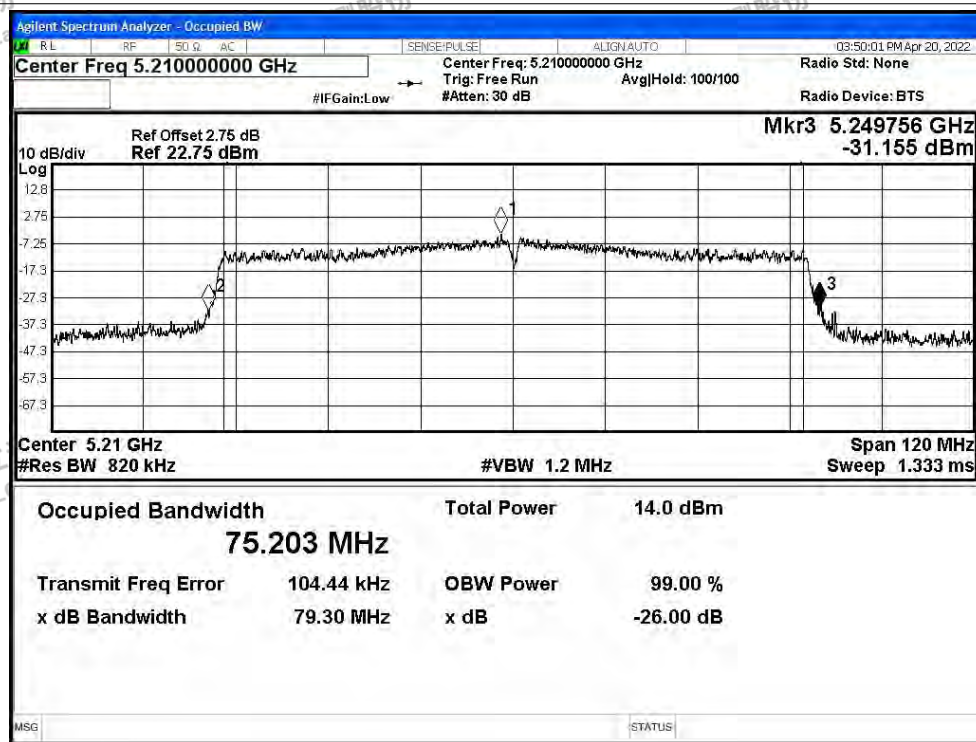



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	24.73	--	Pass
NVNT	a	5200	Ant1	25.342	--	Pass
NVNT	a	5240	Ant1	27.396	--	Pass
NVNT	n20	5180	Ant1	21.362	--	Pass
NVNT	n20	5200	Ant1	24.413	--	Pass
NVNT	n20	5240	Ant1	27.861	--	Pass
NVNT	n40	5190	Ant1	39.275	--	Pass
NVNT	n40	5230	Ant1	51.446	--	Pass
NVNT	ac20	5180	Ant1	22.4	--	Pass
NVNT	ac20	5200	Ant1	25.882	--	Pass
NVNT	ac20	5240	Ant1	28.426	--	Pass
NVNT	ac40	5190	Ant1	39.416	--	Pass
NVNT	ac40	5230	Ant1	45.739	--	Pass
NVNT	ac80	5210	Ant1	78.882	--	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1




-26dB Bandwidth NVNT a 5200MHz Ant1

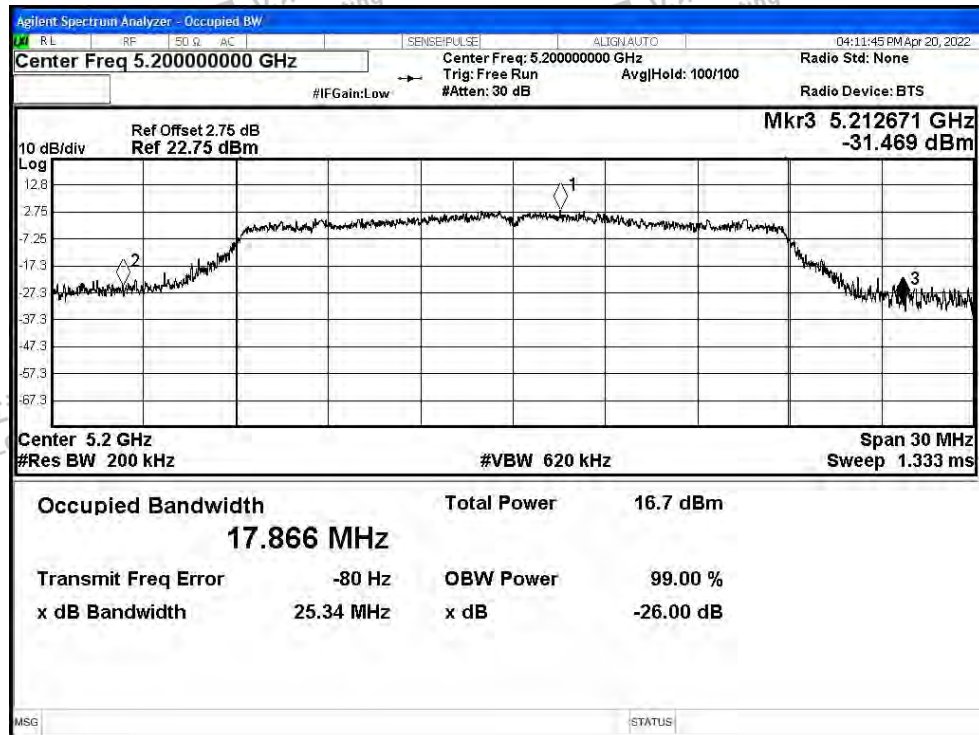



-26dB Bandwidth NVNT a 5240MHz Ant1

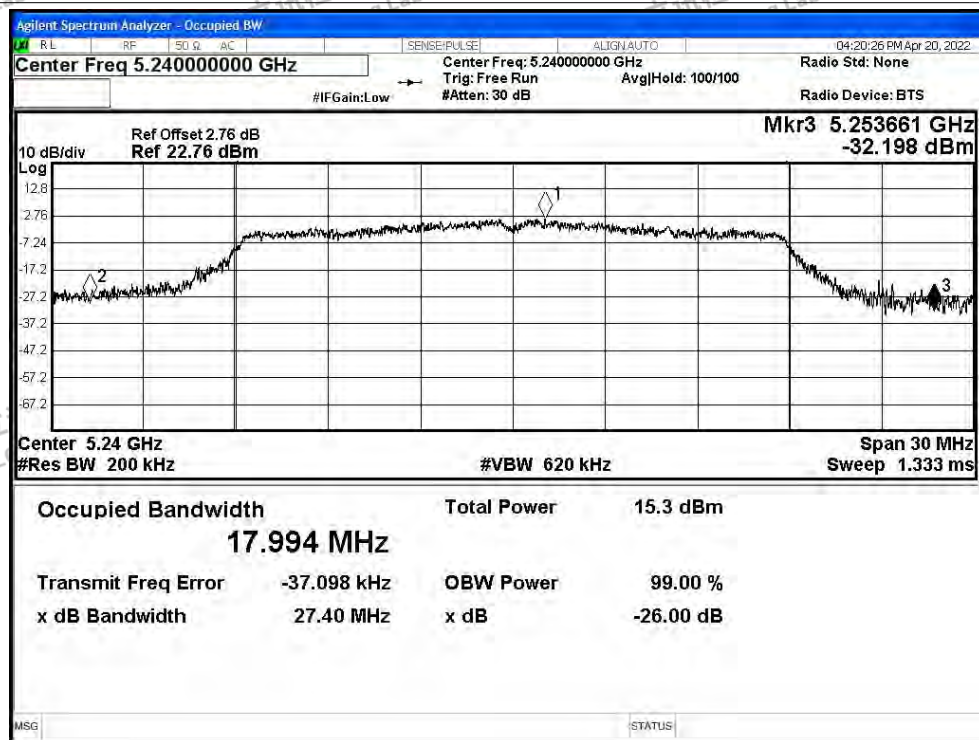


-26dB Bandwidth NVNT n20 5180MHz Ant1





-26dB Bandwidth NVNT n20 5200MHz Ant1

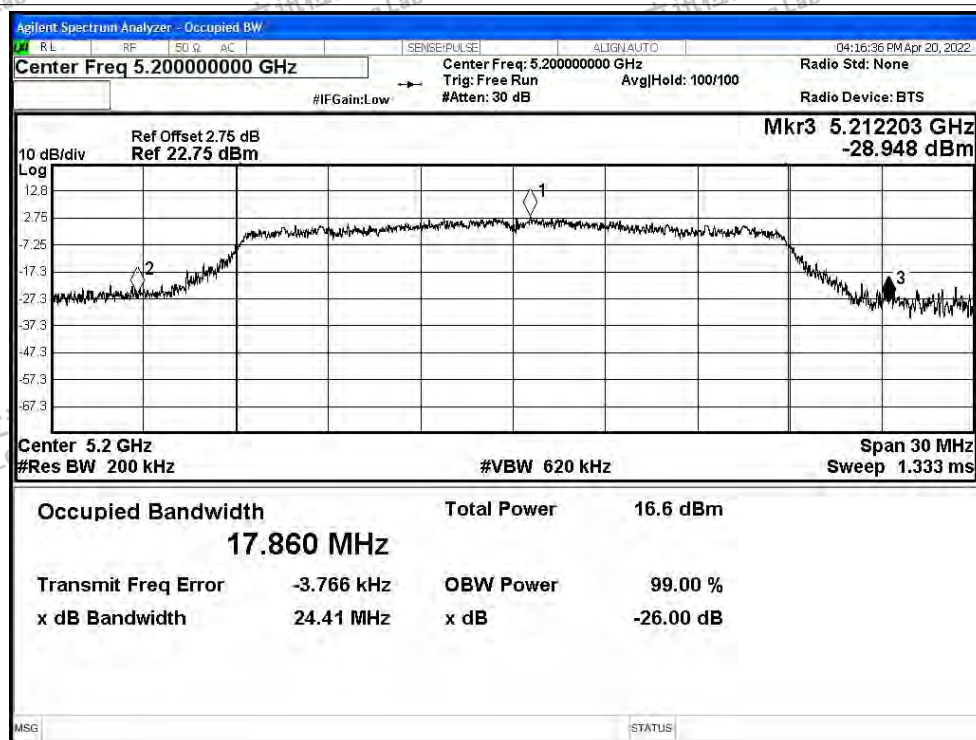


-26dB Bandwidth NVNT n20 5240MHz Ant1






-26dB Bandwidth NVNT n40 5190MHz Ant1

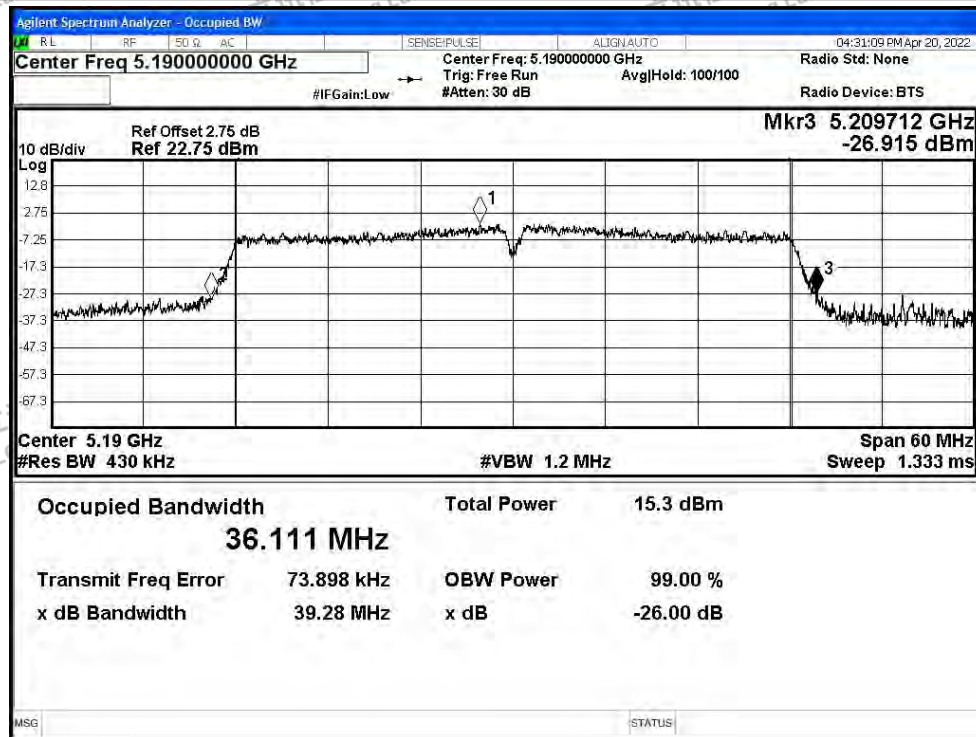

-26dB Bandwidth NVNT n40 5230MHz Ant1

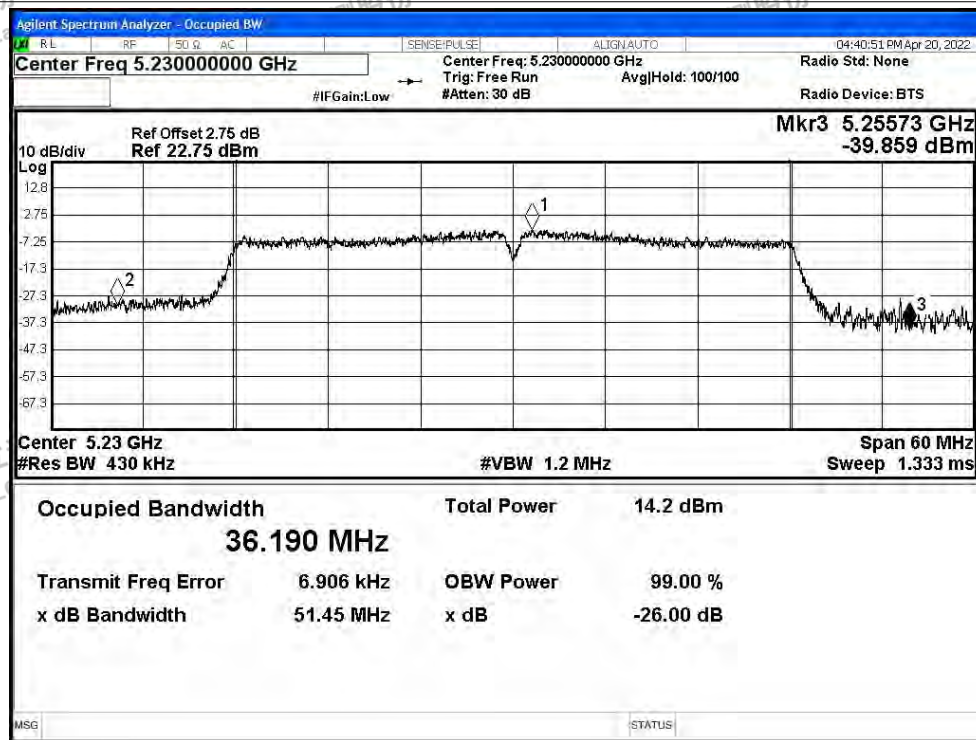



-26dB Bandwidth NVNT ac20 5180MHz Ant1



-26dB Bandwidth NVNT ac20 5200MHz Ant1





-26dB Bandwidth NVNT ac20 5240MHz Ant1




-26dB Bandwidth NVNT ac40 5190MHz Ant1






-26dB Bandwidth NVNT ac40 5230MHz Ant1

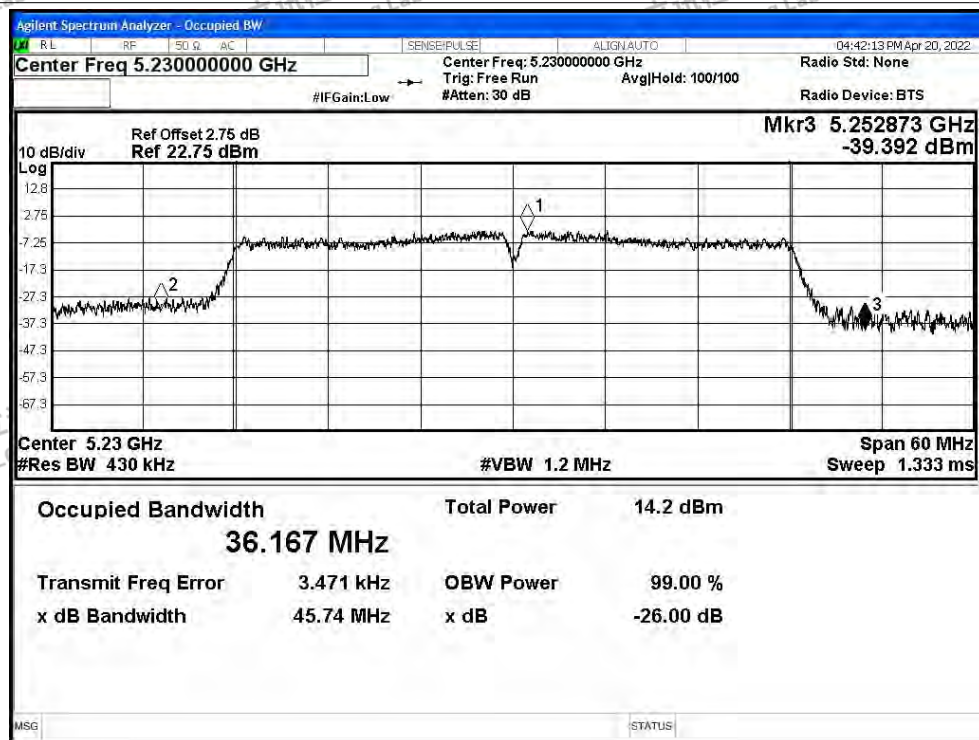

-26dB Bandwidth NVNT ac80 5210MHz Ant1

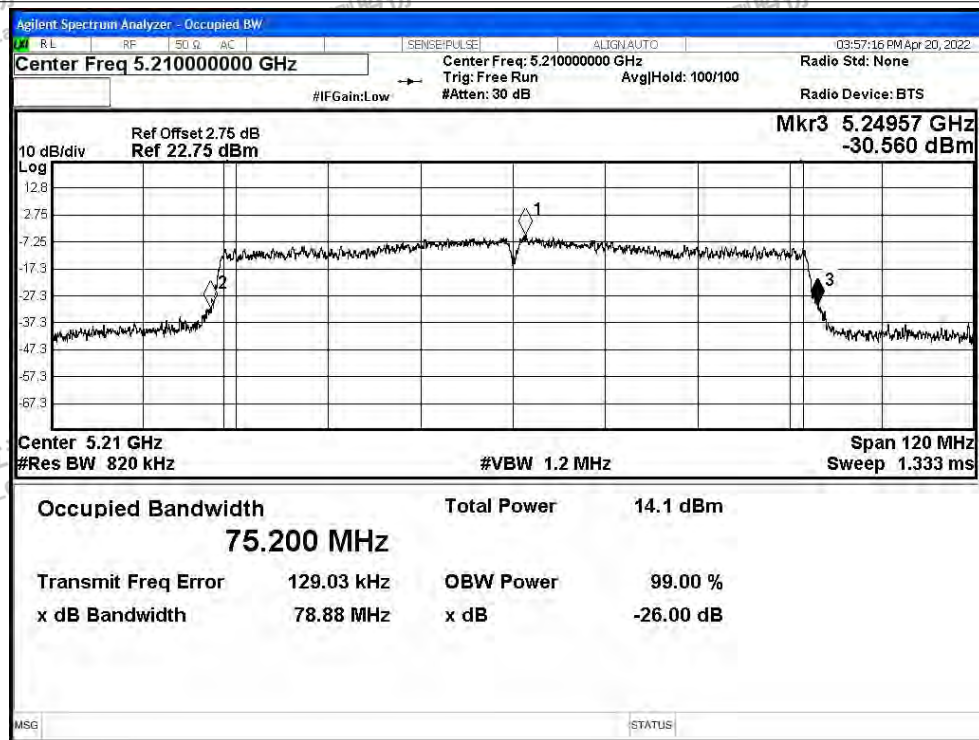



D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	10.3	0.32	10.62	24	Pass
NVNT	a	5200	Ant0	10.57	0.32	10.89	24	Pass
NVNT	a	5240	Ant0	9.23	0.32	9.55	24	Pass
NVNT	n20	5180	Ant0	10.34	0.32	10.66	24	Pass
NVNT	n20	5200	Ant0	10.75	0.32	11.07	24	Pass
NVNT	n20	5240	Ant0	9.24	0.32	9.56	24	Pass
NVNT	n40	5190	Ant0	8.83	0.61	9.44	24	Pass
NVNT	n40	5230	Ant0	7.83	0.61	8.44	24	Pass
NVNT	ac20	5180	Ant0	10.45	0.32	10.77	24	Pass
NVNT	ac20	5200	Ant0	10.71	0.32	11.03	24	Pass
NVNT	ac20	5240	Ant0	9.17	0.32	9.49	24	Pass
NVNT	ac40	5190	Ant0	8.99	0.65	9.64	24	Pass
NVNT	ac40	5230	Ant0	7.73	0.62	8.35	24	Pass
NVNT	ac80	5210	Ant0	6.62	1.14	7.76	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	10.18	0.32	10.5	24	Pass
NVNT	a	5200	Ant1	10.71	0.32	11.03	24	Pass
NVNT	a	5240	Ant1	9.45	0.32	9.77	24	Pass
NVNT	n20	5180	Ant1	10.19	0.32	10.51	24	Pass
NVNT	n20	5200	Ant1	10.61	0.32	10.93	24	Pass
NVNT	n20	5240	Ant1	9.4	0.32	9.72	24	Pass
NVNT	n40	5190	Ant1	8.87	0.61	9.48	24	Pass
NVNT	n40	5230	Ant1	7.68	0.61	8.29	24	Pass
NVNT	ac20	5180	Ant1	10.16	0.32	10.48	24	Pass
NVNT	ac20	5200	Ant1	10.77	0.32	11.09	24	Pass
NVNT	ac20	5240	Ant1	9.35	0.32	9.67	24	Pass
NVNT	ac40	5190	Ant1	8.96	0.61	9.57	24	Pass
NVNT	ac40	5230	Ant1	7.6	0.62	8.22	24	Pass
NVNT	ac80	5210	Ant1	6.55	1.15	7.7	24	Pass





MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			ANT0	ANT1	ANT0+ANT1		
NVNT	n20	5180	10.66	10.51	13.60	24	Pass
NVNT	n20	5200	11.07	10.93	14.01	24	Pass
NVNT	n20	5240	9.56	9.72	12.65	24	Pass
NVNT	n40	5190	9.44	9.48	12.47	24	Pass
NVNT	n40	5230	8.44	8.29	11.38	24	Pass
NVNT	ac20	5180	10.77	10.48	13.64	24	Pass
NVNT	ac20	5200	11.03	11.09	14.07	24	Pass
NVNT	ac20	5240	9.49	9.67	12.59	24	Pass
NVNT	ac40	5190	9.64	9.57	12.62	24	Pass
NVNT	ac40	5230	8.35	8.22	11.30	24	Pass
NVNT	ac80	5210	7.76	7.7	10.74	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	-2.82	0.32	-2.5	11	Pass
NVNT	a	5200	Ant0	-3.8	0.32	-3.48	11	Pass
NVNT	a	5240	Ant0	-4.46	0.32	-4.14	11	Pass
NVNT	n20	5180	Ant0	-2.67	0.32	-2.35	11	Pass
NVNT	n20	5200	Ant0	-3.32	0.32	-3	11	Pass
NVNT	n20	5240	Ant0	-3.74	0.32	-3.42	11	Pass
NVNT	n40	5190	Ant0	-9.7	0.61	-9.09	11	Pass
NVNT	n40	5230	Ant0	-11.29	0.61	-10.68	11	Pass
NVNT	ac20	5180	Ant0	-2.69	0.32	-2.37	11	Pass
NVNT	ac20	5200	Ant0	-3.3	0.32	-2.98	11	Pass
NVNT	ac20	5240	Ant0	-4.74	0.32	-4.42	11	Pass
NVNT	ac40	5190	Ant0	-10.48	0.65	-9.83	11	Pass
NVNT	ac40	5230	Ant0	-12.04	0.62	-11.42	11	Pass
NVNT	ac80	5210	Ant0	-16.69	1.14	-15.55	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-3.11	0.32	-2.79	11	Pass
NVNT	a	5200	Ant1	-4.48	0.32	-4.16	11	Pass
NVNT	a	5240	Ant1	-3.54	0.32	-3.22	11	Pass
NVNT	n20	5180	Ant1	-3.19	0.32	-2.87	11	Pass
NVNT	n20	5200	Ant1	-1.47	0.32	-1.15	11	Pass
NVNT	n20	5240	Ant1	-5.29	0.32	-4.97	11	Pass
NVNT	n40	5190	Ant1	-9.99	0.61	-9.38	11	Pass
NVNT	n40	5230	Ant1	-11.13	0.61	-10.52	11	Pass
NVNT	ac20	5180	Ant1	-4.57	0.32	-4.25	11	Pass
NVNT	ac20	5200	Ant1	-4.54	0.32	-4.22	11	Pass
NVNT	ac20	5240	Ant1	-4.25	0.32	-3.93	11	Pass
NVNT	ac40	5190	Ant1	-10.58	0.61	-9.97	11	Pass
NVNT	ac40	5230	Ant1	-11.32	0.62	-10.7	11	Pass
NVNT	ac80	5210	Ant1	-15.91	1.15	-14.76	11	Pass





Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO


Condition	Mode	Frequency (MHz)	Total PSD (dBm)			Limit (dBm)	Verdict
			ANT0	ANT1	ANT0+ANT1		
NVNT	n20	5180	-2.35	-2.87	0.41	11	Pass
NVNT	n20	5200	-3	-1.15	1.03	11	Pass
NVNT	n20	5240	-3.42	-4.97	-1.12	11	Pass
NVNT	n40	5190	-9.09	-9.38	-6.22	11	Pass
NVNT	n40	5230	-10.68	-10.52	-7.59	11	Pass
NVNT	ac20	5180	-2.37	-4.25	-0.20	11	Pass
NVNT	ac20	5200	-2.98	-4.22	-0.55	11	Pass
NVNT	ac20	5240	-4.42	-3.93	-1.16	11	Pass
NVNT	ac40	5190	-9.83	-9.97	-6.89	11	Pass
NVNT	ac40	5230	-11.42	-10.7	-8.03	11	Pass
NVNT	ac80	5210	-15.55	-14.76	-12.13	11	Pass

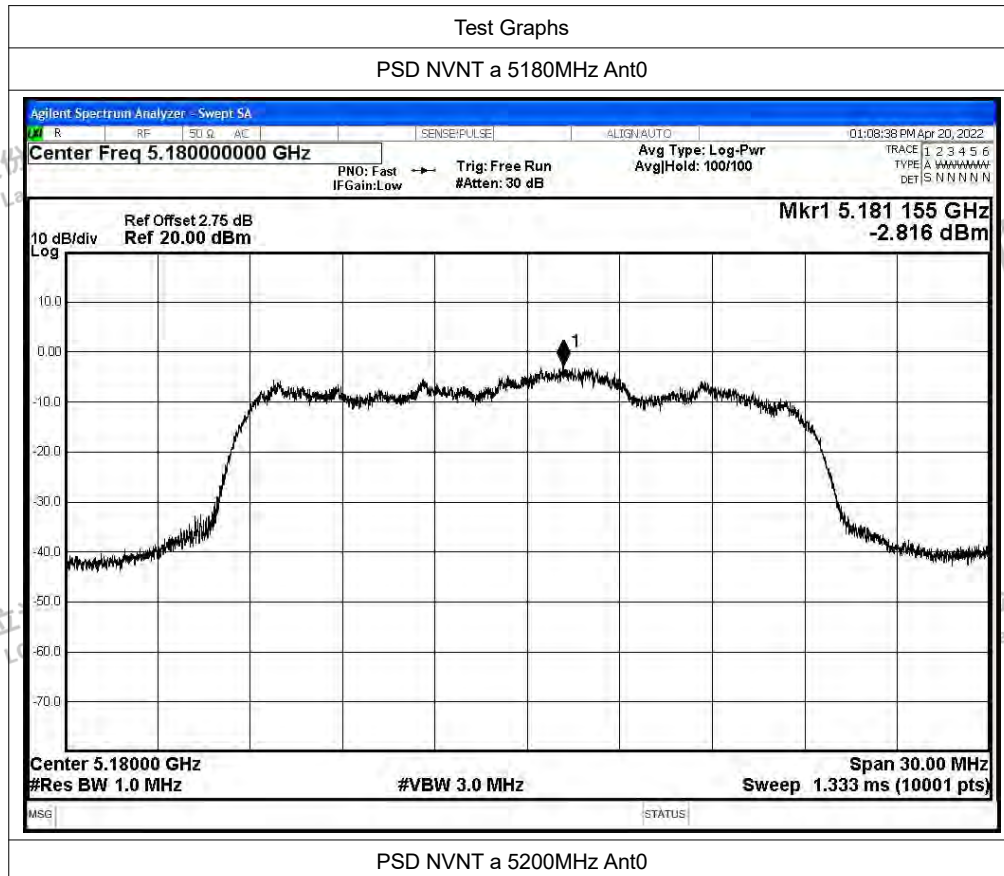

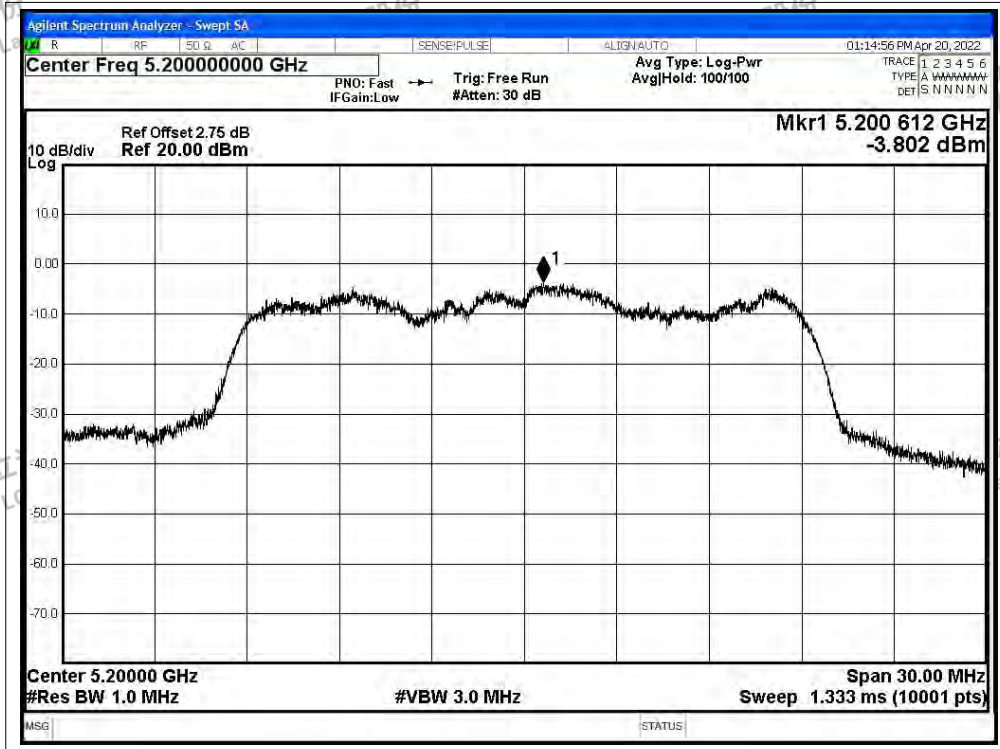




PSD NVNT a 5240MHz Ant0

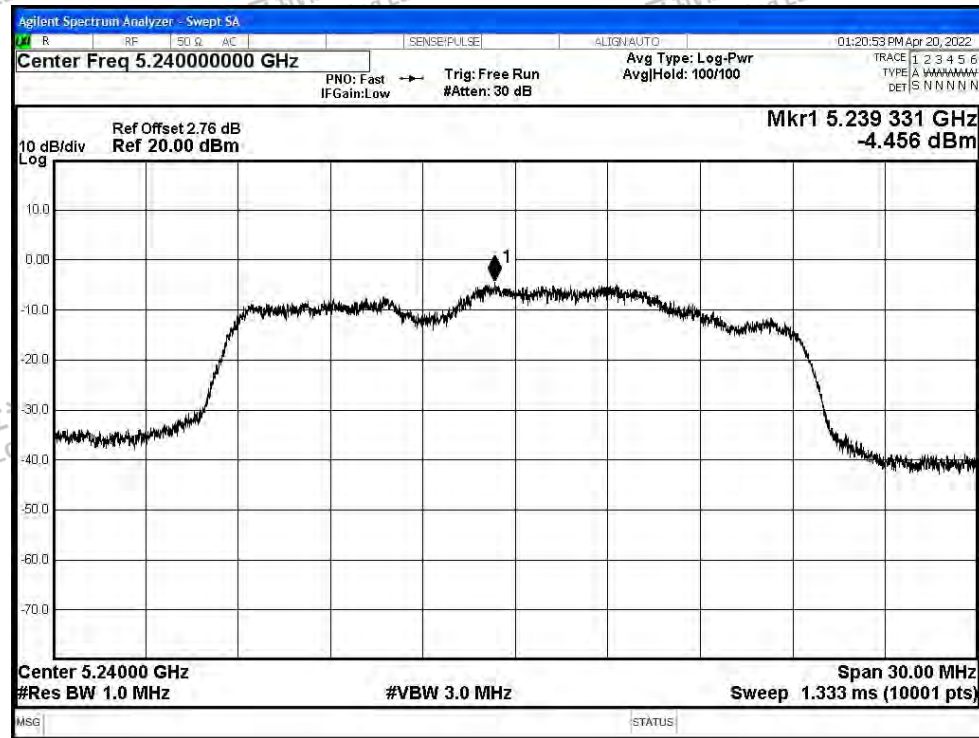


PSD NVNT n20 5180MHz Ant0

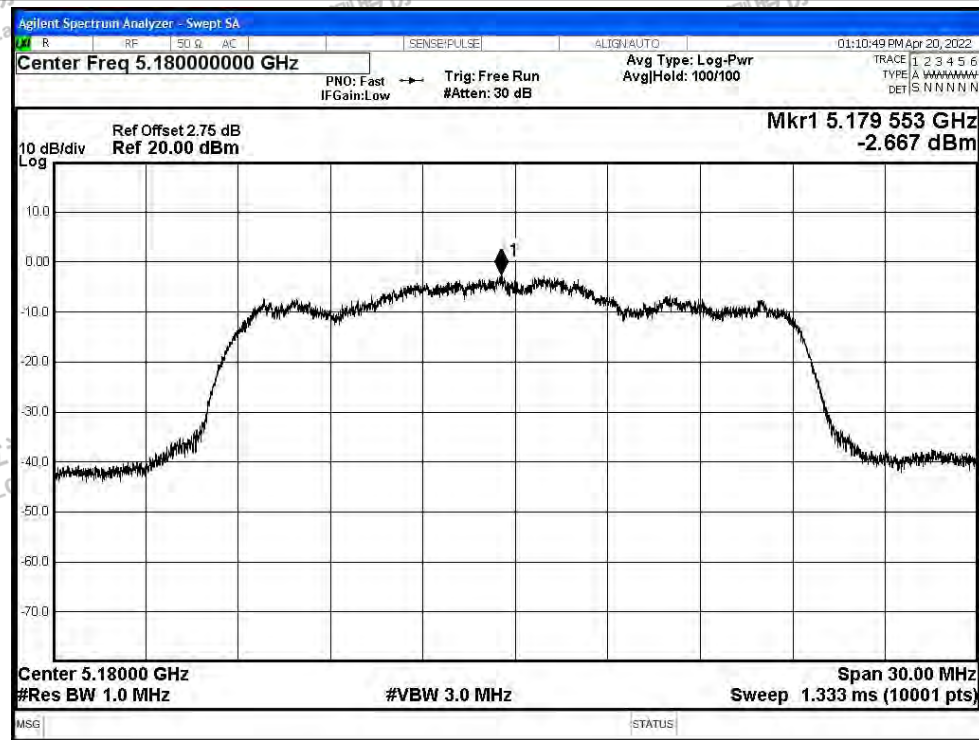




PSD NVNT n20 5200MHz Ant0

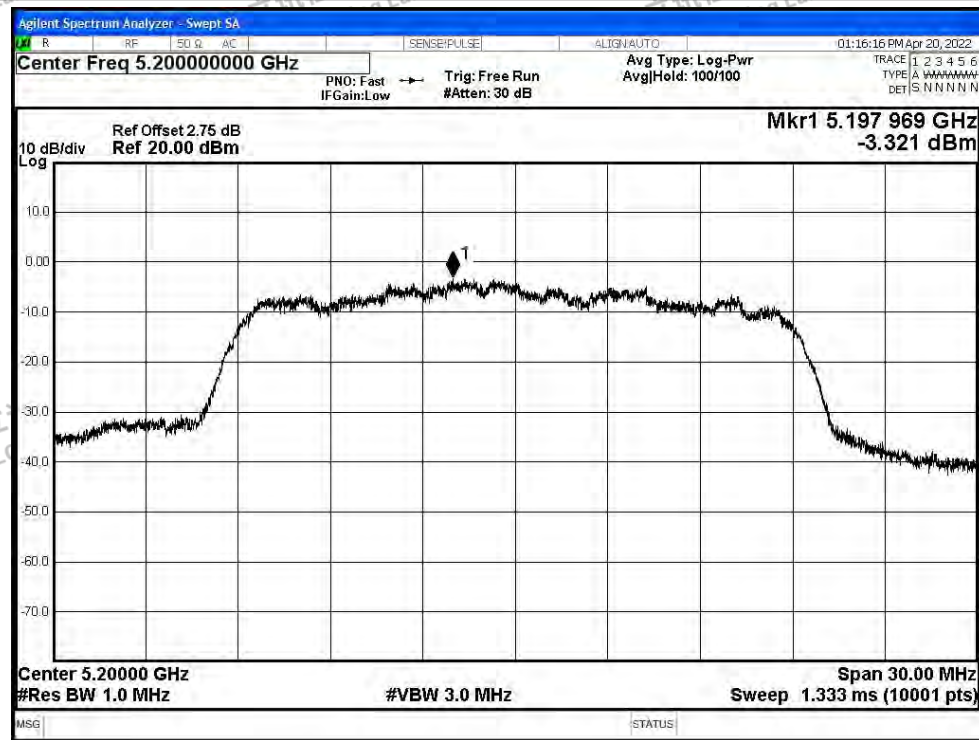


PSD NVNT n20 5240MHz Ant0

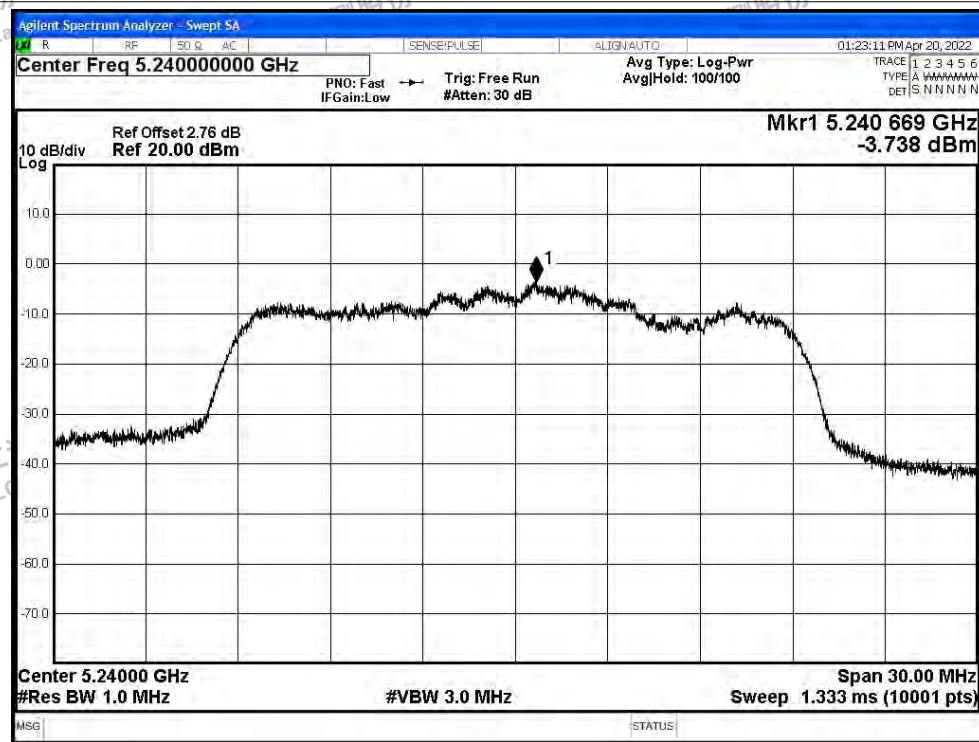




PSD NVNT n40 5190MHz Ant0

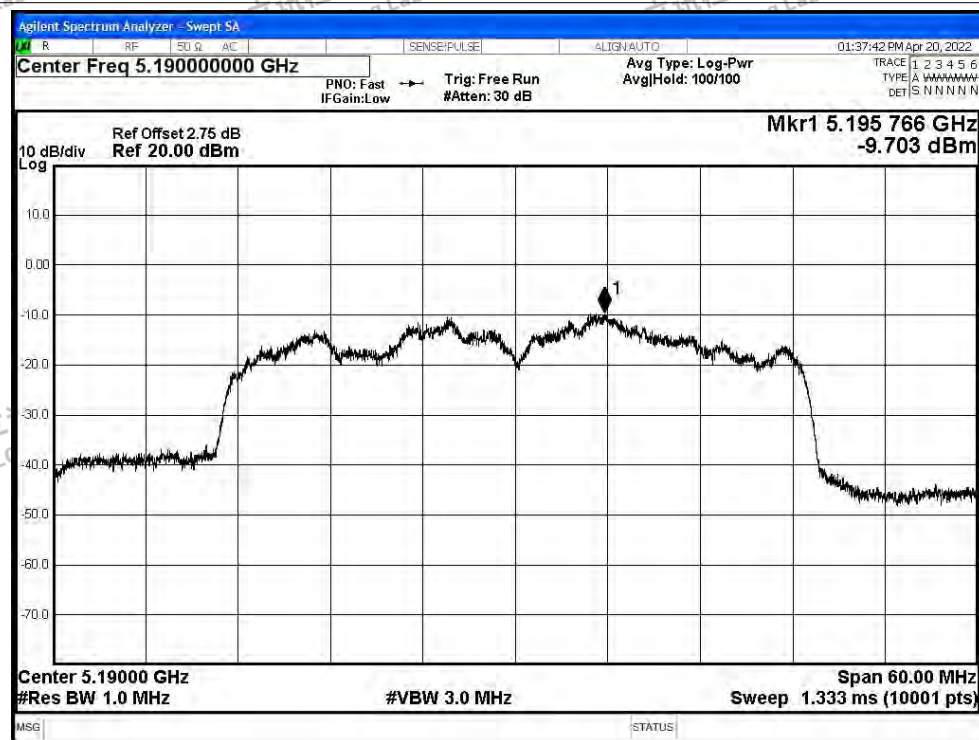


PSD NVNT n40 5230MHz Ant0

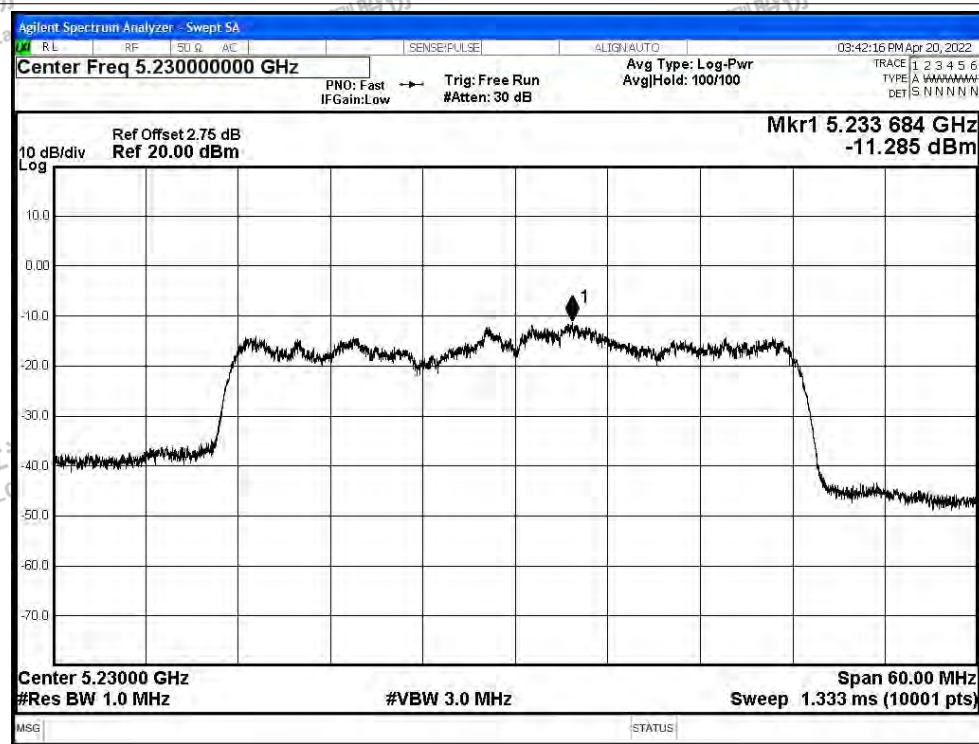




PSD NVNT ac20 5180MHz Ant0

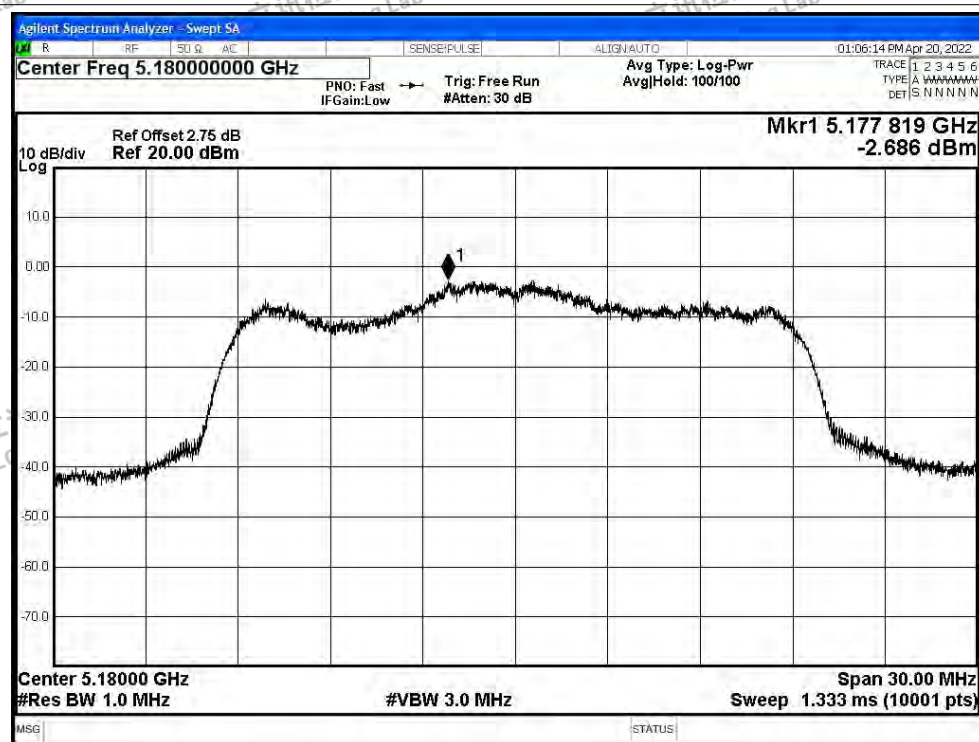


PSD NVNT ac20 5200MHz Ant0

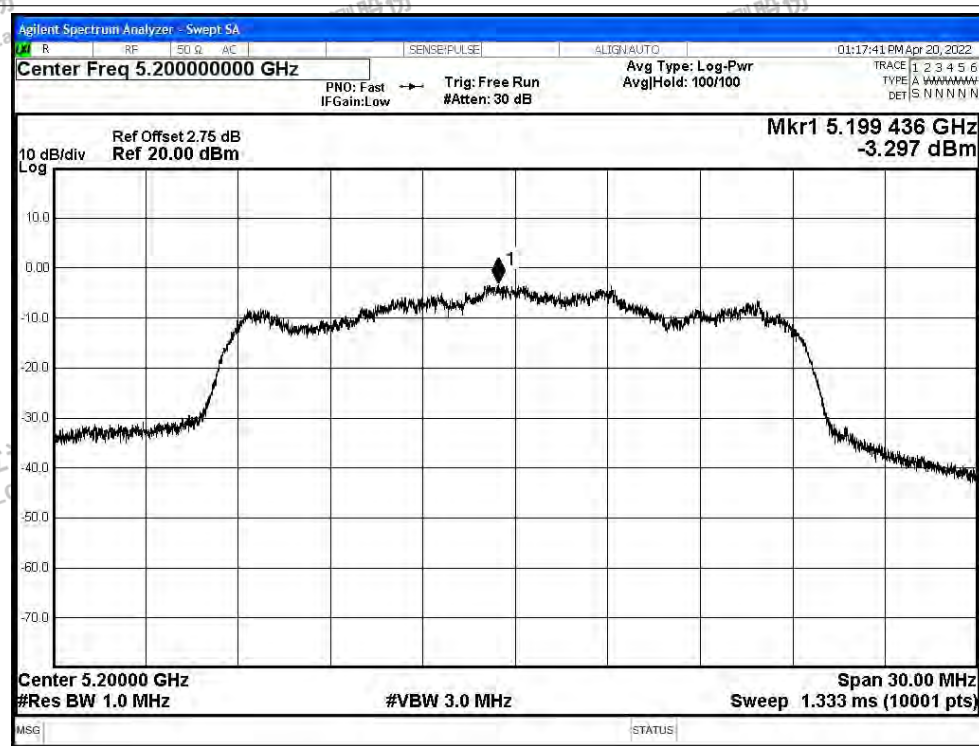




PSD NVNT ac20 5240MHz Ant0

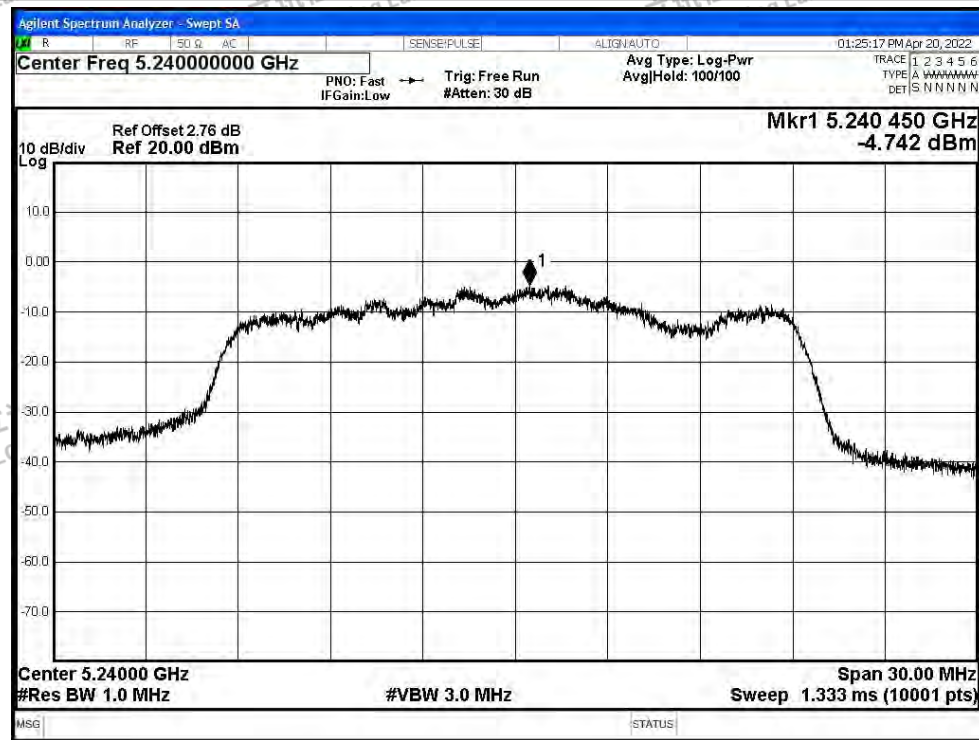


PSD NVNT ac40 5190MHz Ant0

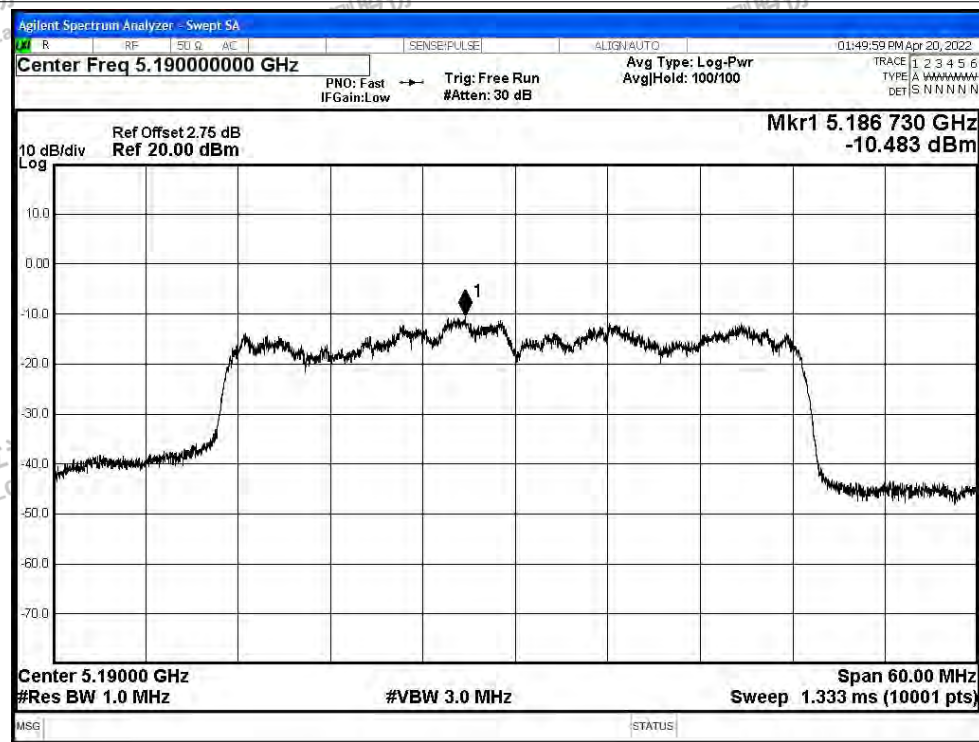




PSD NVNT ac40 5230MHz Ant0

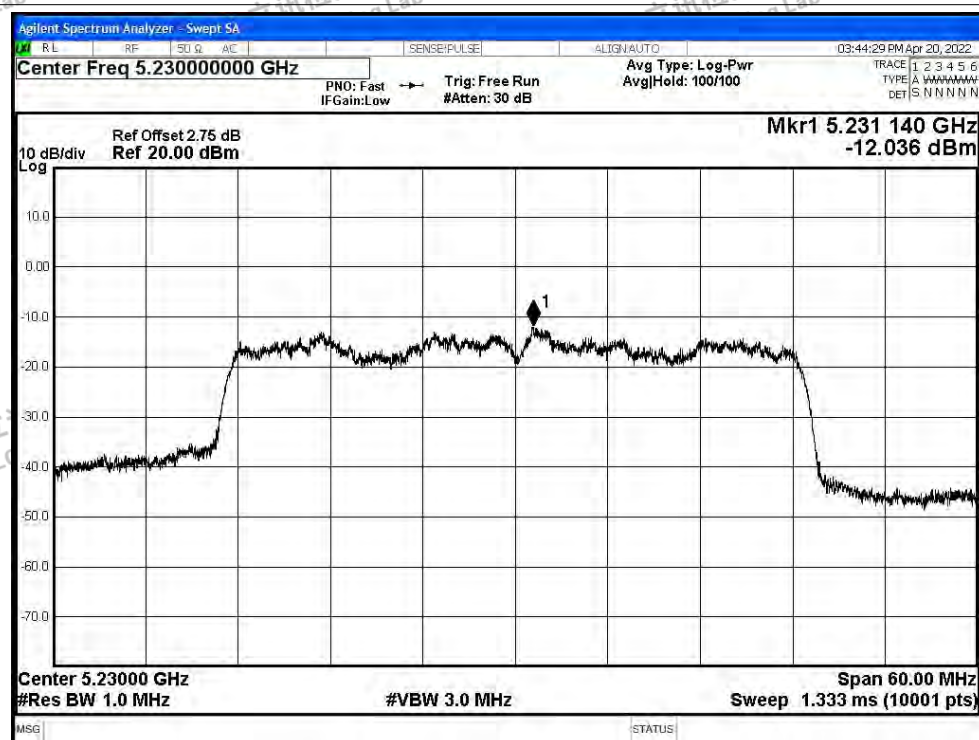


PSD NVNT ac80 5210MHz Ant0

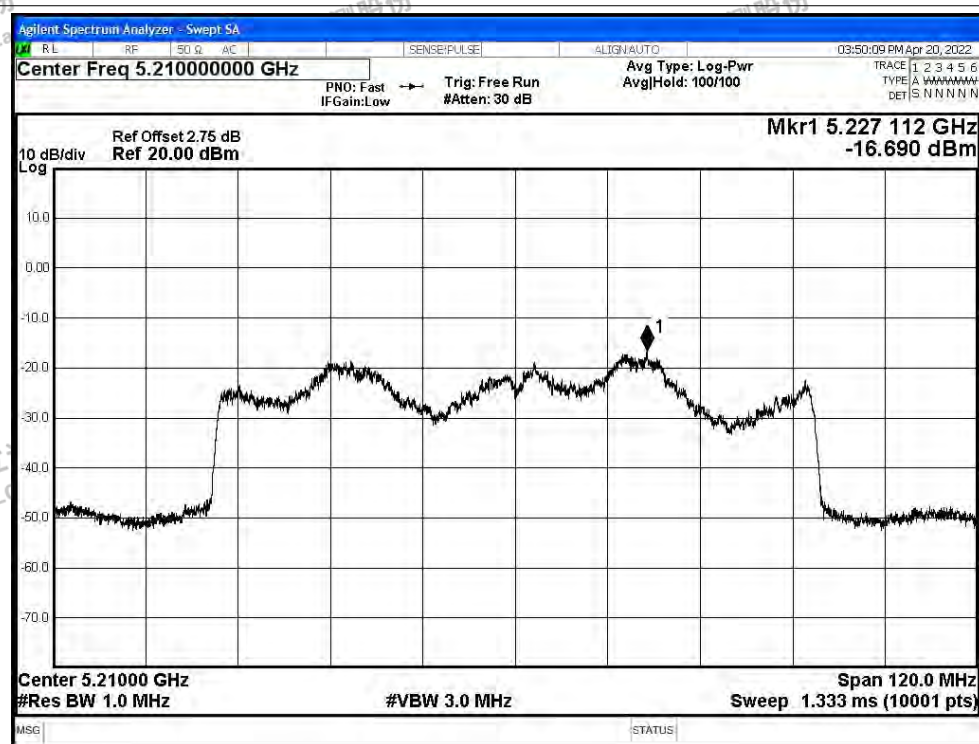




Test Graphs

PSD NVNT a 5180MHz Ant1

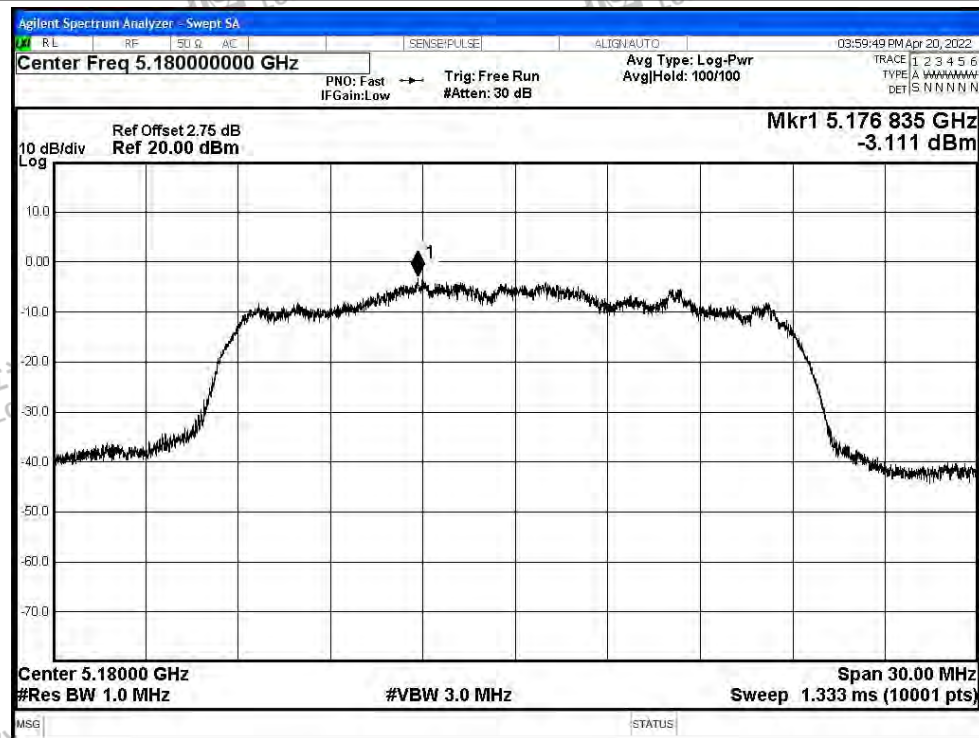


PSD NVNT a 5200MHz Ant1

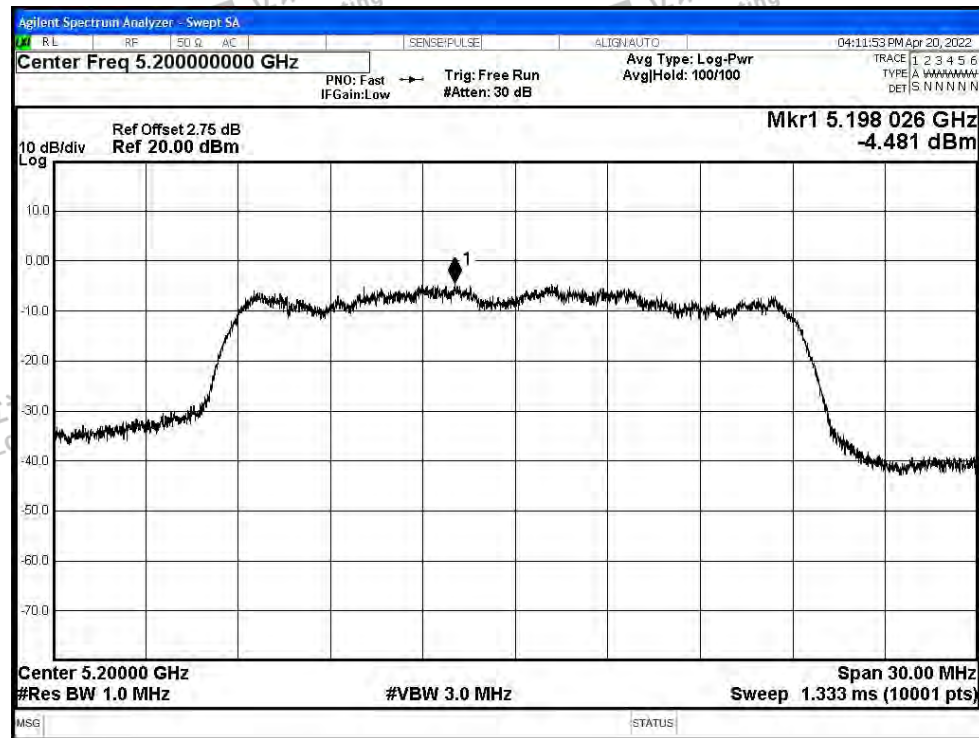




PSD NVNT a 5240MHz Ant1

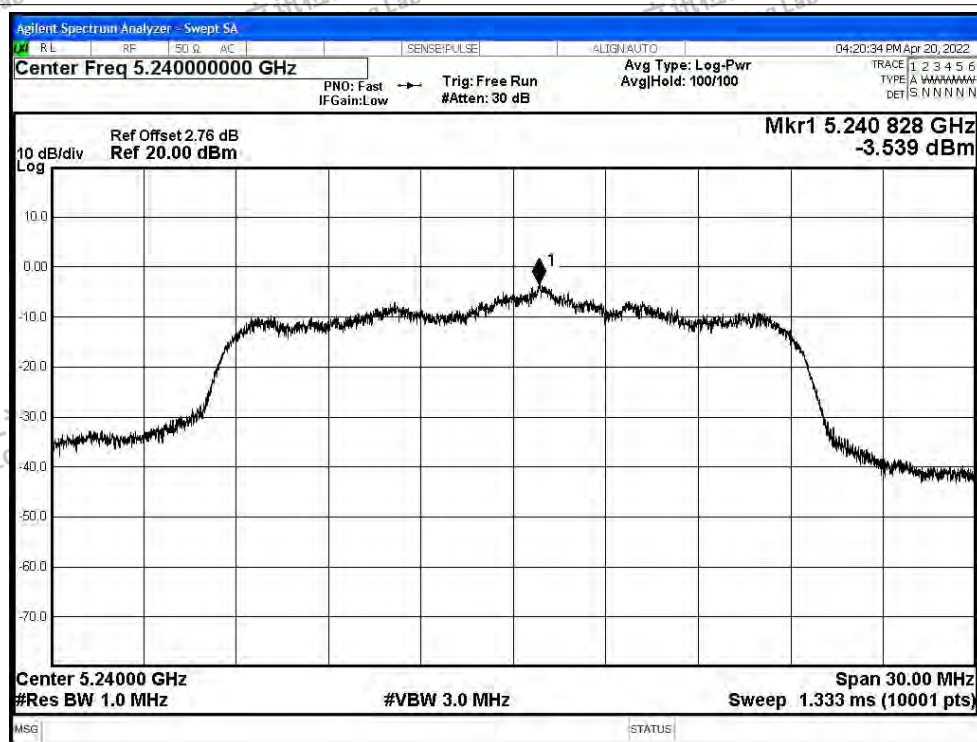


PSD NVNT n20 5180MHz Ant1

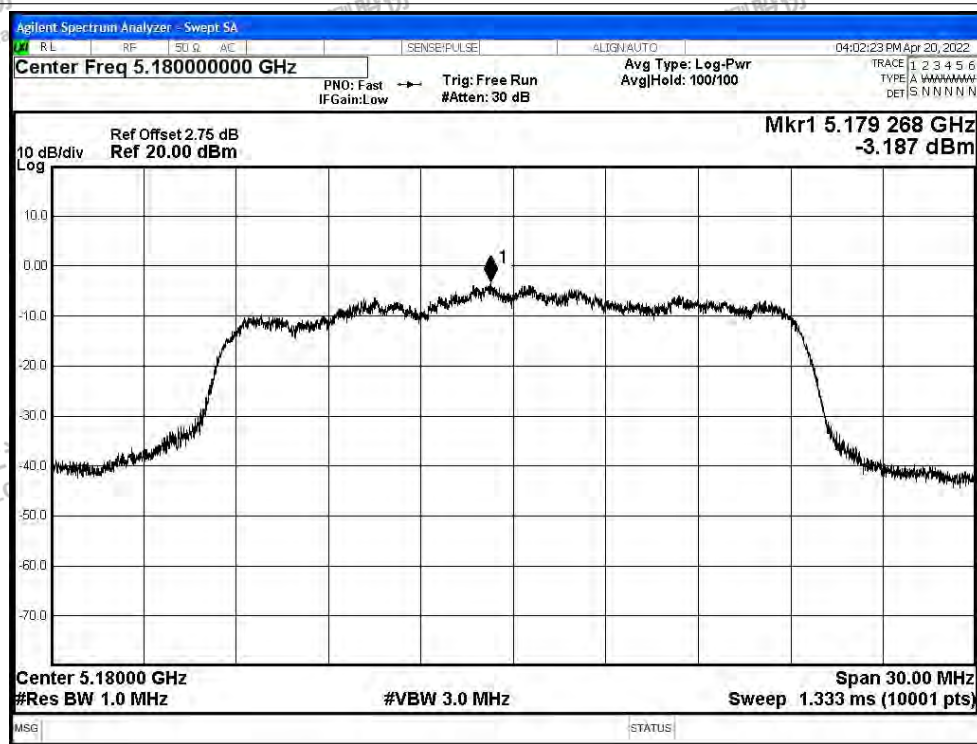




PSD NVNT n20 5200MHz Ant1

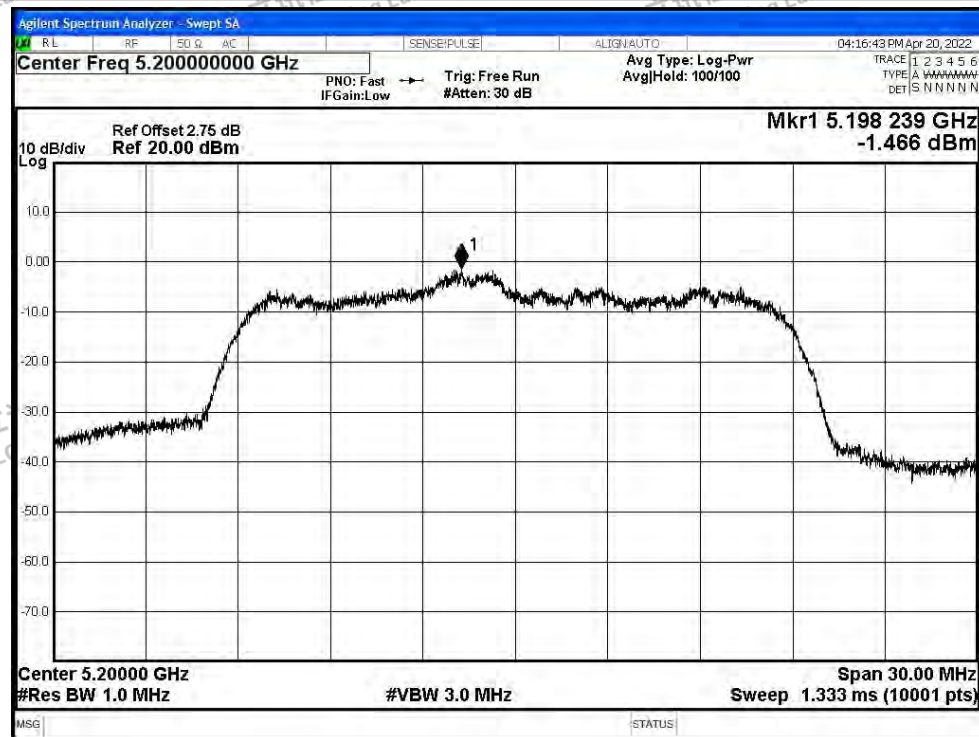


PSD NVNT n20 5240MHz Ant1

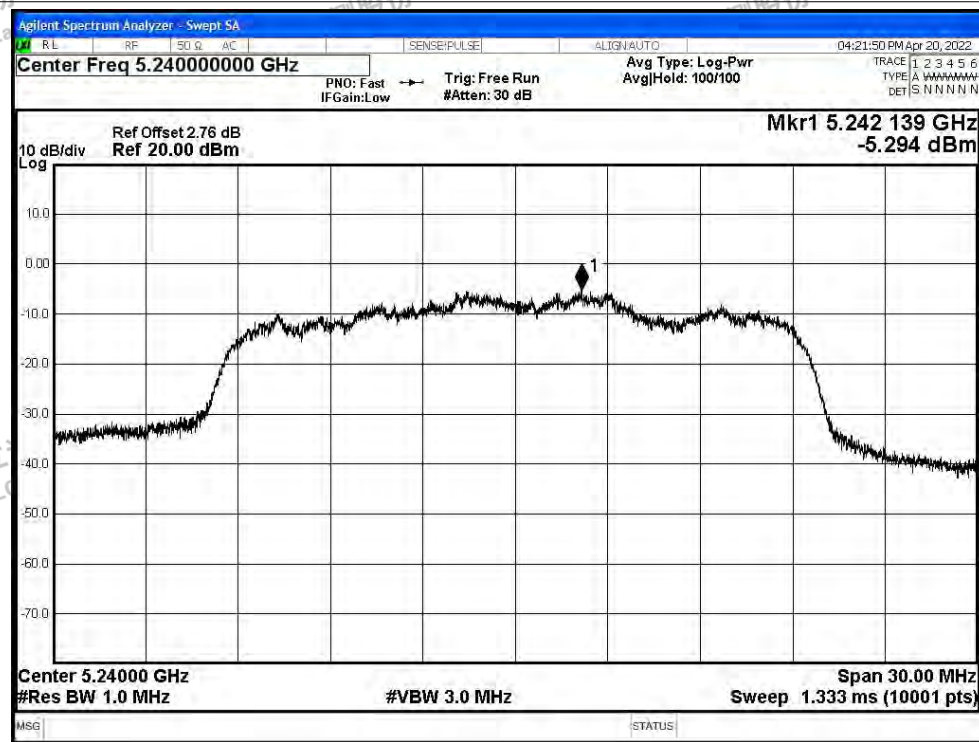




PSD NVNT n40 5190MHz Ant1

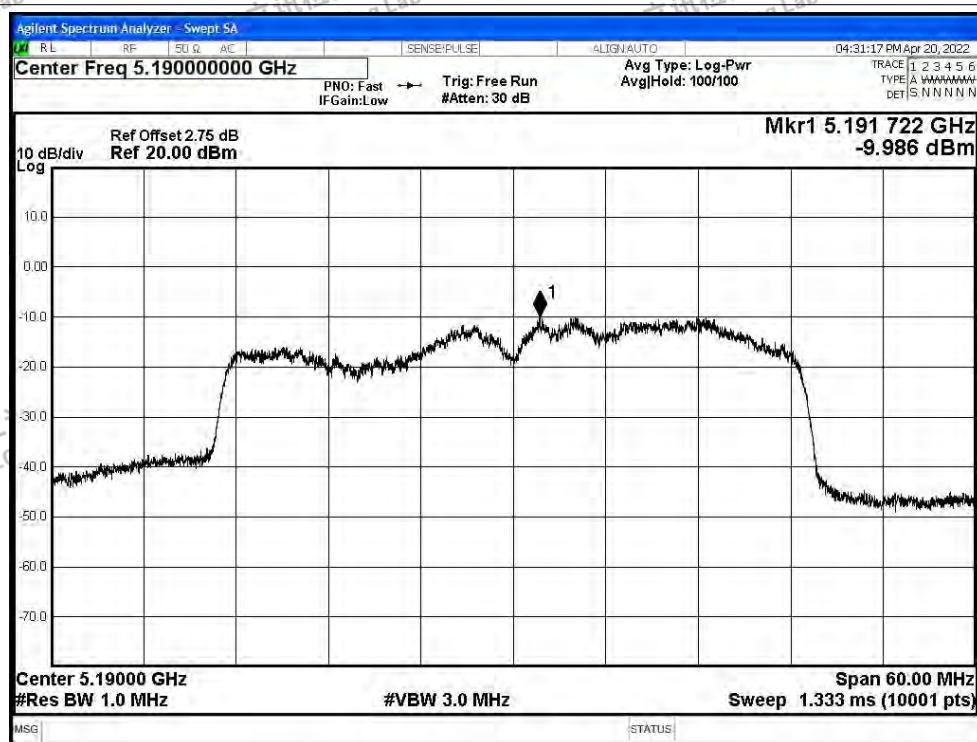


PSD NVNT n40 5230MHz Ant1

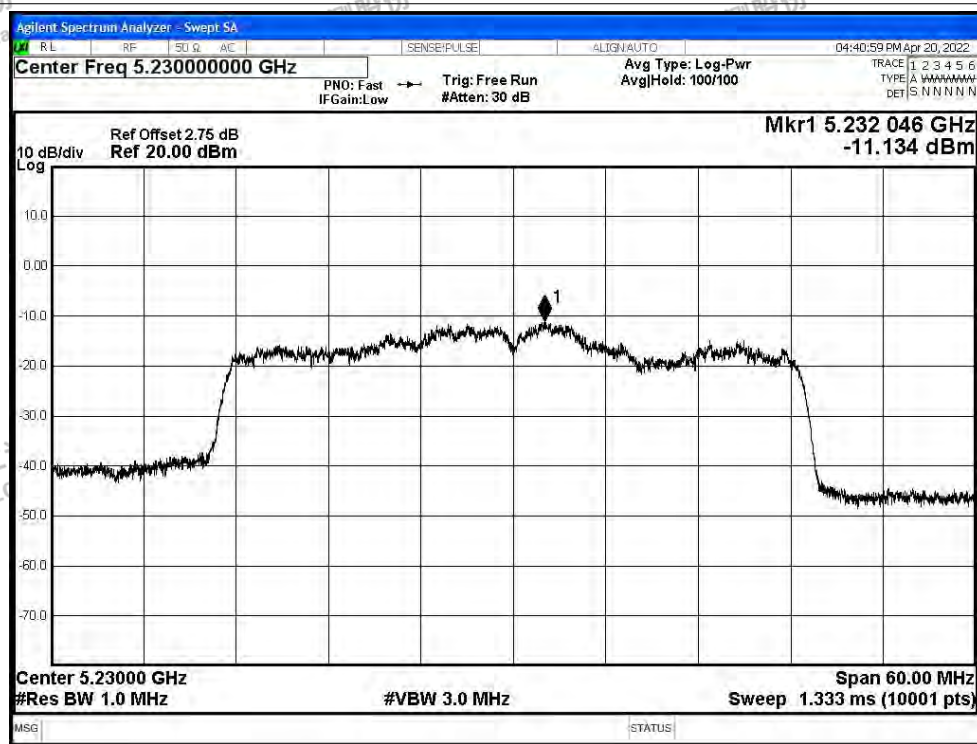



PSD NVNT ac20 5180MHz Ant1

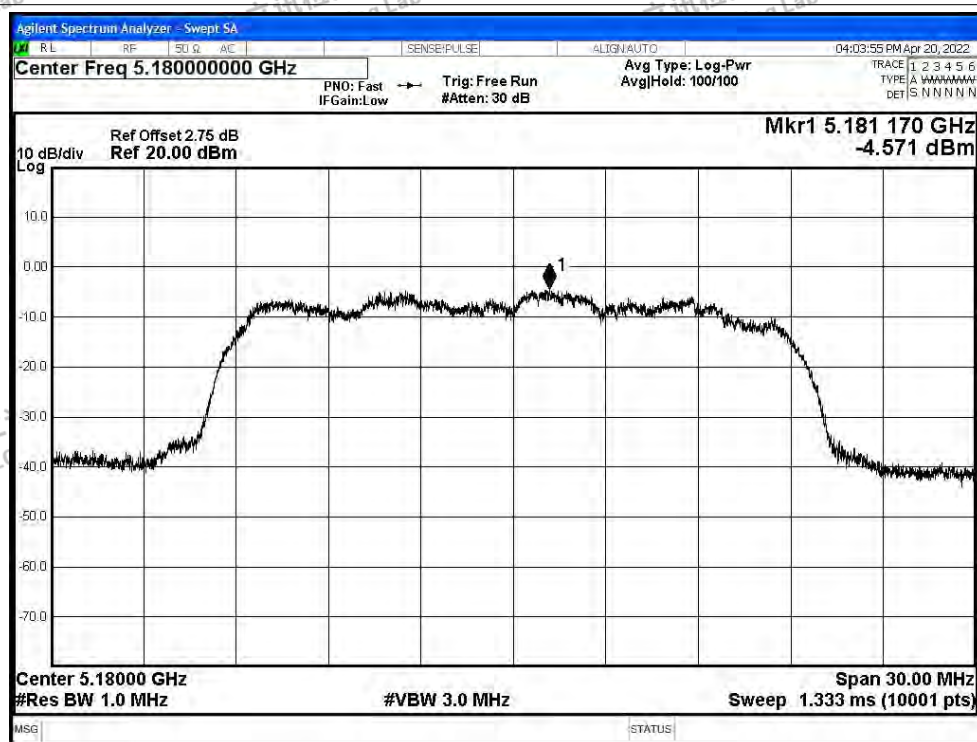


PSD NVNT ac20 5200MHz Ant1






PSD NVNT ac20 5240MHz Ant1

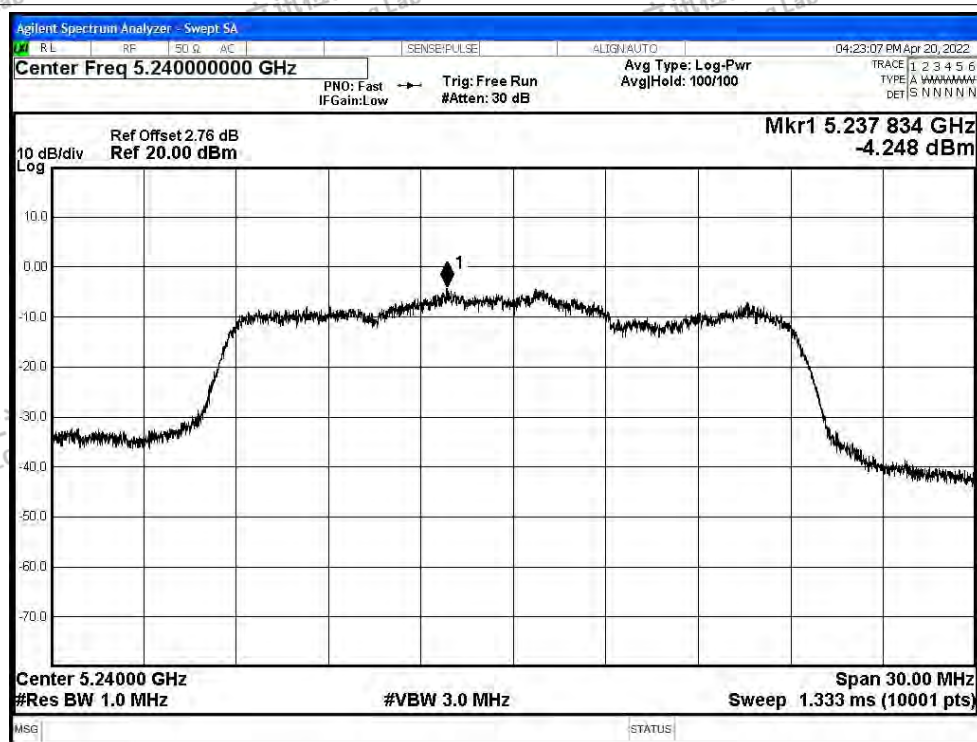


PSD NVNT ac40 5190MHz Ant1

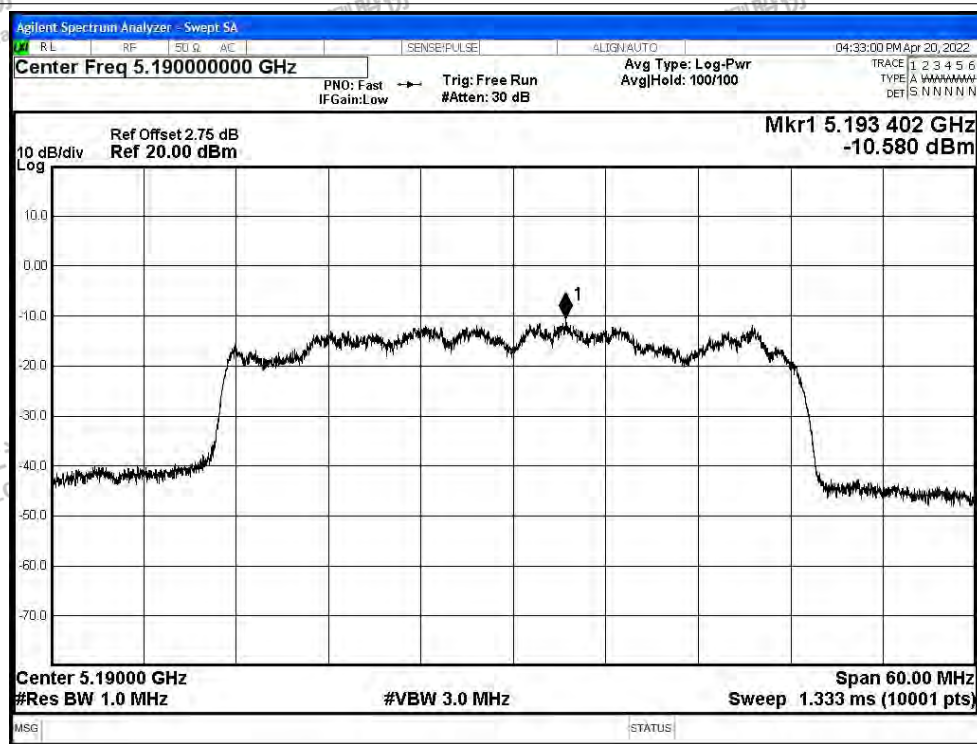




PSD NVNT ac40 5230MHz Ant1

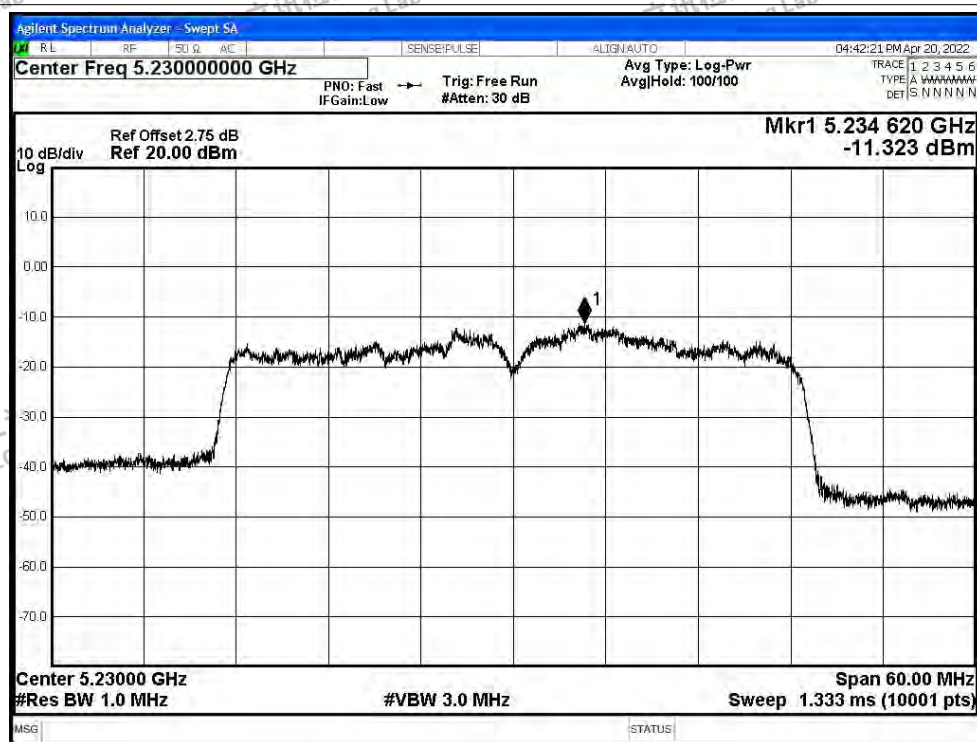

PSD NVNT ac80 5210MHz Ant1

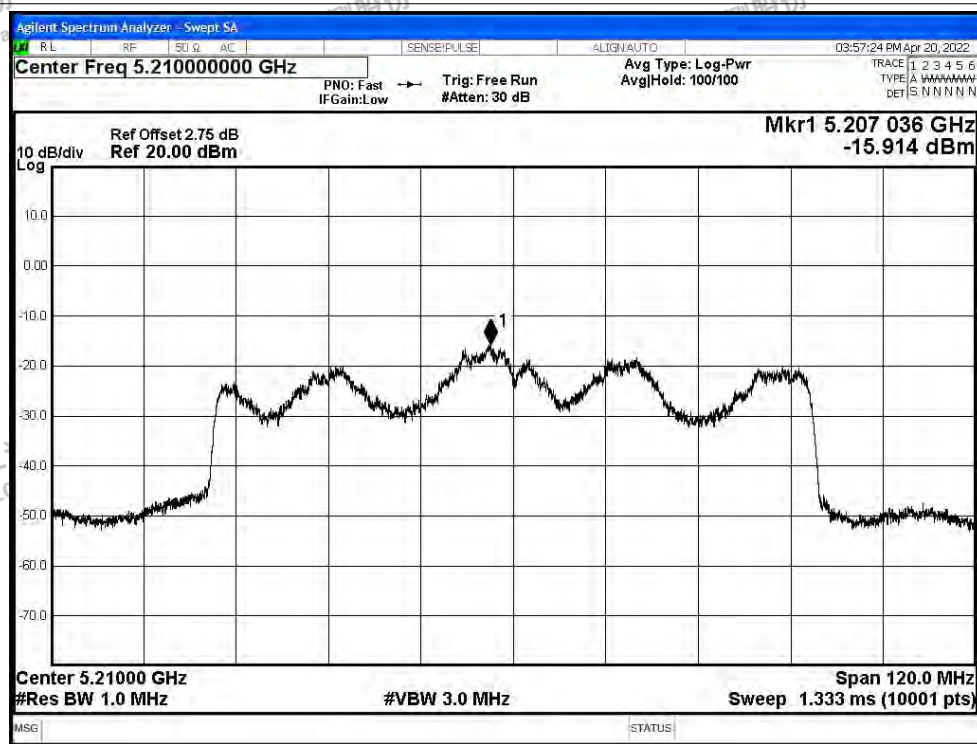



D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-52.31	2	44.92	Peak	68.2	Pass
NVNT	a	5180	Ant0	4500	-60.51	2	36.72	Average	54	Pass
NVNT	a	5180	Ant0	5146.1	-33.76	2	63.47	Peak	68.2	Pass
NVNT	a	5180	Ant0	5149.6	-51.87	2	45.36	Average	54	Pass
NVNT	a	5180	Ant0	5150	-34.94	2	62.29	Peak	68.2	Pass
NVNT	a	5180	Ant0	5150	-51.76	2	45.47	Average	54	Pass
NVNT	a	5240	Ant0	5350	-47.62	2	49.61	Peak	68.2	Pass
NVNT	a	5240	Ant0	5350	-57.64	2	39.59	Average	54	Pass
NVNT	a	5240	Ant0	5387.76	-44.68	2	52.55	Peak	68.2	Pass
NVNT	a	5240	Ant0	5450.16	-54.79	2	42.44	Average	54	Pass
NVNT	a	5240	Ant0	5460	-47.22	2	50.01	Peak	68.2	Pass
NVNT	a	5240	Ant0	5460	-57.09	2	40.14	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-51.28	2	45.95	Peak	68.2	Pass
NVNT	n20	5180	Ant0	4500	-60.64	2	36.59	Average	54	Pass
NVNT	n20	5180	Ant0	5141.2	-33.08	2	64.15	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5148.9	-51.75	2	45.48	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-33.43	2	63.8	Peak	68.2	Pass
NVNT	n20	5180	Ant0	5150	-51.49	2	45.74	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-49.06	2	48.17	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5350	-57.65	2	39.58	Average	54	Pass
NVNT	n20	5240	Ant0	5384.4	-45.16	2	52.07	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5450.64	-54.86	2	42.37	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-48.58	2	48.65	Peak	68.2	Pass
NVNT	n20	5240	Ant0	5460	-57.15	2	40.08	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-51.59	2	45.64	Peak	68.2	Pass
NVNT	n40	5190	Ant0	4500	-60.56	2	36.67	Average	54	Pass
NVNT	n40	5190	Ant0	5147.51	-37.37	2	59.86	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5149.7	-49.25	2	47.98	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-38.35	2	58.88	Peak	68.2	Pass
NVNT	n40	5190	Ant0	5150	-48.88	2	48.35	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-51.18	2	46.05	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5350	-59.51	2	37.72	Average	54	Pass
NVNT	n40	5230	Ant0	5378.73	-47.67	2	49.56	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5357.4	-58.91	2	38.32	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-51	2	46.23	Peak	68.2	Pass
NVNT	n40	5230	Ant0	5460	-59.56	2	37.67	Average	54	Pass
NVNT	ac20	5180	Ant0	4500	-50.83	2	46.4	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	ac20	5180	Ant0	4500	-60.45	2	36.78	Average	54	Pass
NVNT	ac20	5180	Ant0	5143.3	-34.3	2	62.93	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5149.6	-51.88	2	45.35	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-34.95	2	62.28	Peak	68.2	Pass
NVNT	ac20	5180	Ant0	5150	-51.49	2	45.74	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-48.49	2	48.74	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5350	-57.61	2	39.62	Average	54	Pass
NVNT	ac20	5240	Ant0	5452.08	-45.42	2	51.81	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5450.16	-55.06	2	42.17	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-48	2	49.23	Peak	68.2	Pass
NVNT	ac20	5240	Ant0	5460	-57.22	2	40.01	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-51.65	2	45.58	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	4500	-60	2	37.23	Average	54	Pass
NVNT	ac40	5190	Ant0	5146.78	-36.74	2	60.49	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5149.7	-48	2	49.23	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-34.6	2	62.63	Peak	68.2	Pass
NVNT	ac40	5190	Ant0	5150	-47.77	2	49.46	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-49.51	2	47.72	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5350	-59.21	2	38.02	Average	54	Pass
NVNT	ac40	5230	Ant0	5393.58	-47.17	2	50.06	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5387.64	-58.84	2	38.39	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-50.33	2	46.9	Peak	68.2	Pass
NVNT	ac40	5230	Ant0	5460	-59.7	2	37.53	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-50.05	2	47.18	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5350	-58.04	2	39.19	Average	54	Pass
NVNT	ac80	5210	Ant0	5382.78	-46.64	2	50.59	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5364.63	-57.58	2	39.65	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-50.01	2	47.22	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5460	-58.93	2	38.3	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-51.47	2	45.76	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	4500	-59.92	2	37.31	Average	54	Pass
NVNT	ac80	5210	Ant0	5145.43	-41.81	2	55.42	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5148.59	-51.49	2	45.74	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-44.2	2	53.03	Peak	68.2	Pass
NVNT	ac80	5210	Ant0	5150	-51.7	2	45.53	Average	54	Pass





Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-50.48	2	46.75	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-60.66	2	36.57	Average	54	Pass
NVNT	a	5180	Ant1	5146.1	-38.91	2	58.32	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-56.07	2	41.16	Average	54	Pass
NVNT	a	5180	Ant1	5150	-40.47	2	56.76	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-55.92	2	41.31	Average	54	Pass
NVNT	a	5240	Ant1	5350	-48.85	2	48.38	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-59.56	2	37.67	Average	54	Pass
NVNT	a	5240	Ant1	5372.88	-46.73	2	50.5	Peak	68.2	Pass
NVNT	a	5240	Ant1	5450.64	-58.73	2	38.5	Average	54	Pass
NVNT	a	5240	Ant1	5460	-49.81	2	47.42	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-59.54	2	37.69	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-50.71	2	46.52	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-60.74	2	36.49	Average	54	Pass
NVNT	n20	5180	Ant1	5132.1	-38.75	2	58.48	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-55.91	2	41.32	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-41.37	2	55.86	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-56	2	41.23	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-50.05	2	47.18	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-59.74	2	37.49	Average	54	Pass
NVNT	n20	5240	Ant1	5372.16	-47.46	2	49.77	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5450.4	-58.58	2	38.65	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-51.24	2	45.99	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-59.41	2	37.82	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-51.02	2	46.21	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-60.26	2	36.97	Average	54	Pass
NVNT	n40	5190	Ant1	5145.32	-38.8	2	58.43	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-50.79	2	46.44	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-40.5	2	56.73	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-50.02	2	47.21	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-50.47	2	46.76	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-59.05	2	38.18	Average	54	Pass
NVNT	n40	5230	Ant1	5368.2	-47.41	2	49.82	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5353.35	-58.88	2	38.35	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-51.46	2	45.77	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-59.64	2	37.59	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-51.22	2	46.01	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-60.61	2	36.62	Average	54	Pass
NVNT	ac20	5180	Ant1	5135.6	-39.79	2	57.44	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	ac20	5180	Ant1	5148.9	-56.18	2	41.05	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-38.33	2	58.9	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-55.97	2	41.26	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-50.74	2	46.49	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-59.59	2	37.64	Average	54	Pass
NVNT	ac20	5240	Ant1	5372.64	-46.97	2	50.26	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5450.4	-58.81	2	38.42	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-51.01	2	46.22	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-59.35	2	37.88	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-49.8	2	47.43	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-60.18	2	37.05	Average	54	Pass
NVNT	ac40	5190	Ant1	5149.7	-37.78	2	59.45	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-50.94	2	46.29	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-37.75	2	59.48	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-50.4	2	46.83	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-50.24	2	46.99	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-59.18	2	38.05	Average	54	Pass
NVNT	ac40	5230	Ant1	5407.35	-47.9	2	49.33	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5361.99	-58.82	2	38.41	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-51.19	2	46.04	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-59.62	2	37.61	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-48.62	2	48.61	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-58.37	2	38.86	Average	54	Pass
NVNT	ac80	5210	Ant1	5363.97	-46.21	2	51.02	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5369.25	-57.58	2	39.65	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-49.81	2	47.42	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-58.93	2	38.3	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-48.61	2	48.62	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-59.85	2	37.38	Average	54	Pass
NVNT	ac80	5210	Ant1	5148.59	-42.31	2	54.92	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5148.59	-51.67	2	45.56	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-43.68	2	53.55	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-51.33	2	45.9	Average	54	Pass





MIMO

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)			E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
				ANT0	ANT1	ANT0+ANT1				
NVNT	n20	5180	4500	-51.28	-50.71	-47.98	47.25	Peak	68.2	Pass
NVNT	n20	5180	4500	-60.64	-60.74	-57.68	37.55	Average	54	Pass
NVNT	n20	5180	5141.2	-33.08	-38.75	-32.04	63.19	Peak	68.2	Pass
NVNT	n20	5180	5148.9	-51.75	-55.91	-50.34	44.89	Average	54	Pass
NVNT	n20	5180	5150	-33.43	-41.37	-32.78	62.44	Peak	68.2	Pass
NVNT	n20	5180	5150	-51.49	-56	-50.17	45.05	Average	54	Pass
NVNT	n20	5240	5350	-49.06	-50.05	-46.52	48.71	Peak	68.2	Pass
NVNT	n20	5240	5350	-57.65	-59.74	-55.56	39.67	Average	54	Pass
NVNT	n20	5240	5384.4	-45.16	-47.46	-43.15	52.08	Peak	68.2	Pass
NVNT	n20	5240	5450.64	-54.86	-58.58	-53.32	41.90	Average	54	Pass
NVNT	n20	5240	5460	-48.58	-51.24	-46.70	48.53	Peak	68.2	Pass
NVNT	n20	5240	5460	-57.15	-59.41	-55.12	40.10	Average	54	Pass
NVNT	n40	5190	4500	-51.59	-51.02	-48.29	46.94	Peak	68.2	Pass
NVNT	n40	5190	4500	-60.56	-60.26	-57.40	37.83	Average	54	Pass
NVNT	n40	5190	5147.51	-37.37	-38.8	-35.02	60.21	Peak	68.2	Pass
NVNT	n40	5190	5149.7	-49.25	-50.79	-46.94	48.29	Average	54	Pass
NVNT	n40	5190	5150	-38.35	-40.5	-36.28	58.94	Peak	68.2	Pass
NVNT	n40	5190	5150	-48.88	-50.02	-46.40	48.83	Average	54	Pass
NVNT	n40	5230	5350	-51.18	-50.47	-47.80	47.43	Peak	68.2	Pass
NVNT	n40	5230	5350	-59.51	-59.05	-56.26	38.96	Average	54	Pass
NVNT	n40	5230	5378.73	-47.67	-47.41	-44.53	50.70	Peak	68.2	Pass
NVNT	n40	5230	5357.4	-58.91	-58.88	-55.88	39.34	Average	54	Pass
NVNT	n40	5230	5460	-51	-51.46	-48.21	47.01	Peak	68.2	Pass
NVNT	n40	5230	5460	-59.56	-59.64	-56.59	38.64	Average	54	Pass
NVNT	ac20	5180	4500	-50.83	-51.22	-48.01	47.22	Peak	68.2	Pass
NVNT	ac20	5180	4500	-60.45	-60.61	-57.52	37.71	Average	54	Pass
NVNT	ac20	5180	5143.3	-34.3	-39.79	-33.22	62.01	Peak	68.2	Pass
NVNT	ac20	5180	5149.6	-51.88	-56.18	-50.51	44.72	Average	54	Pass
NVNT	ac20	5180	5150	-34.95	-38.33	-33.31	61.92	Peak	68.2	Pass
NVNT	ac20	5180	5150	-51.49	-55.97	-50.17	45.06	Average	54	Pass
NVNT	ac20	5240	5350	-48.49	-50.74	-46.46	48.77	Peak	68.2	Pass
NVNT	ac20	5240	5350	-57.61	-59.59	-55.48	39.75	Average	54	Pass
NVNT	ac20	5240	5452.08	-45.42	-46.97	-43.12	52.11	Peak	68.2	Pass
NVNT	ac20	5240	5450.16	-55.06	-58.81	-53.53	41.70	Average	54	Pass
NVNT	ac20	5240	5460	-48	-51.01	-46.24	48.99	Peak	68.2	Pass
NVNT	ac20	5240	5460	-57.22	-59.35	-55.15	40.08	Average	54	Pass
NVNT	ac40	5190	4500	-51.65	-49.8	-47.62	47.61	Peak	68.2	Pass
NVNT	ac40	5190	4500	-60	-60.18	-57.08	38.15	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	ac40	5190	5146.78	-36.74	-37.78	-34.22	61.01	Peak	68.2	Pass
NVNT	ac40	5190	5149.7	-48	-50.94	-46.22	49.01	Average	54	Pass
NVNT	ac40	5190	5150	-34.6	-37.75	-32.89	62.34	Peak	68.2	Pass
NVNT	ac40	5190	5150	-47.77	-50.4	-45.88	49.35	Average	54	Pass
NVNT	ac40	5230	5350	-49.51	-50.24	-46.85	48.38	Peak	68.2	Pass
NVNT	ac40	5230	5350	-59.21	-59.18	-56.18	39.04	Average	54	Pass
NVNT	ac40	5230	5393.58	-47.17	-47.9	-44.51	50.72	Peak	68.2	Pass
NVNT	ac40	5230	5387.64	-58.84	-58.82	-55.82	39.41	Average	54	Pass
NVNT	ac40	5230	5460	-50.33	-51.19	-47.73	47.50	Peak	68.2	Pass
NVNT	ac40	5230	5460	-59.7	-59.62	-56.65	38.58	Average	54	Pass
NVNT	ac80	5210	5350	-50.05	-48.62	-46.27	48.96	Peak	68.2	Pass
NVNT	ac80	5210	5350	-58.04	-58.37	-55.19	40.04	Average	54	Pass
NVNT	ac80	5210	5382.78	-46.64	-46.21	-43.41	51.82	Peak	68.2	Pass
NVNT	ac80	5210	5364.63	-57.58	-57.58	-54.57	40.66	Average	54	Pass
NVNT	ac80	5210	5460	-50.01	-49.81	-46.90	48.33	Peak	68.2	Pass
NVNT	ac80	5210	5460	-58.93	-58.93	-55.92	39.31	Average	54	Pass
NVNT	ac80	5210	4500	-51.47	-48.61	-46.80	48.43	Peak	68.2	Pass
NVNT	ac80	5210	4500	-59.92	-59.85	-56.87	38.35	Average	54	Pass
NVNT	ac80	5210	5145.43	-41.81	-42.31	-39.04	56.19	Peak	68.2	Pass
NVNT	ac80	5210	5148.59	-51.49	-51.67	-48.57	46.66	Average	54	Pass
NVNT	ac80	5210	5150	-44.2	-43.68	-40.92	54.31	Peak	68.2	Pass
NVNT	ac80	5210	5150	-51.7	-51.33	-48.50	46.73	Average	54	Pass

Note: The Antenna Gain is compensated in the graph




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5180MHz Ant0 Peak

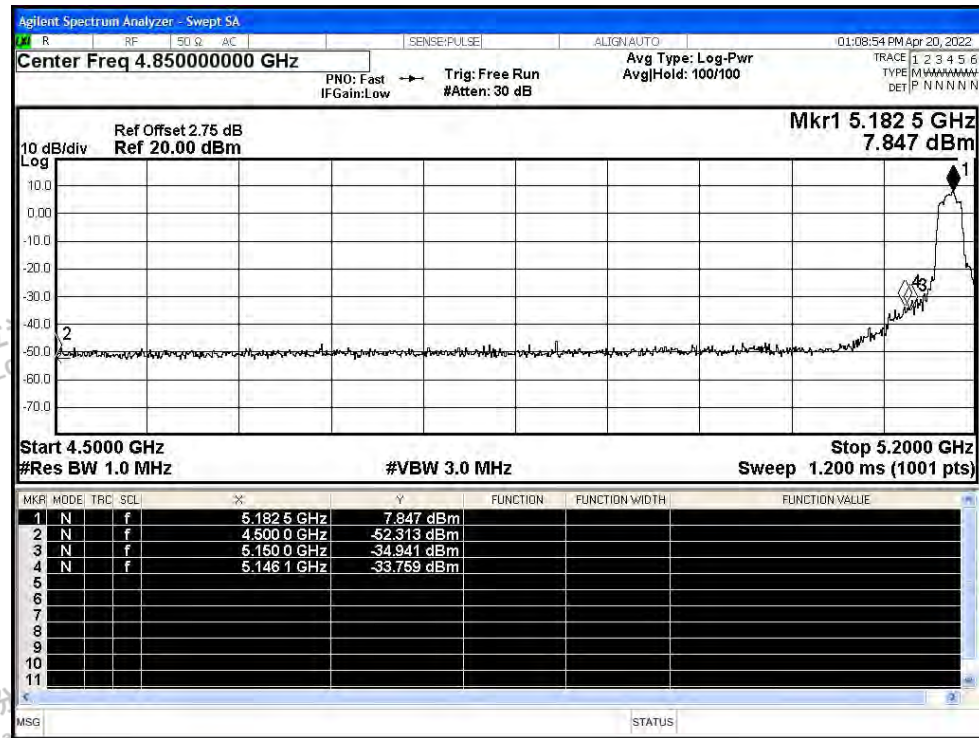

Restrict Band NVNT a 5180MHz Ant0 Average

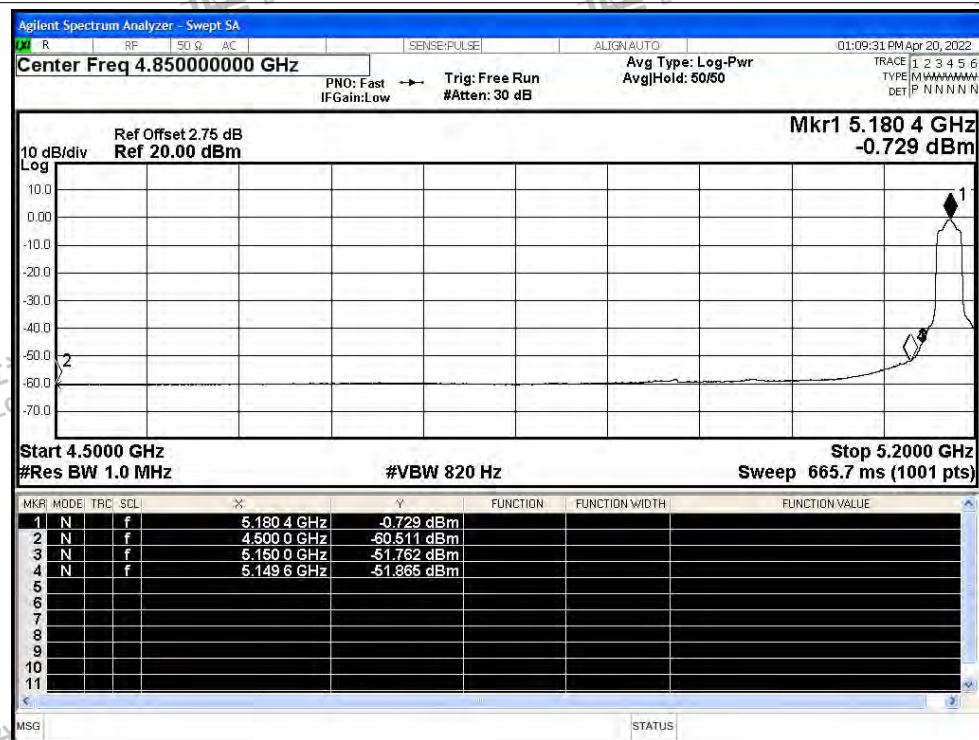

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5240MHz Ant0 Peak

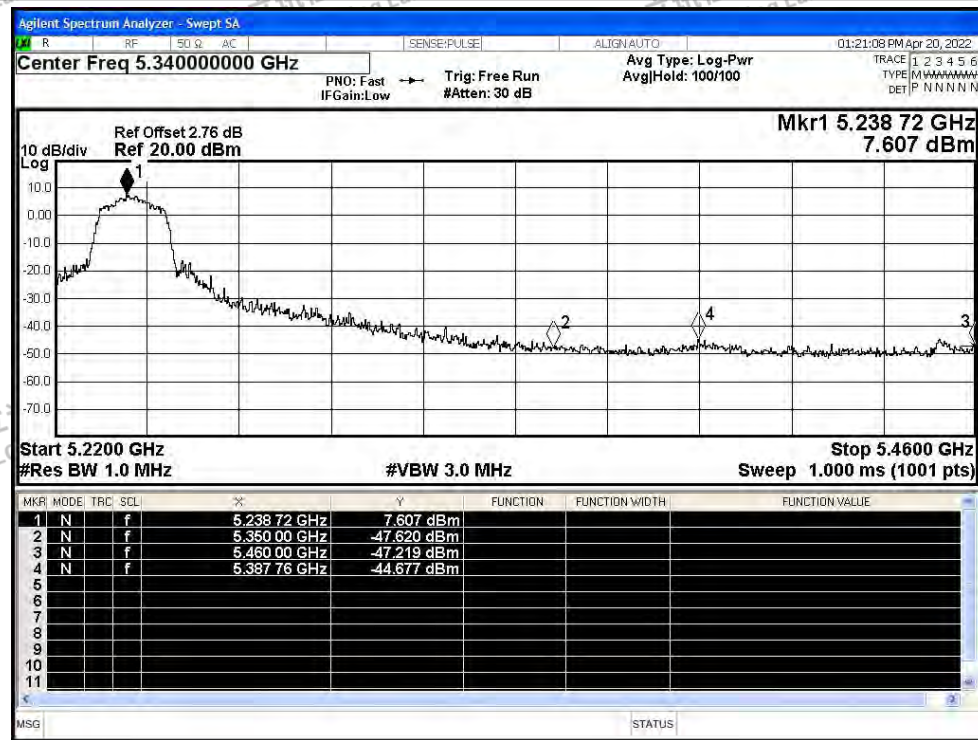


Restrict Band NVNT a 5240MHz Ant0 Average

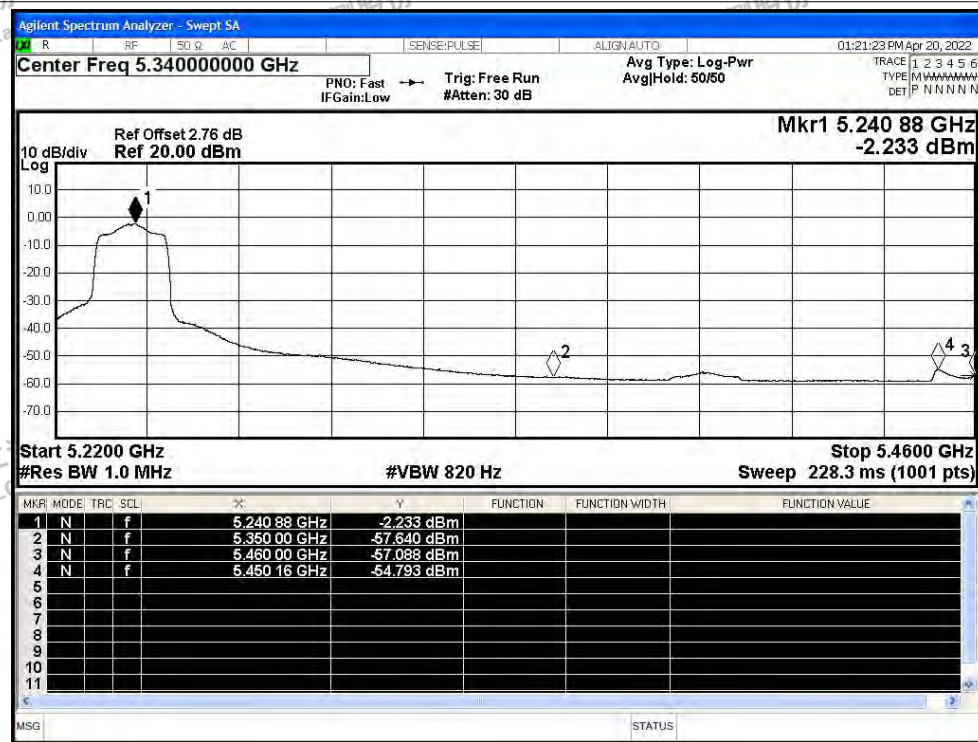




Restrict Band NVNT n20 5180MHz Ant0 Peak

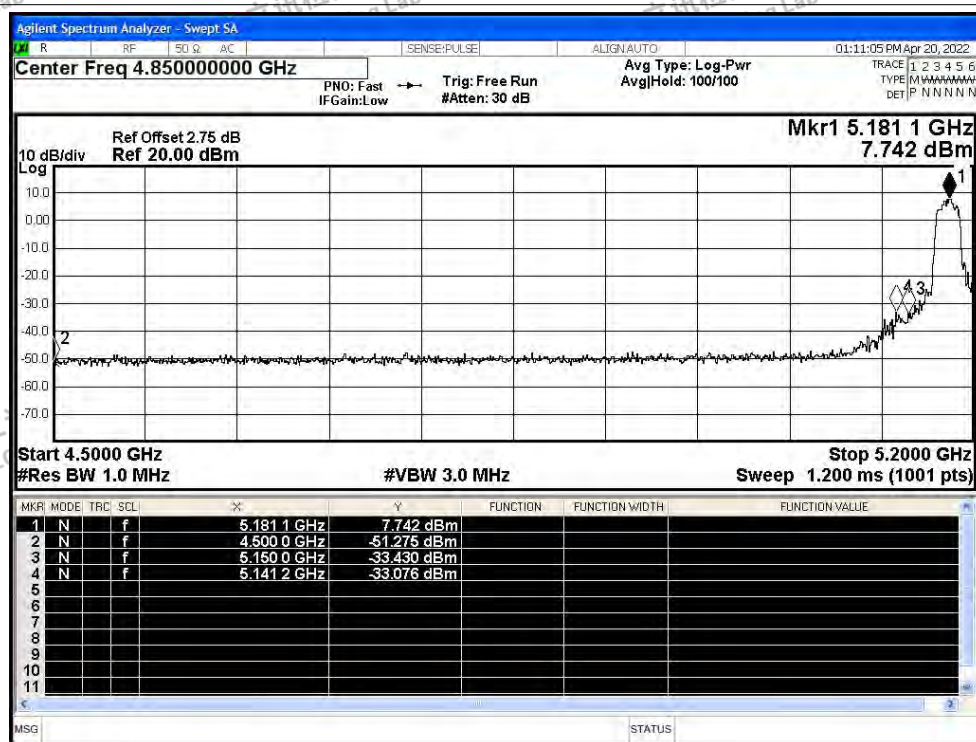


Restrict Band NVNT n20 5180MHz Ant0 Average

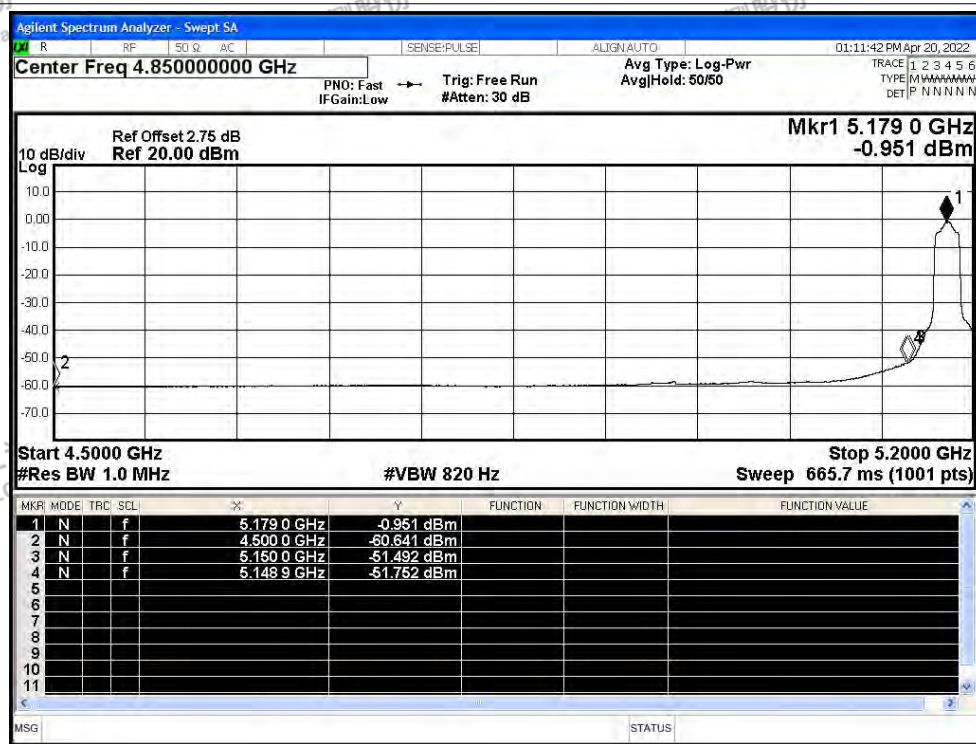




Restrict Band NVNT n20 5240MHz Ant0 Peak

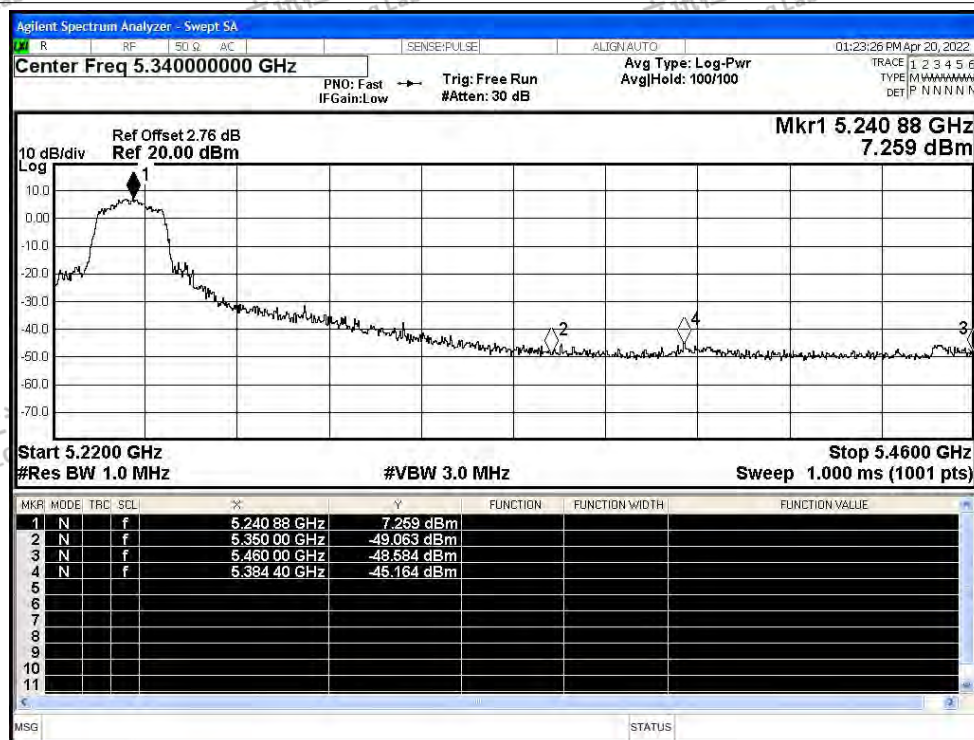

Restrict Band NVNT n20 5240MHz Ant0 Average

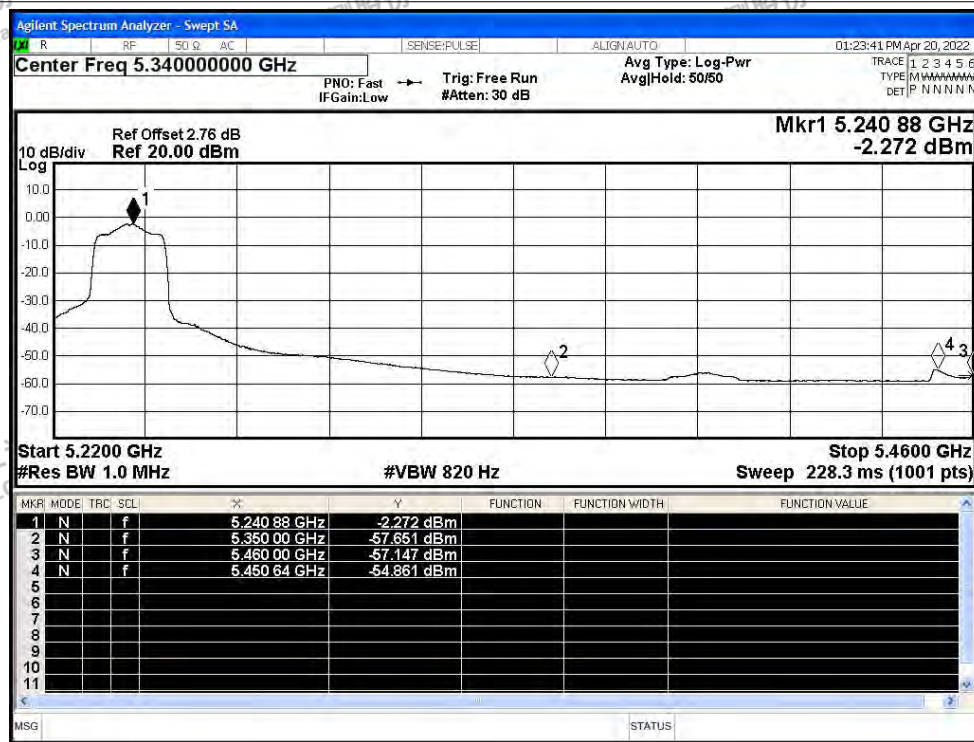

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5190MHz Ant0 Peak

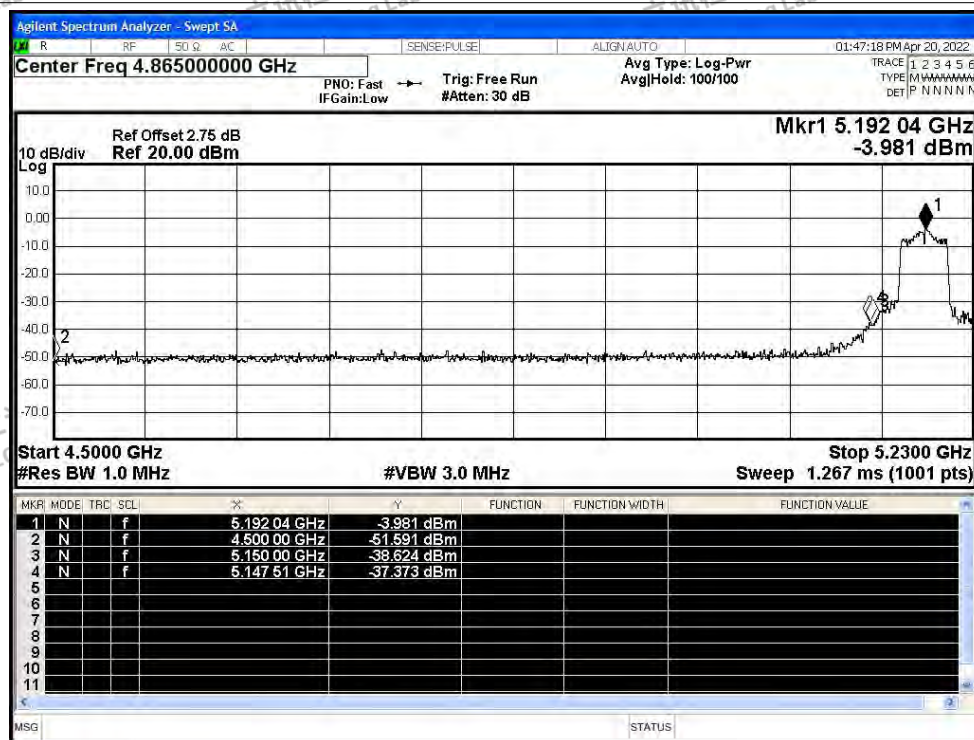

Restrict Band NVNT n40 5190MHz Ant0 Average

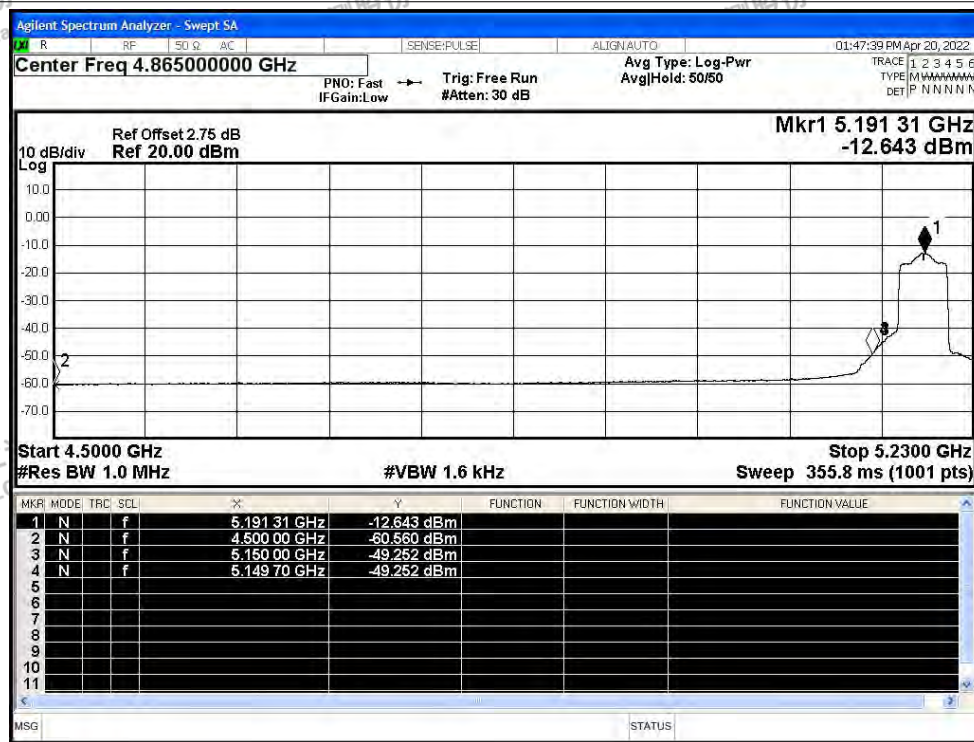

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT n40 5230MHz Ant0 Peak




Restrict Band NVNT n40 5230MHz Ant0 Average

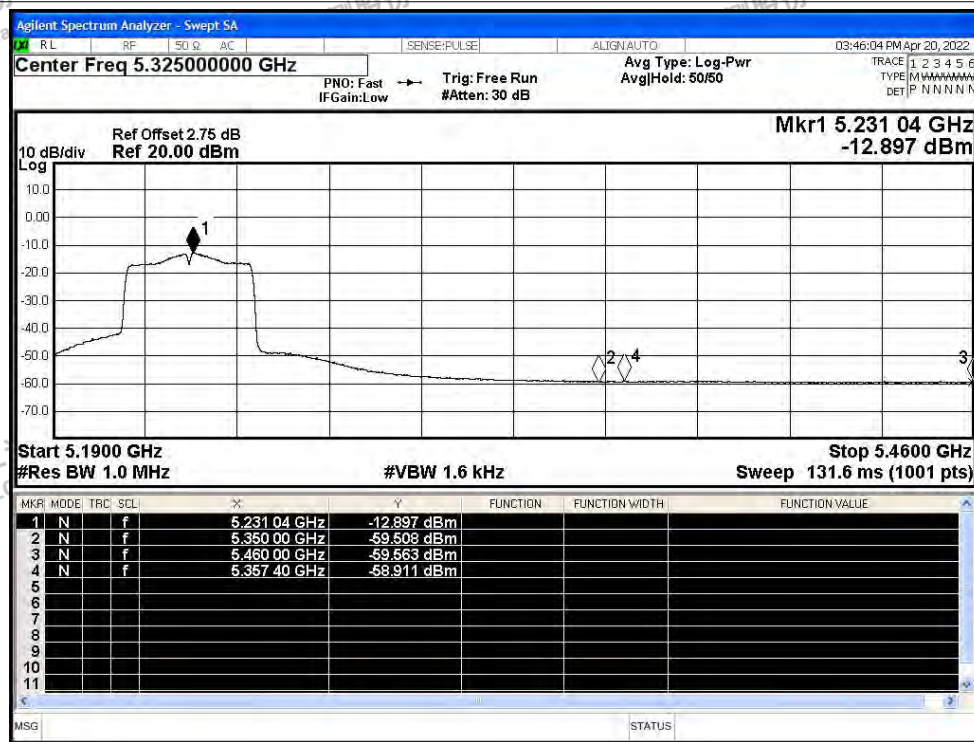




Restrict Band NVNT ac20 5180MHz Ant0 Peak

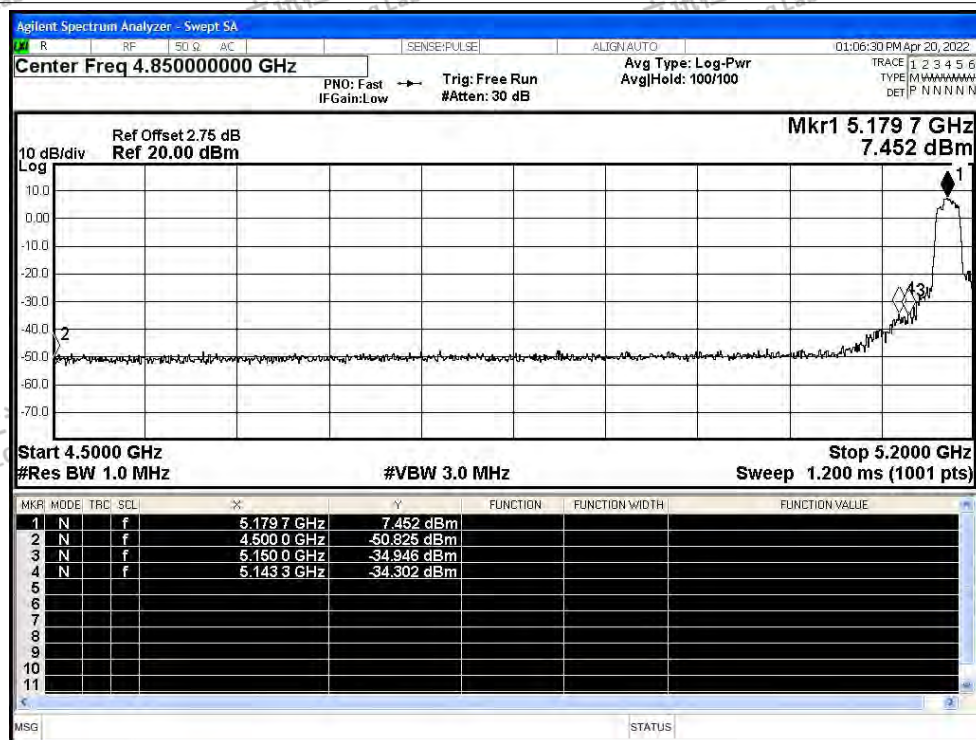


Restrict Band NVNT ac20 5180MHz Ant0 Average

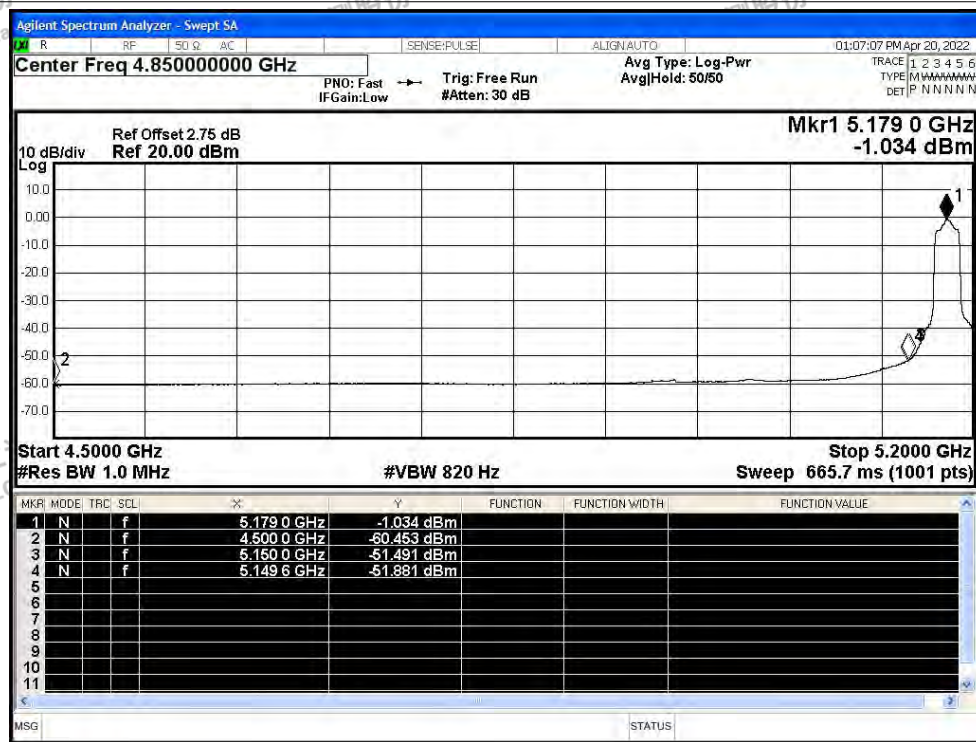




Restrict Band NVNT ac20 5240MHz Ant0 Peak

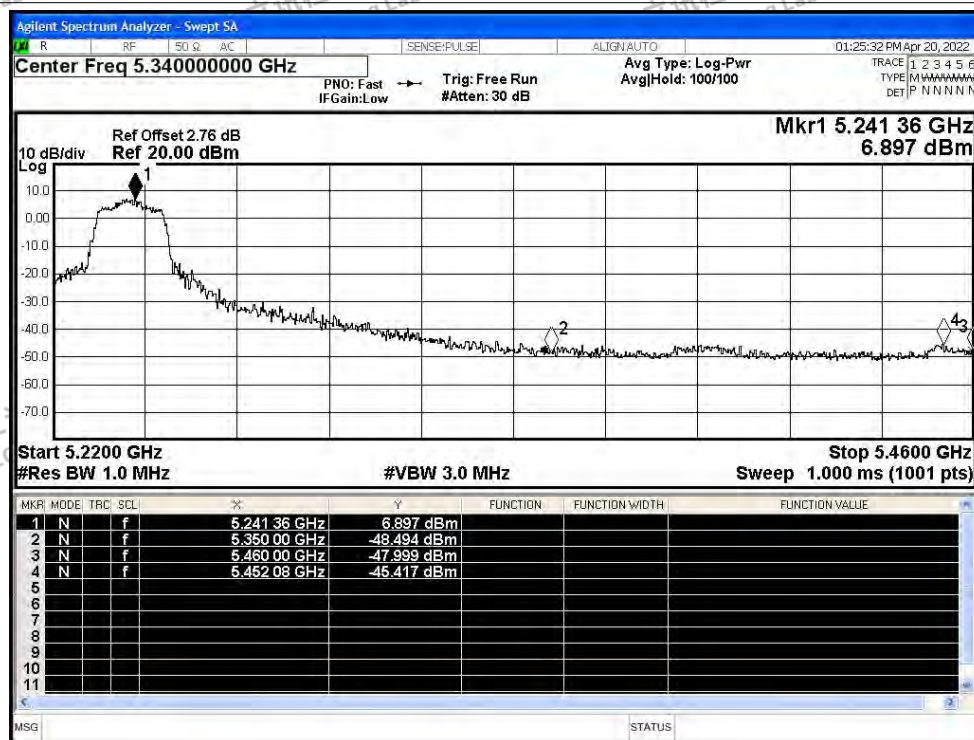


Restrict Band NVNT ac20 5240MHz Ant0 Average

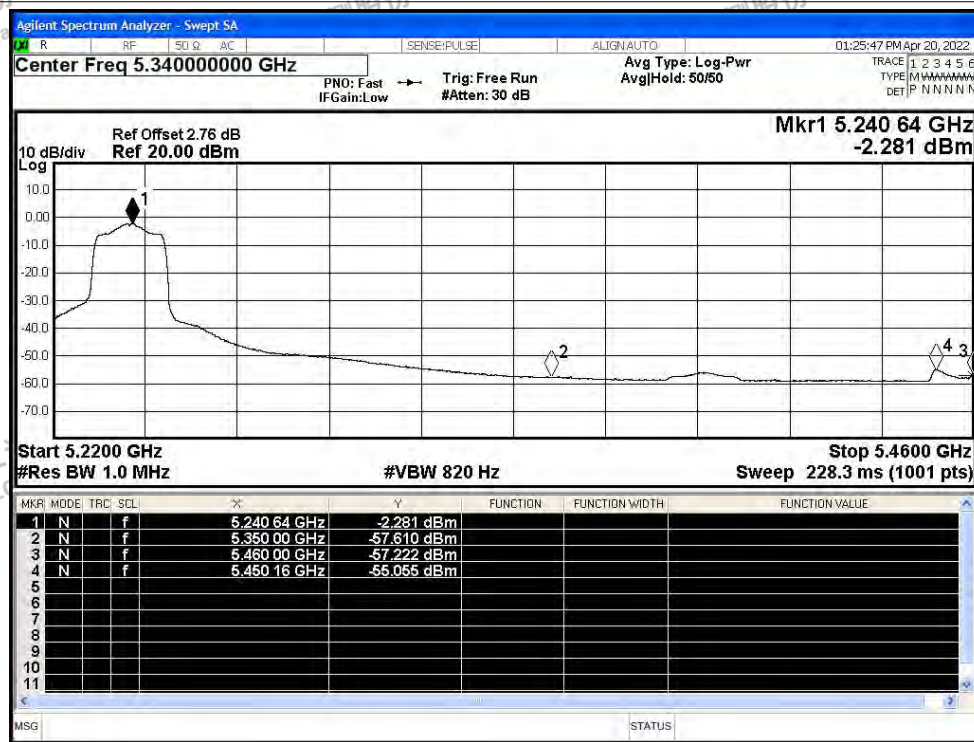




Restrict Band NVNT ac40 5190MHz Ant0 Peak

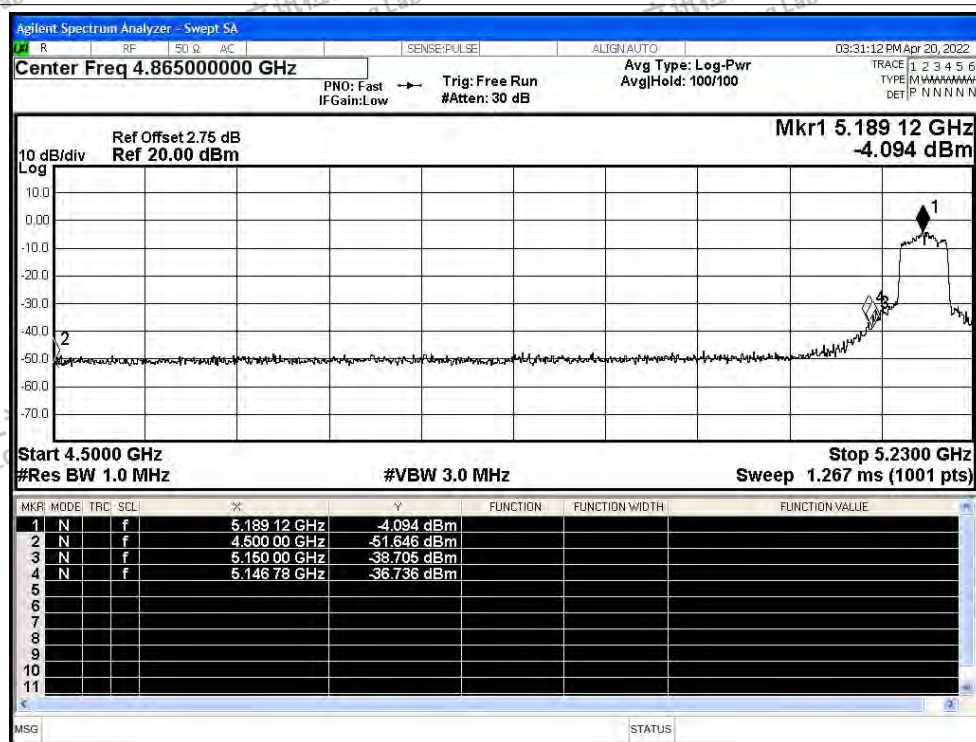


Restrict Band NVNT ac40 5190MHz Ant0 Average

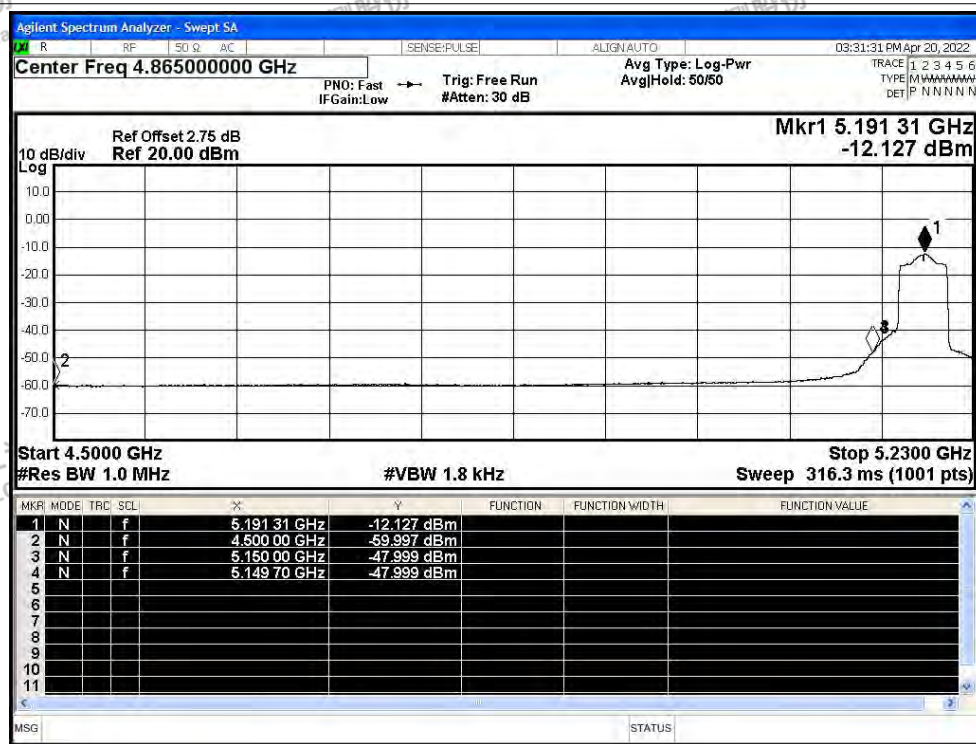




Restrict Band NVNT ac40 5230MHz Ant0 Peak

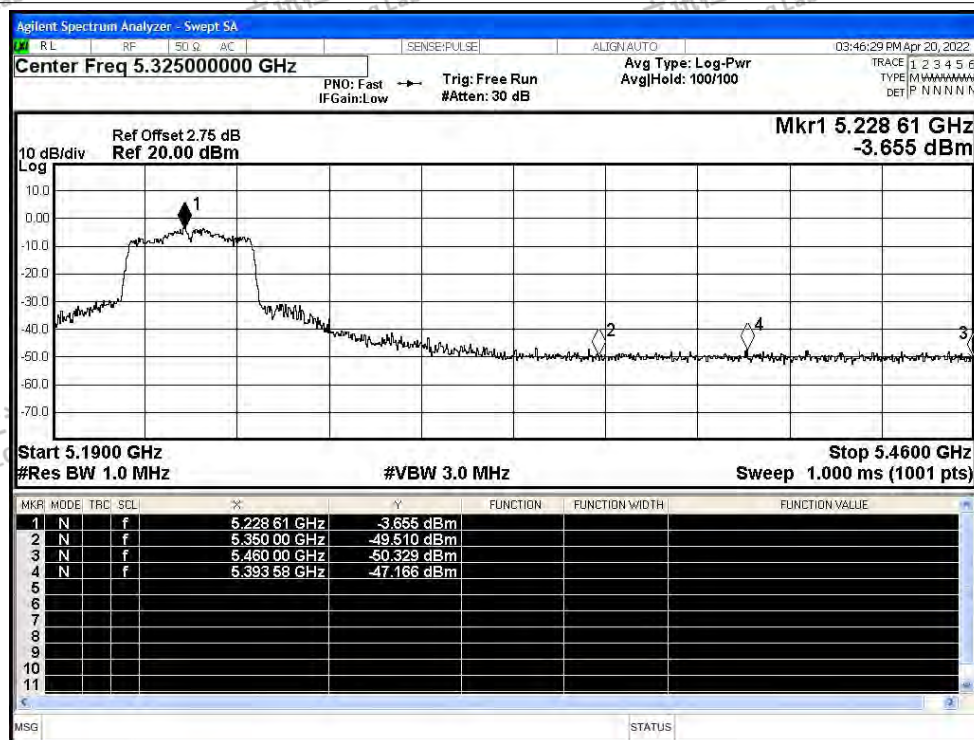

Restrict Band NVNT ac40 5230MHz Ant0 Average

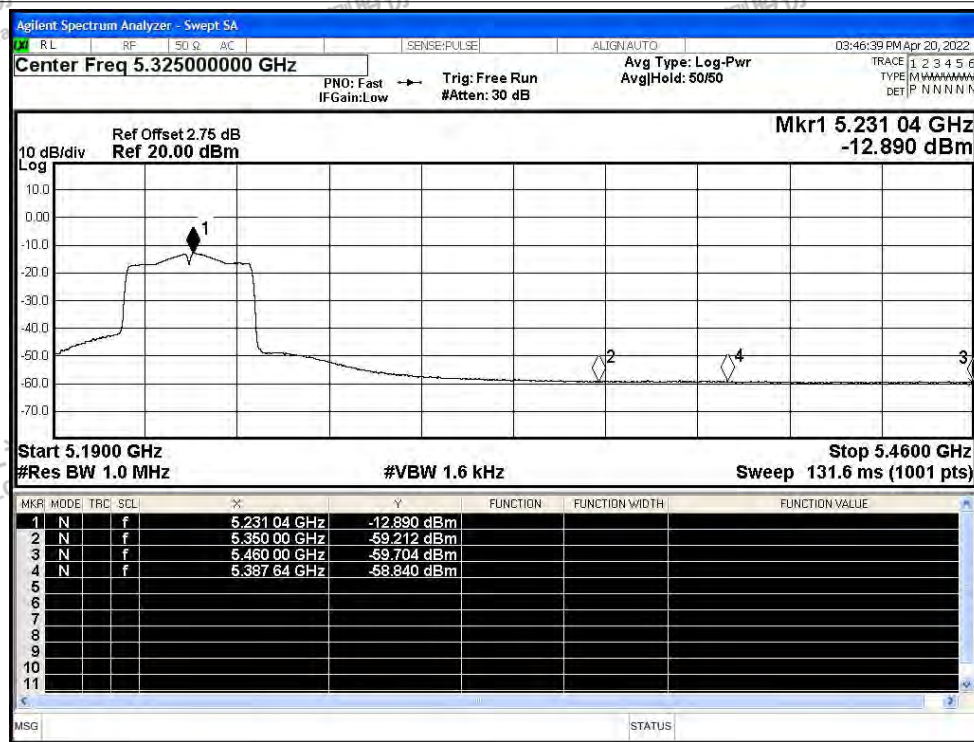

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT ac80 5210MHz Ant0 Peak

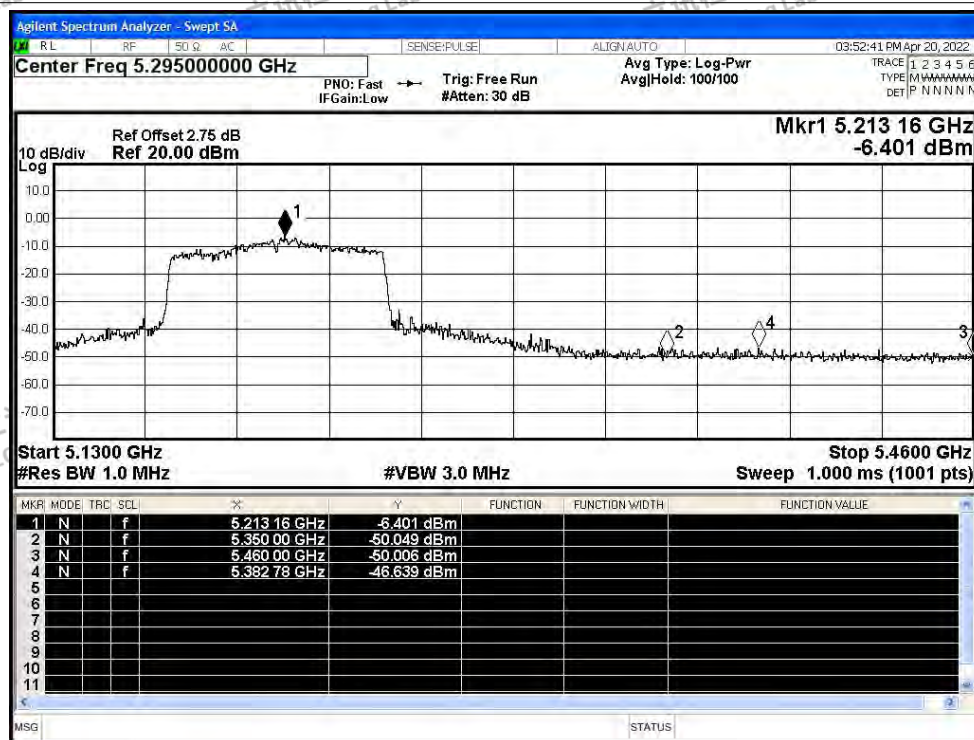


Restrict Band NVNT ac80 5210MHz Ant0 Average

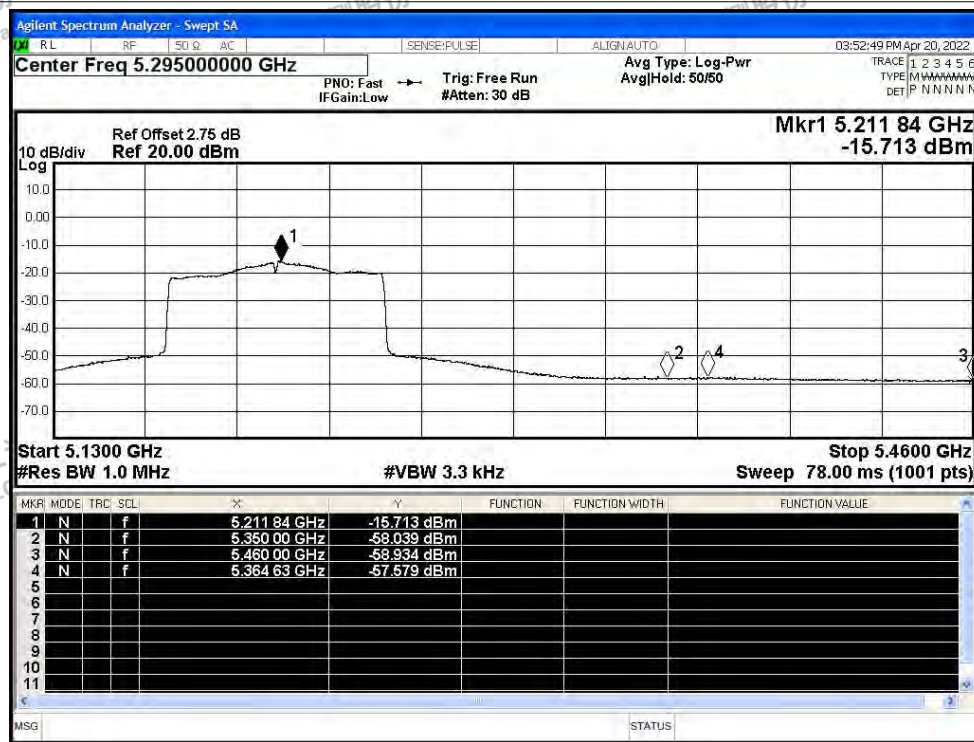




Restrict Band NVNT ac80 5210MHz Ant0 Peak

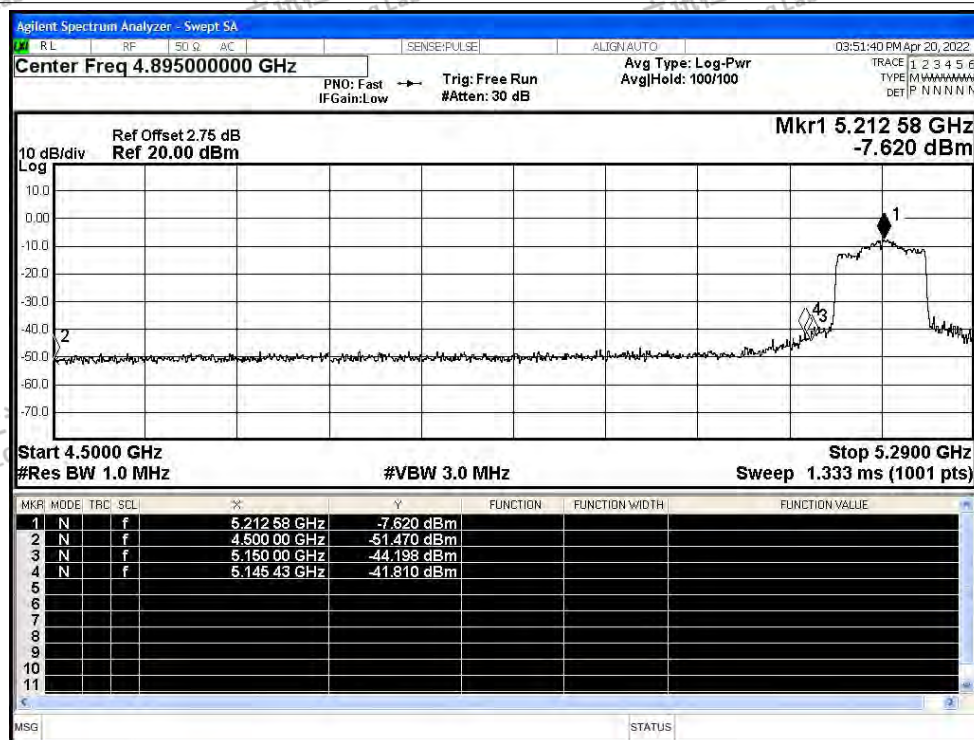


Restrict Band NVNT ac80 5210MHz Ant0 Average

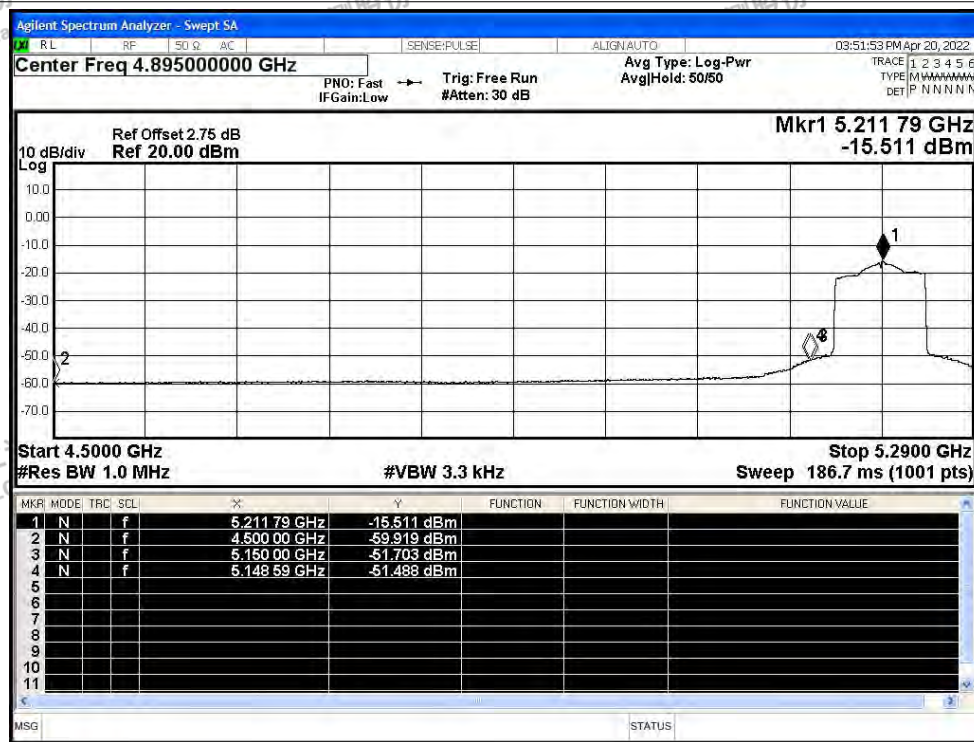




Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

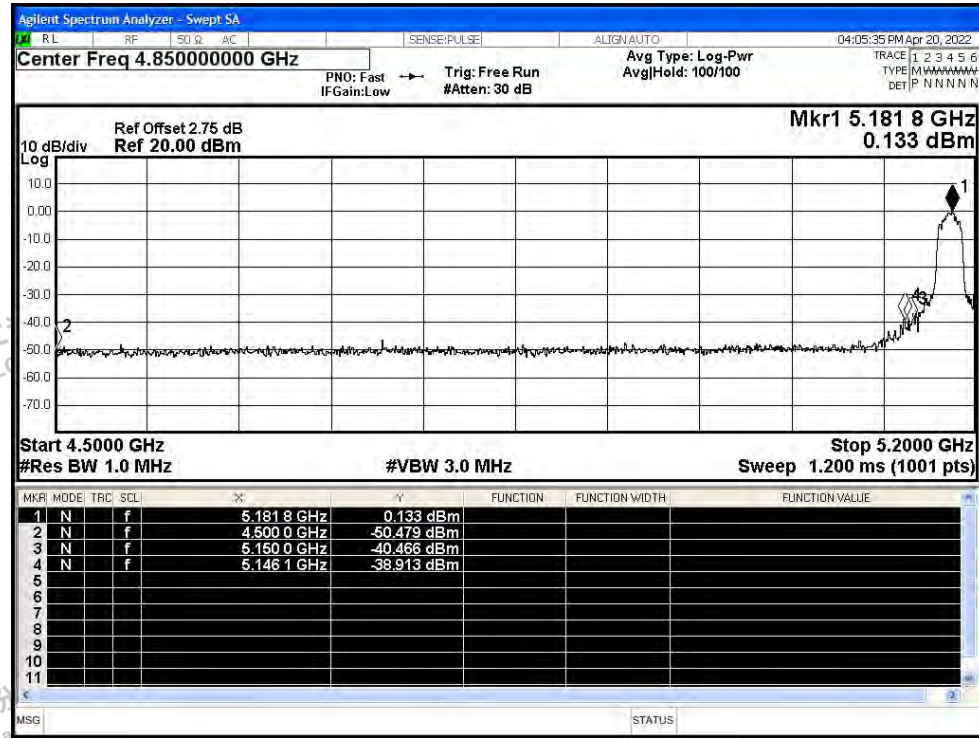

Restrict Band NVNT a 5180MHz Ant1 Average

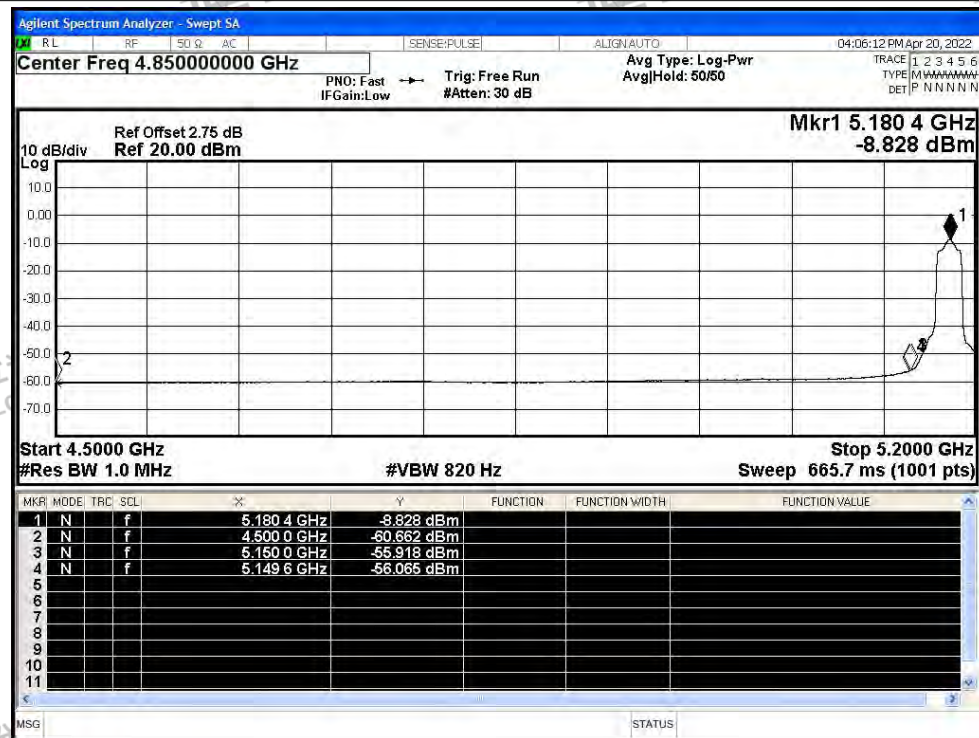

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT a 5240MHz Ant1 Peak

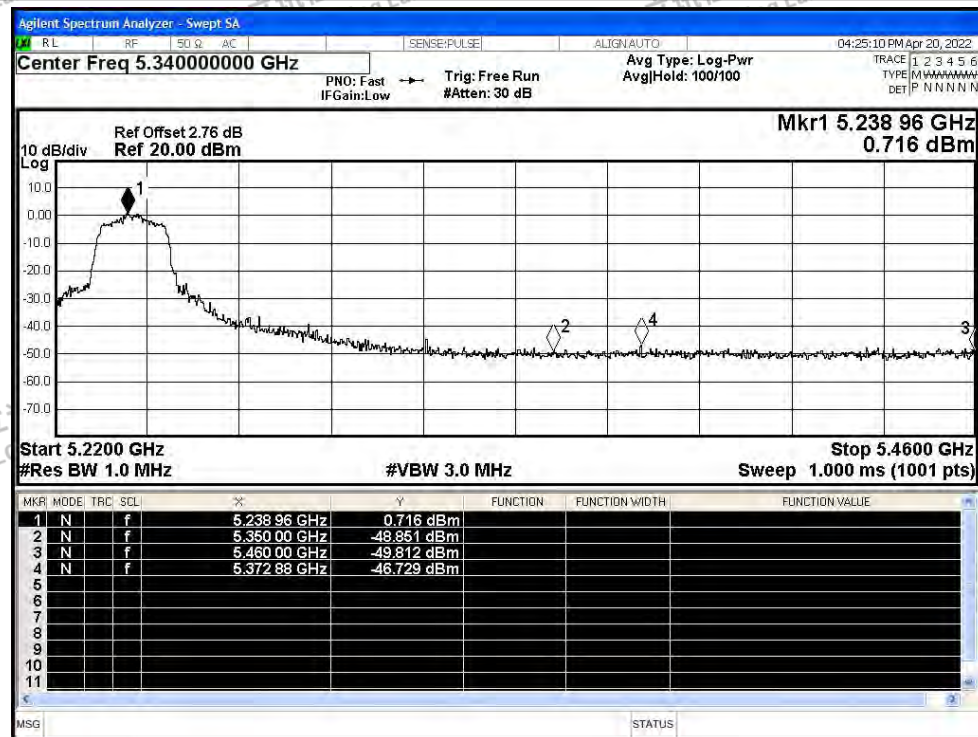


Restrict Band NVNT a 5240MHz Ant1 Average

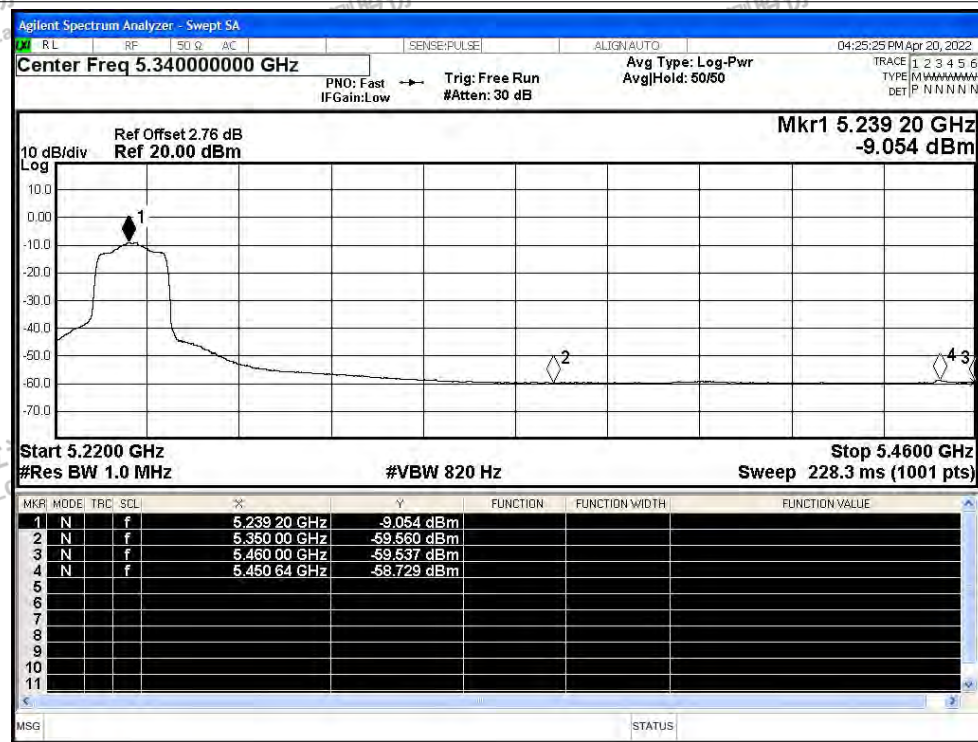




Restrict Band NVNT n20 5180MHz Ant1 Peak

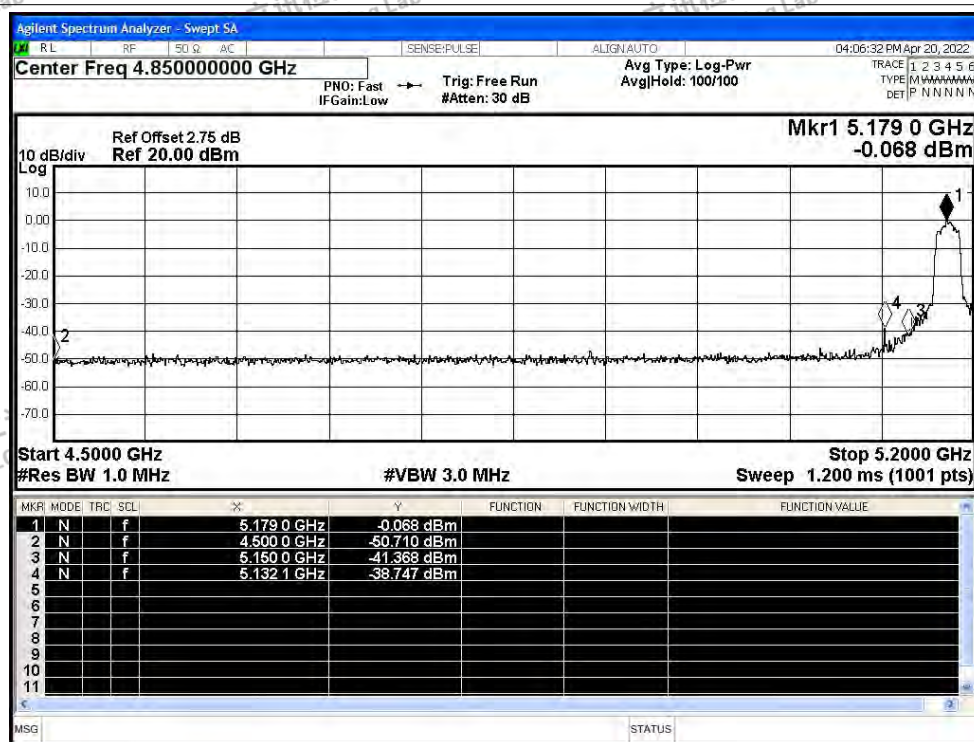


Restrict Band NVNT n20 5180MHz Ant1 Average

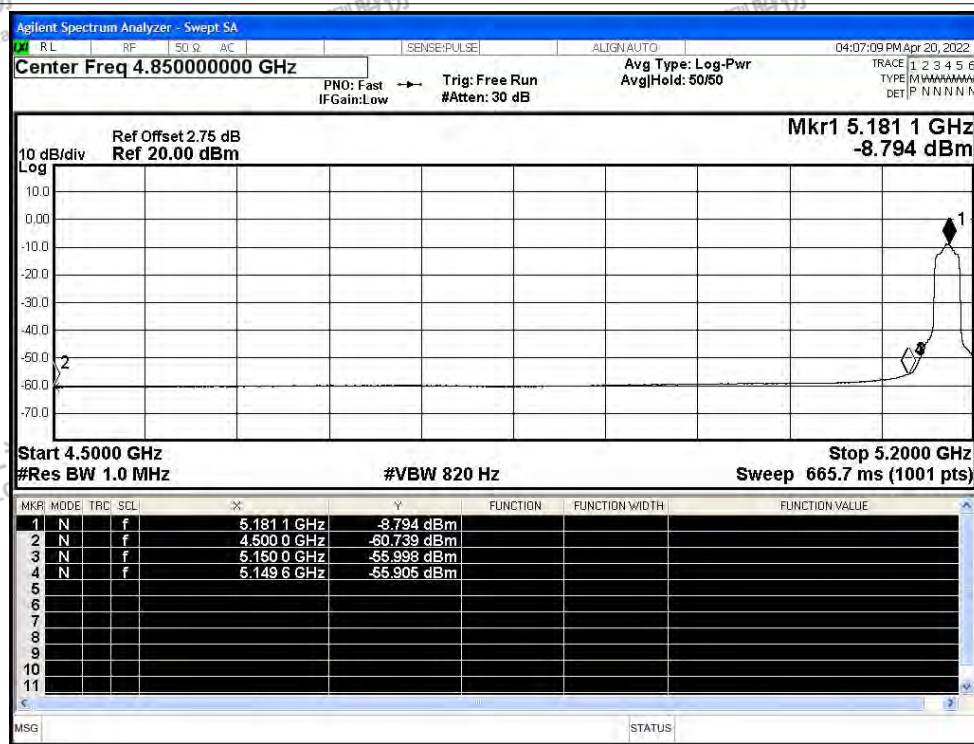




Restrict Band NVNT n20 5240MHz Ant1 Peak

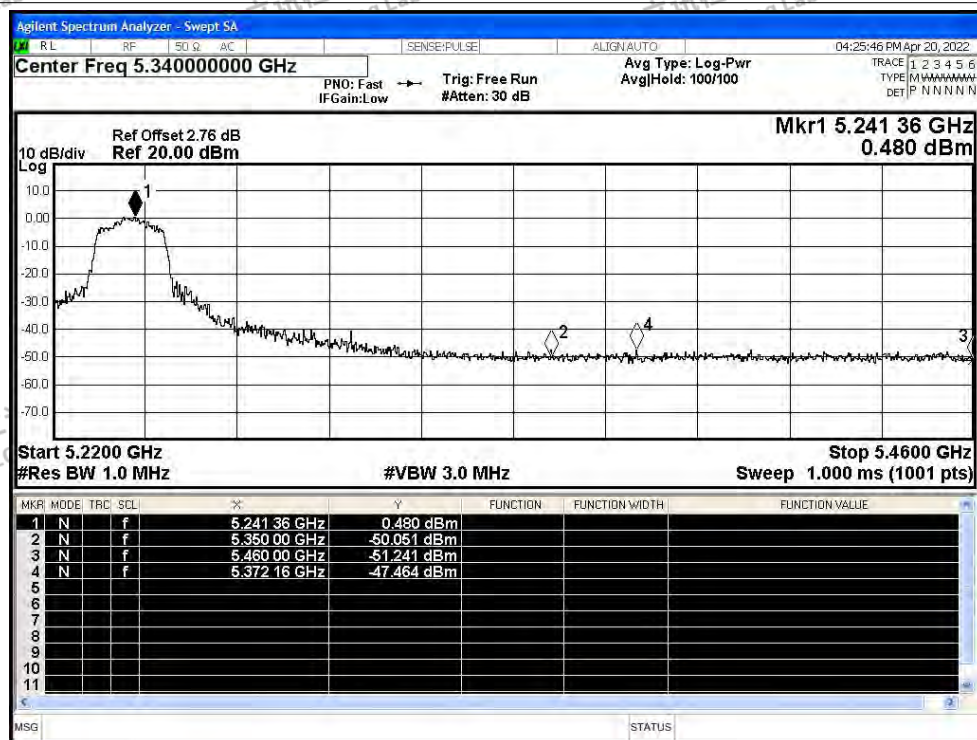


Restrict Band NVNT n20 5240MHz Ant1 Average

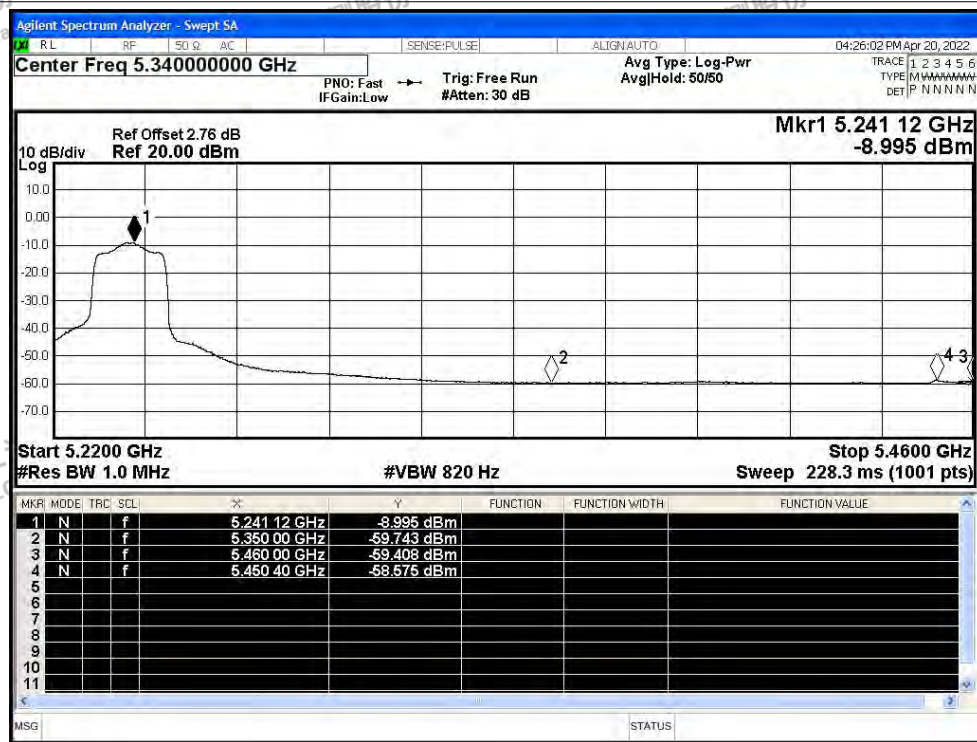




Restrict Band NVNT n40 5190MHz Ant1 Peak

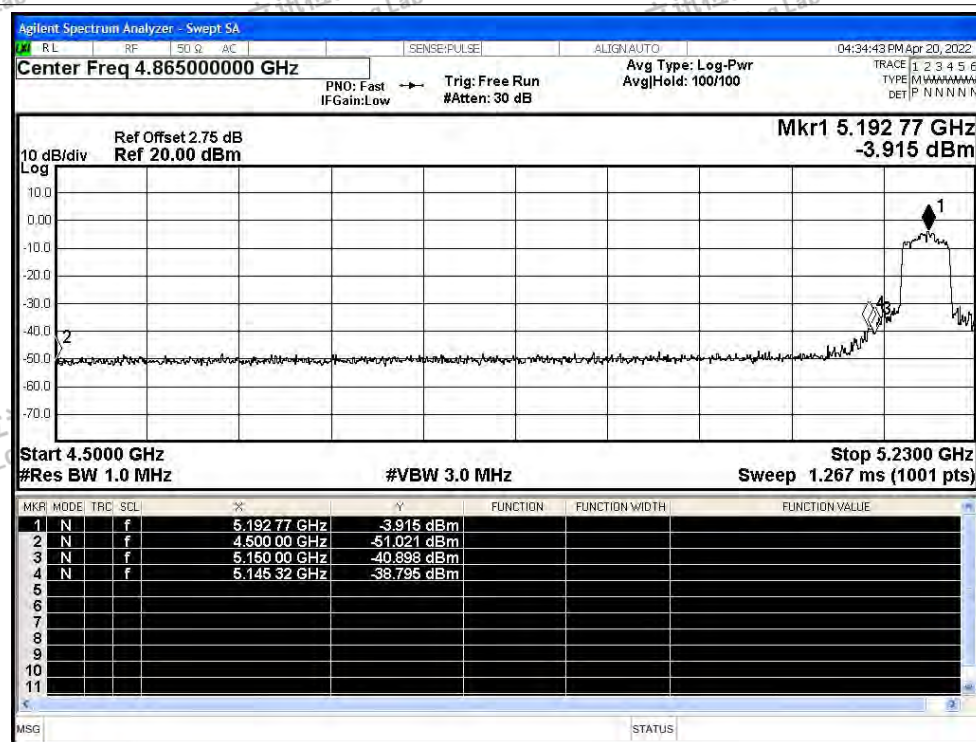


Restrict Band NVNT n40 5190MHz Ant1 Average

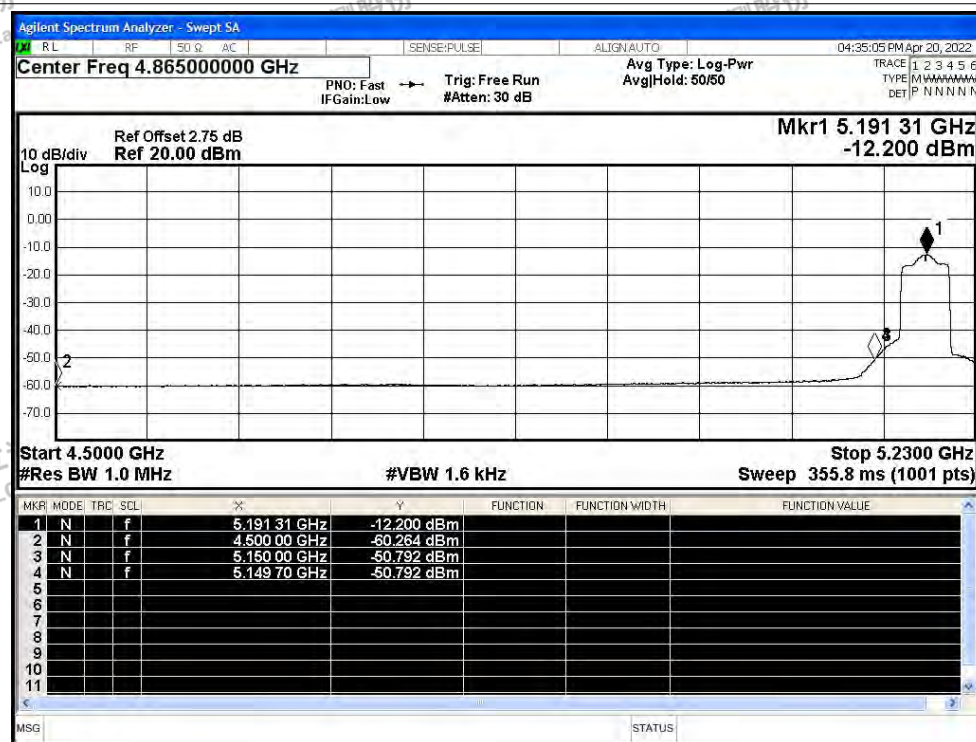




Restrict Band NVNT n40 5230MHz Ant1 Peak

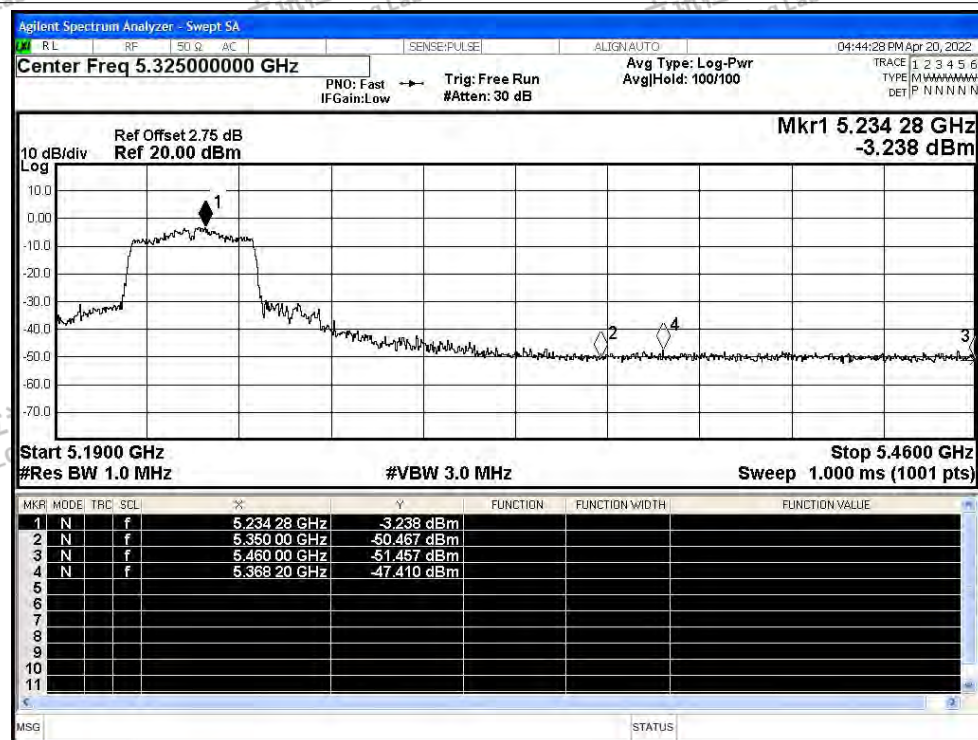


Restrict Band NVNT n40 5230MHz Ant1 Average

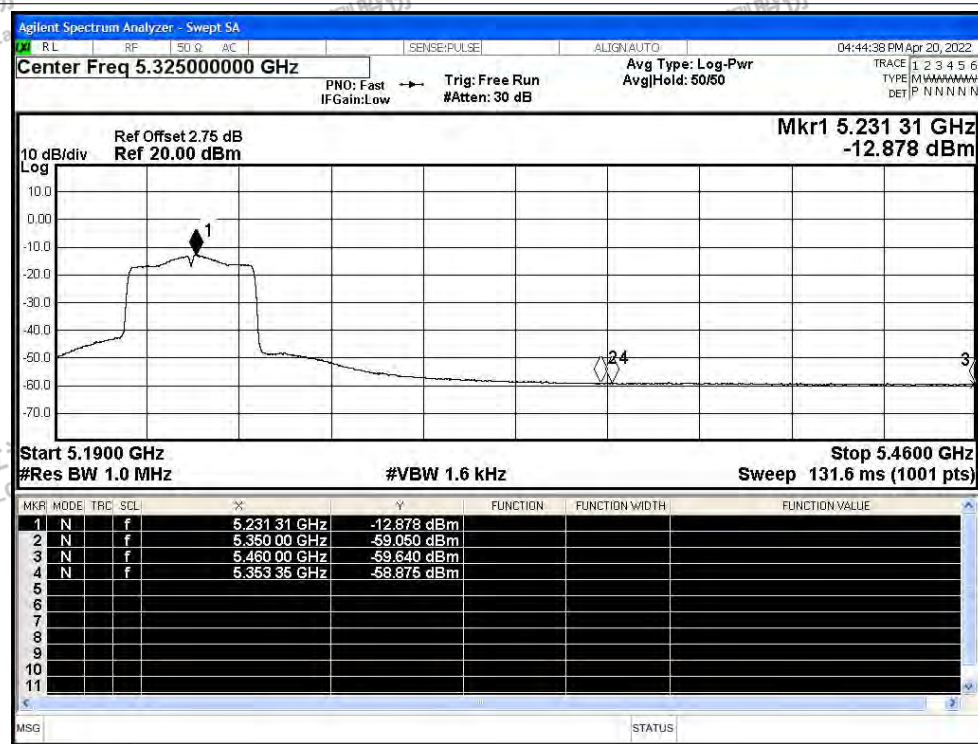




Restrict Band NVNT ac20 5180MHz Ant1 Peak

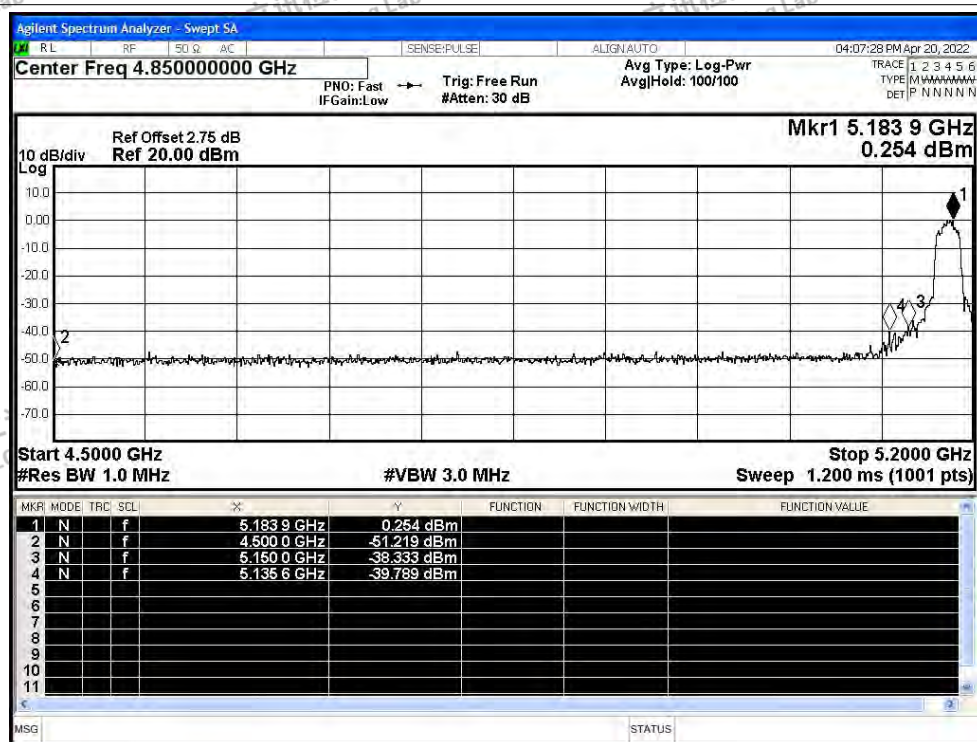


Restrict Band NVNT ac20 5180MHz Ant1 Average

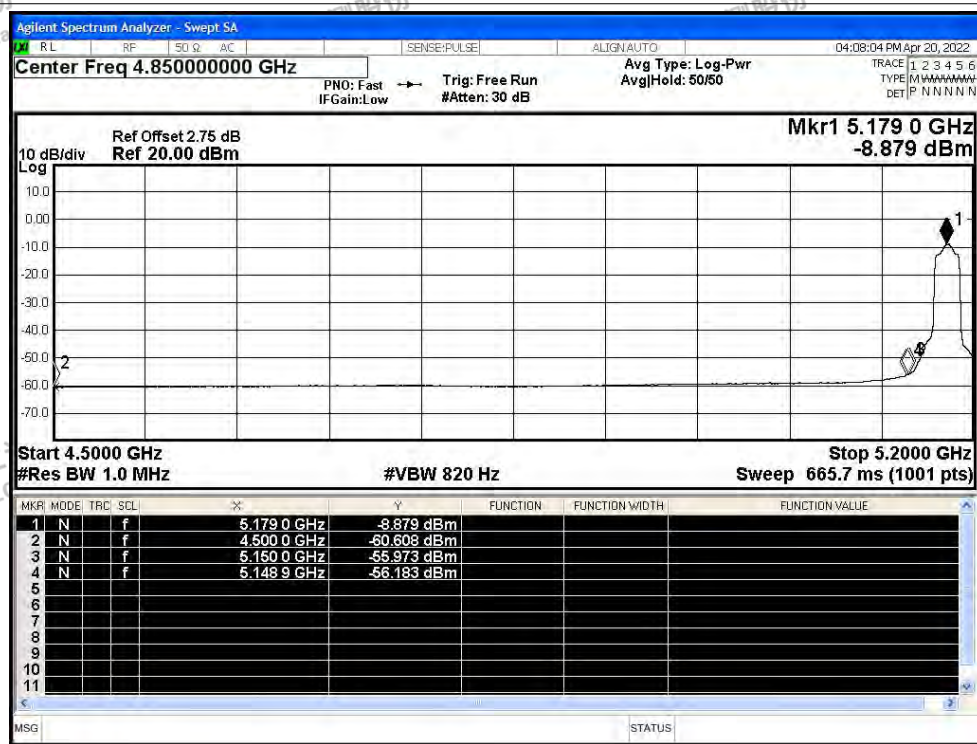




Restrict Band NVNT ac20 5240MHz Ant1 Peak

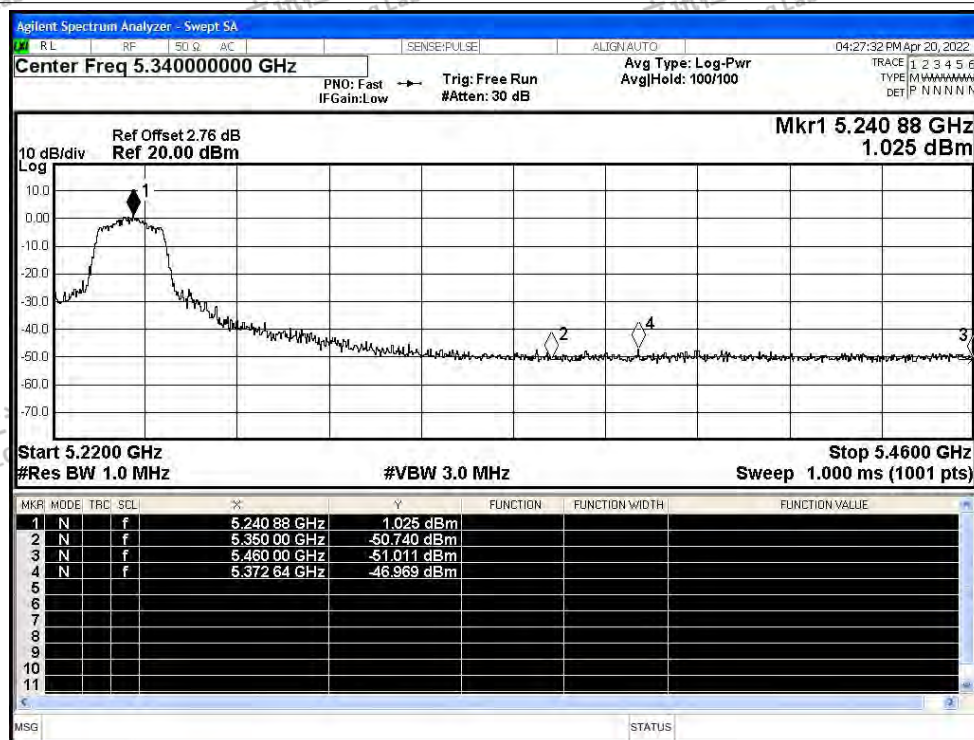


Restrict Band NVNT ac20 5240MHz Ant1 Average

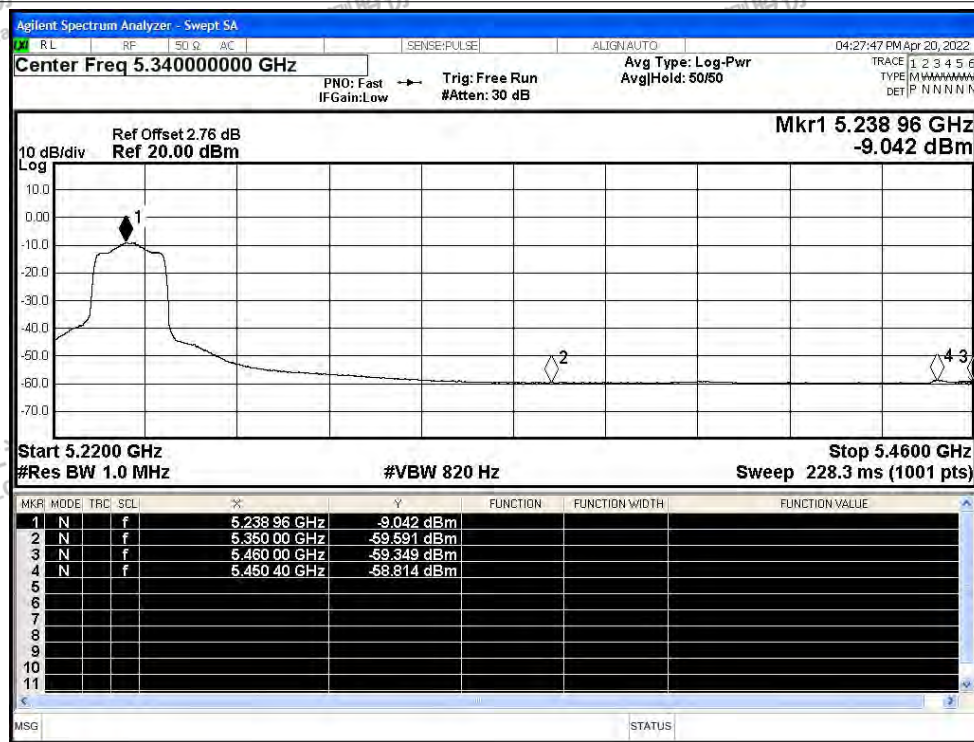




Restrict Band NVNT ac40 5190MHz Ant1 Peak

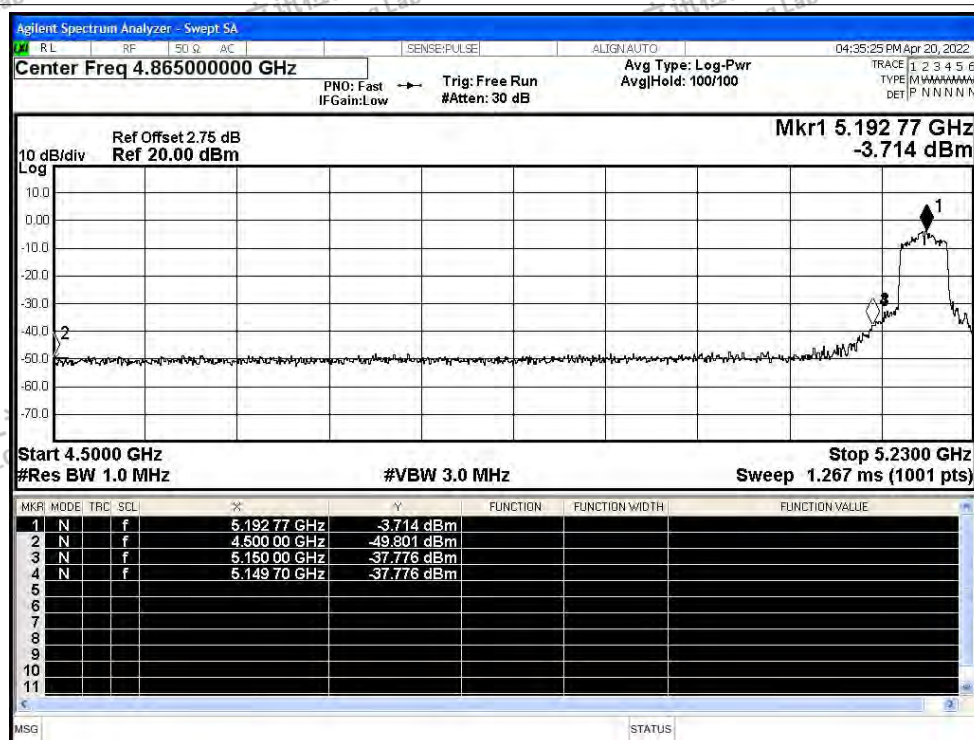


Restrict Band NVNT ac40 5190MHz Ant1 Average

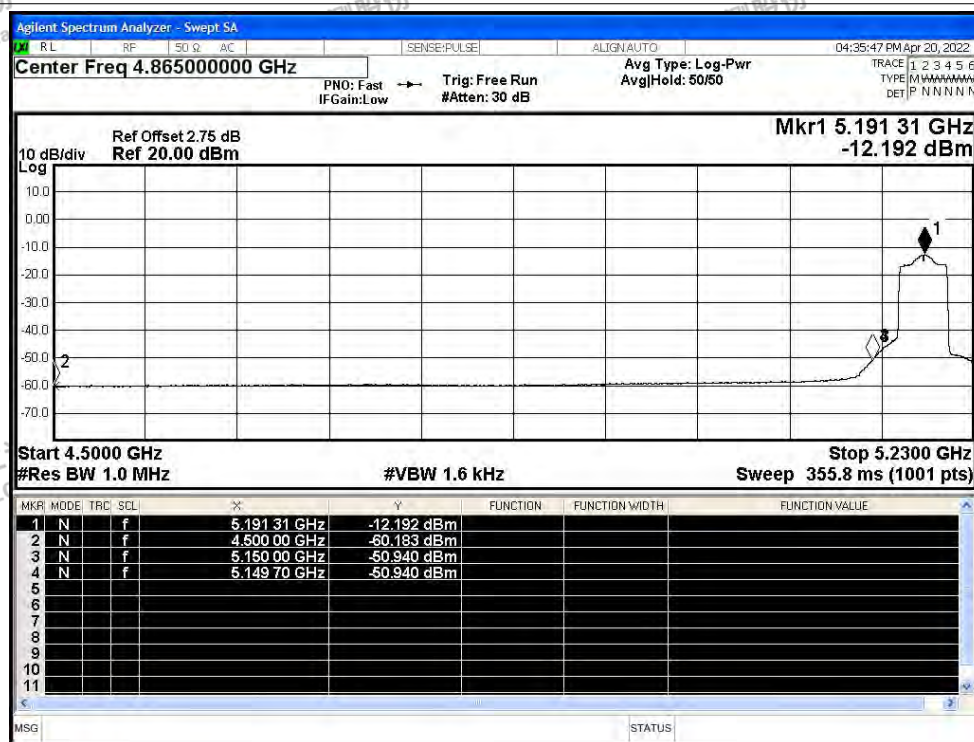



Restrict Band NVNT ac40 5230MHz Ant1 Peak

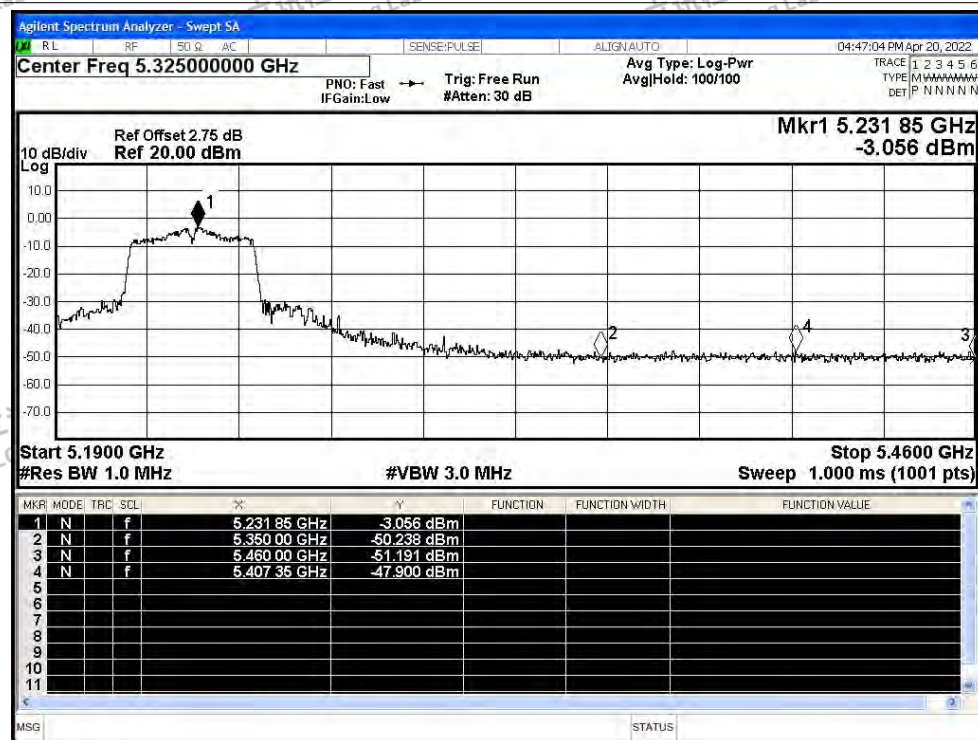

Restrict Band NVNT ac40 5230MHz Ant1 Average

