


160.0


65.0

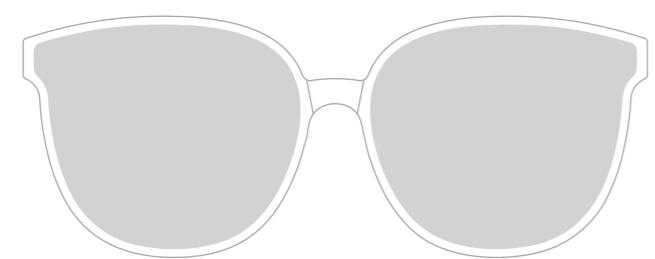

**REMO
EYEWEAR**


User Manual

1. What's in package

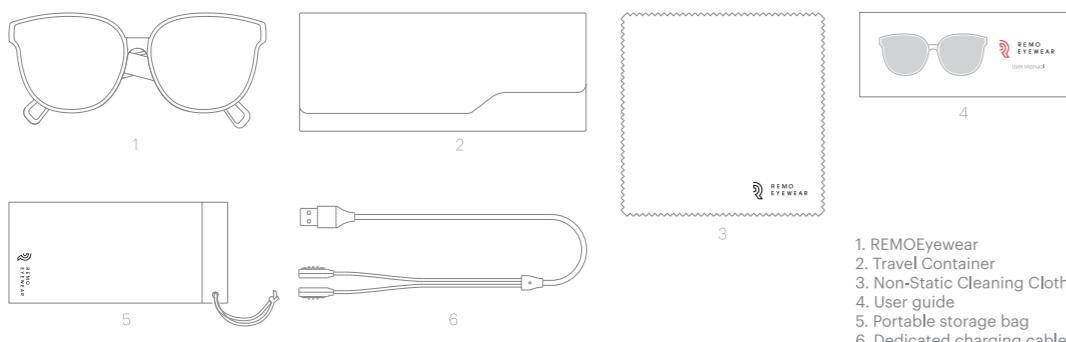


2. Connecting cellphone

In the off state, press and hold the left Action key and the right Action key at the same time for about 3 seconds to turn on the machine. The left and right side will be automatically paired and enter the TWS normal pairing mode. Turn on the Bluetooth device to search for "REMO Eyewear" and perform the pairing sequence.

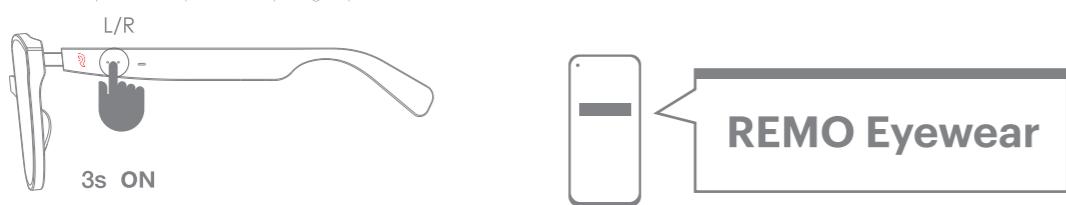

3. Shut down

In the power-on state, long press the left Action button or the right Action button for about 7 seconds, the machine will turn off.

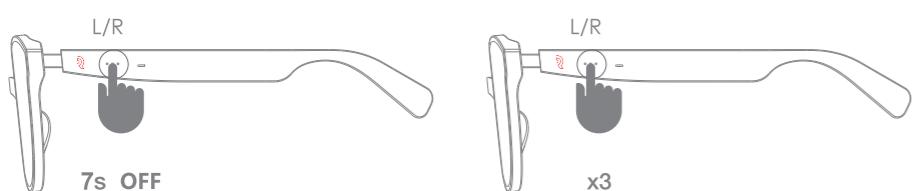

4. Voice assistant function

On connected state, triple-click any side to turn on the Siri or Android voice assistant; Click the Action button on either side of the headset to turn off the Siri/Android voice assistant.


制作要求:

成品尺寸: 160*65mm
157G双铜纸 风琴折


正面

5. Play music


1. Infrared controller
Auto playing music when wearing glasses on, Auto pause when taking glasses off

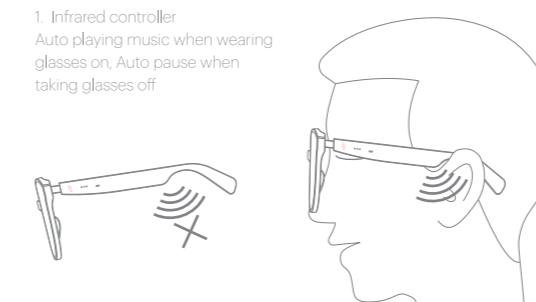

2. Manually control

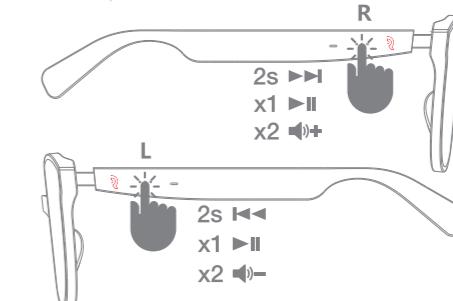


6. Make a call

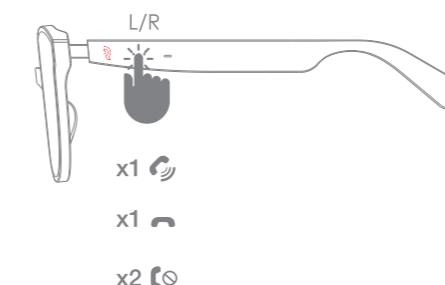

7. Reset


1. When the glasses are off, press and hold the Action key of the left side and the right side for 15 seconds to clear the phone pairing information (The LED indicator keeps luminous for 1 second)
2. Long press the Action key of the left side and the right side for about 3 seconds to turn on, and automatically enter the TWS pairing mode. After the L/R pairing is completed, the red and white light of the main unit flash alternately and slowly, and you can turn on your BT device to search for it to pair.

8. Replace the glasses frame

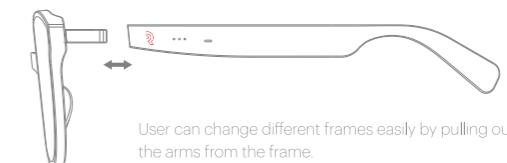

9. Charge

When the power of the glasses headset is low, the glasses headset will emit a beep of "Low battery" every 2 minutes. The indicator light flashes red once every 5 seconds. Please use the dedicated charging cable to charge the glasses headset.

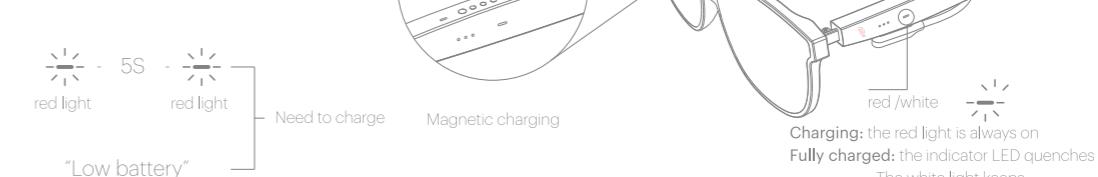

Charging: the red light is always on
Fully charged: the indicator LED quenches
The white light keeps luminous for 1 minute and then quenches

10. Specification

Chipset : Realtek 8763BFP
Bluetooth version : Bluetooth5.0
Driver diameter : 8 x 15 mm
Impedance : 8±15% Ω
Sensitivity(S.P.L) : 88.5±3 dB
Frequency response : 20Hz-20 KHz
Microphone F.S. : 42 dB
SNR : 97 dB
Audio codec supported : SBC、AAC
Total Harmonic Distortion : ≤5%
Dual mode
EDR

Bluetooth profiles supported : A2DP AVRCP HFP HSP SPP
Bluetooth class : Class 2
Bluetooth range : >10 M
Battery capacity of one earphone : 110 mAh x 2
Battery capacity: 110 mAh x 2
Play time : 4.5 H
Call time : 4.5 H
Standby time : 120 H
Charging time : 2 H
Dust/water protection level : IPX5
Other function : Replaceable frame

背面

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. in portable exposure condition without restriction.