

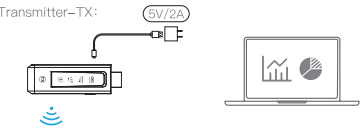





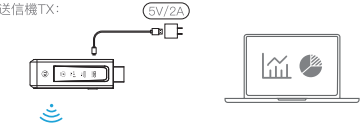





70X100MM

Wireless HD Transmitter Receiver Kit User manual	・Product introduction Receiver-RX  Transmitter-TX 	・Connection Combination of receiver and transmitter, plug and play Transmitter-TX:  Receiver-RX:  1. Connect the receiver to the display device, such as monitor or TV. 2. Connect the USB-C power supply port of the receiver to the charging cable and plug it into a power adapter (Voltage above 5v, current above 2A). 3. Adjust the HD signal source of the monitor or TV to the corresponding HD port until it has display. 4. Connect the transmitter to the computer or other devices with HD video output function . After the indicator light enters the fast flash state, wait for ten seconds to complete casting.	・Pairing Instructions The product has been paired successfully when leave the factory, if you fail to pair the product due to improper operation or other circumstances during use, please restore and repair the device as follows: 1. Press and hold the receiver function key for more than 5 seconds, and it will pop up a manu on the screen "Pairing Time out: 90S", and wait for the transmitter to enter the pairing mode. 2. Press and hold the transmitter function key for more than 5 seconds, the indicator light will flash quickly to pair, when transmitter indicator light always on, it indicates that devices connected successfully.   Indicator description: ① Connection indicator status Slow Flash: Disconnected Always On: Connected Triple Flash: Abnormal ② HDMI status indicator Always On: HDMI Connected Eternal extinction: HDMI not connected ③ Signal strength lamp All off: Not connected (other times according to signal strength display) ④ Failure light, (Color: Red) Flicker: If the power supply of the device is insufficient, please replace the 5V2A power supply head to supply power to the device	・Function Settings 1. Search for receiver in Wireless Network (Name is TuTuLink-xxxx, default password is 12345678) 2. Open the mobile / tablet browser and enter 192.168.168.1 in the address bar 3. After entering the website, you can operate the distribution network, resolution,upgrade and restart ・Problem solving Q: How to restore factory settings? A: When the product fails, press and hold the receiver function button for 15 seconds. After a black screen appears and restart, the factory settings will be restored. Q: How to enter privacy mode? A: Press the transmitter function button to disconnect or reconnect. Q: Can devices work without HD interface? A: Yes, but you will need to use an HD interface converter.	Warning: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: --Reorient or relocate the receiving antenna. -- Increase the separation between the equipment and receiver --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help RF Exposure Statement To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenat① must not be co-located or operation in conjunction with any other antenna or transmitter.
--	---	---	---	--	--

ワイヤレス高品位送信機 受信機キット  210-208820 ユーザーマニュアル	・製品の紹介 受信機RX  送信機TX 	・セットアップ 受信機と送信機の組み合わせ、プラグアンドプレイ 送信機TX:  受信機RX:  1.受信機をディスプレイやテレビなどの表示装置に接続する。 2.受信機のUSB-C電源ポートを接続するケーブルを充電して電源アダプタに差し込みます (上のVoltage 5 v、2 A以上の電流) 3.モニタまたはテレビの高品位信号源をモニタがあるまで対応するHDポート。 4.エミッタをコンピュータまたは他のデバイスに接続するHDビデオ出力機能。LEDが入った後フラッシュ状態で、製造が完了するまで10秒待ちます。	・ペアリングの説明 製品出荷時にペアリングに成功しました。不適切な操作やその他の理由により、製品をペアリングできませんでした使用中に発生した場合は、次の手順に従ってデバイスをリカバリして修理してください。 フロー: 1.受信機のファンクションキーを5秒以上押し続けます。画面上で「ペアリングタイムアウト: 90 S」というマニュアルをポップアップし、そして、送信機がペアリングモードに入るのを待っています。 2.エミッタ機能キーを5秒以上押し続け、エミッタLEDが点灯すると、LEDがすばやく点滅してペアになります LEDは常に点灯しており、デバイスが正常に接続されたことを示しています。   指標の説明: ①接続インジケータ状態 スローフラッシュ: 接続解除フラッシュフラッシュ: ペア 常時オン: 接続済みデュアルフラッシュ: HDMI未接続 二重点滅: 呼吸灯異常: 一時停止状態 ②HDMI状態指示音 常時オン: HDMI接続済み 永久消灯: HDMI未接続 ③信号強度ランプ 全オフ: 未接続 (他の時間は信号強度に基づいて表示) ④故障ランプ (色: 赤) 点滅: デバイスの電源が不足している場合は、5 V 2 A電源ヘッドを交換してデバイスに電力を供給してください	・機能設定 1.ワイヤレスネットワークで受信機を検索する (名称はTuTuLink-xxx、デフォルトパスワードは12345678) 2.携帯電話/タブレットブラウザを開き、に192.168.168.1と入力するアドレスバー 3.Webサイトにアクセスすると、配布を操作できますネットワーク、解析、アップグレード、再起動 ・問題を解決する Q: 出荷時の設定を復元するには? A: 製品に障害が発生した場合、受信機機能ボタンを押したまま15秒間続きます。黒い画面が表示され再起動すると、工場設定が復元されます。 Q: プライバシーモードに入るには? A: エミッタ機能ボタンを押して、切断または再接続します。 Q: デバイスはHDインタフェースなしで動作しますか? A: はい、しかし、HDインタフェースキーボードを使用する必要があります。
--	---	---	---	--