




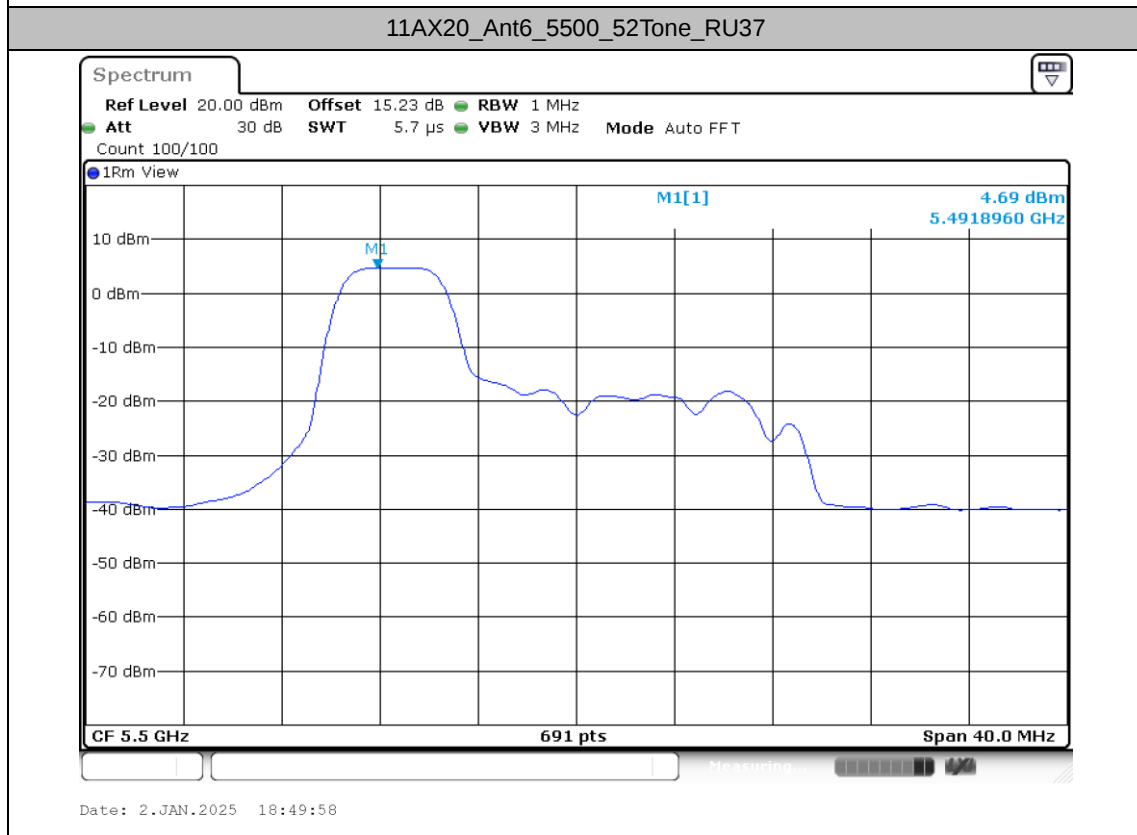
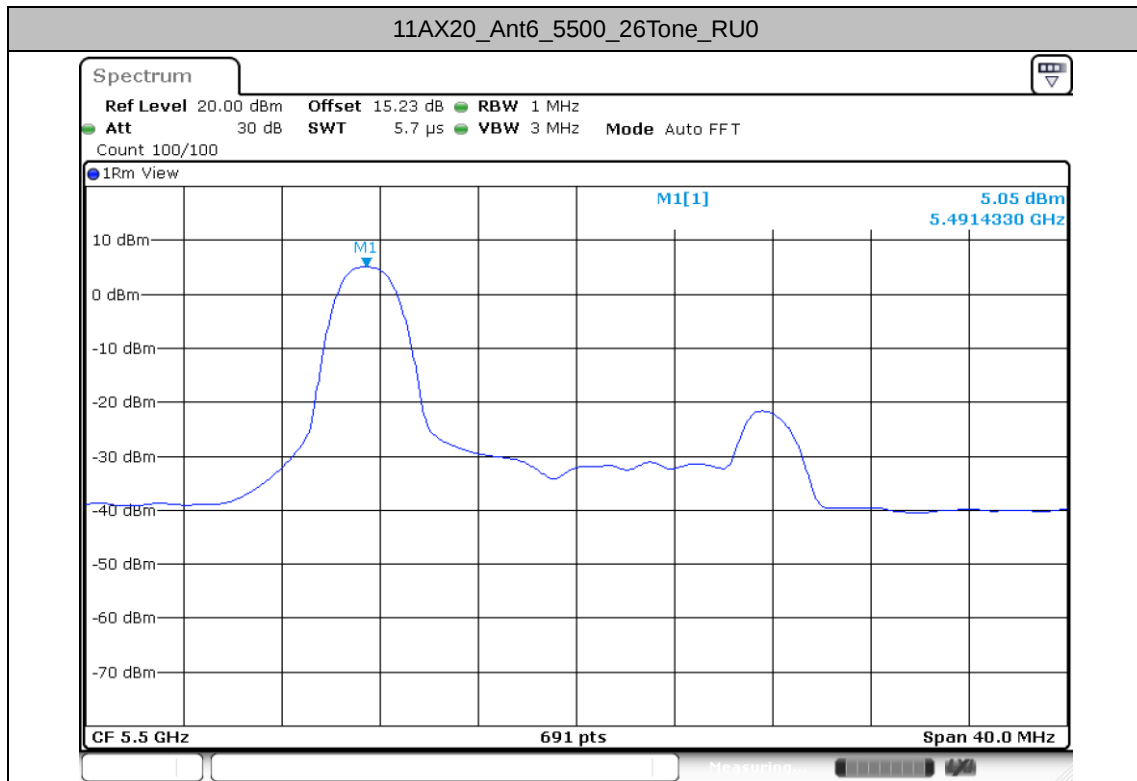
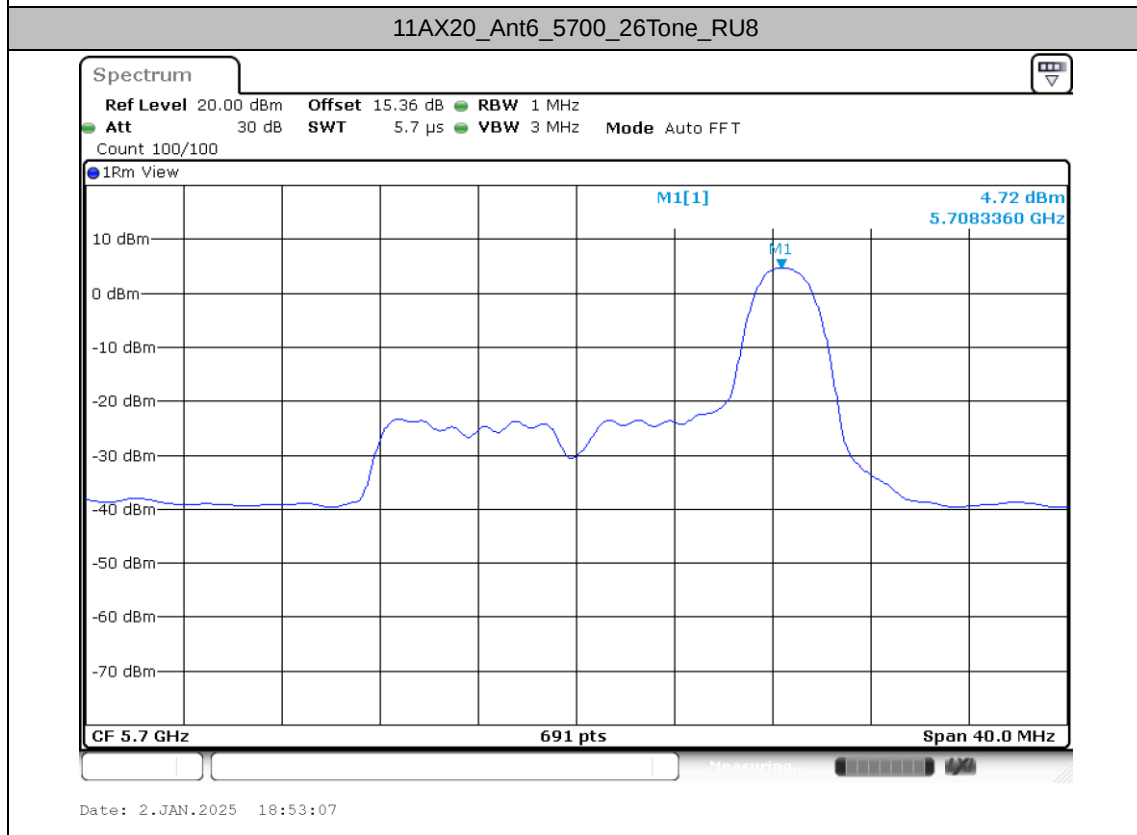
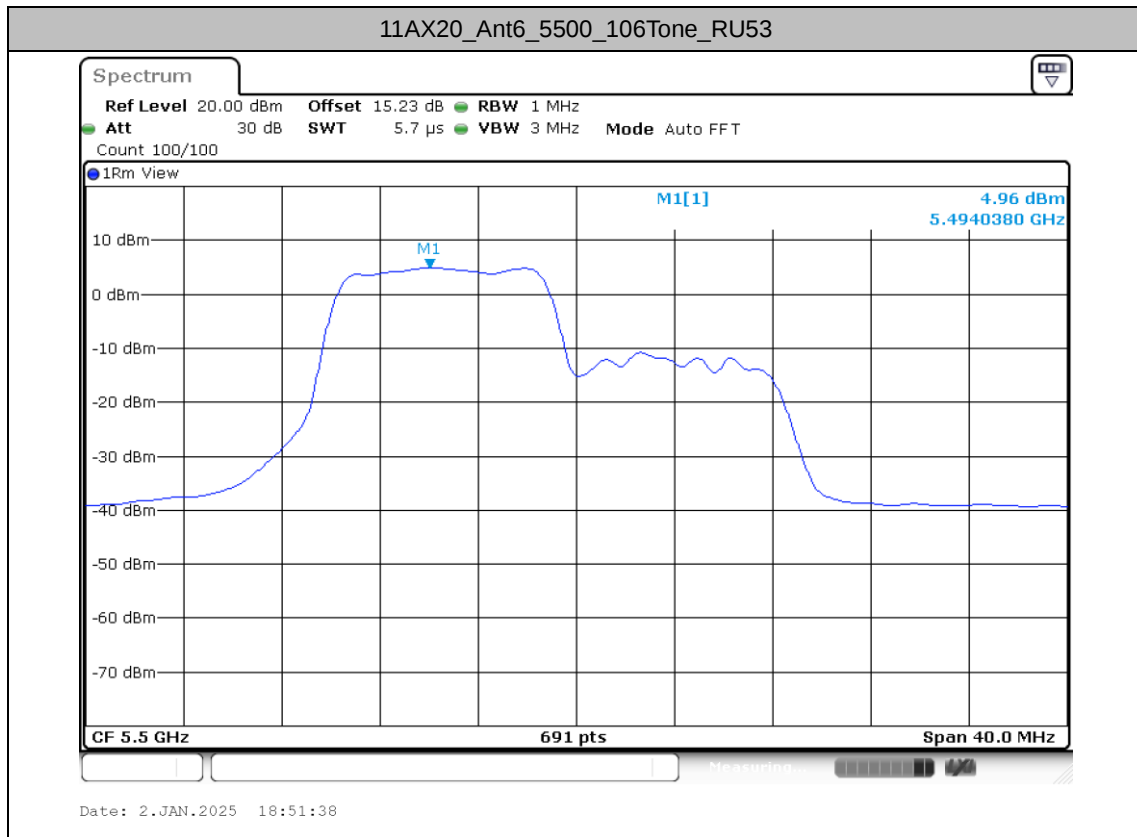
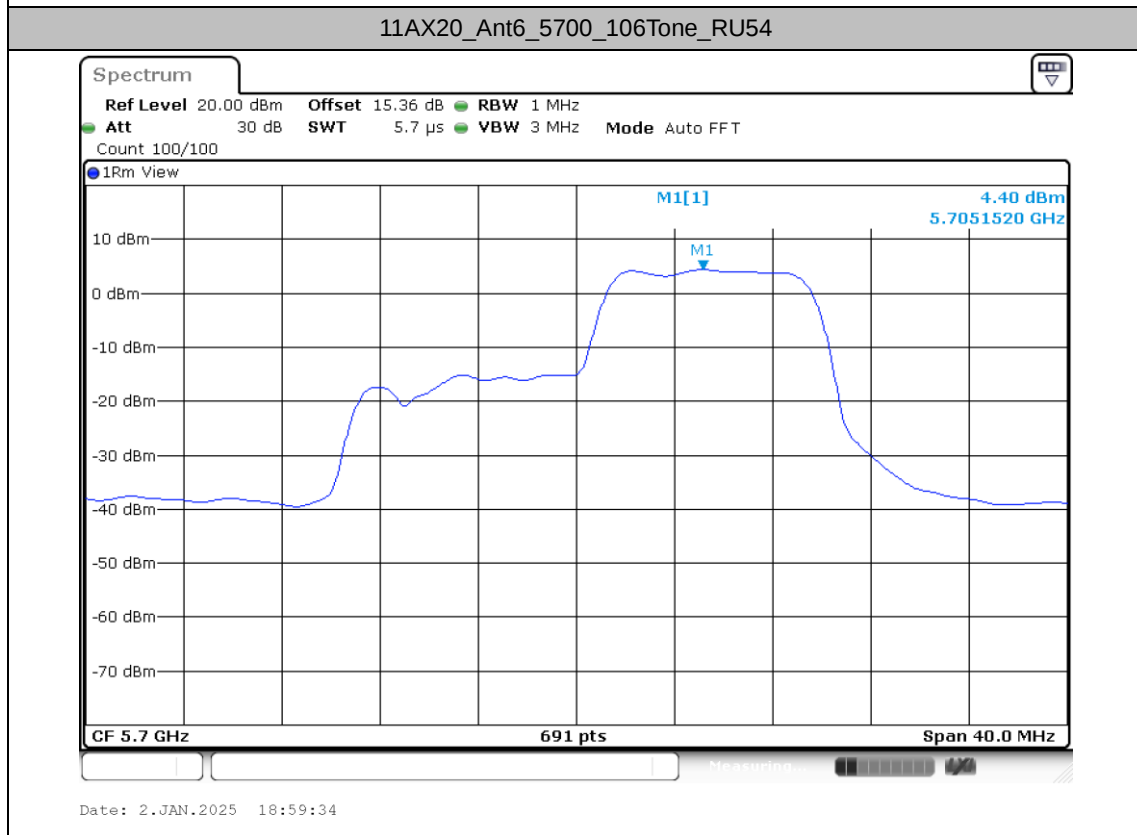


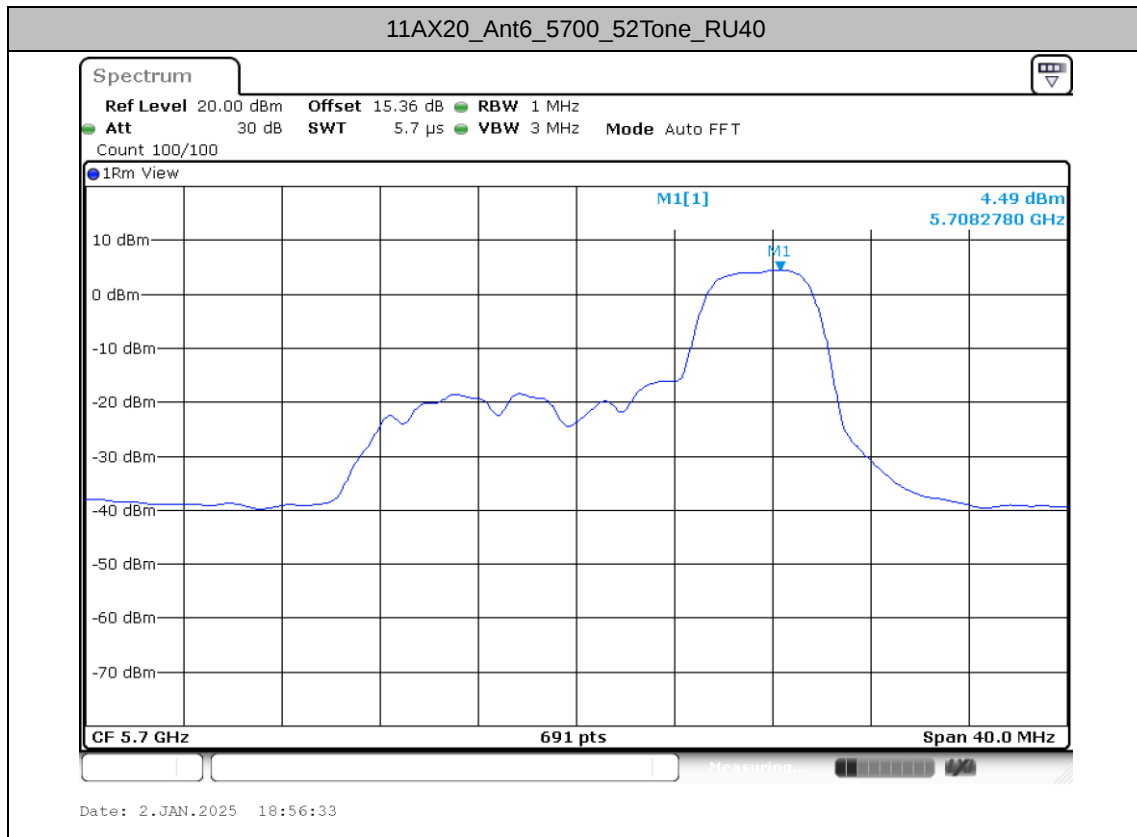


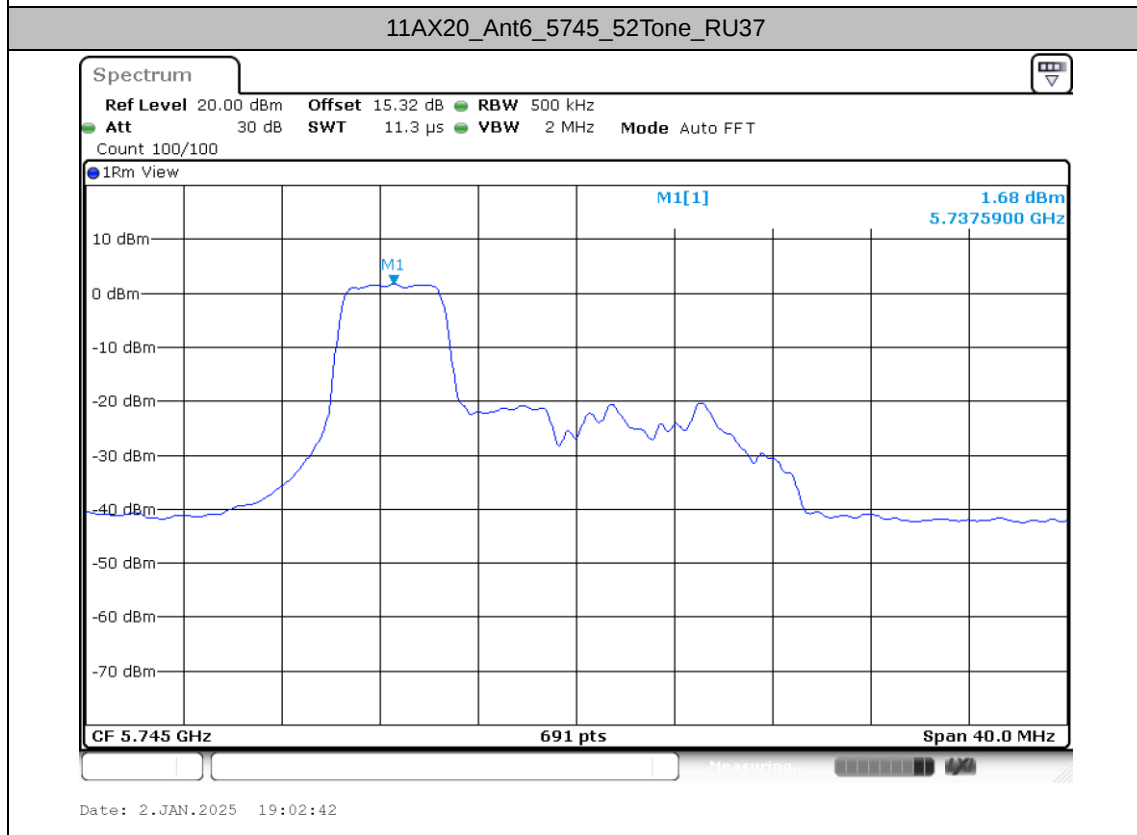

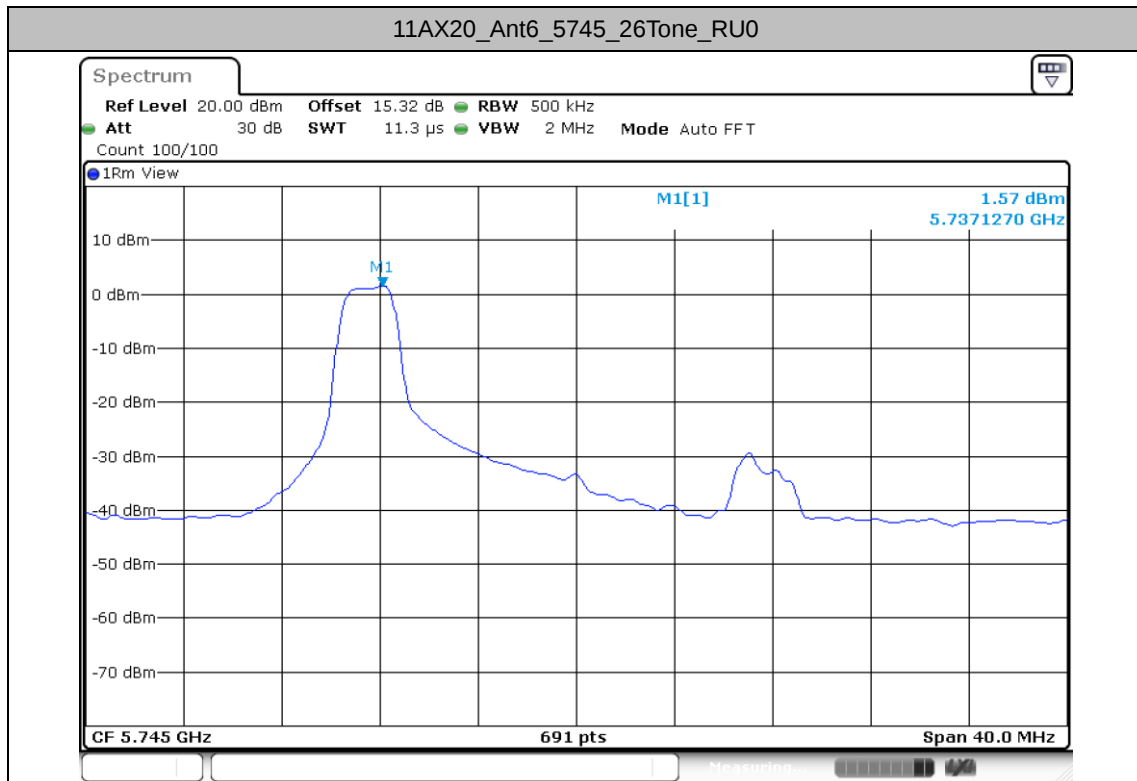

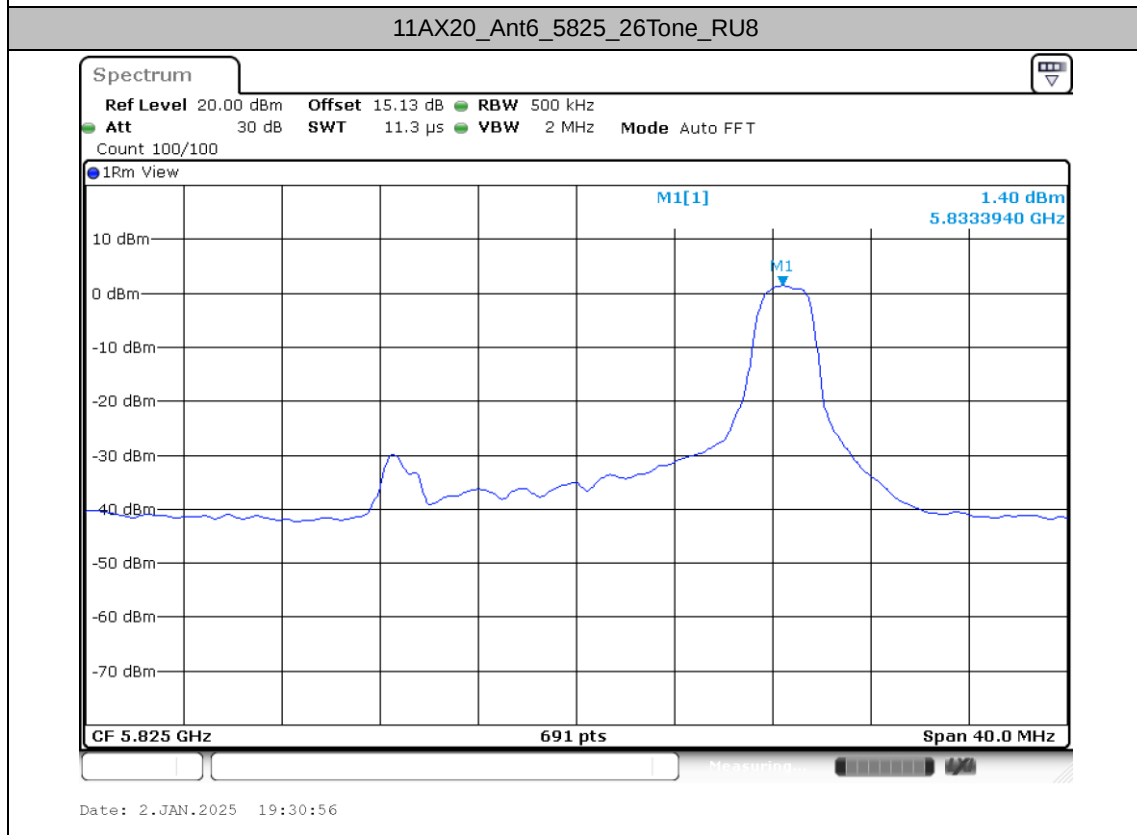


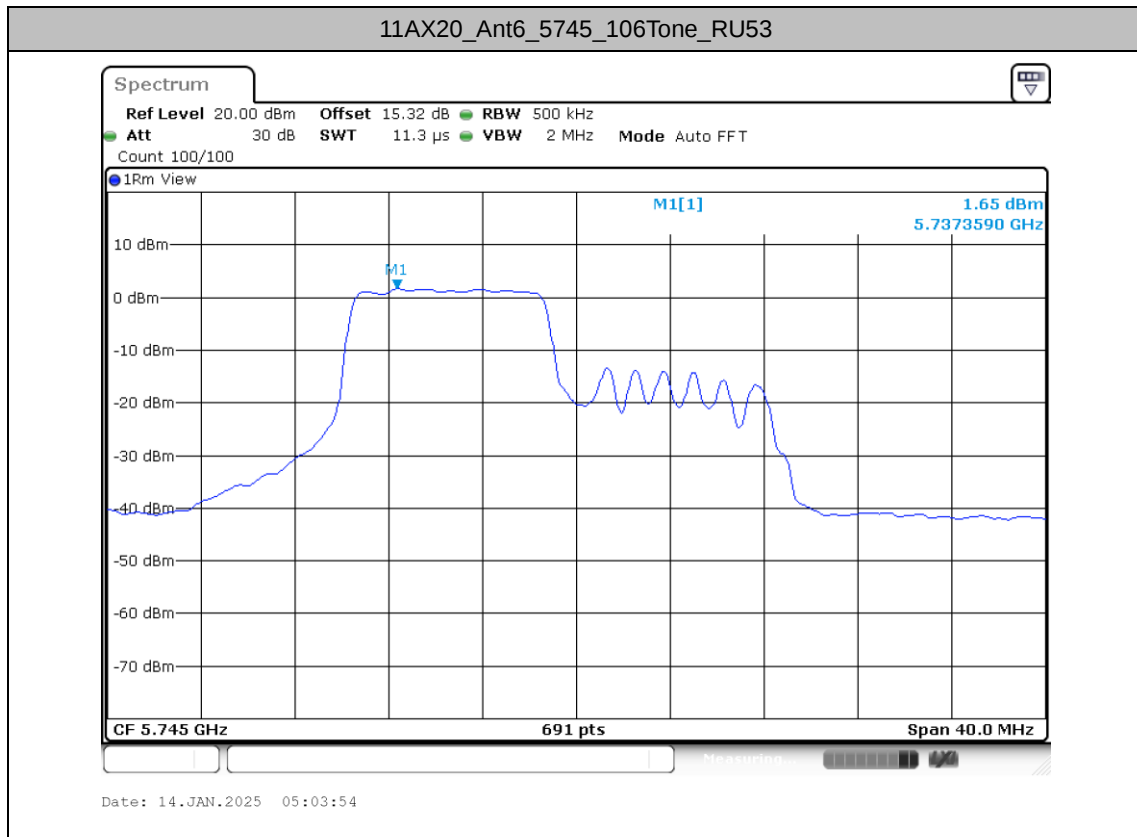

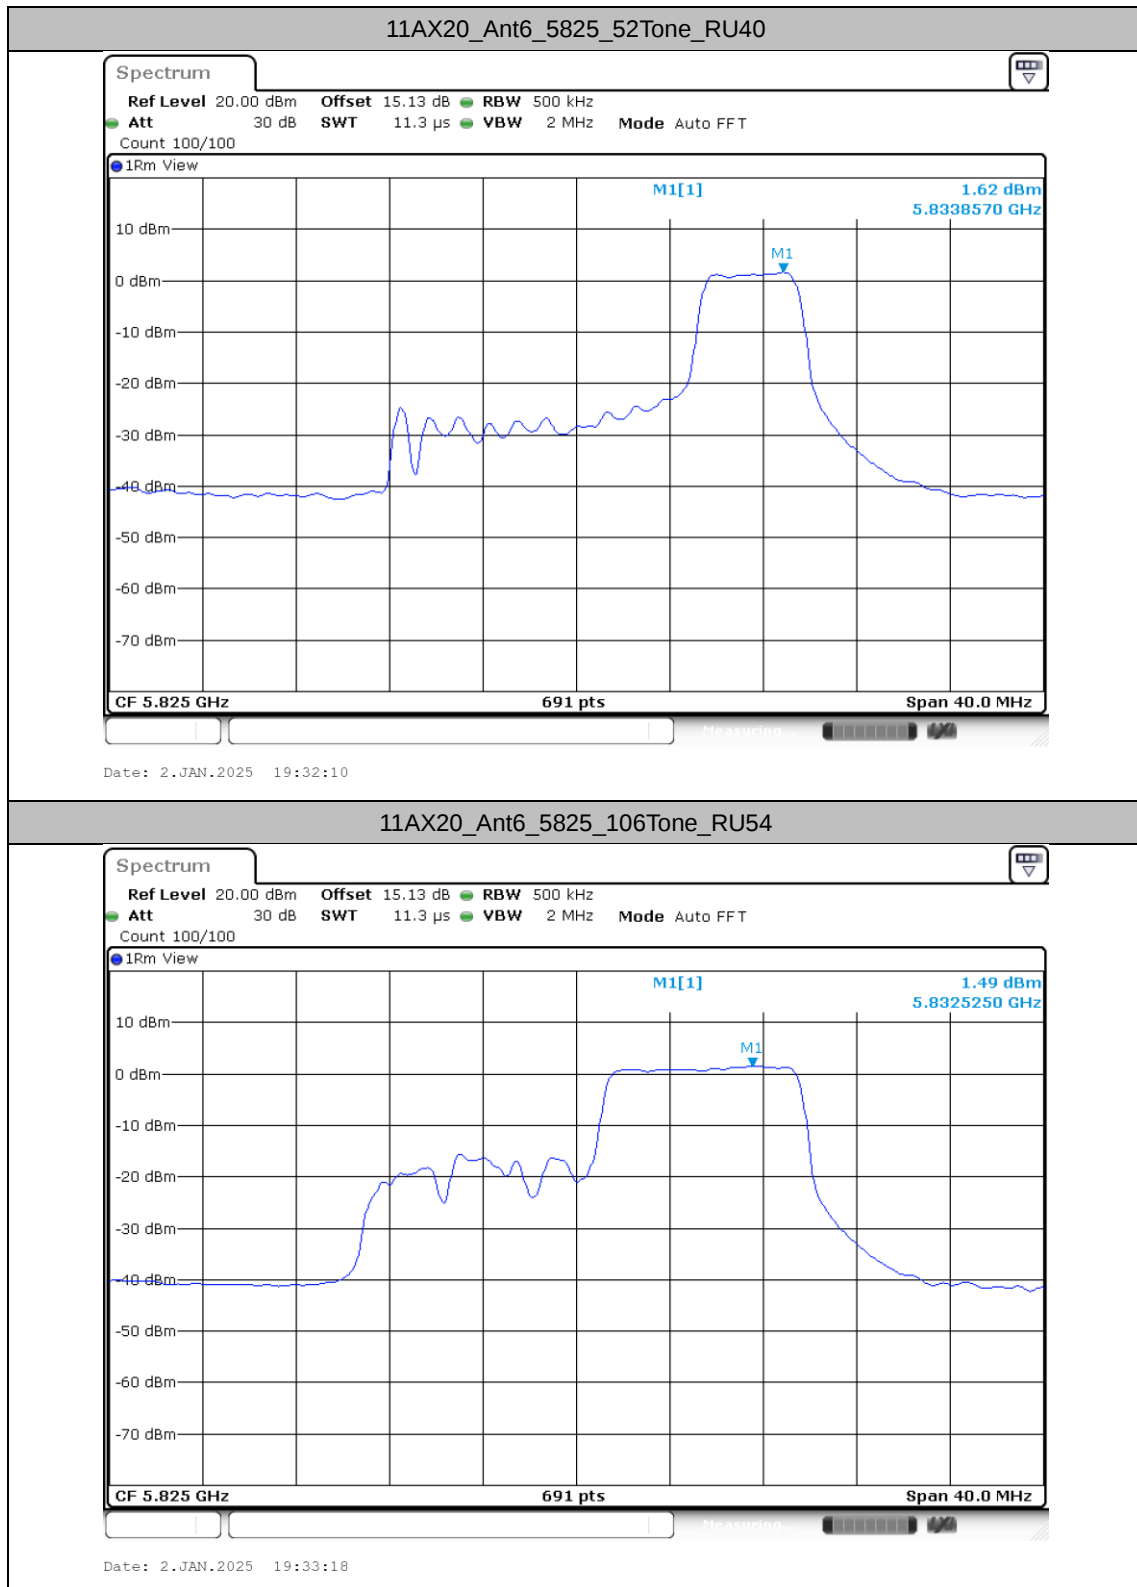




Appendix B. AC Conducted Emission Test Results

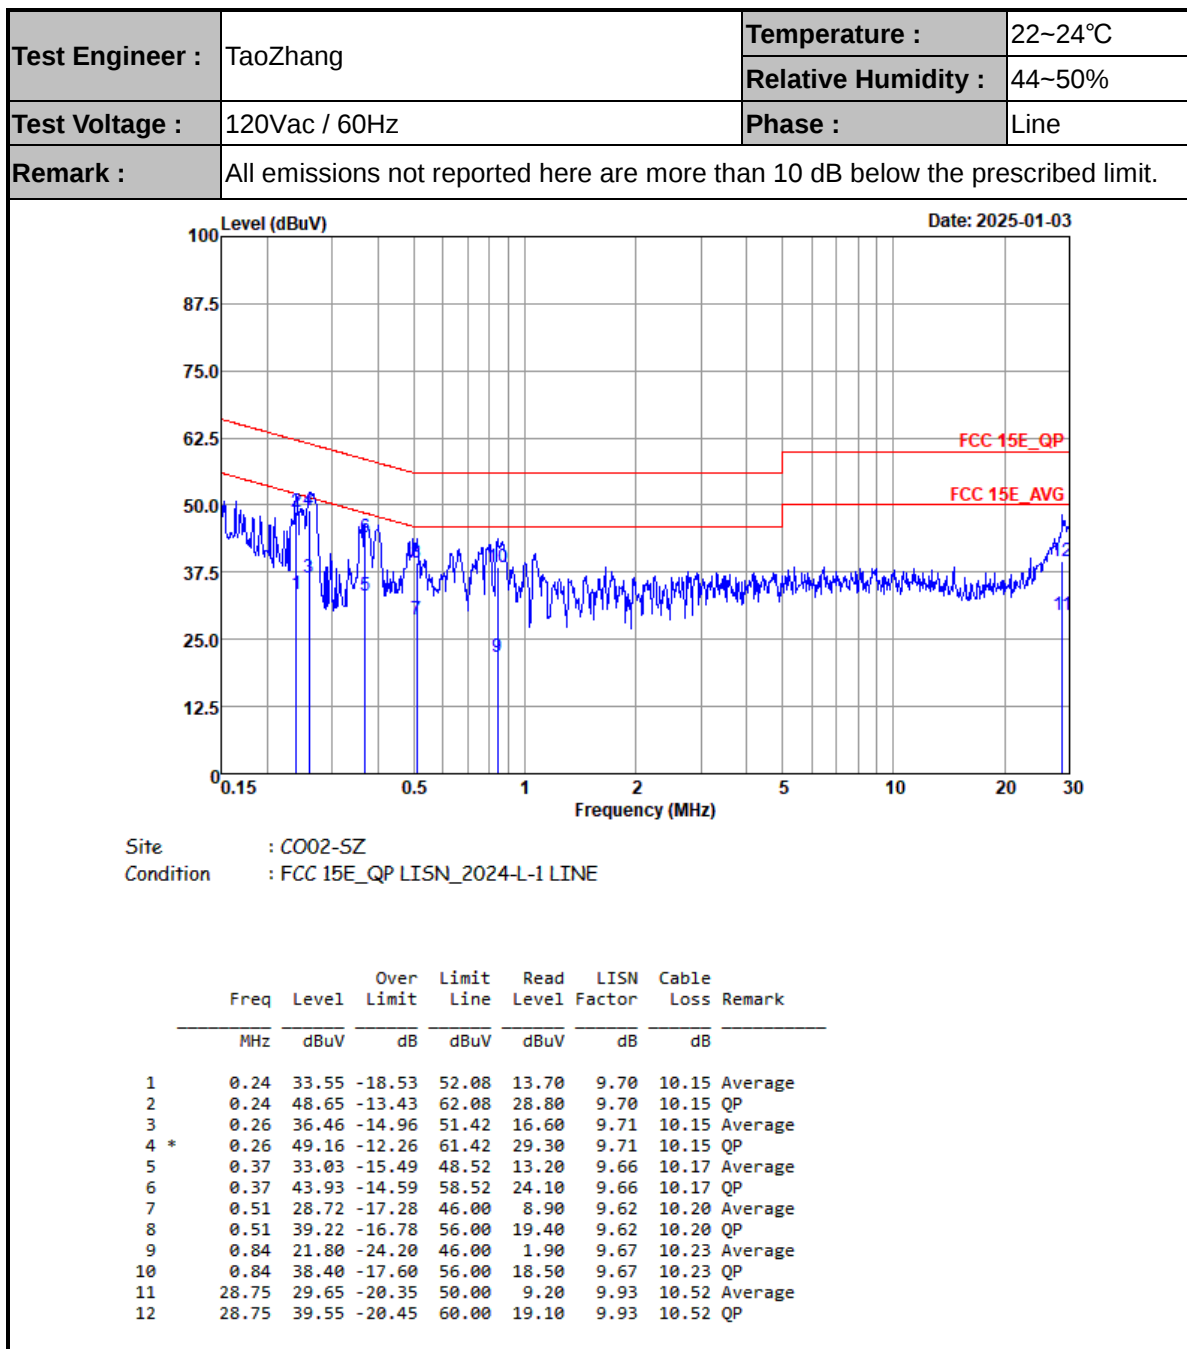



Test Engineer :	TaoZhang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

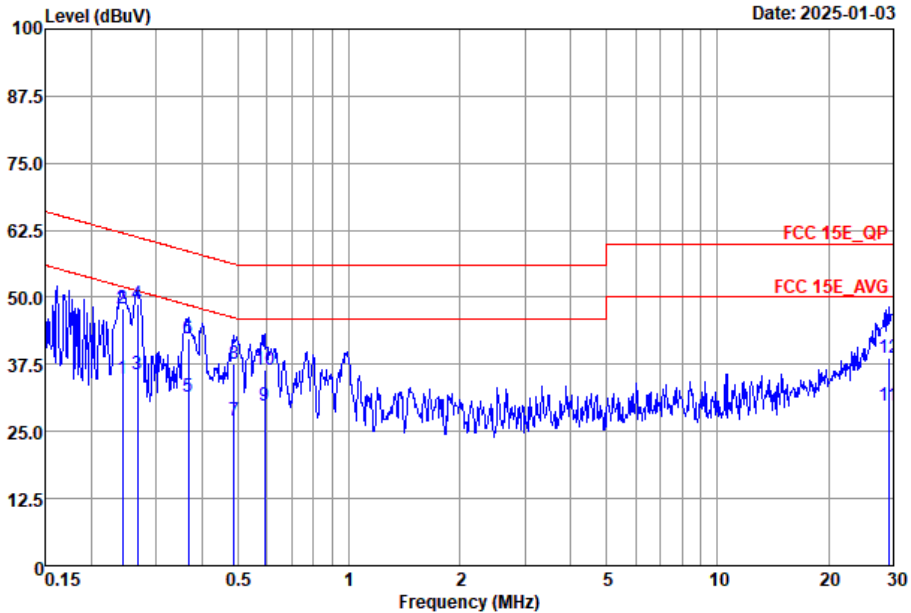

Site : CO02-SZ
Condition : FCC 15E_QP LISN_2024-N-1 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.24	34.93	-17.07	52.00	15.10	9.68	10.15	Average
2	0.24	48.03	-13.97	62.00	28.20	9.68	10.15	QP
3	0.27	35.63	-15.57	51.20	15.80	9.68	10.15	Average
4 *	0.27	48.83	-12.37	61.20	29.00	9.68	10.15	QP
5	0.37	31.46	-17.10	48.56	11.60	9.69	10.17	Average
6	0.37	42.26	-16.30	58.56	22.40	9.69	10.17	QP
7	0.49	26.99	-19.20	46.19	7.10	9.69	10.20	Average
8	0.49	37.69	-18.50	56.19	17.80	9.69	10.20	QP
9	0.59	29.90	-16.10	46.00	9.99	9.69	10.22	Average
10	0.59	36.51	-19.49	56.00	16.60	9.69	10.22	QP
11	29.06	29.88	-20.12	50.00	9.40	9.96	10.52	Average
12	29.06	38.78	-21.22	60.00	18.30	9.96	10.52	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24-25℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	6	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	6	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	6	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	6	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	6	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	6	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	6	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	6	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	6	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	6	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	6	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 12	U-NII-1	5.15-5.25	6	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	6	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	6	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	6	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2C	5.47-5.725	6	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 17	U-NII-2C	5.47-5.725	6	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 18	U-NII-2C	5.47-5.725	6	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 19	U-NII-1	5.15-5.25	6	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 20	U-NII-1	5.15-5.25	6	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 21	U-NII-2A	5.25-5.35	6	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	6	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 23	U-NII-2C	5.47-5.725	6	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	6	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 25	U-NII-1	5.15-5.25	6	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 26	U-NII-2A	5.25-5.35	6	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 27	U-NII-2C	5.47-5.725	6	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 28	U-NII-2C	5.47-5.725	6	802.11ax HE80	122	5610	MCS0	Full RU	-
Mode 29	U-NII-1	5.15-5.25	6	802.11ax HE20	36	5180	MCS0	Partial_RU 106/53	-
Mode 30	U-NII-2A	5.25-5.35	6	802.11ax HE20	64	5320	MCS0	Partial_RU 26/8	-
Mode 31	U-NII-2C	5.47-5.725	6	802.11ax HE20	100	5500	MCS0	Partial_RU 26/0	-
Mode 32	U-NII-2C	5.47-5.725	6	802.11ax HE20	140	5700	MCS0	Partial_RU 26/8	-
Mode 33	U-NII-3	5.725-5.85	6	802.11a	149	5745	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	6	802.11a	157	5785	6Mbps	-	-
Mode 35	U-NII-3	5.725-5.85	6	802.11a	165	5825	6Mbps	-	-



Mode 36	U-NII-3	5.725-5.85	6	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 37	U-NII-3	5.725-5.85	6	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 38	U-NII-3	5.725-5.85	6	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 39	U-NII-3	5.725-5.85	6	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 40	U-NII-3	5.725-5.85	6	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 41	U-NII-3	5.725-5.85	6	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 42	U-NII-3	5.725-5.85	6	802.11ax HE20	149	5745	MCS0	Partial RU 52/37	-
Mode 43	U-NII-3	5.725-5.85	6	802.11ax HE20	165	5825	MCS0	Partial RU 52/40	-
Mode 44	Straddle channels	5.47-5.725	6	802.11ax HE20	144	5720	MCS0	-	-
Mode 45	Straddle channels	5.47-5.725	6	802.11ax HE40	142	5710	MCS0	-	-
Mode 46	Straddle channels	5.47-5.725	6	802.11ax HE80	138	5690	MCS0	-	-
Mode 47	U-NII-1	5.15-5.25	6	802.11ax HE40	38	5190	MCS0	LF	-
Mode 48	U-NII-3	5.725-5.85	6	802.11ax HE80	155	5775	MCS0	LF	-
Mode 49	CO_TX	5.15-5.25	6	802.11ax HE80	42	5210	MCS0	Full RU	-
		-	1	Band 48 Link					-
Mode 50	CO_TX	2400-2483.5	6	Bluetooth-LE_GSFK	38	2478	2Mbps	-	-
		5.15-5.25	6	802.11ax HE80	42	5210	MCS0	Full RU	-
		-	1	Band 48 Link					-
Mode 51	Straddle channels	5.47-5.725	6	802.11a	144	5720	6 Mbps	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.04	42.08	54.00	-11.92	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	47.12	68.30	-21.18	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	46.49	68.30	-21.81	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	46.58	68.30	-21.72	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	47.00	68.30	-21.30	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	47.06	74.00	-26.94	H	Peak	Pass	Harmonic
6	802.11a	64	5350.38	42.92	54.00	-11.08	H	AVERAGE	Pass	Band Edge
6	802.11a	64	15960.00	47.08	74.00	-26.92	V	Peak	Pass	Harmonic
7	802.11a	100	5469.10	61.34	68.30	-6.96	H	PEAK	Pass	Band Edge
7	802.11a	100	16500.00	47.44	68.30	-20.86	V	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	47.23	68.30	-21.07	H	Peak	Pass	Harmonic
9	802.11a	140	5726.39	60.19	68.30	-8.11	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	47.16	68.30	-21.14	H	Peak	Pass	Harmonic
10	802.11ax HE20	36	5149.94	41.71	54.00	-12.29	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	46.51	68.30	-21.79	V	Peak	Pass	Harmonic
11	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	44	10440.00	47.02	68.30	-21.28	H	Peak	Pass	Harmonic
12	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE20	48	10480.00	47.10	68.30	-21.20	V	Peak	Pass	Harmonic
13	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	52	10520.00	46.73	68.30	-21.57	V	Peak	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	15900.00	47.71	74.00	-26.29	H	Peak	Pass	Harmonic
15	802.11ax HE20	64	5350.10	44.86	54.00	-9.14	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	47.54	74.00	-26.46	H	Peak	Pass	Harmonic
16	802.11ax HE20	100	5469.70	61.50	68.30	-6.80	H	PEAK	Pass	Band Edge
16	802.11ax HE20	100	16500.00	47.34	68.30	-20.96	V	Peak	Pass	Harmonic
17	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	116	16740.00	47.97	68.30	-20.33	V	Peak	Pass	Harmonic
18	802.11ax HE20	140	5725.09	61.54	68.30	-6.76	H	PEAK	Pass	Band Edge
18	802.11ax HE20	140	17100.00	47.68	68.30	-20.62	V	Peak	Pass	Harmonic
19	802.11ax HE40	38	5149.72	49.67	54.00	-4.33	H	AVERAGE	Pass	Band Edge
19	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE40	46	5149.96	42.86	54.00	-11.14	H	AVERAGE	Pass	Band Edge
20	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE40	54	5350.75	45.35	54.00	-8.65	H	AVERAGE	Pass	Band Edge
21	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE40	62	5350.80	49.36	54.00	-4.64	H	AVERAGE	Pass	Band Edge



22	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE40	102	5462.48	64.39	68.3	-3.91	H	Peak	Pass	Band Edge
23	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE40	134	5726.43	57.10	68.30	-11.20	V	PEAK	Pass	Band Edge
24	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE80	42	5149.52	50.52	54.00	-3.48	V	AVERAGE	Pass	Band Edge
25	802.11ax HE80	42	10420.00	46.06	68.30	-22.24	H	Peak	Pass	Harmonic
26	802.11ax HE80	58	5354.60	49.81	54.00	-4.19	H	AVERAGE	Pass	Band Edge
26	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE80	106	5458.18	49.15	54	-4.85	H	AVERAGE	Pass	Band Edge
27	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ax HE80	122	5730.75	57.69	68.30	-10.61	V	PEAK	Pass	Band Edge
28	802.11ax HE80	122	-	-	-	-	-	-	-	Harmonic
29	802.11ax HE20	36	5148.68	41.82	54.00	-12.18	H	AVERAGE	Pass	Band Edge
29	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
30	802.11ax HE20	64	5389.30	38.99	54.00	-15.01	H	AVERAGE	Pass	Band Edge
30	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
31	802.11ax HE20	100	5404.60	39.19	54.00	-14.81	H	AVERAGE	Pass	Band Edge
31	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
32	802.11ax HE20	140	5757.33	49.91	68.30	-18.39	H	PEAK	Pass	Band Edge
32	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
33	802.11a	149	5614.07	50.09	68.30	-18.21	H	PEAK	Pass	Band Edge
33	802.11a	149	17235.00	47.83	68.30	-20.47	H	Peak	Pass	Harmonic
34	802.11a	157	-	-	-	-	-	-	-	Band Edge
34	802.11a	157	17355.00	47.46	68.30	-20.84	V	Peak	Pass	Harmonic
35	802.11a	165	5928.38	50.93	68.30	-17.37	H	PEAK	Pass	Band Edge
35	802.11a	165	17475.00	47.13	68.30	-21.17	V	Peak	Pass	Harmonic
36	802.11ax HE20	149	5644.66	51.76	68.30	-16.54	H	PEAK	Pass	Band Edge
36	802.11ax HE20	149	17235.00	46.68	68.30	-21.62	V	Peak	Pass	Harmonic
37	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
37	802.11ax HE20	157	17355.00	47.36	68.30	-20.94	V	Peak	Pass	Harmonic
38	802.11ax HE20	165	5930.38	50.80	68.30	-17.50	H	PEAK	Pass	Band Edge
38	802.11ax HE20	165	17475.00	48.13	68.30	-20.17	V	Peak	Pass	Harmonic
39	802.11ax HE40	151	5606.51	49.97	68.30	-18.33	H	PEAK	Pass	Band Edge
39	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE40	159	5925.82	51.49	68.30	-16.81	H	PEAK	Pass	Band Edge
40	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic
41	802.11ax HE80	155	5925.85	52.68	68.30	-15.62	V	PEAK	Pass	Band Edge
41	802.11ax HE80	155	17325.00	47.45	68.30	-20.85	H	Peak	Pass	Harmonic
42	802.11ax HE20	149	5629.00	49.66	68.30	-18.64	H	PEAK	Pass	Band Edge
42	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
43	802.11ax HE20	165	5933.63	49.97	68.30	-18.33	H	PEAK	Pass	Band Edge
43	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE20	144	5396.75	38.64	54.00	-15.36	H	Peak	Pass	Band Edge
44	802.11ax HE20	144	17160.00	48.69	68.30	-19.61	H	Peak	Pass	Harmonic



45	802.11ax HE40	142	5395.10	38.54	54.00	-15.46	H	Peak	Pass	Band Edge
45	802.11ax HE40	142	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE80	138	5385.20	40.66	54.00	-13.34	V	Peak	Pass	Band Edge
46	802.11ax HE80	138	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE40	38	30.00	24.84	40.00	-15.16	V	Peak	Pass	LF
48	802.11ax HE80	155	33.88	23.98	40.00	-16.02	V	Peak	Pass	LF
49	CO_TX	-	5148.46	50.27	54.00	-3.73	H	Average	Pass	Band Edge
49	CO_TX	-	10420.00	47.41	68.30	-20.89	V	Peak	Pass	Harmonic
50	CO_TX	-	5150.00	50.89	54.00	-4.11	H	Average	Pass	Band Edge
50	CO_TX	-	15630.00	47.93	74.00	-26.07	H	Peak	Pass	Harmonic
51	802.11a	144	5405.55	38.74	54.00	-15.26	H	Average	Pass	Band Edge
51	802.11a	144	17160.00	46.94	68.30	-21.36	H	Peak	Pass	Harmonic



Mode	1																																																																																							
	Band Edge																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																							
ANT	6																																																																																							
Pol.	Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.32</td><td>50.60</td><td>74.00</td><td>-23.40</td><td>41.43</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>360 PEAK</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.32	50.60	74.00	-23.40	41.43	33.99	7.92	32.74	300	360 PEAK	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.18</td><td>-----</td><td>-----</td><td>91.96</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>360 PEAK</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.18	-----	-----	91.96	34.01	7.94	32.73	300	360 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5148.32	50.60	74.00	-23.40	41.43	33.99	7.92	32.74	300	360 PEAK																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5180.00	101.18	-----	-----	91.96	34.01	7.94	32.73	300	360 PEAK																																																																														
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>41.32</td><td>54.00</td><td>-12.68</td><td>32.15</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>360 AVERAGE</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	41.32	54.00	-12.68	32.15	33.99	7.92	32.74	300	360 AVERAGE	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.02</td><td>-----</td><td>-----</td><td>85.80</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>360 AVERAGE</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.02	-----	-----	85.80	34.01	7.94	32.73	300	360 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5149.76	41.32	54.00	-12.68	32.15	33.99	7.92	32.74	300	360 AVERAGE																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																															
1	5180.00	95.02	-----	-----	85.80	34.01	7.94	32.73	300	360 AVERAGE																																																																														





		1																																																																		
Mode		Band Edge																																																																		
		U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																		
ANT		6																																																																		
Pol.		Vertical					Fundamental																																																													
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.06</td><td>50.82</td><td>74.00</td><td>-23.18</td><td>41.67</td><td>33.98</td><td>7.91</td><td>32.74</td><td>286</td><td>238 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.71</td><td>-----</td><td>-----</td><td>92.49</td><td>34.01</td><td>7.94</td><td>32.73</td><td>286</td><td>238 PEAK</td></tr></table>										Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5138.06	50.82	74.00	-23.18	41.67	33.98	7.91	32.74	286	238 PEAK	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5180.00	101.71	-----	-----	92.49	34.01	7.94	32.73	286	238 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																											
1	5138.06	50.82	74.00	-23.18	41.67	33.98	7.91	32.74	286	238 PEAK																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																											
1	5180.00	101.71	-----	-----	92.49	34.01	7.94	32.73	286	238 PEAK																																																										
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.04</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>32.91</td><td>33.99</td><td>7.92</td><td>32.74</td><td>286</td><td>238 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.68</td><td>-----</td><td>-----</td><td>86.46</td><td>34.01</td><td>7.94</td><td>32.73</td><td>286</td><td>238 AVERAGE</td></tr></table>										Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5149.04	42.08	54.00	-11.92	32.91	33.99	7.92	32.74	286	238 AVERAGE	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	5180.00	95.68	-----	-----	86.46	34.01	7.94	32.73	286	238 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																											
1	5149.04	42.08	54.00	-11.92	32.91	33.99	7.92	32.74	286	238 AVERAGE																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																											
1	5180.00	95.68	-----	-----	86.46	34.01	7.94	32.73	286	238 AVERAGE																																																										





Mode	1																																																																																																							
	Harmonic																																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz) <table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.57</td><td>68.30</td><td>-21.73</td><td>63.27</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>58.15</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>Peak</td></tr></table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.57	68.30	-21.73	63.27	37.16	10.73	64.59	--	Peak	2	15540.00	46.91	74.00	-27.09	58.15	39.42	12.72	63.38	--	Peak	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz) <table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.12</td><td>68.30</td><td>-21.18</td><td>63.82</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>58.52</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>Peak</td></tr></table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.12	68.30	-21.18	63.82	37.16	10.73	64.59	--	Peak	2	15540.00	47.28	74.00	-26.72	58.52	39.42	12.72	63.38	--	Peak
			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	10360.00	46.57	68.30	-21.73	63.27	37.16	10.73	64.59	--	Peak																																																																																														
2	15540.00	46.91	74.00	-27.09	58.15	39.42	12.72	63.38	--	Peak																																																																																														
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	10360.00	47.12	68.30	-21.18	63.82	37.16	10.73	64.59	--	Peak																																																																																														
2	15540.00	47.28	74.00	-26.72	58.52	39.42	12.72	63.38	--	Peak																																																																																														

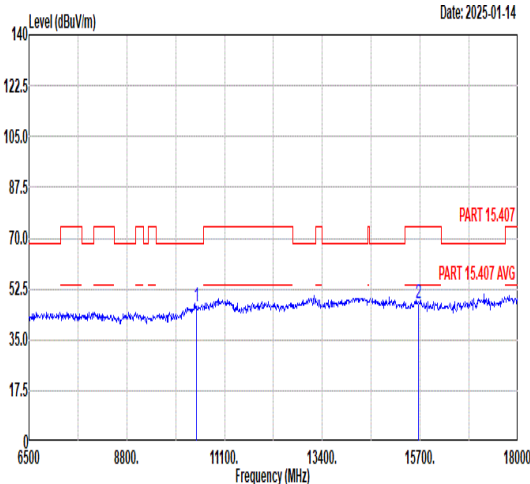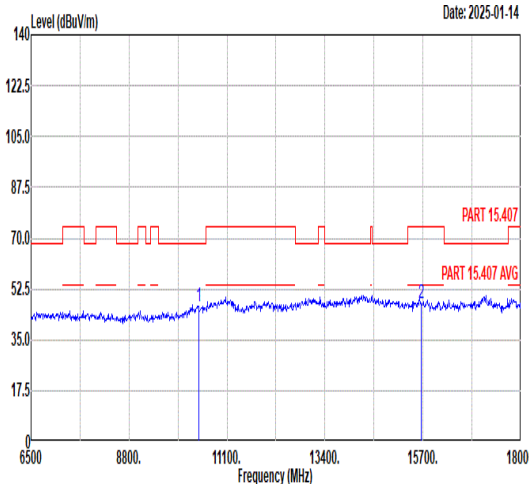

Mode	2																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td></tr><tr><td>1</td><td>10440.00</td><td>46.40</td><td>68.30</td><td>-21.90</td><td>63.02</td><td>37.35</td><td>10.79</td><td>64.76</td></tr><tr><td>2</td><td>15660.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>58.77</td><td>39.46</td><td>12.72</td><td>63.62</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	46.40	68.30	-21.90	63.02	37.35	10.79	64.76	2	15660.00	47.33	74.00	-26.67	58.77	39.46	12.72	63.62	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td></tr><tr><td>1</td><td>10440.00</td><td>46.49</td><td>68.30</td><td>-21.81</td><td>63.11</td><td>37.35</td><td>10.79</td><td>64.76</td></tr><tr><td>2</td><td>15660.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>58.99</td><td>39.46</td><td>12.72</td><td>63.62</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	46.49	68.30	-21.81	63.11	37.35	10.79	64.76	2	15660.00	47.55	74.00	-26.45	58.99	39.46	12.72	63.62
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	10440.00	46.40	68.30	-21.90	63.02	37.35	10.79	64.76																																																																																														
2	15660.00	47.33	74.00	-26.67	58.77	39.46	12.72	63.62																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	10440.00	46.49	68.30	-21.81	63.11	37.35	10.79	64.76																																																																																														
2	15660.00	47.55	74.00	-26.45	58.99	39.46	12.72	63.62																																																																																														
<table><tbody><tr><td>1</td><td>10440.00</td><td>46.40</td><td>68.30</td><td>-21.90</td><td>63.02</td><td>37.35</td><td>10.79</td><td>64.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>58.77</td><td>39.46</td><td>12.72</td><td>63.62</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						1	10440.00	46.40	68.30	-21.90	63.02	37.35	10.79	64.76	--	--	Peak	2	15660.00	47.33	74.00	-26.67	58.77	39.46	12.72	63.62	--	--	Peak	<table><tbody><tr><td>1</td><td>10440.00</td><td>46.49</td><td>68.30</td><td>-21.81</td><td>63.11</td><td>37.35</td><td>10.79</td><td>64.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.55</td><td>74.00</td><td>-26.45</td><td>58.99</td><td>39.46</td><td>12.72</td><td>63.62</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>						1	10440.00	46.49	68.30	-21.81	63.11	37.35	10.79	64.76	--	--	Peak	2	15660.00	47.55	74.00	-26.45	58.99	39.46	12.72	63.62	--	--	Peak																																											
1	10440.00	46.40	68.30	-21.90	63.02	37.35	10.79	64.76	--	--	Peak																																																																																											
2	15660.00	47.33	74.00	-26.67	58.77	39.46	12.72	63.62	--	--	Peak																																																																																											
1	10440.00	46.49	68.30	-21.81	63.11	37.35	10.79	64.76	--	--	Peak																																																																																											
2	15660.00	47.55	74.00	-26.45	58.99	39.46	12.72	63.62	--	--	Peak																																																																																											

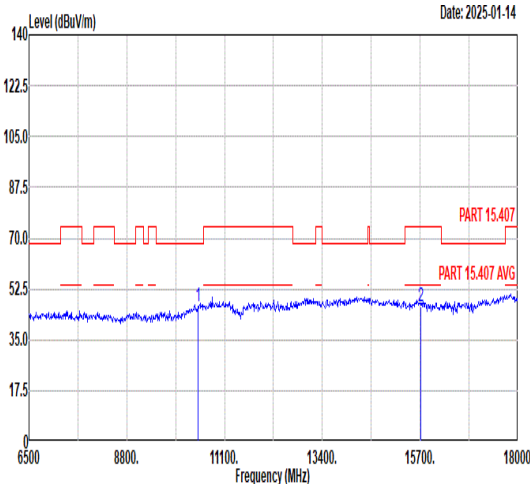
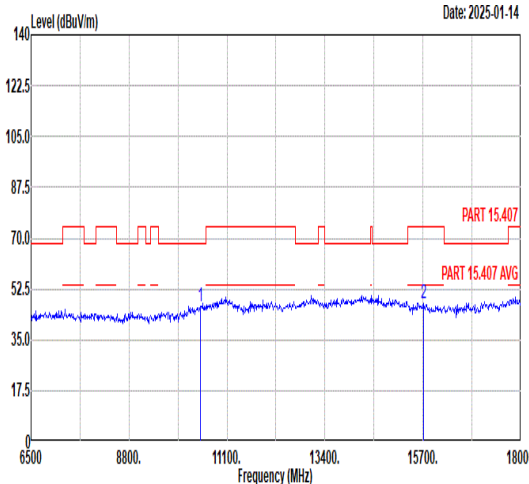


Mode	3																																																																																										
	Harmonic																																																																																										
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																										
ANT	6																																																																																										
Pol.	Horizontal						Vertical																																																																																				
Peak Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 10480.00</td><td>46.32</td><td>68.30</td><td>-21.98</td><td>62.90</td><td>37.45</td><td>10.82</td><td>64.85</td></tr><tr><td>2 15720.00</td><td>46.67</td><td>74.00</td><td>-27.33</td><td>58.21</td><td>39.49</td><td>12.71</td><td>63.74</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10480.00	46.32	68.30	-21.98	62.90	37.45	10.82	64.85	2 15720.00	46.67	74.00	-27.33	58.21	39.49	12.71	63.74	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 10480.00</td><td>46.58</td><td>68.30</td><td>-21.72</td><td>63.16</td><td>37.45</td><td>10.82</td><td>64.85</td></tr><tr><td>2 15720.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>59.31</td><td>39.49</td><td>12.71</td><td>63.74</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10480.00	46.58	68.30	-21.72	63.16	37.45	10.82	64.85	2 15720.00	47.77	74.00	-26.23	59.31	39.49	12.71	63.74
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1 10480.00	46.32	68.30	-21.98	62.90	37.45	10.82	64.85																																																																																				
2 15720.00	46.67	74.00	-27.33	58.21	39.49	12.71	63.74																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1 10480.00	46.58	68.30	-21.72	63.16	37.45	10.82	64.85																																																																																				
2 15720.00	47.77	74.00	-26.23	59.31	39.49	12.71	63.74																																																																																				
<table><thead><tr><th></th><th>Remark</th></tr></thead><tbody><tr><td>--</td><td>-- Peak</td></tr><tr><td>--</td><td>-- Peak</td></tr></tbody></table>							Remark	--	-- Peak	--	-- Peak	<table><thead><tr><th></th><th>Remark</th></tr></thead><tbody><tr><td>--</td><td>-- Peak</td></tr><tr><td>--</td><td>-- Peak</td></tr></tbody></table>						Remark	--	-- Peak	--	-- Peak																																																																					
	Remark																																																																																										
--	-- Peak																																																																																										
--	-- Peak																																																																																										
	Remark																																																																																										
--	-- Peak																																																																																										
--	-- Peak																																																																																										







Mode	4																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																															
ANT	6																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)								Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10520.00</td><td>46.71</td><td>68.30</td><td>-21.59</td><td>63.17</td><td>37.53</td><td>10.85</td></tr><tr><td>2</td><td>15780.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>59.39</td><td>39.51</td><td>12.71</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	10520.00	46.71	68.30	-21.59	63.17	37.53	10.85	2	15780.00	47.74	74.00	-26.26	59.39	39.51	12.71	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10520.00</td><td>47.00</td><td>68.30</td><td>-21.30</td><td>63.46</td><td>37.53</td><td>10.85</td></tr><tr><td>2</td><td>15780.00</td><td>47.38</td><td>74.00</td><td>-26.62</td><td>59.03</td><td>39.51</td><td>12.71</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	10520.00	47.00	68.30	-21.30	63.46	37.53	10.85	2	15780.00	47.38	74.00	-26.62	59.03	39.51	12.71
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	10520.00	46.71	68.30	-21.59	63.17	37.53	10.85																																																																																									
2	15780.00	47.74	74.00	-26.26	59.39	39.51	12.71																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	10520.00	47.00	68.30	-21.30	63.46	37.53	10.85																																																																																									
2	15780.00	47.38	74.00	-26.62	59.03	39.51	12.71																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10520.00</td><td>46.71</td><td>68.30</td><td>-21.59</td><td>63.17</td><td>37.53</td><td>10.85</td></tr><tr><td>2</td><td>15780.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>59.39</td><td>39.51</td><td>12.71</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	10520.00	46.71	68.30	-21.59	63.17	37.53	10.85	2	15780.00	47.74	74.00	-26.26	59.39	39.51	12.71	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10520.00</td><td>47.00</td><td>68.30</td><td>-21.30</td><td>63.46</td><td>37.53</td><td>10.85</td></tr><tr><td>2</td><td>15780.00</td><td>47.38</td><td>74.00</td><td>-26.62</td><td>59.03</td><td>39.51</td><td>12.71</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	10520.00	47.00	68.30	-21.30	63.46	37.53	10.85	2	15780.00	47.38	74.00	-26.62	59.03	39.51	12.71	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	10520.00	46.71	68.30	-21.59	63.17	37.53	10.85																																																																																									
2	15780.00	47.74	74.00	-26.26	59.39	39.51	12.71																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	10520.00	47.00	68.30	-21.30	63.46	37.53	10.85																																																																																									
2	15780.00	47.38	74.00	-26.62	59.03	39.51	12.71																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10520.00</td><td>46.71</td><td>68.30</td><td>-21.59</td><td>63.17</td><td>37.53</td><td>10.85</td></tr><tr><td>2</td><td>15780.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>59.39</td><td>39.51</td><td>12.71</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	10520.00	46.71	68.30	-21.59	63.17	37.53	10.85	2	15780.00	47.74	74.00	-26.26	59.39	39.51	12.71	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10520.00</td><td>47.00</td><td>68.30</td><td>-21.30</td><td>63.46</td><td>37.53</td><td>10.85</td></tr><tr><td>2</td><td>15780.00</td><td>47.38</td><td>74.00</td><td>-26.62</td><td>59.03</td><td>39.51</td><td>12.71</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	1	10520.00	47.00	68.30	-21.30	63.46	37.53	10.85	2	15780.00	47.38	74.00	-26.62	59.03	39.51	12.71	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	10520.00	46.71	68.30	-21.59	63.17	37.53	10.85																																																																																									
2	15780.00	47.74	74.00	-26.26	59.39	39.51	12.71																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																																									
1	10520.00	47.00	68.30	-21.30	63.46	37.53	10.85																																																																																									
2	15780.00	47.38	74.00	-26.62	59.03	39.51	12.71																																																																																									

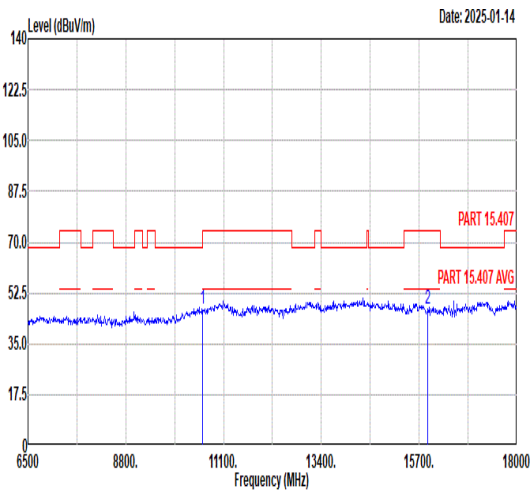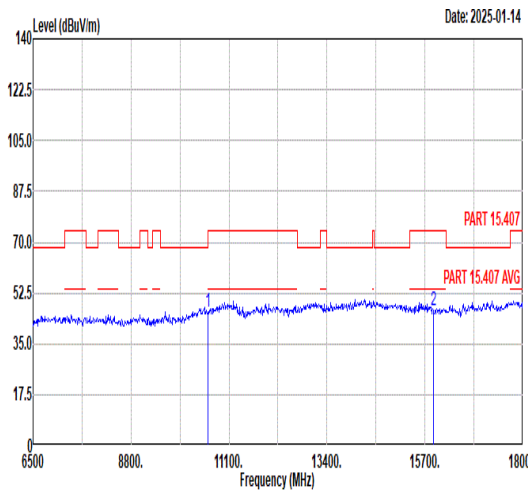

Mode	5																																																																					
	Harmonic																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																					
ANT	6																																																																					
Pol.	Horizontal																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-01-14  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>63.02</td><td>37.70</td><td>10.91</td><td>64.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>46.97</td><td>74.00</td><td>-27.03</td><td>58.81</td><td>39.56</td><td>12.71</td><td>64.11</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	47.06	74.00	-26.94	63.02	37.70	10.91	64.57	--	--	Peak	2	15900.00	46.97	74.00	-27.03	58.81	39.56	12.71	64.11	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	10600.00	47.06	74.00	-26.94	63.02	37.70	10.91	64.57	--	--	Peak																																																											
2	15900.00	46.97	74.00	-27.03	58.81	39.56	12.71	64.11	--	--	Peak																																																											
Level (dBuV/m) Date: 2025-01-14  <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>45.76</td><td>74.00</td><td>-28.24</td><td>61.72</td><td>37.70</td><td>10.91</td><td>64.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>46.32</td><td>74.00</td><td>-27.68</td><td>58.16</td><td>39.56</td><td>12.71</td><td>64.11</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	45.76	74.00	-28.24	61.72	37.70	10.91	64.57	--	--	Peak	2	15900.00	46.32	74.00	-27.68	58.16	39.56	12.71	64.11	--	--	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	10600.00	45.76	74.00	-28.24	61.72	37.70	10.91	64.57	--	--	Peak																																																											
2	15900.00	46.32	74.00	-27.68	58.16	39.56	12.71	64.11	--	--	Peak																																																											

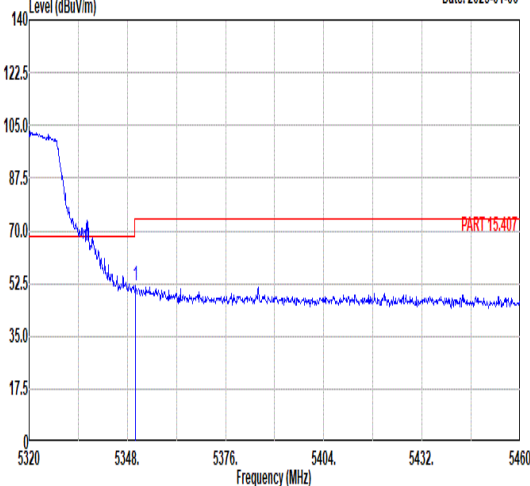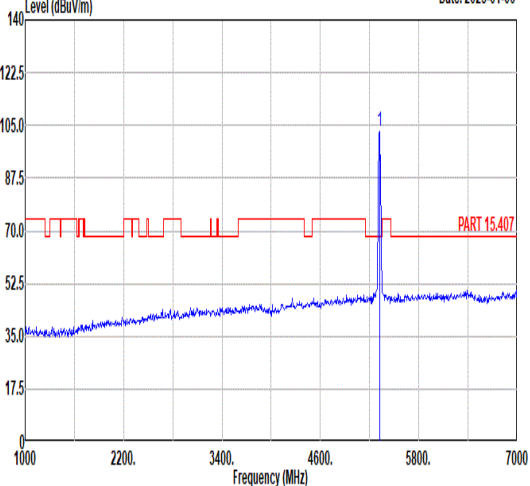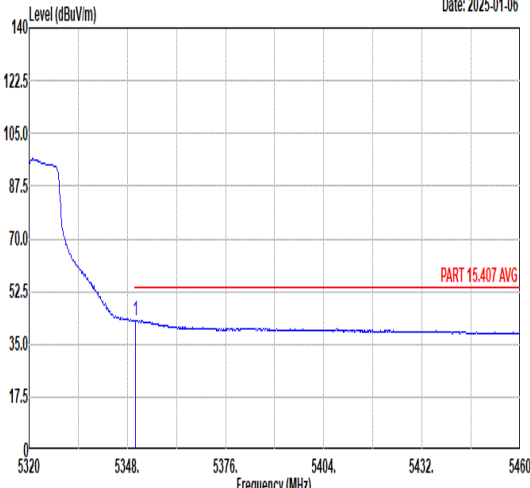
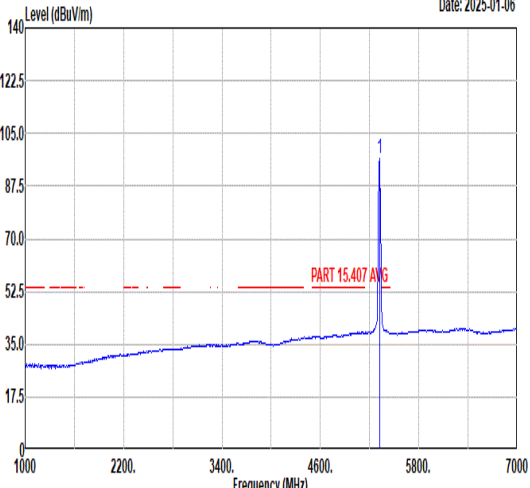


Mode	6																																																																																											
	Band Edge																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.38</td><td>51.84</td><td>74.00</td><td>-22.16</td><td>42.06</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>46</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.38	51.84	74.00	-22.16	42.06	34.11	8.33	32.66	100	46	PEAK	Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>102.78</td><td>-----</td><td>-----</td><td>93.11</td><td>34.09</td><td>8.25</td><td>32.67</td><td>100</td><td>46</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	102.78	-----	-----	93.11	34.09	8.25	32.67	100	46	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.38	51.84	74.00	-22.16	42.06	34.11	8.33	32.66	100	46	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	102.78	-----	-----	93.11	34.09	8.25	32.67	100	46	PEAK																																																																																	
Avg	Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.38</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>33.14</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>46</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.38	42.92	54.00	-11.08	33.14	34.11	8.33	32.66	100	46	AVERAGE	Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>96.43</td><td>-----</td><td>-----</td><td>86.76</td><td>34.09</td><td>8.25</td><td>32.67</td><td>100</td><td>46</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	96.43	-----	-----	86.76	34.09	8.25	32.67	100	46	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.38	42.92	54.00	-11.08	33.14	34.11	8.33	32.66	100	46	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	96.43	-----	-----	86.76	34.09	8.25	32.67	100	46	AVERAGE																																																																																	







		6																																																																																																				
Mode		Band Edge																																																																																																				
		U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																				
ANT		6																																																																																																				
Pol.		Vertical					Fundamental																																																																																															
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.78</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>42.90</td><td>34.11</td><td>8.33</td><td>32.66</td><td>268</td><td>243</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.78	52.68	74.00	-21.32	42.90	34.11	8.33	32.66	268	243	PEAK	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>101.49</td><td>-----</td><td>-----</td><td>91.82</td><td>34.09</td><td>8.25</td><td>32.67</td><td>268</td><td>243</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	101.49	-----	-----	91.82	34.09	8.25	32.67	268	243	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5351.78	52.68	74.00	-21.32	42.90	34.11	8.33	32.66	268	243	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5320.00	101.49	-----	-----	91.82	34.09	8.25	32.67	268	243	PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>32.47</td><td>34.11</td><td>8.33</td><td>32.66</td><td>268</td><td>243</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	42.25	54.00	-11.75	32.47	34.11	8.33	32.66	268	243	AVERAGE	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.30</td><td>-----</td><td>-----</td><td>85.63</td><td>34.09</td><td>8.25</td><td>32.67</td><td>268</td><td>243</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	95.30	-----	-----	85.63	34.09	8.25	32.67	268	243	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5350.10	42.25	54.00	-11.75	32.47	34.11	8.33	32.66	268	243	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5320.00	95.30	-----	-----	85.63	34.09	8.25	32.67	268	243	AVERAGE																																																																																											

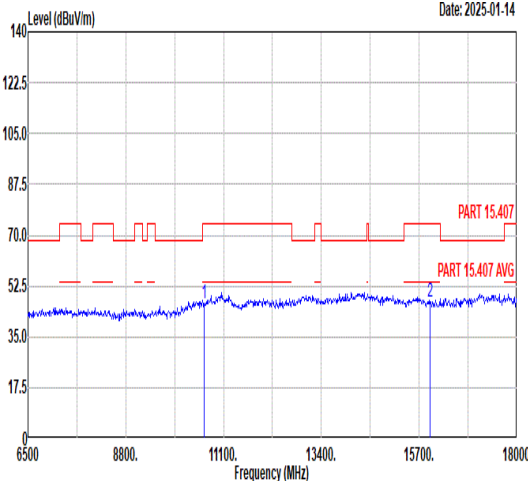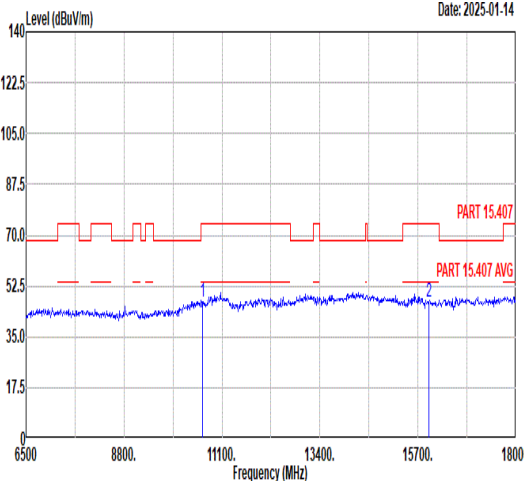

Mode	6																																																																																																				
	Harmonic																																																																																																				
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																				
ANT	6																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10640.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>62.41</td><td>37.78</td><td>10.94</td><td>64.43</td><td>-- -- Peak</td></tr><tr><td>2 15960.00</td><td>47.00</td><td>74.00</td><td>-27.00</td><td>58.94</td><td>39.59</td><td>12.70</td><td>64.23</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10640.00	46.70	74.00	-27.30	62.41	37.78	10.94	64.43	-- -- Peak	2 15960.00	47.00	74.00	-27.00	58.94	39.59	12.70	64.23	-- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10640.00</td><td>46.81</td><td>74.00</td><td>-27.19</td><td>62.52</td><td>37.78</td><td>10.94</td><td>64.43</td><td>-- -- Peak</td></tr><tr><td>2 15960.00</td><td>47.08</td><td>74.00</td><td>-26.92</td><td>59.02</td><td>39.59</td><td>12.70</td><td>64.23</td><td>-- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10640.00	46.81	74.00	-27.19	62.52	37.78	10.94	64.43	-- -- Peak	2 15960.00	47.08	74.00	-26.92	59.02	39.59	12.70	64.23	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 10640.00	46.70	74.00	-27.30	62.41	37.78	10.94	64.43	-- -- Peak																																																																																													
2 15960.00	47.00	74.00	-27.00	58.94	39.59	12.70	64.23	-- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 10640.00	46.81	74.00	-27.19	62.52	37.78	10.94	64.43	-- -- Peak																																																																																													
2 15960.00	47.08	74.00	-26.92	59.02	39.59	12.70	64.23	-- -- Peak																																																																																													

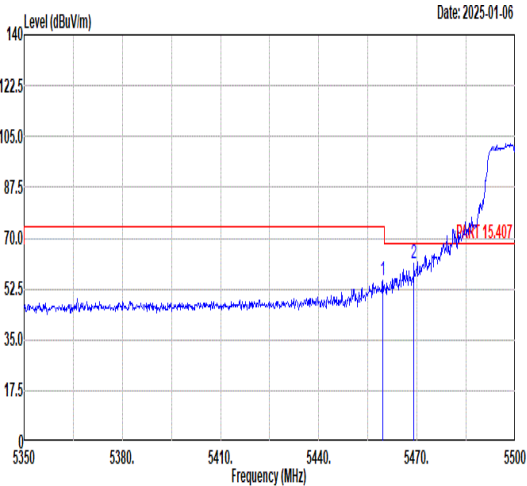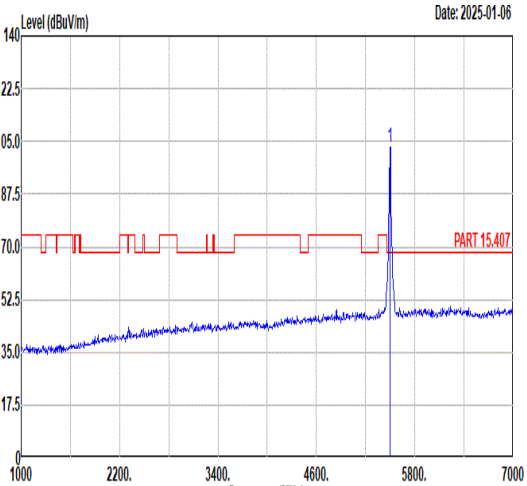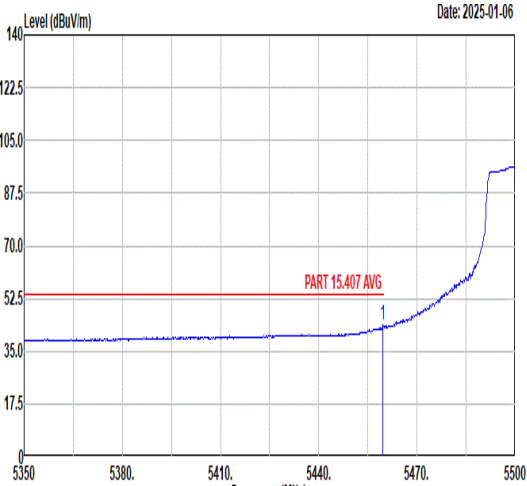
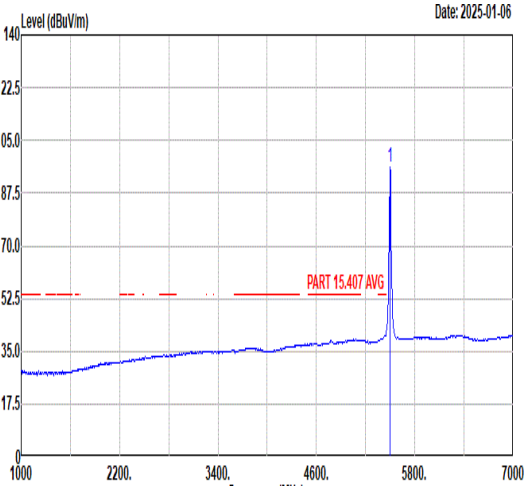


Mode	7																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Horizontal					Fundamental																																																																																													
Peak	 Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.65</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>45.36</td><td>34.17</td><td>8.41</td><td>32.61</td><td>100</td><td>41 PEAK</td></tr><tr><td>2</td><td>5469.10</td><td>61.34</td><td>68.30</td><td>-6.96</td><td>51.37</td><td>34.18</td><td>8.40</td><td>32.61</td><td>100</td><td>41 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.65	55.33	74.00	-18.67	45.36	34.17	8.41	32.61	100	41 PEAK	2	5469.10	61.34	68.30	-6.96	51.37	34.18	8.40	32.61	100	41 PEAK	 Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>103.03</td><td>-----</td><td>-----</td><td>93.08</td><td>34.20</td><td>8.36</td><td>32.61</td><td>100</td><td>41 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	103.03	-----	-----	93.08	34.20	8.36	32.61	100	41 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.65	55.33	74.00	-18.67	45.36	34.17	8.41	32.61	100	41 PEAK																																																																																									
2	5469.10	61.34	68.30	-6.96	51.37	34.18	8.40	32.61	100	41 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	103.03	-----	-----	93.08	34.20	8.36	32.61	100	41 PEAK																																																																																									
Avg	 Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.65</td><td>43.64</td><td>54.00</td><td>-10.36</td><td>33.67</td><td>34.17</td><td>8.41</td><td>32.61</td><td>100</td><td>41 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.65	43.64	54.00	-10.36	33.67	34.17	8.41	32.61	100	41 AVERAGE	 Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>95.90</td><td>-----</td><td>-----</td><td>85.95</td><td>34.20</td><td>8.36</td><td>32.61</td><td>100</td><td>41 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	95.90	-----	-----	85.95	34.20	8.36	32.61	100	41 AVERAGE											
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.65	43.64	54.00	-10.36	33.67	34.17	8.41	32.61	100	41 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5500.00	95.90	-----	-----	85.95	34.20	8.36	32.61	100	41 AVERAGE																																																																																									





Mode	7																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5459.95</td><td>52.99</td><td>74.00</td><td>-21.01</td><td>43.02</td><td>34.17</td><td>8.41</td><td>32.61</td><td>347</td><td>247</td><td>PEAK</td></tr><tr><td>2</td><td>5467.45</td><td>60.13</td><td>68.30</td><td>-8.17</td><td>50.16</td><td>34.18</td><td>8.40</td><td>32.61</td><td>347</td><td>247</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5459.95	52.99	74.00	-21.01	43.02	34.17	8.41	32.61	347	247	PEAK	2	5467.45	60.13	68.30	-8.17	50.16	34.18	8.40	32.61	347	247	PEAK	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5500.00</td><td>101.39</td><td>-----</td><td>-----</td><td>91.44</td><td>34.20</td><td>8.36</td><td>32.61</td><td>347</td><td>247</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5500.00	101.39	-----	-----	91.44	34.20	8.36	32.61	347	247	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1	5459.95	52.99	74.00	-21.01	43.02	34.17	8.41	32.61	347	247	PEAK																																																																																	
2	5467.45	60.13	68.30	-8.17	50.16	34.18	8.40	32.61	347	247	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1	5500.00	101.39	-----	-----	91.44	34.20	8.36	32.61	347	247	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5459.65</td><td>41.65</td><td>54.00</td><td>-12.35</td><td>31.68</td><td>34.17</td><td>8.41</td><td>32.61</td><td>347</td><td>247</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5459.65	41.65	54.00	-12.35	31.68	34.17	8.41	32.61	347	247	AVERAGE	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5500.00</td><td>94.51</td><td>-----</td><td>-----</td><td>84.56</td><td>34.20</td><td>8.36</td><td>32.61</td><td>347</td><td>247</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5500.00	94.51	-----	-----	84.56	34.20	8.36	32.61	347	247	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1	5459.65	41.65	54.00	-12.35	31.68	34.17	8.41	32.61	347	247	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																					
1	5500.00	94.51	-----	-----	84.56	34.20	8.36	32.61	347	247	AVERAGE																																																																																	


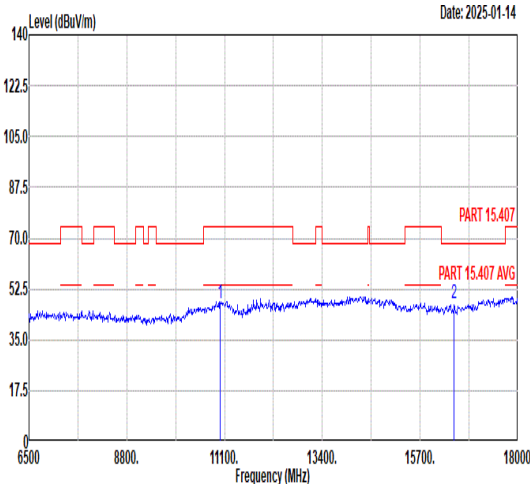
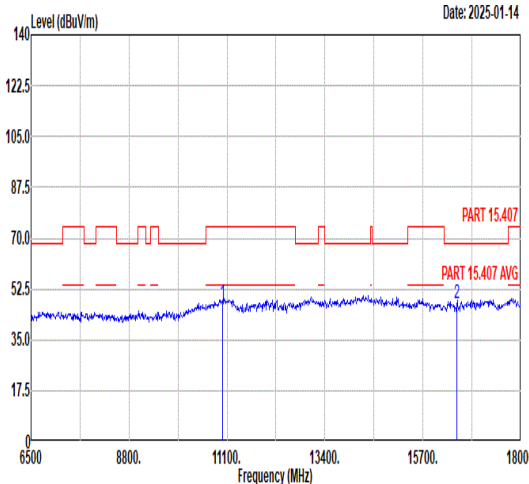


Mode	7																																																								
	Harmonic																																																								
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																								
ANT	6																																																								
Pol.	Horizontal						Vertical																																																		
Peak Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>11000.00</td><td>47.51</td><td>74.00</td><td>-26.49</td><td>61.01</td><td>38.49</td><td>11.21</td><td>63.20</td></tr><tr><td>2</td><td>16500.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>59.13</td><td>40.39</td><td>12.91</td><td>65.09</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	47.51	74.00	-26.49	61.01	38.49	11.21	63.20	2	16500.00	47.34	68.30	-20.96	59.13	40.39	12.91	65.09
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																	
1	11000.00	47.51	74.00	-26.49	61.01	38.49	11.21	63.20																																																	
2	16500.00	47.34	68.30	-20.96	59.13	40.39	12.91	65.09																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>dB</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>11000.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>61.27</td><td>38.49</td><td>11.21</td><td>63.20</td></tr><tr><td>2</td><td>16500.00</td><td>47.44</td><td>68.30</td><td>-20.86</td><td>59.23</td><td>40.39</td><td>12.91</td><td>65.09</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	11000.00	47.77	74.00	-26.23	61.27	38.49	11.21	63.20	2	16500.00	47.44	68.30	-20.86	59.23	40.39	12.91	65.09	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																	
1	11000.00	47.77	74.00	-26.23	61.27	38.49	11.21	63.20																																																	
2	16500.00	47.44	68.30	-20.86	59.23	40.39	12.91	65.09																																																	


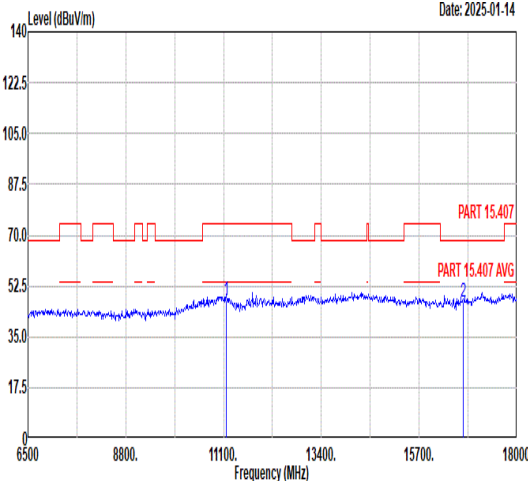
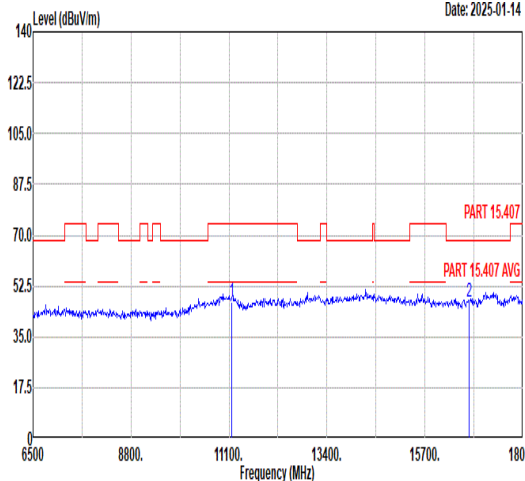


Mode	8																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																																													
ANT	6																																																																																																																																																													
Pol.	Horizontal								Vertical																																																																																																																																																					
Peak Avg																																																																																																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th colspan="2">Freq</th><th colspan="2">Level</th><th colspan="2">Line Margin</th><th colspan="2">Level Factor</th><th colspan="2">Loss Factor</th><th colspan="2"></th><th colspan="2"></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>11160.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>61.30</td><td>38.05</td><td>11.29</td><td>63.10</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td></tr><tr><td>2</td><td>16740.00</td><td>47.23</td><td>68.30</td><td>-21.07</td><td>58.73</td><td>40.59</td><td>13.01</td><td>65.10</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td></tr></table>										Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq		Level		Line Margin		Level Factor		Loss Factor								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.54	74.00	-26.46	61.30	38.05	11.29	63.10	--	--	Peak			2	16740.00	47.23	68.30	-21.07	58.73	40.59	13.01	65.10	--	--	Peak			<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th colspan="2">Freq</th><th colspan="2">Level</th><th colspan="2">Line Margin</th><th colspan="2">Level Factor</th><th colspan="2">Loss Factor</th><th colspan="2"></th><th colspan="2"></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th></tr><tr><td>1</td><td>11160.00</td><td>47.14</td><td>74.00</td><td>-26.86</td><td>60.90</td><td>38.05</td><td>11.29</td><td>63.10</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td></tr><tr><td>2</td><td>16740.00</td><td>46.89</td><td>68.30</td><td>-21.41</td><td>58.39</td><td>40.59</td><td>13.01</td><td>65.10</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td></tr></table>										Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq		Level		Line Margin		Level Factor		Loss Factor								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.14	74.00	-26.86	60.90	38.05	11.29	63.10	--	--	Peak			2	16740.00	46.89	68.30	-21.41	58.39	40.59	13.01	65.10	--	--	Peak		
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																															
Freq		Level		Line Margin		Level Factor		Loss Factor																																																																																																																																																						
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																			
1	11160.00	47.54	74.00	-26.46	61.30	38.05	11.29	63.10	--	--	Peak																																																																																																																																																			
2	16740.00	47.23	68.30	-21.07	58.73	40.59	13.01	65.10	--	--	Peak																																																																																																																																																			
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																
Freq		Level		Line Margin		Level Factor		Loss Factor																																																																																																																																																						
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																			
1	11160.00	47.14	74.00	-26.86	60.90	38.05	11.29	63.10	--	--	Peak																																																																																																																																																			
2	16740.00	46.89	68.30	-21.41	58.39	40.59	13.01	65.10	--	--	Peak																																																																																																																																																			

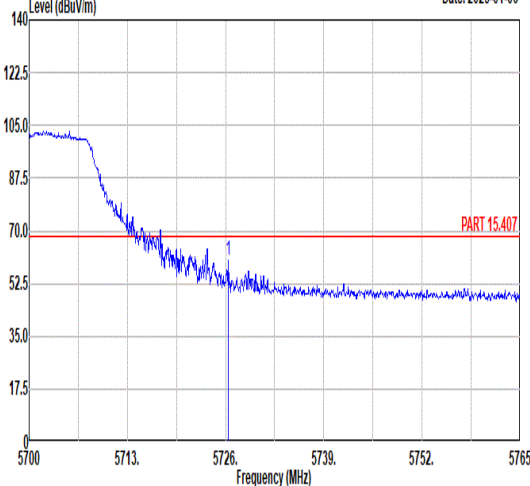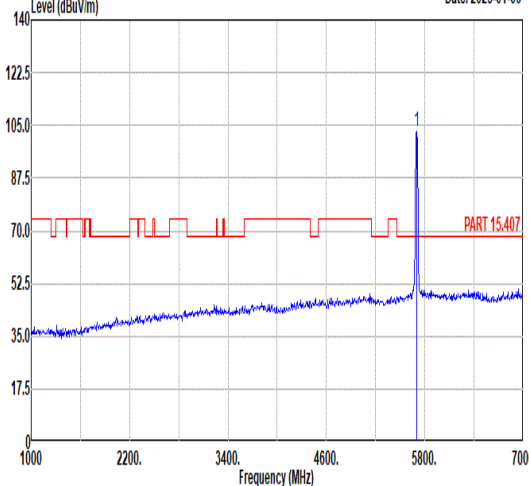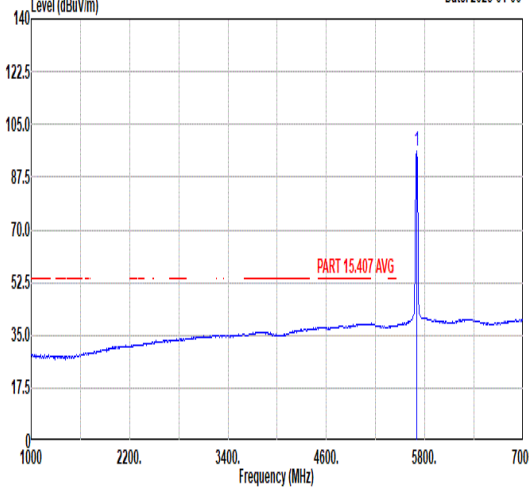

Mode	9																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5726.39</td><td>60.19</td><td>68.30</td><td>-8.11</td><td>49.69</td><td>34.60</td><td>8.68</td><td>32.78</td><td>100</td><td>297</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5726.39	60.19	68.30	-8.11	49.69	34.60	8.68	32.78	100	297	PEAK	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>103.14</td><td>-----</td><td>-----</td><td>92.78</td><td>34.55</td><td>8.57</td><td>32.76</td><td>100</td><td>297</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	103.14	-----	-----	92.78	34.55	8.57	32.76	100	297	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5726.39	60.19	68.30	-8.11	49.69	34.60	8.68	32.78	100	297	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	103.14	-----	-----	92.78	34.55	8.57	32.76	100	297	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>95.99</td><td>-----</td><td>-----</td><td>85.63</td><td>34.55</td><td>8.57</td><td>32.76</td><td>100</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	95.99	-----	-----	85.63	34.55	8.57	32.76	100	297	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	95.99	-----	-----	85.63	34.55	8.57	32.76	100	297	AVERAGE																																																																																	


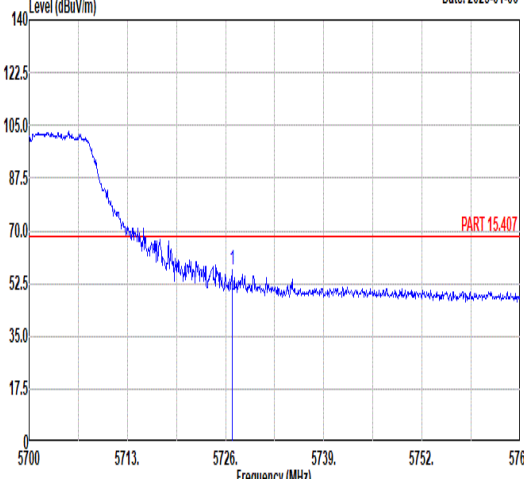
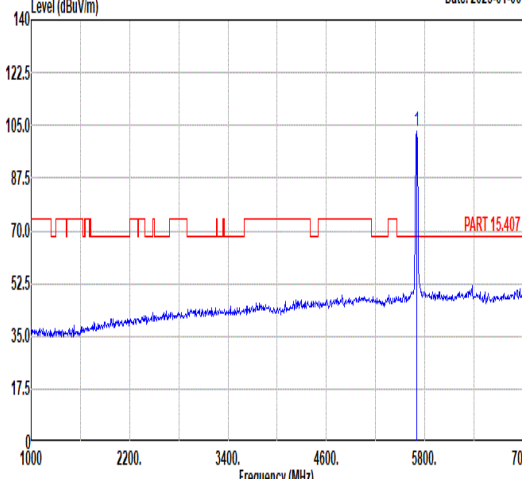
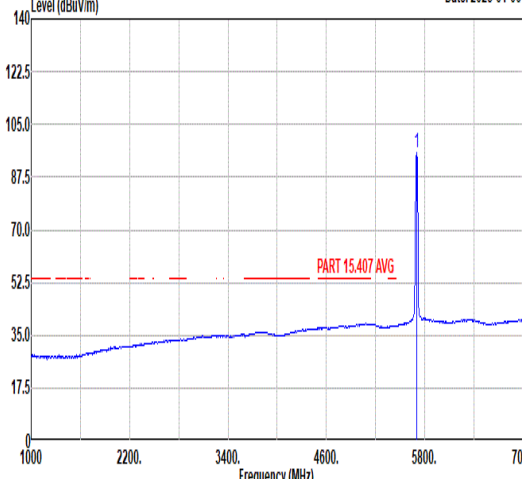


Mode	9																																																																																															
	Band Edge																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																															
ANT	6																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5726.85</td><td>57.16</td><td>68.30</td><td>-11.14</td><td>46.66</td><td>34.60</td><td>8.68</td><td>32.78</td><td>317</td><td></td><td>250 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5726.85	57.16	68.30	-11.14	46.66	34.60	8.68	32.78	317		250 PEAK	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5700.00</td><td>103.20</td><td>-----</td><td>-----</td><td>92.84</td><td>34.55</td><td>8.57</td><td>32.76</td><td>317</td><td></td><td>250 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	103.20	-----	-----	92.84	34.55	8.57	32.76	317		250 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5726.85	57.16	68.30	-11.14	46.66	34.60	8.68	32.78	317		250 PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	103.20	-----	-----	92.84	34.55	8.57	32.76	317		250 PEAK																																																																																					
Avg	Blank						Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5700.00</td><td>95.53</td><td>-----</td><td>-----</td><td>85.17</td><td>34.55</td><td>8.57</td><td>32.76</td><td>317</td><td></td><td>250 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	95.53	-----	-----	85.17	34.55	8.57	32.76	317		250 AVERAGE																																										
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	95.53	-----	-----	85.17	34.55	8.57	32.76	317		250 AVERAGE																																																																																					



Mode	9																																																																																
	Harmonic																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																
ANT	6																																																																																
Pol.	Horizontal								Vertical																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)								Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11400.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>60.94</td><td>37.39</td><td>11.41</td></tr><tr><td>2</td><td>17100.00</td><td>47.16</td><td>68.30</td><td>-21.14</td><td>58.20</td><td>41.00</td><td>13.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11400.00	46.78	74.00	-27.22	60.94	37.39	11.41	2	17100.00	47.16	68.30	-21.14	58.20	41.00	13.14	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><td>1</td><td>11400.00</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>60.14</td><td>37.39</td><td>11.41</td></tr><tr><td>2</td><td>17100.00</td><td>47.03</td><td>68.30</td><td>-21.27</td><td>58.07</td><td>41.00</td><td>13.14</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	11400.00	45.98	74.00	-28.02	60.14	37.39	11.41	2	17100.00	47.03	68.30	-21.27	58.07	41.00	13.14	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
1	11400.00	46.78	74.00	-27.22	60.94	37.39	11.41																																																																										
2	17100.00	47.16	68.30	-21.14	58.20	41.00	13.14																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
1	11400.00	45.98	74.00	-28.02	60.14	37.39	11.41																																																																										
2	17100.00	47.03	68.30	-21.27	58.07	41.00	13.14																																																																										
<table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>60.94</td><td>37.39</td><td>11.41</td><td>62.96</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.16</td><td>68.30</td><td>-21.14</td><td>58.20</td><td>41.00</td><td>13.14</td><td>65.18</td><td>--</td><td>-- Peak</td></tr></table>									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	46.78	74.00	-27.22	60.94	37.39	11.41	62.96	--	-- Peak	2	17100.00	47.16	68.30	-21.14	58.20	41.00	13.14	65.18	--	-- Peak	<table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>45.98</td><td>74.00</td><td>-28.02</td><td>60.14</td><td>37.39</td><td>11.41</td><td>62.96</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.03</td><td>68.30</td><td>-21.27</td><td>58.07</td><td>41.00</td><td>13.14</td><td>65.18</td><td>--</td><td>-- Peak</td></tr></table>									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	45.98	74.00	-28.02	60.14	37.39	11.41	62.96	--	-- Peak	2	17100.00	47.03	68.30	-21.27	58.07	41.00	13.14	65.18	--	-- Peak
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11400.00	46.78	74.00	-27.22	60.94	37.39	11.41	62.96	--	-- Peak																																																																							
2	17100.00	47.16	68.30	-21.14	58.20	41.00	13.14	65.18	--	-- Peak																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	11400.00	45.98	74.00	-28.02	60.14	37.39	11.41	62.96	--	-- Peak																																																																							
2	17100.00	47.03	68.30	-21.27	58.07	41.00	13.14	65.18	--	-- Peak																																																																							

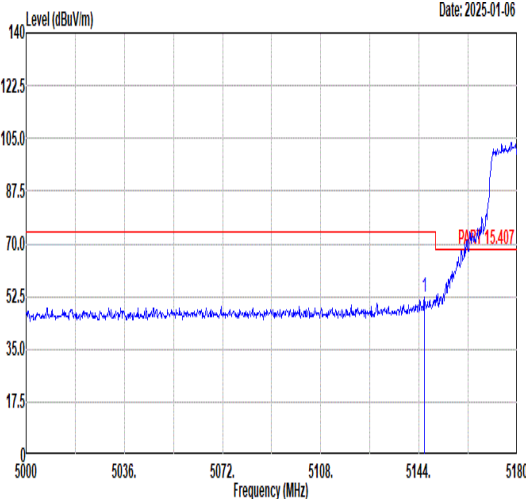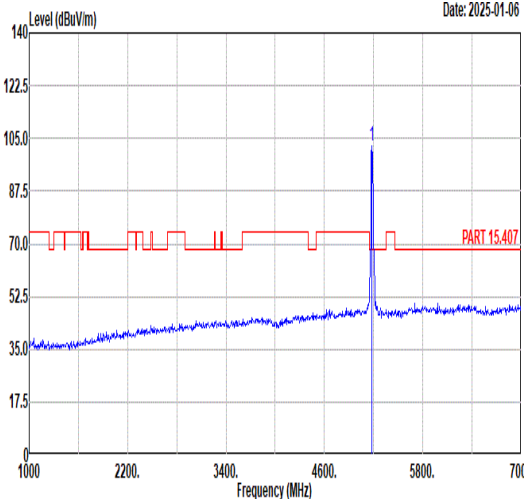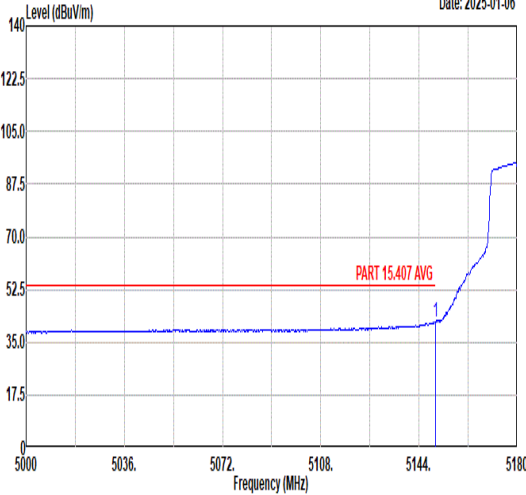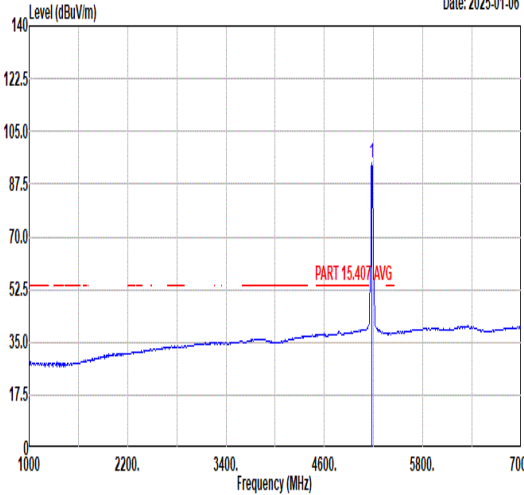

		10																																																																																								
Mode		Band Edge																																																																																								
		U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																								
ANT		6																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	 Date: 2025-01-06 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.98</td><td>52.55</td><td>74.00</td><td>-21.45</td><td>43.38</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>0</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.98	52.55	74.00	-21.45	43.38	33.99	7.92	32.74	300	0	PEAK	 Date: 2025-01-06 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.36</td><td>-----</td><td>-----</td><td>93.14</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>0</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	102.36	-----	-----	93.14	34.01	7.94	32.73	300	0	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5145.98	52.55	74.00	-21.45	43.38	33.99	7.92	32.74	300	0	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	102.36	-----	-----	93.14	34.01	7.94	32.73	300	0	PEAK																																																																															
Avg	 Date: 2025-01-06 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>32.54</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>0</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	41.71	54.00	-12.29	32.54	33.99	7.92	32.74	300	0	AVERAGE	 Date: 2025-01-06 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.57</td><td>-----</td><td>-----</td><td>85.35</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>0</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	94.57	-----	-----	85.35	34.01	7.94	32.73	300	0	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	41.71	54.00	-12.29	32.54	33.99	7.92	32.74	300	0	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	94.57	-----	-----	85.35	34.01	7.94	32.73	300	0	AVERAGE																																																																															



Mode	10																																																																																											
	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>44.72</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>252</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	53.89	74.00	-20.11	44.72	33.99	7.92	32.74	300	252	PEAK	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.65</td><td>-----</td><td>-----</td><td>95.43</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>252</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	104.65	-----	-----	95.43	34.01	7.94	32.73	300	252	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5149.94	53.89	74.00	-20.11	44.72	33.99	7.92	32.74	300	252	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5180.00	104.65	-----	-----	95.43	34.01	7.94	32.73	300	252	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.04</td><td>41.46</td><td>54.00</td><td>-12.54</td><td>32.29</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>252</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.04	41.46	54.00	-12.54	32.29	33.99	7.92	32.74	300	252	AVERAGE	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.82</td><td>-----</td><td>-----</td><td>86.60</td><td>34.01</td><td>7.94</td><td>32.73</td><td>300</td><td>252</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.82	-----	-----	86.60	34.01	7.94	32.73	300	252	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5149.04	41.46	54.00	-12.54	32.29	33.99	7.92	32.74	300	252	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5180.00	95.82	-----	-----	86.60	34.01	7.94	32.73	300	252	AVERAGE																																																																																	





Mode	10																																																																																																									
	Harmonic																																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																									
ANT	6																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-01-14 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.49</td><td>68.30</td><td>-21.81</td><td>63.19</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>59.16</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.49	68.30	-21.81	63.19	37.16	10.73	64.59	--	-- Peak	2	15540.00	47.92	74.00	-26.08	59.16	39.42	12.72	63.38	--	-- Peak	Level (dBuV/m) Date: 2025-01-14 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.51</td><td>68.30</td><td>-21.79</td><td>63.21</td><td>37.16</td><td>10.73</td><td>64.59</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>58.77</td><td>39.42</td><td>12.72</td><td>63.38</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.51	68.30	-21.79	63.21	37.16	10.73	64.59	--	-- Peak	2	15540.00	47.53	74.00	-26.47	58.77	39.42	12.72	63.38	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10360.00	46.49	68.30	-21.81	63.19	37.16	10.73	64.59	--	-- Peak																																																																																																
2	15540.00	47.92	74.00	-26.08	59.16	39.42	12.72	63.38	--	-- Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	10360.00	46.51	68.30	-21.79	63.21	37.16	10.73	64.59	--	-- Peak																																																																																																
2	15540.00	47.53	74.00	-26.47	58.77	39.42	12.72	63.38	--	-- Peak																																																																																																





Mode	11																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																															
ANT	6																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.02</td><td>68.30</td><td>-21.28</td><td>63.64</td><td>37.35</td><td>10.79</td></tr><tr><td>2</td><td>15660.00</td><td>47.90</td><td>74.00</td><td>-26.10</td><td>59.34</td><td>39.46</td><td>12.72</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.02	68.30	-21.28	63.64	37.35	10.79	2	15660.00	47.90	74.00	-26.10	59.34	39.46	12.72	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>46.41</td><td>68.30</td><td>-21.89</td><td>63.03</td><td>37.35</td><td>10.79</td></tr><tr><td>2</td><td>15660.00</td><td>47.08</td><td>74.00</td><td>-26.92</td><td>58.52</td><td>39.46</td><td>12.72</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	46.41	68.30	-21.89	63.03	37.35	10.79	2	15660.00	47.08	74.00	-26.92	58.52	39.46	12.72
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																								
1	10440.00	47.02	68.30	-21.28	63.64	37.35	10.79																																																																																									
2	15660.00	47.90	74.00	-26.10	59.34	39.46	12.72																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	46.41	68.30	-21.89	63.03	37.35	10.79																																																																																									
2	15660.00	47.08	74.00	-26.92	58.52	39.46	12.72																																																																																									

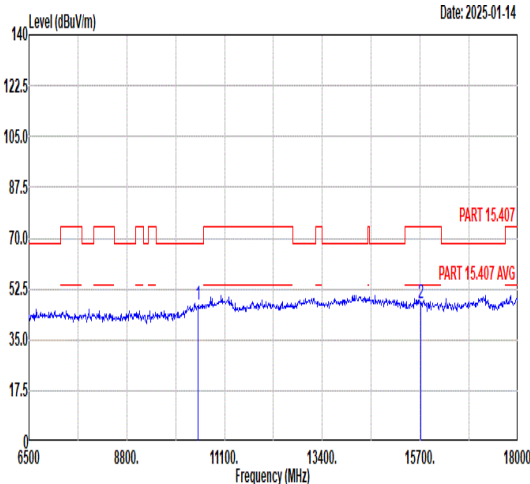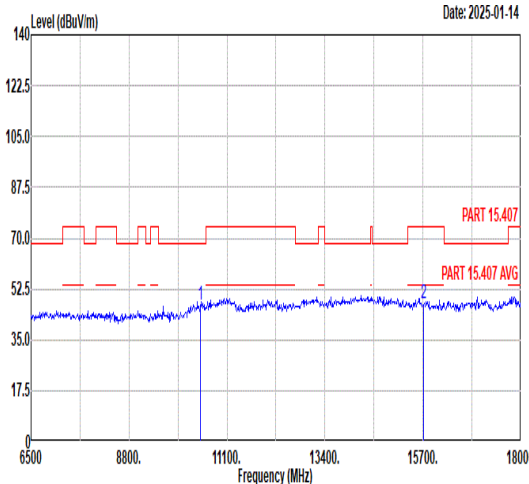

Mode	12																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>46.93</td><td>68.30</td><td>-21.37</td><td>63.51</td><td>37.45</td><td>10.82</td><td>64.85</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>58.87</td><td>39.49</td><td>12.71</td><td>63.74</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.93	68.30	-21.37	63.51	37.45	10.82	64.85	--	--	Peak	2	15720.00	47.33	74.00	-26.67	58.87	39.49	12.71	63.74	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.10</td><td>68.30</td><td>-21.20</td><td>63.68</td><td>37.45</td><td>10.82</td><td>64.85</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>59.17</td><td>39.49</td><td>12.71</td><td>63.74</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.10	68.30	-21.20	63.68	37.45	10.82	64.85	--	--	Peak	2	15720.00	47.63	74.00	-26.37	59.17	39.49	12.71	63.74	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10480.00	46.93	68.30	-21.37	63.51	37.45	10.82	64.85	--	--	Peak																																																																																																									
2	15720.00	47.33	74.00	-26.67	58.87	39.49	12.71	63.74	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10480.00	47.10	68.30	-21.20	63.68	37.45	10.82	64.85	--	--	Peak																																																																																																									
2	15720.00	47.63	74.00	-26.37	59.17	39.49	12.71	63.74	--	--	Peak																																																																																																									



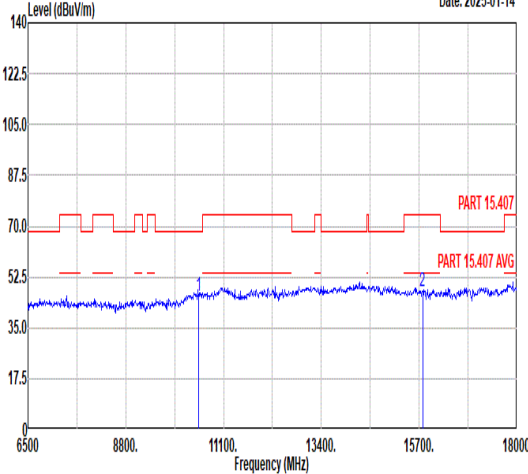
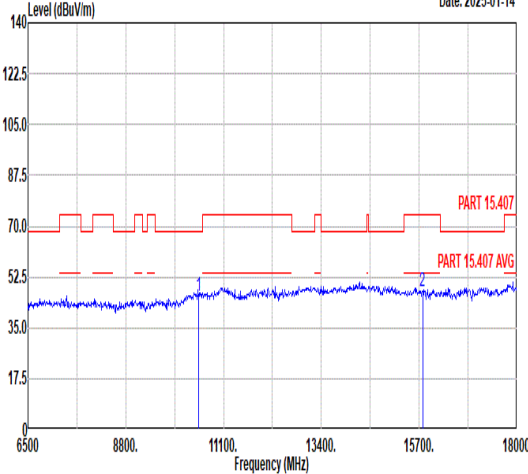


Mode	13																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red limit line (PART 15.407), a red dashed average line (PART 15.407 AVG), and a blue peak line. Two peaks are marked with vertical blue lines at 10520.00 MHz and 15780.00 MHz.						 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red limit line (PART 15.407), a red dashed average line (PART 15.407 AVG), and a blue average line. Two peaks are marked with vertical blue lines at 10520.00 MHz and 15780.00 MHz.																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>46.08</td><td>68.30</td><td>-22.22</td><td>62.54</td><td>37.53</td><td>10.85</td><td>64.84</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>59.22</td><td>39.51</td><td>12.71</td><td>63.87</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	46.08	68.30	-22.22	62.54	37.53	10.85	64.84	--	--	Peak	2	15780.00	47.57	74.00	-26.43	59.22	39.51	12.71	63.87	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>46.73</td><td>68.30</td><td>-21.57</td><td>63.19</td><td>37.53</td><td>10.85</td><td>64.84</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>58.75</td><td>39.51</td><td>12.71</td><td>63.87</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	46.73	68.30	-21.57	63.19	37.53	10.85	64.84	--	--	Peak	2	15780.00	47.10	74.00	-26.90	58.75	39.51	12.71	63.87	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10520.00	46.08	68.30	-22.22	62.54	37.53	10.85	64.84	--	--	Peak																																																																																																									
2	15780.00	47.57	74.00	-26.43	59.22	39.51	12.71	63.87	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10520.00	46.73	68.30	-21.57	63.19	37.53	10.85	64.84	--	--	Peak																																																																																																									
2	15780.00	47.10	74.00	-26.90	58.75	39.51	12.71	63.87	--	--	Peak																																																																																																									



Mode	14																																																																																																				
	Harmonic																																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz																																																																																																				
ANT	6																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)						Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10600.00</td><td>47.07</td><td>74.00</td><td>-26.93</td><td>63.03</td><td>37.70</td><td>10.91</td><td>64.57</td><td>-- -- Peak</td></tr><tr><td>2 15900.00</td><td>47.71</td><td>74.00</td><td>-26.29</td><td>59.55</td><td>39.56</td><td>12.71</td><td>64.11</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10600.00	47.07	74.00	-26.93	63.03	37.70	10.91	64.57	-- -- Peak	2 15900.00	47.71	74.00	-26.29	59.55	39.56	12.71	64.11	-- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10600.00</td><td>46.50</td><td>74.00</td><td>-27.50</td><td>62.46</td><td>37.70</td><td>10.91</td><td>64.57</td><td>-- -- Peak</td></tr><tr><td>2 15900.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>58.23</td><td>39.56</td><td>12.71</td><td>64.11</td><td>-- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10600.00	46.50	74.00	-27.50	62.46	37.70	10.91	64.57	-- -- Peak	2 15900.00	46.39	74.00	-27.61	58.23	39.56	12.71	64.11	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 10600.00	47.07	74.00	-26.93	63.03	37.70	10.91	64.57	-- -- Peak																																																																																													
2 15900.00	47.71	74.00	-26.29	59.55	39.56	12.71	64.11	-- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1 10600.00	46.50	74.00	-27.50	62.46	37.70	10.91	64.57	-- -- Peak																																																																																													
2 15900.00	46.39	74.00	-27.61	58.23	39.56	12.71	64.11	-- -- Peak																																																																																													

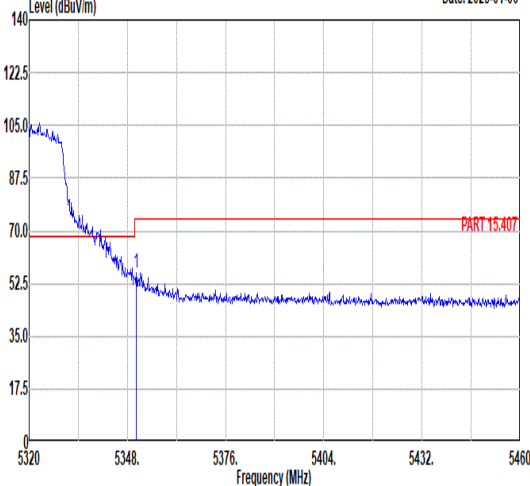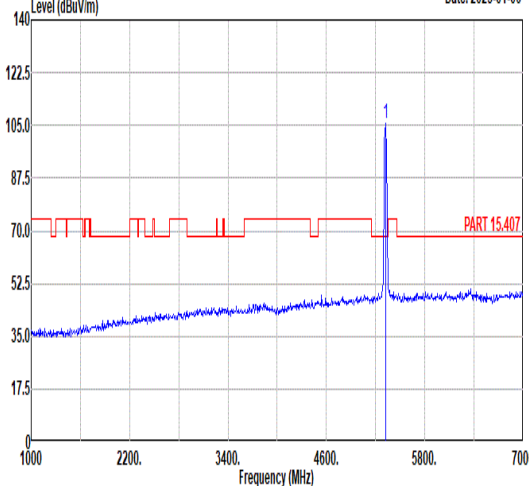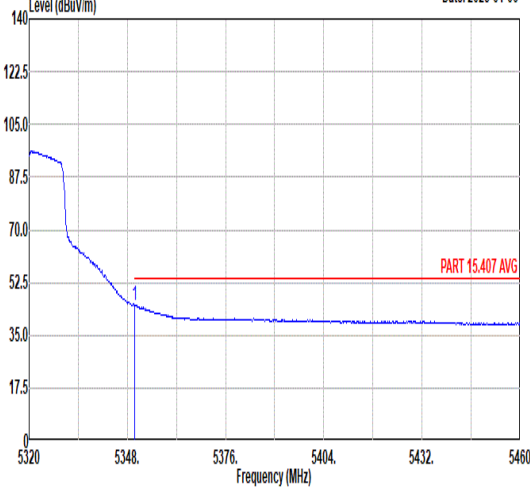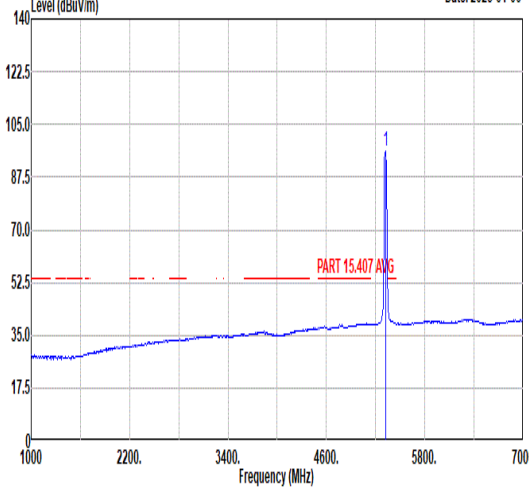

Mode	15																																																																																					
	Band Edge																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																					
ANT	6																																																																																					
Pol.	Horizontal					Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.52</td><td>55.96</td><td>74.00</td><td>-18.04</td><td>46.18</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>78 PEAK</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.52	55.96	74.00	-18.04	46.18	34.11	8.33	32.66	100	78 PEAK	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>105.62</td><td>-----</td><td>-----</td><td>95.95</td><td>34.09</td><td>8.25</td><td>32.67</td><td>100</td><td>78 PEAK</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	105.62	-----	-----	95.95	34.09	8.25	32.67	100	78 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1 5350.52	55.96	74.00	-18.04	46.18	34.11	8.33	32.66	100	78 PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1 5320.00	105.62	-----	-----	95.95	34.09	8.25	32.67	100	78 PEAK																																																																													
Avg	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.10</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>35.08</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>78 AVERAGE</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.10	44.86	54.00	-9.14	35.08	34.11	8.33	32.66	100	78 AVERAGE	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>95.91</td><td>-----</td><td>-----</td><td>86.24</td><td>34.09</td><td>8.25</td><td>32.67</td><td>100</td><td>78 AVERAGE</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	95.91	-----	-----	86.24	34.09	8.25	32.67	100	78 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1 5350.10	44.86	54.00	-9.14	35.08	34.11	8.33	32.66	100	78 AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																													
1 5320.00	95.91	-----	-----	86.24	34.09	8.25	32.67	100	78 AVERAGE																																																																													



		15																																																																																																																																																																															
Mode		Band Edge																																																																																																																																																																															
		U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																																																																																																															
ANT		6																																																																																																																																																																															
Pol.		Vertical					Fundamental																																																																																																																																																																										
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.52</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>46.14</td><td>34.11</td><td>8.33</td><td>32.66</td><td>344</td><td>254 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.40</td><td>-----</td><td>-----</td><td>93.72</td><td>34.09</td><td>8.26</td><td>32.67</td><td>344</td><td>254 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.52	55.92	74.00	-18.08	46.14	34.11	8.33	32.66	344	254 PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	103.40	-----	-----	93.72	34.09	8.26	32.67	344	254 PEAK	Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.38</td><td>44.77</td><td>54.00</td><td>-9.23</td><td>34.99</td><td>34.11</td><td>8.33</td><td>32.66</td><td>344</td><td>254 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.25</td><td>-----</td><td>-----</td><td>85.58</td><td>34.09</td><td>8.25</td><td>32.67</td><td>344</td><td>254 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.38	44.77	54.00	-9.23	34.99	34.11	8.33	32.66	344	254 AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	95.25	-----	-----	85.58	34.09	8.25	32.67	344	254 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																								
1	5350.52	55.92	74.00	-18.08	46.14	34.11	8.33	32.66	344	254 PEAK																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																								
1	5320.00	103.40	-----	-----	93.72	34.09	8.26	32.67	344	254 PEAK																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																								
1	5350.38	44.77	54.00	-9.23	34.99	34.11	8.33	32.66	344	254 AVERAGE																																																																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																																																								
1	5320.00	95.25	-----	-----	85.58	34.09	8.25	32.67	344	254 AVERAGE																																																																																																																																																																							



Mode	15																																																															
	Harmonic																																																															
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																															
ANT	6																																																															
Pol.	Horizontal						Vertical																																																									
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)						Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>63.25</td><td>37.78</td><td>10.94</td><td>64.43</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>46.14</td><td>74.00</td><td>-27.86</td><td>58.08</td><td>39.59</td><td>12.70</td><td>64.23</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.54	74.00	-26.46	63.25	37.78	10.94	64.43	--	--	Peak	2	15960.00	46.14	74.00	-27.86	58.08	39.59	12.70	64.23	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																							
1	10640.00	47.54	74.00	-26.46	63.25	37.78	10.94	64.43	--	--	Peak																																																					
2	15960.00	46.14	74.00	-27.86	58.08	39.59	12.70	64.23	--	--	Peak																																																					
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>46.18</td><td>74.00</td><td>-27.82</td><td>61.89</td><td>37.78</td><td>10.94</td><td>64.43</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>58.16</td><td>39.59</td><td>12.70</td><td>64.23</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.18	74.00	-27.82	61.89	37.78	10.94	64.43	--	--	Peak	2	15960.00	46.22	74.00	-27.78	58.16	39.59	12.70	64.23	--	--	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																							
1	10640.00	46.18	74.00	-27.82	61.89	37.78	10.94	64.43	--	--	Peak																																																					
2	15960.00	46.22	74.00	-27.78	58.16	39.59	12.70	64.23	--	--	Peak																																																					



Mode	16																																																																																																					
	Band Edge																																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5457.70</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>44.80</td><td>34.17</td><td>8.41</td><td>32.61</td><td>112</td><td>65</td><td>PEAK</td></tr><tr><td>2</td><td>5469.70</td><td>61.50</td><td>68.30</td><td>-6.80</td><td>51.53</td><td>34.18</td><td>8.40</td><td>32.61</td><td>112</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5457.70	54.77	74.00	-19.23	44.80	34.17	8.41	32.61	112	65	PEAK	2	5469.70	61.50	68.30	-6.80	51.53	34.18	8.40	32.61	112	65	PEAK	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5500.00</td><td>104.65</td><td>-----</td><td>-----</td><td>94.70</td><td>34.20</td><td>8.36</td><td>32.61</td><td>112</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	104.65	-----	-----	94.70	34.20	8.36	32.61	112	65	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	5457.70	54.77	74.00	-19.23	44.80	34.17	8.41	32.61	112	65	PEAK																																																																																											
2	5469.70	61.50	68.30	-6.80	51.53	34.18	8.40	32.61	112	65	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	5500.00	104.65	-----	-----	94.70	34.20	8.36	32.61	112	65	PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5459.80</td><td>42.80</td><td>54.00</td><td>-11.20</td><td>32.83</td><td>34.17</td><td>8.41</td><td>32.61</td><td>112</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.80	42.80	54.00	-11.20	32.83	34.17	8.41	32.61	112	65	AVERAGE	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5500.00</td><td>95.93</td><td>-----</td><td>-----</td><td>85.98</td><td>34.20</td><td>8.36</td><td>32.61</td><td>112</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	95.93	-----	-----	85.98	34.20	8.36	32.61	112	65	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	5459.80	42.80	54.00	-11.20	32.83	34.17	8.41	32.61	112	65	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	5500.00	95.93	-----	-----	85.98	34.20	8.36	32.61	112	65	AVERAGE																																																																																											



Mode	16																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1 5458.90</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>43.58</td><td>34.17</td><td>8.41</td><td>32.61 300 254 PEAK</td></tr><tr><td>2 5468.65</td><td>61.08</td><td>68.30</td><td>-7.22</td><td>51.11</td><td>34.18</td><td>8.40</td><td>32.61 300 254 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5458.90	53.55	74.00	-20.45	43.58	34.17	8.41	32.61 300 254 PEAK	2 5468.65	61.08	68.30	-7.22	51.11	34.18	8.40	32.61 300 254 PEAK	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1 5500.00</td><td>103.72</td><td>-----</td><td>-----</td><td>93.78</td><td>34.20</td><td>8.35</td><td>32.61 300 254 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5500.00	103.72	-----	-----	93.78	34.20	8.35	32.61 300 254 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5458.90	53.55	74.00	-20.45	43.58	34.17	8.41	32.61 300 254 PEAK																																																																			
2 5468.65	61.08	68.30	-7.22	51.11	34.18	8.40	32.61 300 254 PEAK																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5500.00	103.72	-----	-----	93.78	34.20	8.35	32.61 300 254 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1 5459.80</td><td>41.59</td><td>54.00</td><td>-12.41</td><td>31.62</td><td>34.17</td><td>8.41</td><td>32.61 300 254 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5459.80	41.59	54.00	-12.41	31.62	34.17	8.41	32.61 300 254 AVERAGE	Level (dBuV/m) Date: 2025-01-06 Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1 5500.00</td><td>94.54</td><td>-----</td><td>-----</td><td>84.59</td><td>34.20</td><td>8.36</td><td>32.61 300 254 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5500.00	94.54	-----	-----	84.59	34.20	8.36	32.61 300 254 AVERAGE								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5459.80	41.59	54.00	-12.41	31.62	34.17	8.41	32.61 300 254 AVERAGE																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1 5500.00	94.54	-----	-----	84.59	34.20	8.36	32.61 300 254 AVERAGE																																																																			



Mode	16																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full RU_5500MHz																																																																																																																			
ANT	6																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>61.12</td><td>38.49</td><td>11.21</td><td>63.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>47.00</td><td>68.30</td><td>-21.30</td><td>58.79</td><td>40.39</td><td>12.91</td><td>65.09</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	47.62	74.00	-26.38	61.12	38.49	11.21	63.20	--	--	Peak	2	16500.00	47.00	68.30	-21.30	58.79	40.39	12.91	65.09	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11000.00</td><td>47.42</td><td>74.00</td><td>-26.58</td><td>60.92</td><td>38.49</td><td>11.21</td><td>63.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>47.34</td><td>68.30</td><td>-20.96</td><td>59.13</td><td>40.39</td><td>12.91</td><td>65.09</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	47.42	74.00	-26.58	60.92	38.49	11.21	63.20	--	--	Peak	2	16500.00	47.34	68.30	-20.96	59.13	40.39	12.91	65.09	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11000.00	47.62	74.00	-26.38	61.12	38.49	11.21	63.20	--	--	Peak																																																																																																									
2	16500.00	47.00	68.30	-21.30	58.79	40.39	12.91	65.09	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	11000.00	47.42	74.00	-26.58	60.92	38.49	11.21	63.20	--	--	Peak																																																																																																									
2	16500.00	47.34	68.30	-20.96	59.13	40.39	12.91	65.09	--	--	Peak																																																																																																									






Mode	17																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																																																																																			
ANT	6																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz) <table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>47.35</td><td>74.00</td><td>-26.65</td><td>61.11</td><td>38.05</td><td>11.29</td><td>63.10</td><td>--</td><td>-- Peak</td></tr><tr><td>2 16740.00</td><td>47.87</td><td>68.30</td><td>-20.43</td><td>59.37</td><td>40.59</td><td>13.01</td><td>65.10</td><td>--</td><td>-- Peak</td></tr></table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	47.35	74.00	-26.65	61.11	38.05	11.29	63.10	--	-- Peak	2 16740.00	47.87	68.30	-20.43	59.37	40.59	13.01	65.10	--	-- Peak	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz) <table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11160.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>61.39</td><td>38.05</td><td>11.29</td><td>63.10</td><td>--</td><td>-- Peak</td></tr><tr><td>2 16740.00</td><td>47.97</td><td>68.30</td><td>-20.33</td><td>59.47</td><td>40.59</td><td>13.01</td><td>65.10</td><td>--</td><td>-- Peak</td></tr></table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11160.00	47.63	74.00	-26.37	61.39	38.05	11.29	63.10	--	-- Peak	2 16740.00	47.97	68.30	-20.33	59.47	40.59	13.01	65.10	--	-- Peak
			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 11160.00	47.35	74.00	-26.65	61.11	38.05	11.29	63.10	--	-- Peak																																																																																											
2 16740.00	47.87	68.30	-20.43	59.37	40.59	13.01	65.10	--	-- Peak																																																																																											
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 11160.00	47.63	74.00	-26.37	61.39	38.05	11.29	63.10	--	-- Peak																																																																																											
2 16740.00	47.97	68.30	-20.33	59.47	40.59	13.01	65.10	--	-- Peak																																																																																											



Mode	18											
	Band Edge											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz											
ANT	6											
Pol.	Horizontal						Fundamental					
Peak	Level (dBuV/m) Date: 2025-01-06 <											

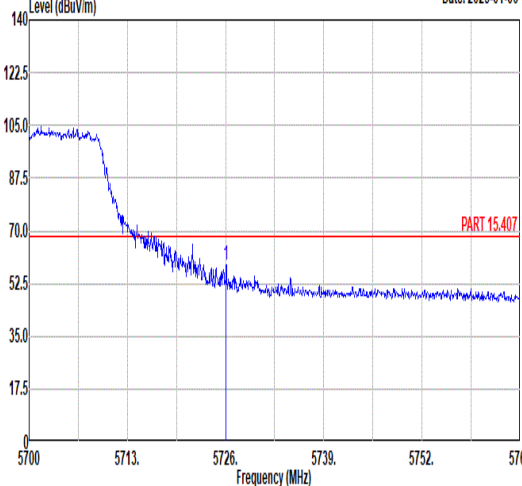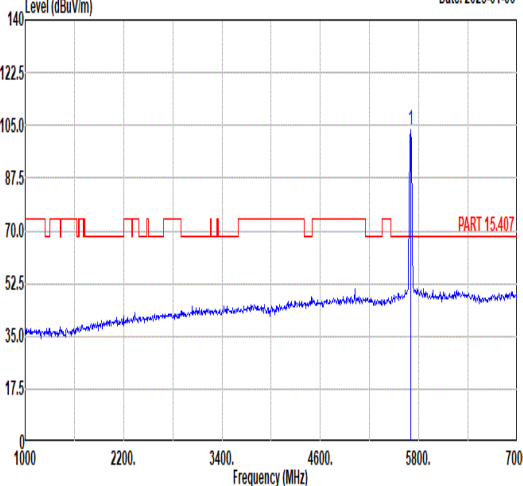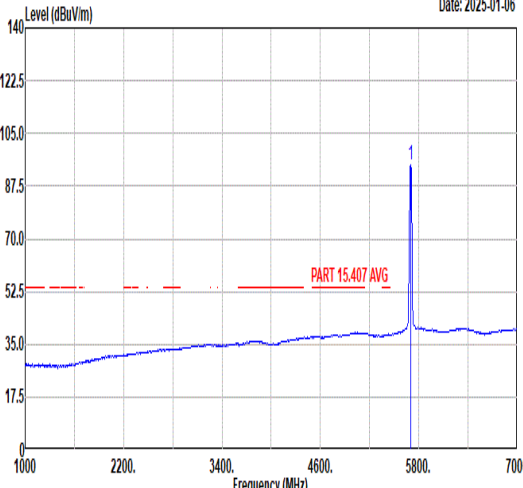

Mode	18																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.07</td><td>58.70</td><td>68.30</td><td>-9.60</td><td>48.20</td><td>34.60</td><td>8.68</td><td>32.78</td><td>337</td><td>246</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5726.07	58.70	68.30	-9.60	48.20	34.60	8.68	32.78	337	246	PEAK	Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>103.53</td><td>-----</td><td>-----</td><td>93.17</td><td>34.55</td><td>8.57</td><td>32.76</td><td>337</td><td>246</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	103.53	-----	-----	93.17	34.55	8.57	32.76	337	246	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5726.07	58.70	68.30	-9.60	48.20	34.60	8.68	32.78	337	246	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	103.53	-----	-----	93.17	34.55	8.57	32.76	337	246	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2025-01-06  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>94.70</td><td>-----</td><td>-----</td><td>84.34</td><td>34.55</td><td>8.57</td><td>32.76</td><td>337</td><td>246</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	94.70	-----	-----	84.34	34.55	8.57	32.76	337	246	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	94.70	-----	-----	84.34	34.55	8.57	32.76	337	246	AVERAGE																																																																																	



Mode	18																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																																																							
ANT	6																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)						Level (dBuV/m) Date: 2025-01-14 Frequency (MHz)																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>60.38</td><td>37.39</td><td>11.41</td><td>62.96</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.10</td><td>68.30</td><td>-21.20</td><td>58.14</td><td>41.00</td><td>13.14</td><td>65.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	46.22	74.00	-27.78	60.38	37.39	11.41	62.96	--	--	Peak	2	17100.00	47.10	68.30	-21.20	58.14	41.00	13.14	65.18	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>46.47</td><td>74.00</td><td>-27.53</td><td>60.63</td><td>37.39</td><td>11.41</td><td>62.96</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.68</td><td>68.30</td><td>-20.62</td><td>58.72</td><td>41.00</td><td>13.14</td><td>65.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11400.00	46.47	74.00	-27.53	60.63	37.39	11.41	62.96	--	--	Peak	2	17100.00	47.68	68.30	-20.62	58.72	41.00	13.14	65.18	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	46.22	74.00	-27.78	60.38	37.39	11.41	62.96	--	--	Peak																																																																																																													
2	17100.00	47.10	68.30	-21.20	58.14	41.00	13.14	65.18	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11400.00	46.47	74.00	-27.53	60.63	37.39	11.41	62.96	--	--	Peak																																																																																																													
2	17100.00	47.68	68.30	-20.62	58.72	41.00	13.14	65.18	--	--	Peak																																																																																																													



Mode	19																																																		
	Band Edge - L																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																		
ANT	6																																																		
Pol.	Horizontal																																																		
Peak	Fundamental																																																		
	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.15</td><td>58.87</td><td>74.00</td><td>-15.13</td><td>49.70</td><td>33.99</td><td>7.92</td><td>32.74</td><td>370</td><td>325</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.15	58.87	74.00	-15.13	49.70	33.99	7.92	32.74	370	325	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5149.15	58.87	74.00	-15.13	49.70	33.99	7.92	32.74	370	325	PEAK																																								
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.72</td><td>49.67</td><td>54.00</td><td>-4.33</td><td>40.50</td><td>33.99</td><td>7.92</td><td>32.74</td><td>370</td><td>325</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.72	49.67	54.00	-4.33	40.50	33.99	7.92	32.74	370	325	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5149.72	49.67	54.00	-4.33	40.50	33.99	7.92	32.74	370	325	AVERAGE																																								
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>100.28</td><td>-----</td><td>-----</td><td>91.05</td><td>34.01</td><td>7.94</td><td>32.72</td><td>370</td><td>325</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	100.28	-----	-----	91.05	34.01	7.94	32.72	370	325	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5190.00	100.28	-----	-----	91.05	34.01	7.94	32.72	370	325	PEAK																																								
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>92.52</td><td>-----</td><td>-----</td><td>83.29</td><td>34.01</td><td>7.94</td><td>32.72</td><td>370</td><td>325</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	92.52	-----	-----	83.29	34.01	7.94	32.72	370	325	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5190.00	92.52	-----	-----	83.29	34.01	7.94	32.72	370	325	AVERAGE																																								



Mode	19										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz										
ANT	6										
Pol.	Horizontal						Fundamental				
Peak											



		19																																																																																								
Mode		Band Edge - L																																																																																								
		U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																								
ANT		6																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.25</td><td>58.25</td><td>74.00</td><td>-15.75</td><td>49.08</td><td>33.99</td><td>7.92</td><td>32.74</td><td>310</td><td>247</td><td>PEAK</td></tr></table> Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>101.75</td><td>-----</td><td>-----</td><td>92.52</td><td>34.01</td><td>7.94</td><td>32.72</td><td>310</td><td>247</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.25	58.25	74.00	-15.75	49.08	33.99	7.92	32.74	310	247	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	101.75	-----	-----	92.52	34.01	7.94	32.72	310	247	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5147.25	58.25	74.00	-15.75	49.08	33.99	7.92	32.74	310	247	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5190.00	101.75	-----	-----	92.52	34.01	7.94	32.72	310	247	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.53</td><td>49.36</td><td>54.00</td><td>-4.64</td><td>40.19</td><td>33.99</td><td>7.92</td><td>32.74</td><td>310</td><td>247</td><td>AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>91.40</td><td>-----</td><td>-----</td><td>82.17</td><td>34.01</td><td>7.94</td><td>32.72</td><td>310</td><td>247</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.53	49.36	54.00	-4.64	40.19	33.99	7.92	32.74	310	247	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	91.40	-----	-----	82.17	34.01	7.94	32.72	310	247	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.53	49.36	54.00	-4.64	40.19	33.99	7.92	32.74	310	247	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5190.00	91.40	-----	-----	82.17	34.01	7.94	32.72	310	247	AVERAGE																																																																															



Mode	19																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																									
ANT	6																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5364.69</td><td>48.67</td><td>74.00</td><td>-25.33</td><td>38.83</td><td>34.12</td><td>8.37</td><td>32.65</td><td>310</td><td>247</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5364.69	48.67	74.00	-25.33	38.83	34.12	8.37	32.65	310	247	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5364.69	48.67	74.00	-25.33	38.83	34.12	8.37	32.65	310	247	PEAK																															
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.97</td><td>39.48</td><td>54.00</td><td>-14.52</td><td>29.69</td><td>34.11</td><td>8.34</td><td>32.66</td><td>310</td><td>247</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5354.97	39.48	54.00	-14.52	29.69	34.11	8.34	32.66	310	247	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5354.97	39.48	54.00	-14.52	29.69	34.11	8.34	32.66	310	247	AVERAGE																															



Mode	20																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																											
ANT	6																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.73</td><td>53.02</td><td>74.00</td><td>-20.98</td><td>43.85</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>18</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.73	53.02	74.00	-20.98	43.85	33.99	7.92	32.74	300	18	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>103.93</td><td>-----</td><td>-----</td><td>94.62</td><td>34.03</td><td>7.99</td><td>32.71</td><td>300</td><td>18</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	103.93	-----	-----	94.62	34.03	7.99	32.71	300	18	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5149.73	53.02	74.00	-20.98	43.85	33.99	7.92	32.74	300	18	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5230.00	103.93	-----	-----	94.62	34.03	7.99	32.71	300	18	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.96</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>33.69</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>18</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.96	42.86	54.00	-11.14	33.69	33.99	7.92	32.74	300	18	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>93.85</td><td>-----</td><td>-----</td><td>84.51</td><td>34.04</td><td>8.01</td><td>32.71</td><td>300</td><td>18</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	93.85	-----	-----	84.51	34.04	8.01	32.71	300	18	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5149.96	42.86	54.00	-11.14	33.69	33.99	7.92	32.74	300	18	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5230.00	93.85	-----	-----	84.51	34.04	8.01	32.71	300	18	AVERAGE																																																																																	



Mode	20																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																									
ANT	6																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5380.42</td><td>50.23</td><td>74.00</td><td>-23.77</td><td>40.34</td><td>34.13</td><td>8.41</td><td>32.65</td><td>300</td><td>18</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5380.42	50.23	74.00	-23.77	40.34	34.13	8.41	32.65	300	18	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5380.42	50.23	74.00	-23.77	40.34	34.13	8.41	32.65	300	18	PEAK																															
Avg	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.67</td><td>40.20</td><td>54.00</td><td>-13.80</td><td>30.42</td><td>34.11</td><td>8.33</td><td>32.66</td><td>300</td><td>18</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.67	40.20	54.00	-13.80	30.42	34.11	8.33	32.66	300	18	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5351.67	40.20	54.00	-13.80	30.42	34.11	8.33	32.66	300	18	AVERAGE																															



Mode	20																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																										
ANT	6																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.73</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>44.49</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>245</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.73	53.66	74.00	-20.34	44.49	33.99	7.92	32.74	300	245	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>102.40</td><td>-----</td><td>-----</td><td>93.09</td><td>34.03</td><td>7.99</td><td>32.71</td><td>300</td><td>245</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	102.40	-----	-----	93.09	34.03	7.99	32.71	300	245	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.73	53.66	74.00	-20.34	44.49	33.99	7.92	32.74	300	245	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5230.00	102.40	-----	-----	93.09	34.03	7.99	32.71	300	245	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.96</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>33.49</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>245</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.96	42.66	54.00	-11.34	33.49	33.99	7.92	32.74	300	245	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>94.58</td><td>-----</td><td>-----</td><td>85.24</td><td>34.04</td><td>8.01</td><td>32.71</td><td>300</td><td>245</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	94.58	-----	-----	85.24	34.04	8.01	32.71	300	245	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.96	42.66	54.00	-11.34	33.49	33.99	7.92	32.74	300	245	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5230.00	94.58	-----	-----	85.24	34.04	8.01	32.71	300	245	AVERAGE																																																																																



Mode	21																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																																																										
ANT	6																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5003.78</td><td>49.34</td><td>74.00</td><td>-24.66</td><td>40.41</td><td>33.91</td><td>7.82</td><td>32.80</td><td>100</td><td>48</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5003.78	49.34	74.00	-24.66	40.41	33.91	7.82	32.80	100	48	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>101.48</td><td>-----</td><td>-----</td><td>91.99</td><td>34.06</td><td>8.12</td><td>32.69</td><td>100</td><td>48</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	101.48	-----	-----	91.99	34.06	8.12	32.69	100	48	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5003.78	49.34	74.00	-24.66	40.41	33.91	7.82	32.80	100	48	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	101.48	-----	-----	91.99	34.06	8.12	32.69	100	48	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.18</td><td>40.20</td><td>54.00</td><td>-13.80</td><td>31.04</td><td>33.99</td><td>7.91</td><td>32.74</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5144.18	40.20	54.00	-13.80	31.04	33.99	7.91	32.74	100	48	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>94.03</td><td>-----</td><td>-----</td><td>84.56</td><td>34.06</td><td>8.10</td><td>32.69</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	94.03	-----	-----	84.56	34.06	8.10	32.69	100	48	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5144.18	40.20	54.00	-13.80	31.04	33.99	7.91	32.74	100	48	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	94.03	-----	-----	84.56	34.06	8.10	32.69	100	48	AVERAGE																																																																																



Mode	21																																																				
	Band Edge - R																																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																				
ANT	6																																																				
Pol.	Horizontal						Fundamental																																														
Peak	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.37</td><td>57.28</td><td>74.00</td><td>-16.72</td><td>47.50</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>48</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.37	57.28	74.00	-16.72	47.50	34.11	8.33	32.66	100	48	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5350.37	57.28	74.00	-16.72	47.50	34.11	8.33	32.66	100	48	PEAK																																										
Avg	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.75</td><td>45.35</td><td>54.00</td><td>-8.65</td><td>35.57</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.75	45.35	54.00	-8.65	35.57	34.11	8.33	32.66	100	48	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5350.75	45.35	54.00	-8.65	35.57	34.11	8.33	32.66	100	48	AVERAGE																																										







Mode	21																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																																																										
ANT	6																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5111.51</td><td>49.13</td><td>74.00</td><td>-24.87</td><td>40.02</td><td>33.97</td><td>7.89</td><td>32.75</td><td>298</td><td>259</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5111.51	49.13	74.00	-24.87	40.02	33.97	7.89	32.75	298	259	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>102.23</td><td>-----</td><td>-----</td><td>92.74</td><td>34.06</td><td>8.12</td><td>32.69</td><td>298</td><td>259</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	102.23	-----	-----	92.74	34.06	8.12	32.69	298	259	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5111.51	49.13	74.00	-24.87	40.02	33.97	7.89	32.75	298	259	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	102.23	-----	-----	92.74	34.06	8.12	32.69	298	259	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.51</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>31.16</td><td>33.98</td><td>7.91</td><td>32.74</td><td>298</td><td>259</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5138.51	40.31	54.00	-13.69	31.16	33.98	7.91	32.74	298	259	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>92.22</td><td>-----</td><td>-----</td><td>82.73</td><td>34.06</td><td>8.12</td><td>32.69</td><td>298</td><td>259</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	92.22	-----	-----	82.73	34.06	8.12	32.69	298	259	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5138.51	40.31	54.00	-13.69	31.16	33.98	7.91	32.74	298	259	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	92.22	-----	-----	82.73	34.06	8.12	32.69	298	259	AVERAGE																																																																																



Mode	22																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																																																																										
ANT	6																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5012.40</td><td>49.03</td><td>74.00</td><td>-24.97</td><td>40.08</td><td>33.91</td><td>7.83</td><td>32.79</td><td>100</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5012.40	49.03	74.00	-24.97	40.08	33.91	7.83	32.79	100	41	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>100.68</td><td>-----</td><td>-----</td><td>91.03</td><td>34.09</td><td>8.23</td><td>32.67</td><td>100</td><td>41</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	100.68	-----	-----	91.03	34.09	8.23	32.67	100	41	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5012.40	49.03	74.00	-24.97	40.08	33.91	7.83	32.79	100	41	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5310.00	100.68	-----	-----	91.03	34.09	8.23	32.67	100	41	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5099.51</td><td>40.12</td><td>54.00</td><td>-13.88</td><td>31.03</td><td>33.96</td><td>7.89</td><td>32.76</td><td>100</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5099.51	40.12	54.00	-13.88	31.03	33.96	7.89	32.76	100	41	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>92.75</td><td>-----</td><td>-----</td><td>83.12</td><td>34.08</td><td>8.22</td><td>32.67</td><td>100</td><td>41</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	92.75	-----	-----	83.12	34.08	8.22	32.67	100	41	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5099.51	40.12	54.00	-13.88	31.03	33.96	7.89	32.76	100	41	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5310.00	92.75	-----	-----	83.12	34.08	8.22	32.67	100	41	AVERAGE																																																																																

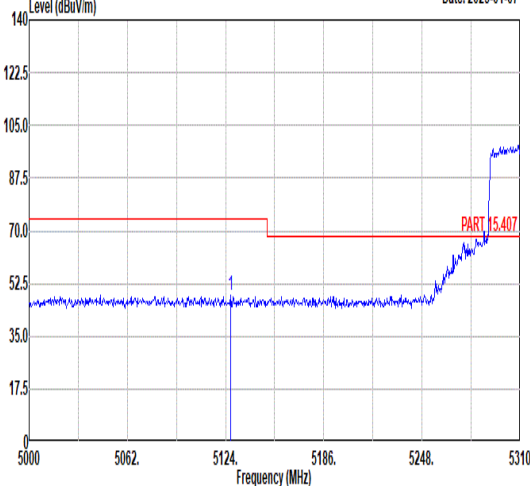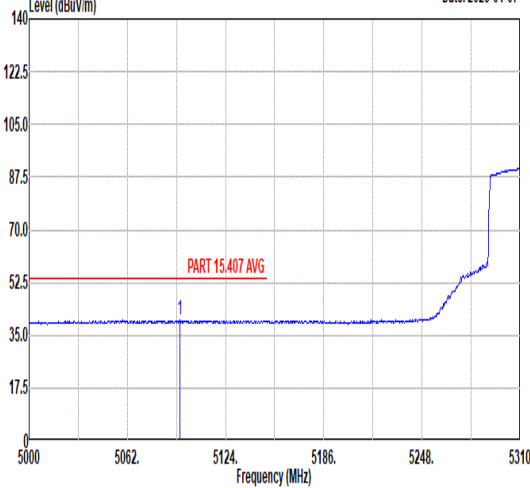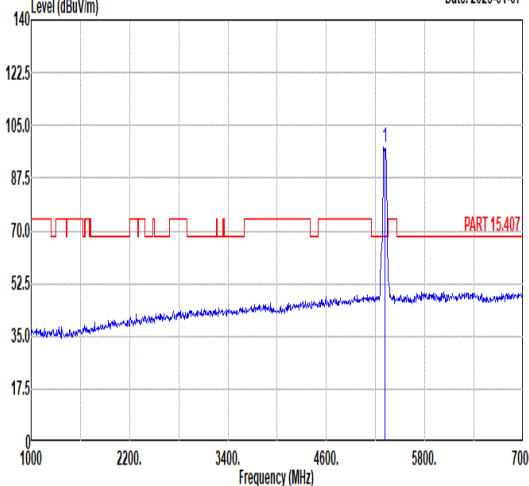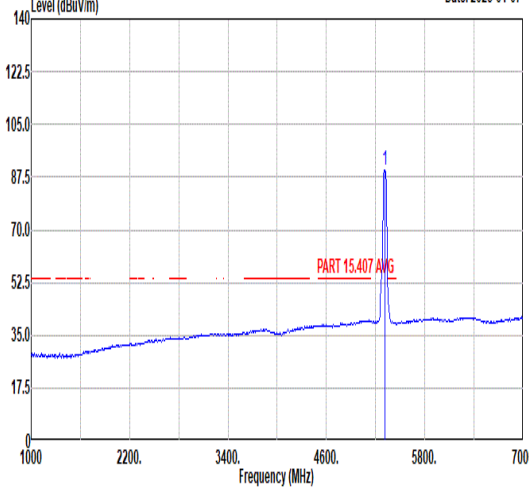

		22																																																	
Mode	Band Edge - L																																																		
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																																		
ANT	6																																																		
Pol.	Vertical																																																		
Peak	Fundamental																																																		
	Date: 2025-01-07																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5127.10</td><td>48.87</td><td>74.00</td><td>-25.13</td><td>39.74</td><td>33.98</td><td>7.90</td><td>32.75</td><td>305</td><td>255</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5127.10	48.87	74.00	-25.13	39.74	33.98	7.90	32.75	305	255	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5127.10	48.87	74.00	-25.13	39.74	33.98	7.90	32.75	305	255	PEAK																																								
Avg	Date: 2025-01-07																																																		
																																																			
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5095.17</td><td>40.05</td><td>54.00</td><td>-13.95</td><td>30.97</td><td>33.96</td><td>7.88</td><td>32.76</td><td>305</td><td>255</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5095.17	40.05	54.00	-13.95	30.97	33.96	7.88	32.76	305	255	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5095.17	40.05	54.00	-13.95	30.97	33.96	7.88	32.76	305	255	AVERAGE																																								
Fundamental	Date: 2025-01-07																																																		
																																																			
Fundamental	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>97.97</td><td>-----</td><td>-----</td><td>88.39</td><td>34.08</td><td>8.18</td><td>32.68</td><td>305</td><td>255</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	97.97	-----	-----	88.39	34.08	8.18	32.68	305	255	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5310.00	97.97	-----	-----	88.39	34.08	8.18	32.68	305	255	PEAK																																								
Avg	Date: 2025-01-07																																																		
																																																			
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>89.93</td><td>-----</td><td>-----</td><td>80.28</td><td>34.09</td><td>8.23</td><td>32.67</td><td>305</td><td>255</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	89.93	-----	-----	80.28	34.09	8.23	32.67	305	255	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5310.00	89.93	-----	-----	80.28	34.09	8.23	32.67	305	255	AVERAGE																																								

Mode

23

Band Edge - L

U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz

ANT

6

Pol.

Horizontal

Peak

Level (dBuV/m)

Date: 2025-01-07

Frequency (MHz)

	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1 5459.76	58.20	74.00	-15.80	48.23	34.17	8.41	32.61	100
2 5462.48	64.39	68.30	-3.91	54.42	34.17	8.41	32.61	100

Fundamental

Peak

Level (dBuV/m)

Date: 2025-01-07

Frequency (MHz)

	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1 5510.00	103.32	-----	-----	93.38	34.20	8.35	32.61	100

Avg

Horizontal

Avg

Level (dBuV/m)

Date: 2025-01-07

Frequency (MHz)

	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1 5459.92	47.68	54.00	-6.32	37.71	34.17	8.41	32.61	100

Fundamental

Avg

Level (dBuV/m)

Date: 2025-01-07

Frequency (MHz)

	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm
1 5510.00	95.07	-----	-----	85.13	34.20	8.35	32.61	100



Mode	23																																							
	Band Edge - R																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																							
ANT	6																																							
Pol.	Horizontal	Fundamental																																						
Peak	Date: 2025-01-07 <table><tr><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5737.72</td><td>48.68</td><td>68.30</td><td>-19.62</td><td>38.13</td><td>34.62</td><td>8.72</td><td>32.79</td><td>100</td><td>56 PEAK</td></tr></table>	Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5737.72	48.68	68.30	-19.62	38.13	34.62	8.72	32.79	100	56 PEAK	Blank
Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1	5737.72	48.68	68.30	-19.62	38.13	34.62	8.72	32.79	100	56 PEAK																														







Mode	23																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.64</td><td>55.82</td><td>74.00</td><td>-18.18</td><td>45.85</td><td>34.17</td><td>8.41</td><td>32.61</td><td>313</td><td>261</td><td>PEAK</td></tr><tr><td>2</td><td>5468.40</td><td>62.12</td><td>68.30</td><td>-6.18</td><td>52.15</td><td>34.18</td><td>8.40</td><td>32.61</td><td>313</td><td>261</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.64	55.82	74.00	-18.18	45.85	34.17	8.41	32.61	313	261	PEAK	2	5468.40	62.12	68.30	-6.18	52.15	34.18	8.40	32.61	313	261	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>100.27</td><td>-----</td><td>-----</td><td>90.34</td><td>34.21</td><td>8.34</td><td>32.62</td><td>313</td><td>261</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	100.27	-----	-----	90.34	34.21	8.34	32.62	313	261	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5458.64	55.82	74.00	-18.18	45.85	34.17	8.41	32.61	313	261	PEAK																																																																																													
2	5468.40	62.12	68.30	-6.18	52.15	34.18	8.40	32.61	313	261	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5510.00	100.27	-----	-----	90.34	34.21	8.34	32.62	313	261	PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.28</td><td>44.21</td><td>54.00</td><td>-9.79</td><td>34.24</td><td>34.17</td><td>8.41</td><td>32.61</td><td>313</td><td>261</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.28	44.21	54.00	-9.79	34.24	34.17	8.41	32.61	313	261	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>91.82</td><td>-----</td><td>-----</td><td>81.89</td><td>34.21</td><td>8.34</td><td>32.62</td><td>313</td><td>261</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	91.82	-----	-----	81.89	34.21	8.34	32.62	313	261	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5459.28	44.21	54.00	-9.79	34.24	34.17	8.41	32.61	313	261	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5510.00	91.82	-----	-----	81.89	34.21	8.34	32.62	313	261	AVERAGE																																																																																													




Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	6																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5750.47</td><td>48.21</td><td>68.30</td><td>-20.09</td><td>37.59</td><td>34.65</td><td>8.77</td><td>32.80</td><td>313</td><td>261</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5750.47	48.21	68.30	-20.09	37.59	34.65	8.77	32.80	313	261	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5750.47	48.21	68.30	-20.09	37.59	34.65	8.77	32.80	313	261	PEAK																															

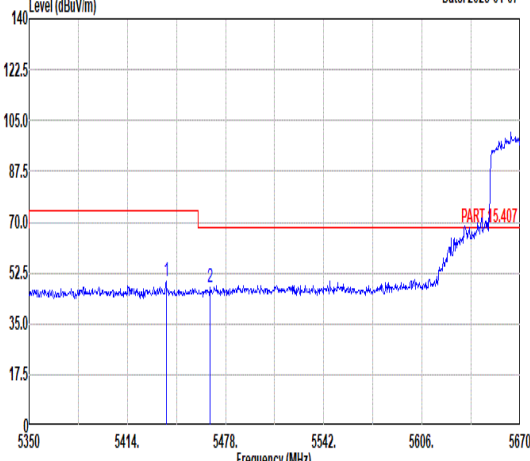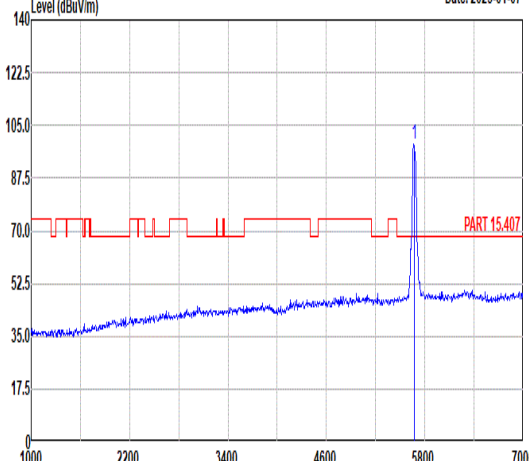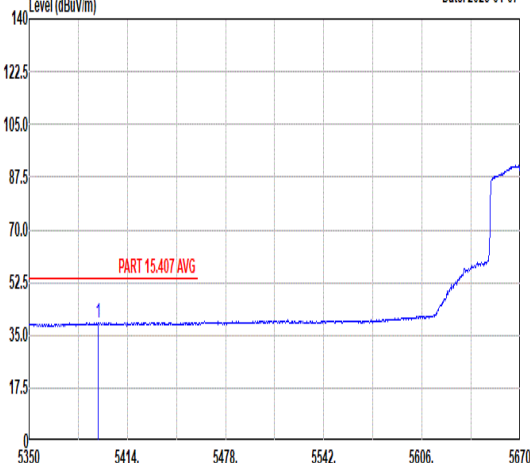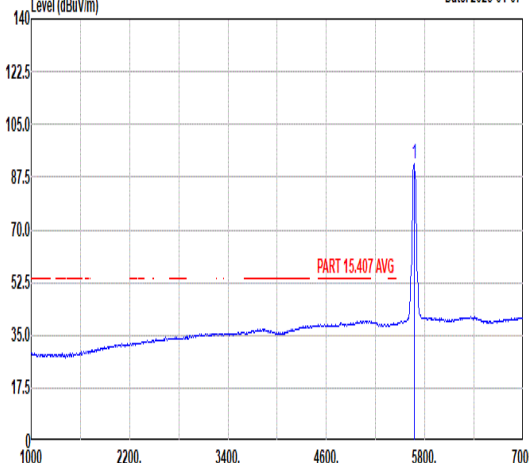

Mode	24																																																																																																											
	Band Edge - L																																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																																																											
ANT	6																																																																																																											
Pol.	Horizontal						Fundamental																																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5439.28</td><td>49.43</td><td>74.00</td><td>-24.57</td><td>39.45</td><td>34.16</td><td>8.44</td><td>32.62</td><td>100</td><td>302</td><td>PEAK</td></tr><tr><td>2</td><td>5467.76</td><td>47.81</td><td>68.30</td><td>-20.49</td><td>37.84</td><td>34.18</td><td>8.40</td><td>32.61</td><td>100</td><td>302</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5439.28	49.43	74.00	-24.57	39.45	34.16	8.44	32.62	100	302	PEAK	2	5467.76	47.81	68.30	-20.49	37.84	34.18	8.40	32.61	100	302	PEAK	Level (dBuV/m) Date: 2025-01-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>98.63</td><td>-----</td><td>-----</td><td>88.43</td><td>34.49</td><td>8.44</td><td>32.73</td><td>100</td><td>302</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	98.63	-----	-----	88.43	34.49	8.44	32.73	100	302	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5439.28	49.43	74.00	-24.57	39.45	34.16	8.44	32.62	100	302	PEAK																																																																																																	
2	5467.76	47.81	68.30	-20.49	37.84	34.18	8.40	32.61	100	302	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5670.00	98.63	-----	-----	88.43	34.49	8.44	32.73	100	302	PEAK																																																																																																	
Avg	Level (dBuV/m) Date: 2025-01-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5395.12</td><td>39.35</td><td>54.00</td><td>-14.65</td><td>29.40</td><td>34.14</td><td>8.45</td><td>32.64</td><td>100</td><td>302</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5395.12	39.35	54.00	-14.65	29.40	34.14	8.45	32.64	100	302	AVERAGE	Level (dBuV/m) Date: 2025-01-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>91.74</td><td>-----</td><td>-----</td><td>81.52</td><td>34.50</td><td>8.46</td><td>32.74</td><td>100</td><td>302</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	91.74	-----	-----	81.52	34.50	8.46	32.74	100	302	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5395.12	39.35	54.00	-14.65	29.40	34.14	8.45	32.64	100	302	AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5670.00	91.74	-----	-----	81.52	34.50	8.46	32.74	100	302	AVERAGE																																																																																																	


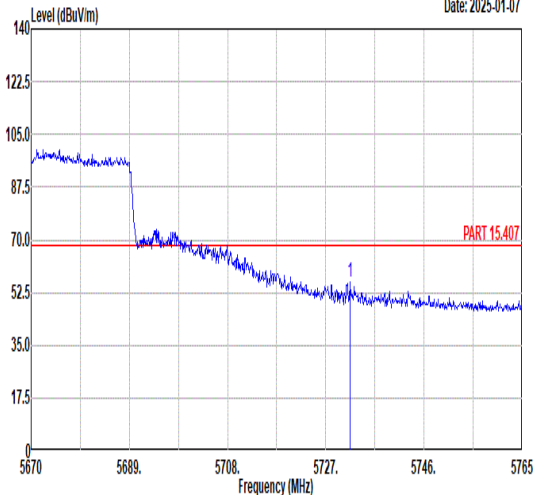


Mode	24																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																									
ANT	6																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5731.75</td><td>56.05</td><td>68.30</td><td>-12.25</td><td>45.52</td><td>34.61</td><td>8.70</td><td>32.78</td><td>100</td><td>302</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5731.75	56.05	68.30	-12.25	45.52	34.61	8.70	32.78	100	302	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5731.75	56.05	68.30	-12.25	45.52	34.61	8.70	32.78	100	302	PEAK																															



Mode	24																																																																																																		
	Band Edge – L																																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																																																		
ANT	6																																																																																																		
Pol.	Vertical					Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5365.04</td><td>48.14</td><td>74.00</td><td>-25.86</td><td>38.30</td><td>34.12</td><td>8.37</td><td>32.65</td><td>299</td><td>247 PEAK</td></tr><tr><td>2</td><td>5468.40</td><td>48.24</td><td>68.30</td><td>-20.06</td><td>38.27</td><td>34.18</td><td>8.40</td><td>32.61</td><td>299</td><td>247 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5365.04	48.14	74.00	-25.86	38.30	34.12	8.37	32.65	299	247 PEAK	2	5468.40	48.24	68.30	-20.06	38.27	34.18	8.40	32.61	299	247 PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>101.46</td><td>-----</td><td>-----</td><td>91.26</td><td>34.49</td><td>8.44</td><td>32.73</td><td>299</td><td>247 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	101.46	-----	-----	91.26	34.49	8.44	32.73	299	247 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5365.04	48.14	74.00	-25.86	38.30	34.12	8.37	32.65	299	247 PEAK																																																																																									
2	5468.40	48.24	68.30	-20.06	38.27	34.18	8.40	32.61	299	247 PEAK																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5670.00	101.46	-----	-----	91.26	34.49	8.44	32.73	299	247 PEAK																																																																																									
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5418.16</td><td>39.77</td><td>54.00</td><td>-14.23</td><td>29.78</td><td>34.15</td><td>8.47</td><td>32.63</td><td>299</td><td>247 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5418.16	39.77	54.00	-14.23	29.78	34.15	8.47	32.63	299	247 AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>93.52</td><td>-----</td><td>-----</td><td>83.30</td><td>34.50</td><td>8.46</td><td>32.74</td><td>299</td><td>247 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	93.52	-----	-----	83.30	34.50	8.46	32.74	299	247 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5418.16	39.77	54.00	-14.23	29.78	34.15	8.47	32.63	299	247 AVERAGE																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5670.00	93.52	-----	-----	83.30	34.50	8.46	32.74	299	247 AVERAGE																																																																																									

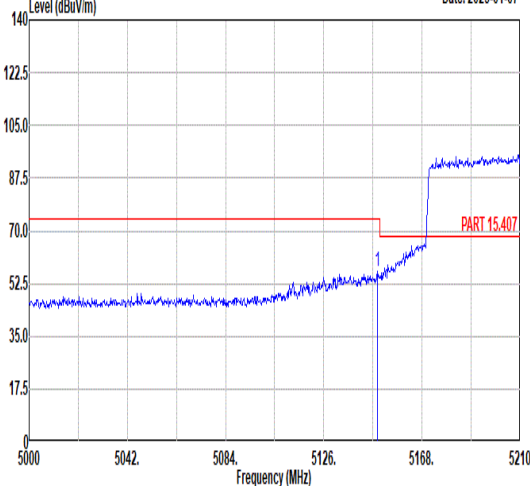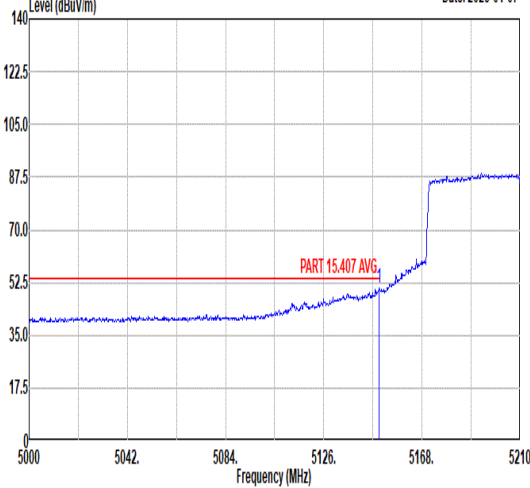

		25																																															
Mode	Band Edge – L																																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																
ANT	6																																																
Pol.	Horizontal																																																
Peak	Fundamental																																																
	Date: 2025-01-07																																																
Peak																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.10</td><td>56.53</td><td>74.00</td><td>-17.47</td><td>47.36</td><td>33.99</td><td>7.92</td><td>32.74</td><td>229</td><td>0° PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.10	56.53	74.00	-17.47	47.36	33.99	7.92	32.74	229
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																								
1	5149.10	56.53	74.00	-17.47	47.36	33.99	7.92	32.74	229	0° PEAK																																							
Avg	Date: 2025-01-07																																																
																																																	
Avg	Date: 2025-01-07																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.73</td><td>50.50</td><td>54.00</td><td>-3.50</td><td>41.33</td><td>33.99</td><td>7.92</td><td>32.74</td><td>229</td><td>0° AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.73	50.50	54.00	-3.50	41.33	33.99	7.92	32.74	229
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																								
1	5149.73	50.50	54.00	-3.50	41.33	33.99	7.92	32.74	229	0° AVERAGE																																							



Mode	25									
	Band Edge – R									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz									
ANT	6									
Pol.	Horizontal					Fundamental				
Peak										





		25																																																																																									
Mode		Band Edge – L																																																																																									
		U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																									
ANT		6																																																																																									
Pol.		Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>57.11</td><td>74.00</td><td>-16.89</td><td>47.94</td><td>33.99</td><td>7.92</td><td>32.74</td><td>321</td><td>254</td><td>PEAK</td></tr></table> Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>96.16</td><td>-----</td><td>-----</td><td>86.86</td><td>34.03</td><td>7.98</td><td>32.71</td><td>321</td><td>254</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	57.11	74.00	-16.89	47.94	33.99	7.92	32.74	321	254	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	96.16	-----	-----	86.86	34.03	7.98	32.71	321	254	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.94	57.11	74.00	-16.89	47.94	33.99	7.92	32.74	321	254	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5210.00	96.16	-----	-----	86.86	34.03	7.98	32.71	321	254	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.52</td><td>50.52</td><td>54.00</td><td>-3.48</td><td>41.35</td><td>33.99</td><td>7.92</td><td>32.74</td><td>321</td><td>254</td><td>AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>88.91</td><td>-----</td><td>-----</td><td>79.61</td><td>34.03</td><td>7.98</td><td>32.71</td><td>321</td><td>254</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.52	50.52	54.00	-3.48	41.35	33.99	7.92	32.74	321	254	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	88.91	-----	-----	79.61	34.03	7.98	32.71	321	254	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.52	50.52	54.00	-3.48	41.35	33.99	7.92	32.74	321	254	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5210.00	88.91	-----	-----	79.61	34.03	7.98	32.71	321	254	AVERAGE																																																																																






Mode	25																																									
	Band Edge – R																																									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																									
ANT	6																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-01-07 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5367.25</td><td>48.43</td><td>74.00</td><td>-25.57</td><td>38.59</td><td>34.12</td><td>8.37</td><td>32.65</td><td>321</td><td>254</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5367.25	48.43	74.00	-25.57	38.59	34.12	8.37	32.65	321	254	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5367.25	48.43	74.00	-25.57	38.59	34.12	8.37	32.65	321	254	PEAK																															
Avg	Date: 2025-01-07 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.50</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>31.78</td><td>34.11</td><td>8.33</td><td>32.66</td><td>321</td><td>254</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.50	41.56	54.00	-12.44	31.78	34.11	8.33	32.66	321	254	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5350.50	41.56	54.00	-12.44	31.78	34.11	8.33	32.66	321	254	AVERAGE																															

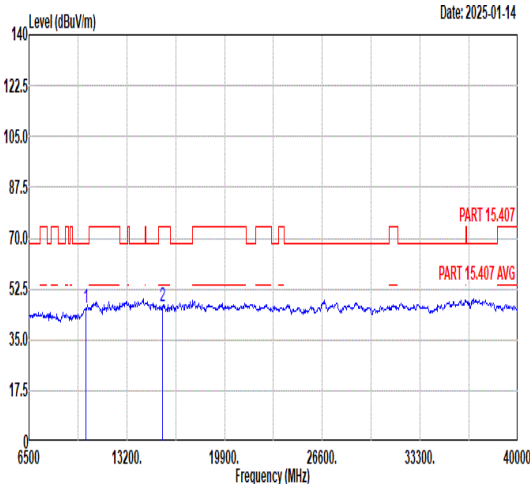
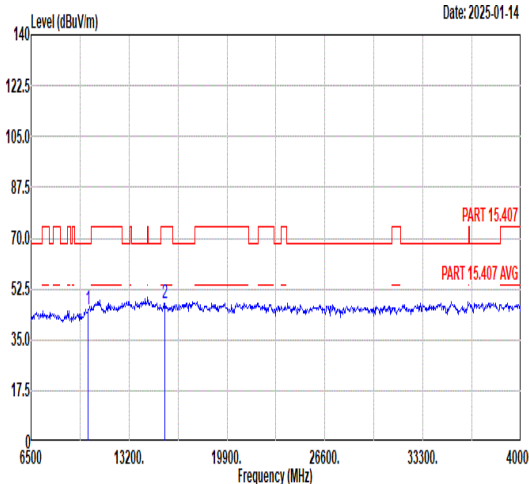


Mode	25																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																					
ANT	6																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10420.00</td><td>46.06</td><td>68.30</td><td>-22.24</td><td>62.71</td><td>37.30</td><td>10.77</td><td>64.72</td></tr><tr><td>2</td><td>15630.00</td><td>46.75</td><td>74.00</td><td>-27.25</td><td>58.14</td><td>39.45</td><td>12.72</td><td>63.56</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10420.00	46.06	68.30	-22.24	62.71	37.30	10.77	64.72	2	15630.00	46.75	74.00	-27.25	58.14	39.45	12.72	63.56	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10420.00</td><td>45.63</td><td>68.30</td><td>-22.67</td><td>62.28</td><td>37.30</td><td>10.77</td><td>64.72</td></tr><tr><td>2</td><td>15630.00</td><td>47.72</td><td>74.00</td><td>-26.28</td><td>59.11</td><td>39.45</td><td>12.72</td><td>63.56</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10420.00	45.63	68.30	-22.67	62.28	37.30	10.77	64.72	2	15630.00	47.72	74.00	-26.28	59.11	39.45	12.72	63.56
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10420.00	46.06	68.30	-22.24	62.71	37.30	10.77	64.72																																																																																														
2	15630.00	46.75	74.00	-27.25	58.14	39.45	12.72	63.56																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10420.00	45.63	68.30	-22.67	62.28	37.30	10.77	64.72																																																																																														
2	15630.00	47.72	74.00	-26.28	59.11	39.45	12.72	63.56																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10420.00</td><td>46.06</td><td>68.30</td><td>-22.24</td><td>62.71</td><td>37.30</td><td>10.77</td><td>64.72</td></tr><tr><td>2</td><td>15630.00</td><td>46.75</td><td>74.00</td><td>-27.25</td><td>58.14</td><td>39.45</td><td>12.72</td><td>63.56</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10420.00	46.06	68.30	-22.24	62.71	37.30	10.77	64.72	2	15630.00	46.75	74.00	-27.25	58.14	39.45	12.72	63.56	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10420.00</td><td>45.63</td><td>68.30</td><td>-22.67</td><td>62.28</td><td>37.30</td><td>10.77</td><td>64.72</td></tr><tr><td>2</td><td>15630.00</td><td>47.72</td><td>74.00</td><td>-26.28</td><td>59.11</td><td>39.45</td><td>12.72</td><td>63.56</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10420.00	45.63	68.30	-22.67	62.28	37.30	10.77	64.72	2	15630.00	47.72	74.00	-26.28	59.11	39.45	12.72	63.56
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10420.00	46.06	68.30	-22.24	62.71	37.30	10.77	64.72																																																																																														
2	15630.00	46.75	74.00	-27.25	58.14	39.45	12.72	63.56																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10420.00	45.63	68.30	-22.67	62.28	37.30	10.77	64.72																																																																																														
2	15630.00	47.72	74.00	-26.28	59.11	39.45	12.72	63.56																																																																																														

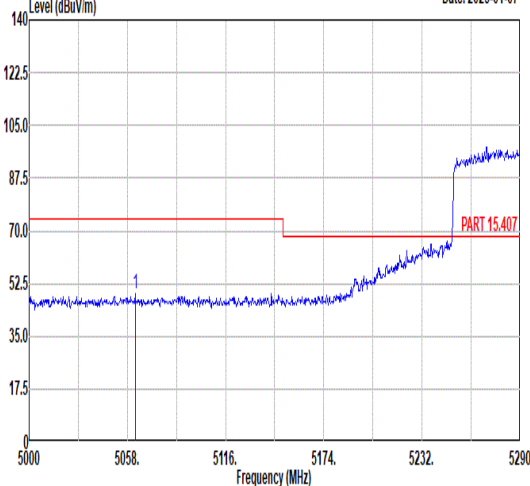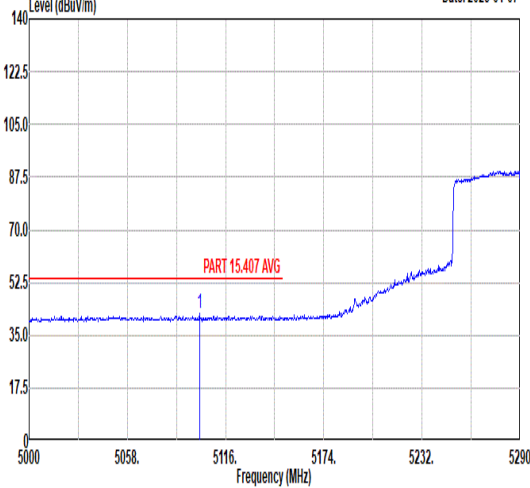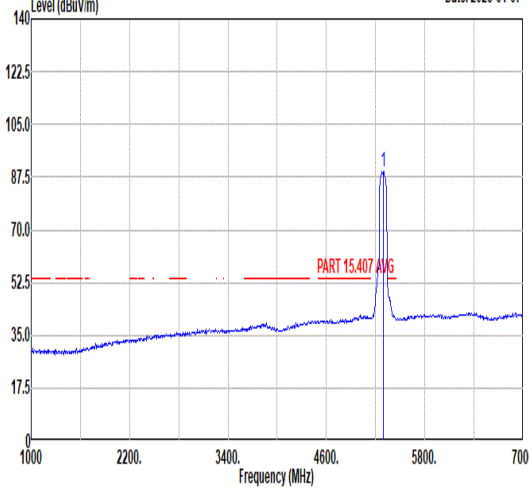

		26																																																		
Mode	Band Edge – L																																																			
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																			
ANT	6																																																			
Pol.	Horizontal																																																			
Peak	Fundamental																																																			
	Date: 2025-01-07																																																			
Peak	 Level (dBuV/m) Frequency (MHz) 1 5062.64 49.01 74.00 -24.99 39.98 33.94 7.86 32.77 100 42 PEAK																																																			
	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5062.64</td><td>49.01</td><td>74.00</td><td>-24.99</td><td>39.98</td><td>33.94</td><td>7.86</td><td>32.77</td><td>100</td><td>42</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5062.64	49.01	74.00	-24.99	39.98	33.94	7.86	32.77	100	42	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1 5062.64	49.01	74.00	-24.99	39.98	33.94	7.86	32.77	100	42	PEAK																																										
Avg	Date: 2025-01-07																																																			
	 Level (dBuV/m) Frequency (MHz) 1 5100.63 42.07 54.00 -11.93 32.98 33.96 7.89 32.76 100 42 AVERAGE																																																			
Avg	Date: 2025-01-07																																																			
	 Level (dBuV/m) Frequency (MHz) 1 5290.00 89.09 ----- 79.60 34.06 8.12 32.69 100 42 AVERAGE																																																			
Avg	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5100.63</td><td>42.07</td><td>54.00</td><td>-11.93</td><td>32.98</td><td>33.96</td><td>7.89</td><td>32.76</td><td>100</td><td>42</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5100.63	42.07	54.00	-11.93	32.98	33.96	7.89	32.76	100	42	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1 5100.63	42.07	54.00	-11.93	32.98	33.96	7.89	32.76	100	42	AVERAGE																																										
Avg	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5290.00</td><td>89.09</td><td>-----</td><td>-----</td><td>79.60</td><td>34.06</td><td>8.12</td><td>32.69</td><td>100</td><td>42</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5290.00	89.09	-----	-----	79.60	34.06	8.12	32.69	100	42	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1 5290.00	89.09	-----	-----	79.60	34.06	8.12	32.69	100	42	AVERAGE																																										

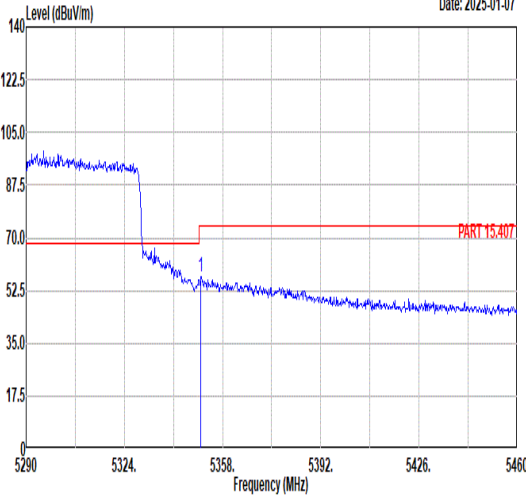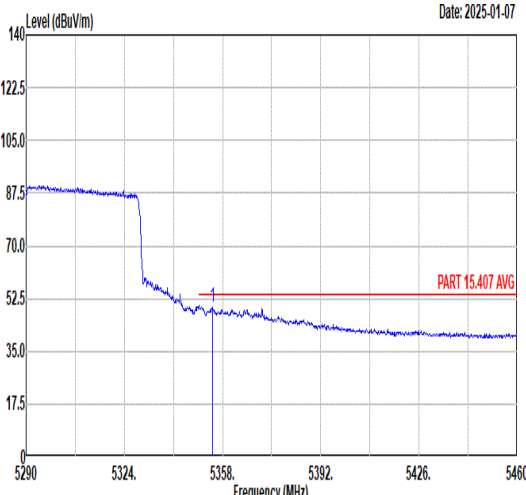

Mode	26																																									
	Band Edge – R																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																									
ANT	6																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.52</td><td>57.21</td><td>74.00</td><td>-16.79</td><td>47.43</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>42</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.52	57.21	74.00	-16.79	47.43	34.11	8.33	32.66	100	42	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5350.52	57.21	74.00	-16.79	47.43	34.11	8.33	32.66	100	42	PEAK																															
Avg	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.60</td><td>49.81</td><td>54.00</td><td>-4.19</td><td>40.02</td><td>34.11</td><td>8.34</td><td>32.66</td><td>100</td><td>42</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5354.60	49.81	54.00	-4.19	40.02	34.11	8.34	32.66	100	42	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5354.60	49.81	54.00	-4.19	40.02	34.11	8.34	32.66	100	42	AVERAGE																															



		26									
Mode	Band Edge – L										
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz										
ANT	6										
Pol.	Vertical										
Peak	<										



Mode	26																																							
	Band Edge – R																																							
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																							
ANT	6																																							
Pol.	Vertical	Fundamental																																						
Peak	Date: 2025-01-07 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.69</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>45.43</td><td>34.11</td><td>8.33</td><td>32.66</td><td>303</td><td>259 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.69	55.21	74.00	-18.79	45.43	34.11	8.33	32.66	303	259 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5350.69	55.21	74.00	-18.79	45.43	34.11	8.33	32.66	303	259 PEAK																															
Avg	Date: 2025-01-07 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.01</td><td>48.43</td><td>54.00</td><td>-5.57</td><td>38.65</td><td>34.11</td><td>8.33</td><td>32.66</td><td>303</td><td>259 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.01	48.43	54.00	-5.57	38.65	34.11	8.33	32.66	303	259 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1 5350.01	48.43	54.00	-5.57	38.65	34.11	8.33	32.66	303	259 AVERAGE																															







Mode	27																																																																																																							
	Band Edge – L																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																							
ANT	6																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.28</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>45.79</td><td>34.17</td><td>8.41</td><td>32.61</td><td>100</td><td>62</td><td>PEAK</td></tr><tr><td>2</td><td>5469.52</td><td>56.59</td><td>68.30</td><td>-11.71</td><td>46.62</td><td>34.18</td><td>8.40</td><td>32.61</td><td>100</td><td>62</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.28	55.76	74.00	-18.24	45.79	34.17	8.41	32.61	100	62	PEAK	2	5469.52	56.59	68.30	-11.71	46.62	34.18	8.40	32.61	100	62	PEAK	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>99.25</td><td>-----</td><td>-----</td><td>89.32</td><td>34.23</td><td>8.32</td><td>32.62</td><td>100</td><td>62</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	99.25	-----	-----	89.32	34.23	8.32	32.62	100	62	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5457.28	55.76	74.00	-18.24	45.79	34.17	8.41	32.61	100	62	PEAK																																																																																													
2	5469.52	56.59	68.30	-11.71	46.62	34.18	8.40	32.61	100	62	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5530.00	99.25	-----	-----	89.32	34.23	8.32	32.62	100	62	PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.18</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>39.18</td><td>34.17</td><td>8.41</td><td>32.61</td><td>100</td><td>62</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.18	49.15	54.00	-4.85	39.18	34.17	8.41	32.61	100	62	AVERAGE	Level (dBuV/m) Date: 2025-01-07 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>90.70</td><td>-----</td><td>-----</td><td>80.77</td><td>34.22</td><td>8.33</td><td>32.62</td><td>100</td><td>62</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	90.70	-----	-----	80.77	34.22	8.33	32.62	100	62	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5458.18	49.15	54.00	-4.85	39.18	34.17	8.41	32.61	100	62	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5530.00	90.70	-----	-----	80.77	34.22	8.33	32.62	100	62	AVERAGE																																																																																													



Mode	27																																										
	Band Edge – R																																										
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																										
ANT	6																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.99</td><td>49.27</td><td>68.30</td><td>-19.03</td><td>38.77</td><td>34.60</td><td>8.68</td><td>32.78</td><td>100</td><td>62</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.99	49.27	68.30	-19.03	38.77	34.60	8.68	32.78	100	62	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5725.99	49.27	68.30	-19.03	38.77	34.60	8.68	32.78	100	62	PEAK																																

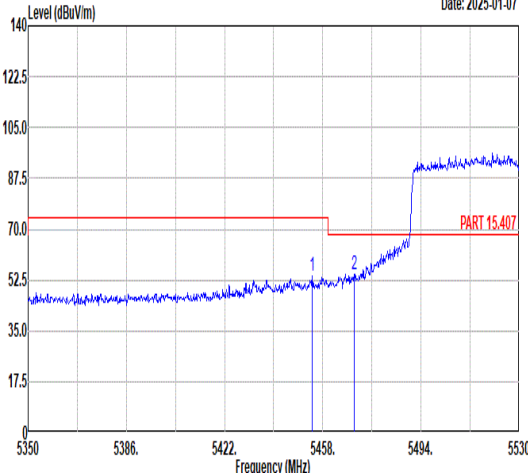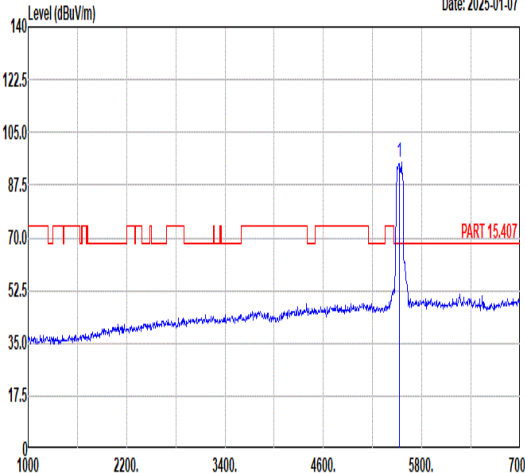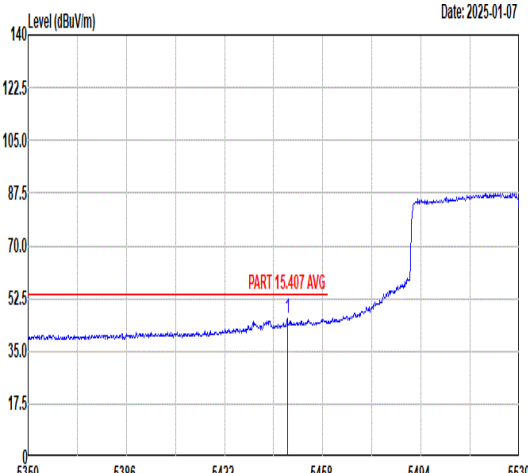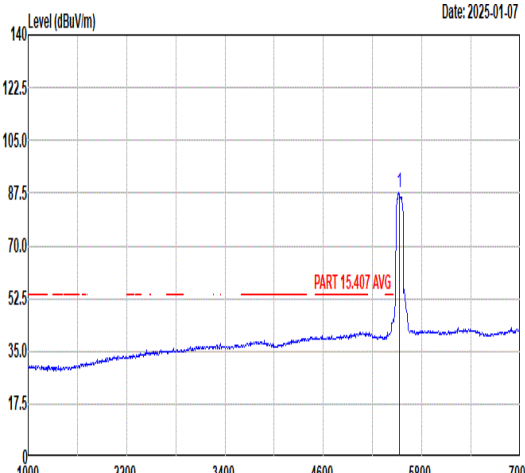

Mode	27																																																																																													
	Band Edge – L																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																													
ANT	6																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.04</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>44.11</td><td>34.17</td><td>8.42</td><td>32.62</td><td>305</td><td>255</td><td>PEAK</td></tr><tr><td>2</td><td>5469.52</td><td>54.62</td><td>68.30</td><td>-13.68</td><td>44.65</td><td>34.18</td><td>8.40</td><td>32.61</td><td>305</td><td>255</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5454.04	54.08	74.00	-19.92	44.11	34.17	8.42	32.62	305	255	PEAK	2	5469.52	54.62	68.30	-13.68	44.65	34.18	8.40	32.61	305	255	PEAK	Level (dBuV/m) Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>94.91</td><td>-----</td><td>-----</td><td>84.99</td><td>34.29</td><td>8.28</td><td>32.65</td><td>305</td><td>255</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	94.91	-----	-----	84.99	34.29	8.28	32.65	305	255	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5454.04	54.08	74.00	-19.92	44.11	34.17	8.42	32.62	305	255	PEAK																																																																																			
2	5469.52	54.62	68.30	-13.68	44.65	34.18	8.40	32.61	305	255	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5530.00	94.91	-----	-----	84.99	34.29	8.28	32.65	305	255	PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5469.52</td><td>54.92</td><td>54.00</td><td>-8.08</td><td>35.95</td><td>34.16</td><td>8.43</td><td>32.62</td><td>305</td><td>255</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5469.52	54.92	54.00	-8.08	35.95	34.16	8.43	32.62	305	255	AVERAGE	Level (dBuV/m) Date: 2025-01-07 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>87.52</td><td>-----</td><td>-----</td><td>77.59</td><td>34.22</td><td>8.33</td><td>32.62</td><td>305</td><td>255</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5530.00	87.52	-----	-----	77.59	34.22	8.33	32.62	305	255	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5469.52	54.92	54.00	-8.08	35.95	34.16	8.43	32.62	305	255	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5530.00	87.52	-----	-----	77.59	34.22	8.33	32.62	305	255	AVERAGE																																																																																			



		28																																																												
Mode	Band Edge – L																																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																													
ANT	6																																																													
Pol.	Horizontal																																																													
Peak	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5422.28</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>38.63</td><td>34.15</td><td>8.46</td><td>32.63</td><td>100</td><td>54 PEAK</td></tr><tr><td>2</td><td>5469.60</td><td>50.57</td><td>68.30</td><td>-17.73</td><td>40.60</td><td>34.18</td><td>8.40</td><td>32.61</td><td>100</td><td>54 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5422.28	48.61	74.00	-25.39	38.63	34.15	8.46	32.63	100	54 PEAK	2	5469.60	50.57	68.30	-17.73	40.60	34.18	8.40	32.61	100	54 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																					
1	5422.28	48.61	74.00	-25.39	38.63	34.15	8.46	32.63	100	54 PEAK																																																				
2	5469.60	50.57	68.30	-17.73	40.60	34.18	8.40	32.61	100	54 PEAK																																																				
Fundamental	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>100.24</td><td>-----</td><td>-----</td><td>90.27</td><td>34.40</td><td>8.26</td><td>32.69</td><td>100</td><td>54 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5610.00	100.24	-----	-----	90.27	34.40	8.26	32.69	100	54 PEAK											
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																					
1	5610.00	100.24	-----	-----	90.27	34.40	8.26	32.69	100	54 PEAK																																																				
Avg	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.46</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>32.39</td><td>34.17</td><td>8.41</td><td>32.61</td><td>100</td><td>54 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.46	42.36	54.00	-11.64	32.39	34.17	8.41	32.61	100	54 AVERAGE											
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																					
1	5459.46	42.36	54.00	-11.64	32.39	34.17	8.41	32.61	100	54 AVERAGE																																																				
AVERAGE	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>92.03</td><td>-----</td><td>-----</td><td>82.06</td><td>34.40</td><td>8.26</td><td>32.69</td><td>100</td><td>54 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5610.00	92.03	-----	-----	82.06	34.40	8.26	32.69	100	54 AVERAGE											
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																					
1	5610.00	92.03	-----	-----	82.06	34.40	8.26	32.69	100	54 AVERAGE																																																				



		28																																																																																																																				
Mode	Band Edge – L																																																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																																					
ANT	6																																																																																																																					
Pol.	Vertical																																																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.00</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>39.66</td><td>34.17</td><td>8.42</td><td>32.62</td><td>329</td><td>247</td><td>PEAK</td></tr><tr><td>2</td><td>5465.96</td><td>50.75</td><td>68.30</td><td>-17.55</td><td>40.78</td><td>34.18</td><td>8.40</td><td>32.61</td><td>329</td><td>247</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.00	49.63	74.00	-24.37	39.66	34.17	8.42	32.62	329	247	PEAK	2	5465.96	50.75	68.30	-17.55	40.78	34.18	8.40	32.61	329	247	PEAK	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>97.39</td><td>-----</td><td>-----</td><td>87.47</td><td>34.38</td><td>8.22</td><td>32.68</td><td>329</td><td>247</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	97.39	-----	-----	87.47	34.38	8.22	32.68	329	247	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5454.00	49.63	74.00	-24.37	39.66	34.17	8.42	32.62	329	247	PEAK																																																																																																											
2	5465.96	50.75	68.30	-17.55	40.78	34.18	8.40	32.61	329	247	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5610.00	97.39	-----	-----	87.47	34.38	8.22	32.68	329	247	PEAK																																																																																																											
Avg	Level (dBuV/m) Date: 2025-01-09 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5445.94</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>31.76</td><td>34.17</td><td>8.43</td><td>32.62</td><td>329</td><td>247</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5445.94	41.74	54.00	-12.26	31.76	34.17	8.43	32.62	329	247	AVERAGE	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>90.34</td><td>-----</td><td>-----</td><td>80.37</td><td>34.40</td><td>8.26</td><td>32.69</td><td>329</td><td>247</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	90.34	-----	-----	80.37	34.40	8.26	32.69	329	247	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5445.94	41.74	54.00	-12.26	31.76	34.17	8.43	32.62	329	247	AVERAGE																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	5610.00	90.34	-----	-----	80.37	34.40	8.26	32.69	329	247	AVERAGE																																																																																																											



Mode	29																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU 106/53_5180MHz																																																																																										
ANT	6																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.86</td><td>50.84</td><td>74.00</td><td>-23.16</td><td>41.67</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>41</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.86	50.84	74.00	-23.16	41.67	33.99	7.92	32.74	100	41	PEAK	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.31</td><td>-----</td><td>-----</td><td>95.09</td><td>34.01</td><td>7.94</td><td>32.73</td><td>100</td><td>41</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	104.31	-----	-----	95.09	34.01	7.94	32.73	100	41	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5148.86	50.84	74.00	-23.16	41.67	33.99	7.92	32.74	100	41	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	104.31	-----	-----	95.09	34.01	7.94	32.73	100	41	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.68</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>32.65</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>41</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.68	41.82	54.00	-12.18	32.65	33.99	7.92	32.74	100	41	AVERAGE	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.39</td><td>-----</td><td>-----</td><td>86.17</td><td>34.01</td><td>7.94</td><td>32.73</td><td>100</td><td>41</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.39	-----	-----	86.17	34.01	7.94	32.73	100	41	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5148.68	41.82	54.00	-12.18	32.65	33.99	7.92	32.74	100	41	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	95.39	-----	-----	86.17	34.01	7.94	32.73	100	41	AVERAGE																																																																																



		29									
Mode	Band Edge										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU 106/53_5180MHz										
ANT	6										
Pol.	Vertical										
Peak											



Mode	30																																																	
	Band Edge																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial_RU 26/8_5320MHz																																																	
ANT	6																																																	
Pol.	Horizontal																																																	
Peak	Fundamental																																																	
	Date: 2025-01-10																																																	
	Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5401.90</td><td>48.62</td><td>74.00</td><td>-25.38</td><td>38.65</td><td>34.14</td><td>8.47</td><td>32.64</td><td>100</td><td>54 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5401.90	48.62	74.00	-25.38	38.65	34.14	8.47	32.64	100	54 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5401.90	48.62	74.00	-25.38	38.65	34.14	8.47	32.64	100	54 PEAK																																								
Avg	Date: 2025-01-16																																																	
	Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>94.51</td><td>-----</td><td>-----</td><td>84.83</td><td>34.09</td><td>8.26</td><td>32.67</td><td>100</td><td>54 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	94.51	-----	-----	84.83	34.09	8.26	32.67	100	54 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5320.00	94.51	-----	-----	84.83	34.09	8.26	32.67	100	54 AVERAGE																																								



Mode	30																																																																																											
	Band Edge																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial_RU 26/8_5320MHz																																																																																											
ANT	6																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5406.80</td><td>48.26</td><td>74.00</td><td>-25.74</td><td>38.27</td><td>34.14</td><td>8.48</td><td>32.63</td><td>300</td><td>13</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5406.80	48.26	74.00	-25.74	38.27	34.14	8.48	32.63	300	13	PEAK	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>89.07</td><td>-----</td><td>-----</td><td>79.39</td><td>34.09</td><td>8.26</td><td>32.67</td><td>300</td><td>13</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	89.07	-----	-----	79.39	34.09	8.26	32.67	300	13	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5406.80	48.26	74.00	-25.74	38.27	34.14	8.48	32.63	300	13	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	89.07	-----	-----	79.39	34.09	8.26	32.67	300	13	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5418.14</td><td>38.67</td><td>54.00</td><td>-15.33</td><td>28.68</td><td>34.15</td><td>8.47</td><td>32.63</td><td>300</td><td>13</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5418.14	38.67	54.00	-15.33	28.68	34.15	8.47	32.63	300	13	AVERAGE	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>81.79</td><td>-----</td><td>-----</td><td>72.11</td><td>34.09</td><td>8.26</td><td>32.67</td><td>300</td><td>13</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	81.79	-----	-----	72.11	34.09	8.26	32.67	300	13	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5418.14	38.67	54.00	-15.33	28.68	34.15	8.47	32.63	300	13	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	81.79	-----	-----	72.11	34.09	8.26	32.67	300	13	AVERAGE																																																																																	

Mode

31

Band Edge

U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial_RU 26/0_5500MHz

ANT

6

Pol.

Horizontal

Peak

Level (dBuV/m)

Date: 2025-01-10

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

5350

5380

5410

5440

5470

5500

5399.05

48.92

74.00

-25.08

38.96

34.14

8.46

32.64

148

56

PEAK

5468.05

48.48

68.30

-19.82

38.51

34.18

8.40

32.61

148

56

PEAK

Limit

Read

Ant

Cable

Preamp

Apos

TPos

Remark

Freq

Level

Line

Margin

Level

Factor

Loss

Factor

cm

deg

MHz

dBuV/m

dBuV/m

dB

dBuV

dB/m

dB

dB

cm

deg

Fundamental

Level (dBuV/m)

Date: 2025-01-16

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

2200

3400

4600

5800

7000

5500.00

101.65

91.70

34.19

8.36

32.60

148

56

PEAK

Limit

Read

Ant

Cable

Preamp

Apos

TPos

Remark

Freq

Level

Line

Margin

Level

Factor

Loss

Factor

cm

deg

MHz

dBuV/m

dBuV/m

dB

dBuV

dB/m

dB

dB

cm

deg

Avg

Level (dBuV/m)

Date: 2025-01-10

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

5350

5380

5410

5440

5470

5500

5404.60

39.19

54.00

-14.81

29.22

34.14

8.47

32.64

148

56

AVERAGE

Limit

Read

Ant

Cable

Preamp

Apos

TPos

Remark

Freq

Level

Line

Margin

Level

Factor

Loss

Factor

cm

deg

MHz

dBuV/m

dBuV/m

dB

dBuV

dB/m

dB

dB

cm

deg

Avg

Level (dBuV/m)

Date: 2025-01-16

140

122.5

105.0

87.5

70.0

52.5

35.0

17.5

0

1000

2200

3400

4600

5800

7000

5500.00

94.37

84.42

34.19

8.36

32.60

148

56

AVERAGE

Limit

Read

Ant

Cable

Preamp

Apos

TPos

Remark

Freq

Level

Line

Margin

Level

Factor

Loss

Factor

cm

deg

MHz

dBuV/m

dBuV/m

dB

dBuV

dB/m

dB

dB

cm

deg



		31																																																																																																								
Mode		Band Edge																																																																																																								
		U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial_RU 26/0_5500MHz																																																																																																								
ANT		6																																																																																																								
Pol.		Vertical					Fundamental																																																																																																			
Peak	Level (dBuV/m) Date: 2025-01-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5429.95</td><td>48.39</td><td>74.00</td><td>-25.61</td><td>38.41</td><td>34.16</td><td>8.45</td><td>32.63</td><td>222</td><td>236</td><td>PEAK</td></tr><tr><td>2</td><td>5466.10</td><td>49.10</td><td>68.30</td><td>-19.20</td><td>39.13</td><td>34.18</td><td>8.40</td><td>32.61</td><td>222</td><td>236</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5429.95	48.39	74.00	-25.61	38.41	34.16	8.45	32.63	222	236	PEAK	2	5466.10	49.10	68.30	-19.20	39.13	34.18	8.40	32.61	222	236	PEAK	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>100.42</td><td>-----</td><td>-----</td><td>90.47</td><td>34.19</td><td>8.36</td><td>32.60</td><td>222</td><td>236</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	100.42	-----	-----	90.47	34.19	8.36	32.60	222	236	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5429.95	48.39	74.00	-25.61	38.41	34.16	8.45	32.63	222	236	PEAK																																																																																															
2	5466.10	49.10	68.30	-19.20	39.13	34.18	8.40	32.61	222	236	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5500.00	100.42	-----	-----	90.47	34.19	8.36	32.60	222	236	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2025-01-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5440.15</td><td>38.86</td><td>54.00</td><td>-15.14</td><td>28.88</td><td>34.16</td><td>8.44</td><td>32.62</td><td>222</td><td>236</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5440.15	38.86	54.00	-15.14	28.88	34.16	8.44	32.62	222	236	AVERAGE	Level (dBuV/m) Date: 2025-01-16 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>91.99</td><td>-----</td><td>-----</td><td>82.04</td><td>34.19</td><td>8.36</td><td>32.60</td><td>222</td><td>236</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	91.99	-----	-----	82.04	34.19	8.36	32.60	222	236	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5440.15	38.86	54.00	-15.14	28.88	34.16	8.44	32.62	222	236	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5500.00	91.99	-----	-----	82.04	34.19	8.36	32.60	222	236	AVERAGE																																																																																															



Mode	32											
	Band Edge											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial_RU 26/8_5700MHz											
ANT	6											
Pol.	Horizontal						Fundamental					
Peak	</											



Mode	32																																																																																															
	Band Edge																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial_RU 26/8_5700MHz																																																																																															
ANT	6																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2025-01-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5744.20</td><td>49.74</td><td>68.30</td><td>-18.56</td><td>39.14</td><td>34.64</td><td>8.75</td><td>32.79</td><td>303</td><td>258</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5744.20	49.74	68.30	-18.56	39.14	34.64	8.75	32.79	303	258	PEAK	Level (dBuV/m) Date: 2025-01-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>102.30</td><td>-----</td><td>-----</td><td>91.88</td><td>34.57</td><td>8.62</td><td>32.77</td><td>303</td><td>258</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	102.30	-----	-----	91.88	34.57	8.62	32.77	303	258	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5744.20	49.74	68.30	-18.56	39.14	34.64	8.75	32.79	303	258	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	102.30	-----	-----	91.88	34.57	8.62	32.77	303	258	PEAK																																																																																					
Avg	Blank						Level (dBuV/m) Date: 2025-01-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>93.73</td><td>-----</td><td>-----</td><td>83.31</td><td>34.57</td><td>8.62</td><td>32.77</td><td>303</td><td>258</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	93.73	-----	-----	83.31	34.57	8.62	32.77	303	258	AVERAGE																																										
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	93.73	-----	-----	83.31	34.57	8.62	32.77	303	258	AVERAGE																																																																																					



Mode	33																																																																																																																														
	Band Edge																																																																																																																														
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																														
ANT	6																																																																																																																														
Pol.	Horizontal										Fundamental																																																																																																																				
Peak	Date: 2025-01-10 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5614.07</td><td>50.09</td><td>68.30</td><td>-18.21</td><td>40.12</td><td>34.40</td><td>8.26</td><td>32.69</td><td>100</td><td>58</td><td>PEAK</td></tr><tr><td>2</td><td>5650.17</td><td>49.08</td><td>68.43</td><td>-19.35</td><td>38.93</td><td>34.47</td><td>8.40</td><td>32.72</td><td>100</td><td>58</td><td>PEAK</td></tr><tr><td>3</td><td>5703.10</td><td>51.71</td><td>106.07</td><td>-54.36</td><td>41.32</td><td>34.56</td><td>8.59</td><td>32.76</td><td>100</td><td>58</td><td>PEAK</td></tr><tr><td>4</td><td>5720.50</td><td>55.28</td><td>111.93</td><td>-56.65</td><td>44.81</td><td>34.59</td><td>8.66</td><td>32.78</td><td>100</td><td>58</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5614.07	50.09	68.30	-18.21	40.12	34.40	8.26	32.69	100	58	PEAK	2	5650.17	49.08	68.43	-19.35	38.93	34.47	8.40	32.72	100	58	PEAK	3	5703.10	51.71	106.07	-54.36	41.32	34.56	8.59	32.76	100	58	PEAK	4	5720.50	55.28	111.93	-56.65	44.81	34.59	8.66	32.78	100	58	PEAK	Date: 2025-01-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>104.07</td><td>-----</td><td>-----</td><td>93.48</td><td>34.64</td><td>8.75</td><td>32.80</td><td>100</td><td>58</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	104.07	-----	-----	93.48	34.64	8.75	32.80	100	58	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5614.07	50.09	68.30	-18.21	40.12	34.40	8.26	32.69	100	58	PEAK																																																																																																																				
2	5650.17	49.08	68.43	-19.35	38.93	34.47	8.40	32.72	100	58	PEAK																																																																																																																				
3	5703.10	51.71	106.07	-54.36	41.32	34.56	8.59	32.76	100	58	PEAK																																																																																																																				
4	5720.50	55.28	111.93	-56.65	44.81	34.59	8.66	32.78	100	58	PEAK																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5745.00	104.07	-----	-----	93.48	34.64	8.75	32.80	100	58	PEAK																																																																																																																				
Avg	Blank										Date: 2025-01-16 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>97.04</td><td>-----</td><td>-----</td><td>86.45</td><td>34.64</td><td>8.75</td><td>32.80</td><td>100</td><td>58</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	97.04	-----	-----	86.45	34.64	8.75	32.80	100	58	AVERAGE																																																																												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5745.00	97.04	-----	-----	86.45	34.64	8.75	32.80	100	58	AVERAGE																																																																																																																				