



# FCC RF Test Report

**APPLICANT** : NOTHING TECHNOLOGY LIMITED  
**EQUIPMENT** : Smart Phone  
**BRAND NAME** : NOTHING  
**MODEL NAME** : A065  
**FCC ID** : 2AZEQ-A065  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Mar. 08, 2023 ~ Apr. 12, 2023

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Test Software..... 7

    1.8 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 10

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 99% Bandwidth Measurement ..... 12

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 42

    3.6 AC Conducted Emission Measurement..... 46

    3.7 Antenna Requirements ..... 48

**4 LIST OF MEASURING EQUIPMENT ..... 49**

**5 UNCERTAINTY OF EVALUATION ..... 50**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION AND PLOTS**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330214C	Rev. 01	Initial issue of report	May 11, 2023



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.70 dB at 2390.00 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.14 dB at 0.19 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

NOTHING TECHNOLOGY LIMITED  
80 Cheapside, London, England EC2V 6EE

## 1.2 Manufacturer

NOTHING TECHNOLOGY LIMITED  
80 Cheapside, London, England EC2V 6EE

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	NOTHING
Model Name	A065
FCC ID	2AZEQ-A065
IMEI Code	Conducted: 352134980026158 Conduction: 352134980046461/352134980046479 Radiation: 352134980043864/352134980043872
HW Version	22111
SW Version	Nothing OS 2.0.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	<Ant. 5+6> 802.11b : 22.78 dBm (0.1897 W) 802.11g : 26.87 dBm (0.4864 W) 802.11n HT20 : 25.92 dBm (0.3908 W) 802.11n HT40 : 22.86 dBm (0.1932 W) 802.11ac VHT20 : 25.79 dBm (0.3793 W) 802.11ac VHT40 : 22.90 dBm (0.1950 W) 802.11ax HE20 : 26.70 dBm (0.4677 W) 802.11ax HE40 : 22.95 dBm (0.1972 W)
99% Occupied Bandwidth	802.11b : 13.74 MHz 802.11g : 16.38 MHz 802.11ax HE20 : 18.98 MHz 802.11ax HE40 : 37.96 MHz
Antenna Type / Gain	<Ant. 5> Metal frame Antenna with gain -1.43 dBi <Ant. 6> Metal frame Antenna with gain -1.70 dBi



<b>Type of Modulation</b>	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)
---------------------------	--

**Note:**

1. The device supports MIMO CDD mode.
2. For 802.11n & 11ax mode, the whole testing have assessed only 802.11 ax mode by referring to the higher output power.
3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power/PSD, the full RU PSD > partial RU PSD, thus full RU perform full test to cover partial RU, partial RU verify Bandedge and Spurious.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272



### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 GSM 850 Idle + WLAN Link(2.4G) + USB Cable (Charging from Adapter) + Battery 1


Co-location
802.11ax HE20(Full RU) CH01_TX + LTE Band48_Link

### Remark:


1. For Radiated Test Cases, The tests were performance with Adapter and USB Cable.
2. The RSE Co-location mode is assessed from the worst WLAN TX + WWAN Link mode.

## 2.3 Connection Diagram of Test System

For AC Conducted Emission:

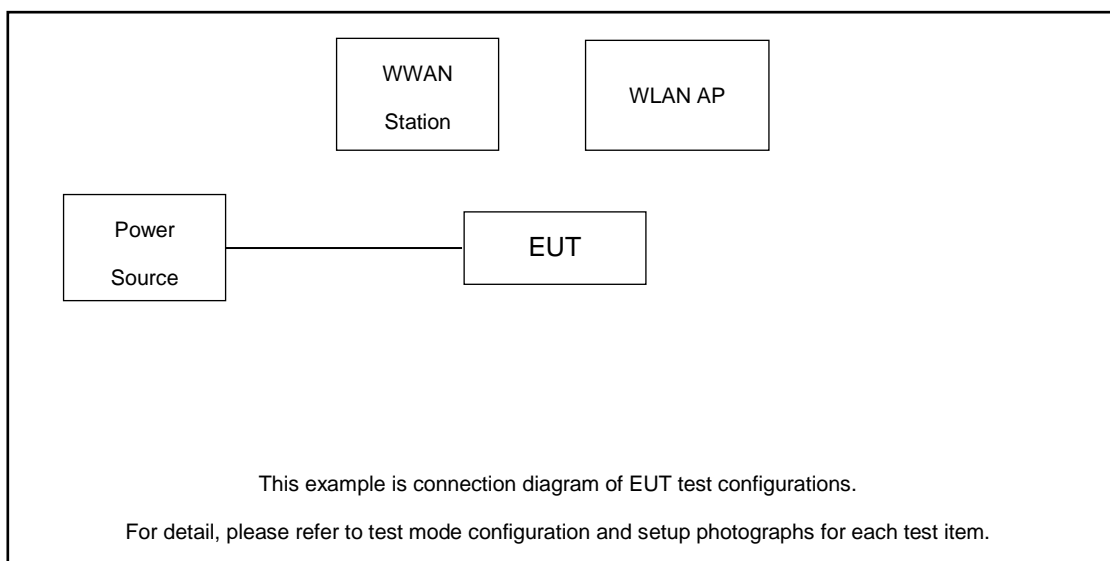

For Radiated Emission:

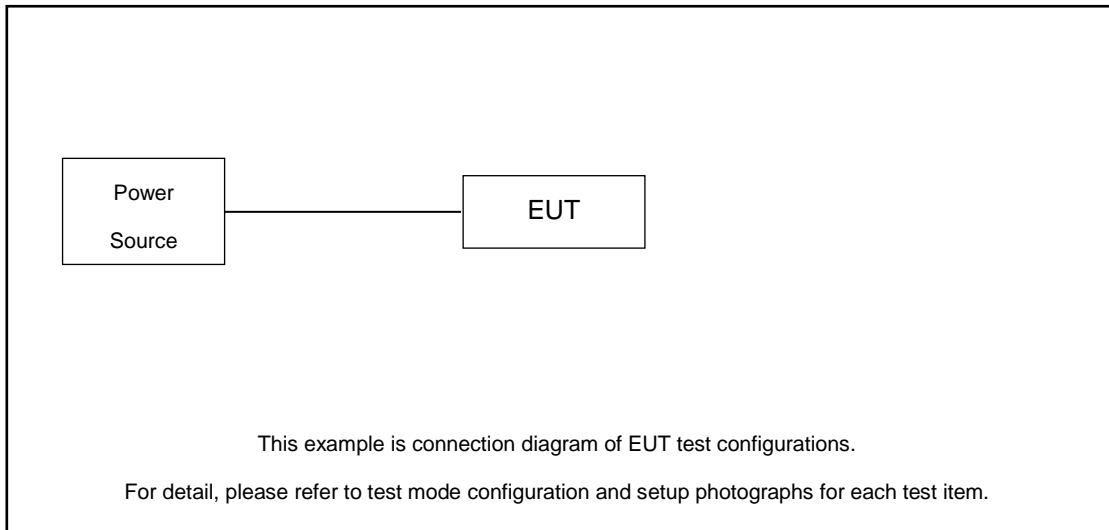

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	BaseStation(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 1.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.2 + 10 = 11.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

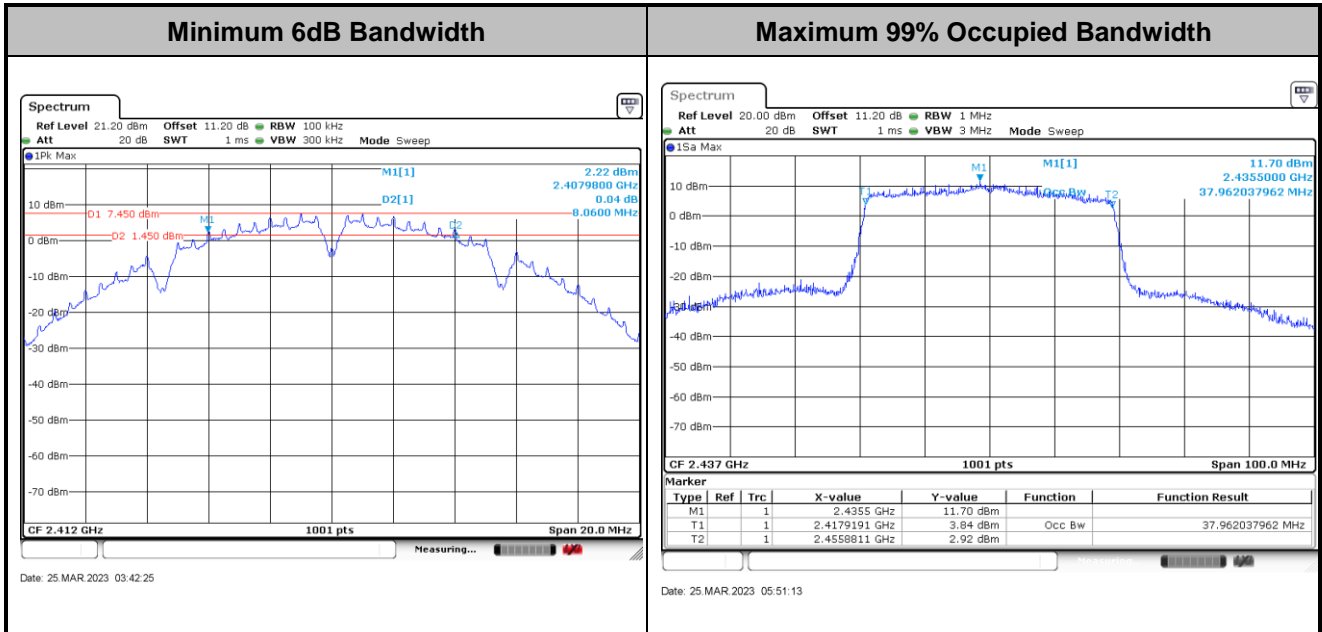

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

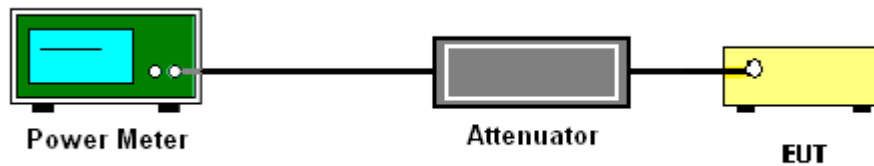

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus  $10 \log(N)$  exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (2): Measure and add  $10 \log(N)$  dB, where N is the number of outputs. (N=2)

### 3.3.4 Test Setup

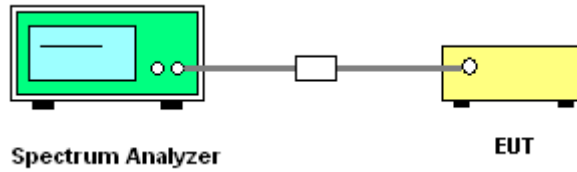

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

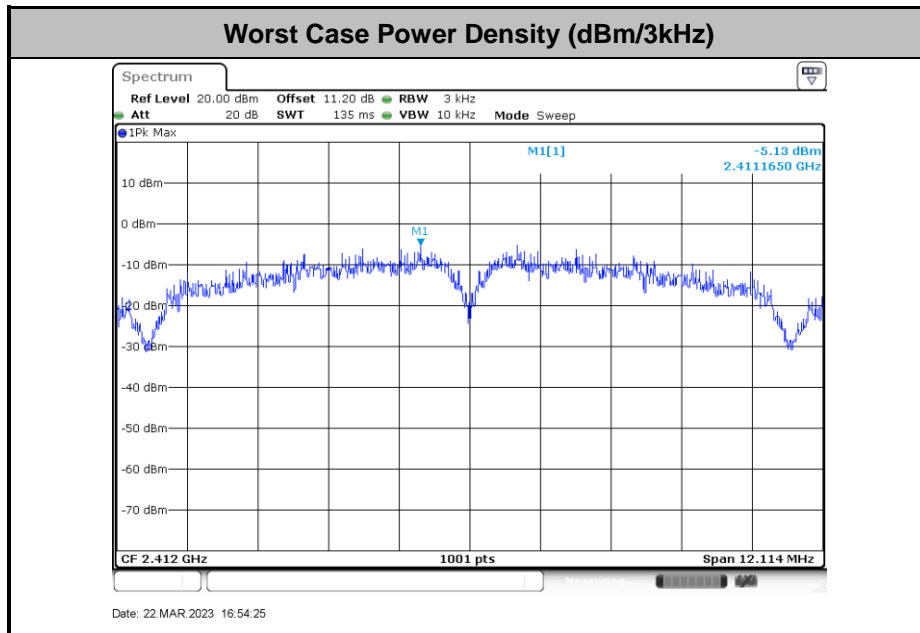



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup






### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer : Chen Ran	Temperature :	21~25°C
	Relative Humidity :	51~54%



Number of TX = 2, Ant. 5 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

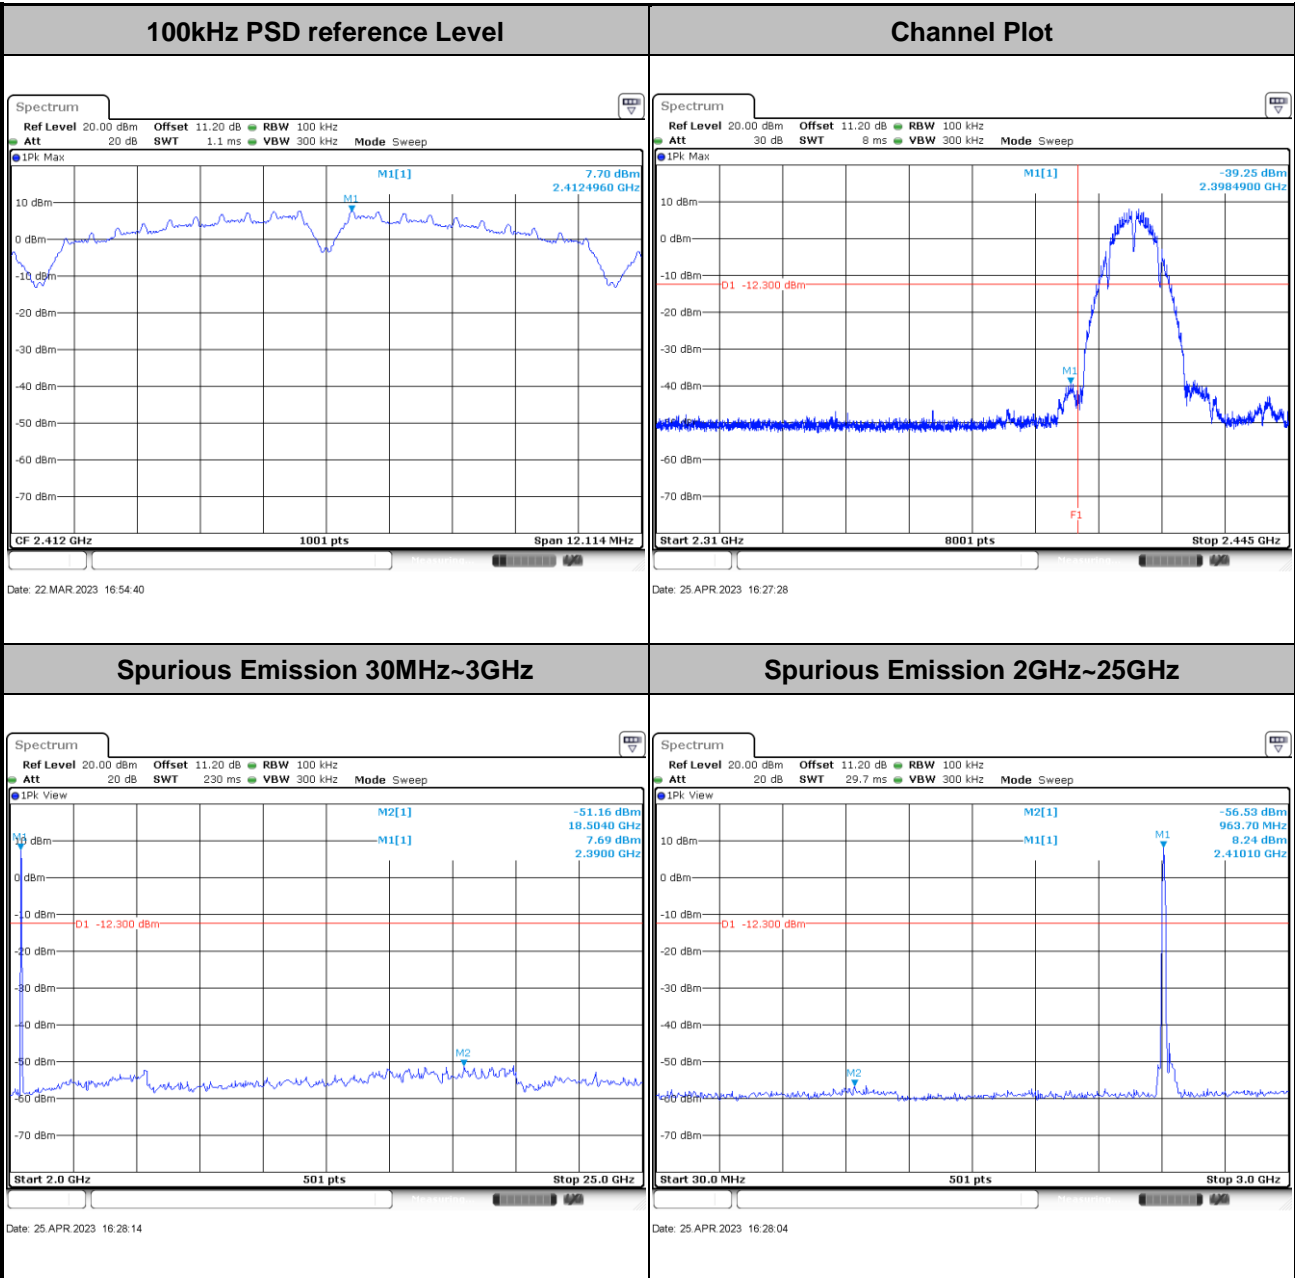





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

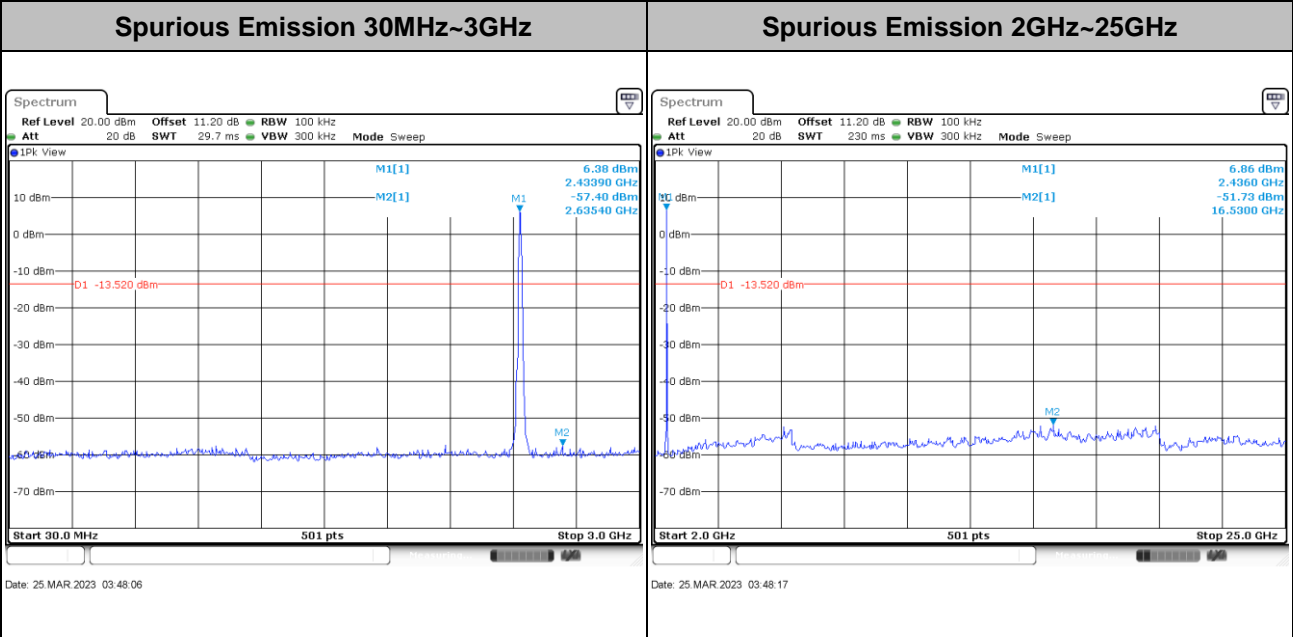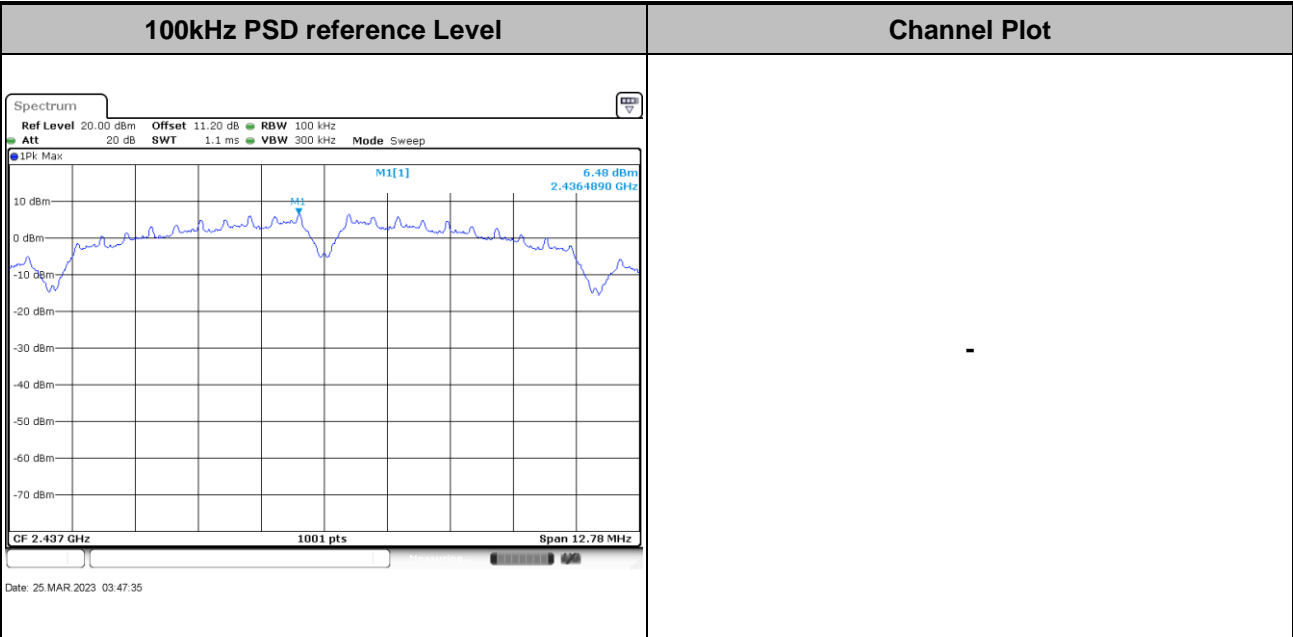





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

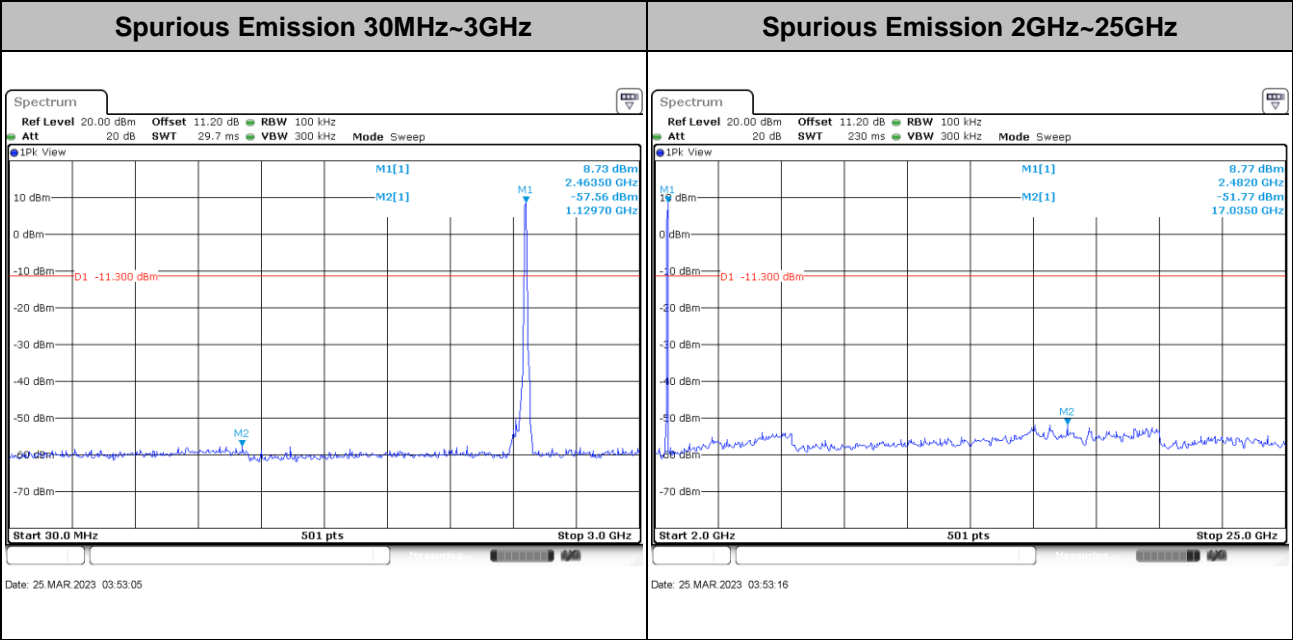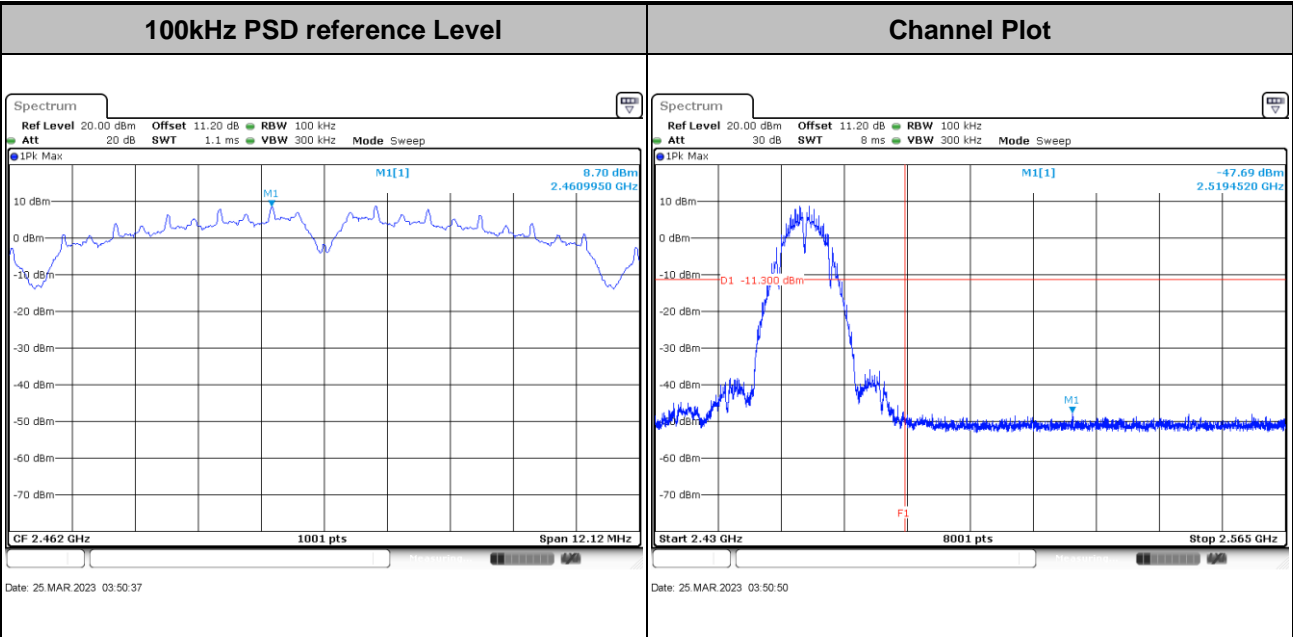





Test Mode : 802.11g Test Channel : 01

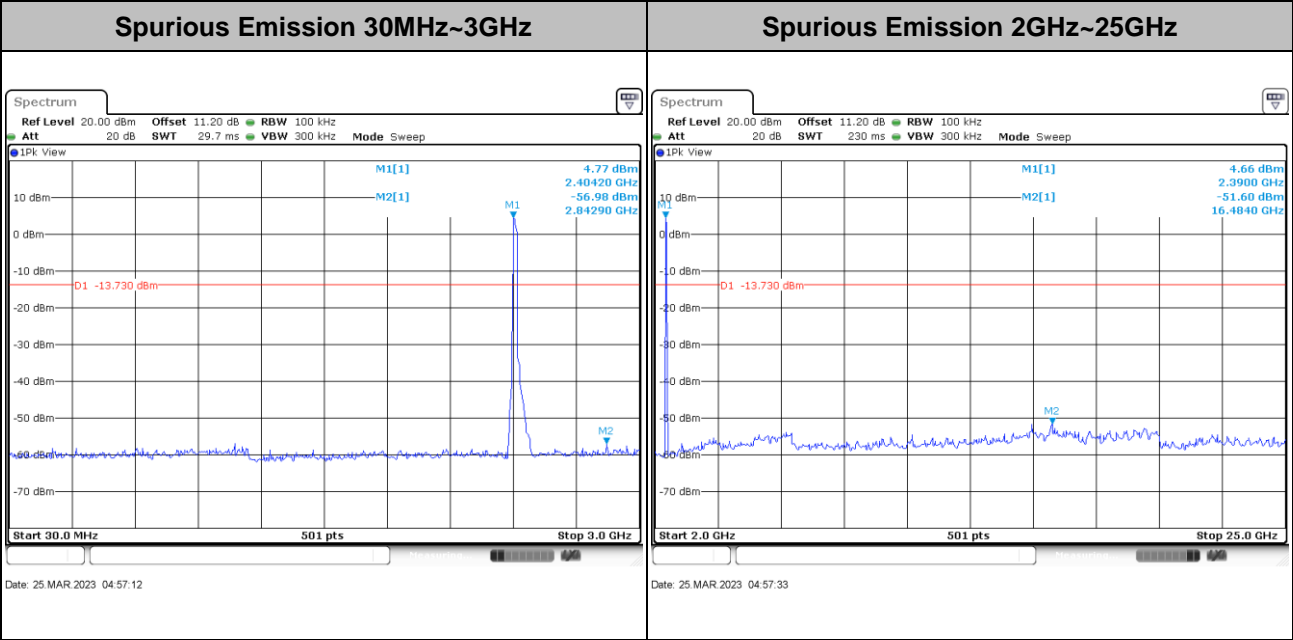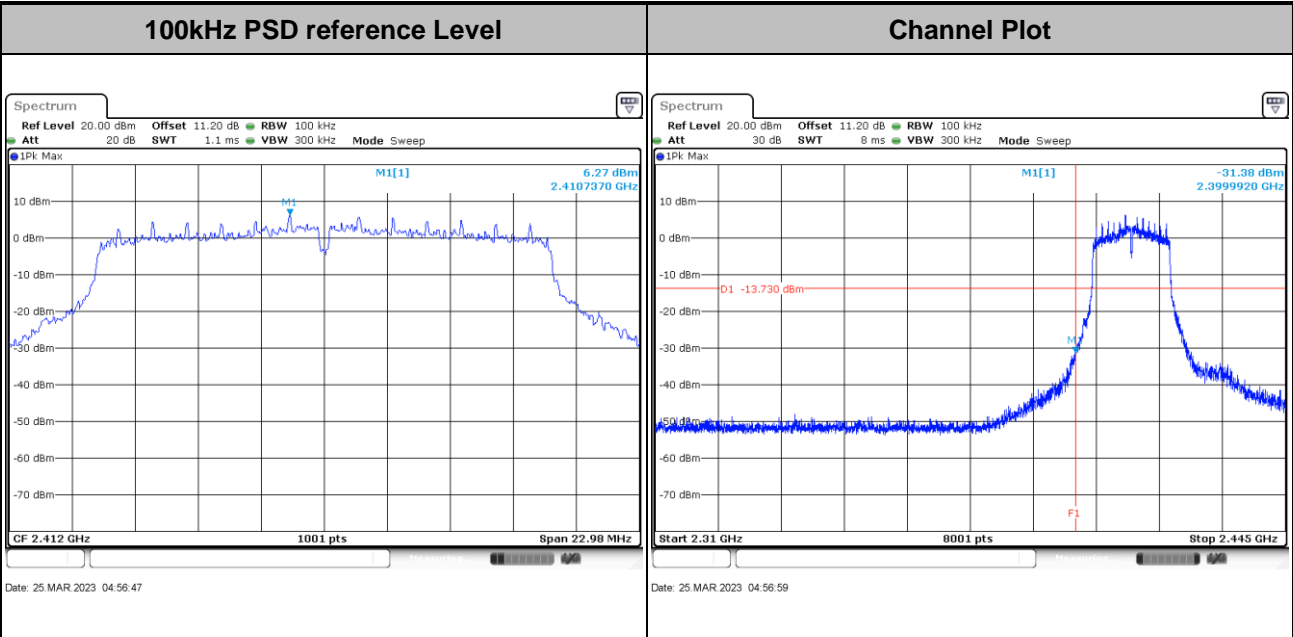





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

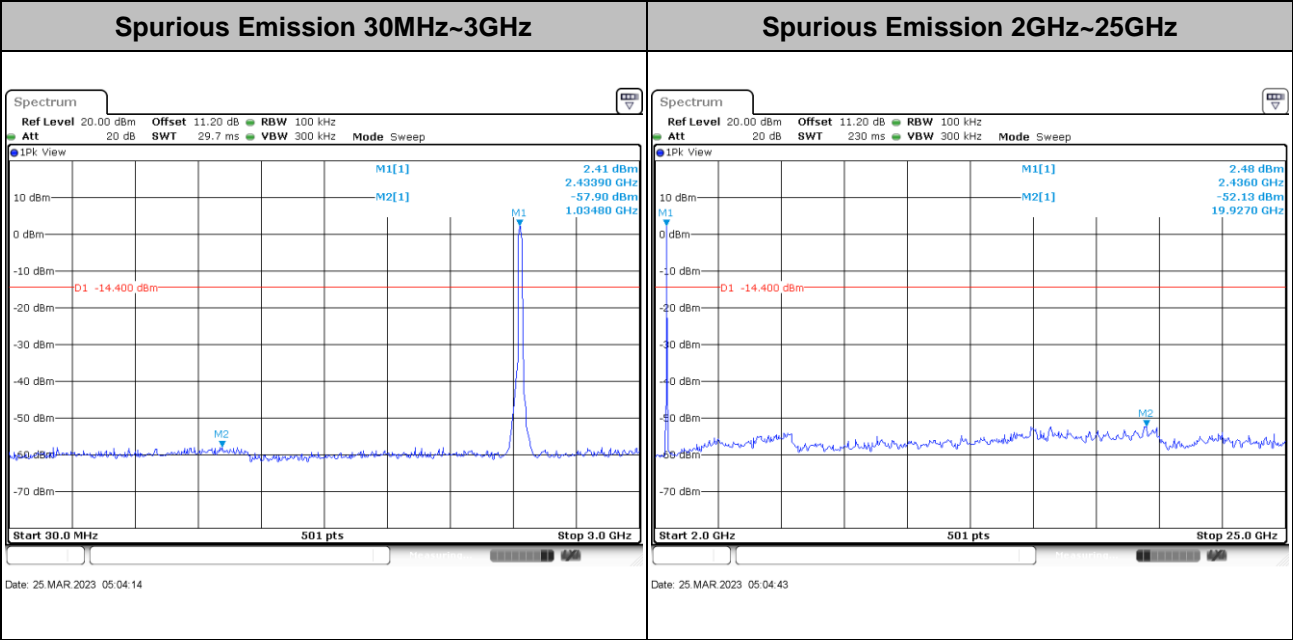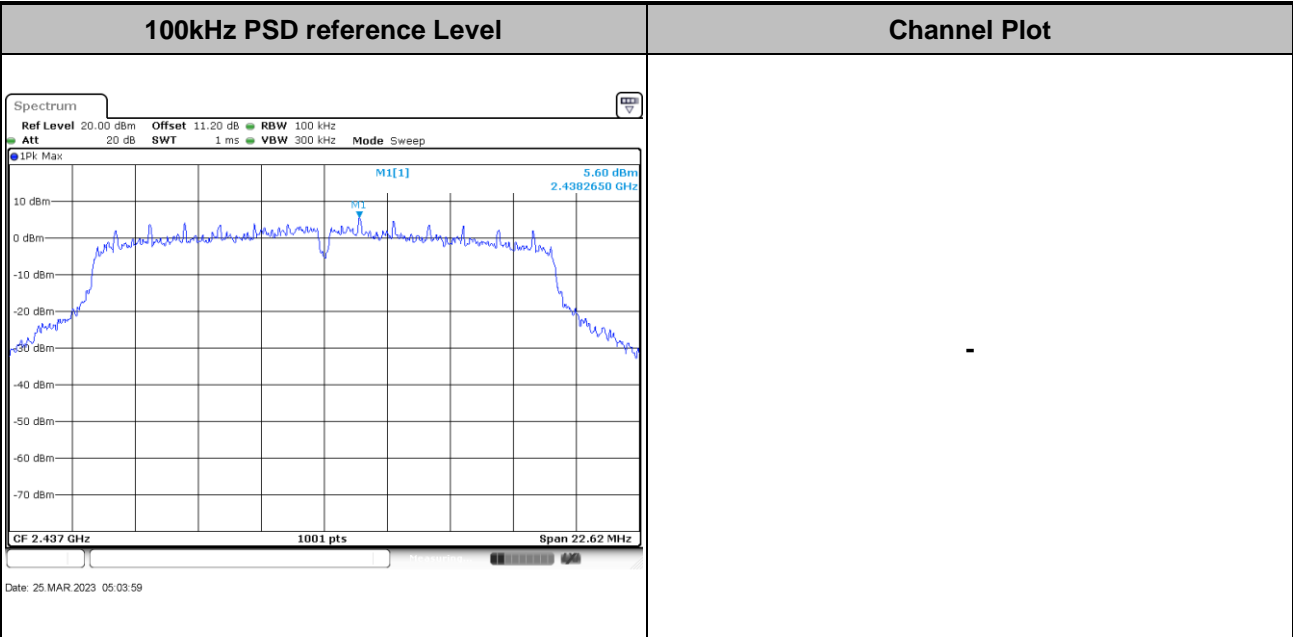





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

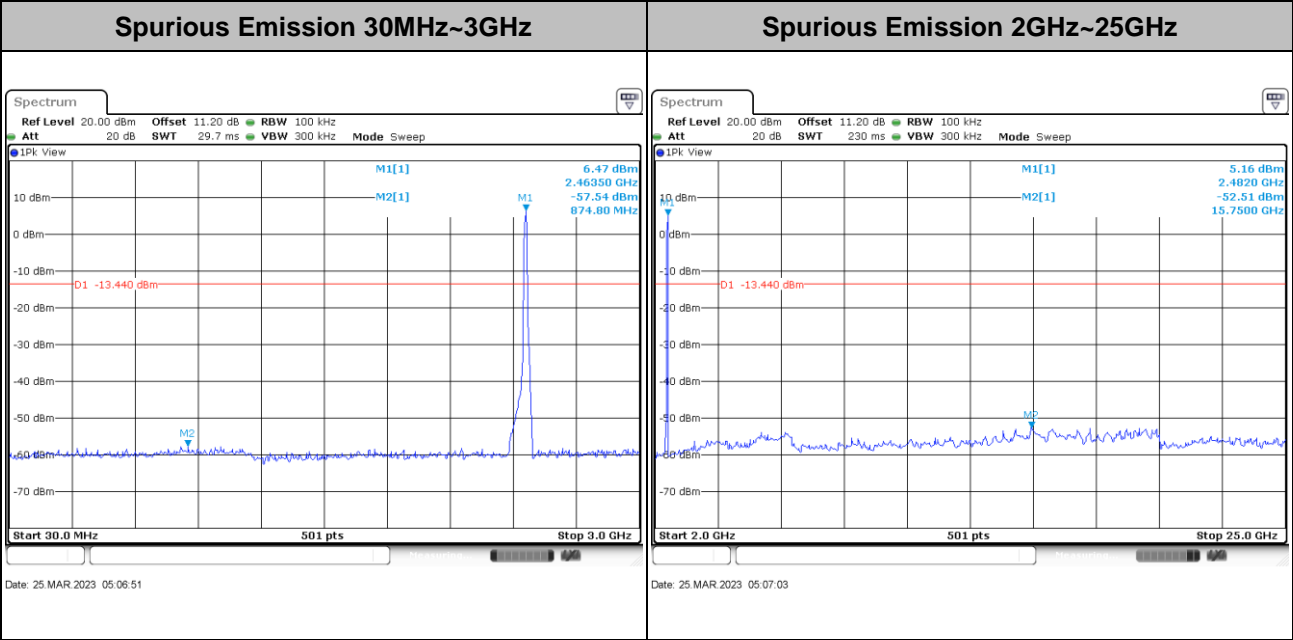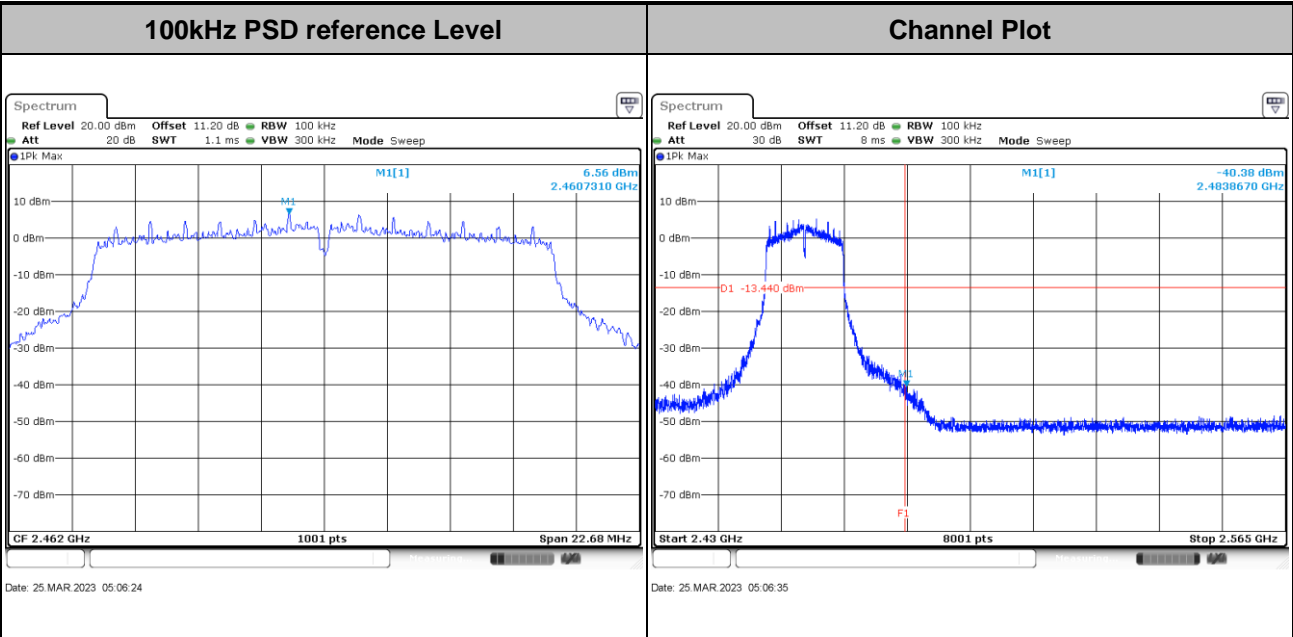







Test Mode :	802.11ax HE20	Test Channel :	01
-------------	---------------	----------------	----

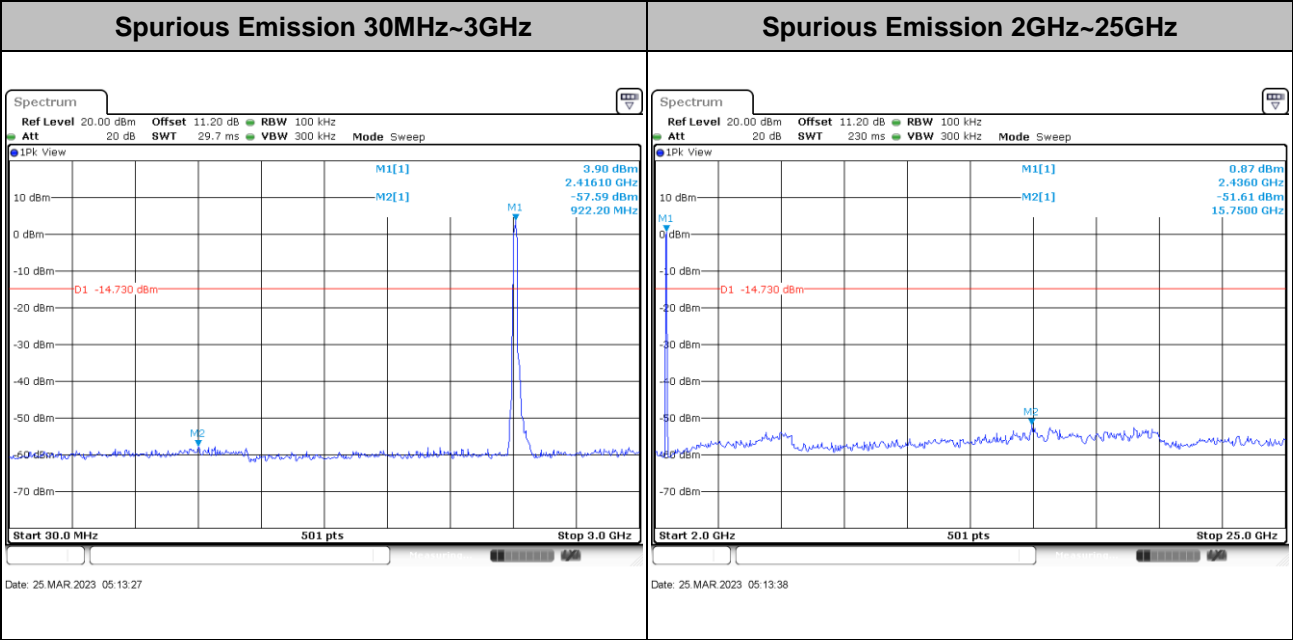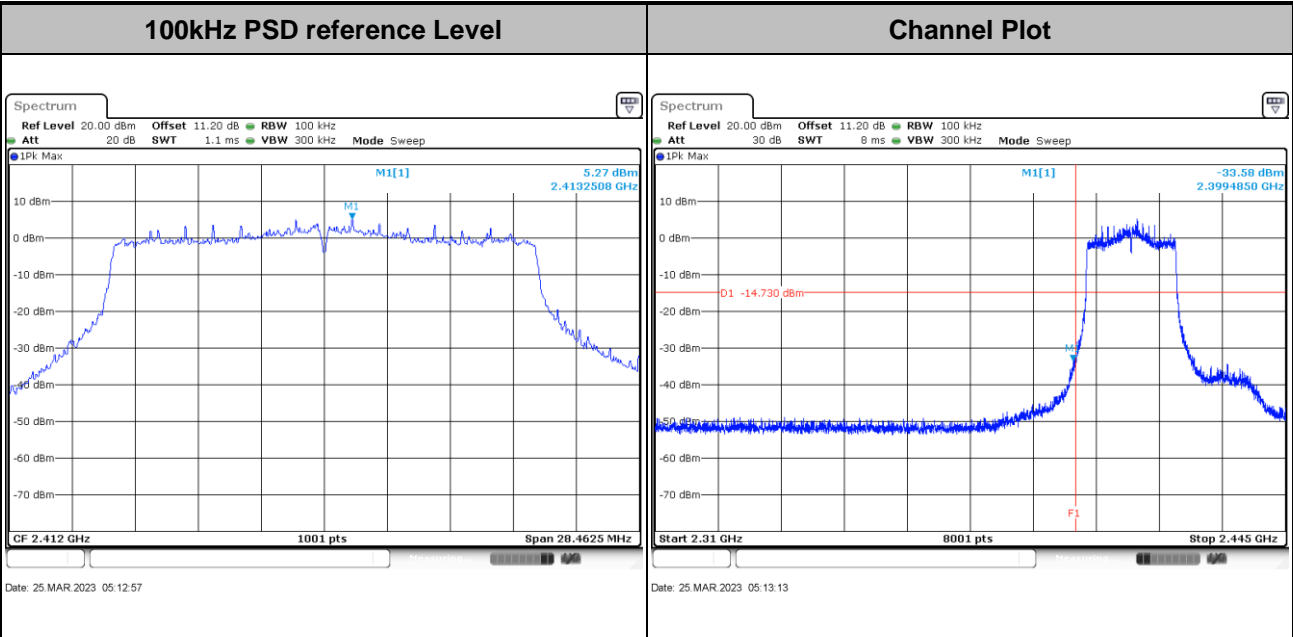







Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

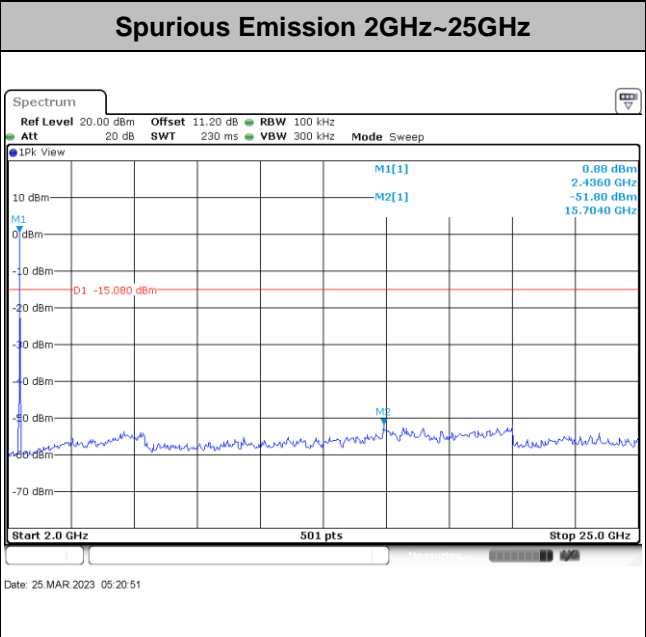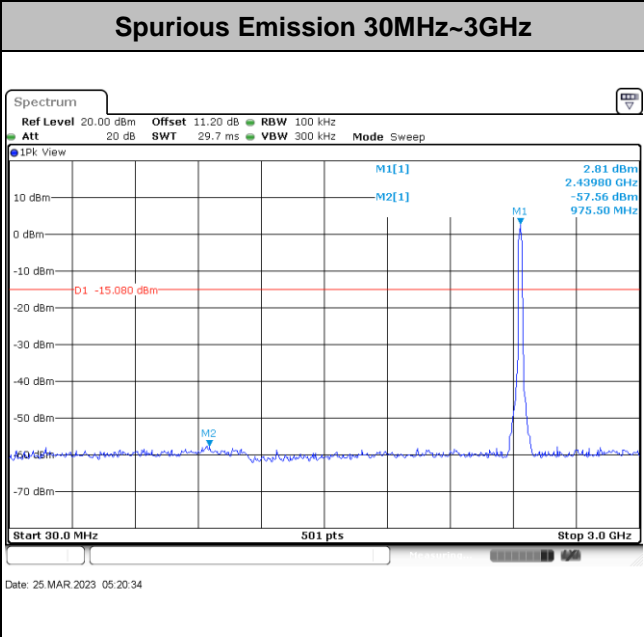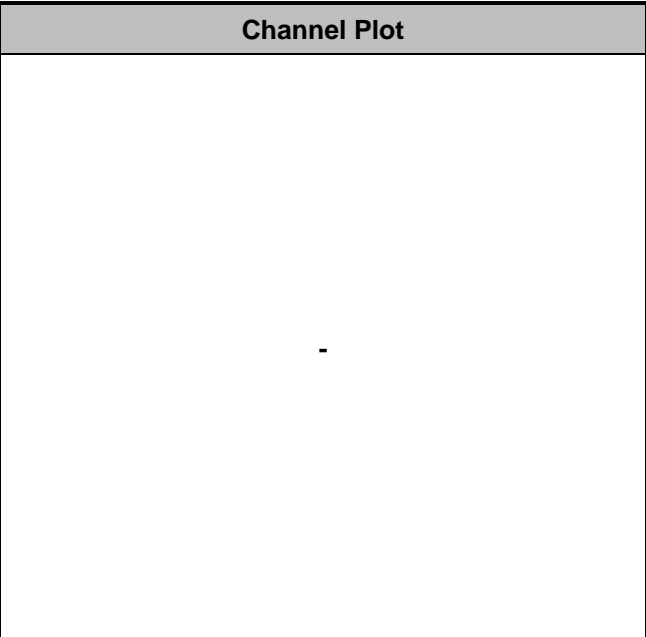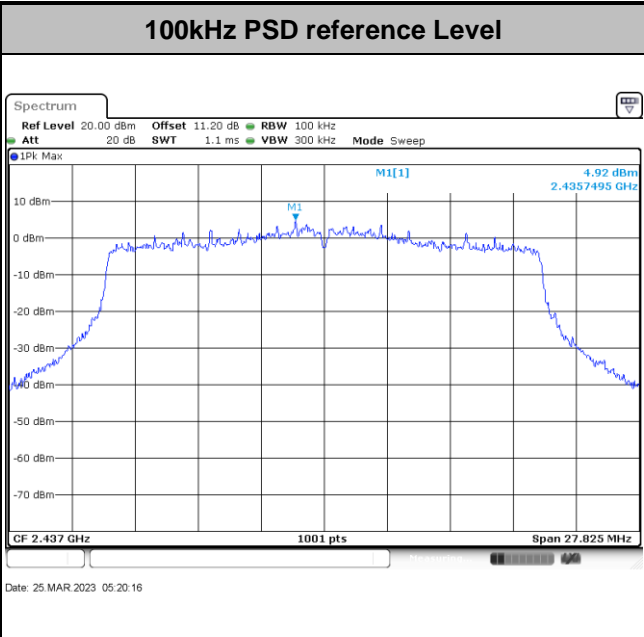





Test Mode :	802.11ax HE20	Test Channel :	11
-------------	---------------	----------------	----

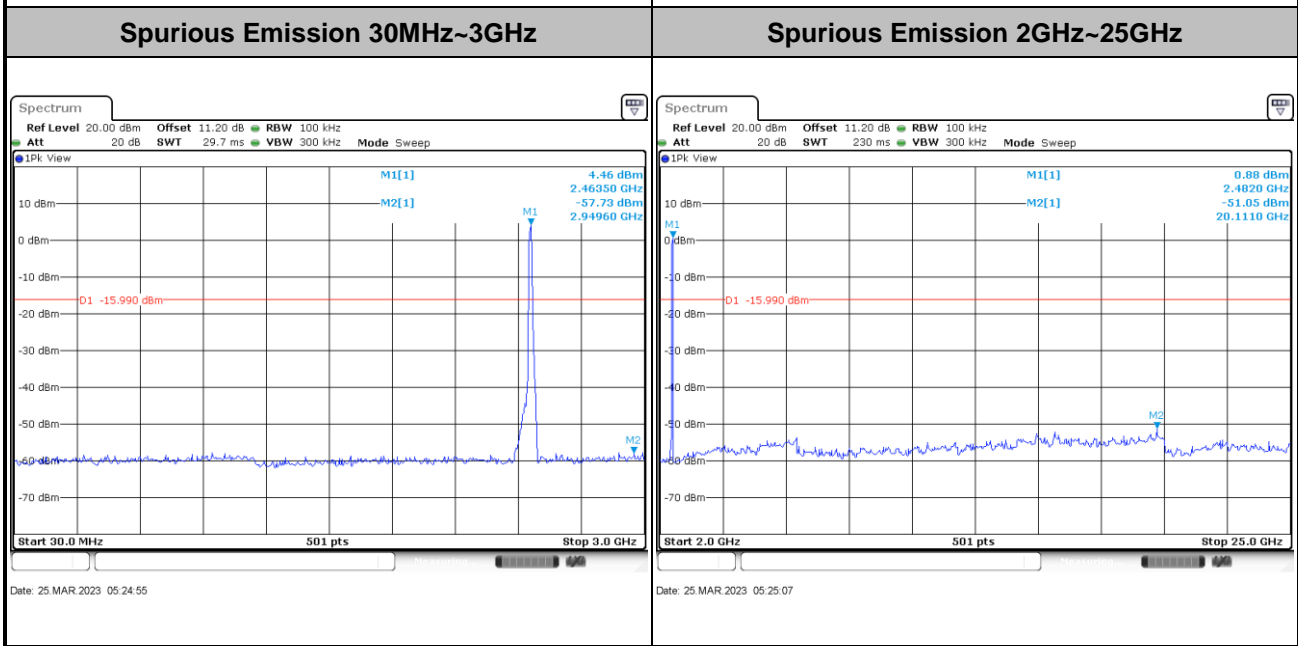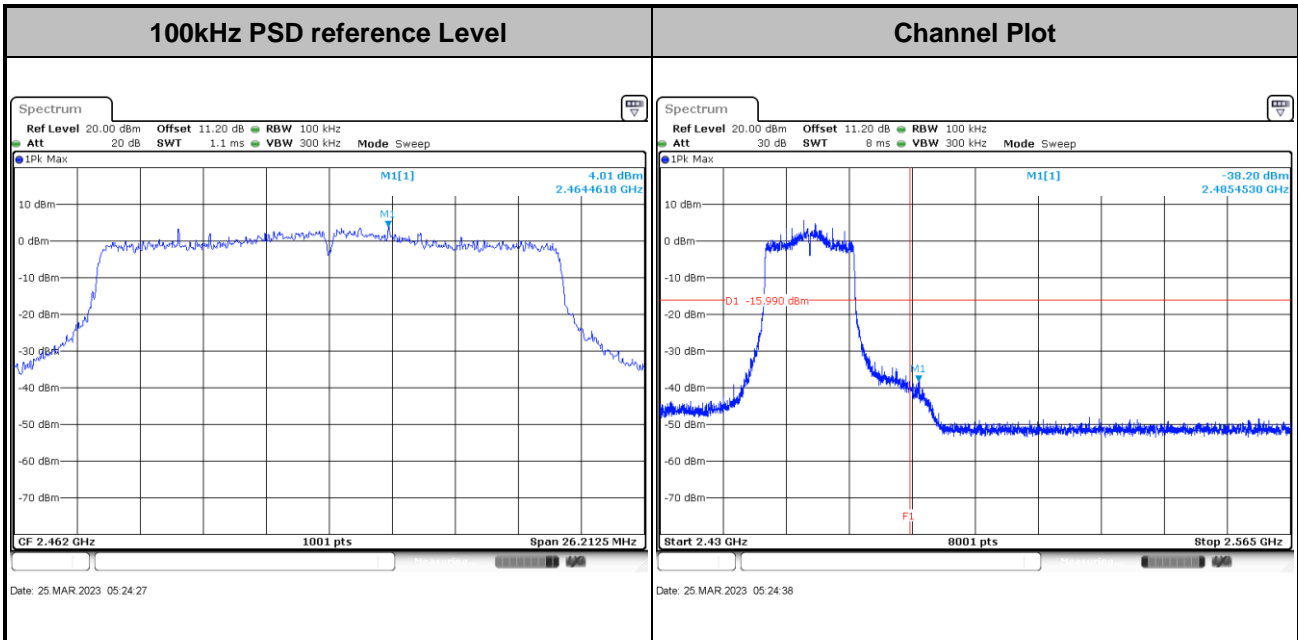





Test Mode :	802.11ax HE40	Test Channel :	03
-------------	---------------	----------------	----

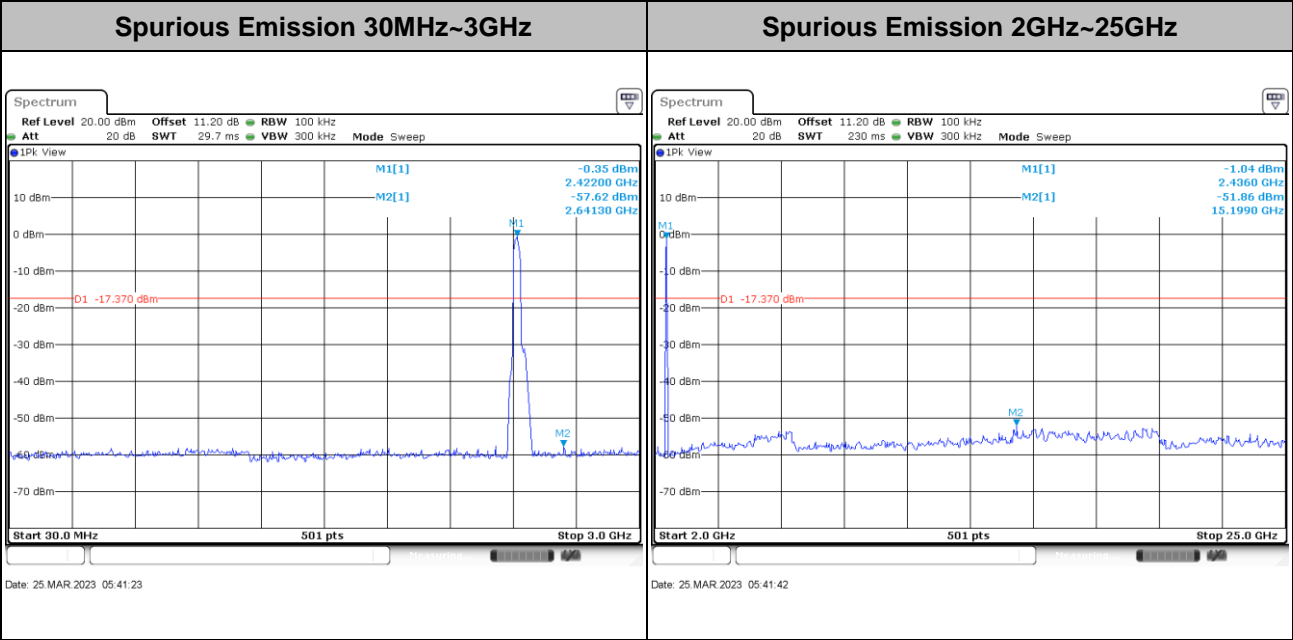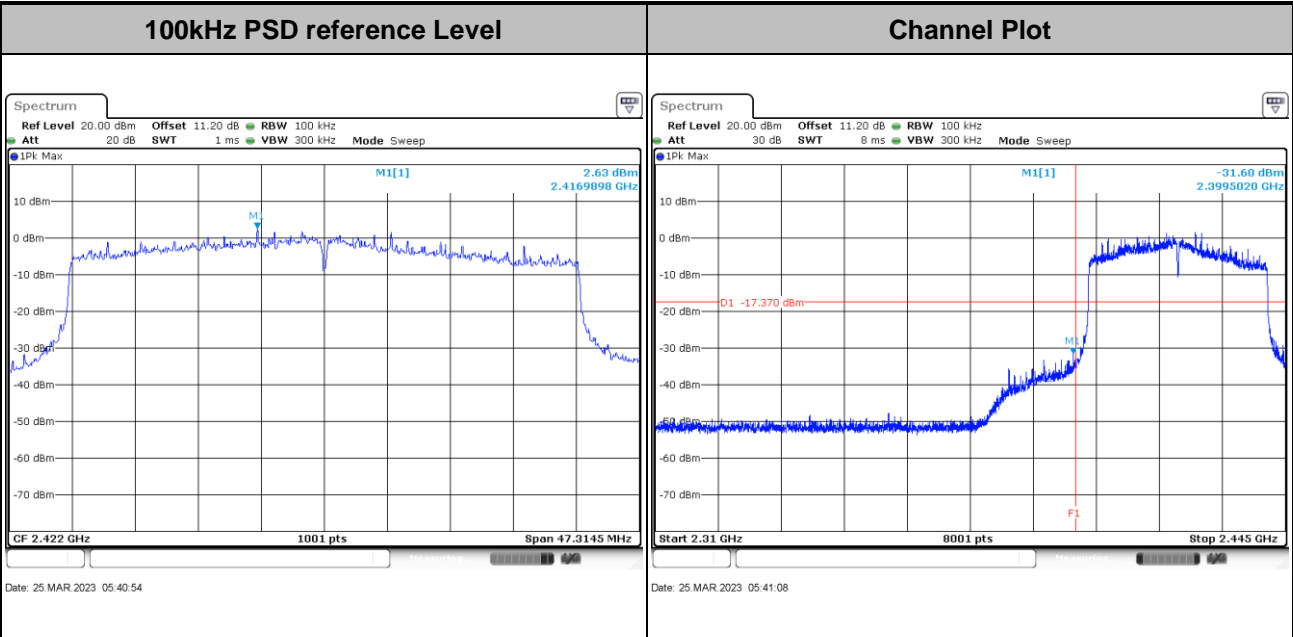





Test Mode :	802.11ax HE40	Test Channel :	06
-------------	---------------	----------------	----

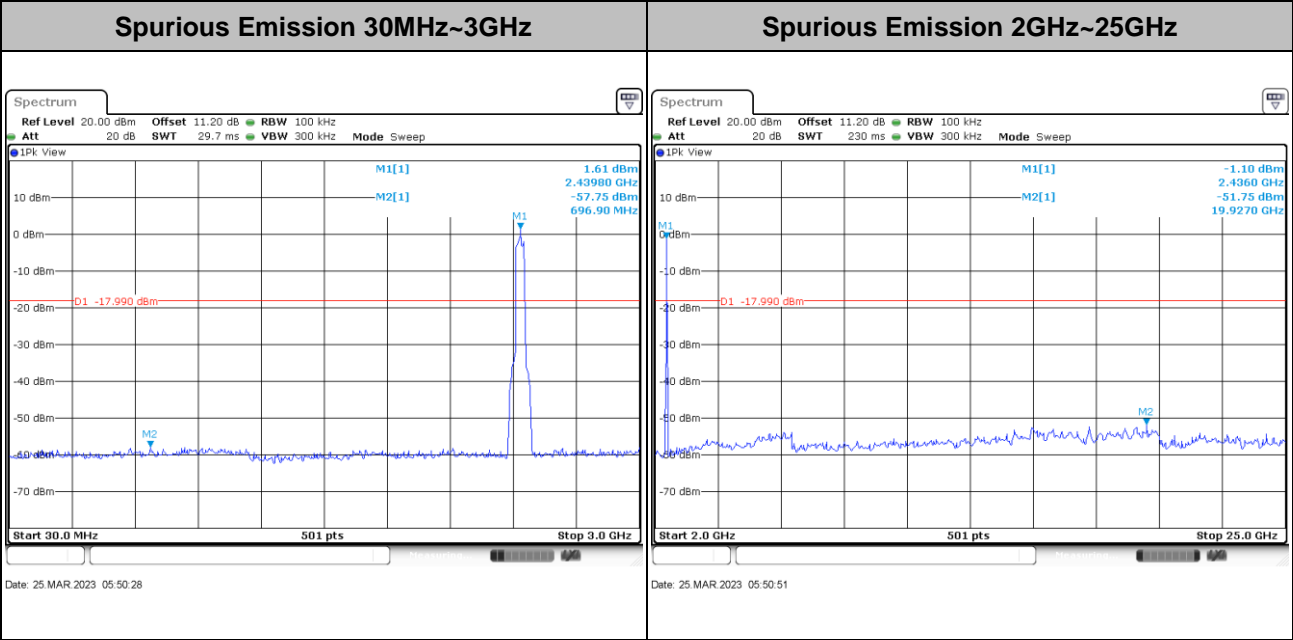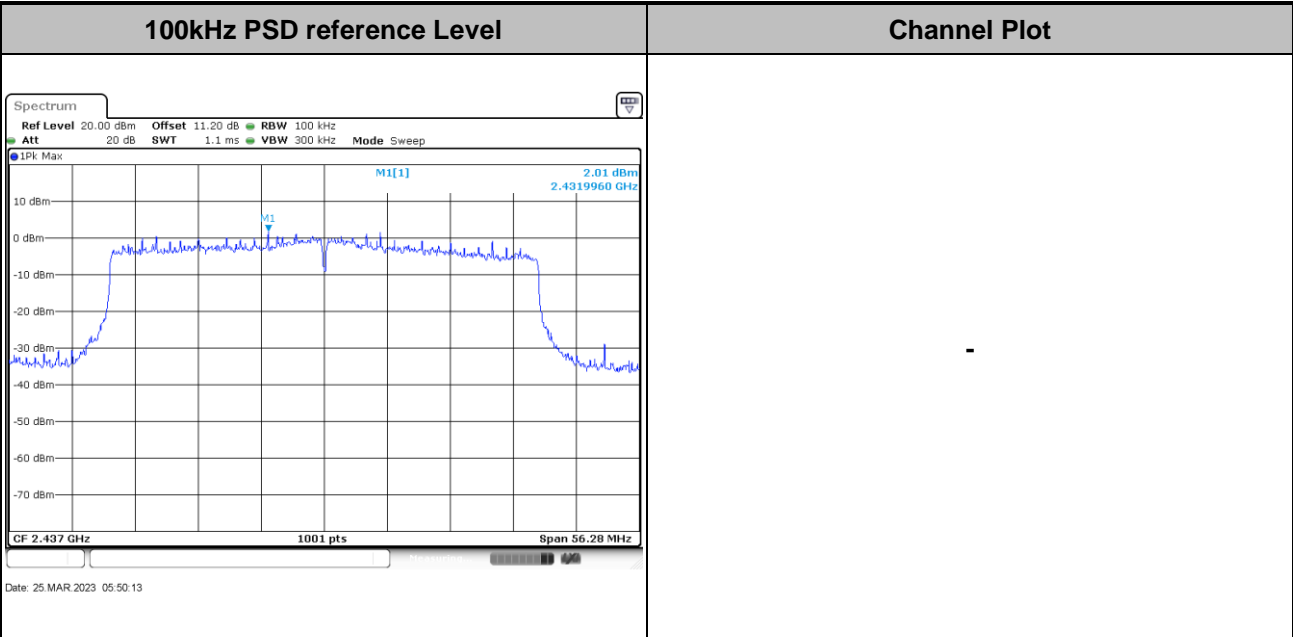





Test Mode : 802.11ax HE40 Test Channel : 09

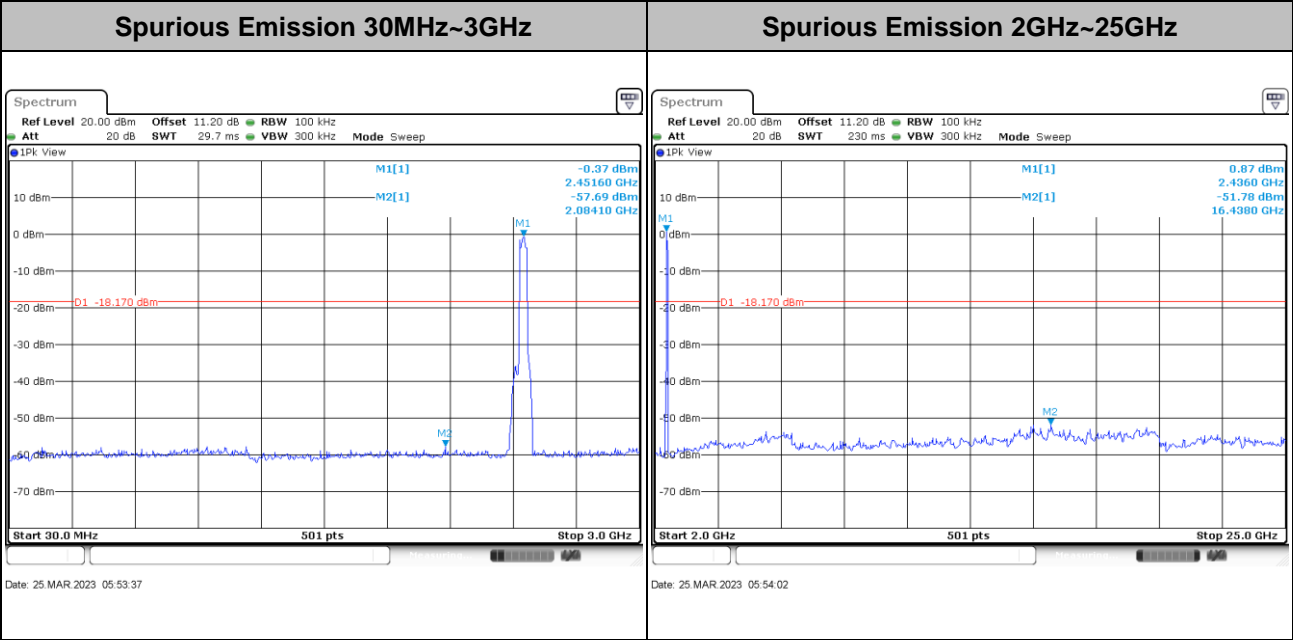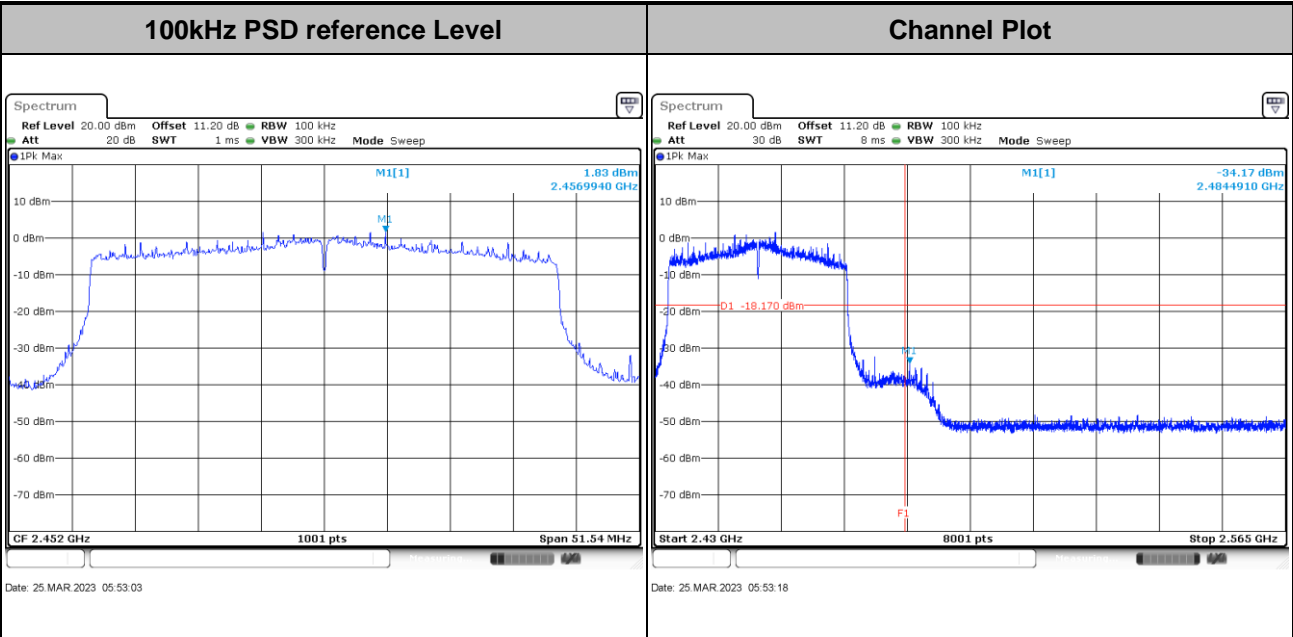





Number of TX = 2, Ant. 6 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

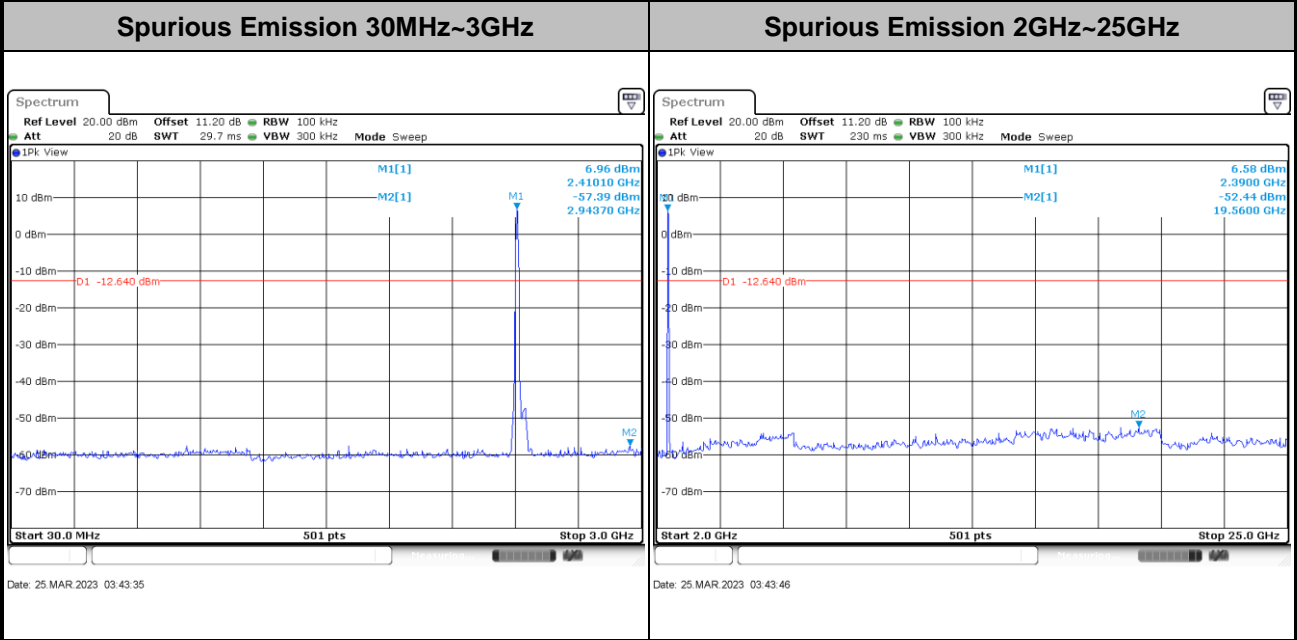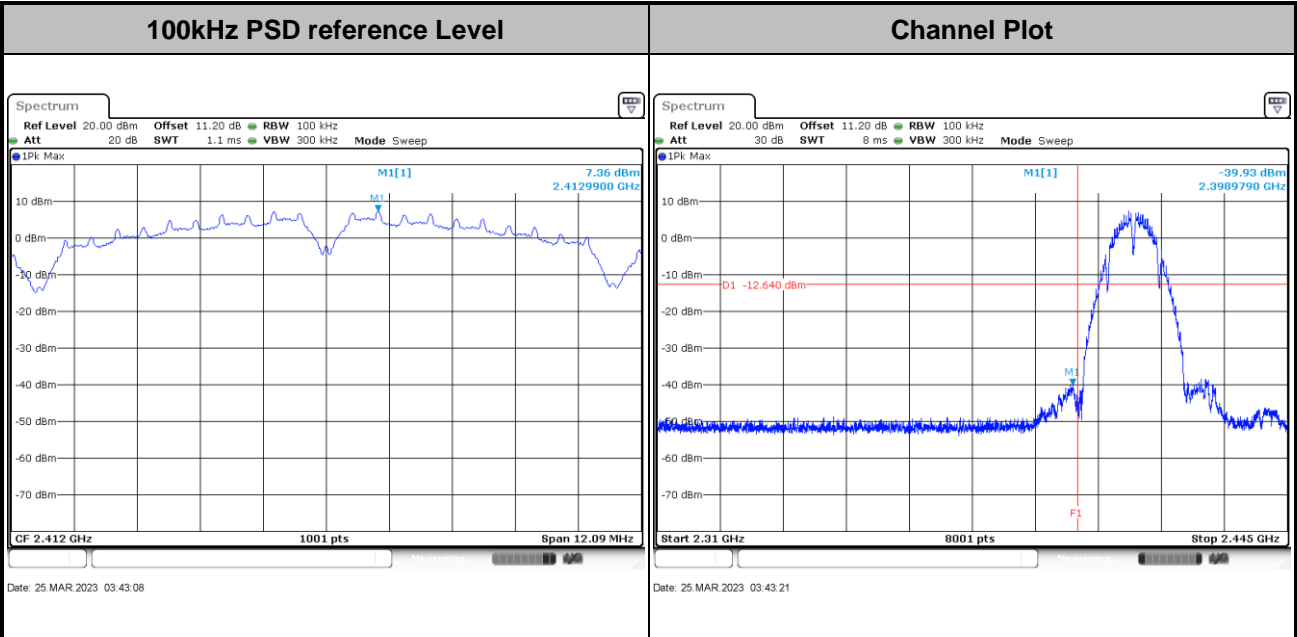





Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

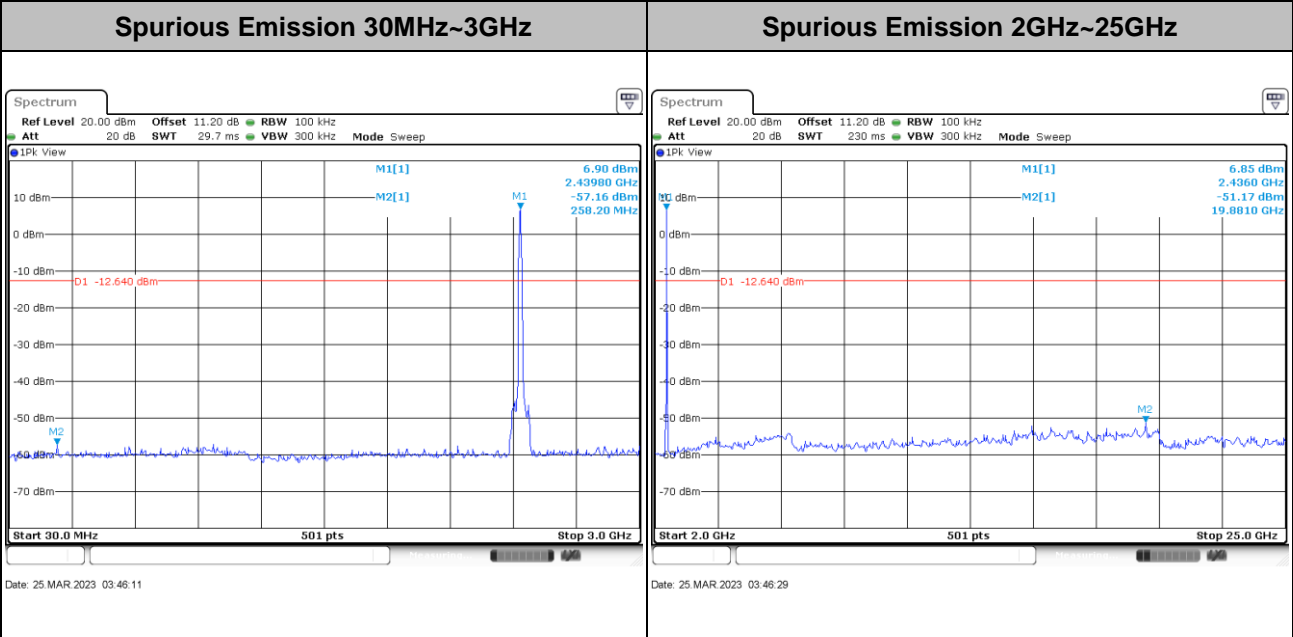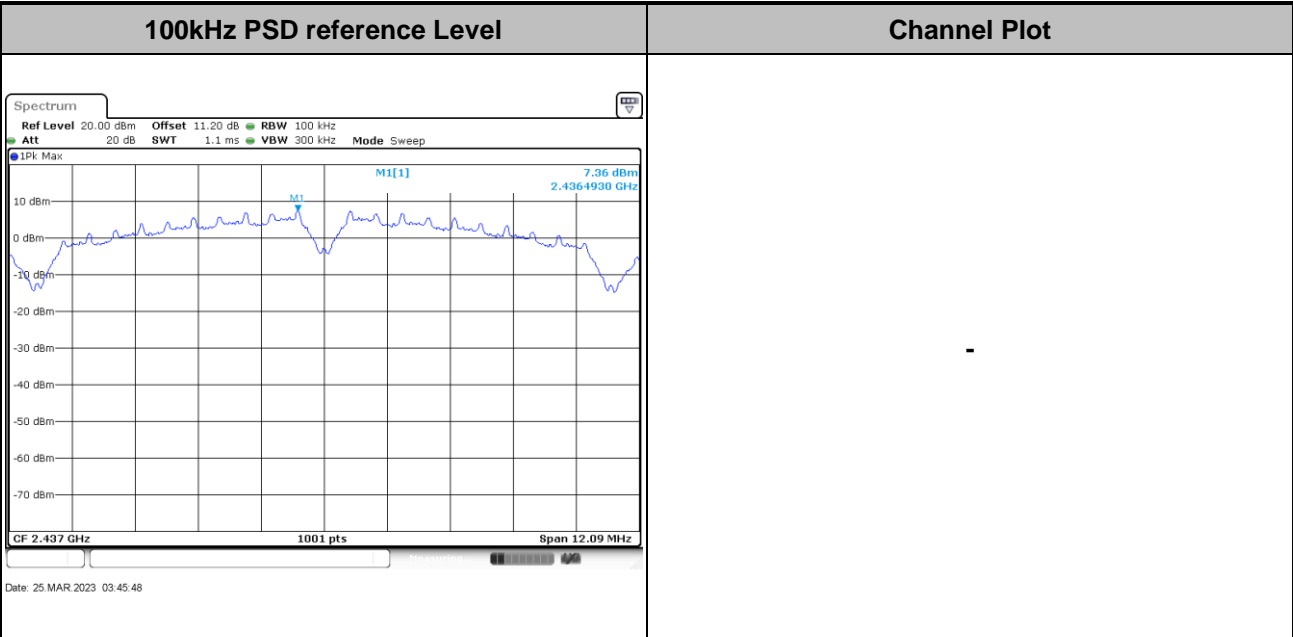





Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

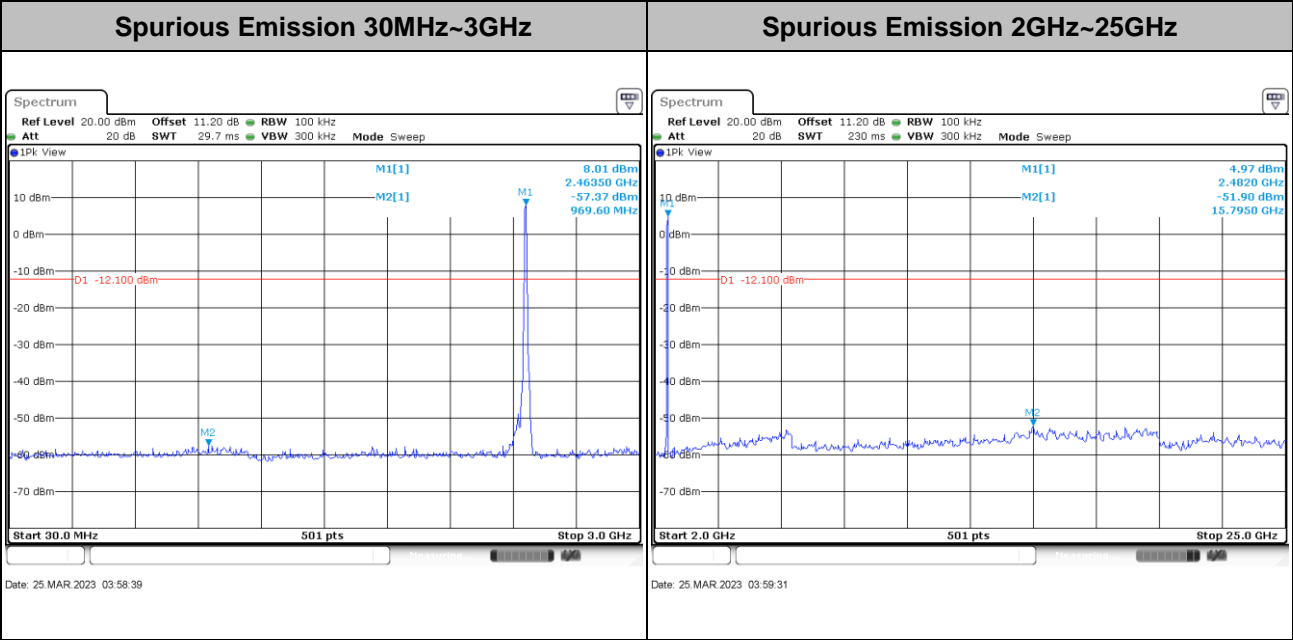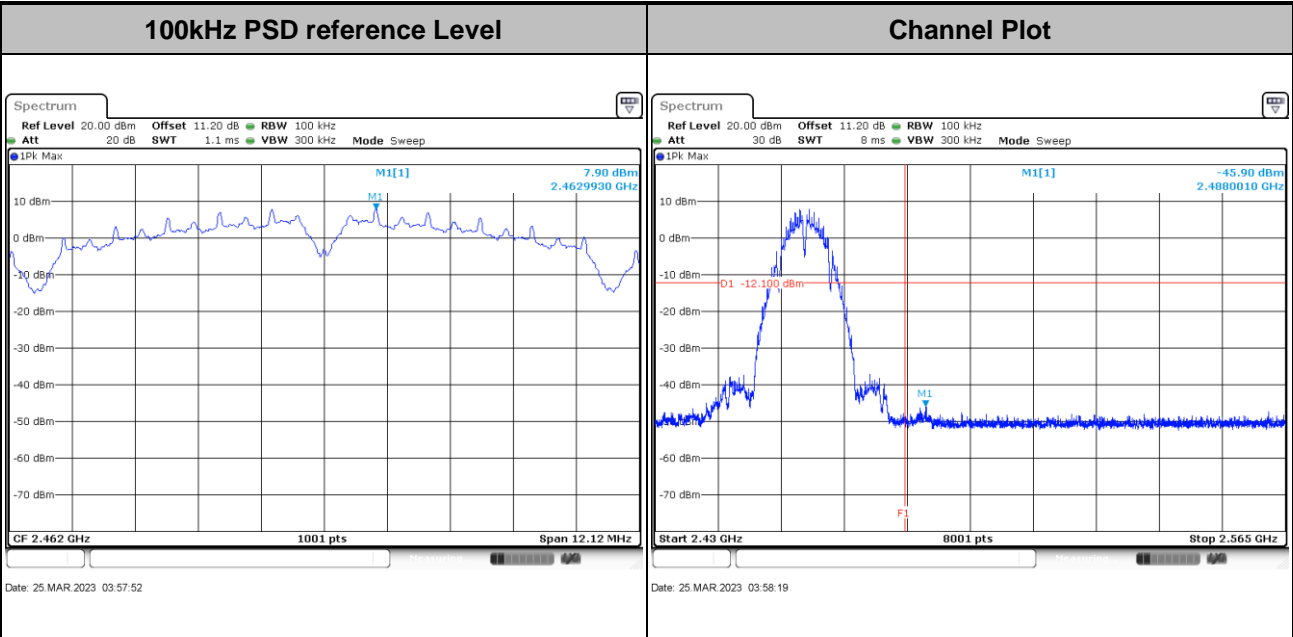







Test Mode : 802.11g Test Channel : 01

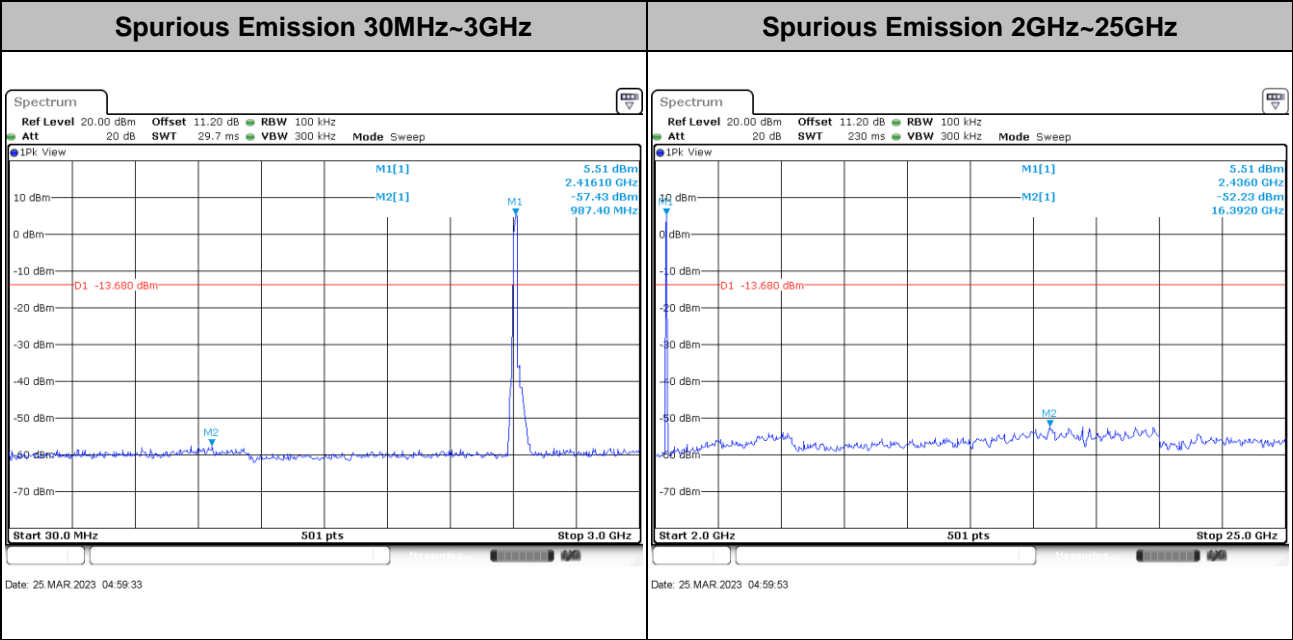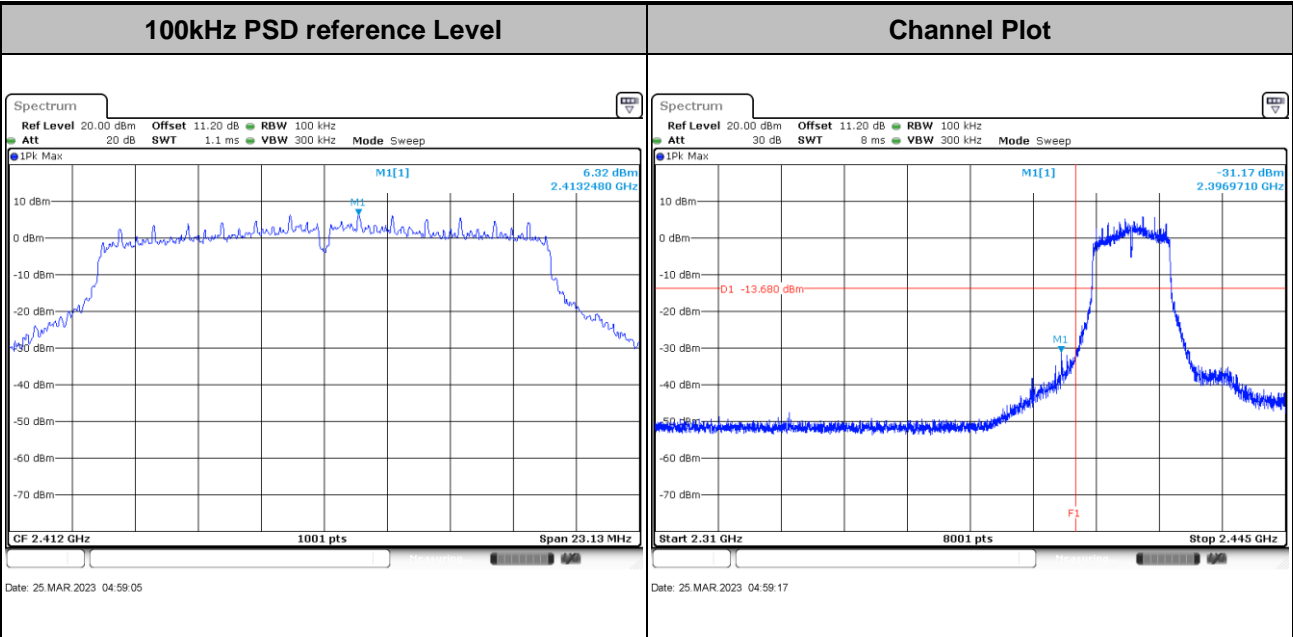





Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

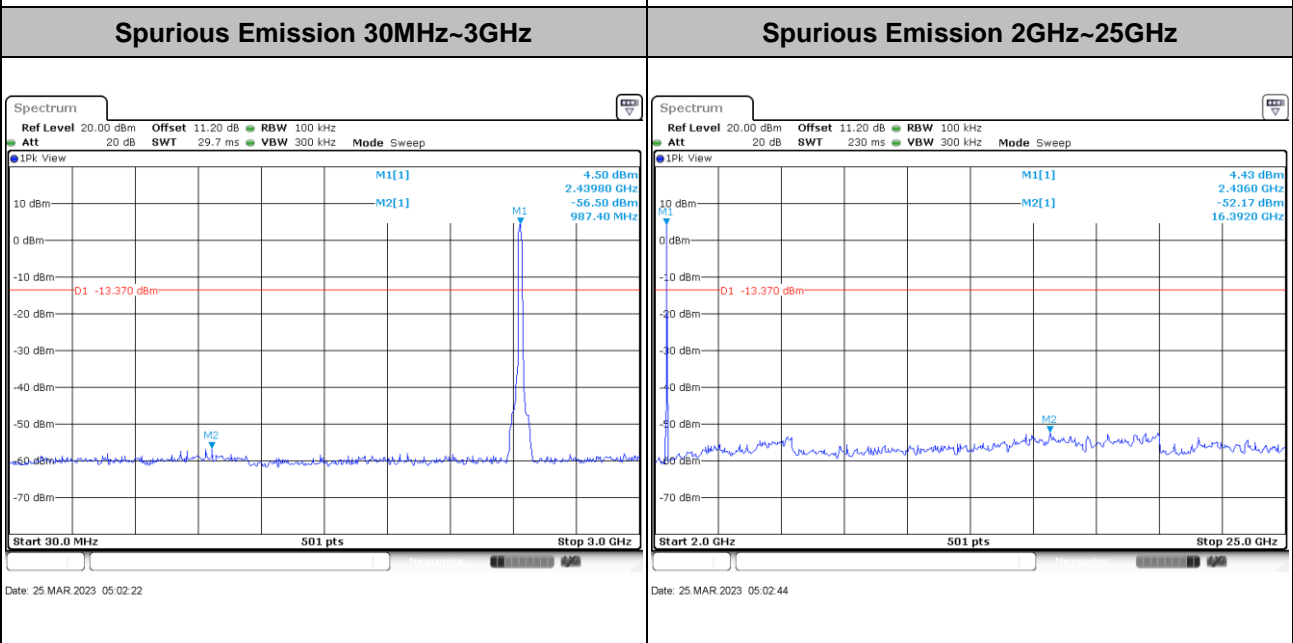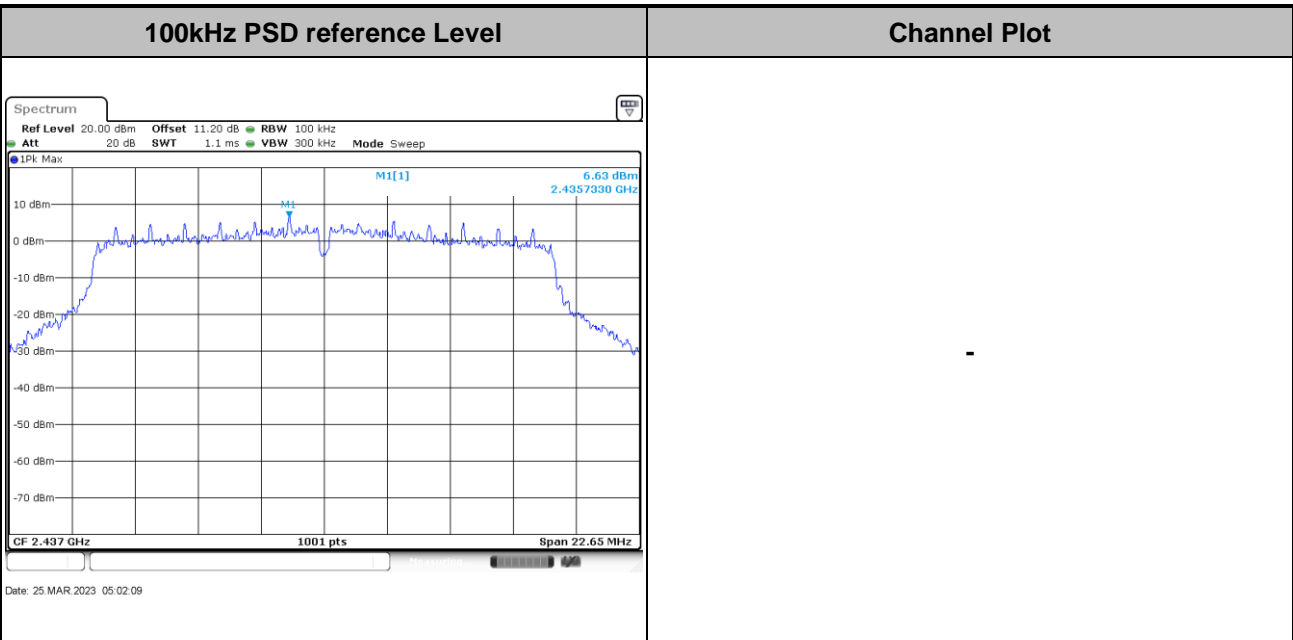







Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

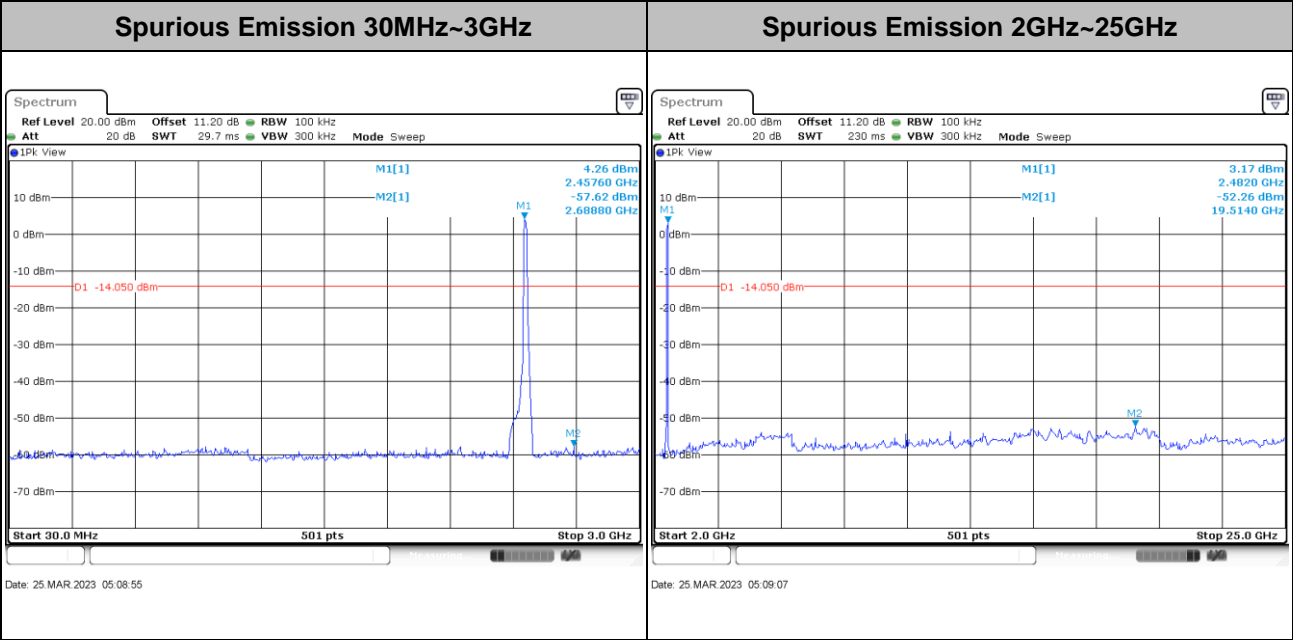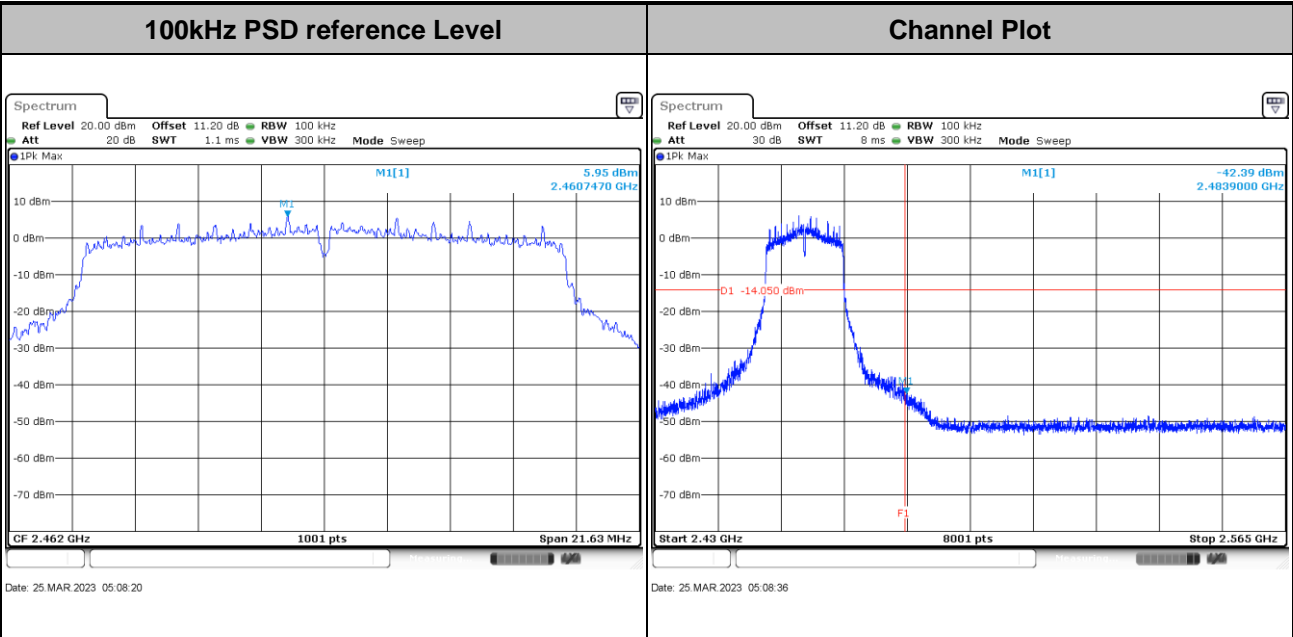





Test Mode : 802.11ax HE20 Test Channel : 01

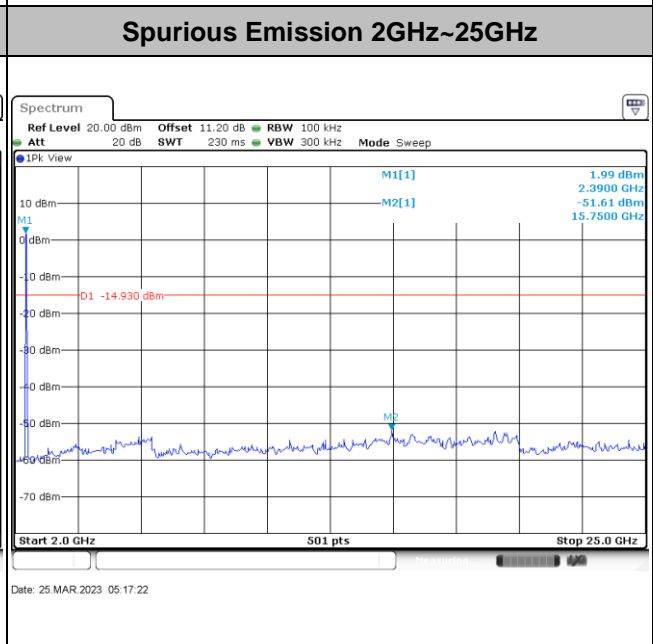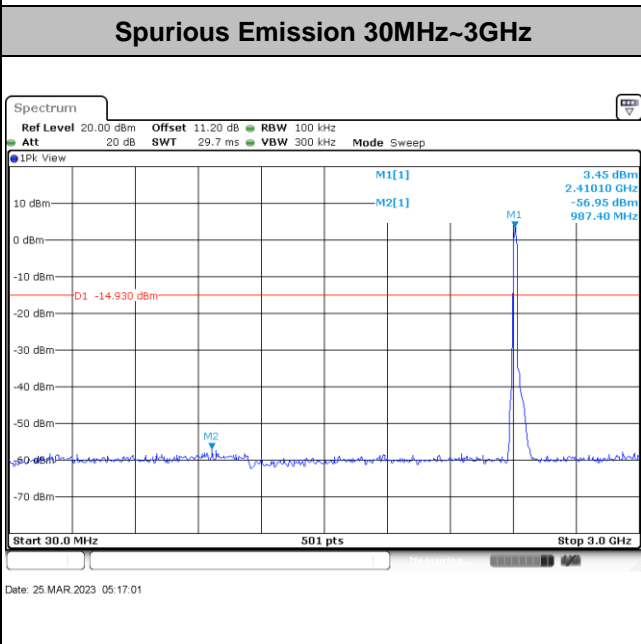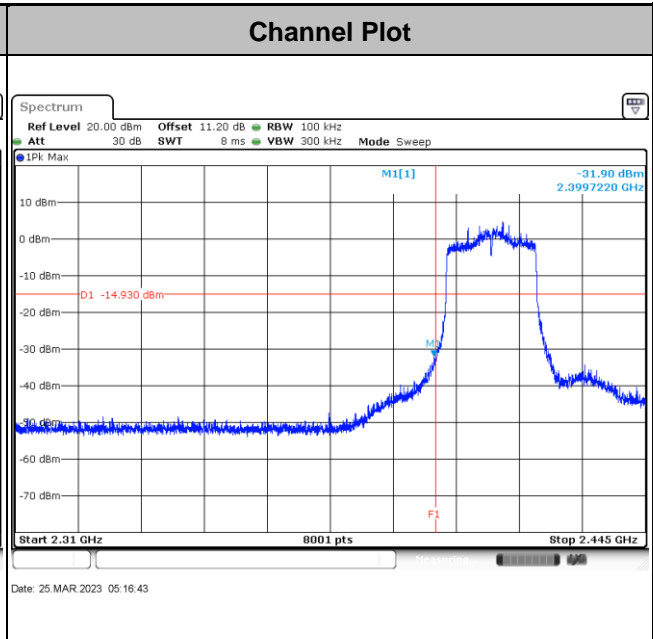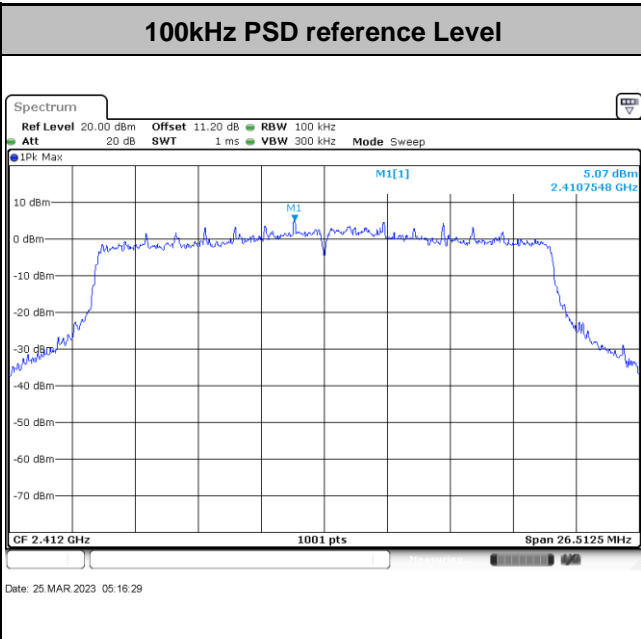





Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

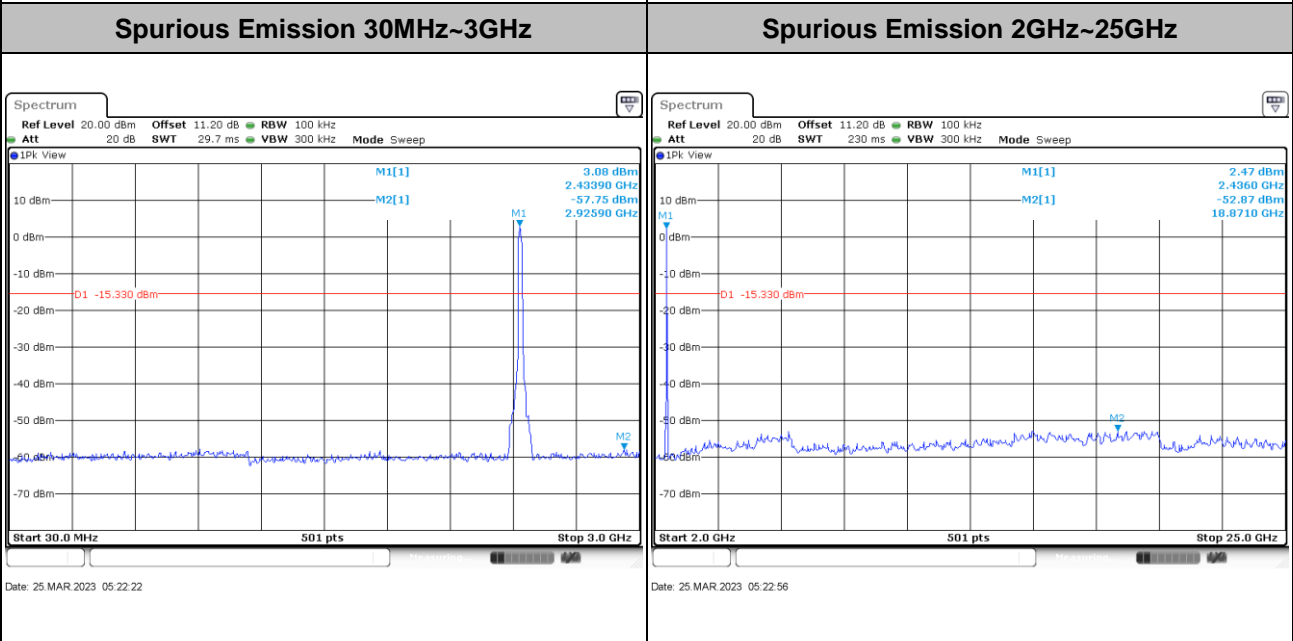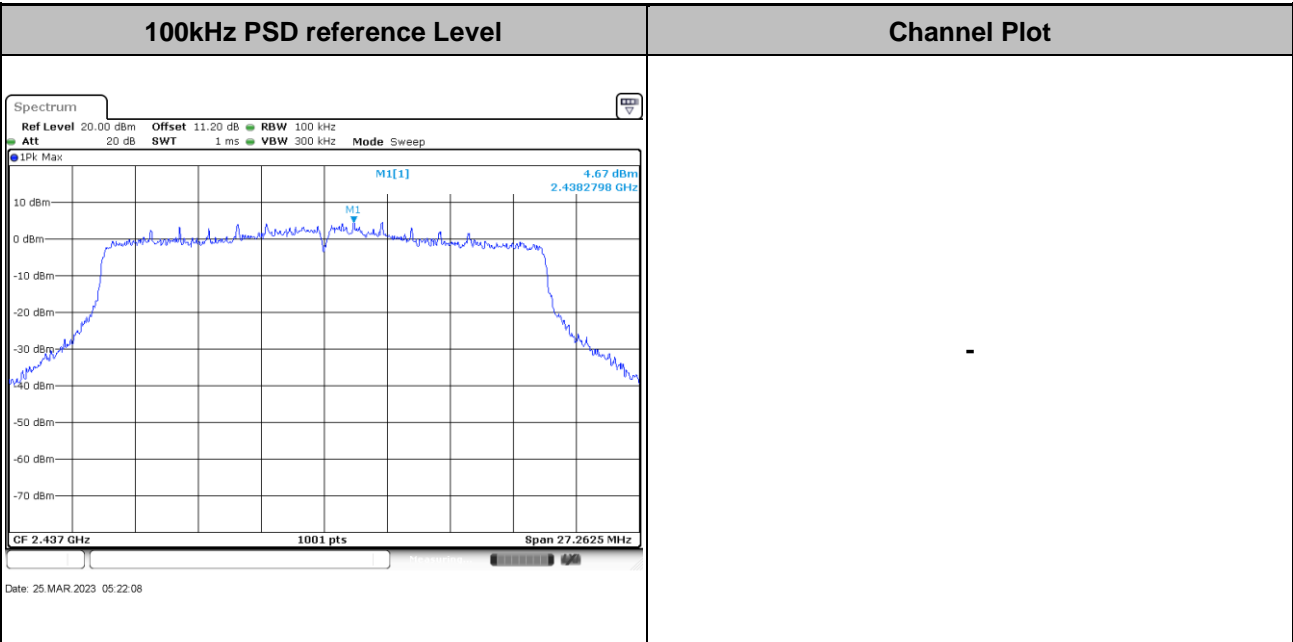





Test Mode :	802.11ax HE20	Test Channel :	11
-------------	---------------	----------------	----

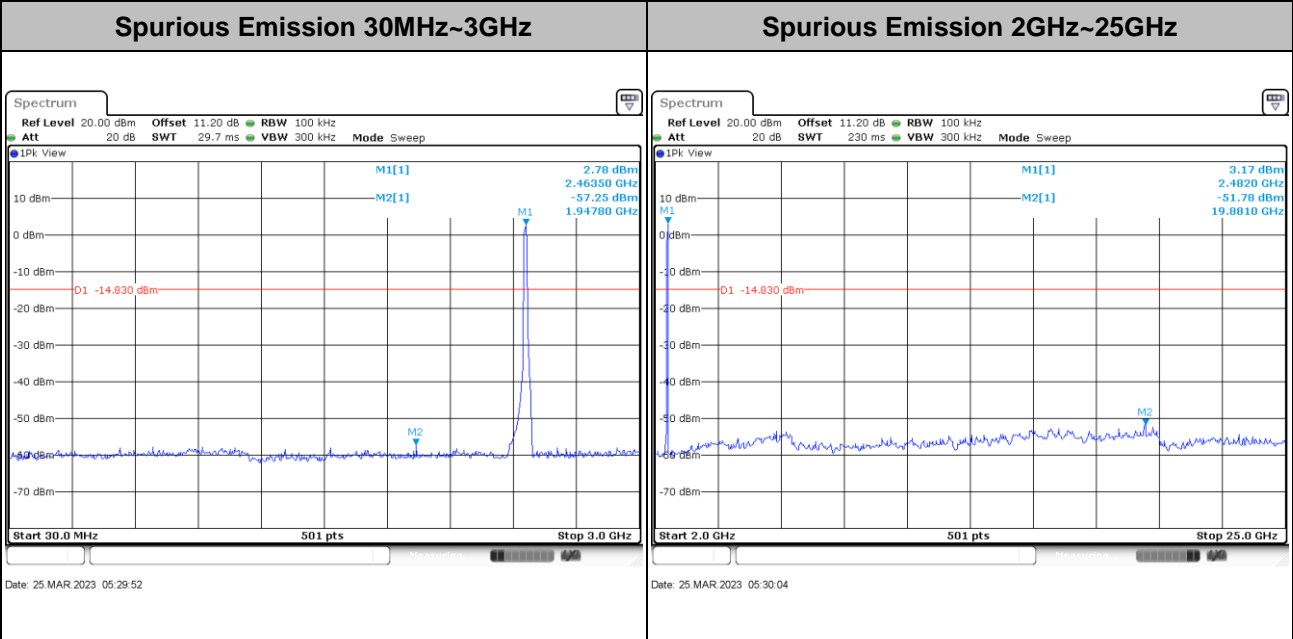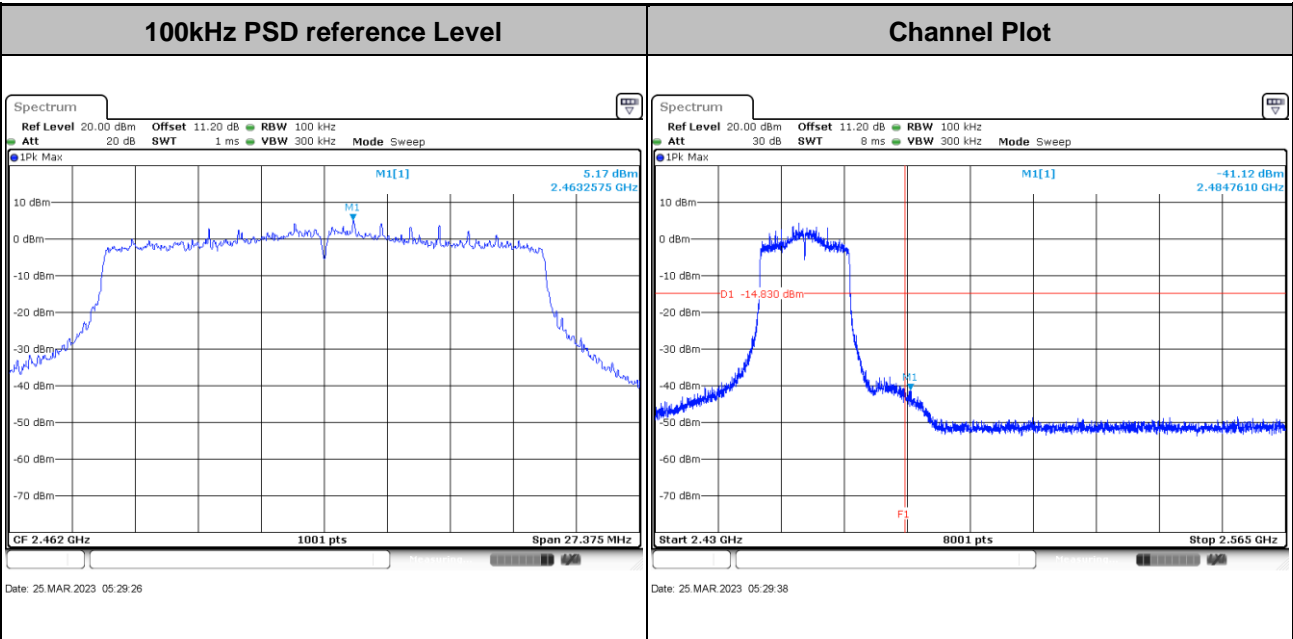





Test Mode :	802.11ax HE40	Test Channel :	03
-------------	---------------	----------------	----

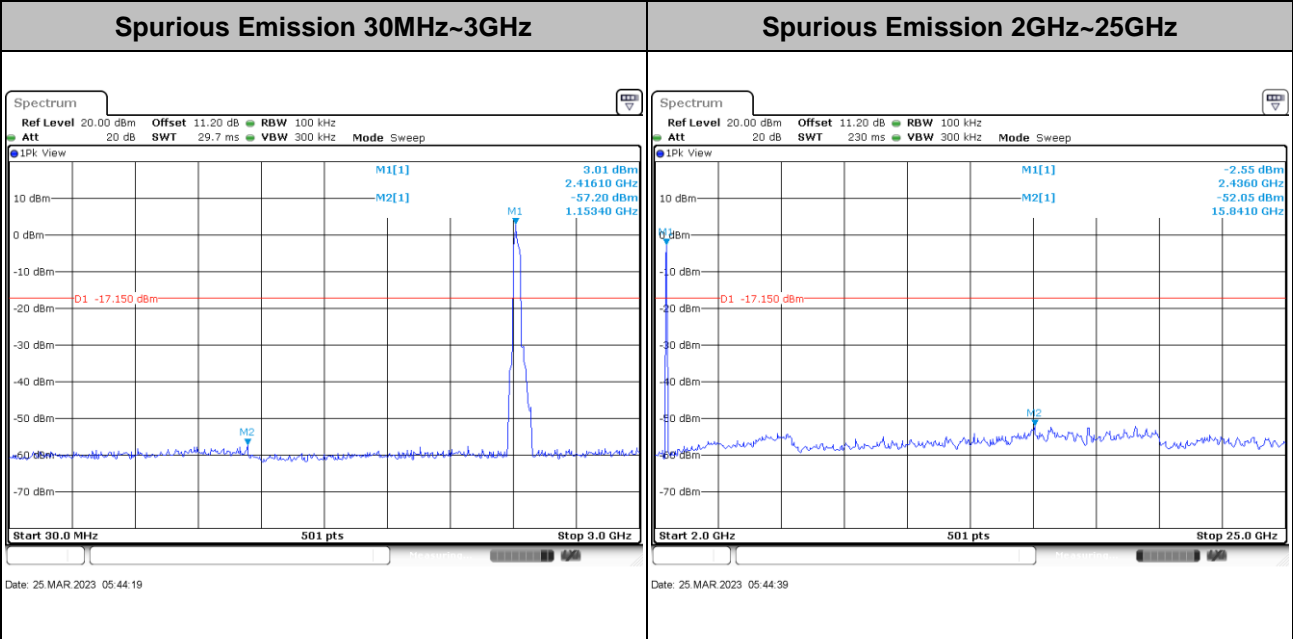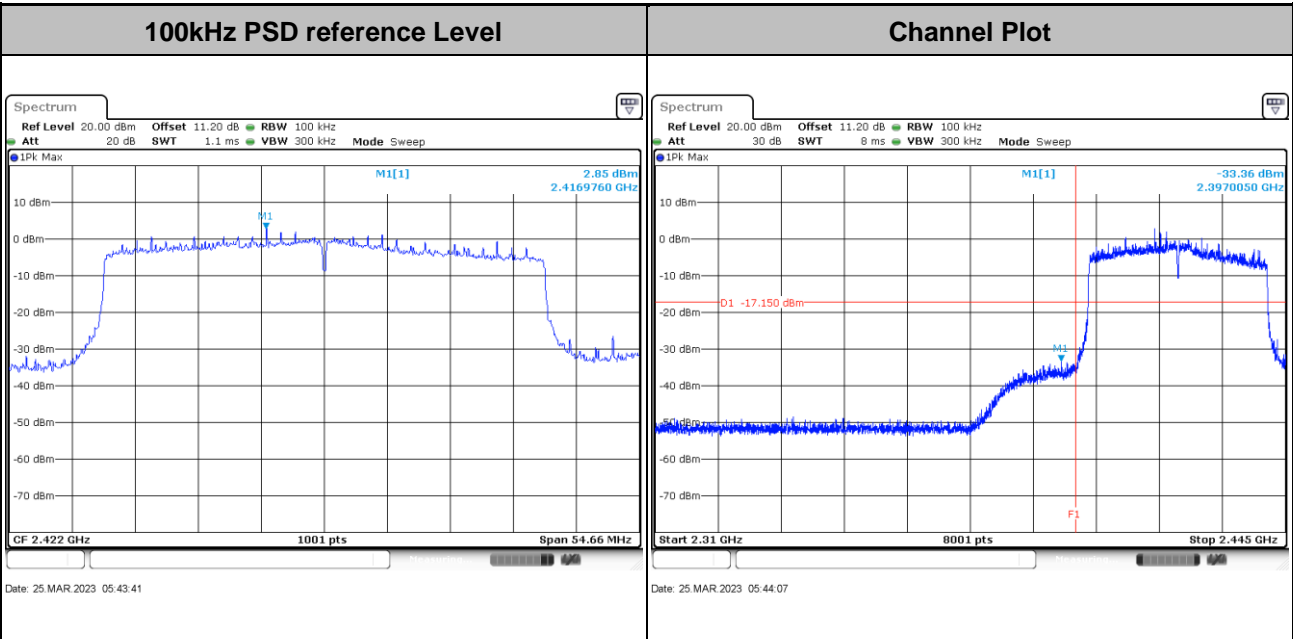





Test Mode :	802.11ax HE40	Test Channel :	06
-------------	---------------	----------------	----

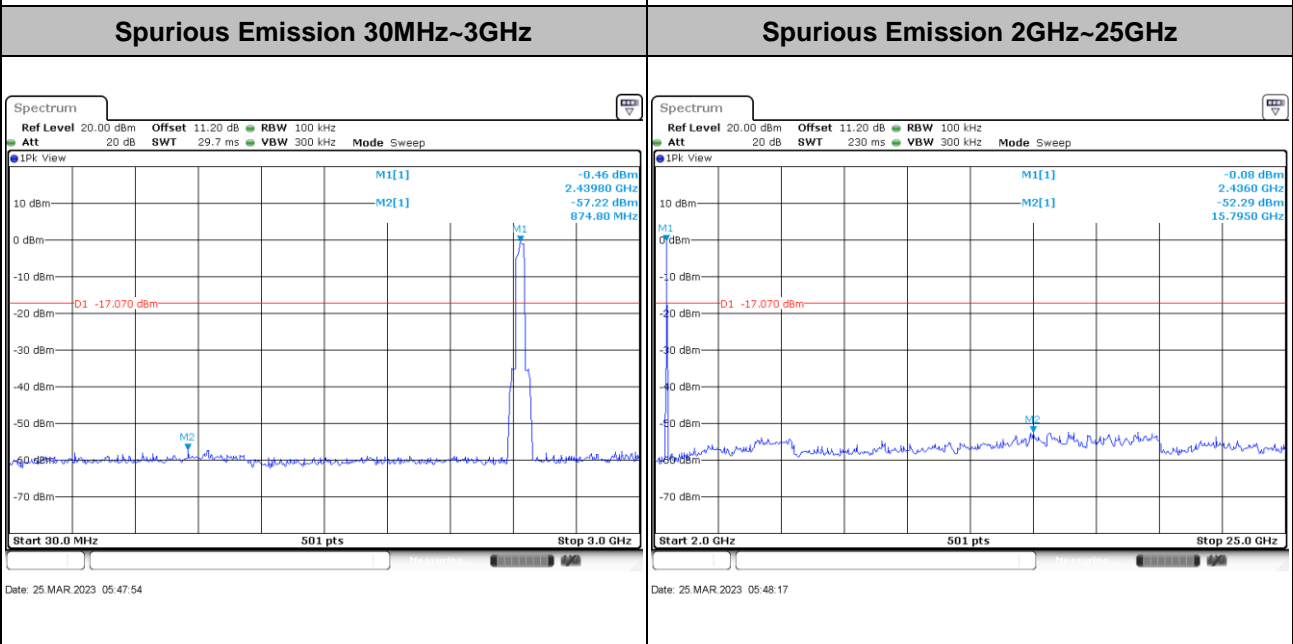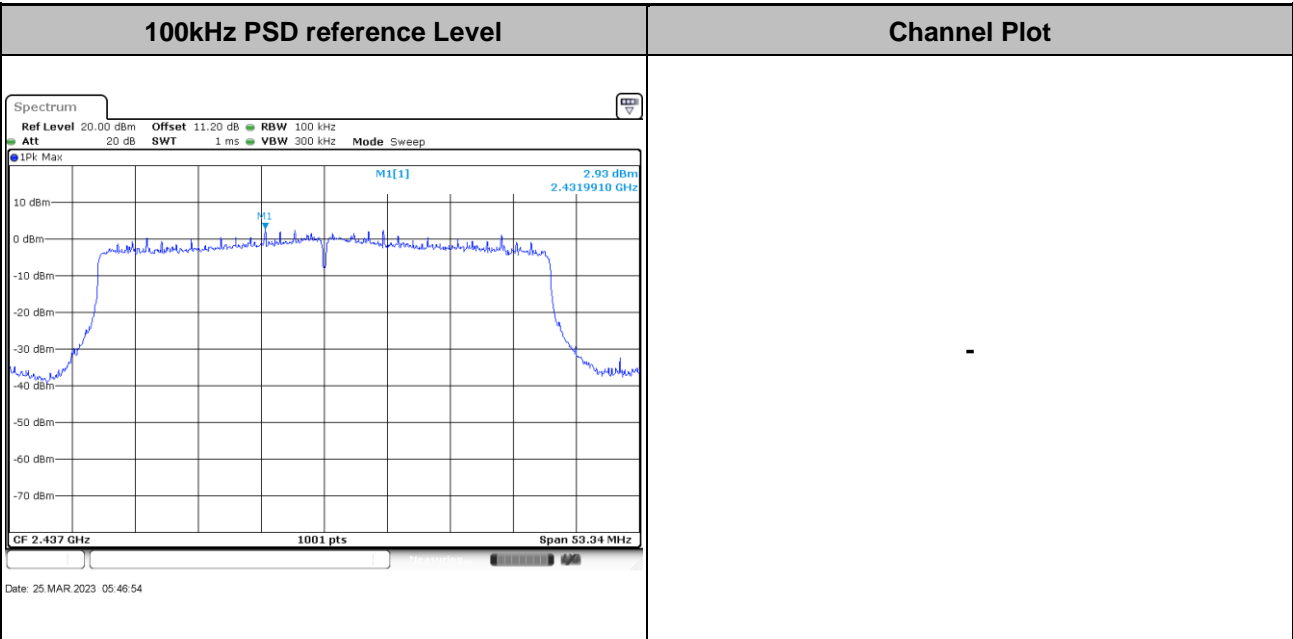





Test Mode : 802.11ax HE40 Test Channel : 09

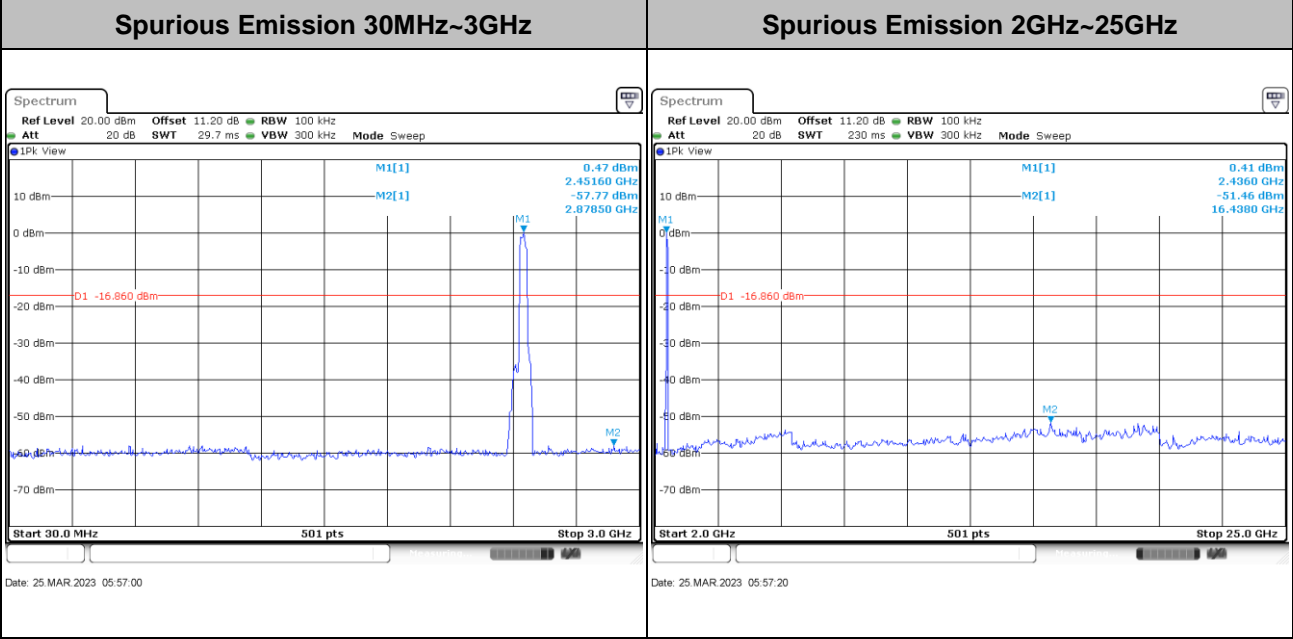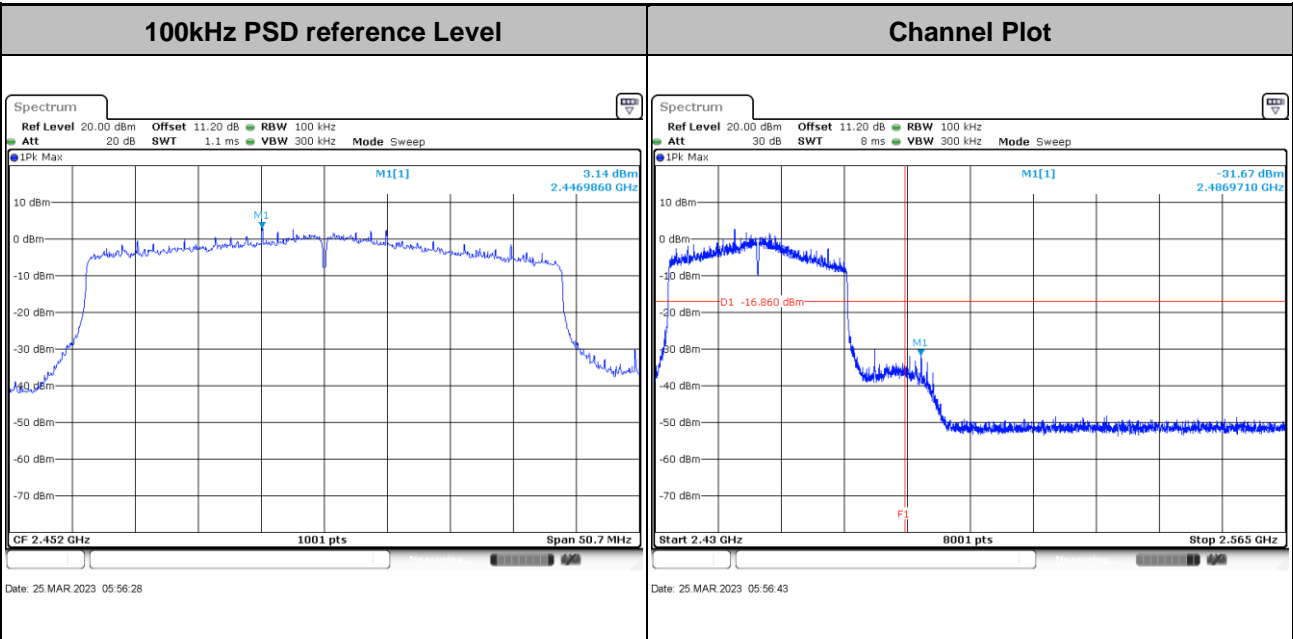



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

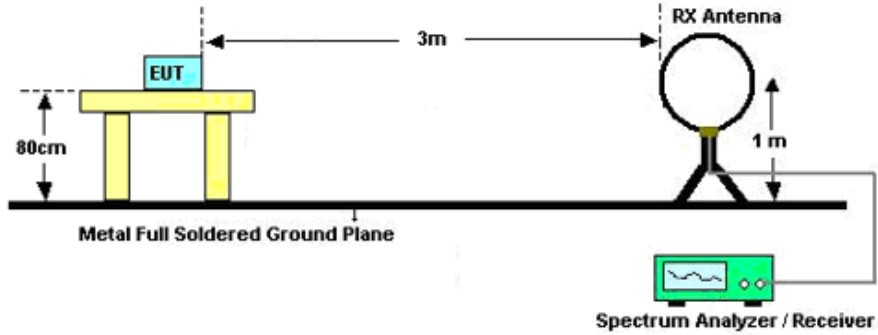

For radiated emissions from 30MHz to 1GHz

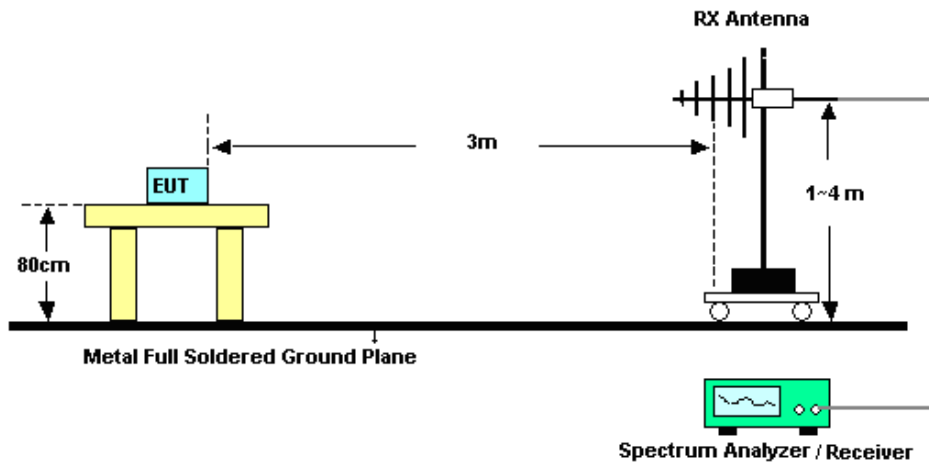

For radiated emissions above 1GHz

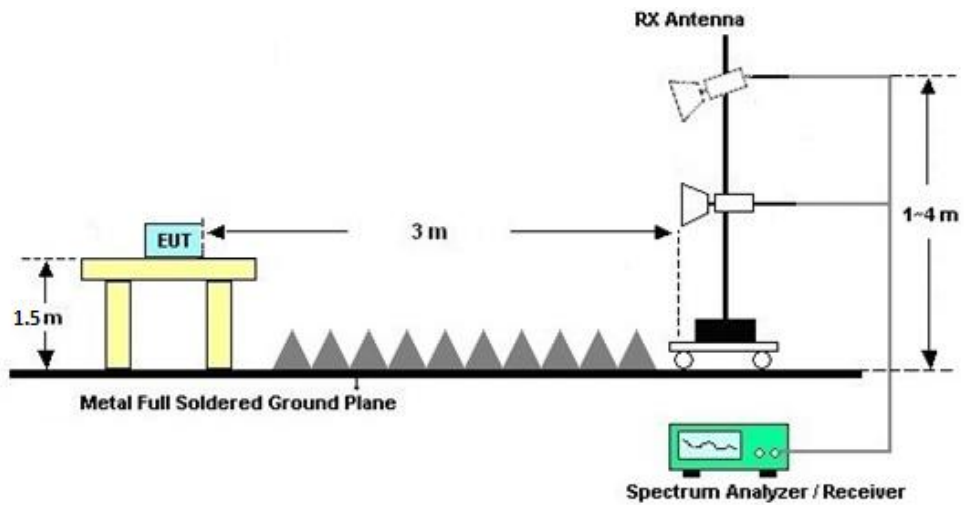



### **3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

### 3.6.4 Test Setup

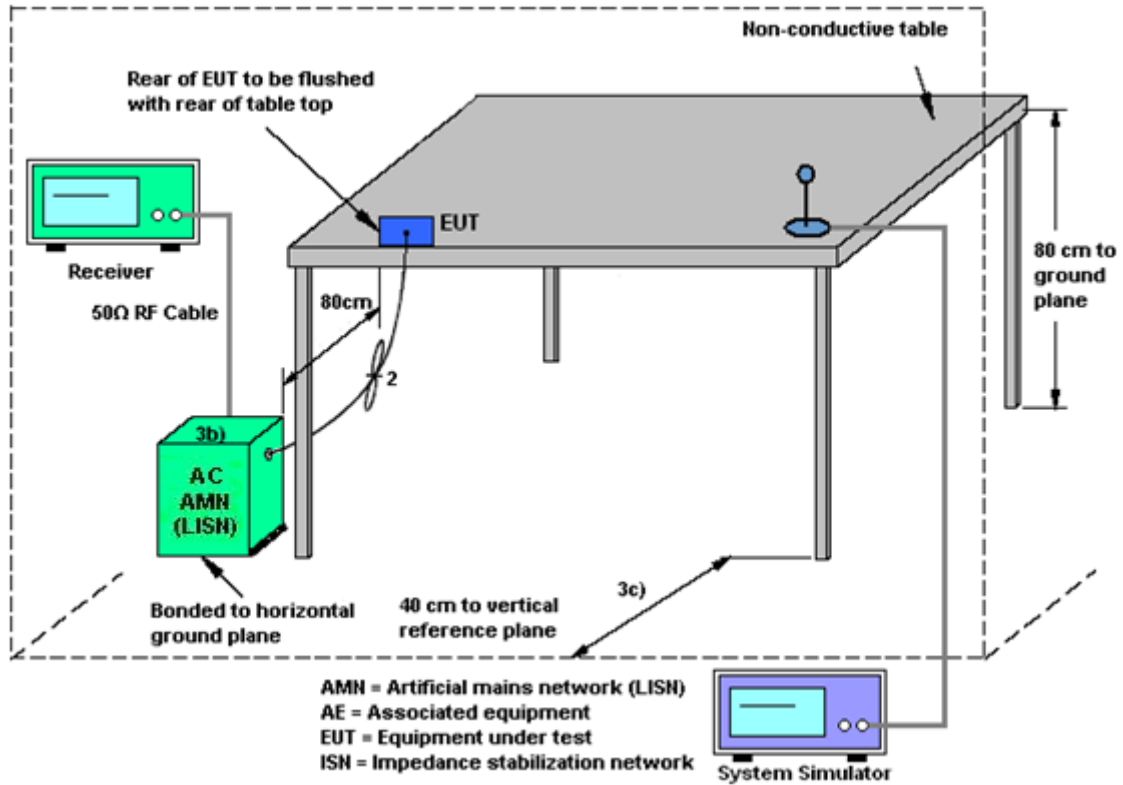

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.7 Antenna Requirements

#### 3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

#### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

Directional gain may be calculated by using the formulas applicable to equal gain antennas with  $G_{ANT}$  set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain  $G_{ANT}$  is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<b>&lt;CDD Modes&gt;</b>						
			<b>DG for Power (dBi)</b>	<b>DG for PSD (dBi)</b>	<b>Power Limit Reduction (dB)</b>	<b>PSD Limit Reduction (dB)</b>
	<b>Ant. 5 (dBi)</b>	<b>Ant. 6 (dBi)</b>				
<b>2.4 GHz</b>	-1.43	-1.70	-1.43	1.45	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Mar. 08, 2023 ~Mar. 28, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Mar. 08, 2023 ~Mar. 28, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Mar. 08, 2023 ~Mar. 28, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec.26, 2022	Mar. 10, 2023 ~Apr. 12, 2023	Dec. 25, 2023	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Mar. 10, 2023 ~Apr. 12, 2023	Jul. 06, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Mar. 10, 2023 ~Apr. 12, 2023	Jun. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Mar. 10, 2023 ~Apr. 12, 2023	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Mar. 10, 2023 ~Apr. 12, 2023	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr.19,2022	Mar. 10, 2023 ~Apr. 12, 2023	Apr.09,2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr.08,2023	~Apr. 12, 2023	Apr.07,2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Mar. 10, 2023 ~Apr. 12, 2023	Apr.05,2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	~Apr. 12, 2023	Apr.03,2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30- 10P-R	1943528	1GHz~18GHz	Oct.19,2022	Mar. 10, 2023 ~Apr. 12, 2023	Oct.18,2023	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct.19,2022	Mar. 10, 2023 ~Apr. 12, 2023	Oct.18,2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-3 5-HG	1871923	18GHz~40GHz	Jul. 06, 2022	Mar. 10, 2023 ~Apr. 12, 2023	Jul. 05, 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	Nov.10.2022	Mar. 10, 2023 ~Apr. 12, 2023	Nov.09.2023	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 10, 2023 ~Apr. 12, 2023	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 10, 2023 ~Apr. 12, 2023	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Mar. 15, 2023 ~Apr. 06, 2023	Jul. 06 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sept. 15, 2022	Mar. 15, 2023 ~Apr. 06, 2023	Sept. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Mar. 15, 2023 ~Apr. 06, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Jul.07, 2022	Mar. 15, 2023 ~Apr. 06, 2023	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required.



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---	-------

----- THE END -----



## Appendix A. Conducted Test Results

## A1. Conducted Test Results

Test Engineer:	Chen Ran	Temperature:	21~25	°C
Test Date:	2023/3/8~2023/3/28	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band MIMO										
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant5	Ant6	Ant5	Ant6		
11b	1Mbps	2	1	2412	13.74	13.44	8.08	8.06	0.50	Pass
11b	1Mbps	2	6	2437	13.59	13.29	8.52	8.06	0.50	Pass
11b	1Mbps	2	11	2462	13.34	13.29	8.08	8.08	0.50	Pass
11g	6Mbps	2	1	2412	16.38	16.38	15.32	15.42	0.50	Pass
11g	6Mbps	2	6	2437	16.23	16.33	15.08	15.10	0.50	Pass
11g	6Mbps	2	11	2462	16.33	16.33	15.12	14.42	0.50	Pass

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band MIMO											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant5	Ant6	Ant5	Ant6		
HE20	MCS0	2	1	2412	Full	18.98	18.88	18.98	17.68	0.50	Pass
HE20	MCS0	2	6	2437	Full	18.83	18.83	18.55	18.18	0.50	Pass
HE20	MCS0	2	11	2462	Full	18.93	18.88	17.48	18.25	0.50	Pass
HE40	MCS0	2	3	2422	Full	37.66	37.76	31.54	36.44	0.50	Pass
HE40	MCS0	2	6	2437	Full	37.96	37.86	37.52	35.56	0.50	Pass
HE40	MCS0	2	9	2452	Full	37.76	37.46	34.36	33.80	0.50	Pass

**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band MIMO																
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant5	Ant6	SUM	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	
11b	1Mbps	2	1	2412	19.68	19.77	22.74	30.00		-1.43		21.31		36.00	Pass	
11b	1Mbps	2	6	2437	19.03	19.84	22.46	30.00		-1.43		21.03		36.00	Pass	
11b	1Mbps	2	11	2462	20.04	19.48	22.78	30.00		-1.43		21.35		36.00	Pass	
11g	6Mbps	2	1	2412	23.64	24.06	26.87	30.00		-1.43		25.44		36.00	Pass	
11g	6Mbps	2	6	2437	23.31	23.99	26.67	30.00		-1.43		25.24		36.00	Pass	
11g	6Mbps	2	11	2462	22.80	22.73	25.78	30.00		-1.43		24.35		36.00	Pass	
HT20	MCS0	2	1	2412	22.40	22.62	25.52	30.00		-1.43		24.09		36.00	Pass	
HT20	MCS0	2	6	2437	22.72	23.09	25.92	30.00		-1.43		24.49		36.00	Pass	
HT20	MCS0	2	11	2462	21.68	21.45	24.58	30.00		-1.43		23.15		36.00	Pass	
HT40	MCS0	2	3	2422	18.50	18.65	21.59	30.00		-1.43		20.16		36.00	Pass	
HT40	MCS0	2	6	2437	19.67	20.03	22.86	30.00		-1.43		21.43		36.00	Pass	
HT40	MCS0	2	9	2452	17.35	17.61	20.49	30.00		-1.43		19.06		36.00	Pass	
VHT20	MCS0	2	1	2412	22.33	22.57	25.46	30.00		-1.43		24.03		36.00	Pass	
VHT20	MCS0	2	6	2437	22.59	22.96	25.79	30.00		-1.43		24.36		36.00	Pass	
VHT20	MCS0	2	11	2462	21.61	21.38	24.51	30.00		-1.43		23.08		36.00	Pass	
VHT40	MCS0	2	3	2422	18.54	18.69	21.63	30.00		-1.43		20.20		36.00	Pass	
VHT40	MCS0	2	6	2437	19.71	20.06	22.90	30.00		-1.43		21.47		36.00	Pass	
VHT40	MCS0	2	9	2452	17.41	17.66	20.55	30.00		-1.43		19.12		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**  
**(Reference Only)**

2.4GHz Band MIMO																
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant5	Ant6	SUM	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	
11b	1Mbps	2	1	2412	17.50	17.50	20.51	30.00	-1.43	19.08	36.00	Pass				
11b	1Mbps	2	6	2437	17.50	17.40	20.46	30.00	-1.43	19.03	36.00	Pass				
11b	1Mbps	2	11	2462	17.60	17.10	20.37	30.00	-1.43	18.94	36.00	Pass				
11g	6Mbps	2	1	2412	17.80	18.00	20.91	30.00	-1.43	19.48	36.00	Pass				
11g	6Mbps	2	6	2437	17.30	17.90	20.62	30.00	-1.43	19.19	36.00	Pass				
11g	6Mbps	2	11	2462	16.90	16.70	19.81	30.00	-1.43	18.38	36.00	Pass				
HT20	MCS0	2	1	2412	16.00	16.40	19.21	30.00	-1.43	17.78	36.00	Pass				
HT20	MCS0	2	6	2437	16.30	16.90	19.62	30.00	-1.43	18.19	36.00	Pass				
HT20	MCS0	2	11	2462	14.50	14.60	17.56	30.00	-1.43	16.13	36.00	Pass				
HT40	MCS0	2	3	2422	11.90	12.20	15.06	30.00	-1.43	13.63	36.00	Pass				
HT40	MCS0	2	6	2437	13.20	13.70	16.47	30.00	-1.43	15.04	36.00	Pass				
HT40	MCS0	2	9	2452	10.40	10.90	13.67	30.00	-1.43	12.24	36.00	Pass				
VHT20	MCS0	2	1	2412	15.90	16.30	19.11	30.00	-1.43	17.68	36.00	Pass				
VHT20	MCS0	2	6	2437	16.20	16.80	19.52	30.00	-1.43	18.09	36.00	Pass				
VHT20	MCS0	2	11	2462	14.40	14.50	17.46	30.00	-1.43	16.03	36.00	Pass				
VHT40	MCS0	2	3	2422	12.00	12.30	15.16	30.00	-1.43	13.73	36.00	Pass				
VHT40	MCS0	2	6	2437	13.30	13.80	16.57	30.00	-1.43	15.14	36.00	Pass				
VHT40	MCS0	2	9	2452	10.50	11.00	13.77	30.00	-1.43	12.34	36.00	Pass				

Note: Measured power (dBm) has offset with cable loss.



**TEST RESULTS DATA**  
**Peak Output Power**

2.4GHz Band MIMO																	
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant5	Ant6	SUM	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	
HE20	MCS0	2	1	2412	Full	22.71	22.97	25.85	30.00		-1.43		24.42		36.00		Pass
HE20	MCS0	2	1	2412	26/0	20.61	20.55	23.59	30.00		-1.43		22.16		36.00		Pass
HE20	MCS0	2	1	2412	52/37	22.70	22.82	25.77	30.00		-1.43		24.34		36.00		Pass
HE20	MCS0	2	1	2412	106/53	22.65	22.78	25.73	30.00		-1.43		24.30		36.00		Pass
HE20	MCS0	2	6	2437	Full	23.45	23.91	26.70	30.00		-1.43		25.27		36.00		Pass
HE20	MCS0	2	11	2462	Full	21.85	21.54	24.71	30.00		-1.43		23.28		36.00		Pass
HE20	MCS0	2	11	2462	26/8	20.89	20.32	23.62	30.00		-1.43		22.19		36.00		Pass
HE20	MCS0	2	11	2462	52/40	21.84	21.51	24.69	30.00		-1.43		23.26		36.00		Pass
HE20	MCS0	2	11	2462	106/54	21.71	21.62	24.68	30.00		-1.43		23.25		36.00		Pass
HE40	MCS0	2	3	2422	Full	18.63	18.78	21.72	30.00		-1.43		20.29		36.00		Pass
HE40	MCS0	2	6	2437	Full	19.78	20.10	22.95	30.00		-1.43		21.52		36.00		Pass
HE40	MCS0	2	9	2452	Full	17.46	17.74	20.61	30.00		-1.43		19.18		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Average Output Power**  
**(Reference Only)**

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant5	Ant6	SUM	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	Ant5	Ant6	
HE20	MCS0	2	1	2412	Full	16.10	16.50	19.31	30.00		-1.43		17.88		36.00		Pass
HE20	MCS0	2	1	2412	26/0	10.10	9.50	12.82	30.00		-1.43		11.39		36.00		Pass
HE20	MCS0	2	1	2412	52/37	11.80	11.40	14.61	30.00		-1.43		13.18		36.00		Pass
HE20	MCS0	2	1	2412	106/53	14.10	13.80	16.96	30.00		-1.43		15.53		36.00		Pass
HE20	MCS0	2	6	2437	Full	16.40	17.00	19.72	30.00		-1.43		18.29		36.00		Pass
HE20	MCS0	2	11	2462	Full	14.60	14.70	17.66	30.00		-1.43		16.23		36.00		Pass
HE20	MCS0	2	11	2462	26/8	10.20	9.60	12.92	30.00		-1.43		11.49		36.00		Pass
HE20	MCS0	2	11	2462	52/40	12.30	11.90	15.11	30.00		-1.43		13.68		36.00		Pass
HE20	MCS0	2	11	2462	106/54	14.30	13.90	17.11	30.00		-1.43		15.68		36.00		Pass
HE40	MCS0	2	3	2422	Full	12.10	12.40	15.26	30.00		-1.43		13.83		36.00		Pass
HE40	MCS0	2	6	2437	Full	13.40	13.90	16.67	30.00		-1.43		15.24		36.00		Pass
HE40	MCS0	2	9	2452	Full	10.60	11.10	13.87	30.00		-1.43		12.44		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**

2.4GHz Band MIMO												
Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant5	Ant6	Worse + 3.01	Ant5	Ant6	Ant5	Ant6	
11b	1Mbps	2	1	2412	-5.13	-7.08	-2.12	1.45		8.00		Pass
11b	1Mbps	2	6	2437	-7.70	-6.83	-3.82	1.45		8.00		Pass
11b	1Mbps	2	11	2462	-5.99	-6.74	-2.98	1.45		8.00		Pass
11g	6Mbps	2	1	2412	-8.52	-8.35	-5.34	1.45		8.00		Pass
11g	6Mbps	2	6	2437	-9.42	-7.82	-4.81	1.45		8.00		Pass
11g	6Mbps	2	11	2462	-8.21	-9.82	-5.20	1.45		8.00		Pass

Measured power density (dBm) has offset with cable loss.

**TEST RESULTS DATA**  
**Peak Power Spectral Density**


2.4GHz Band MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant5	Ant6	Worse + 3.01	Ant5	Ant6	Ant5	Ant6	
HE20	MCS0	2	1	2412	Full	-8.74	-8.76	-5.73	1.45		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-9.05	-9.23	-6.04	1.45		8.00		Pass
HE20	MCS0	2	1	2412	52/37	-9.17	-9.00	-5.99	1.45		8.00		Pass
HE20	MCS0	2	1	2412	106/53	-9.47	-9.18	-6.17	1.45		8.00		Pass
HE20	MCS0	2	6	2437	Full	-8.83	-8.98	-5.82	1.45		8.00		Pass
HE20	MCS0	2	11	2462	Full	-7.88	-7.98	-4.87	1.45		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-8.22	-8.47	-5.21	1.45		8.00		Pass
HE20	MCS0	2	11	2462	52/40	-8.03	-8.30	-5.02	1.45		8.00		Pass
HE20	MCS0	2	11	2462	106/54	-8.27	-8.33	-5.26	1.45		8.00		Pass
HE40	MCS0	2	3	2422	Full	-12.68	-12.51	-9.50	1.45		8.00		Pass
HE40	MCS0	2	6	2437	Full	-11.93	-11.46	-8.45	1.45		8.00		Pass
HE40	MCS0	2	9	2452	Full	-11.69	-12.30	-8.68	1.45		8.00		Pass

Measured power density (dBm) has offset with cable loss.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

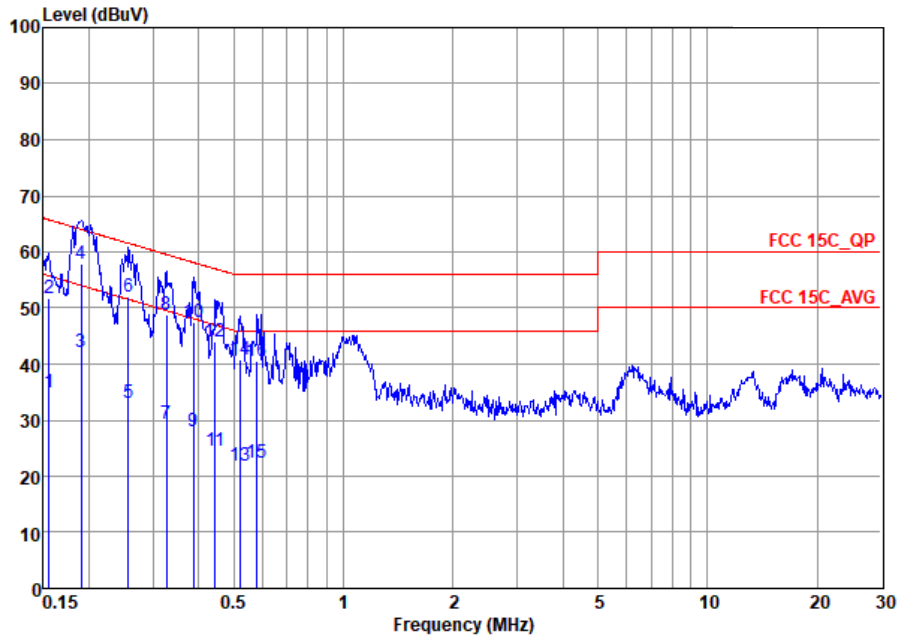


Site : C001-SZ  
 Condition: FCC 15C\_QP LISN\_20230420\_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	34.81	-20.88	55.69	14.20	10.47	10.14	Average
2	0.156	51.81	-13.88	65.69	31.20	10.47	10.14	QP
3	0.190	42.08	-11.94	54.02	21.50	10.43	10.15	Average
4 *	0.190	57.88	-6.14	64.02	37.30	10.43	10.15	QP
5	0.256	33.13	-18.43	51.56	12.60	10.38	10.15	Average
6	0.256	51.93	-9.63	61.56	31.40	10.38	10.15	QP
7	0.327	29.29	-20.24	49.53	8.79	10.34	10.16	Average
8	0.327	48.89	-10.64	59.53	28.39	10.34	10.16	QP
9	0.387	28.04	-20.08	48.12	7.59	10.29	10.16	Average
10	0.387	47.44	-10.68	58.12	26.99	10.29	10.16	QP
11	0.444	24.53	-22.45	46.98	4.10	10.27	10.16	Average
12	0.444	43.93	-13.05	56.98	23.50	10.27	10.16	QP
13	0.518	21.82	-24.18	46.00	1.40	10.26	10.16	Average
14	0.518	40.92	-15.08	56.00	20.50	10.26	10.16	QP
15	0.579	22.53	-23.47	46.00	2.10	10.27	10.16	Average
16	0.579	40.63	-15.37	56.00	20.20	10.27	10.16	QP



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

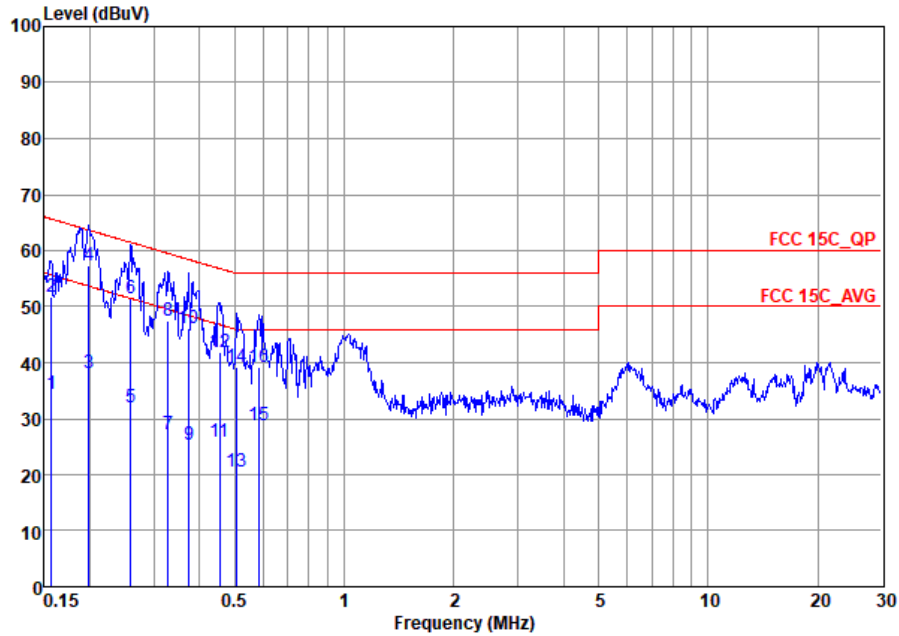

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20230420\_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.156	34.39	-21.26	55.65	13.80	10.45	10.14	Average
2	0.156	51.69	-13.96	65.65	31.10	10.45	10.14	QP
3	0.199	38.00	-15.67	53.67	17.50	10.35	10.15	Average
4 *	0.199	57.30	-6.37	63.67	36.80	10.35	10.15	QP
5	0.259	31.97	-19.50	51.47	11.50	10.32	10.15	Average
6	0.259	51.47	-10.00	61.47	31.00	10.32	10.15	QP
7	0.329	27.33	-22.16	49.49	6.90	10.27	10.16	Average
8	0.329	47.43	-12.06	59.49	27.00	10.27	10.16	QP
9	0.375	25.21	-23.18	48.39	4.80	10.25	10.16	Average
10	0.375	46.21	-12.18	58.39	25.80	10.25	10.16	QP
11	0.454	25.79	-21.01	46.80	5.40	10.23	10.16	Average
12	0.454	41.89	-14.91	56.80	21.50	10.23	10.16	QP
13	0.507	20.47	-25.53	46.00	0.10	10.21	10.16	Average
14	0.507	39.27	-16.73	56.00	18.90	10.21	10.16	QP
15	0.585	28.79	-17.21	46.00	8.40	10.23	10.16	Average
16	0.585	39.29	-16.71	56.00	18.90	10.23	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Zhaohui Liang	Relative Humidity :	50%
		Temperature :	20~22°C

### Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	5+6	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	5+6	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	5+6	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	5+6	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	5+6	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	5+6	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	5+6	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 8	2400-2483.5	5+6	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 9	2400-2483.5	5+6	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 10	2400-2483.5	5+6	802.11ax HE40	03	2422	MCS0	Full RU	-
Mode 11	2400-2483.5	5+6	802.11ax HE40	06	2437	MCS0	Full RU	-
Mode 12	2400-2483.5	5+6	802.11ax HE40	09	2452	MCS0	Full RU	-
Mode 13	2400-2483.5	5+6	802.11ax HE20	01	2412	MCS0	Partial RU 52/37	-
Mode 14	2400-2483.5	5+6	802.11ax HE20	11	2462	MCS0	Partial RU 52/40	-
Mode 15	2400-2483.5	5+6	802.11ax HE20	01	2462	MCS0	-	LF



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2388.13	42.90	54.00	-11.10	H	AVERAGE	Pass	Band Edge
	802.11b	01	4824.00	46.33	74.00	-27.67	H	Peak	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
	802.11b	06	7311.00	47.76	74.00	-26.24	H	Peak	Pass	Harmonic
3	802.11b	11	2483.51	45.70	54.00	-8.30	H	AVERAGE	Pass	Band Edge
	802.11b	11	7386.00	47.83	74.00	-26.17	H	Peak	Pass	Harmonic
4	802.11g	01	2389.95	49.93	54.00	-4.07	H	AVERAGE	Pass	Band Edge
	802.11g	01	4824.00	45.75	74.00	-28.25	H	Peak	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	47.84	74.00	-26.16	H	Peak	Pass	Harmonic
6	802.11g	11	2483.51	50.18	54.00	-3.82	H	AVERAGE	Pass	Band Edge
	802.11g	11	7386.00	47.97	74.00	-26.03	V	Peak	Pass	Harmonic
7	802.11ax HE20	01	2389.95	50.44	54.00	-3.56	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	4824.00	46.97	74.00	-27.03	H	Peak	Pass	Harmonic
8	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
	802.11ax HE20	06	7311.00	47.90	74.00	-26.10	H	Peak	Pass	Harmonic
9	802.11ax HE20	11	2483.51	49.28	54.00	-4.72	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	7386.00	47.83	74.00	-26.17	H	Peak	Pass	Harmonic
10	802.11ax HE40	03	2389.97	49.54	54.00	-4.46	V	AVERAGE	Pass	Band Edge
	802.11ax HE40	03	7266.00	47.60	74.00	-26.40	V	Peak	Pass	Harmonic
11	802.11ax HE40	06	2483.81	49.55	54.00	-4.45	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	06	7311.00	47.66	74.00	-26.34	V	Peak	Pass	Harmonic
12	802.11ax HE40	09	2483.58	50.04	54.00	-3.96	H	AVERAGE	Pass	Band Edge
	802.11ax HE40	09	7356.00	47.55	74.00	-26.45	V	Peak	Pass	Harmonic





13	802.11ax HE20	01	2389.43	41.06	54.00	-12.94	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
14	802.11ax HE20	11	2484.65	41.09	54.00	-12.91	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	01	84.32	31.99	40	-8.01	V	Peak	Pass	LF



<Co-location>

2.4GHz 2400~2483.5MHz

802.11ax HE20 CH01 2412MHz+ LTE Band48 Link (Band Edge @ 3m)

WIFI Ant. 5+6	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 01 2412MHz & Band48 Co-location		2389.38	61.78	-12.22	74	53.79	32.26	7.8	32.07	239	329	P	H
		2390	50.3	-3.7	54	42.32	32.26	7.8	32.08	239	329	A	H
	*	2412	108.77	-	-	100.74	32.31	7.8	32.08	239	329	P	H
	*	2412	100.35	-	-	92.32	32.31	7.8	32.08	239	329	A	H
		2389.485	62.32	-11.68	74	54.33	32.26	7.8	32.07	362	233	P	V
		2389.8	50.18	-3.82	54	42.2	32.26	7.8	32.08	362	233	A	V
	*	2412	106.87	-	-	98.84	32.31	7.8	32.08	362	233	P	V
	*	2412	97.96	-	-	89.93	32.31	7.8	32.08	362	233	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 5+6	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 CH 01 2412MHz & Band48 Co-location		4824	46.5	-27.5	74	52.16	34.83	11.08	51.57	-	-	P	H
		4824	46.74	-27.26	74	52.4	34.83	11.08	51.57	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



1																																								
Mode	Band Edge																																							
	2400-2483.5_802.11b_CH01_2412MHz																																							
ANT	5+6																																							
Pol.	Horizontal																																							
Peak	<p>Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.61</td> <td>52.89</td> <td>74.00</td> <td>-21.11</td> <td>44.97</td> <td>32.25</td> <td>7.75</td> <td>32.08</td> <td>100</td> <td>215</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2387.61	52.89	74.00	-21.11	44.97	32.25	7.75	32.08	100	215	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2387.61	52.89	74.00	-21.11	44.97	32.25	7.75	32.08	100	215	PEAK																													
<p>Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>108.67</td> <td>-----</td> <td>-----</td> <td>100.63</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>100</td> <td>215</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	108.67	-----	-----	100.63	32.31	7.81	32.08	100	215	Peak	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2412.00	108.67	-----	-----	100.63	32.31	7.81	32.08	100	215	Peak																													
Avg	<p>Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.13</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>34.97</td> <td>32.25</td> <td>7.76</td> <td>32.08</td> <td>100</td> <td>215</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2388.13	42.90	54.00	-11.10	34.97	32.25	7.76	32.08	100	215	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2388.13	42.90	54.00	-11.10	34.97	32.25	7.76	32.08	100	215	AVERAGE																													
<p>Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.35</td> <td>-----</td> <td>-----</td> <td>96.31</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>100</td> <td>215</td> <td>Average</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	104.35	-----	-----	96.31	32.31	7.81	32.08	100	215	Average	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																
1	2412.00	104.35	-----	-----	96.31	32.31	7.81	32.08	100	215	Average																													



1																																																																									
<b>Mode</b>	<b>Band Edge</b>																																																																								
2400-2483.5_802.11b_CH01_2412MHz																																																																									
<b>ANT</b>	<b>5+6</b>																																																																								
<b>Pol.</b>	<b>Vertical</b>																																																																								
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.69</th> <th>56.46</th> <th>74.00</th> <th>-17.54</th> <th>48.52</th> <th>32.26</th> <th>7.76</th> <th>32.08</th> <th>400</th> <th>307</th> <th>PEAK</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>56.46</td> <td>74.00</td> <td>-17.54</td> <td>48.52</td> <td>32.26</td> <td>7.76</td> <td>32.08</td> <td>400</td> <td>307</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>1</th> <th>2412.00</th> <th>104.27</th> <th>-----</th> <th>-----</th> <th>96.23</th> <th>32.31</th> <th>7.81</th> <th>32.08</th> <th>400</th> <th>307</th> <th>Peak</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.27</td> <td>-----</td> <td>-----</td> <td>96.23</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>400</td> <td>307</td> <td>Peak</td> </tr> </tbody> </table> </div> </div>	1	2389.69	56.46	74.00	-17.54	48.52	32.26	7.76	32.08	400	307	PEAK	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark			1	2389.69	56.46	74.00	-17.54	48.52	32.26	7.76	32.08	400	307	PEAK	1	2412.00	104.27	-----	-----	96.23	32.31	7.81	32.08	400	307	Peak	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark			1	2412.00	104.27	-----	-----	96.23	32.31	7.81	32.08	400	307	Peak
1	2389.69	56.46	74.00	-17.54	48.52	32.26	7.76	32.08	400	307	PEAK																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																
1	2389.69	56.46	74.00	-17.54	48.52	32.26	7.76	32.08	400	307	PEAK																																																														
1	2412.00	104.27	-----	-----	96.23	32.31	7.81	32.08	400	307	Peak																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																
1	2412.00	104.27	-----	-----	96.23	32.31	7.81	32.08	400	307	Peak																																																														
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>1</th> <th>2389.30</th> <th>42.82</th> <th>54.00</th> <th>-11.18</th> <th>34.88</th> <th>32.26</th> <th>7.76</th> <th>32.08</th> <th>400</th> <th>307</th> <th>AVERAGE</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>42.82</td> <td>54.00</td> <td>-11.18</td> <td>34.88</td> <td>32.26</td> <td>7.76</td> <td>32.08</td> <td>400</td> <td>307</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 12 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>1</th> <th>2412.00</th> <th>99.98</th> <th>-----</th> <th>-----</th> <th>91.94</th> <th>32.31</th> <th>7.81</th> <th>32.08</th> <th>400</th> <th>307</th> <th>Average</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="3">Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.98</td> <td>-----</td> <td>-----</td> <td>91.94</td> <td>32.31</td> <td>7.81</td> <td>32.08</td> <td>400</td> <td>307</td> <td>Average</td> </tr> </tbody> </table> </div> </div>	1	2389.30	42.82	54.00	-11.18	34.88	32.26	7.76	32.08	400	307	AVERAGE	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark			1	2389.30	42.82	54.00	-11.18	34.88	32.26	7.76	32.08	400	307	AVERAGE	1	2412.00	99.98	-----	-----	91.94	32.31	7.81	32.08	400	307	Average	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark			1	2412.00	99.98	-----	-----	91.94	32.31	7.81	32.08	400	307	Average
1	2389.30	42.82	54.00	-11.18	34.88	32.26	7.76	32.08	400	307	AVERAGE																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																
1	2389.30	42.82	54.00	-11.18	34.88	32.26	7.76	32.08	400	307	AVERAGE																																																														
1	2412.00	99.98	-----	-----	91.94	32.31	7.81	32.08	400	307	Average																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																
1	2412.00	99.98	-----	-----	91.94	32.31	7.81	32.08	400	307	Average																																																														



Mode	1																																																																			
	Harmonic																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																			
ANT	5+6																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Site : 03CH01-SZ            Condition: PEAK_74 3m HF_ANT(3117)_22 HORIZONTAL            Mode : 12            IMEI : 352134980043864/352134980043872            Plane : X with Accessories            : 1M Power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>52.00</td> <td>34.83</td> <td>11.08 51.58</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4824.00	46.33	74.00	-27.67	52.00	34.83	11.08 51.58	--- --- Peak	<p>Site : 03CH01-SZ            Condition: PEAK_74 3m HF_ANT(3117)_22 VERTICAL            Mode : 12            IMEI : 352134980043864/352134980043872            Plane : X with Accessories            : 1M Power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>45.86</td> <td>74.00</td> <td>-28.14</td> <td>51.53</td> <td>34.83</td> <td>11.08 51.58</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4824.00	45.86	74.00	-28.14	51.53	34.83	11.08 51.58	--- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1	4824.00	46.33	74.00	-27.67	52.00	34.83	11.08 51.58	--- --- Peak																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1	4824.00	45.86	74.00	-28.14	51.53	34.83	11.08 51.58	--- --- Peak																																																												



Mode	2																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																	
ANT	5+6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH01-SZ            Condition: PEAK_74 3m HF_ANT(3117)_22 HORIZONTAL            Mode : 13            IMEI : 352134980043864/352134980043872            Plane : X with Accessories            : 1M Power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>45.59</td> <td>74.00</td> <td>-28.41</td> <td>51.22</td> <td>34.85</td> <td>11.10</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>47.76</td> <td>74.00</td> <td>-26.24</td> <td>49.52</td> <td>36.32</td> <td>13.08</td> <td>51.16</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	45.59	74.00	-28.41	51.22	34.85	11.10	51.58	---	---	Peak	2	7311.00	47.76	74.00	-26.24	49.52	36.32	13.08	51.16	---	---	Peak	<p>Site : 03CH01-SZ            Condition: PEAK_74 3m HF_ANT(3117)_22 VERTICAL            Mode : 13            IMEI : 352134980043864/352134980043872            Plane : X with Accessories            : 1M Power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>44.89</td> <td>74.00</td> <td>-29.11</td> <td>50.52</td> <td>34.85</td> <td>11.10</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>47.00</td> <td>74.00</td> <td>-27.00</td> <td>48.76</td> <td>36.32</td> <td>13.08</td> <td>51.16</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	44.89	74.00	-29.11	50.52	34.85	11.10	51.58	---	---	Peak	2	7311.00	47.00	74.00	-27.00	48.76	36.32	13.08	51.16	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4874.00	45.59	74.00	-28.41	51.22	34.85	11.10	51.58	---	---	Peak																																																																																							
2	7311.00	47.76	74.00	-26.24	49.52	36.32	13.08	51.16	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4874.00	44.89	74.00	-29.11	50.52	34.85	11.10	51.58	---	---	Peak																																																																																							
2	7311.00	47.00	74.00	-27.00	48.76	36.32	13.08	51.16	---	---	Peak																																																																																							



<b>3</b>																																																																															
<b>Mode</b>	<b>Band Edge</b>																																																																														
<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																																															
<b>ANT</b>	<b>5+6</b>																																																																														
<b>Pol.</b>	<b>Horizontal</b>																																																																														
<b>Peak</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH01-SZ Condition: PEAK_BE_74 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>53.93</td> <td>74.00</td> <td>-20.07</td> <td>45.69</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>100</td> <td>144</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH01-SZ Condition: PEAK_74 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.61</td> <td>-----</td> <td>-----</td> <td>97.42</td> <td>32.42</td> <td>7.86</td> <td>32.09</td> <td>100</td> <td>144</td> <td>Peak</td> </tr> </tbody> </table> </div> </div>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	53.93	74.00	-20.07	45.69	32.46	7.88	32.10	100	144	PEAK	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.61	-----	-----	97.42	32.42	7.86	32.09	100	144	Peak
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2483.51	53.93	74.00	-20.07	45.69	32.46	7.88	32.10	100	144	PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	105.61	-----	-----	97.42	32.42	7.86	32.09	100	144	Peak																																																																				
<b>Avg</b>	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH01-SZ Condition: AVG_BE_54 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>45.70</td> <td>54.00</td> <td>-8.30</td> <td>37.46</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>100</td> <td>144</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-03-23</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH01-SZ Condition: AVG_54 3m HF_ANT(3117)_22 HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.47</td> <td>-----</td> <td>-----</td> <td>93.30</td> <td>32.41</td> <td>7.85</td> <td>32.09</td> <td>100</td> <td>144</td> <td>Average</td> </tr> </tbody> </table> </div> </div>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	45.70	54.00	-8.30	37.46	32.46	7.88	32.10	100	144	AVERAGE	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.47	-----	-----	93.30	32.41	7.85	32.09	100	144	Average
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2483.51	45.70	54.00	-8.30	37.46	32.46	7.88	32.10	100	144	AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2462.00	101.47	-----	-----	93.30	32.41	7.85	32.09	100	144	Average																																																																				



<b>3</b>																																								
<b>Mode</b>	<b>Band Edge</b>																																							
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																							
<b>ANT</b>	<b>5+6</b>																																							
<b>Pol.</b>	<b>Vertical</b>																																							
<b>Peak</b>	<p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH01-SZ Condition: PEAK_BE_74 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>53.56</td> <td>74.00</td> <td>-20.44</td> <td>45.32</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>334</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	53.56	74.00	-20.44	45.32	32.46	7.88	32.10	334	47	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	2483.58	53.56	74.00	-20.44	45.32	32.46	7.88	32.10	334	47	PEAK																													
<p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH01-SZ Condition: PEAK_74 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.57</td> <td>-----</td> <td>-----</td> <td>97.38</td> <td>32.42</td> <td>7.86</td> <td>32.09</td> <td>334</td> <td>47</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.57	-----	-----	97.38	32.42	7.86	32.09	334	47	Peak	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	2462.00	105.57	-----	-----	97.38	32.42	7.86	32.09	334	47	Peak																													
<b>Avg</b>	<p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH01-SZ Condition: AVG_BE_54 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>44.86</td> <td>54.00</td> <td>-9.14</td> <td>36.62</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>334</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	44.86	54.00	-9.14	36.62	32.46	7.88	32.10	334	47	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	2483.51	44.86	54.00	-9.14	36.62	32.46	7.88	32.10	334	47	AVERAGE																													
<p style="text-align: right;">Date: 2023-03-23</p> <p>Site : 03CH01-SZ Condition: AVG_54 3m HF_ANT(3117)_22 VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 14 Setting : 1M Power setting 17 Plane : X with Accessories : 352134980043864/352134980043872</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.39</td> <td>-----</td> <td>-----</td> <td>93.20</td> <td>32.42</td> <td>7.86</td> <td>32.09</td> <td>334</td> <td>47</td> <td>Average</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.39	-----	-----	93.20	32.42	7.86	32.09	334	47	Average	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																
1	2462.00	101.39	-----	-----	93.20	32.42	7.86	32.09	334	47	Average																													





Mode	3																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																	
ANT	5+6																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH01-SZ Condition: PEAK_74 3m HF_ANT(3117)_22 HORIZONTAL Mode : 14 IMEI : 352134900043064/352134900043072 Plane : X with Accessories : 1M Power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>45.89</td> <td>74.00</td> <td>-28.11</td> <td>51.48</td> <td>34.87</td> <td>11.12</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>49.53</td> <td>36.35</td> <td>13.13</td> <td>51.18</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	45.89	74.00	-28.11	51.48	34.87	11.12	51.58	---	---	Peak	2	7386.00	47.83	74.00	-26.17	49.53	36.35	13.13	51.18	---	---	Peak	<p>Site : 03CH01-SZ Condition: PEAK_74 3m HF_ANT(3117)_22 VERTICAL Mode : 14 IMEI : 352134900043064/352134900043072 Plane : X with Accessories : 1M Power setting 17</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>45.86</td> <td>74.00</td> <td>-28.14</td> <td>51.45</td> <td>34.87</td> <td>11.12</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>47.30</td> <td>74.00</td> <td>-26.70</td> <td>49.00</td> <td>36.35</td> <td>13.13</td> <td>51.18</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	45.86	74.00	-28.14	51.45	34.87	11.12	51.58	---	---	Peak	2	7386.00	47.30	74.00	-26.70	49.00	36.35	13.13	51.18	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4924.00	45.89	74.00	-28.11	51.48	34.87	11.12	51.58	---	---	Peak																																																																																							
2	7386.00	47.83	74.00	-26.17	49.53	36.35	13.13	51.18	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4924.00	45.86	74.00	-28.14	51.45	34.87	11.12	51.58	---	---	Peak																																																																																							
2	7386.00	47.30	74.00	-26.70	49.00	36.35	13.13	51.18	---	---	Peak																																																																																							