

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	ANT0 Conducted Power(dBm)	ANT2 Conducted Power(dBm)	Total Conducted Power(dBm)	Total directional gain (dBi)	Total EIRP(dBm)
Band2	1.4MHz	QPSK	18607	1RB#0	19.53	18.35	21.99	6.01	28
Band2	1.4MHz	QPSK	18900	1RB#0	20.11	19.88	23.01	6.01	29.02
Band2	1.4MHz	QPSK	19193	1RB#0	19.74	19.43	22.6	6.01	28.61
Band2	1.4MHz	16QAM	18607	1RB#0	19.43	18.25	21.89	6.01	27.9
Band2	1.4MHz	16QAM	18900	1RB#0	19.97	19.63	22.81	6.01	28.82
Band2	1.4MHz	16QAM	19193	1RB#0	19.63	19.34	22.5	6.01	28.51
Band2	3MHz	QPSK	18615	1RB#0	17.58	16.34	20.01	6.01	26.02
Band2	3MHz	QPSK	18900	1RB#0	18.49	17.52	21.04	6.01	27.05
Band2	3MHz	QPSK	19185	1RB#0	18.49	17.24	20.92	6.01	26.93
Band2	3MHz	16QAM	18615	1RB#0	17.33	16.12	19.78	6.01	25.79
Band2	3MHz	16QAM	18900	1RB#0	18.22	17.24	20.77	6.01	26.78
Band2	3MHz	16QAM	19185	1RB#0	18.42	17.16	20.85	6.01	26.86
Band2	5MHz	QPSK	18625	1RB#0	17.49	15.96	19.8	6.01	25.81
Band2	5MHz	QPSK	18900	1RB#0	18.30	17.15	20.77	6.01	26.78
Band2	5MHz	QPSK	19175	1RB#0	18.17	16.84	20.57	6.01	26.58
Band2	5MHz	16QAM	18625	1RB#0	17.31	15.97	19.7	6.01	25.71
Band2	5MHz	16QAM	18900	1RB#0	18.17	17.00	20.63	6.01	26.64
Band2	5MHz	16QAM	19175	1RB#0	17.99	16.67	20.39	6.01	26.4
Band2	10MHz	QPSK	18650	1RB#0	17.58	16.44	20.06	6.01	26.07
Band2	10MHz	QPSK	18900	1RB#0	18.27	17.32	20.83	6.01	26.84
Band2	10MHz	QPSK	19150	1RB#0	18.98	18.20	21.62	6.01	27.63
Band2	10MHz	16QAM	18650	1RB#0	17.31	16.21	19.81	6.01	25.82
Band2	10MHz	16QAM	18900	1RB#0	18.01	17.05	20.57	6.01	26.58
Band2	10MHz	16QAM	19150	1RB#0	18.94	18.13	21.56	6.01	27.57
Band2	15MHz	QPSK	18675	1RB#0	17.72	17.16	20.46	6.01	26.47
Band2	15MHz	QPSK	18900	1RB#0	18.29	17.80	21.06	6.01	27.07
Band2	15MHz	QPSK	19125	1RB#0	18.63	17.84	21.26	6.01	27.27
Band2	15MHz	16QAM	18675	1RB#0	17.74	17.22	20.5	6.01	26.51
Band2	15MHz	16QAM	18900	1RB#0	18.02	17.55	20.8	6.01	26.81
Band2	15MHz	16QAM	19125	1RB#0	18.58	17.77	21.2	6.01	27.21
Band2	20MHz	QPSK	18700	1RB#0	17.54	16.37	20	6.01	26.01
Band2	20MHz	QPSK	18900	1RB#0	18.00	17.02	20.55	6.01	26.56

Band2	20MHz	QPSK	19100	1RB#0	18.37	17.20	20.83	6.01	26.84
Band2	20MHz	16QAM	18700	1RB#0	17.55	16.25	19.96	6.01	25.97
Band2	20MHz	16QAM	18900	1RB#0	17.79	17.10	20.47	6.01	26.48
Band2	20MHz	16QAM	19100	1RB#0	18.18	17.02	20.65	6.01	26.66

Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

ANT0:

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	5.24	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	5.32	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	4.72	13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	4.94	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	5.18	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	5.44	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	6.18	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	6.02	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	5.52	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	5.54	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	6.16	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	6.26	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	5.26	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	5.34	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	4.96	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	4.96	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	5.04	13	PASS
Band2	3MHz	QPSK	19185	15RB#0	5.32	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	5.92	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	6.04	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	5.76	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	5.58	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	5.84	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	6.12	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	5.40	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	5.40	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	5.22	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.00	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	5.28	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	5.20	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	5.68	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	5.98	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	5.46	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	5.52	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	5.42	13	PASS

Band2	5MHz	16QAM	19175	25RB#0	5.78	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	5.34	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	5.40	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	5.38	13	PASS
Band2	10MHz	QPSK	18900	50RB#0	5.02	13	PASS
Band2	10MHz	QPSK	19150	1RB#0	5.50	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	5.22	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	5.90	13	PASS
Band2	10MHz	16QAM	18650	50RB#0	6.10	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	6.00	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	5.56	13	PASS
Band2	10MHz	16QAM	19150	1RB#0	6.24	13	PASS
Band2	10MHz	16QAM	19150	50RB#0	5.88	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	5.28	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	5.84	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	5.56	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	5.34	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	5.72	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	5.44	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	6.14	13	PASS
Band2	15MHz	16QAM	18675	75RB#0	6.28	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	6.34	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	5.78	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	6.46	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	6.02	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	5.04	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.70	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	5.68	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.18	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	5.56	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.18	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	5.58	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	6.34	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	6.52	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	5.88	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	5.98	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	6.10	13	PASS

ANT2:


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	5.36	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	5.40	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	5.08	13	PASS

Band2	1.4MHz	QPSK	18900	6RB#0	5.06	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	5.30	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	5.46	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	5.94	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	6.08	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	5.60	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	5.74	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	5.94	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	6.30	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	5.40	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	5.44	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	5.08	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	5.08	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	5.22	13	PASS
Band2	3MHz	QPSK	19185	15RB#0	5.28	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	6.32	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	6.10	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	5.92	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	5.72	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	5.84	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	6.04	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	5.44	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	5.48	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	5.32	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.14	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	5.32	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	5.28	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	5.84	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	6.00	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	5.66	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	5.70	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	5.48	13	PASS
Band2	5MHz	16QAM	19175	25RB#0	5.84	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	5.32	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	5.44	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	5.28	13	PASS
Band2	10MHz	QPSK	18900	50RB#0	4.96	13	PASS
Band2	10MHz	QPSK	19150	1RB#0	5.58	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	5.20	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	6.08	13	PASS
Band2	10MHz	16QAM	18650	50RB#0	6.06	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	5.96	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	5.56	13	PASS


Band2	10MHz	16QAM	19150	1RB#0	6.46	13	PASS
Band2	10MHz	16QAM	19150	50RB#0	5.88	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	5.36	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	5.90	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	5.62	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	5.36	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	5.68	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	5.46	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	6.18	13	PASS
Band2	15MHz	16QAM	18675	75RB#0	6.26	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	6.44	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	5.82	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	6.50	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	5.98	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	4.96	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.62	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	5.36	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.06	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	5.50	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.22	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	5.54	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	6.32	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	5.66	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	5.74	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	5.94	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	6.04	13	PASS

Test Graphs


ANT0:

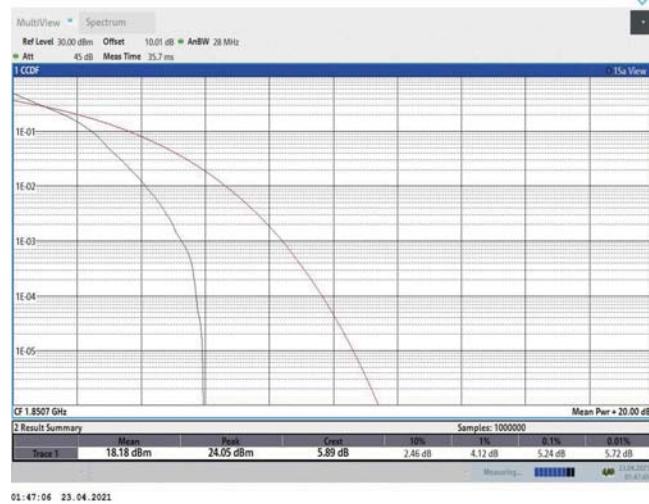


Band2-1.4MHz-QPSK-18607-1RB#0

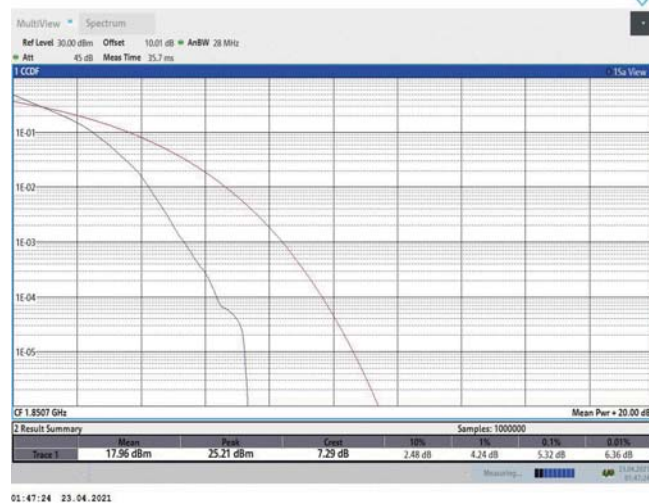


Band2-1.4MHz-QPSK-18607-6RB#0

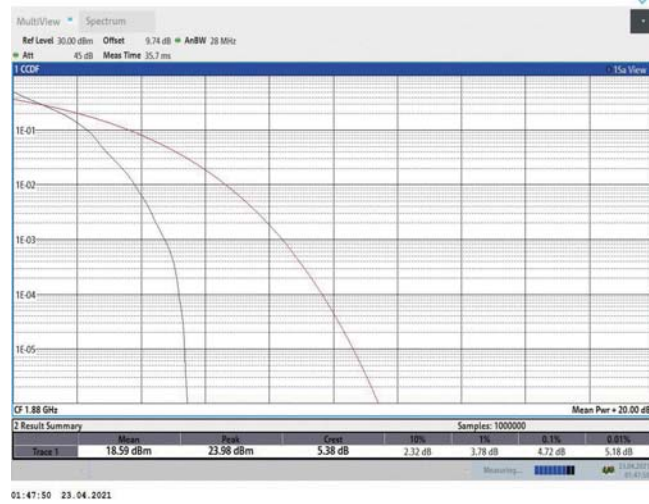


Band2-1.4MHz-QPSK-18900-1RB#0

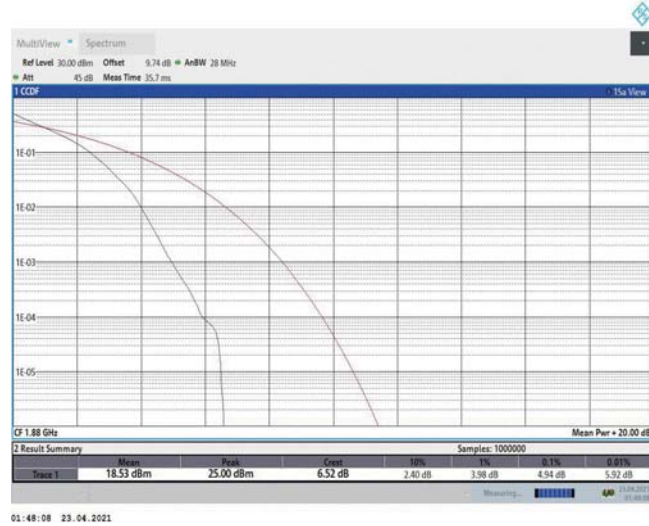


Band2-1.4MHz-QPSK-18900-6RB#0

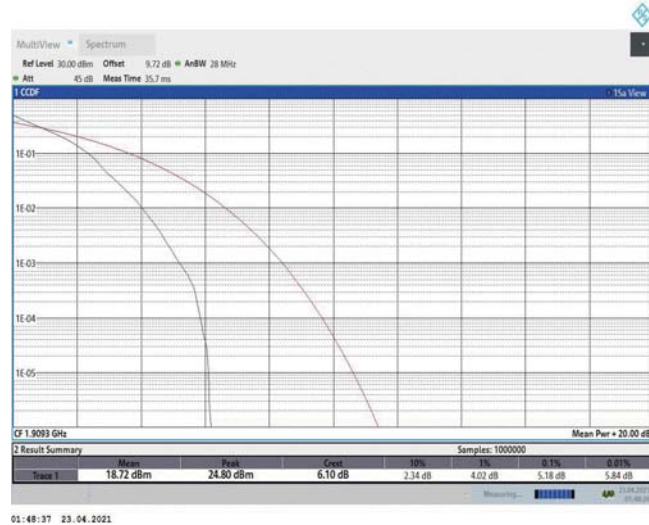


Band2-1.4MHz-QPSK-19193-1RB#0

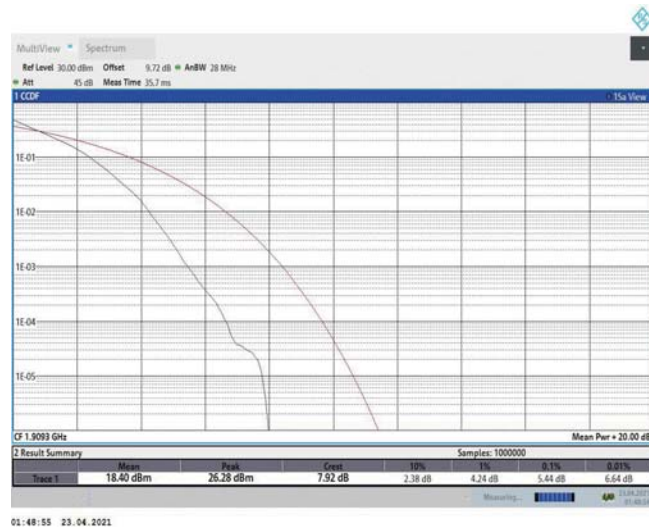


Band2-1.4MHz-QPSK-19193-6RB#0

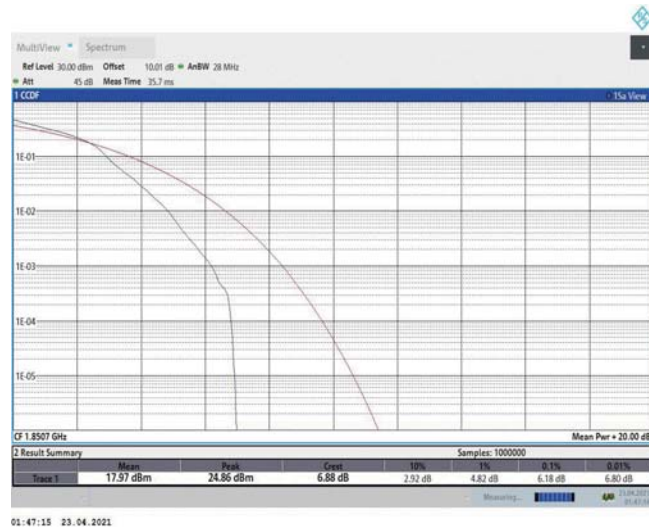


Band2-1.4MHz-16QAM-18607-1RB#0

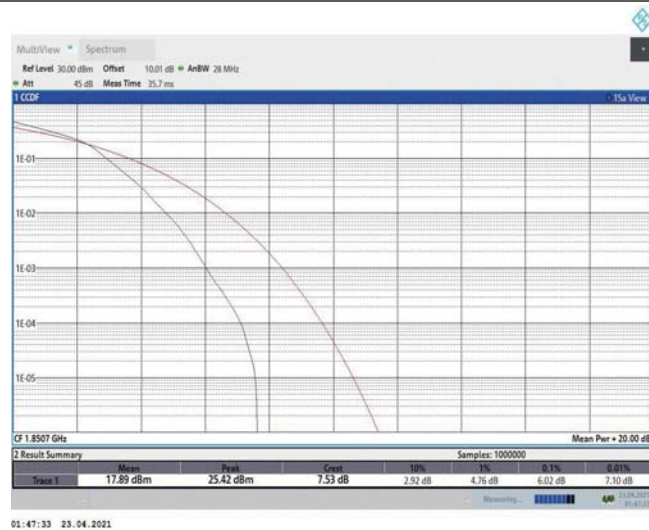


Band2-1.4MHz-16QAM-18607-6RB#0

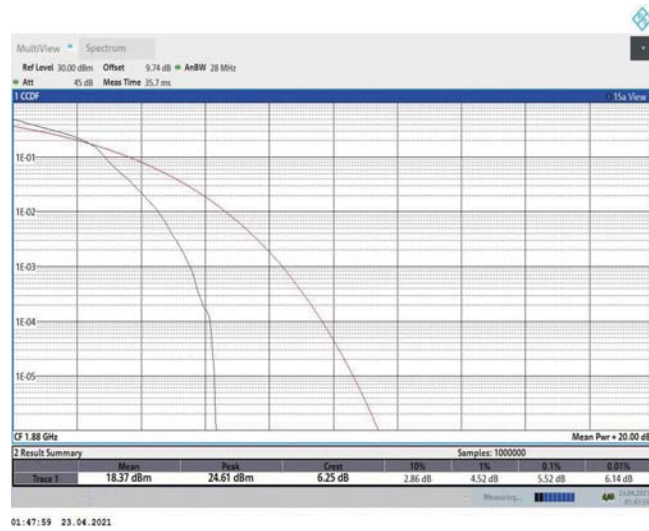


Band2-1.4MHz-16QAM-18900-1RB#0

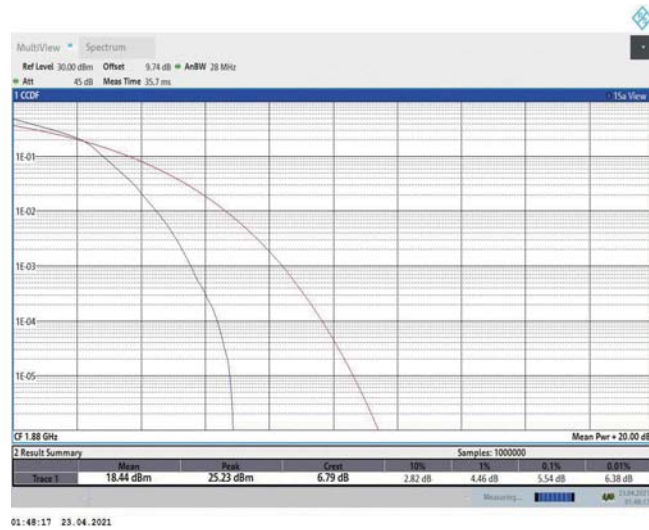


Band2-1.4MHz-16QAM-18900-6RB#0

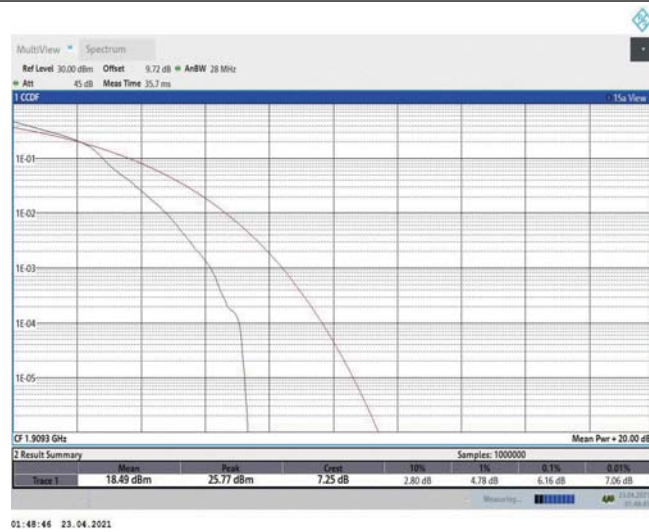


Band2-1.4MHz-16QAM-19193-1RB#0

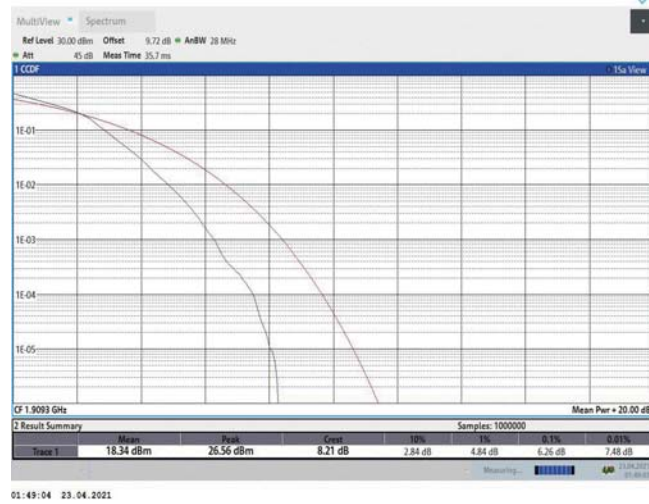


Band2-1.4MHz-16QAM-19193-6RB#0

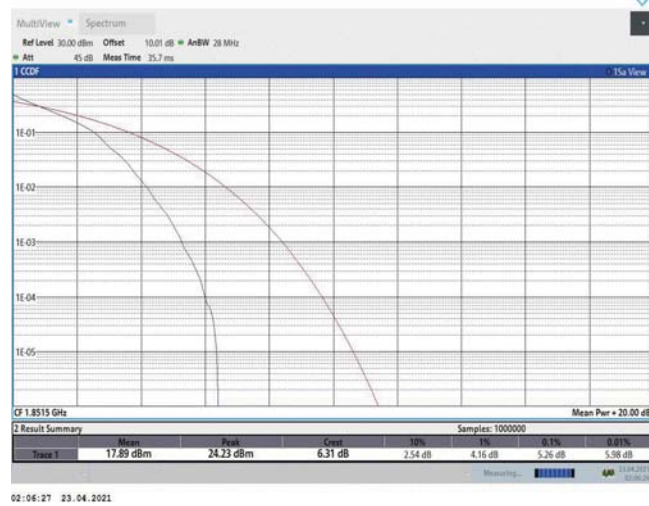


Band2-3MHz-QPSK-18615-1RB#0

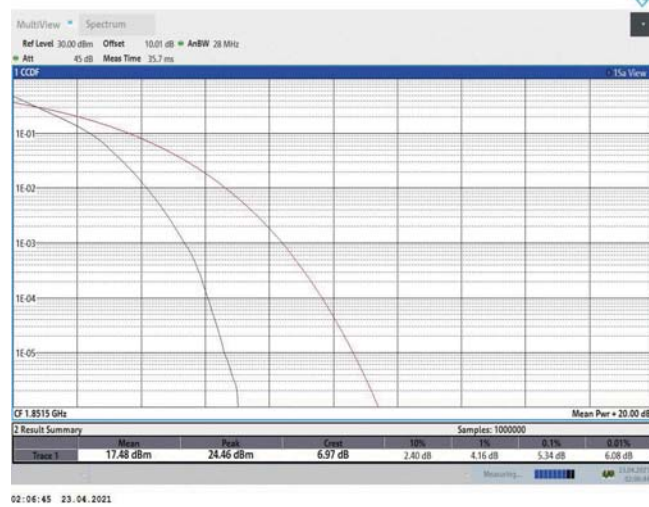


Band2-3MHz-QPSK-18615-15RB#0

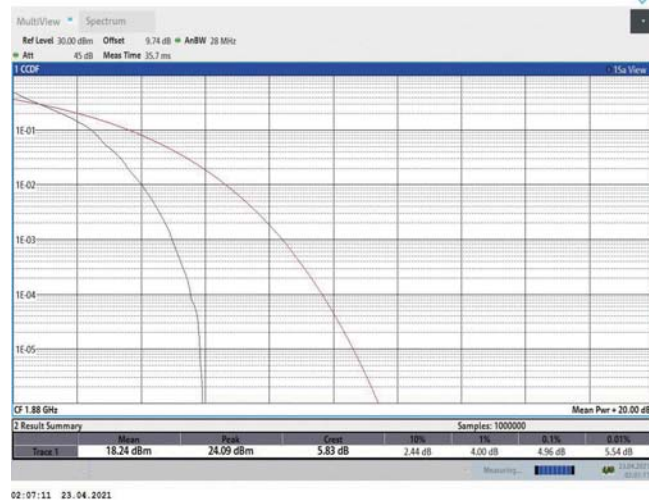


Band2-3MHz-QPSK-18900-1RB#0

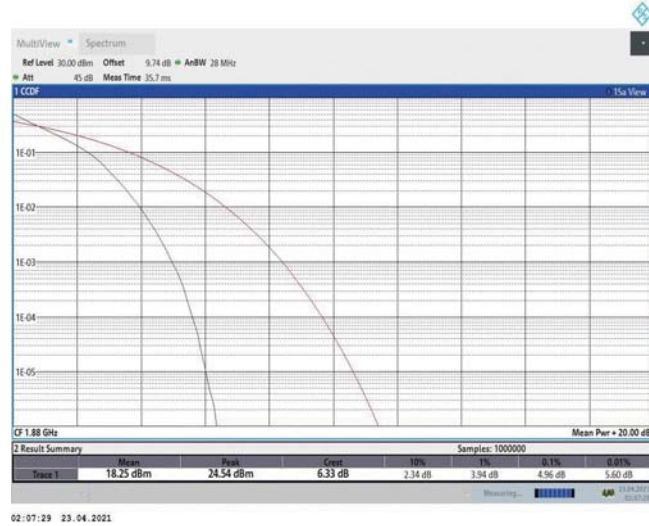


Band2-3MHz-QPSK-18900-15RB#0

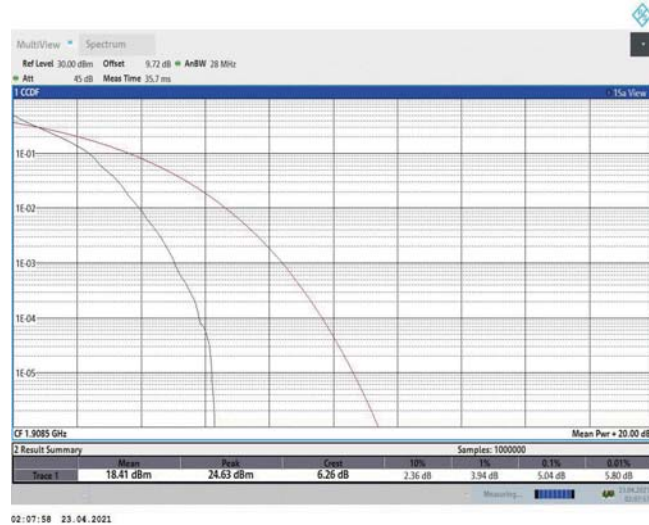


Band2-3MHz-QPSK-19185-1RB#0

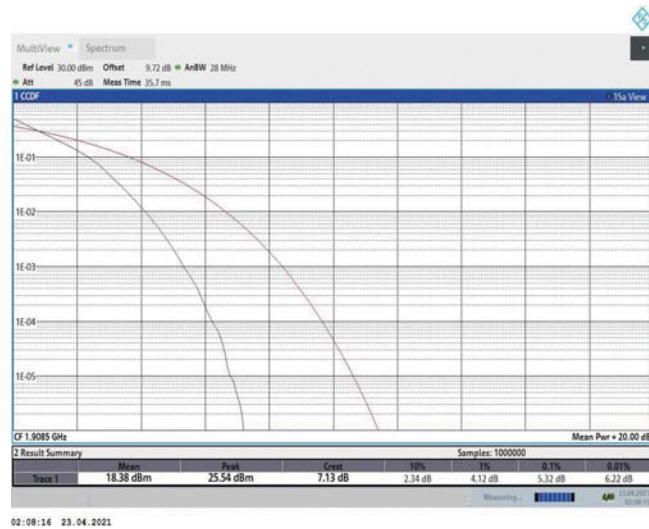


Band2-3MHz-QPSK-19185-15RB#0

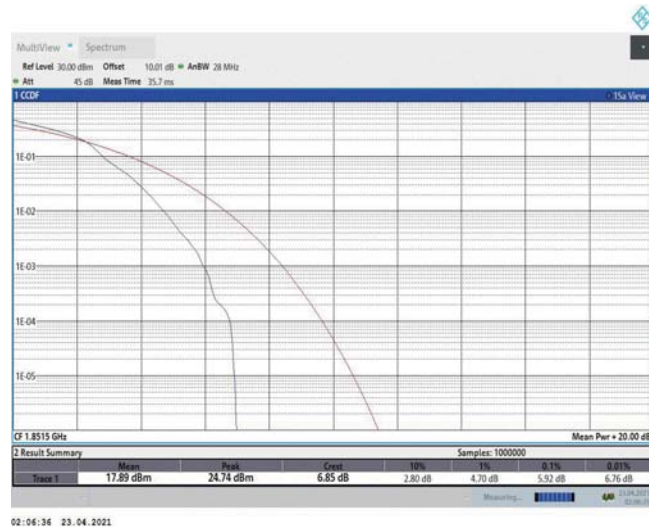


Band2-3MHz-16QAM-18615-1RB#0

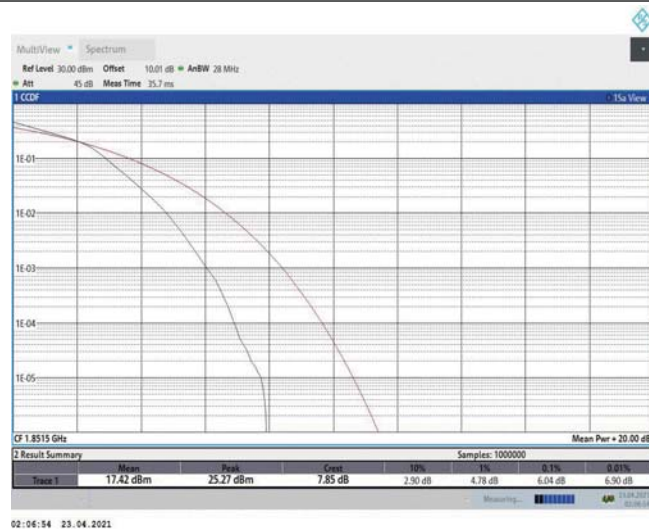


Band2-3MHz-16QAM-18615-15RB#0

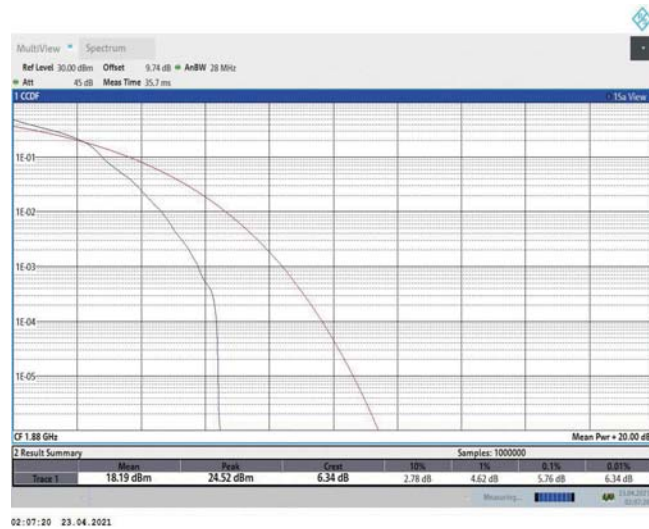


Band2-3MHz-16QAM-18900-1RB#0

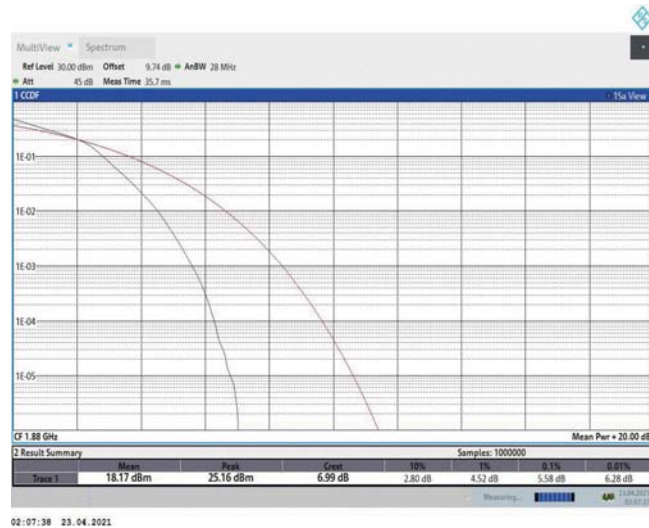


Band2-3MHz-16QAM-18900-15RB#0

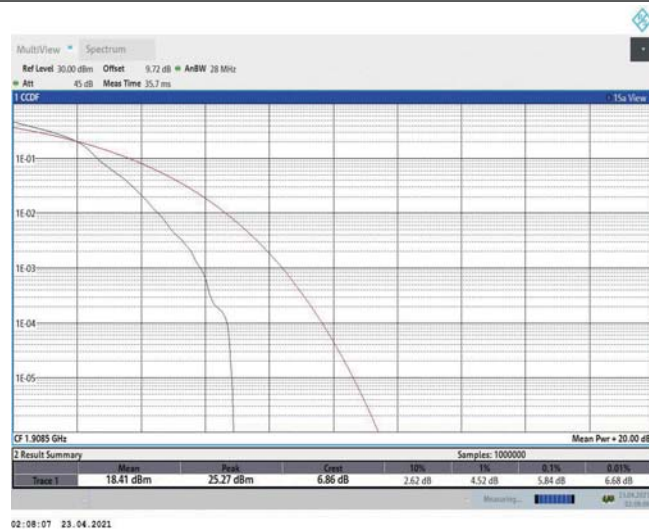


Band2-3MHz-16QAM-19185-1RB#0

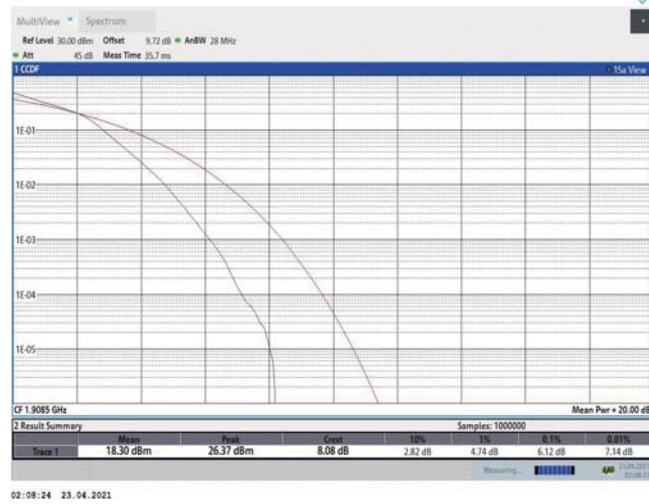


Band2-3MHz-16QAM-19185-15RB#0

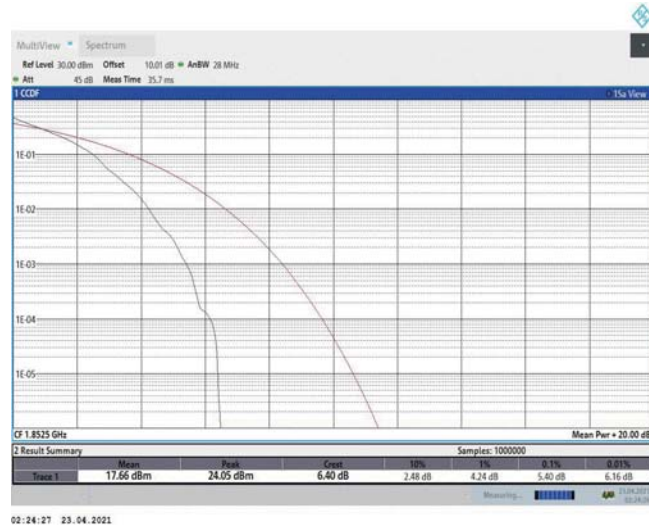


Band2-5MHz-QPSK-18625-1RB#0

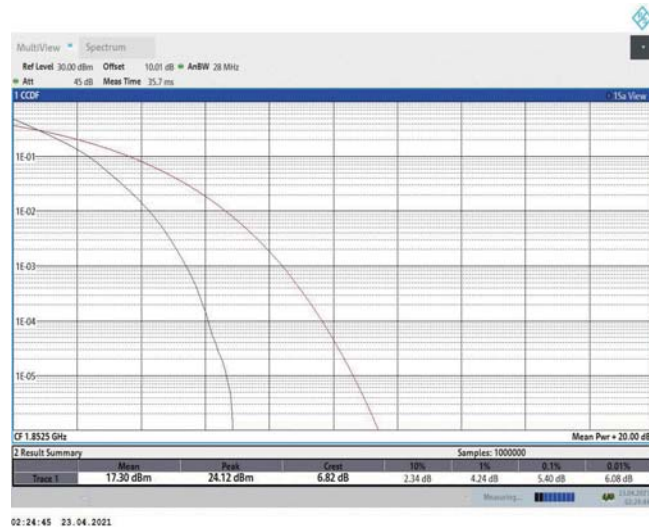


Band2-5MHz-QPSK-18625-25RB#0

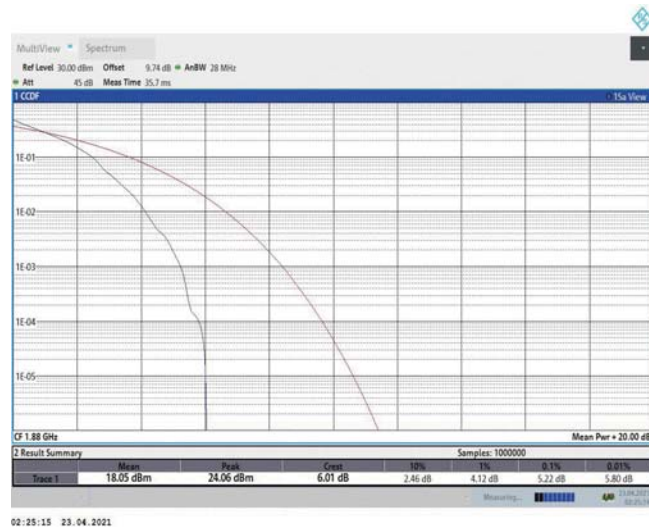


Band2-5MHz-QPSK-18900-1RB#0

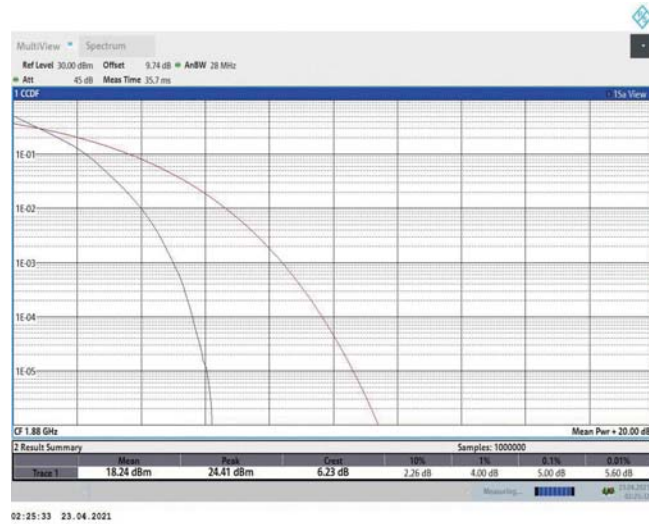


Band2-5MHz-QPSK-18900-25RB#0

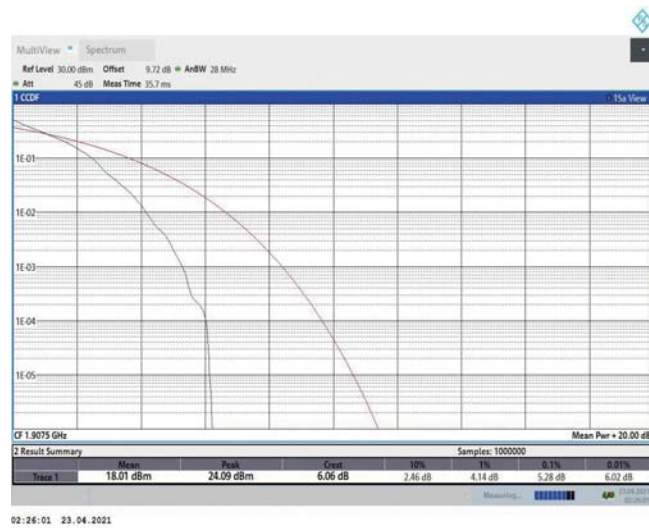


Band2-5MHz-QPSK-19175-1RB#0

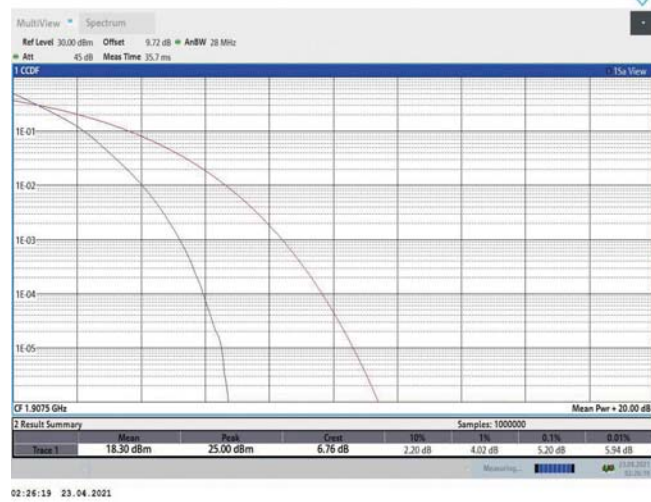


Band2-5MHz-QPSK-19175-25RB#0

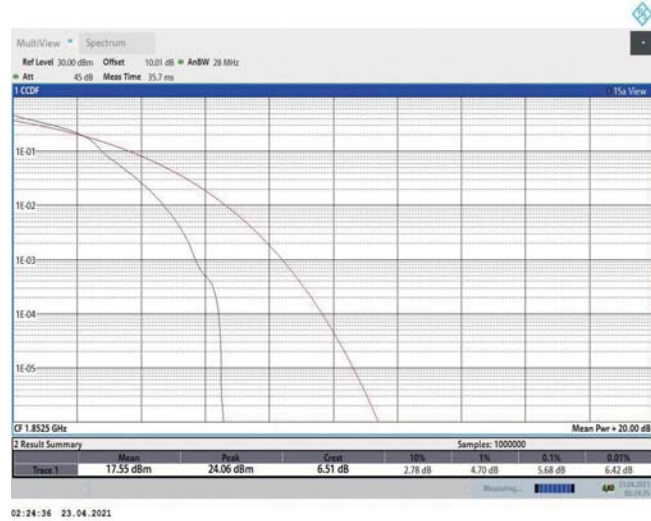


Band2-5MHz-16QAM-18625-1RB#0

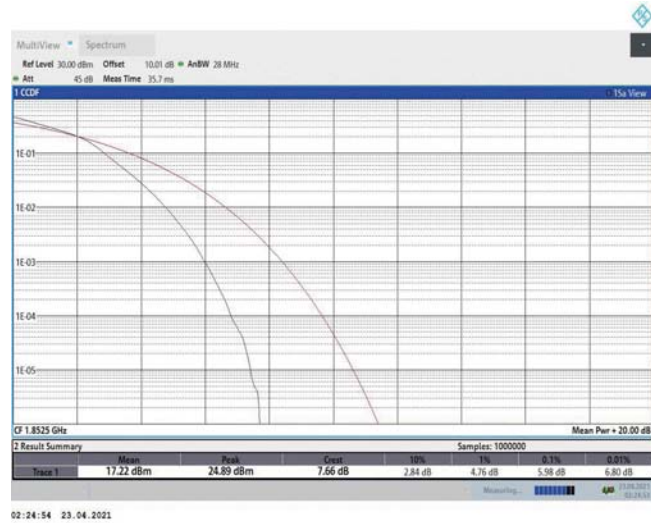


Band2-5MHz-16QAM-18625-25RB#0

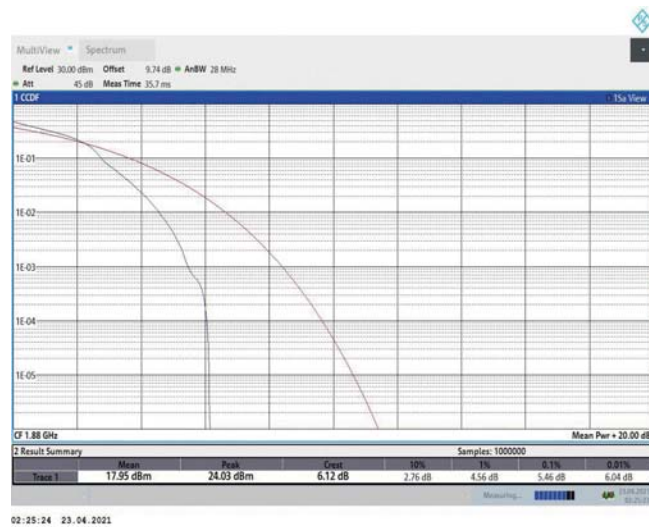


Band2-5MHz-16QAM-18900-1RB#0

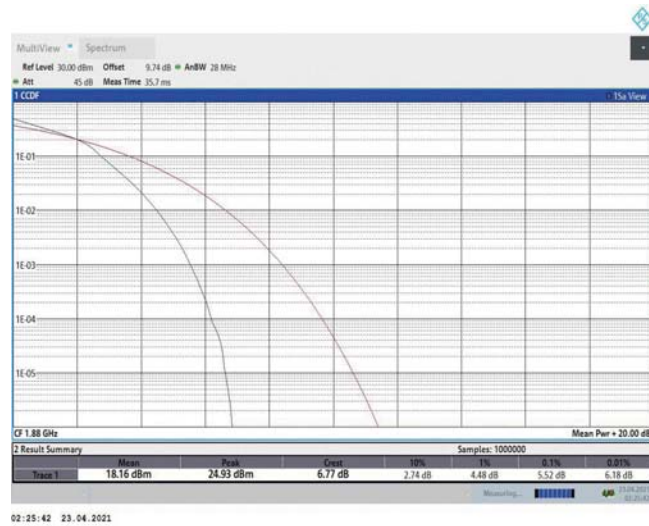


Band2-5MHz-16QAM-18900-25RB#0

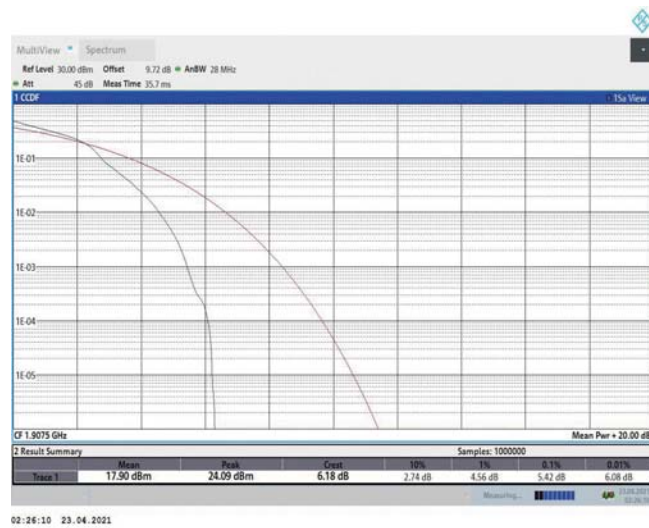


Band2-5MHz-16QAM-19175-1RB#0

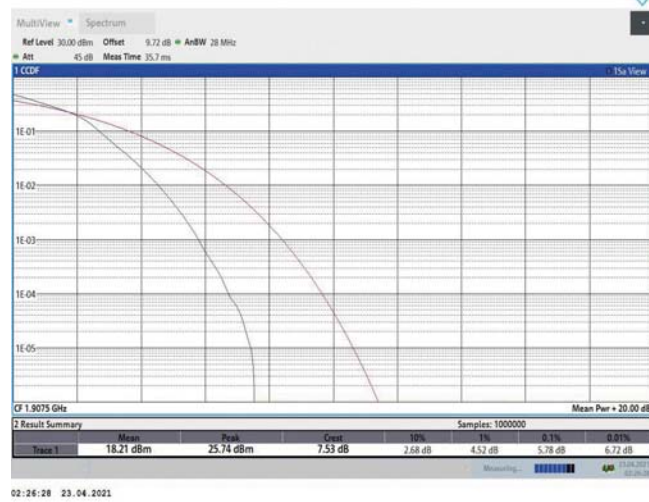


Band2-5MHz-16QAM-19175-25RB#0

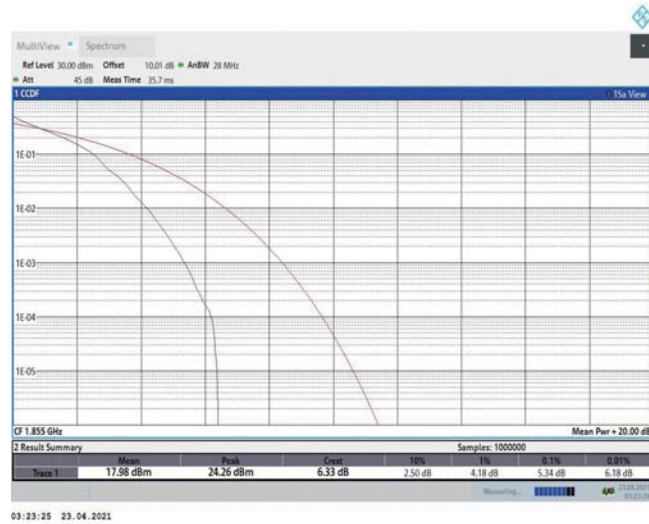


Band2-10MHz-QPSK-18650-1RB#0

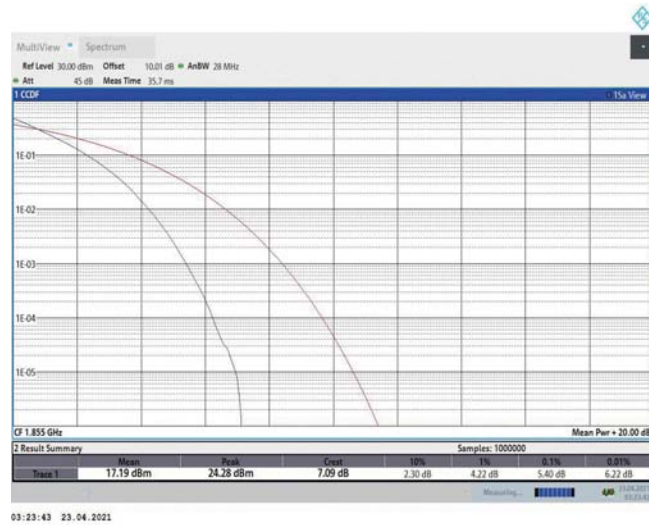


Band2-10MHz-QPSK-18650-50RB#0

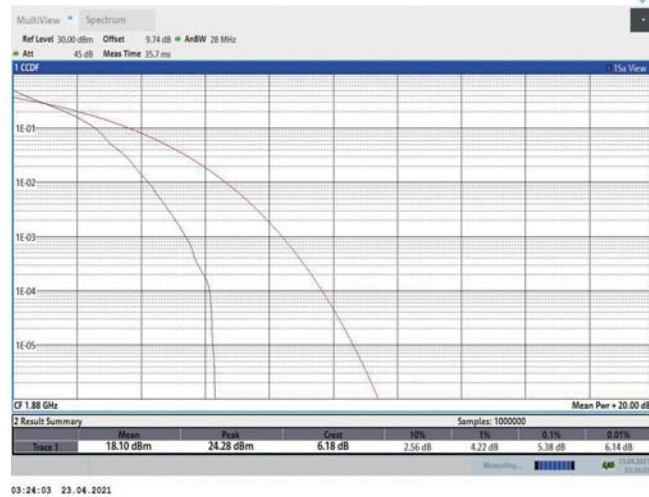


Band2-10MHz-QPSK-18900-1RB#0

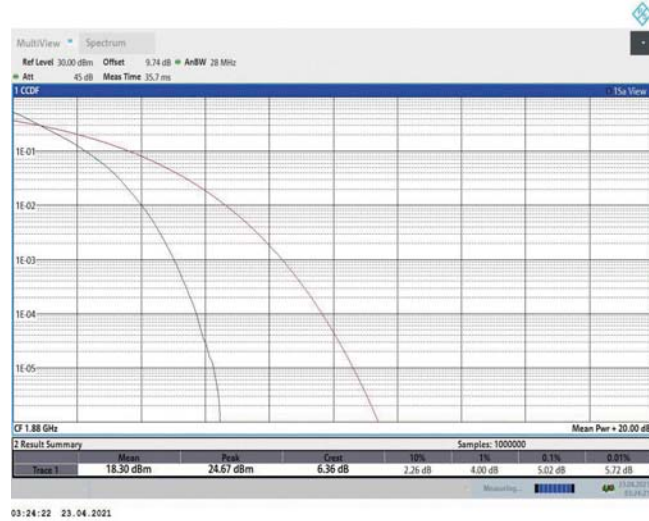


Band2-10MHz-QPSK-18900-50RB#0

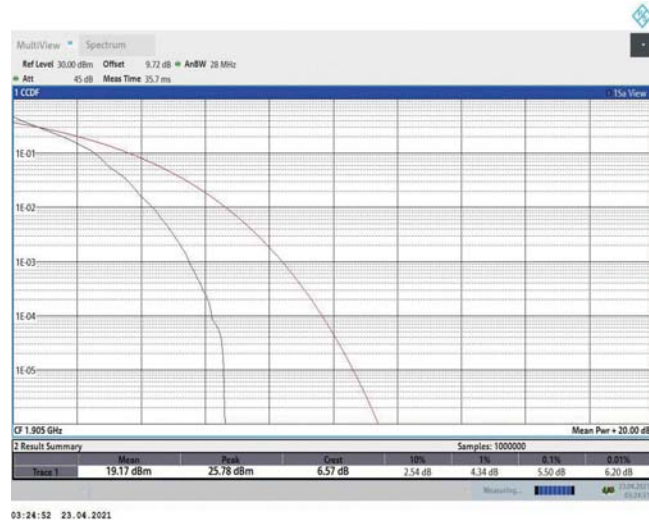


Band2-10MHz-QPSK-19150-1RB#0

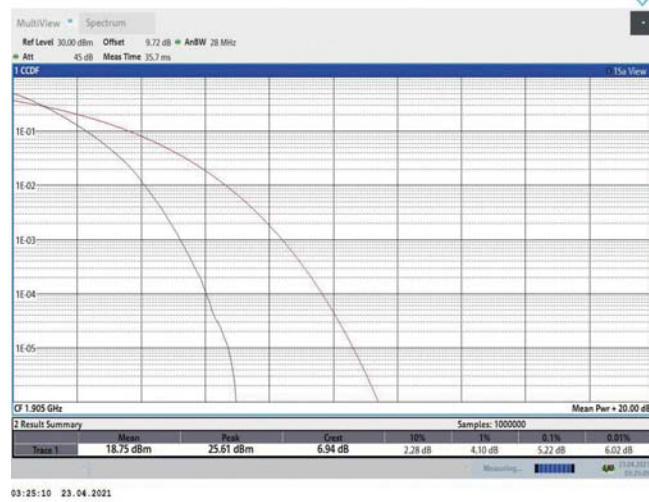


Band2-10MHz-QPSK-19150-50RB#0

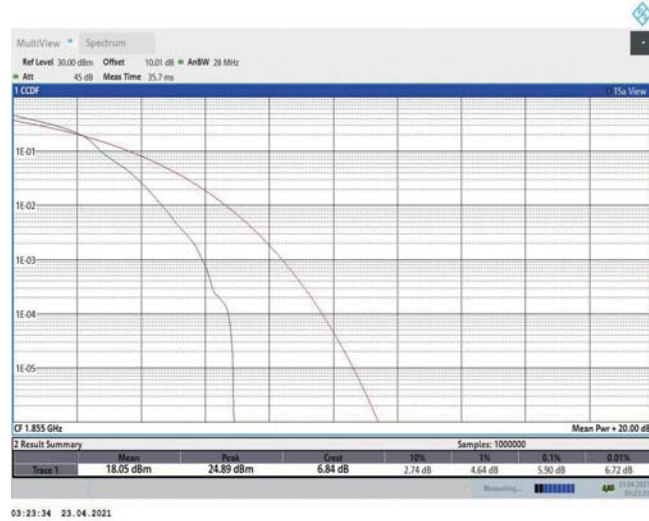


Band2-10MHz-16QAM-18650-1RB#0

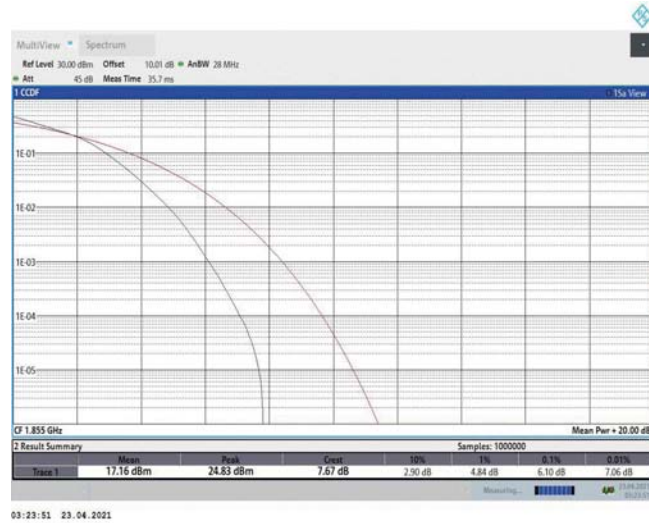


Band2-10MHz-16QAM-18650-50RB#0

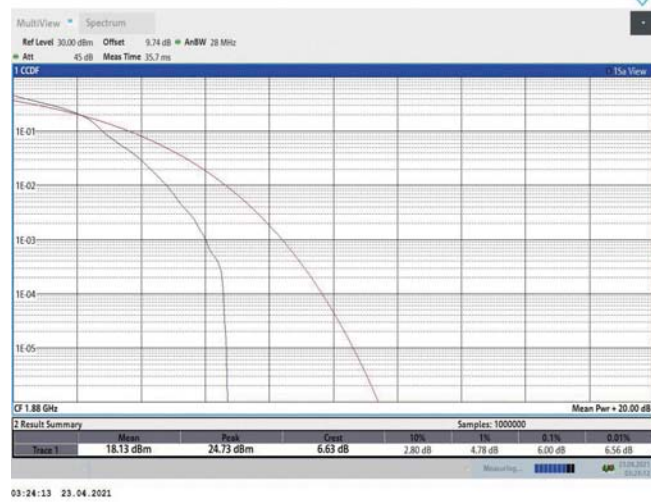


Band2-10MHz-16QAM-18900-1RB#0

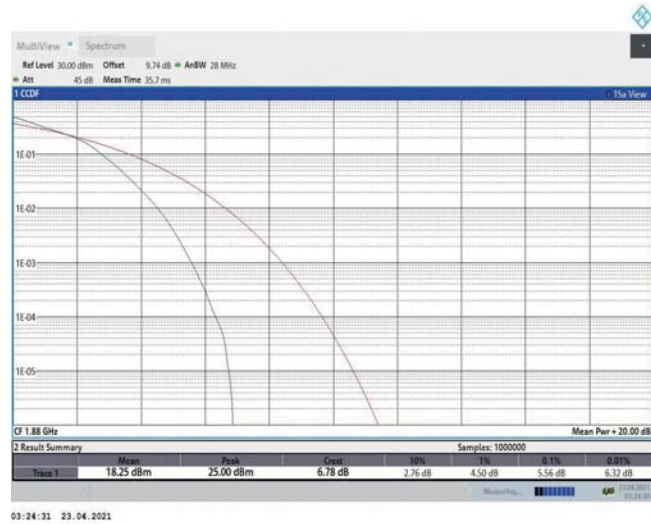


Band2-10MHz-16QAM-18900-50RB#0

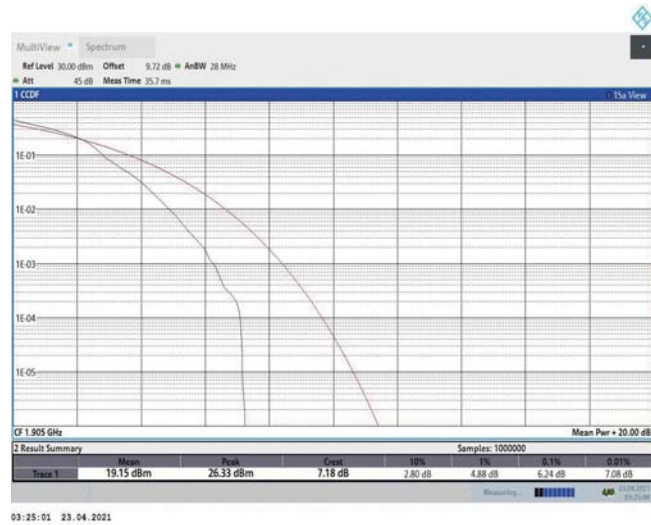


Band2-10MHz-16QAM-19150-1RB#0

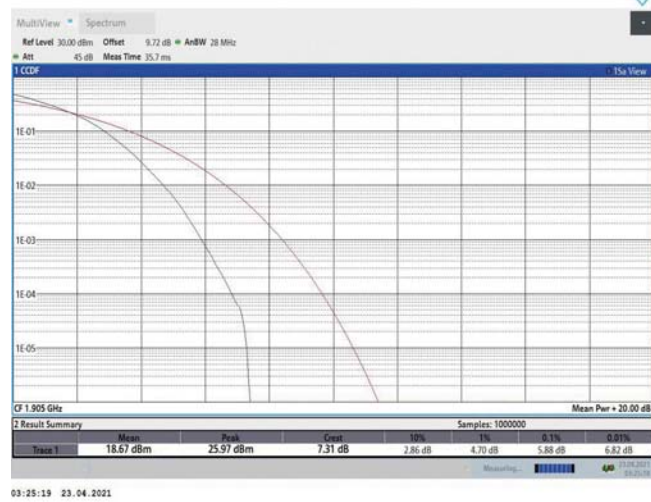


Band2-10MHz-16QAM-19150-50RB#0

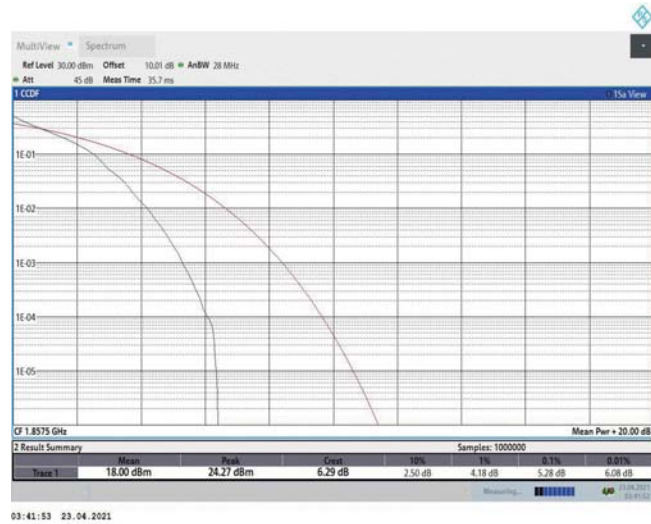


Band2-15MHz-QPSK-18675-1RB#0

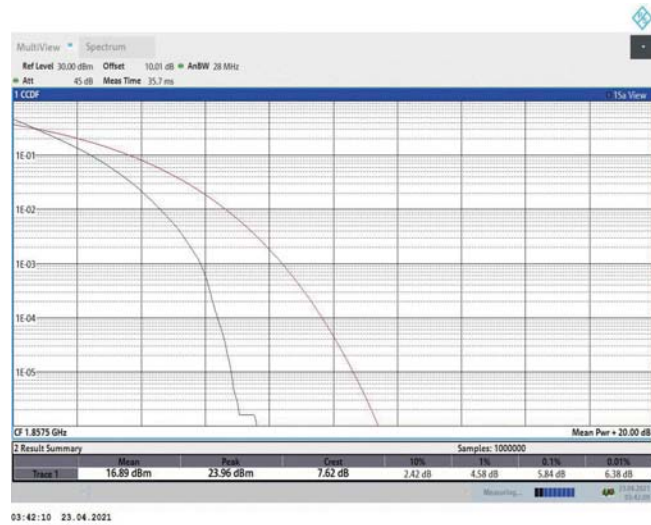


Band2-15MHz-QPSK-18675-75RB#0

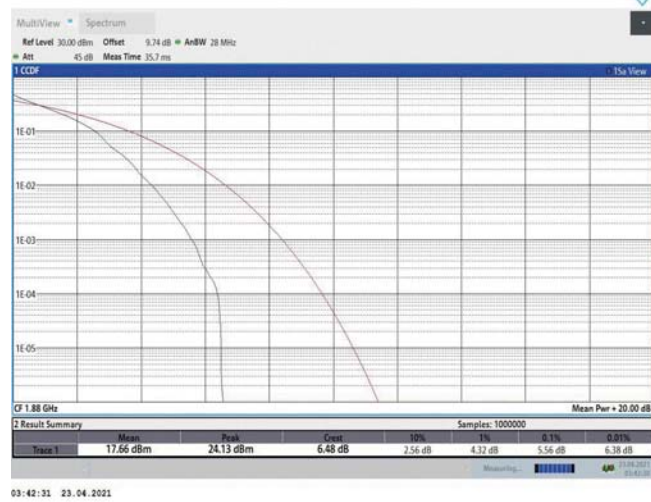


Band2-15MHz-QPSK-18900-1RB#0

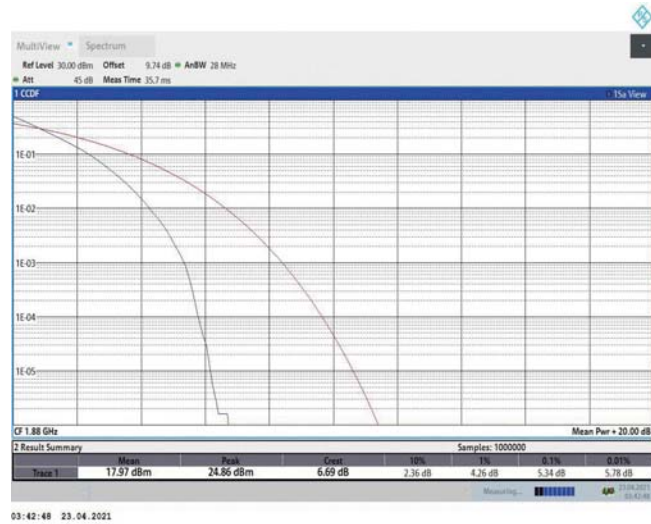


Band2-15MHz-QPSK-18900-75RB#0

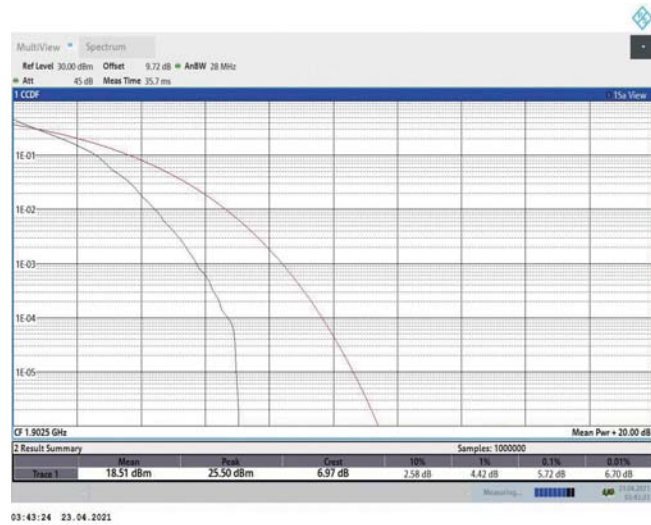


Band2-15MHz-QPSK-19125-1RB#0

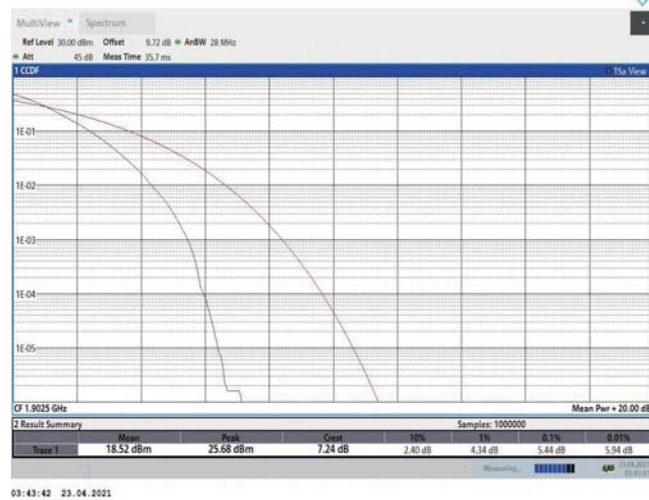


Band2-15MHz-QPSK-19125-75RB#0

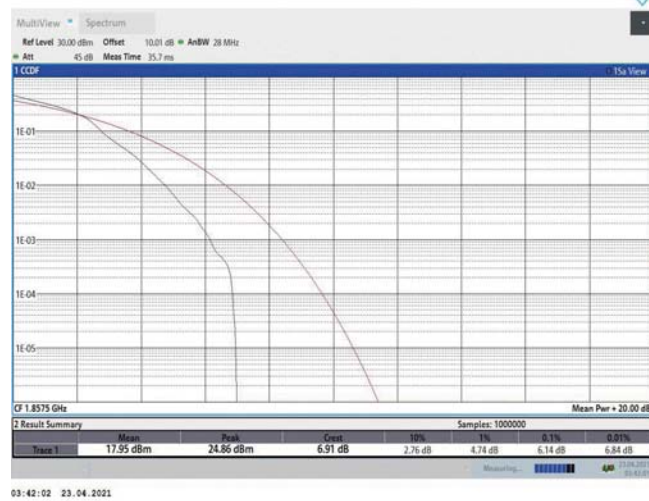


Band2-15MHz-16QAM-18675-1RB#0

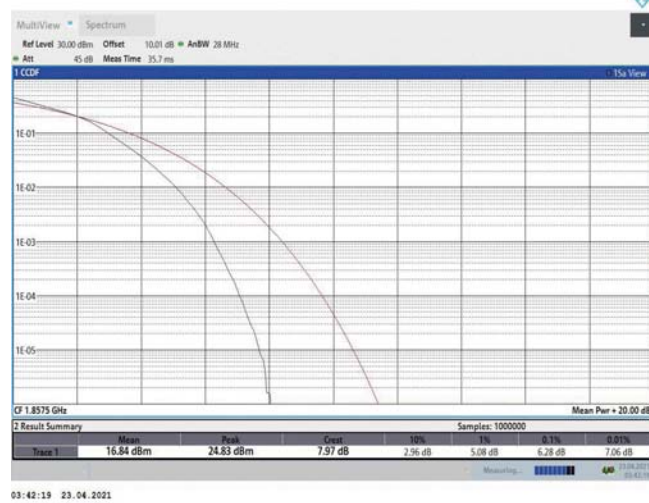


Band2-15MHz-16QAM-18675-75RB#0

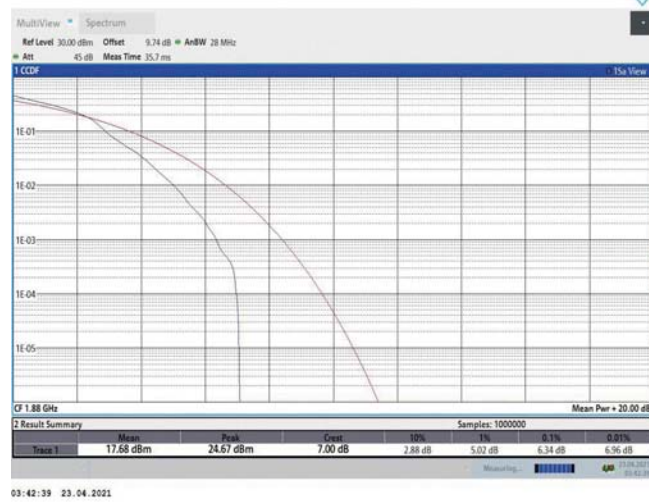


Band2-15MHz-16QAM-18900-1RB#0

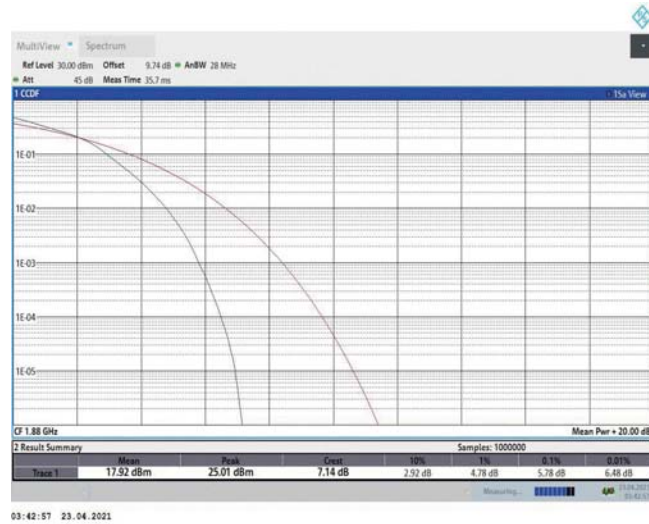


Band2-15MHz-16QAM-18900-75RB#0

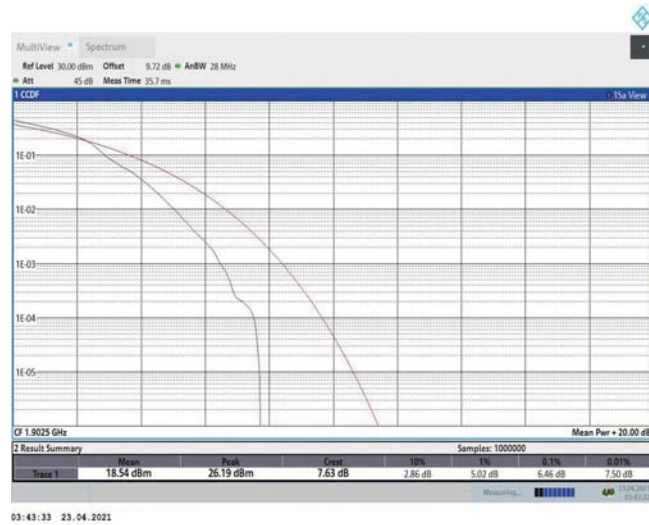


Band2-15MHz-16QAM-19125-1RB#0

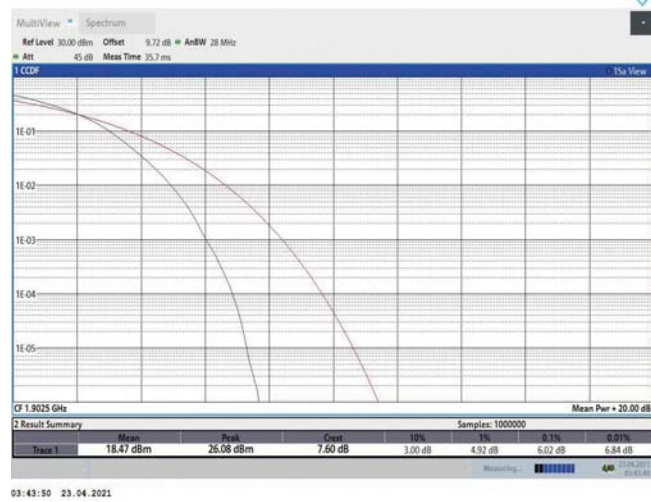


Band2-15MHz-16QAM-19125-75RB#0

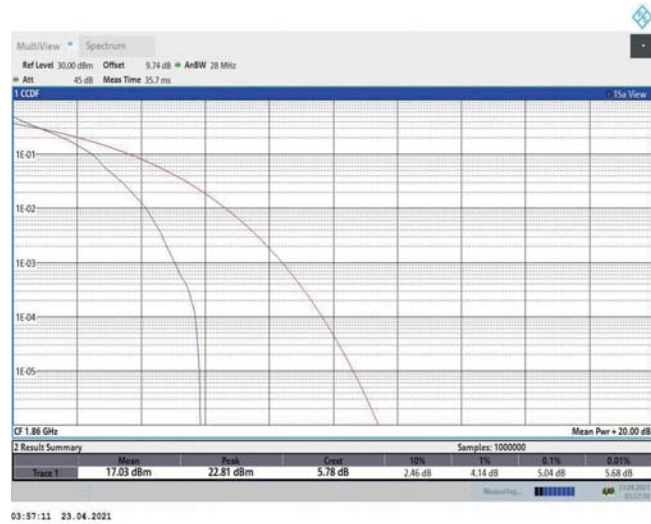


Band2-20MHz-QPSK-18700-1RB#0

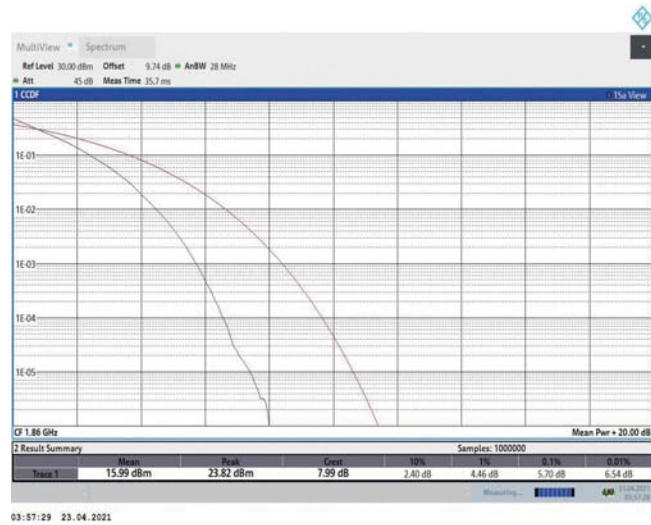


Band2-20MHz-QPSK-18700-100RB#0

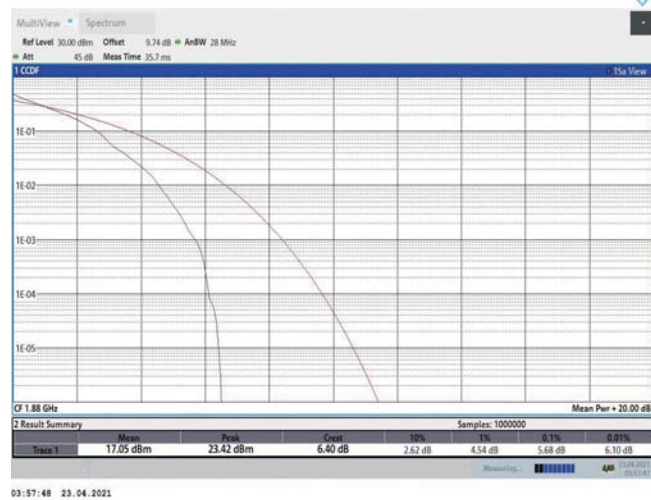


Band2-20MHz-QPSK-18900-1RB#0

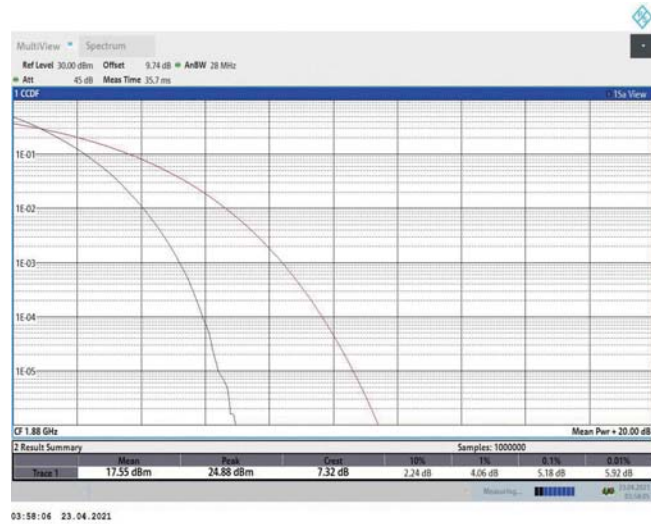


Band2-20MHz-QPSK-18900-100RB#0

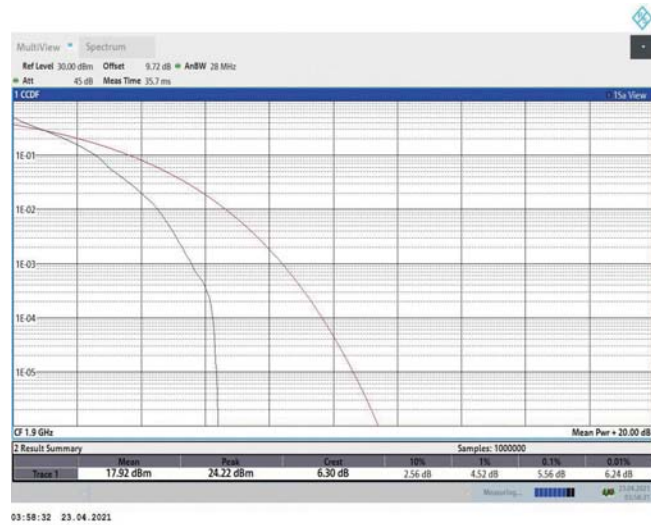


Band2-20MHz-QPSK-19100-1RB#0

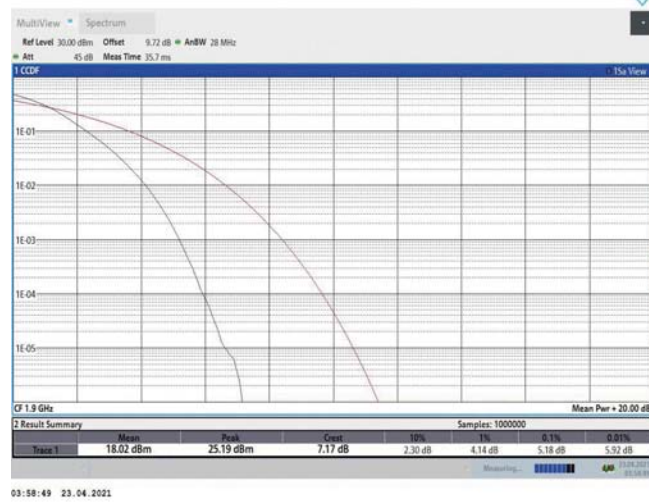


Band2-20MHz-QPSK-19100-100RB#0

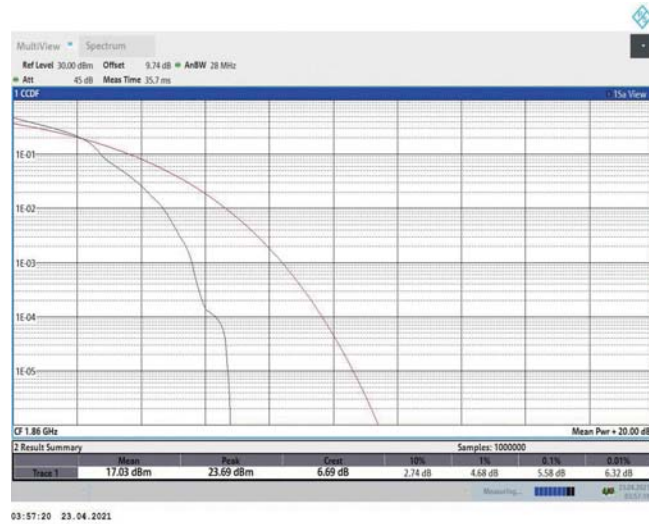


Band2-20MHz-16QAM-18700-1RB#0

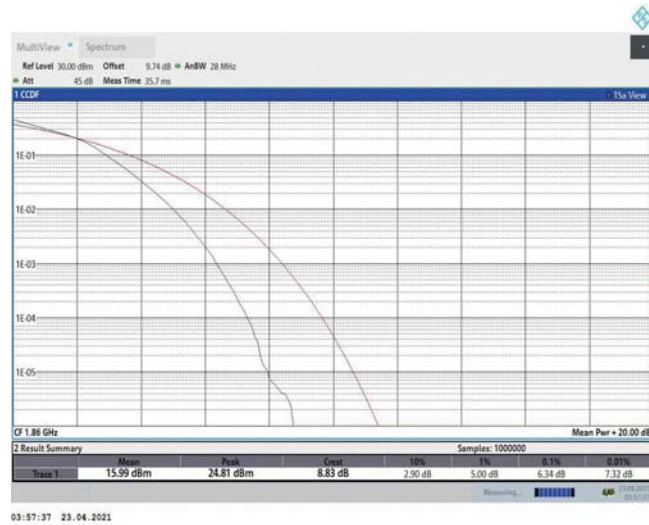


Band2-20MHz-16QAM-18700-100RB#0

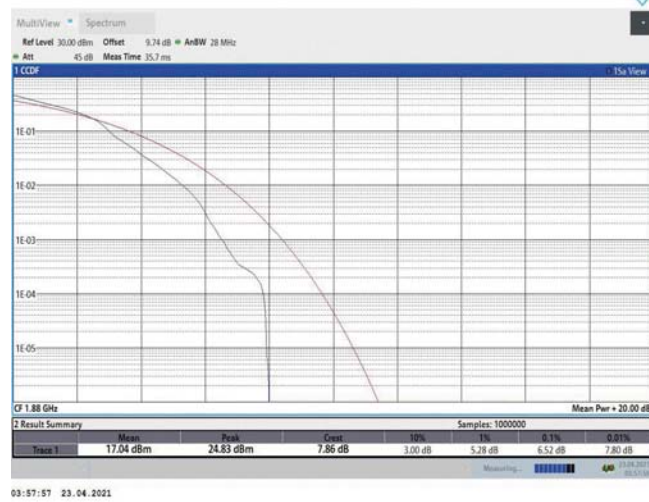


Band2-20MHz-16QAM-18900-1RB#0

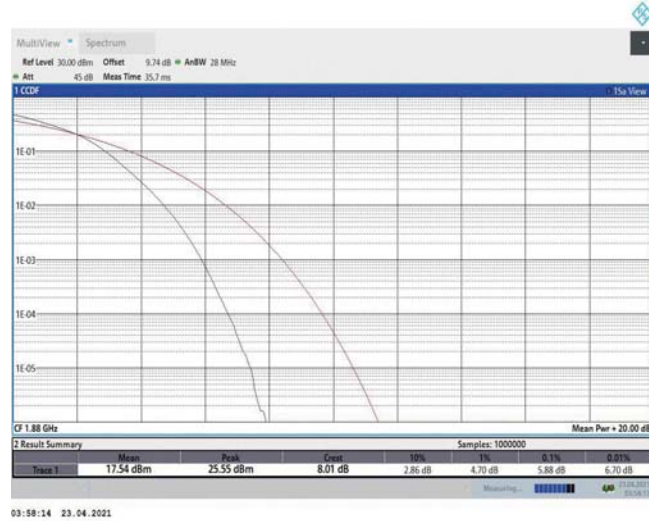

Band2-20MHz-16QAM-18900-100RB#0

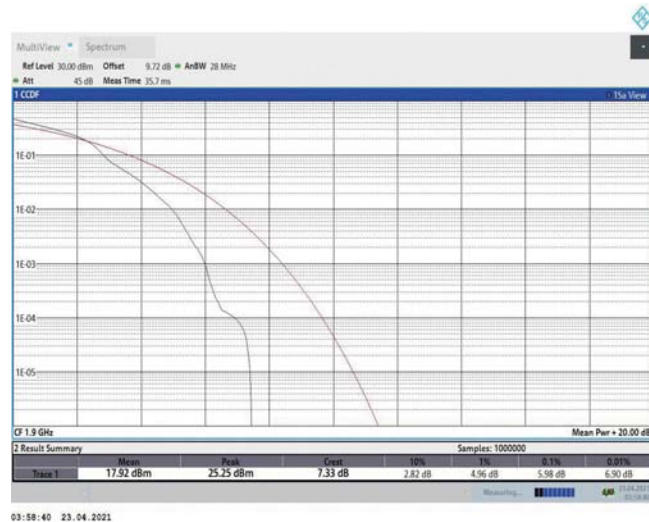


Band2-20MHz-16QAM-19100-1RB#0

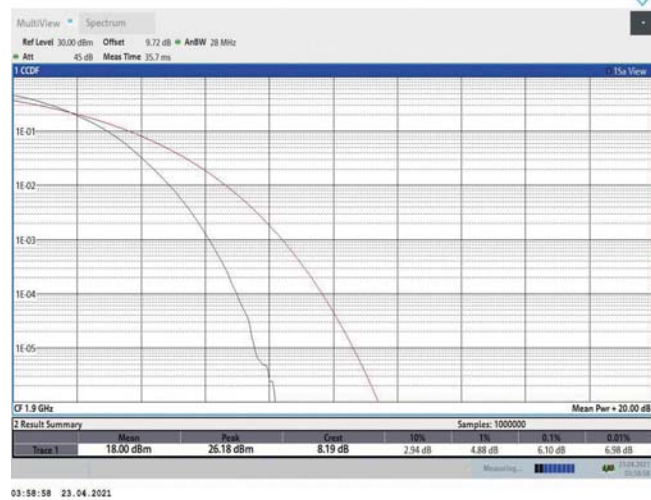


Band2-20MHz-16QAM-19100-100RB#0


ANT2:

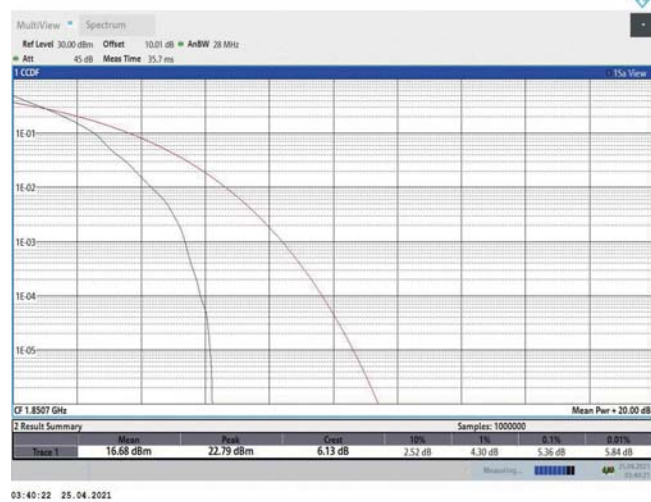


Band2-1.4MHz-QPSK-18607-1RB#0

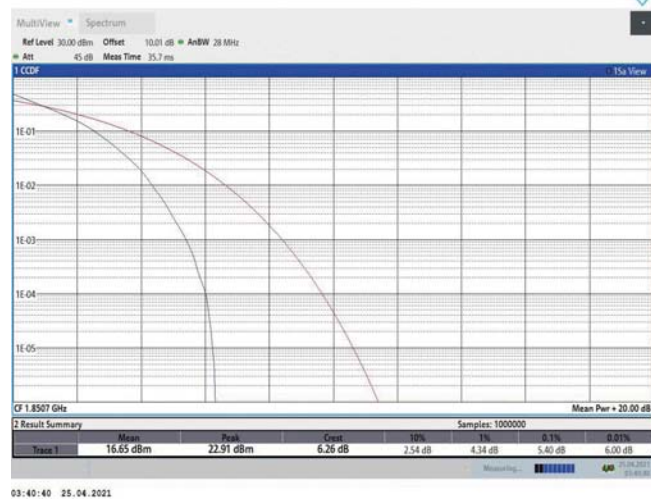


Band2-1.4MHz-QPSK-18607-6RB#0

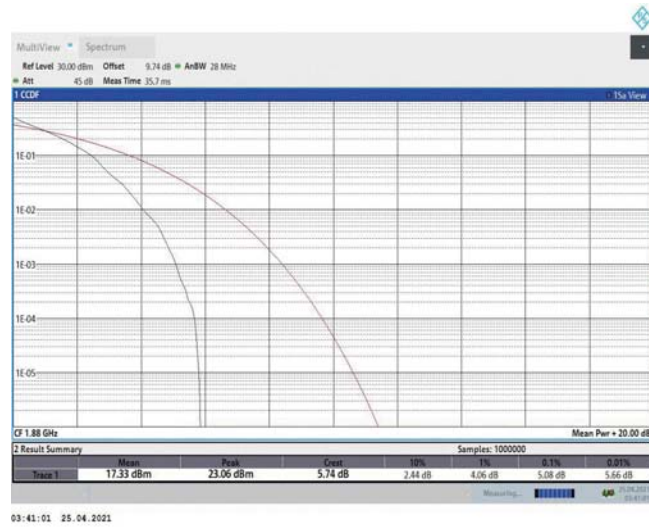


Band2-1.4MHz-QPSK-18900-1RB#0

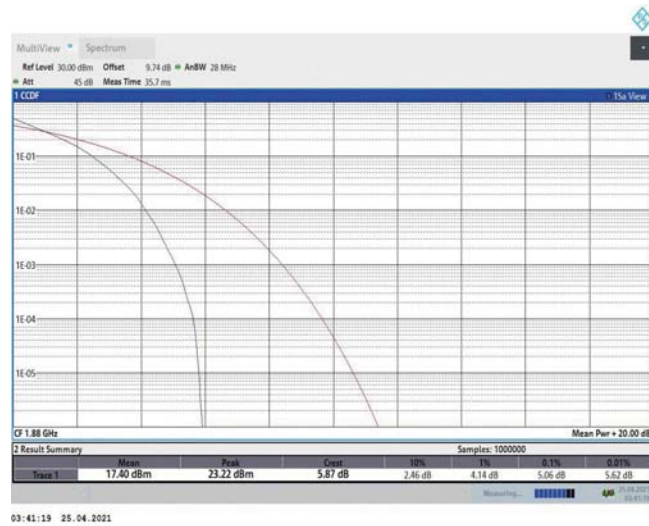


Band2-1.4MHz-QPSK-18900-6RB#0

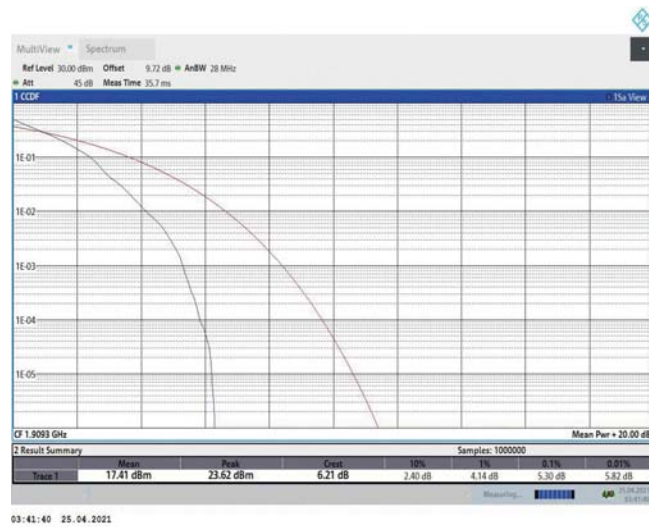


Band2-1.4MHz-QPSK-19193-1RB#0

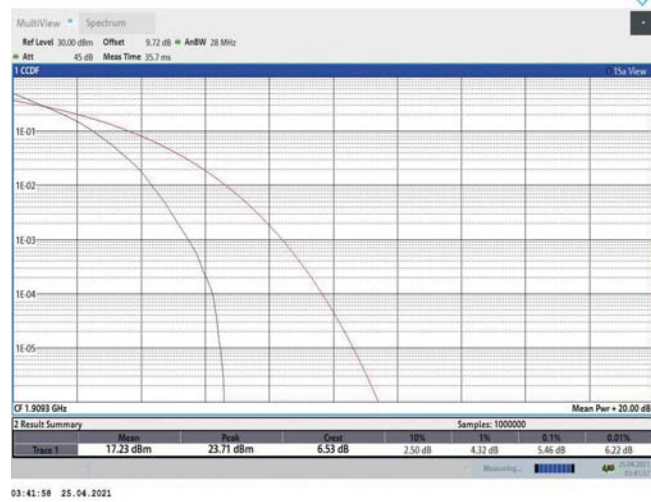


Band2-1.4MHz-QPSK-19193-6RB#0

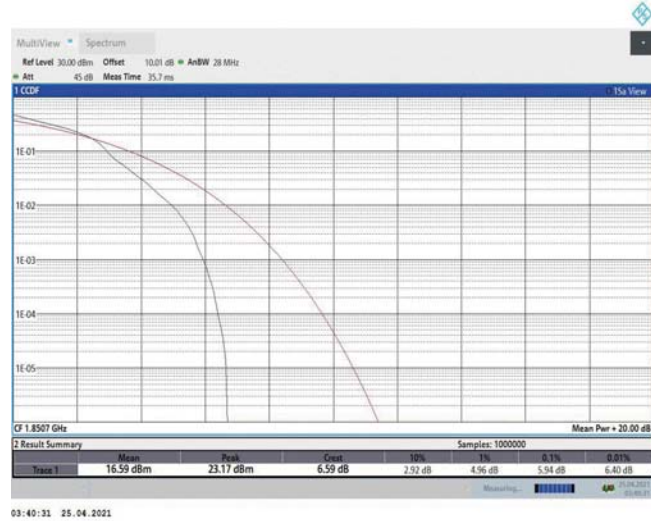


Band2-1.4MHz-16QAM-18607-1RB#0

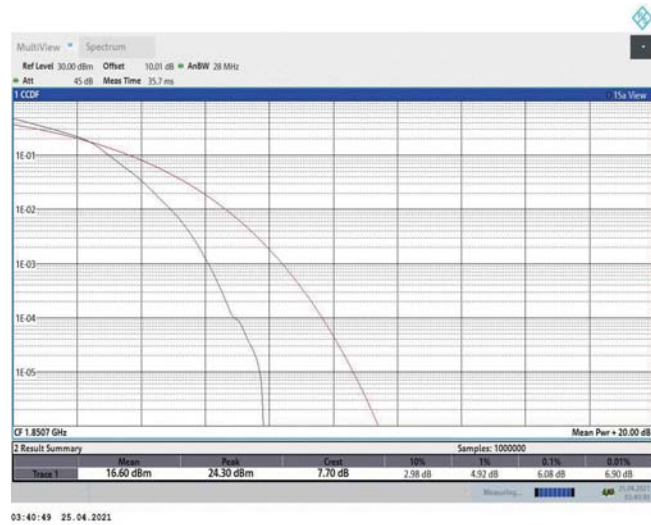


Band2-1.4MHz-16QAM-18607-6RB#0

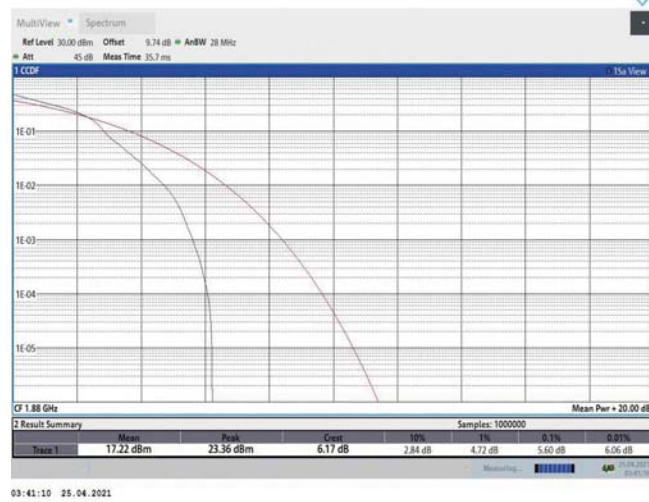


Band2-1.4MHz-16QAM-18900-1RB#0

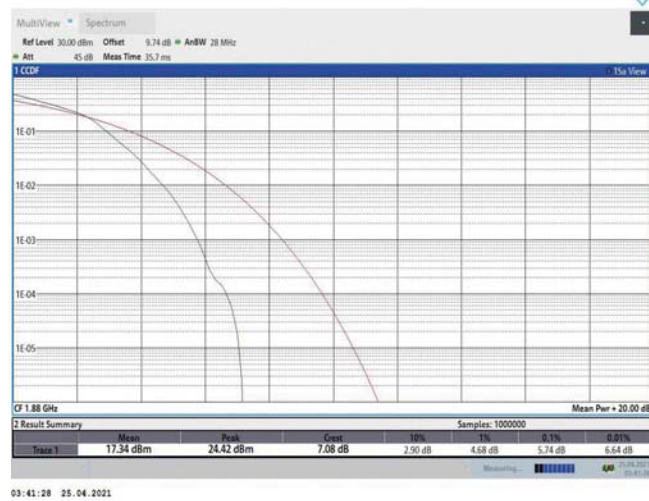


Band2-1.4MHz-16QAM-18900-6RB#0

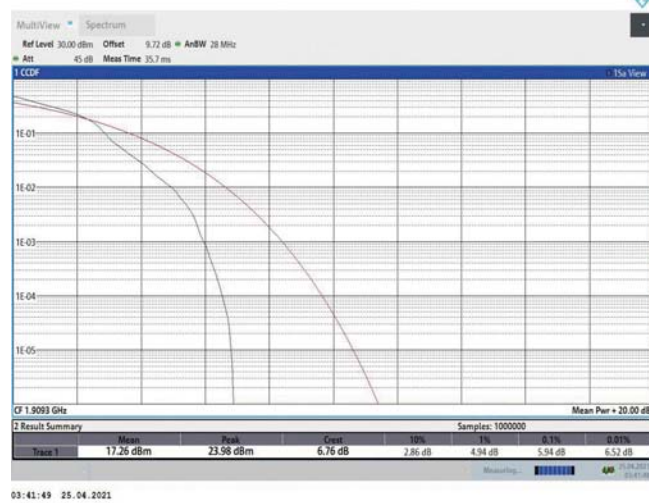


Band2-1.4MHz-16QAM-19193-1RB#0

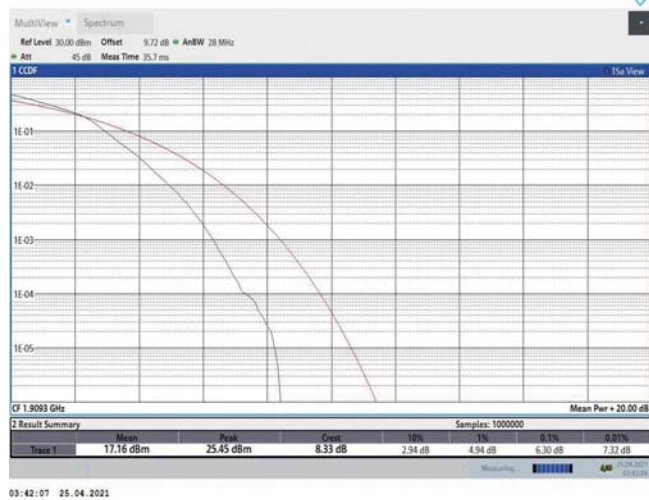


Band2-1.4MHz-16QAM-19193-6RB#0

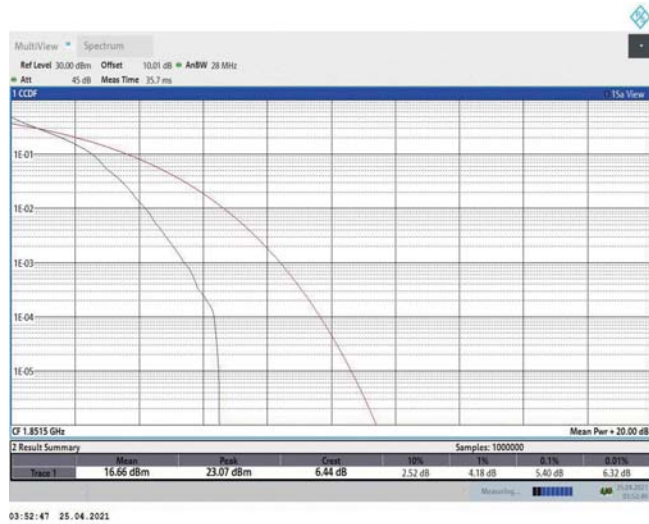


Band2-3MHz-QPSK-18615-1RB#0

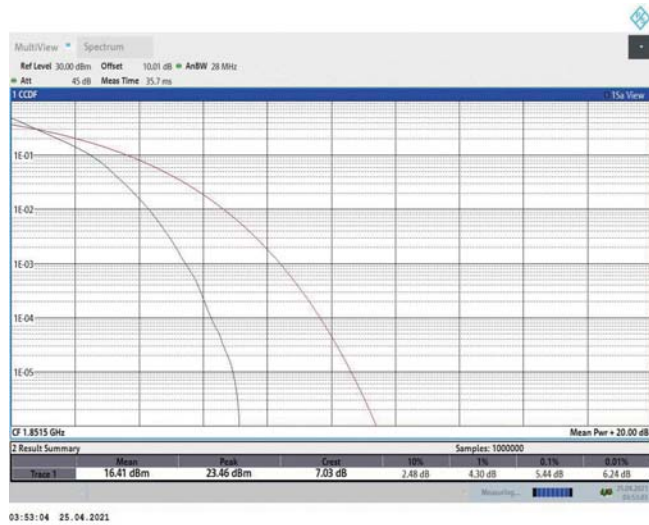


Band2-3MHz-QPSK-18615-15RB#0

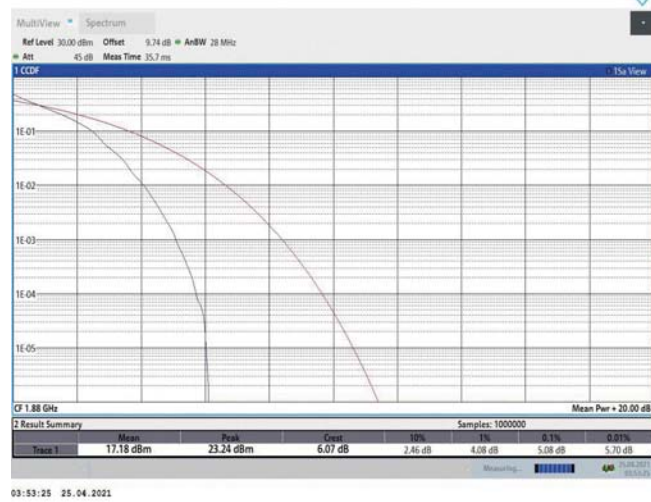


Band2-3MHz-QPSK-18900-1RB#0

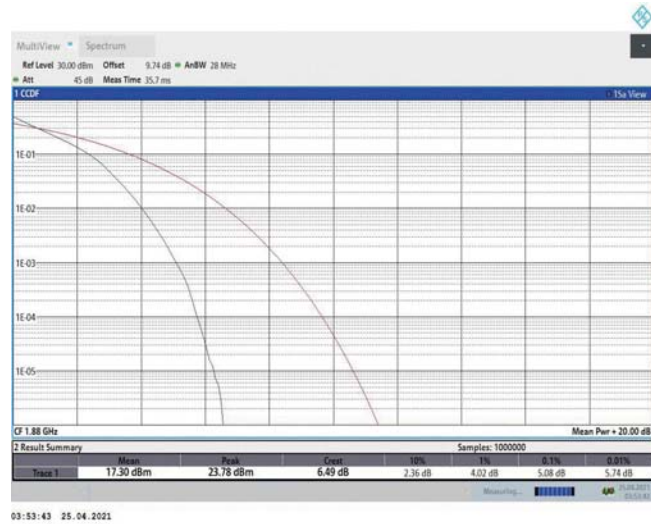


Band2-3MHz-QPSK-18900-15RB#0

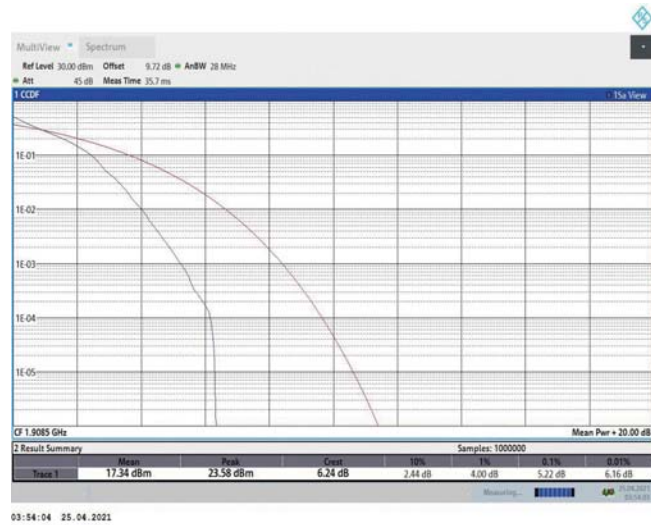


Band2-3MHz-QPSK-19185-1RB#0

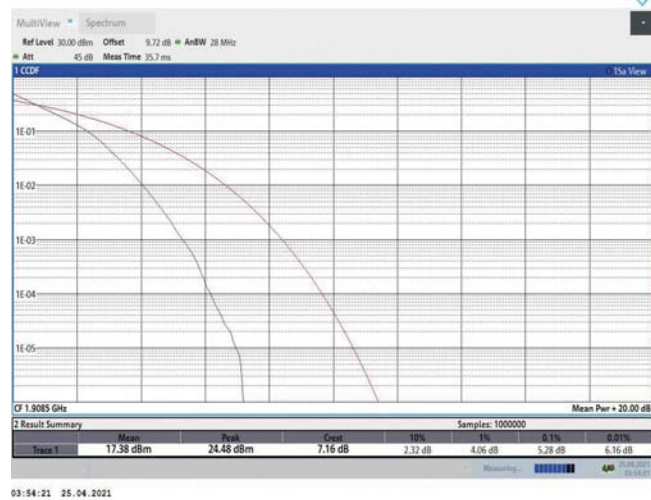


Band2-3MHz-QPSK-19185-15RB#0

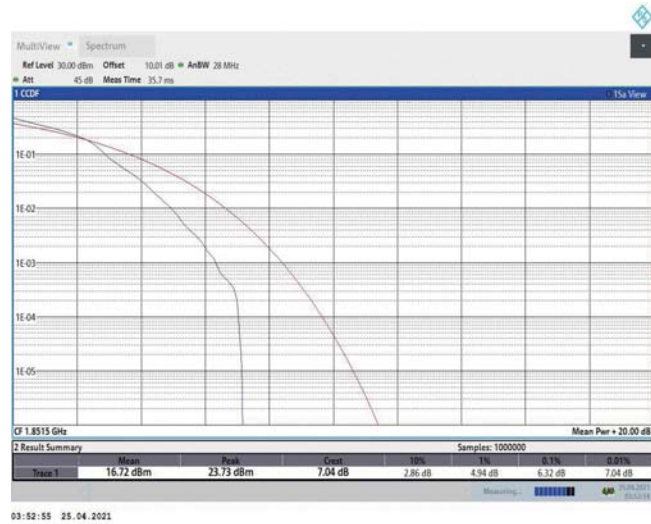


Band2-3MHz-16QAM-18615-1RB#0

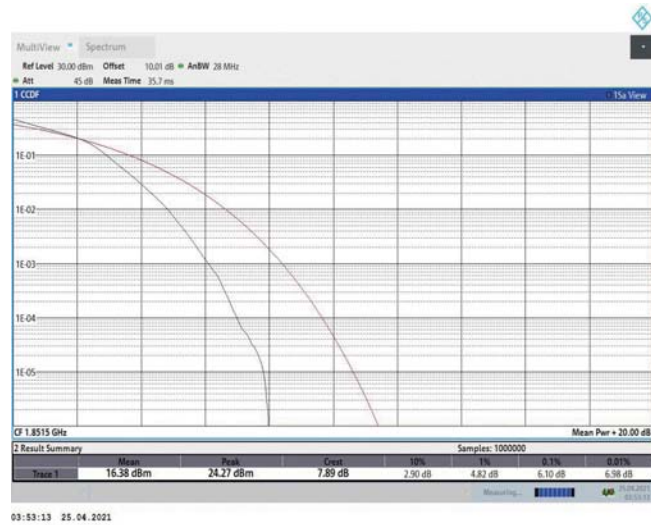


Band2-3MHz-16QAM-18615-15RB#0

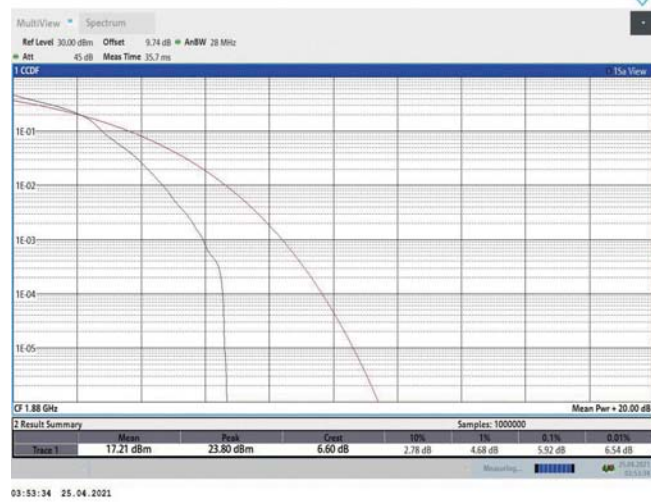


Band2-3MHz-16QAM-18900-1RB#0

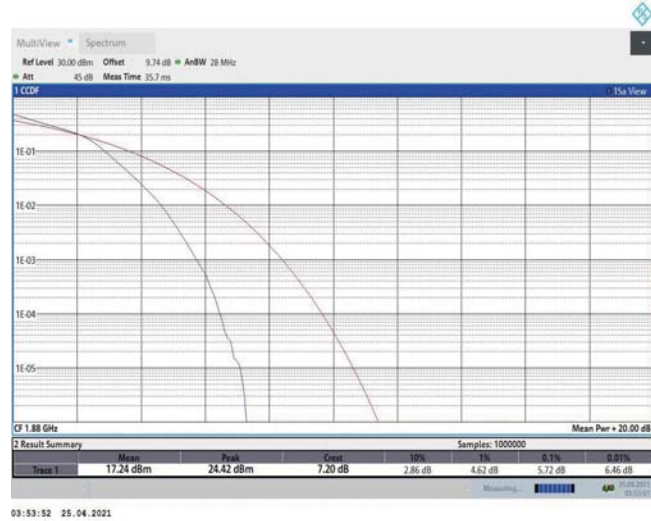


Band2-3MHz-16QAM-18900-15RB#0

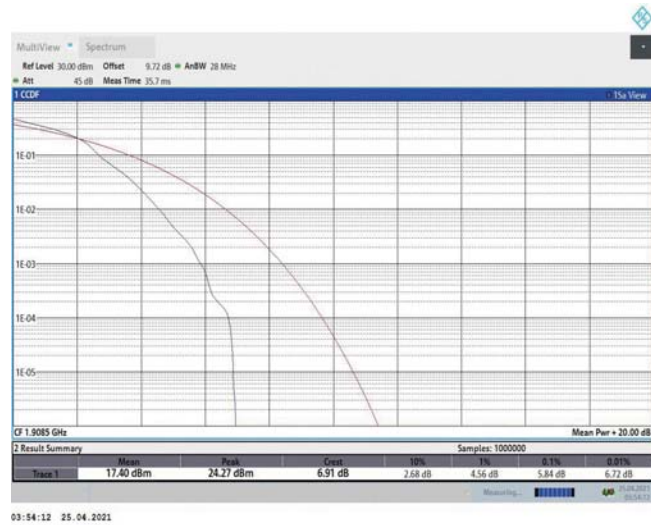


Band2-3MHz-16QAM-19185-1RB#0

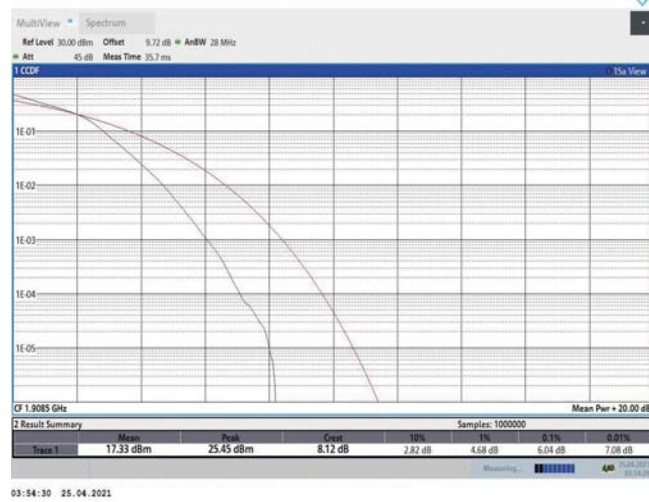


Band2-3MHz-16QAM-19185-15RB#0

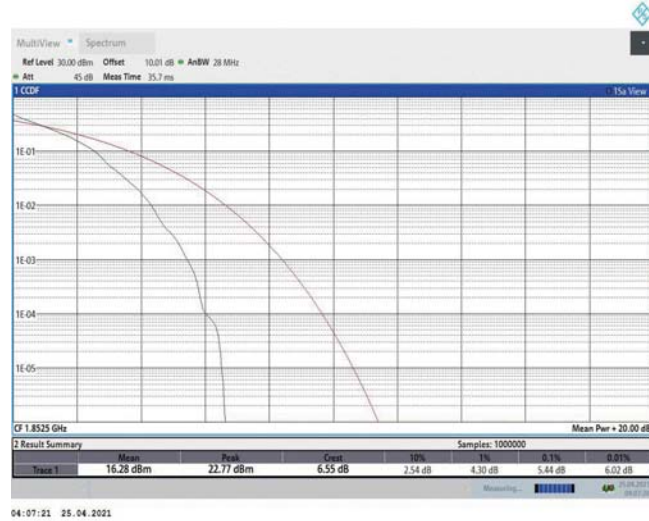


Band2-5MHz-QPSK-18625-1RB#0

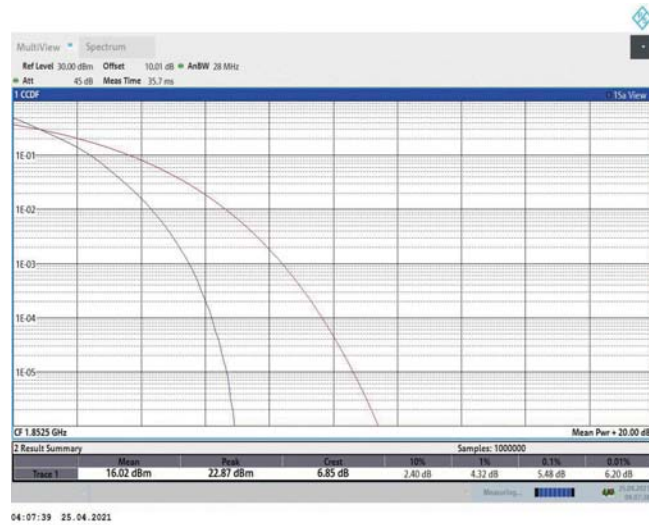


Band2-5MHz-QPSK-18625-25RB#0

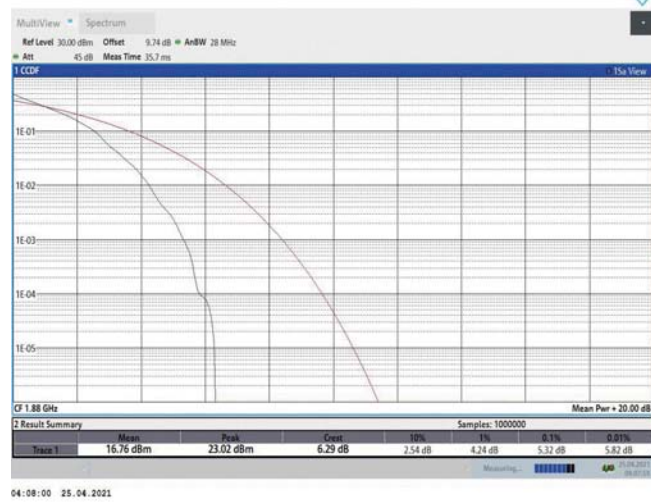


Band2-5MHz-QPSK-18900-1RB#0

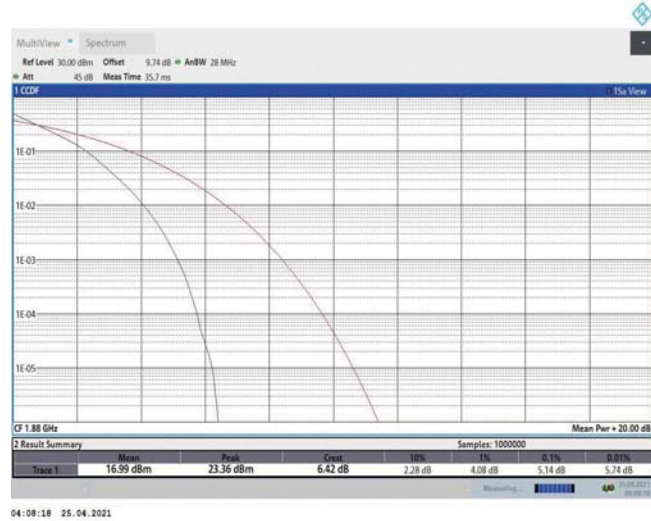


Band2-5MHz-QPSK-18900-25RB#0

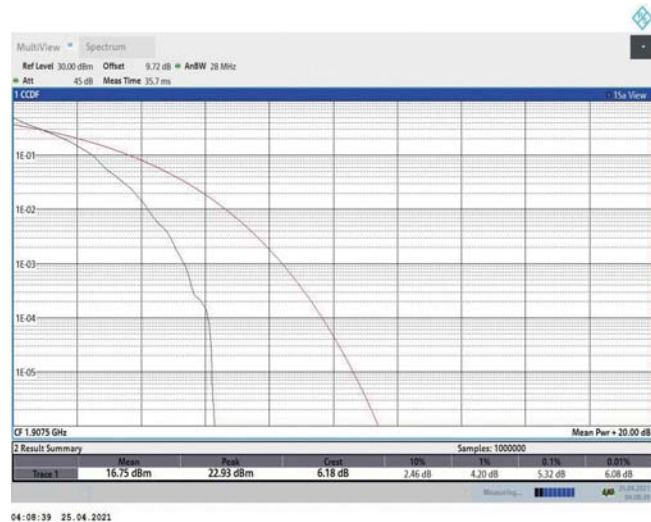


Band2-5MHz-QPSK-19175-1RB#0

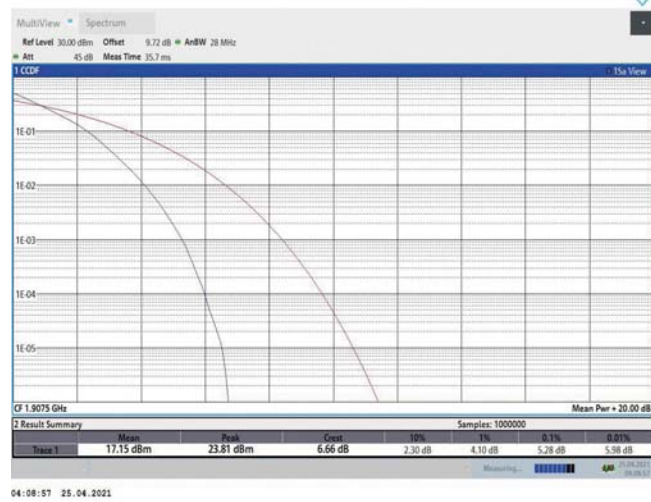


Band2-5MHz-QPSK-19175-25RB#0

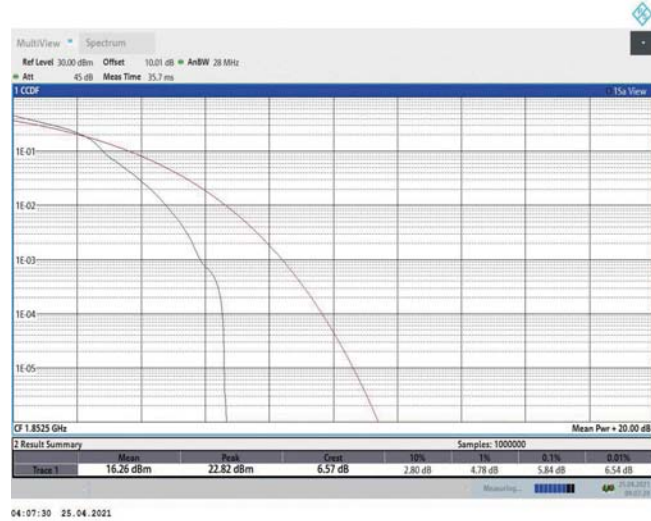


Band2-5MHz-16QAM-18625-1RB#0

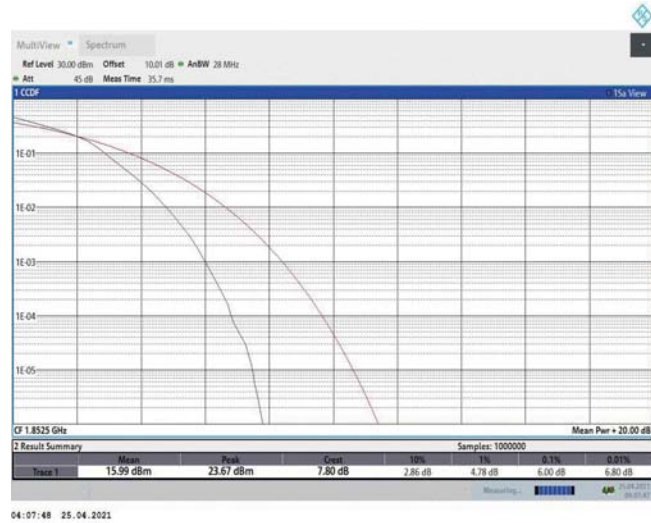


Band2-5MHz-16QAM-18625-25RB#0

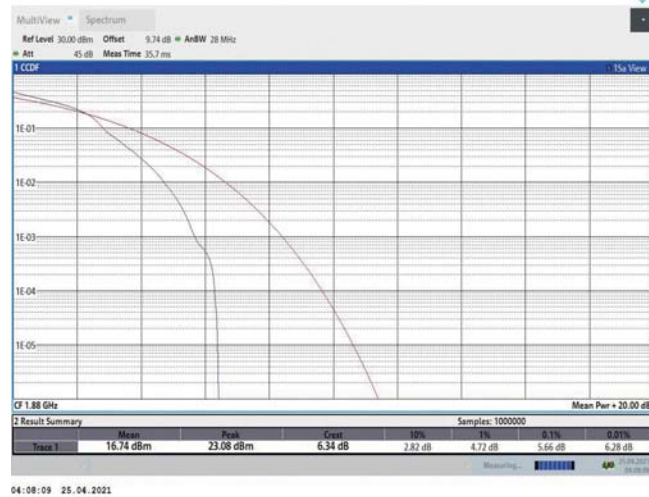


Band2-5MHz-16QAM-18900-1RB#0

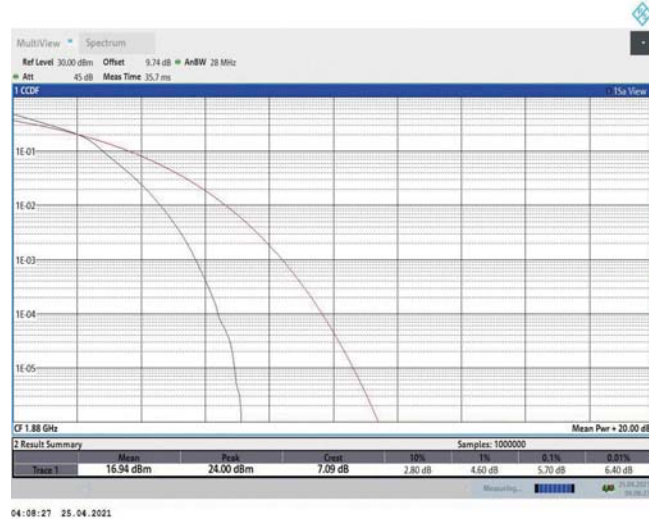


Band2-5MHz-16QAM-18900-25RB#0

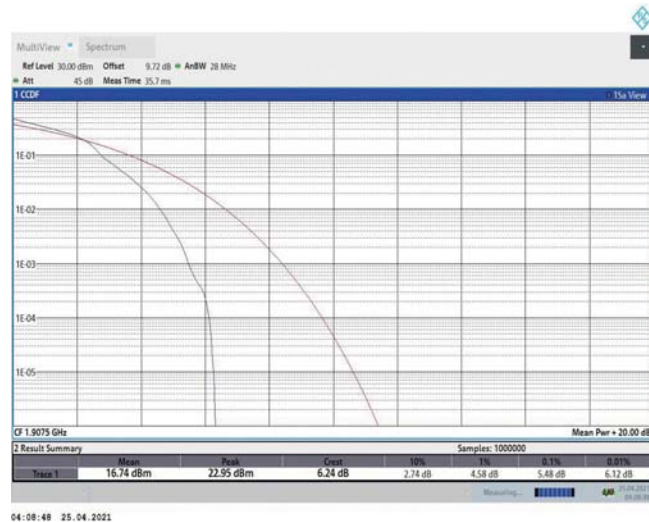


Band2-5MHz-16QAM-19175-1RB#0

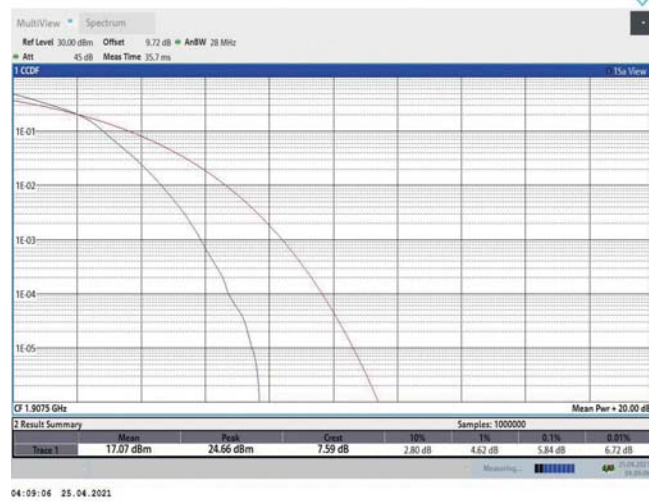


Band2-5MHz-16QAM-19175-25RB#0

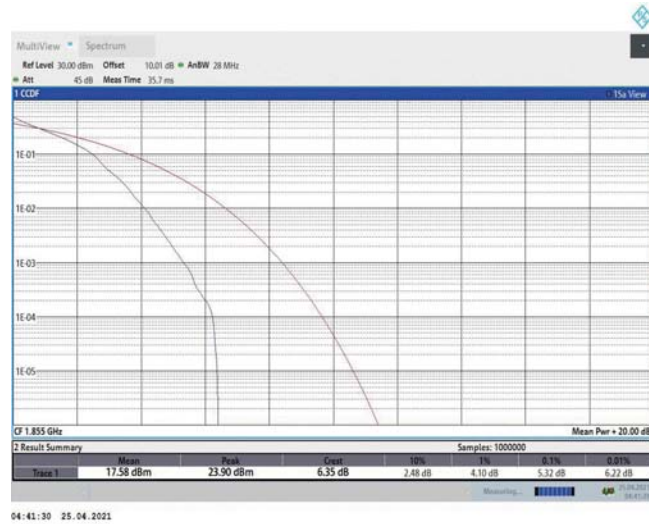


Band2-10MHz-QPSK-18650-1RB#0

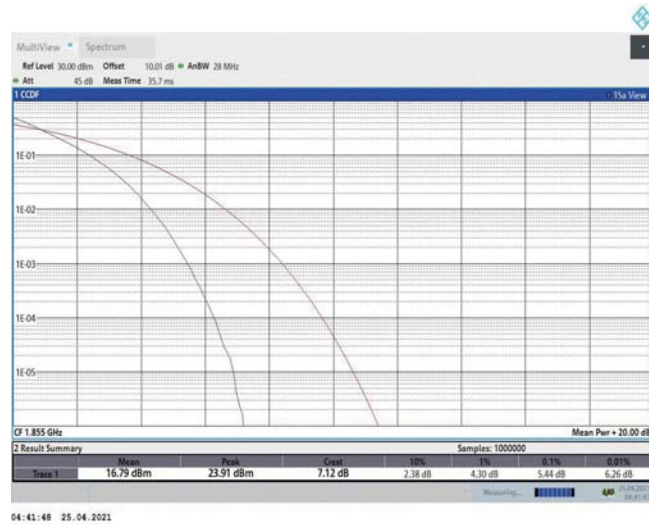


Band2-10MHz-QPSK-18650-50RB#0

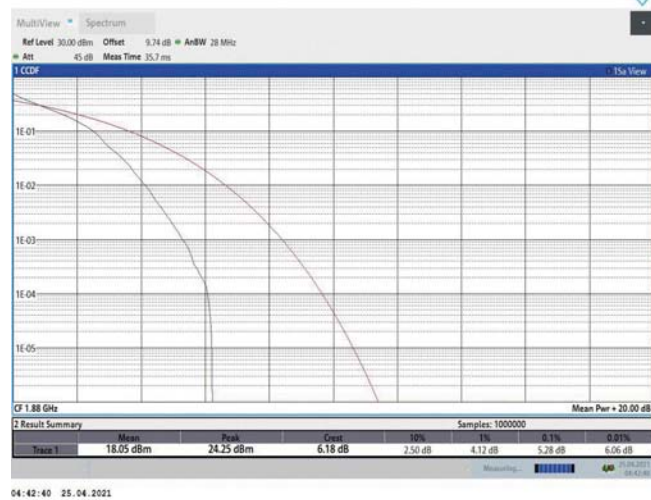


Band2-10MHz-QPSK-18900-1RB#0

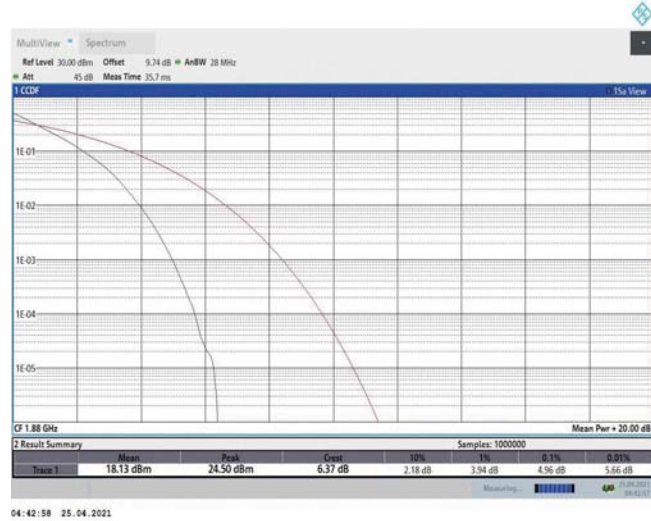


Band2-10MHz-QPSK-18900-50RB#0

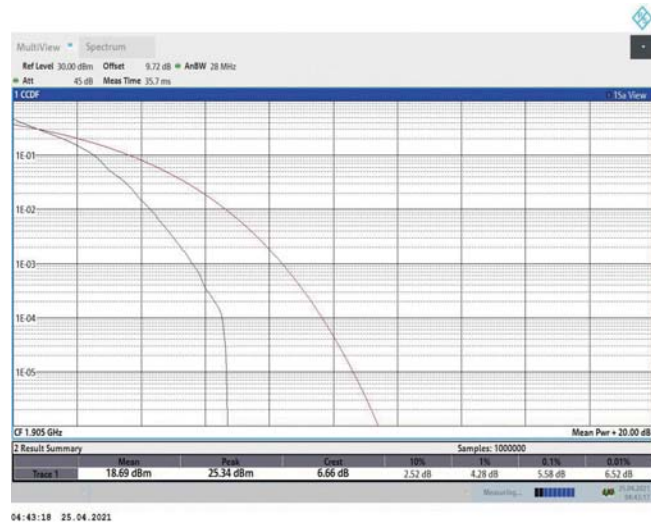


Band2-10MHz-QPSK-19150-1RB#0

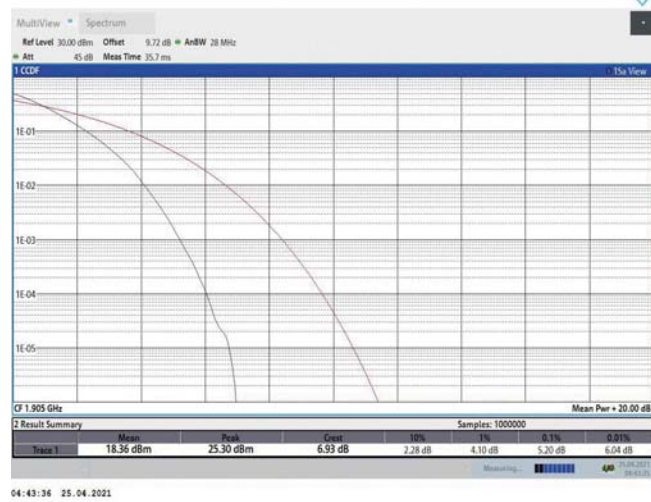


Band2-10MHz-QPSK-19150-50RB#0

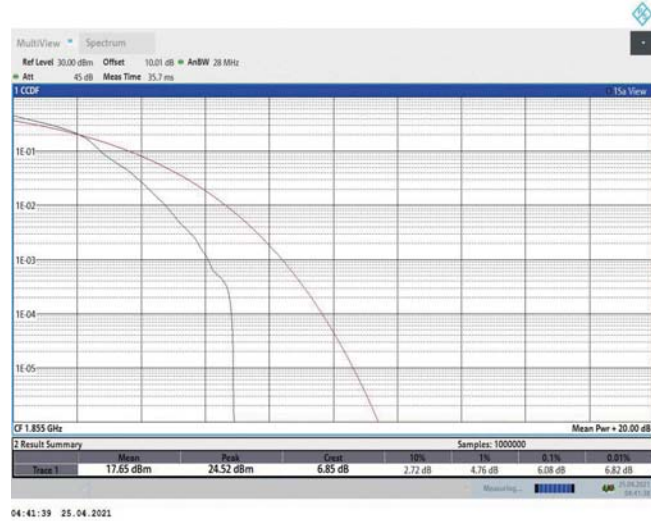


Band2-10MHz-16QAM-18650-1RB#0

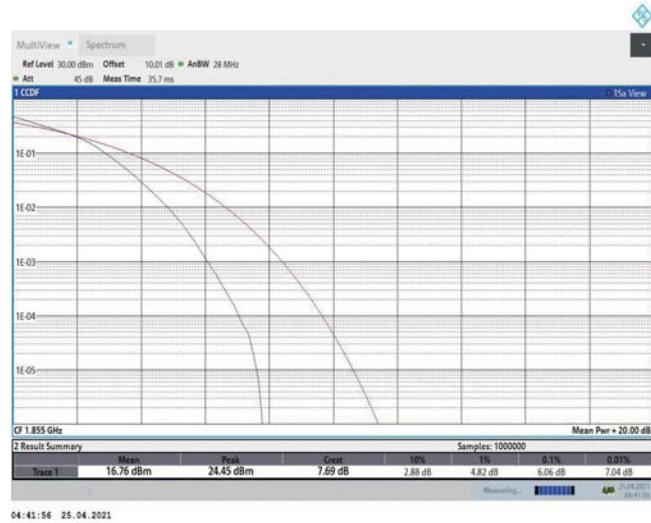


Band2-10MHz-16QAM-18650-50RB#0

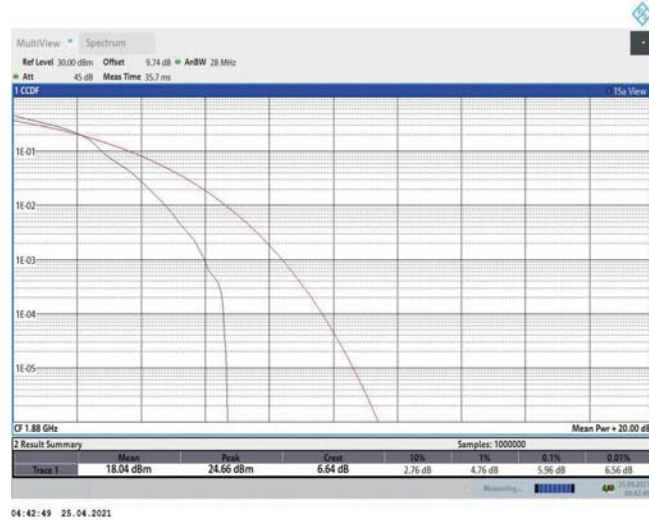


Band2-10MHz-16QAM-18900-1RB#0

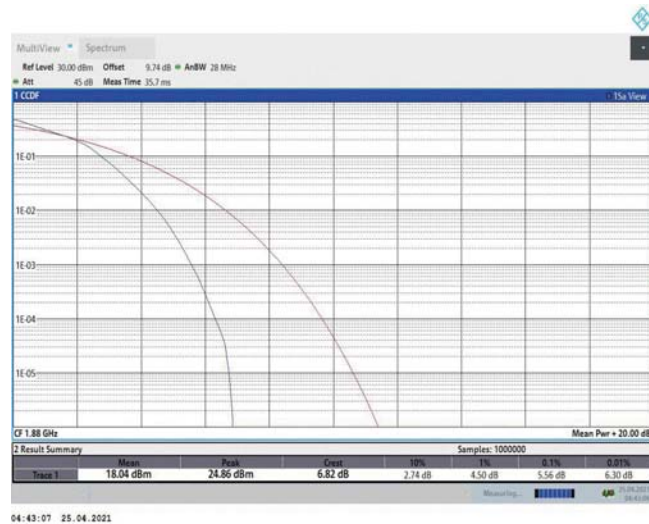


Band2-10MHz-16QAM-18900-50RB#0

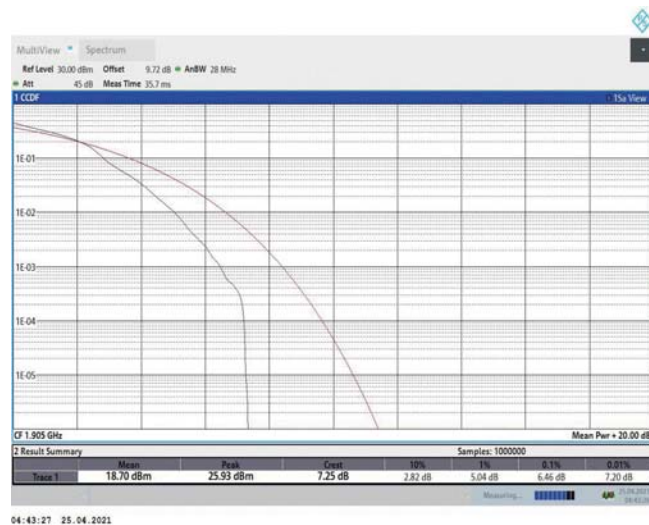


Band2-10MHz-16QAM-19150-1RB#0

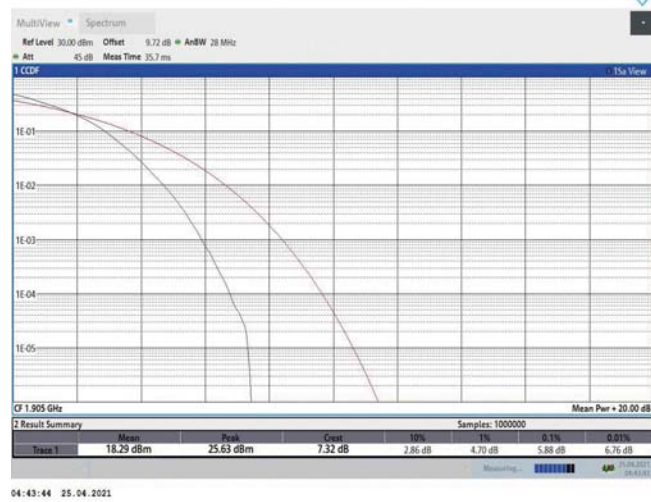


Band2-10MHz-16QAM-19150-50RB#0

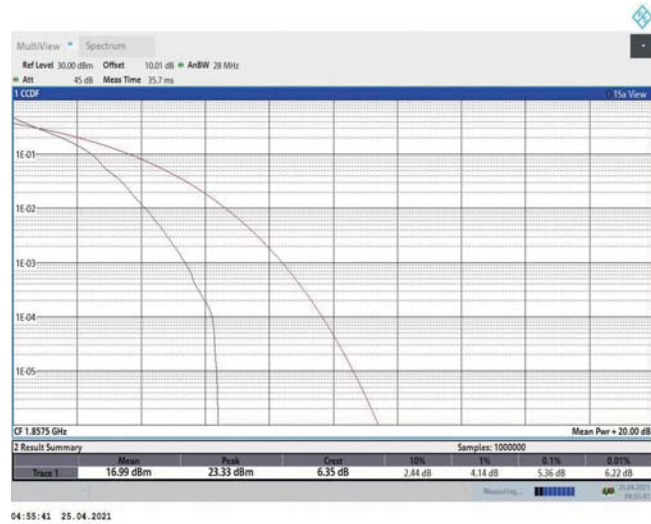


Band2-15MHz-QPSK-18675-1RB#0

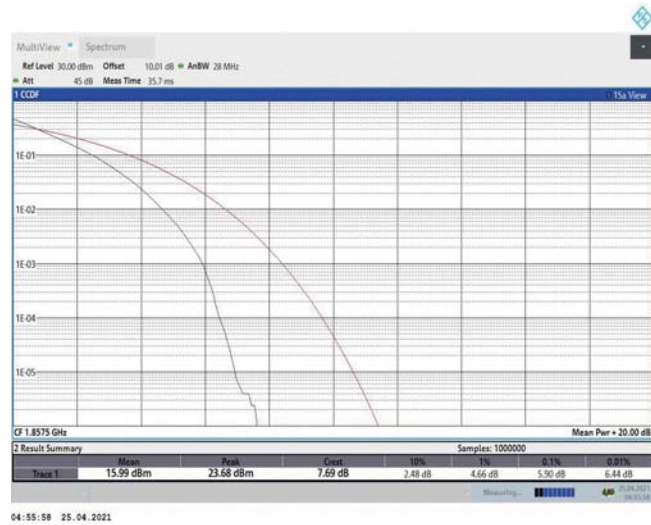


Band2-15MHz-QPSK-18675-75RB#0

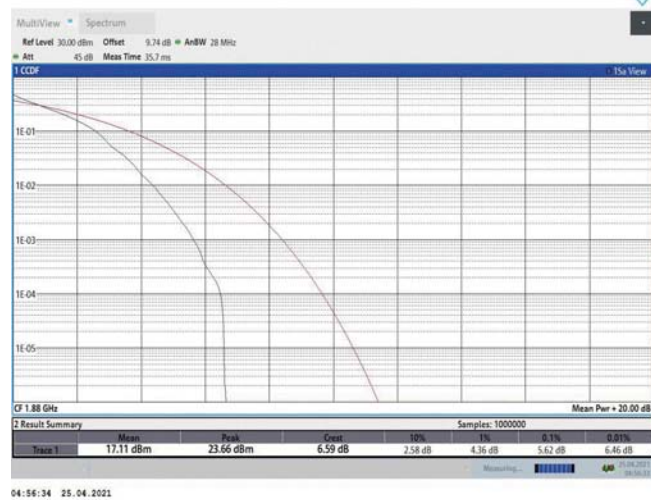

Band2-15MHz-QPSK-18900-1RB#0

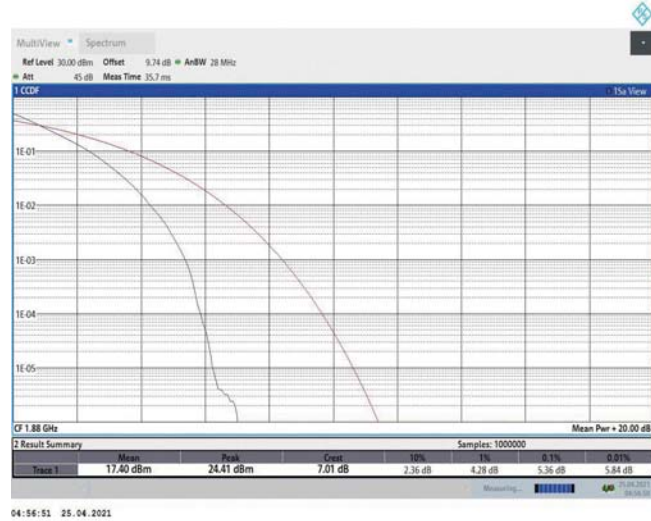


Band2-15MHz-QPSK-18900-75RB#0

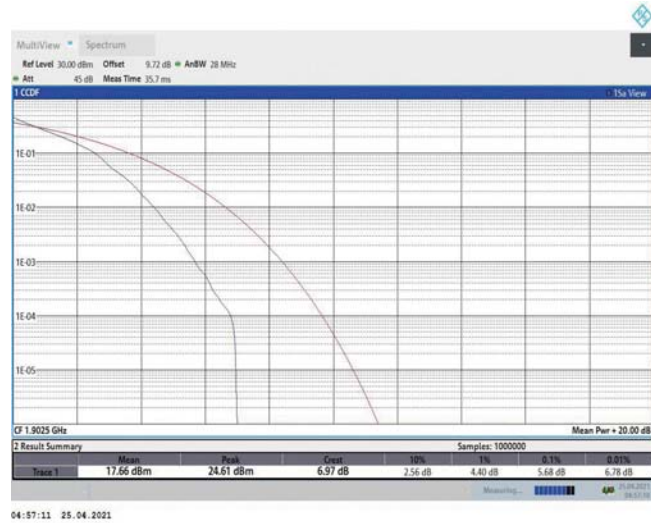


Band2-15MHz-QPSK-19125-1RB#0




Band2-15MHz-QPSK-19125-75RB#0

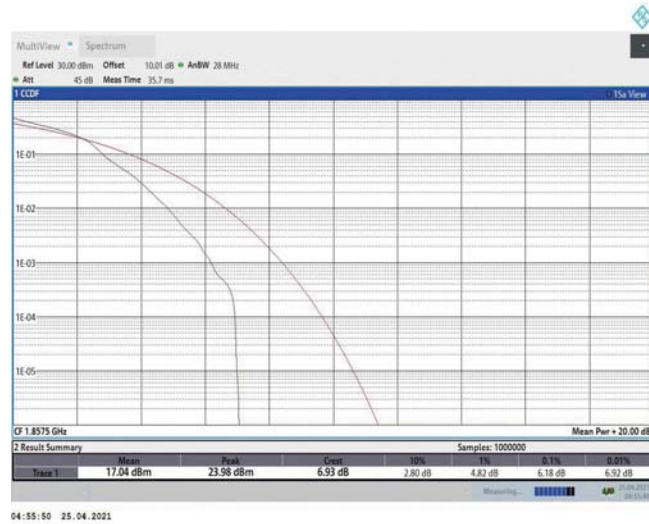


Band2-15MHz-16QAM-18675-1RB#0

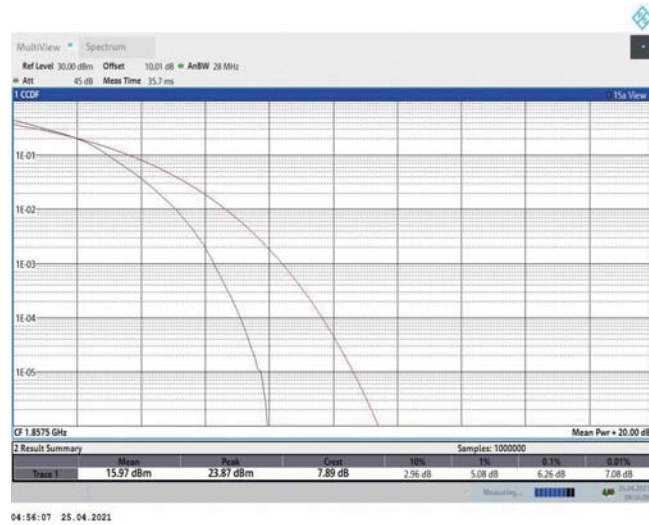


Band2-15MHz-16QAM-18675-75RB#0

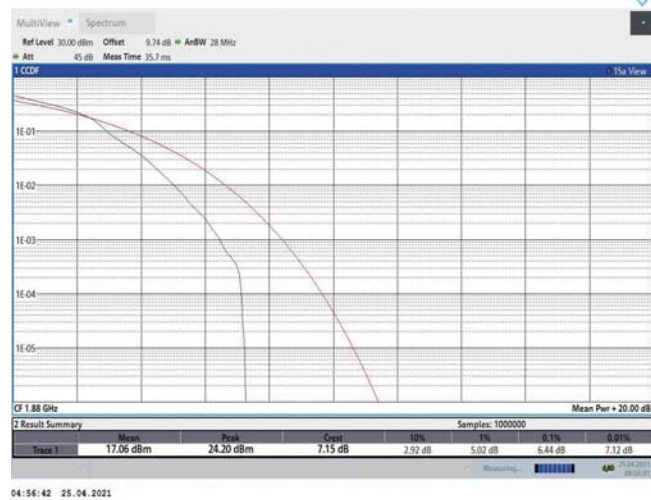


Band2-15MHz-16QAM-18900-1RB#0

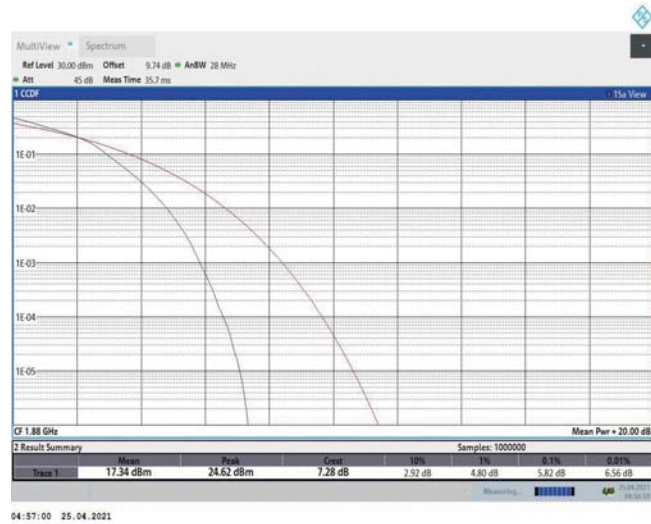


Band2-15MHz-16QAM-18900-75RB#0

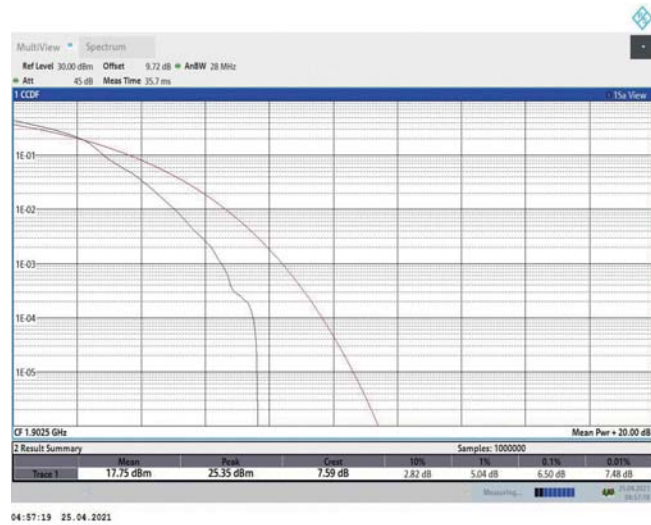


Band2-15MHz-16QAM-19125-1RB#0

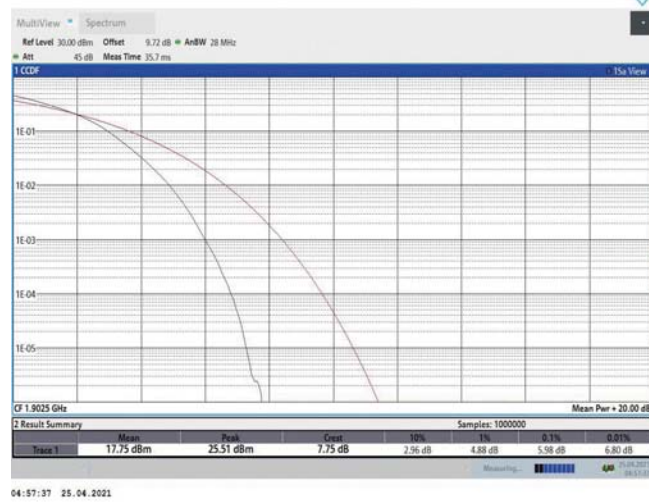


Band2-15MHz-16QAM-19125-75RB#0

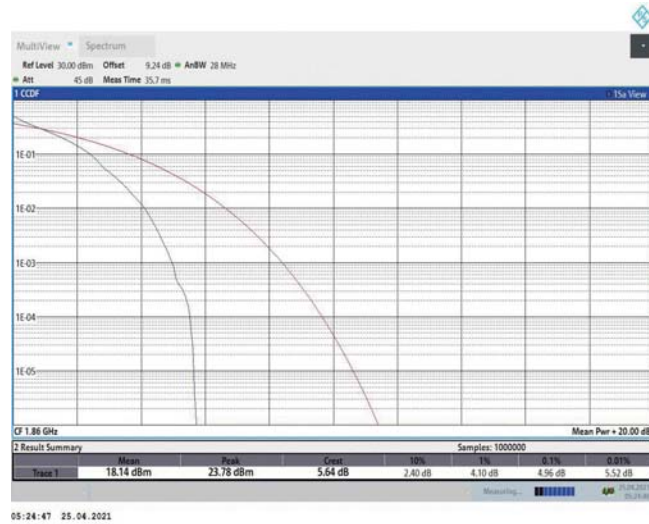


Band2-20MHz-QPSK-18700-1RB#0

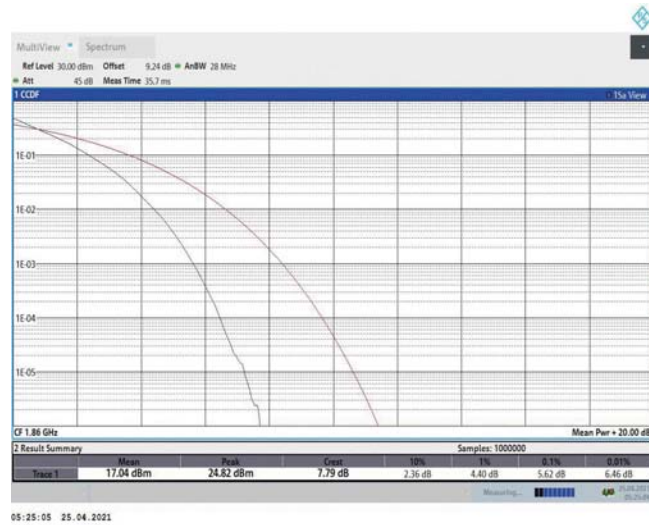

Band2-20MHz-QPSK-18700-100RB#0

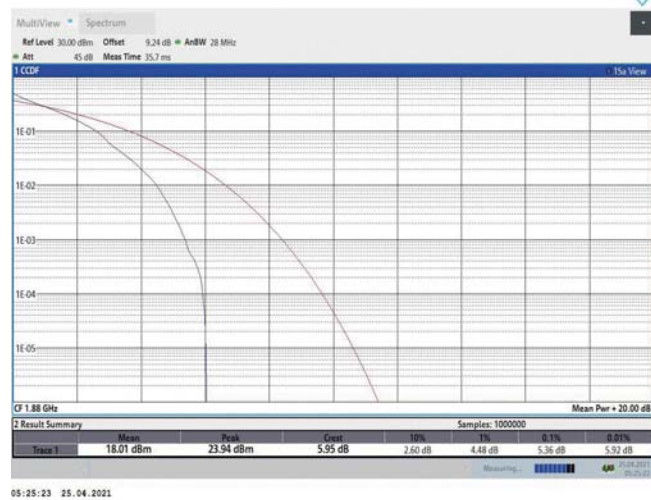


Band2-20MHz-QPSK-18900-1RB#0

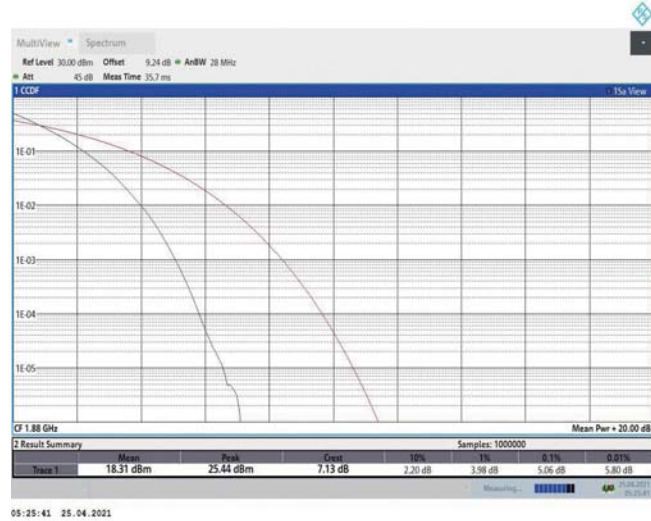


Band2-20MHz-QPSK-18900-100RB#0




Band2-20MHz-QPSK-19100-1RB#0

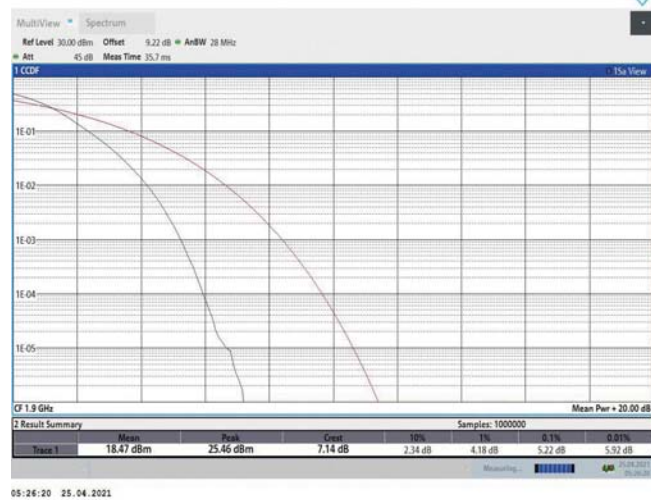


Band2-20MHz-QPSK-19100-100RB#0

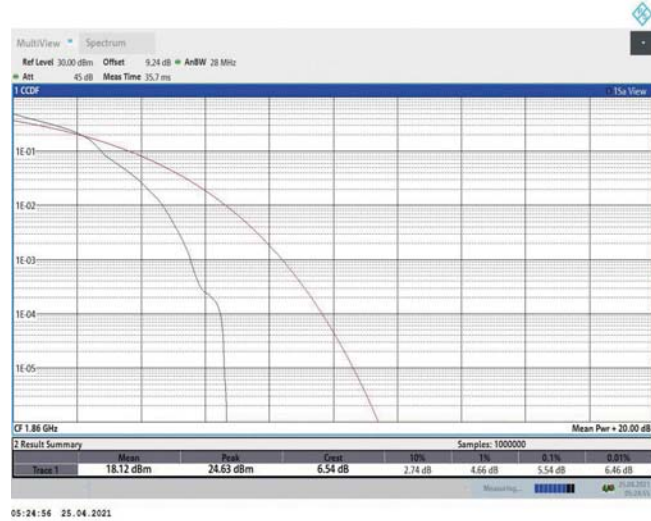


Band2-20MHz-16QAM-18700-1RB#0

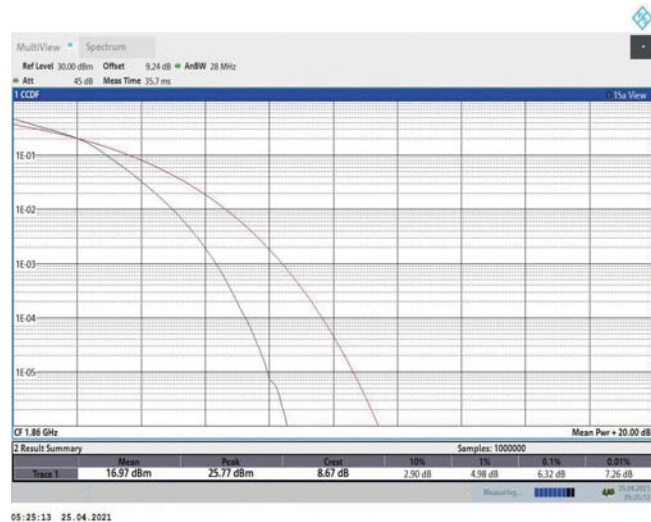


Band2-20MHz-16QAM-18700-100RB#0

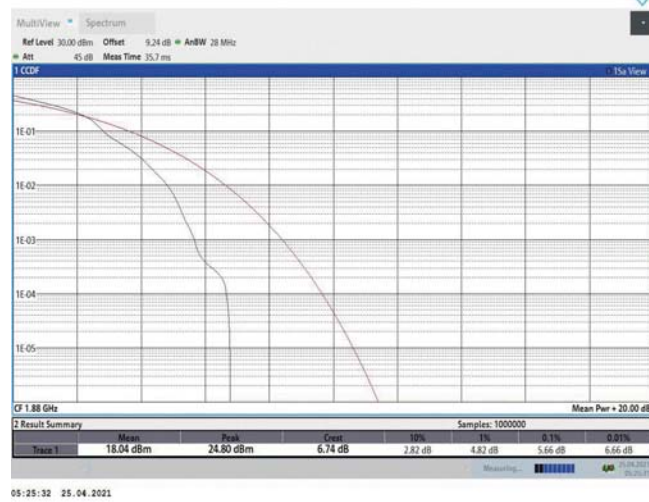


Band2-20MHz-16QAM-18900-1RB#0

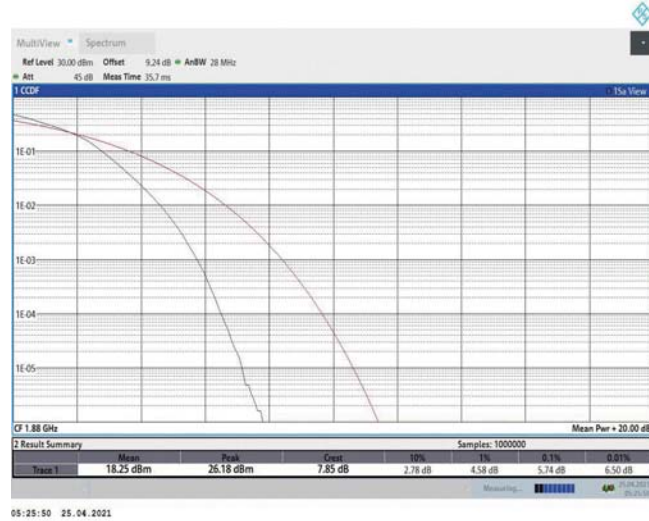

Band2-20MHz-16QAM-18900-100RB#0

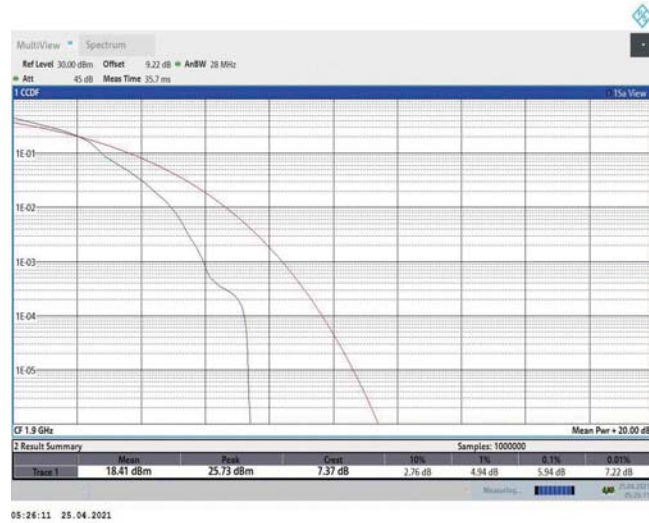

Band2-20MHz-16QAM-19100-1RB#0

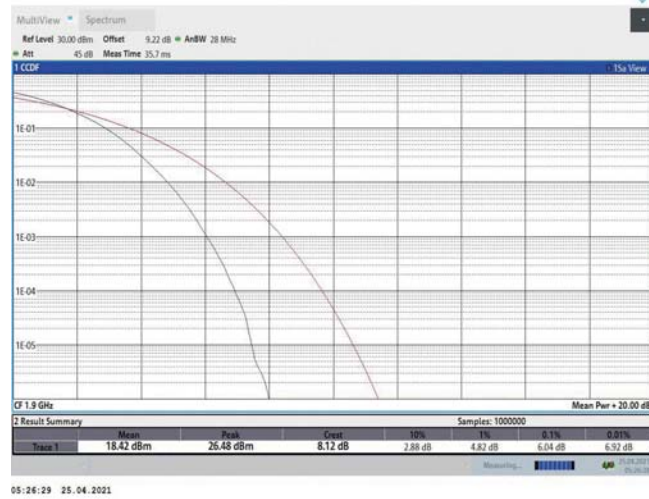

Band2-20MHz-16QAM-19100-100RB#0

Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

ANT0:

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	1.4MHz	QPSK	18607	6RB#0	1.13	1.525	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	1.088	1.350	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	1.087	1.315	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	1.087	1.340	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	1.089	1.405	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	1.087	1.355	PASS
Band2	3MHz	QPSK	18615	15RB#0	2.699	2.890	PASS
Band2	3MHz	QPSK	18900	15RB#0	2.706	2.920	PASS
Band2	3MHz	QPSK	19185	15RB#0	2.7	2.890	PASS
Band2	3MHz	16QAM	18615	15RB#0	2.696	2.930	PASS
Band2	3MHz	16QAM	18900	15RB#0	2.699	3.000	PASS
Band2	3MHz	16QAM	19185	15RB#0	2.697	2.960	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.507	4.820	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.51	4.820	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.512	4.850	PASS
Band2	5MHz	16QAM	18625	25RB#0	4.512	4.810	PASS
Band2	5MHz	16QAM	18900	25RB#0	4.512	4.820	PASS
Band2	5MHz	16QAM	19175	25RB#0	4.513	4.790	PASS
Band2	10MHz	QPSK	18650	50RB#0	8.986	9.567	PASS
Band2	10MHz	QPSK	18900	50RB#0	8.977	9.533	PASS
Band2	10MHz	QPSK	19150	50RB#0	8.964	9.567	PASS
Band2	10MHz	16QAM	18650	50RB#0	8.975	9.533	PASS
Band2	10MHz	16QAM	18900	50RB#0	8.965	9.567	PASS
Band2	10MHz	16QAM	19150	50RB#0	8.951	9.533	PASS
Band2	15MHz	QPSK	18675	75RB#0	13.505	14.350	PASS
Band2	15MHz	QPSK	18900	75RB#0	13.456	14.300	PASS
Band2	15MHz	QPSK	19125	75RB#0	13.417	14.300	PASS
Band2	15MHz	16QAM	18675	75RB#0	13.498	14.300	PASS
Band2	15MHz	16QAM	18900	75RB#0	13.446	14.300	PASS
Band2	15MHz	16QAM	19125	75RB#0	13.399	14.300	PASS
Band2	20MHz	QPSK	18700	100RB#0	18.095	19.333	PASS
Band2	20MHz	QPSK	18900	100RB#0	17.963	19.333	PASS
Band2	20MHz	QPSK	19100	100RB#0	17.931	19.200	PASS

Band2	20MHz	16QAM	18700	100RB#0	18.084	19.333	PASS
Band2	20MHz	16QAM	18900	100RB#0	17.983	19.333	PASS
Band2	20MHz	16QAM	19100	100RB#0	17.925	19.200	PASS

ANT2:

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	1.4MHz	QPSK	18607	6RB#0	1.102	1.490	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	1.087	1.315	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	1.088	1.330	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	1.087	1.345	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	1.088	1.370	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	1.088	1.380	PASS
Band2	3MHz	QPSK	18615	15RB#0	2.701	2.890	PASS
Band2	3MHz	QPSK	18900	15RB#0	2.702	2.890	PASS
Band2	3MHz	QPSK	19185	15RB#0	2.703	2.900	PASS
Band2	3MHz	16QAM	18615	15RB#0	2.694	2.930	PASS
Band2	3MHz	16QAM	18900	15RB#0	2.693	2.970	PASS
Band2	3MHz	16QAM	19185	15RB#0	2.695	2.950	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.506	4.830	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.507	4.820	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.504	4.850	PASS
Band2	5MHz	16QAM	18625	25RB#0	4.514	4.810	PASS
Band2	5MHz	16QAM	18900	25RB#0	4.511	4.820	PASS
Band2	5MHz	16QAM	19175	25RB#0	4.518	4.810	PASS
Band2	10MHz	QPSK	18650	50RB#0	9.002	10.133	PASS
Band2	10MHz	QPSK	18900	50RB#0	8.978	9.600	PASS
Band2	10MHz	QPSK	19150	50RB#0	8.962	9.533	PASS
Band2	10MHz	16QAM	18650	50RB#0	8.976	9.567	PASS
Band2	10MHz	16QAM	18900	50RB#0	8.973	9.533	PASS
Band2	10MHz	16QAM	19150	50RB#0	8.954	9.533	PASS
Band2	15MHz	QPSK	18675	75RB#0	13.505	14.300	PASS
Band2	15MHz	QPSK	18900	75RB#0	13.454	14.300	PASS
Band2	15MHz	QPSK	19125	75RB#0	13.422	14.300	PASS
Band2	15MHz	16QAM	18675	75RB#0	13.506	14.300	PASS
Band2	15MHz	16QAM	18900	75RB#0	13.435	14.300	PASS
Band2	15MHz	16QAM	19125	75RB#0	13.401	14.300	PASS
Band2	20MHz	QPSK	18700	100RB#0	18.105	19.333	PASS
Band2	20MHz	QPSK	18900	100RB#0	17.962	19.267	PASS
Band2	20MHz	QPSK	19100	100RB#0	17.941	19.200	PASS
Band2	20MHz	16QAM	18700	100RB#0	18.075	19.333	PASS
Band2	20MHz	16QAM	18900	100RB#0	17.973	19.267	PASS


Band2	20MHz	16QAM	19100	100RB#0	17.924	19.200	PASS
-------	-------	-------	-------	---------	--------	--------	------

Test Graphs


ANT0:




Band2-1.4MHz-QPSK-18607-6RB#0-1.13

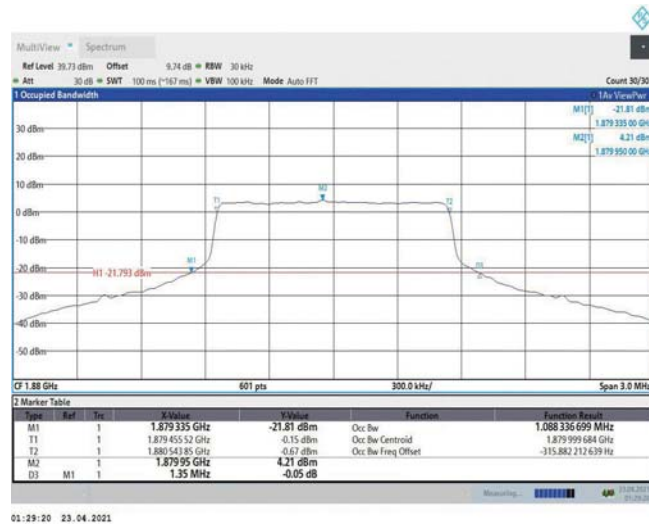


Band2-1.4MHz-QPSK-18900-6RB#0-1.088

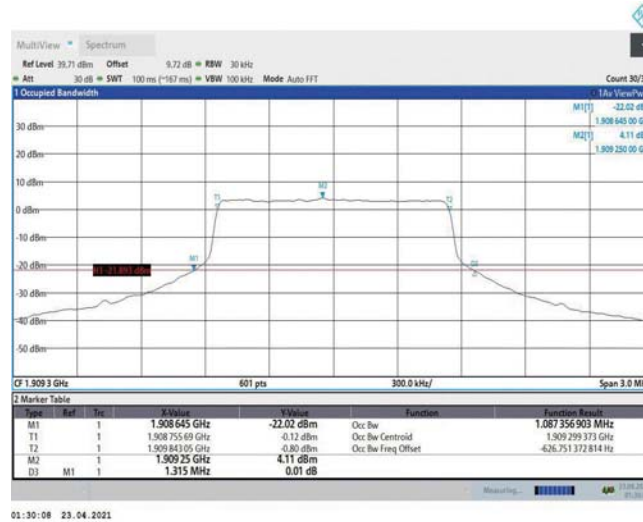

Band2-1.4MHz-QPSK-19193-6RB#0-1.087

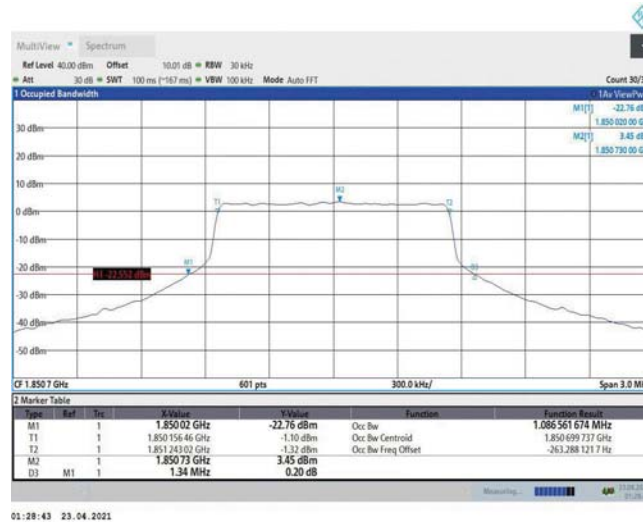

Band2-1.4MHz-16QAM-18607-6RB#0-1.087

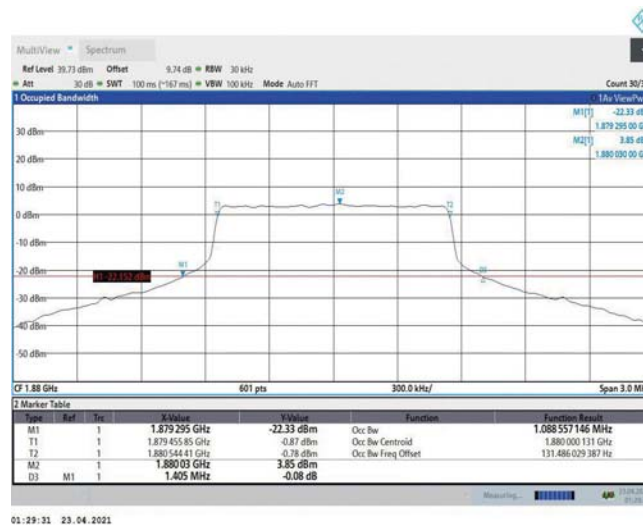

Band2-1.4MHz-16QAM-18900-6RB#0-1.089