



Window/Door Alert Sensor

Sensor de alerta de ventana/puerta

Capteur d'alerte de fenêtre/porte

Sensore di allarme finestra/porta

Fenster/Tür-Warnsensor

EN Quick Start Guide


ES Guía de inicio rápido

FR Guide de démarrage rapide

IT Guida rapida

DE Schnellstartanleitung


OVERVIEW

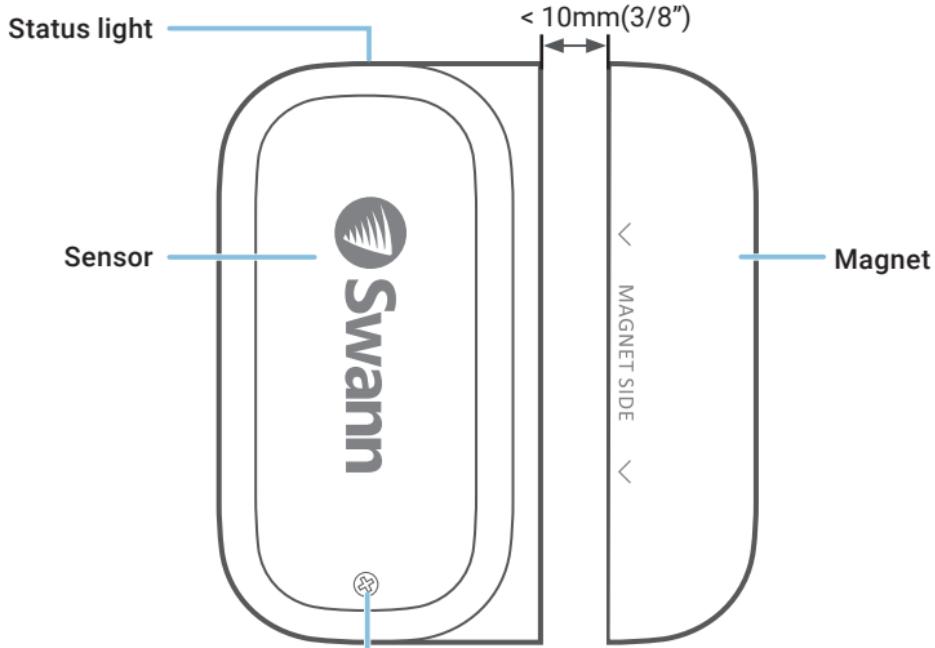

Cover screw
Remove to access battery compartment
and QR code  (located under cover)


BATTERY INSTALLATION

- 1 Unscrew the sensor cover with the supplied screwdriver and lift it off.
- 2 Insert the supplied two AAA batteries into the battery compartment according to the polarity markings (+ and -) shown. Pairing mode will automatically activate on the sensor for 3 minutes when batteries are inserted. The sensor status light will blink blue slowly during pairing mode. If you have downloaded the Swann Security app on your mobile device (see page 4), you can proceed to the pairing process (see page 5).
Note: Pairing mode on the sensor can be activated at any time by re-inserting the batteries.
- 3 After you have paired the sensor, replace the cover and screw it firmly in place.
- 4 Should you need to replace the batteries in the future, there is no need to re-pair the sensor. Simply wait for pairing mode to timeout (3 minutes), after which the sensor will automatically reconnect to the previously configured Wi-Fi network.

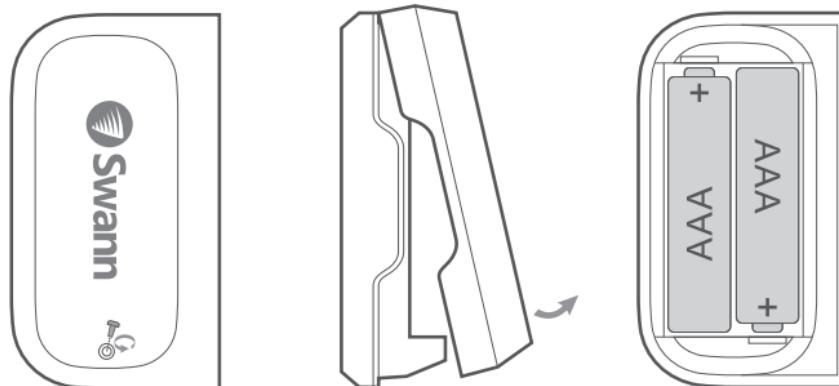

DOWNLOAD THE SWANN SECURITY APP

- 1 Download the latest version of the Swann Security  app from the Apple App Store® or Google Play™ Store on your iOS or Android device. Simply search for "Swann Security".
- 2 Open the app and create your Swann Security account by tapping "Not yet registered? Sign Up" at the bottom of the screen. Then, activate your Swann Security account by confirming the verification email that is sent to the registered email address.

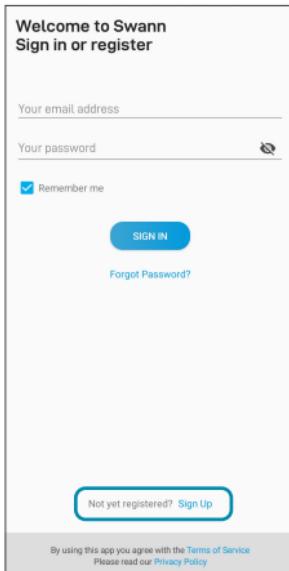

Welcome to Swann
Sign in or register

Your email address

Your password


Remember me

SIGN IN

[Forgot Password?](#)

[Not yet registered? Sign Up](#)

By using this app you agree with the [Terms of Service](#)
Please read our [Privacy Policy](#)

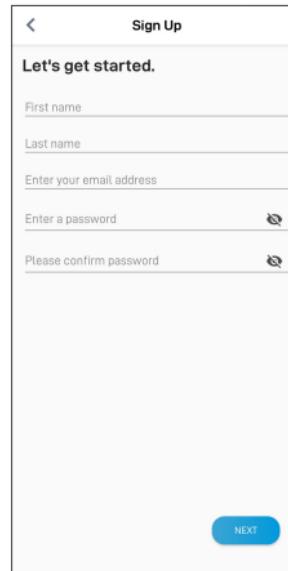

Sign Up

Let's get started.

First name

Last name

Enter your email address

Enter a password




Please confirm password

NEXT

SET UP THE SENSOR

Open the Swann Security app and tap the **Pair Device** button on the screen. If you have already paired a device, tap the menu icon  in the top left and select “Pair Device”. The app will now guide you through the pairing process and set up your sensor.

Before you begin, have the sensor with you and be close to your router. Please note that the sensor can connect to a 2.4GHz Wi-Fi network only.

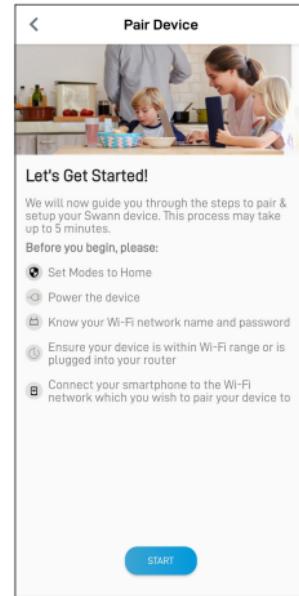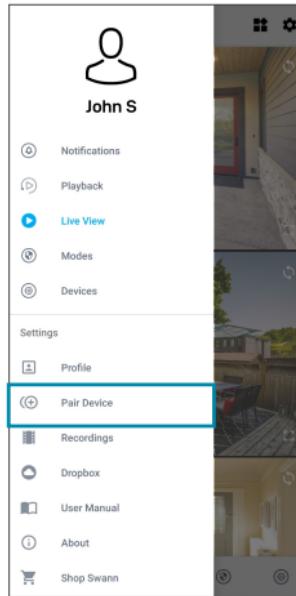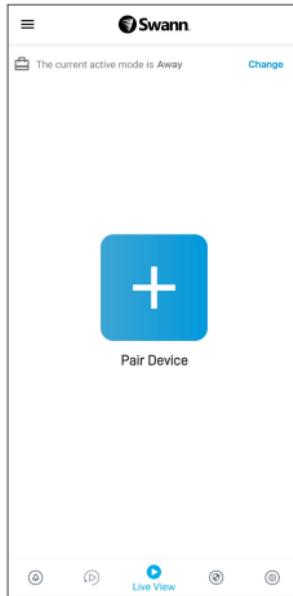


Mounting the Sensor

Take the time to choose a location and properly check the orientation of the sensor and the magnet. The sensor and magnet should ideally be positioned in a way that when the window or door is closed, they are aligned side by side, less than 10mm (3/8") apart. See Mounting Examples on the next page.

Also, make sure the sensor location has strong, reliable Wi-Fi reception available so you can get timely alerts. As a general rule, the nearer your sensor is to your Wi-Fi router, the better the wireless connection quality. You can expand the Wi-Fi coverage of your current network by installing a Wi-Fi range extender.

- 1 For reliable bonding, clean the surface where the sensor and magnet will be mounted with an alcohol/cleaning wipe, and let dry.
- 2 Fit the sensor and the magnet with appropriate double-sided tapes.
- 3 Select a location on the window/door. Attach the sensor to the window/door frame and the magnet to the window/door. Make sure the sensor cover will be accessible in the final position (in case of battery replacement/re-pairing).
- 4 Press firmly onto surface for 60 seconds each to secure.
- 5 To test the sensor, simply open the window/door. The app will send you a push notification, for example, **"Contact sensor has been opened on Front Door"**. Close the window/door. The app will send you another notification, for example, **"Contact sensor has been closed on Front Door"**. The sensor tile will also automatically update its status in the app, as shown on the right.


Note: You can use the Modes feature in the app to configure whether or not to receive "Opened" and "Closed" push notifications when the sensor is in Home, Away or Night mode.




HELP AND RESOURCES

Mounting Examples


Door installation

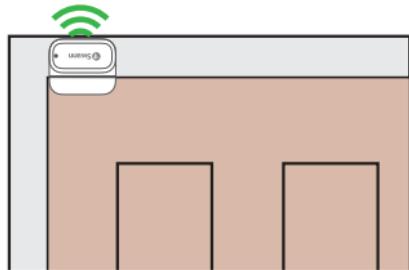

Window installation



Cabinet installation

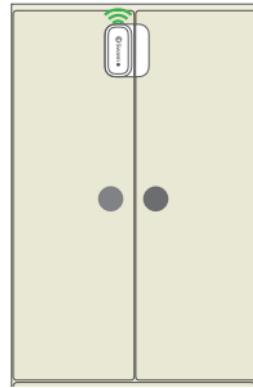

Status Light Guide

The status light on the sensor tells you what is happening with the device connection. When the sensor is functioning normally, the status light will be off (unless it is out of battery/unpaired).

Slow Blinking Blue	Pairing mode	Solid Blue (5 seconds)	Change in Open/Closed state. Connecting to Wi-Fi.
--------------------	--------------	------------------------	---

Sensor Battery Level

You can check the battery level of the sensor in the app: **Devices tab > Sensor > Battery %**

Swann Security App Manual

Access the Swann Security app manual (**Menu ⚙ > User Manual**) at any time to learn more about navigating through the various screens and functions in the app.

FCC STATEMENT

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna • Increase the separation between the equipment and the receiver • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected • Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement Caution: To maintain compliance with the FCC's RF exposure guidelines, place the product at least 20cm from nearby persons.

IC Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RECYCLING

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.

BATTERY SAFETY INFORMATION Replace batteries at the same time. Do not mix new and old batteries or battery types (for example, alkaline and lithium batteries). Keep batteries out of reach of children. Dispose of used batteries promptly in accordance with local regulations. | **INFORMACIÓN DE SEGURIDAD DE LA BATERÍA** Sustituya las baterías al mismo tiempo. No mezcle baterías nuevas y usadas ni tipos de baterías (por ejemplo, baterías alcalinas y de litio). Mantenga las baterías fuera del alcance de los niños. Deseche las baterías usadas correctamente de acuerdo con las reglamentaciones locales. |

INFORMATIONS SUR LA SÉCURITÉ DE LA PILE Remplacez les piles en même temps. Ne mélangez pas des piles ou types de piles neuves et anciennes (par exemple, des piles alcalines et au lithium). Gardez les piles hors de portée des enfants. Débarrassez-vous rapidement des piles usagées conformément aux réglementations locales. | **INFORMAZIONI DI SICUREZZA DELLA BATTERIA** Sostituire contemporaneamente le batterie. Non usare insieme batterie nuove e vecchie o batteri di diverso tipo (ad esempio, batterie alcaline e al litio). Tenere le batterie fuori dalla portata dei bambini. Smaltire correttamente le batterie usate nel rispetto delle norme locali. | **SICHERHEITSHINWEISE ZU BATTERIEN** Ersetzen Sie die Batterien gleichzeitig. Mischen Sie niemals neue und alte Batterien oder Batterietypen (z.B. Alkali- und Lithiumbatterien). Batterien von Kindern fernhalten. Entsorgen Sie verbrauchte Batterien sofort gemäß den örtlichen Bestimmungen.

HAVE QUESTIONS?

We're here to help! Visit our Support Center at support.swann.com
You can also email us at any time via: tech@swann.com

FCC&IC RF Radiation Exposure Statement Caution: To maintain compliance with the FCC&IC RF exposure guidelines, place the product at least 20cm from nearby persons.

