

FCC 15.247 & RSS-247 2.4GHz Test Report

for

Ethereal Home Theater, LLC
460 Walker St, Holly Hill, FL 32117, United States

**Product Name : 7 OUTLET VERTICAL
SMART POWER**
Model Name : PR-V7PI
Brand : BIG DOG POWER
FCC ID : 2A47N-PRV7PI
IC : 27941-PRV7PI

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

TABLE OF CONTENTS

Description	Page
TEST REPORT	4
1. REVISION RECORD OF TEST REPORT	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of Application	7
3.2. Description of EUT	8
3.3. Antenna Information	9
3.4. EUT Specifications Assessed in Current Report	9
3.5. Descriptions of Key Components	9
3.6. Test Configuration	10
3.7. Output Power Setting	12
3.8. Tested Supporting System List	13
3.9. Setup Configuration	14
3.10. Operating Condition of EUT	14
3.11. Description of Test Facility	15
3.12. Measurement Uncertainty	16
4. MEASUREMENT EQUIPMENT LIST	17
4.1. Conducted Emission Measurement	17
4.2. Radiated Emission Measurement	18
4.3. RF Conducted Measurement	18
5. CONDUCTED EMISSION	19
5.1. Block Diagram of Test Setup	19
5.2. Conducted Emission Limit	19
5.3. Test Procedure	19
5.4. Test Results	19
6. RADIATED EMISSION	20
6.1. Block Diagram of Test Setup	20
6.2. Radiated Emission Limits	21
6.3. Test Procedure	22
6.4. Measurement Result Explanation	23
6.5. Test Results	23
7. DTS/OCCUPIED BANDWIDTH	24
7.1. Block Diagram of Test Setup	24
7.2. Specification Limits	24
7.3. Test Procedure	24
7.4. Test Results	24
8. MAXIMUM PEAK OUTPUT POWER	25
8.1. Block Diagram of Test Setup	25
8.2. Specification Limits	25
8.3. Test Procedure	26
8.4. Test Results	26
9. EMISSION LIMITATIONS	27
9.1. Block Diagram of Test Setup	27



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

9.2. Specification Limits	27
9.3. Test Procedure	27
9.4. Test Results	28
10. POWER SPECTRAL DENSITY	29
10.1. Block Diagram of Test Setup	29
10.2. Specification Limits	29
10.3. Test Procedure	29
10.4. Test Results	29
11. DEVIATION TO TEST SPECIFICATIONS	30

APPENDIX A TEST DATA AND PLOTS

APPENDIX B TEST PHOTOGRAPHS

TEST REPORT

Applicant : Ethereal Home Theater, LLC
EUT Description
(1) Product : 7 OUTLET VERTICAL SMART POWER
(2) Model : PR-V7PI
(3) Brand : BIG DOG POWER
(4) Power Supply: AC 120V, 60Hz

Applicable Standards:


Title 47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 5), Amendment 2, February 2021
RSS-247 (Issue 2), February 2017
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.


Date of Report: 2022. 03. 14

Reviewed by:



(Annie Yu/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2022. 03. 14	Original Report	EM-F220112

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	PASS
15.247(d)/ 15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	PASS (Note*)
15.247(a)(2)	RSS-247 §5.2(1)	DTS/Occupied Bandwidth	PASS
15.247(b)(3)	RSS-247 §5.4(4)	Maximum Peak Output Power	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	RSS-247 §5.2(2)	Peak Power Spectral Density	PASS
15.203	---	Antenna Requirement	Compliance
Note: The uncertainties value is not used in determining the result. (*)According to ANSI C63.10-2013 5.10.7, we evaluated that EUT connect with at least one external accessories of each type of port at full load.			

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Ethereal Home Theater, LLC 460 Walker St, Holly Hill, FL 32117, United States
Product	7 OUTLET VERTICAL SMART POWER
Model	PR-V7PI
Brand	BIG DOG POWER

3.2. Description of EUT

Test Model	PR-V7PI		
Serial Number	N/A		
Power Rating	AC 120V, 60Hz		
RF Features	WLAN:802.11b/g/n		
Transmit Type	802.11b	1T1R	
	802.11g	1T1R	
	802.11n-HT20	1T1R	
	802.11n-HT40	1T1R	
Test Sample	Sample No.	Test Item	Firmware
	02	AC Conduction, RSE, Conducted Tests	N/A
Sample Status	Trial sample		
Date of Receipt	2022. 01. 25		
Date of Test	2022. 02. 18 ~ 03. 07		
Interface Ports of EUT	• Ethernet port x1 • UPS port x1 • Antenna port x1 • Grounding port x1 • USB port x1 • AC Inlet x1 • AC Outlet x7		
Accessories Supplied	• AC Adapter (3C)		

3.3. Antenna Information

No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain(dBi)
1.	Q0211	Shenzhen, science and technology co., LTD	Dipole	2400~2483.5	2.0

3.4. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
802.11b	2412-2472	13	DSSS (DBPSK/DQPSK/CCK)	Up to 11
802.11g		13	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20				Up to 72.2
802.11n-HT40	2422-2462	11	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 150

Channel List			
802.11 b/g/n-HT20		802.11n-HT40	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	10	2457
9	2452	11	2462
10	2457	---	
11	2462		
12	2467		
13	2472		

3.5. Descriptions of Key Components

Item	Supplier	Model / Type	Character
WiFi Module	Espressif Systems (Shanghai) Co.,Ltd	ESP32-WROOM-32U	FCC ID: 2AC7Z-ESP32WROOM32U IC: 21098-ESPWROOM32U

3.6. Test Configuration

Mode	TX _{on} (ms)	1/ TX _{on} (kHz)	Duty Cycle (x)	Duty Cycle Factor [10log(1/x)] (dB)
802.11b	1.000	1.000	1.000	N/A
802.11g	1.000	1.000	1.000	N/A
802.11n-HT20	1.000	1.000	1.000	N/A
802.11n-HT40	1.000	1.000	1.000	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor 10log(1/x) is needed to add in conducted test items measured in average detector.

Mode	TX _{on} (ms)	T _{on} +T _{off} (ms)
802.11b		---
802.11g		---
802.11n-HT20		---
802.11n-HT40		---

AC Conduction
Normal operation

Item	Mode	Data Rate	Test Channel
Radiated Test Case	Radiated Band Edge Note1	802.11b	1Mbps
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0
	Radiated Spurious Emission Note1 & 2	802.11b	7
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0
Conducted Test Case	DTS/occupied Bandwidth	802.11b	1Mbps
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0
	Peak Output Power	802.11b	1Mbps
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0
	Band Edge	802.11b	1Mbps
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0
	Spurious Emission	802.11b	1Mbps
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0
	Peak Power Spectral Density	802.11b	1Mbps
		802.11g	6Mbps
		802.11n-HT20	MCS0
		802.11n-HT40	MCS0

Note 1: ☒ Mobile Device

☐ Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: ☐ Lie ☐ Side ☐ Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

3.7. Output Power Setting

Mode	Centre Frequency (MHz)	Power Setting	Mode	Centre Frequency (MHz)	Power Setting
802.11b	2412	26	802.11g	2412	18
	2417	2		2417	4
	2442	0		2442	5
	2462	0		2457	5
	2467	0		2462	10
	2472	10		2467	9
				2472	69

Mode	Centre Frequency (MHz)	Power Setting	Mode	Centre Frequency (MHz)	Power Setting
802.11n-HT20	2412	17	802.11n-HT40	2422	7
	2417	4		2427	0
	2442	4		2442	0
	2457	4		2447	0
	2462	10		2452	9
	2467	10		2457	10
	2472	69		2462	60

3.8. Tested Supporting System List

3.8.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1	Mobile Phone	ASUS	ASUS_Z01FD	N/A	N/A
2.	Notebook Computer #1	hp	TPN-Q189	5CD8175992	Contains FCC ID: PD93168NG Contains IC: 1000M-3168NG
3.	Notebook Computer #2	HP	P7Q52PA	N/A	FCC ID: PD98260NG
4.	Lamp Load #1 (100W*6)	N/A	N/A	N/A	N/A
5.	Lamp Load #2 (200W*4)	N/A	N/A	N/A	N/A
6.	JIG	N/A	N/A	N/A	N/A
Partner System					
7.	AP Server	ASUS	RT-AX88U	N/A	FCC ID: MSQ-RTAXHP00 IC: 3568A-RTAXHP00

3.8.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	USB Cable: Shielded, Detachable, 1.0m
2.	Adapter: hp, M/N PPP-012C-S, DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.0m
3.	Adapter: HP, M/N HSTNN-CA40, DC Cord: Shielded, Undetachable, 1.8m, Bonded a ferrite core AC Power Cord: Unshielded, Detachable, 1.8m
4.	AC Power Cord: Unshielded, Detachable, 1.0m
5.	AC Power Cord*4: Unshielded, Detachable, 2.0m
6.	USB Cable: Shielded, Detachable, 1.5m
7.	AC Power Cord: Unshielded, Detachable, 1.8m LAN Cable: Unshielded, Detachable, 3.0m
8.	LAN Cable: Unshielded, Detachable, 3.0m

3.9. Setup Configuration

3.9.1. EUT Configuration for Power Line & Radiated Emission

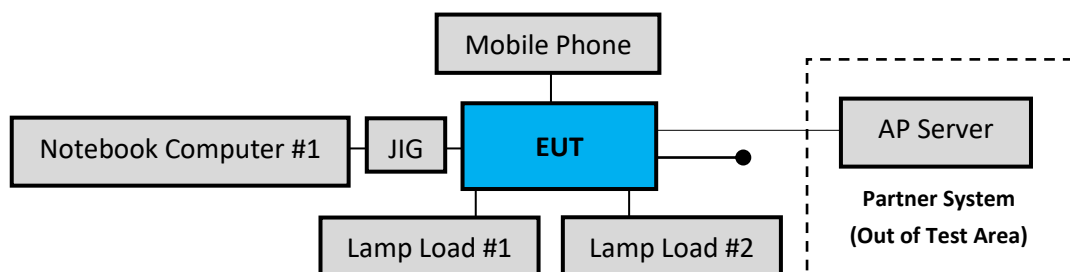

3.9.2. EUT Configuration for RF Conducted Test Items



3.10. Operating Condition of EUT

The JIG which is the interface be used to connect between EUT and notebook computer for enable EUT test mode under test program "EspRFtest Tool_v2.8_Mauanl.exe".

3.11. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 491, Zhongfu Rd., Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.7 Shielded Room (2) No.1 3m Semi Anechoic Chamber

3.12.Measurement Uncertainty

Test Items/Facilities			Frequency Range	Uncertainty
Conduction Test			9kHz-150kHz	±3.7dB
			150kHz-30MHz	±3.4dB
Radiation Test	☒	No.1 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.8dB
			200MHz-1000MHz, 3m, Horizontal	±4.1dB
			30MHz-200MHz, 3m, Vertical	±4.5dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
			1GHz-6GHz, 3m	±4.7dB
			6GHz-18GHz, 3m	±4.1dB
			18GHz-40GHz, 3m	±3.52dB
	☐	No.3 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±3.9dB
			200MHz-1000MHz, 3m, Horizontal	±4.2dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.5dB
	☐	No.4 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.1dB
			200MHz-1000MHz, 3m, Horizontal	±4.5dB
			30MHz-200MHz, 3m, Vertical	±4.4dB
			200MHz-1000MHz, 3m, Vertical	±4.8dB
			1GHz-6GHz, 3m	±5.0dB
			6GHz-18GHz, 3m	±4.7dB
	☐	No.5 3m Semi Anechoic Chamber	30MHz-200MHz, 3m, Horizontal	±4.2dB
			200MHz-1000MHz, 3m, Horizontal	±4.3dB
			30MHz-200MHz, 3m, Vertical	±4.3dB
			200MHz-1000MHz, 3m, Vertical	±4.7dB
			1GHz-6GHz, 3m	±4.8dB
			6GHz-18GHz, 3m	±4.5dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESCI	101276	2022.02.21	1 Year
2.	A.M.N.	R&S	ESH2-Z5	100366	2021.06.29	1 Year
3.	Pulse Limiter	R&S	ESH3-Z2	101495	2021.12.23	1 Year
4.	Digital Thermo-Hygro Meter	iMax	HTC-1	No.7 S/R	2021.04.15	1 Year
5.	Coaxial Cable	Thermax/CDT	RG-142	CE-07	2021.05.17	1 Year
6.	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2021.09.09	1 Year
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2021.04.14	1 Year
3.	Test Receiver	R&S	ESCS30	100338	2021.06.17	1 Year
4.	Amplifier	HP	8447D	2944A06305	2022.01.15	1 Year
5.	Microwave Amplifier	Keysight	83051A	MY53010042	2021.07.30	1 Year
6.	Microwave Preamplifier	HP	8449B	3008A01284	2021.05.19	1 Year
7.	Bilog Antenna	TESEQ	CBL6112D	33821	2021.07.16	1 Year
8.	Horn Antenna	EMCO	3115	9112-3775	2021.05.12	1 Year
9.	Horn Antenna	COM-POWER	AH-840	101092	2022.01.06	1 Year
10.	2.4GHz Notch Filter	K&L Microwave	7NSL10-2441.5/E130.5-O/O	2	2021.07.24	1 Year
11.	3GHz Notch Filter	Microwave	H3G018G1	484796	2021.07.24	1 Year
12.	Coaxial Cable	MIYAZAKI	5D2W	RE-11	2022.01.20	1 Year
13.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 106	RE-14	2022.01.20	1 Year
14.	Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	RE-30	2021.08.25	1 Year
15	Digital Thermo-Hygro Meter	iMax	HTC-1	No.1 3m A/C	2021.04.15	1 Year
16	Test Software	Audix	e3	V6.120619c	N.C.R.	N.C.R.

4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Keysight	N9030B	MY61330403	2021.12.21	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2021.06.30	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2021.06.30	1 Year
4.	Digital Thermo-Hygro Meter	iMax	HTC-1	RF-03	2021.04.15	1 Year


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.9

5.1.2. Shielded Room Setup Diagram

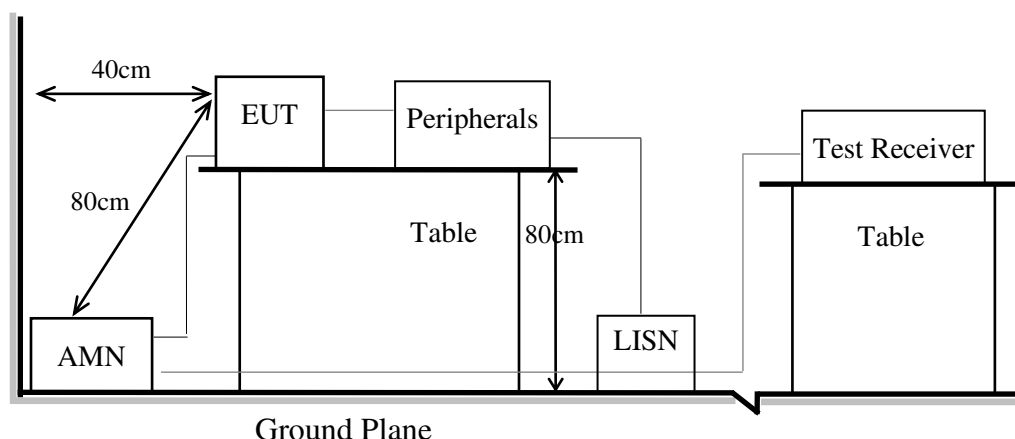

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.9


6.1.2. Setup Diagram for 9kHz-30MHz

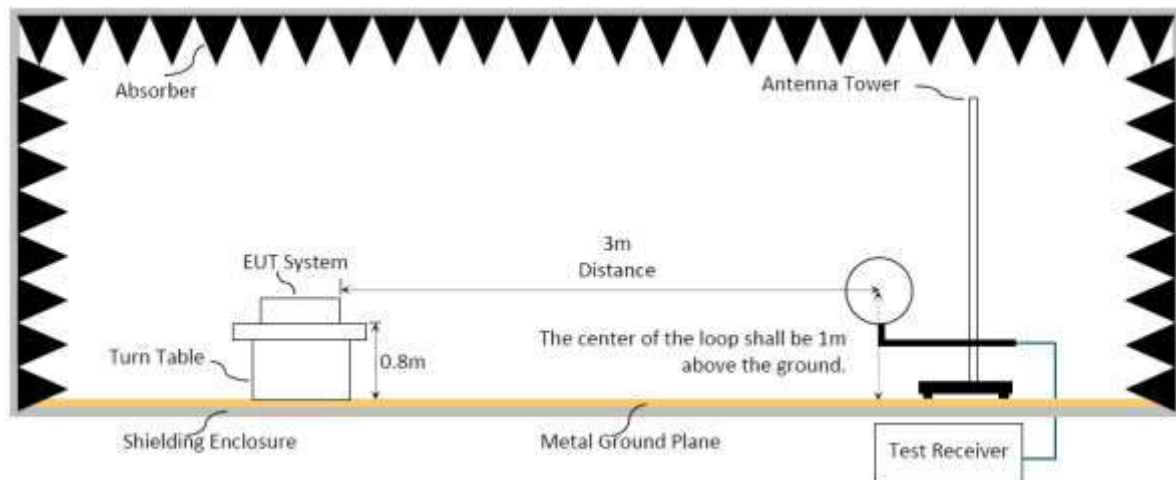

6.1.3. Setup Diagram for 30-1000MHz

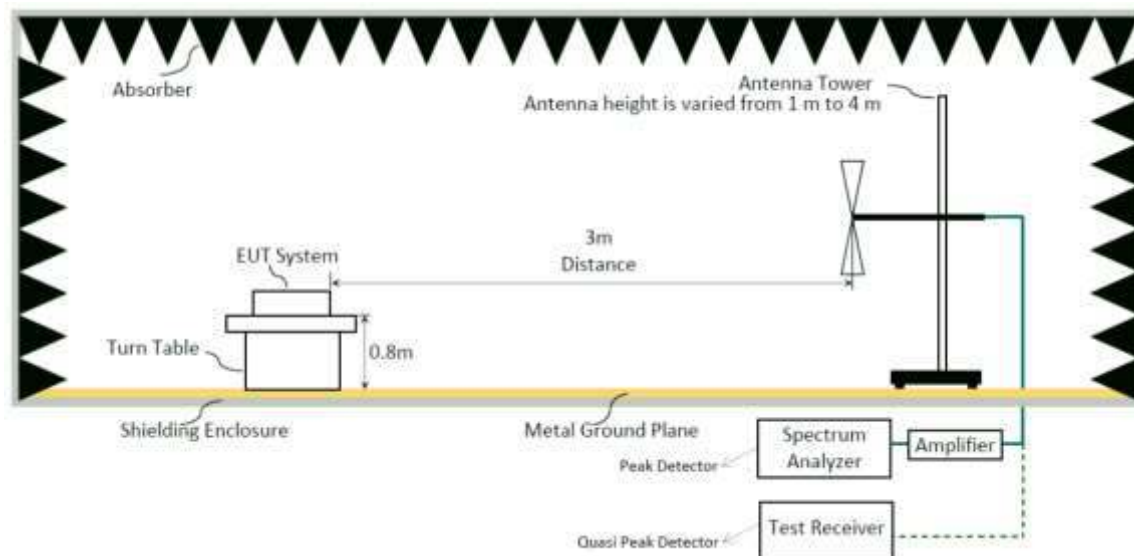

6.1.4. Setup Diagram for above 1GHz

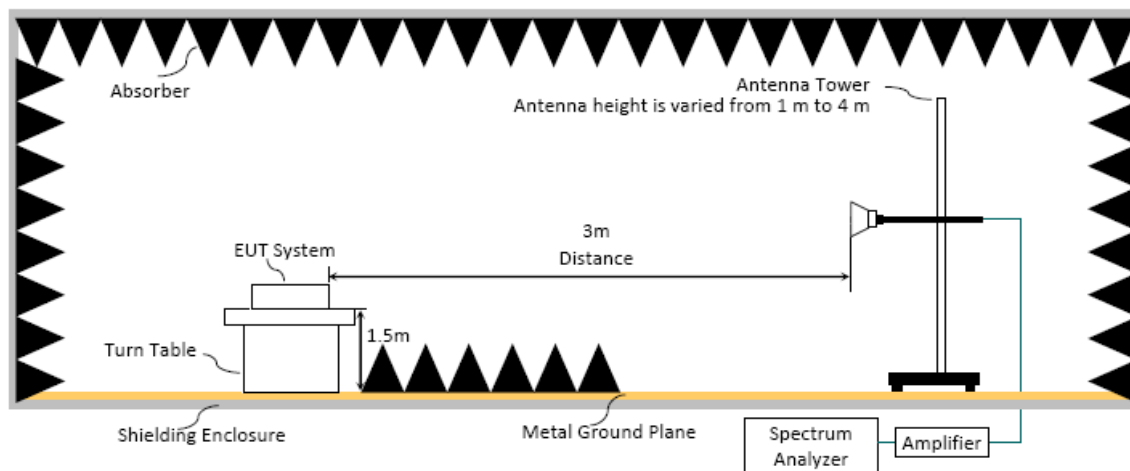

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance(m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:**■ Option 1:**

(1) RBW = 1MHz

(2) VBW $\geq$ 1/ T.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting(Hz)
802.11b	1.000	1.000	10Hz
802.11g	1.000	1.000	10Hz
802.11n-HT20	1.000	1.000	10Hz
802.11n-HT40	1.000	1.000	10Hz

N/A: 1/ T is not implemented when duty cycle presented in section 3.6 is $\geq$ 98%.

(1) Detector = Peak.

(2) Sweep time = auto.

(3) Trace mode = max hold.

(4) Allow sweeps to continue until the trace stabilizes.

□ Option 2:


Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation**■** Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)**■** Average Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)**□** Average Emission Level = Peak Emission Level + DCCFDuty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.6**□** ERP = Peak Emission Level - 95.2dB - 2.14dB**6.5. Test Results**

Please refer to Appendix A.

7. DTS/OCCUPIED BANDWIDTH

7.1. Block Diagram of Test Setup

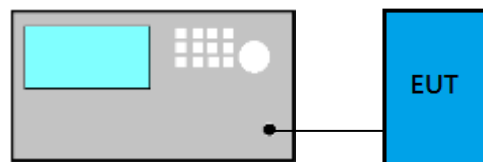

7.2. Specification Limits

The minimum bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

For DTS Bandwidth

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x to -6dB power to record the final bandwidth..

For 99% Occupied Bandwidth


- (1) Set Span range 1.5~5 times the OBW
- (2) Set RBW close to 1% to 5% of OBW.
- (3) Set $\text{VBW} \geq 3 \times \text{RBW}$.
- (4) Detector = Peak.
- (5) Trace mode = Max hold
- (6) Sweep = Auto couple.
- (7) Allow the trace to stabilize.

7.4. Test Results

Please refer to Appendix A

8. MAXIMUM PEAK OUTPUT POWER

8.1. Block Diagram of Test Setup

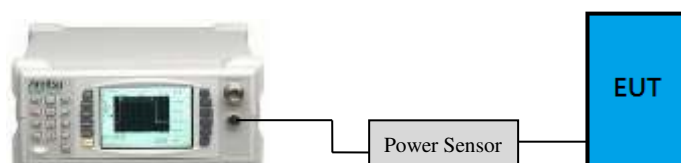

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm), and E.I.R.P.: 4Watt (36dBm)

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

☒ **PKPM1 Peak power meter method:**

EUT is connected to power sensor and record the maximum output power.

☐ **Maximum peak conducted output power method:**

- (1) Set the RBW $\geq$ DTS bandwidth
- (2) Set VBW $\geq 3 \times$ RBW
- (3) Set span $\geq 3 \times$ RBW.
- (4) Sweep time = auto couple
- (5) Detector = peak.
- (6) Trace mode = max hold.
- (7) Allow trace to fully stabilize.
- (8) Use peak marker function to determine the peak amplitude level.

☒ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

☐ **Method AVGSA-2 (Spectrum channel power)**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 -5% of OBW
- (3) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is $< 98\%$.

8.4. Test Results

Please refer to Appendix A

9. EMISSION LIMITATIONS

9.1. Block Diagram of Test Setup

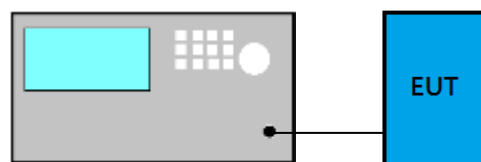

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Reference Level

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.

9.4. Test Results

Please refer to Appendix A

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

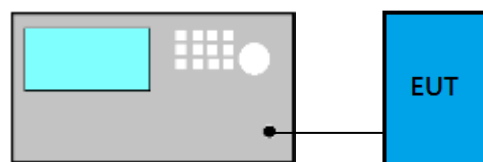

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

■ Method PKPSD (peak PSD)

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

□ Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector = RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.7 < 98%.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Please refer to Appendix A



11.DEVIATION TO TEST SPECIFICATIONS

【NONE】



Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

APPENDIX A

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX A

TEST DATA AND PLOTS

(Model: PR-V7PI)

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION.....	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	49
A.2.3 Emissions in Non-restricted Frequency Bands:.....	51
A.3 DTS/OCCUPIED BANDWIDTH.....	52
A.3.1 Emission Bandwidth Result.....	52
A.3.2 Measurement Plots	53
A.4 MAXIMUM PEAK OUTPUT POWER	57
A.4.1 Peak Output Power	57
A.4.2 Average Output Power (Reporting only).....	59
A.5 EMISSION LIMITATIONS	61
A.6 POWER SPECTRAL DENSITY	77
A.6.1 Power Spectral Density Result	77
A.6.2 Measurement Plots	78

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2022/03/04	Temp./Hum.	26°C/61%
Test Voltage	AC 120V/60Hz	Tested By	Nick Du

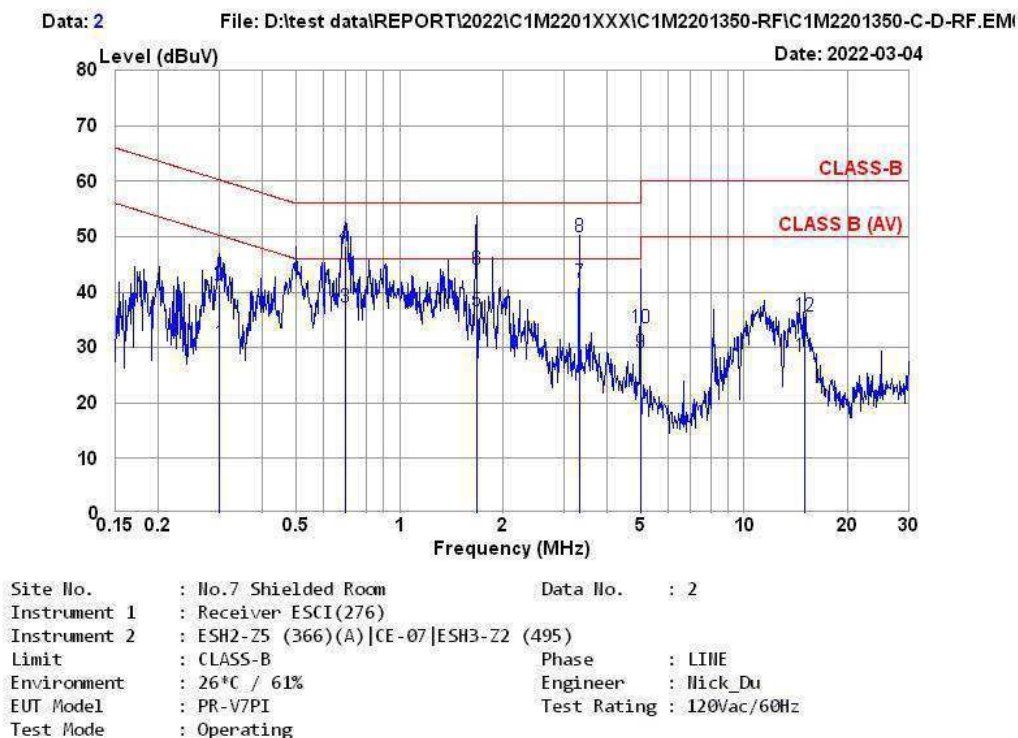


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.300	0.13	0.03	9.85	20.74	30.75	50.24	19.49	Average
2	0.300	0.13	0.03	9.85	31.34	41.35	60.24	18.89	QP
3	0.697	0.15	0.04	9.86	27.21	37.26	46.00	8.74	Average
4	0.697	0.15	0.04	9.86	38.18	48.23	56.00	7.77	QP
5	1.671	0.18	0.05	9.86	26.43	36.52	46.00	9.48	Average
6	1.671	0.18	0.05	9.86	34.00	44.09	56.00	11.91	QP
7	3.328	0.22	0.08	9.86	31.65	41.81	46.00	4.19	Average
8	3.328	0.22	0.08	9.86	39.72	49.88	56.00	6.12	QP
9	5.005	0.25	0.10	9.87	18.90	29.12	50.00	20.88	Average
10	5.005	0.25	0.10	9.87	23.45	33.67	60.00	26.33	QP
11	14.986	0.47	0.18	9.91	17.94	28.50	50.00	21.50	Average
12	14.986	0.47	0.18	9.91	25.21	35.77	60.00	24.23	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/03/04	Temp./Hum.	26°C/61%
Test Voltage	AC 120V/60Hz	Tested By	Nick Du

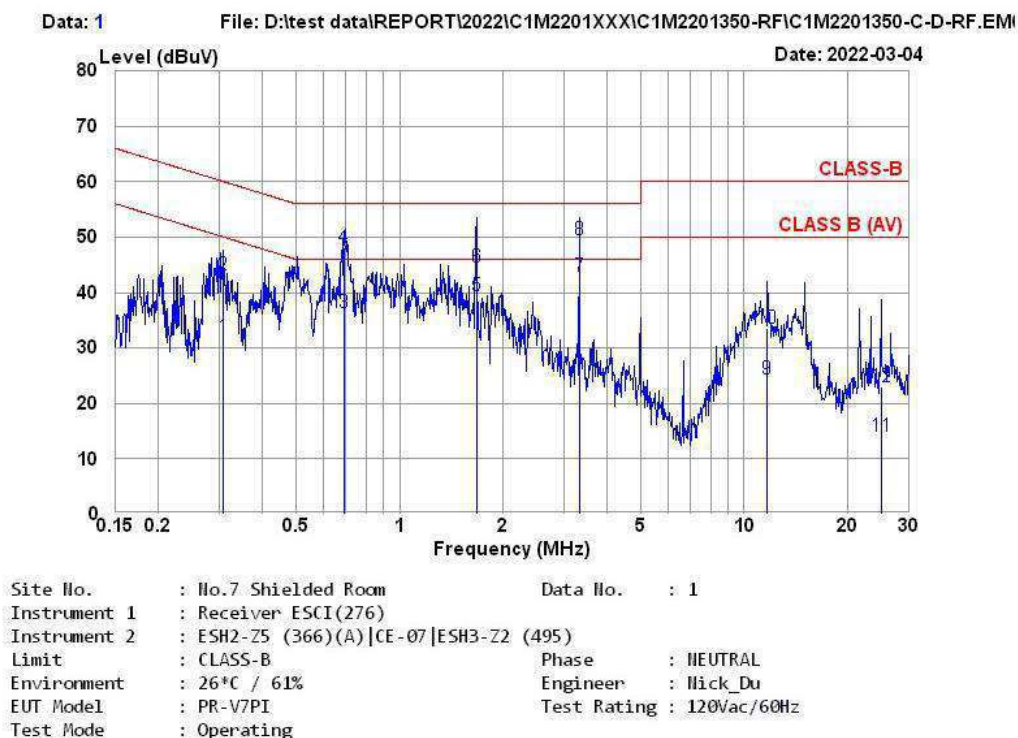

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.308	0.17	0.03	9.85	21.86	31.91	50.02	18.11	Average
2	0.308	0.17	0.03	9.85	33.05	43.10	60.02	16.92	QP
3	0.690	0.19	0.04	9.86	26.31	36.40	46.00	9.60	Average
4	0.690	0.19	0.04	9.86	38.11	48.20	56.00	7.80	QP
5	1.671	0.22	0.05	9.86	29.32	39.45	46.00	6.55	Average
6	1.671	0.22	0.05	9.86	34.57	44.70	56.00	11.30	QP
7	3.328	0.27	0.08	9.86	32.80	43.01	46.00	2.99	Average
8	3.328	0.27	0.08	9.86	39.38	49.59	56.00	6.41	QP
9	11.683	0.47	0.16	9.90	13.77	24.30	50.00	25.70	Average
10	11.683	0.47	0.16	9.90	22.96	33.49	60.00	26.51	QP
11	24.922	0.72	0.24	9.97	3.14	14.07	50.00	35.93	Average
12	24.922	0.72	0.24	9.97	12.02	22.95	60.00	37.05	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/03/02 ~ 03	Temp./Hum.	20 ~ 21°C/55 ~ 66%
Test Voltage	AC 120V/60Hz	Tested By	Martin Chen

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
40.670	18.57	1.65	26.47	39.55	33.30	40.00	6.70	Peak
108.570	17.19	2.72	26.23	41.44	35.12	43.50	8.38	Peak
199.750	15.10	3.70	25.79	45.25	38.26	43.50	5.24	Peak
421.880	21.81	6.13	26.59	39.33	40.68	46.00	5.32	Peak
766.230	25.57	8.02	27.33	30.77	37.03	46.00	8.97	Peak
979.630	26.96	9.18	26.72	28.09	37.51	54.00	16.49	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
38.730	19.62	1.61	26.47	44.06	38.82	40.00	1.18	Peak
69.770	12.16	2.17	26.38	49.53	37.48	40.00	2.52	Peak
199.750	15.10	3.70	25.79	42.03	35.04	43.50	8.46	Peak
474.260	22.70	6.56	26.98	37.33	39.61	46.00	6.39	Peak
640.130	24.51	7.33	27.41	32.65	37.08	46.00	8.92	Peak
974.780	26.94	9.17	26.72	28.43	37.82	54.00	16.18	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

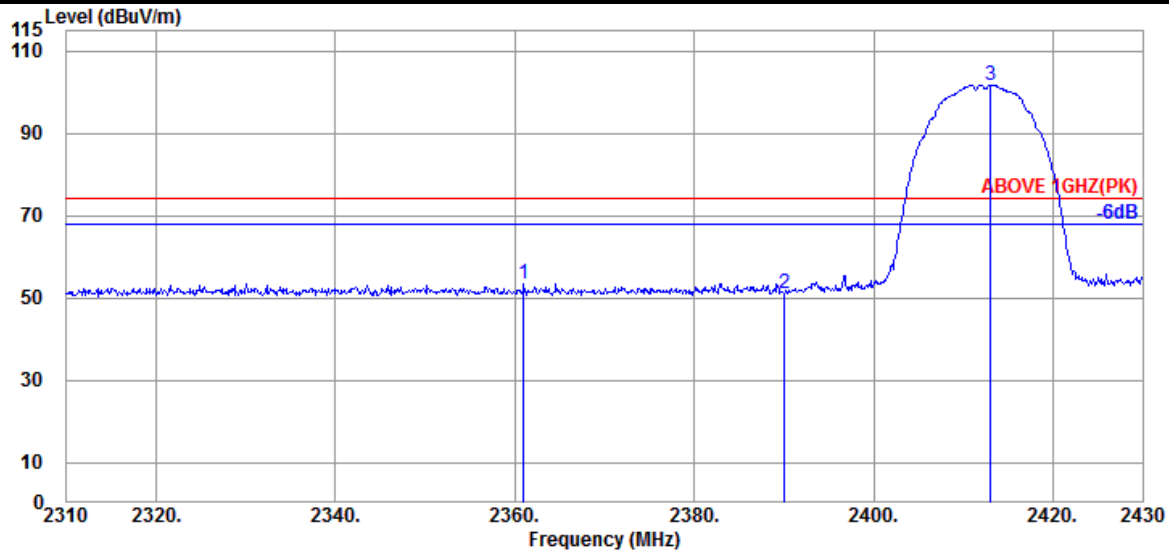

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2361.000	28.20	5.67	39.96	59.47	53.38	74.00	20.62	Peak
2390.040	28.20	5.72	39.95	57.13	51.10	74.00	22.90	Peak
@ 2413.080	28.26	5.76	39.95	107.73	101.80	---	---	Peak

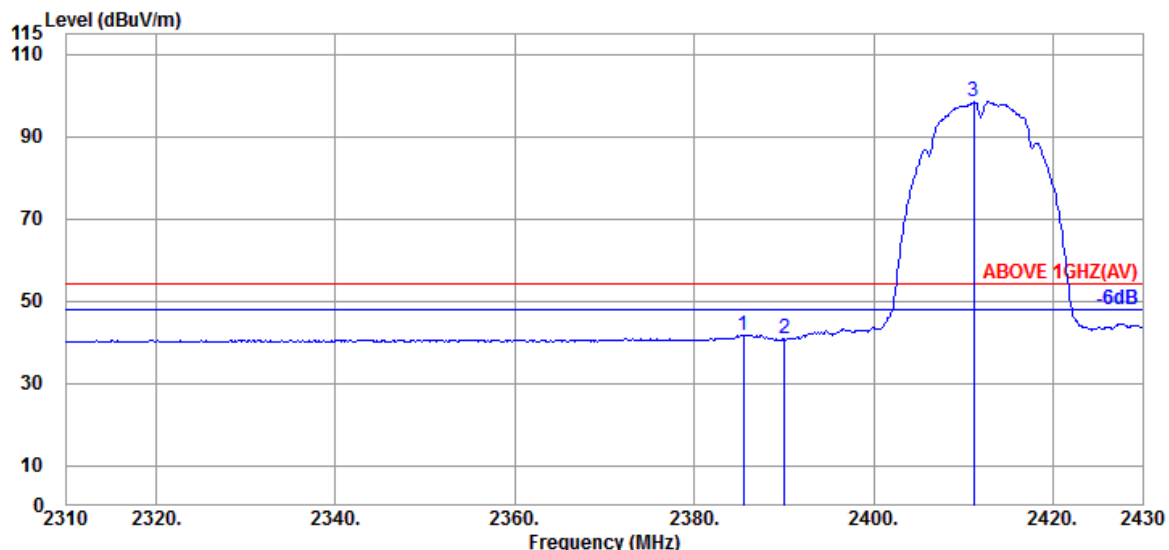

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.480	28.20	5.72	39.96	47.65	41.61	54.00	12.39	Average
2390.040	28.20	5.72	39.95	46.80	40.77	54.00	13.23	Average
@ 2411.160	28.23	5.75	39.95	104.39	98.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201350


Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

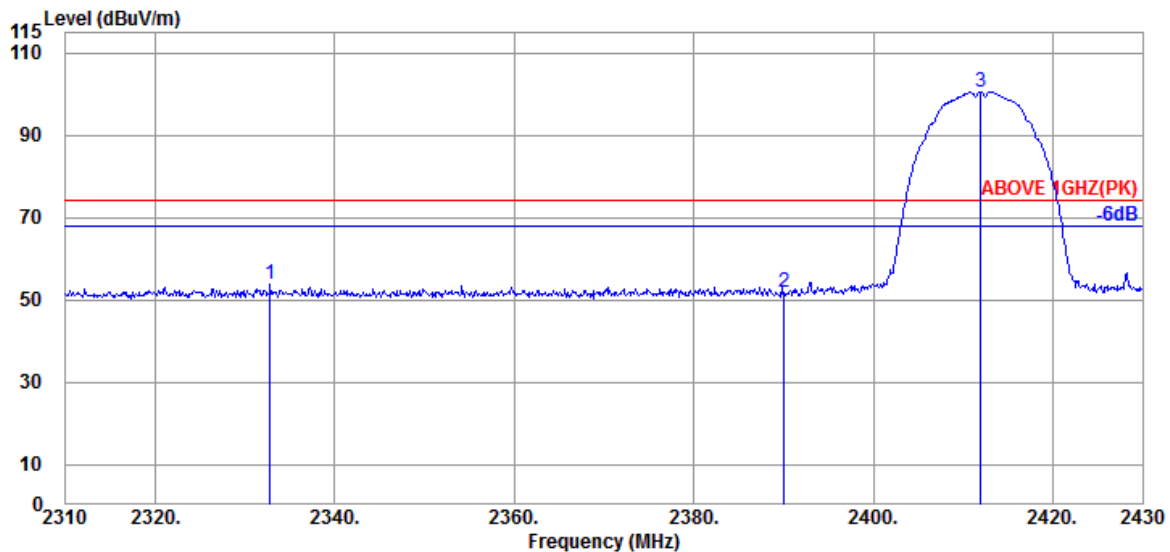

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2332.800	28.09	5.63	39.96	59.98	53.74	74.00	20.26	Peak
2390.040	28.20	5.72	39.95	57.77	51.74	74.00	22.26	Peak
@ 2412.000	28.26	5.76	39.95	106.43	100.50	---	---	Peak

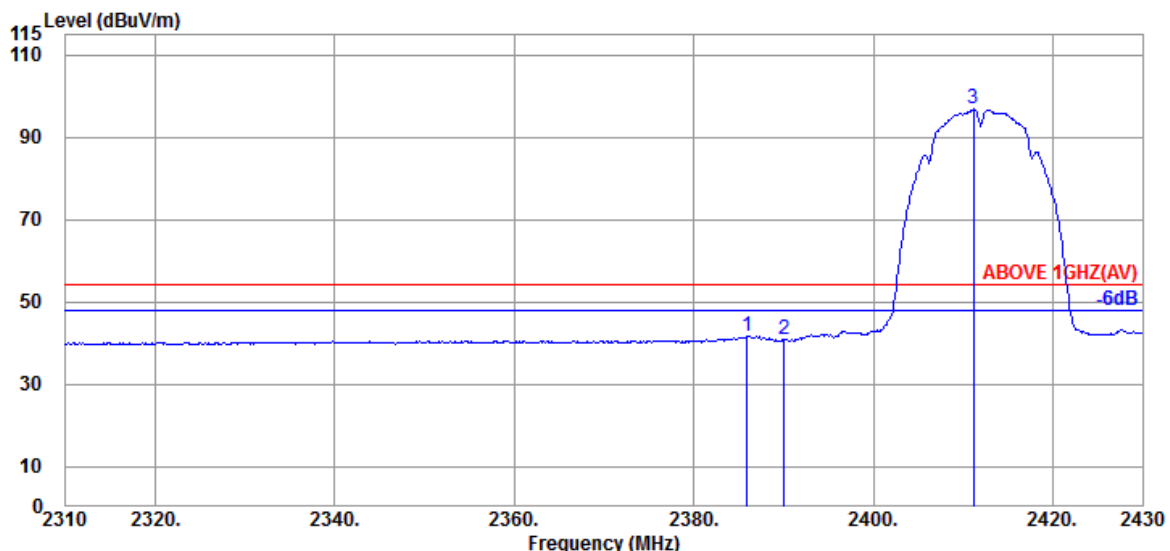

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2385.960	28.20	5.72	39.96	47.81	41.77	54.00	12.23	Average
2390.040	28.20	5.72	39.95	46.68	40.65	54.00	13.35	Average
@ 2411.160	28.23	5.75	39.95	102.76	96.79	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

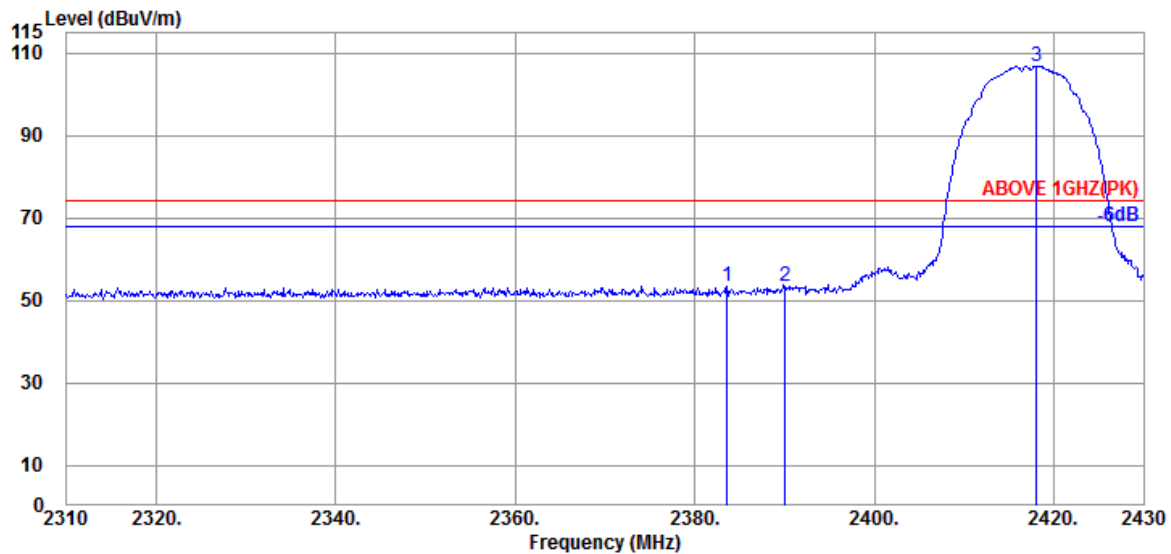

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.560	28.20	5.72	39.96	59.41	53.37	74.00	20.63	Peak
2390.040	28.20	5.72	39.95	59.39	53.36	74.00	20.64	Peak
@ 2418.120	28.26	5.76	39.95	112.87	106.94	---	---	Peak

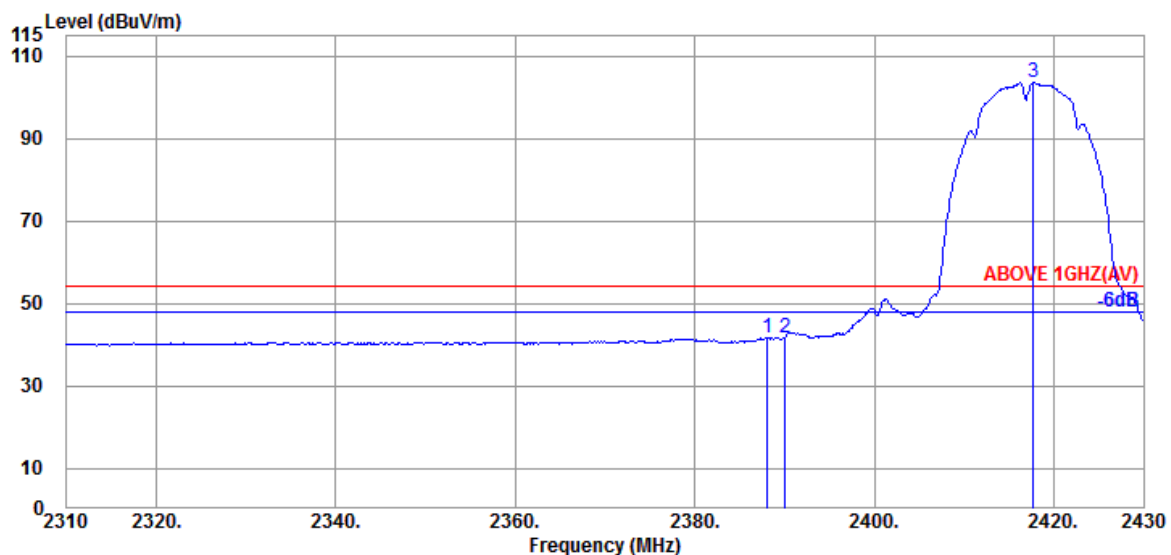

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.120	28.20	5.72	39.95	47.80	41.77	54.00	12.23	Average
2390.040	28.20	5.72	39.95	47.82	41.79	54.00	12.21	Average
@ 2417.760	28.26	5.76	39.95	109.51	103.58	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

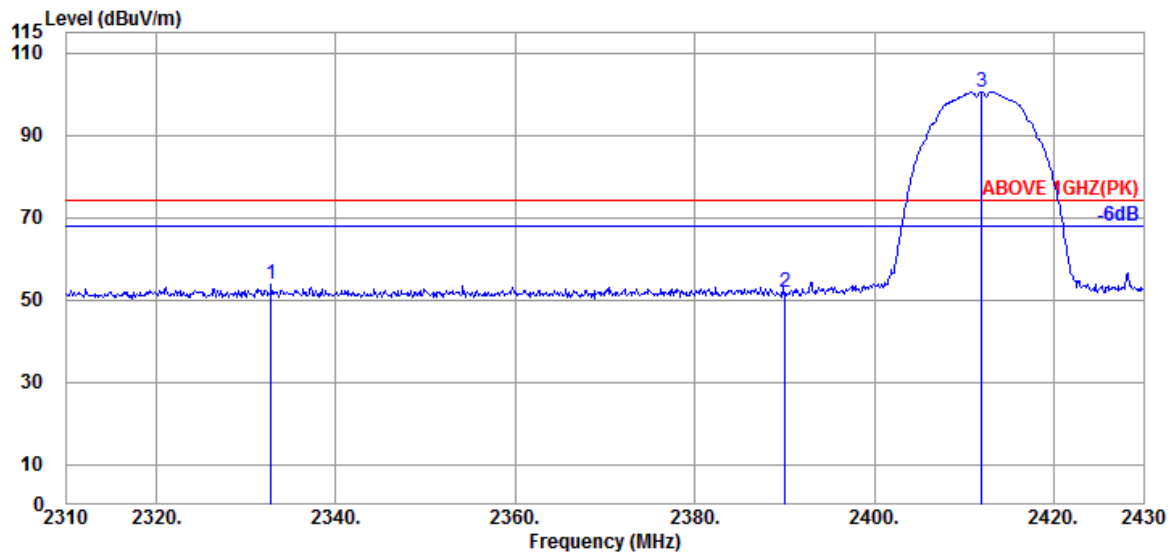

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2368.800	28.20	5.69	39.96	59.49	53.42	74.00	20.58	Peak
2390.040	28.20	5.72	39.95	58.84	52.81	74.00	21.19	Peak
@ 2418.120	28.26	5.76	39.95	111.19	105.26	---	---	Peak

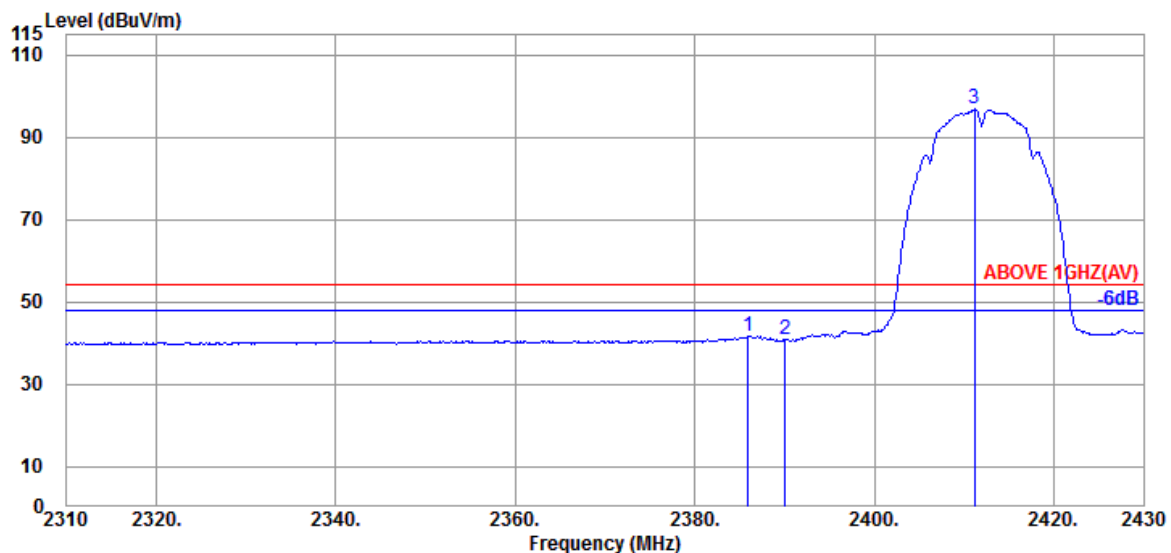


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.20	5.72	39.95	47.88	41.85	54.00	12.15	Average
2390.040	28.20	5.72	39.95	47.96	41.93	54.00	12.07	Average
@ 2416.200	28.26	5.76	39.95	107.82	101.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

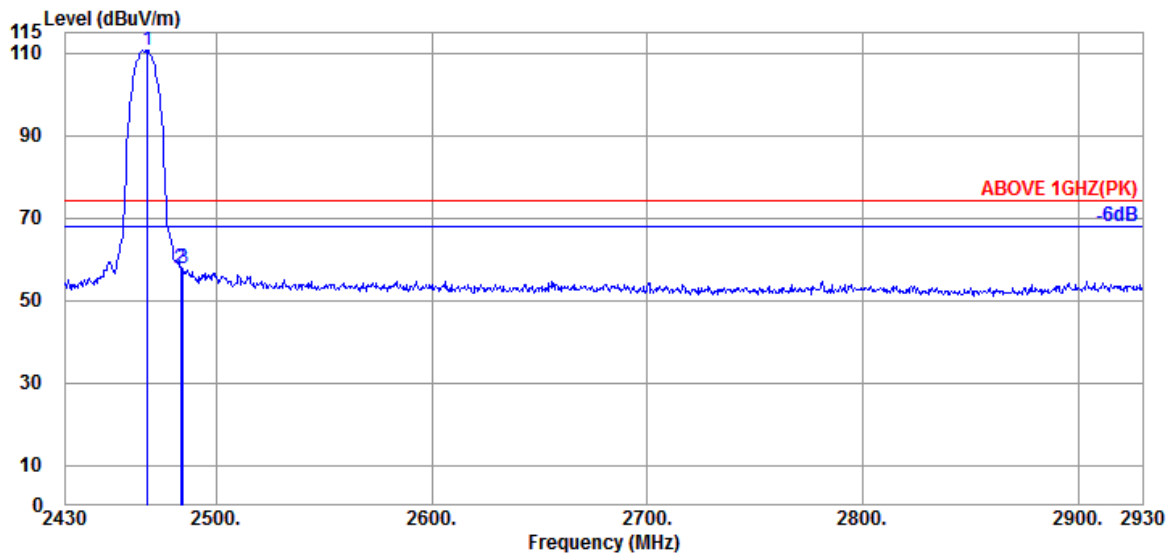

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.000	28.44	5.85	39.94	116.41	110.76	---	---	Peak
2483.500	28.47	5.87	39.94	63.40	57.80	74.00	16.20	Peak
2484.500	28.47	5.87	39.94	63.25	57.65	74.00	16.35	Peak

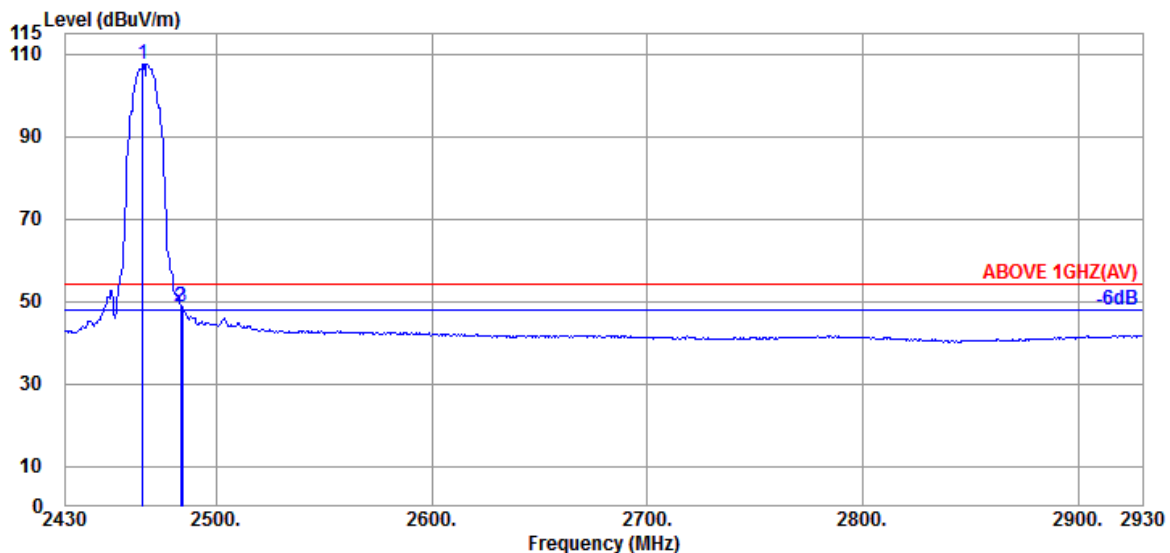

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	28.43	5.84	39.95	113.15	107.47	---	---	Average
2483.500	28.47	5.87	39.94	54.46	48.86	54.00	5.14	Average
2484.000	28.47	5.87	39.94	54.31	48.71	54.00	5.29	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

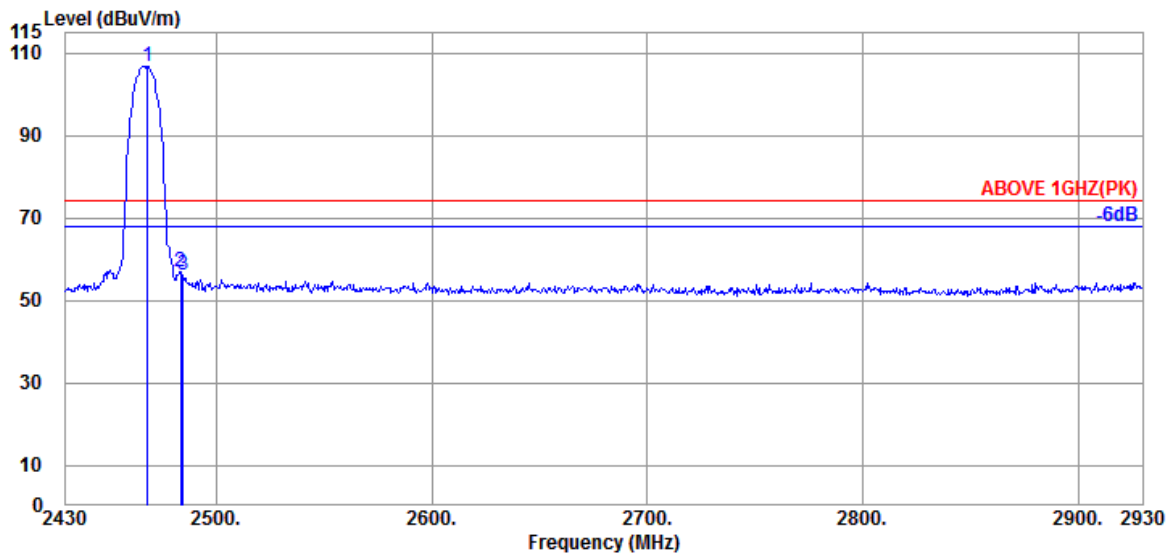

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.000	28.44	5.85	39.94	112.55	106.90	---	---	Peak
2483.500	28.47	5.87	39.94	62.65	57.05	74.00	16.95	Peak
2484.500	28.47	5.87	39.94	61.77	56.17	74.00	17.83	Peak

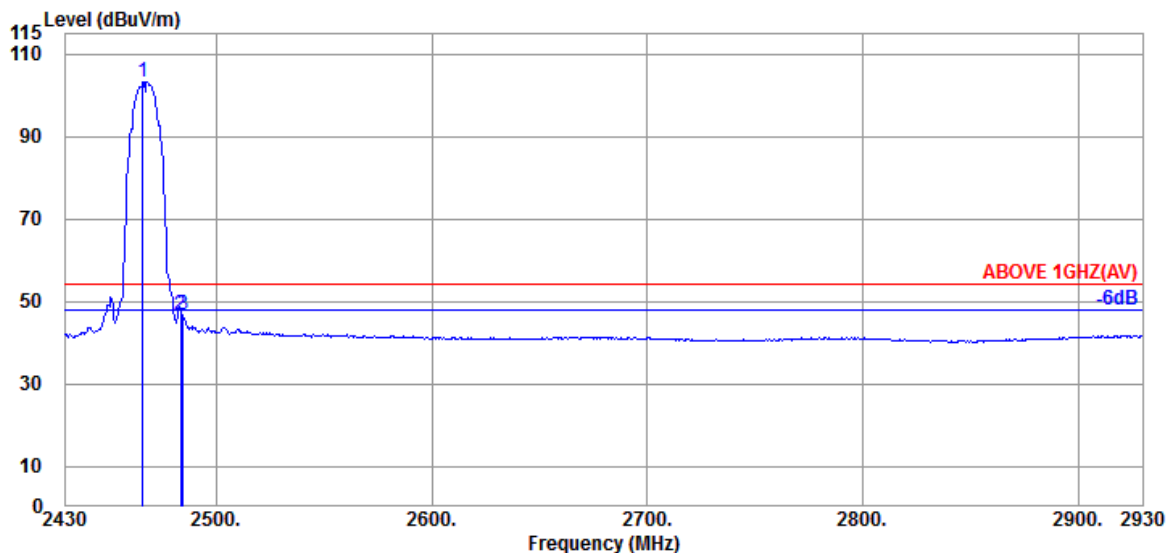

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	28.43	5.84	39.95	108.99	103.31	---	---	Average
2483.500	28.47	5.87	39.94	52.46	46.86	54.00	7.14	Average
2484.500	28.47	5.87	39.94	52.35	46.75	54.00	7.25	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

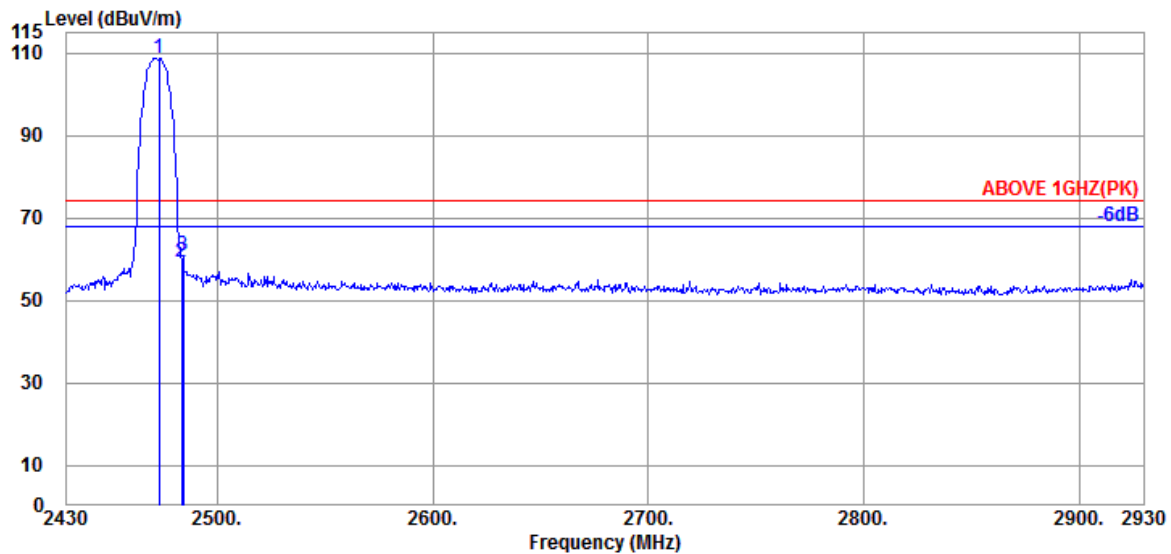

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2473.000	28.44	5.85	39.94	114.55	108.90	---	---	Peak
2483.500	28.47	5.87	39.94	64.74	59.14	74.00	14.86	Peak
2484.000	28.47	5.87	39.94	66.38	60.78	74.00	13.22	Peak

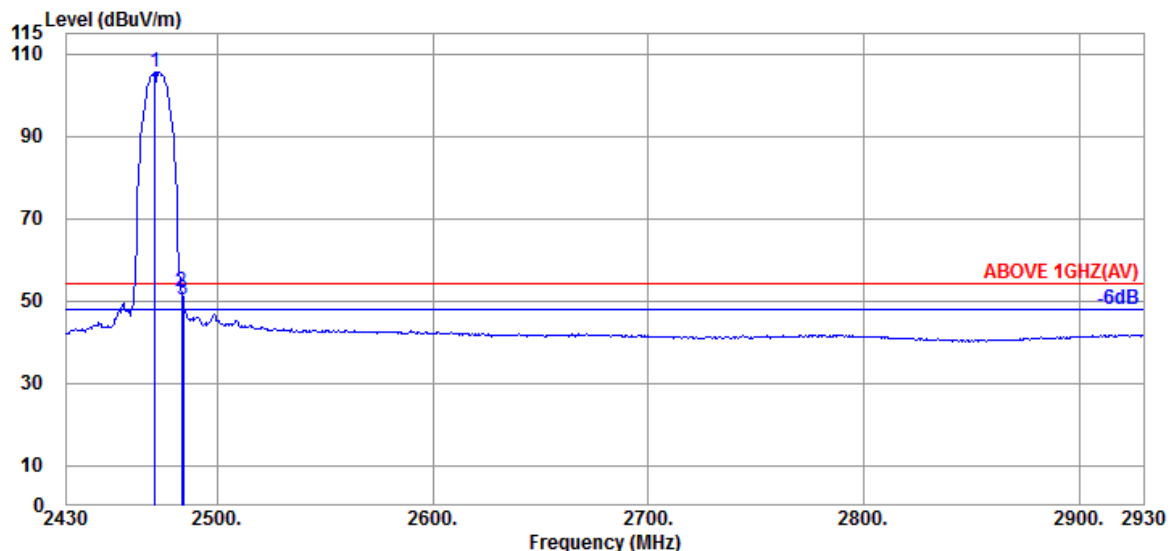

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.44	5.85	39.94	111.34	105.69	---	---	Average
2483.500	28.47	5.87	39.94	57.83	52.23	54.00	1.77	Average
2484.000	28.47	5.87	39.94	55.70	50.10	54.00	3.90	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

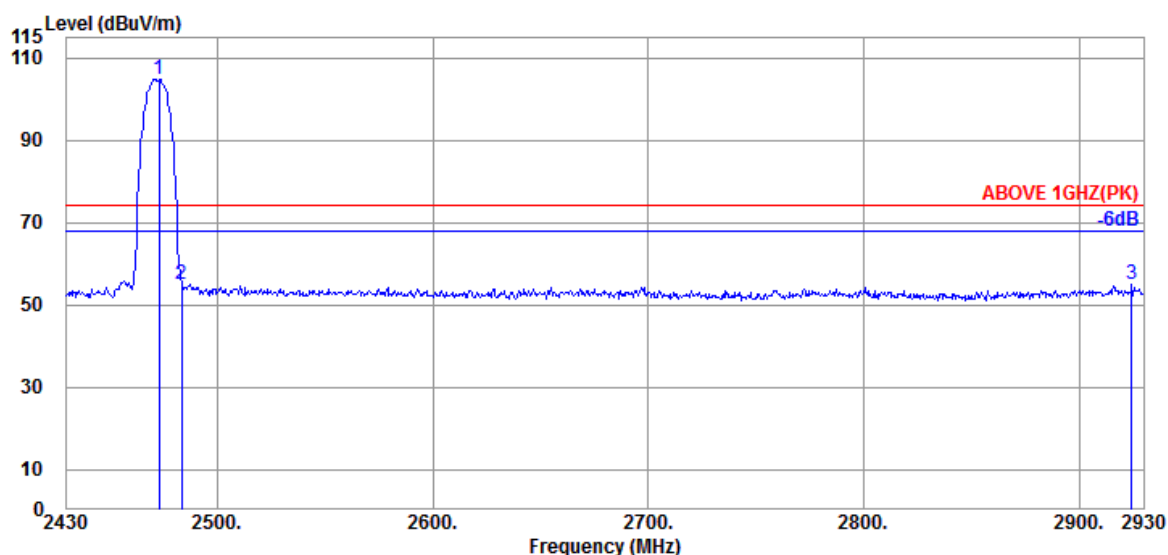

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2473.000	28.44	5.85	39.94	110.42	104.77	---	---	Peak
2483.500	28.47	5.87	39.94	60.43	54.83	74.00	19.17	Peak
2924.500	29.85	6.84	40.06	58.30	54.93	74.00	19.07	Peak

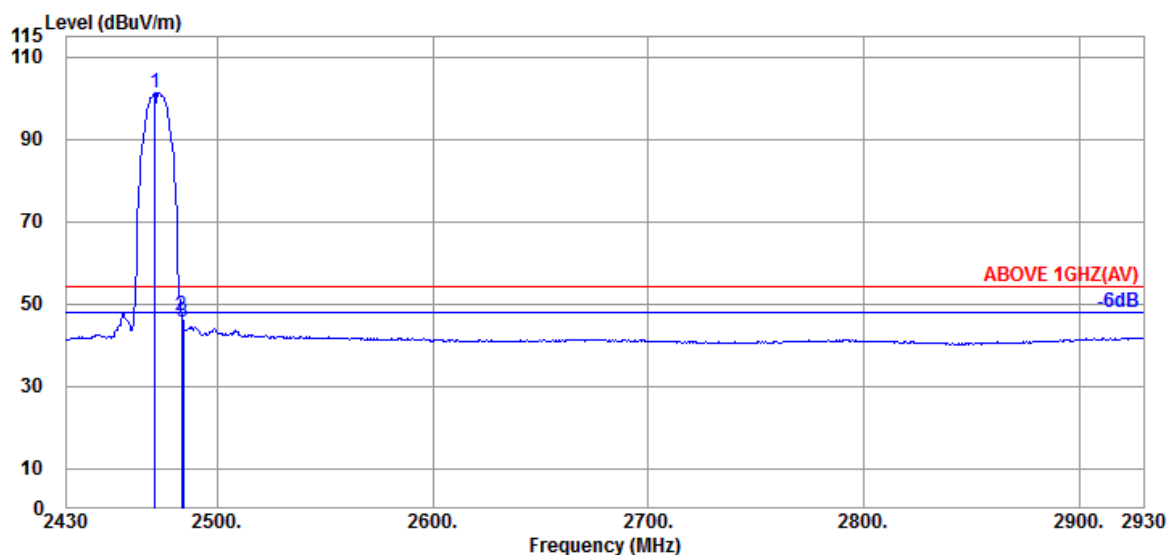


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.44	5.85	39.94	107.02	101.37	---	---	Average
2483.500	28.47	5.87	39.94	52.53	46.93	54.00	7.07	Average
2484.000	28.47	5.87	39.94	51.00	45.40	54.00	8.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

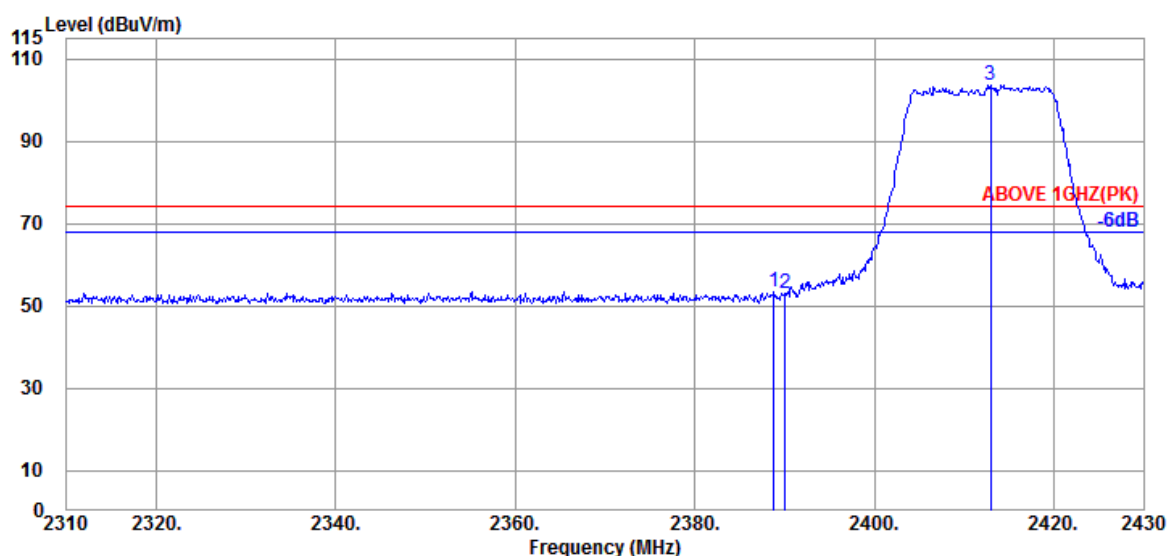

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.20	5.72	39.95	59.54	53.51	74.00	20.49	Peak
2390.040	28.20	5.72	39.95	59.08	53.05	74.00	20.95	Peak
@ 2412.960	28.26	5.76	39.95	109.52	103.59	---	---	Peak

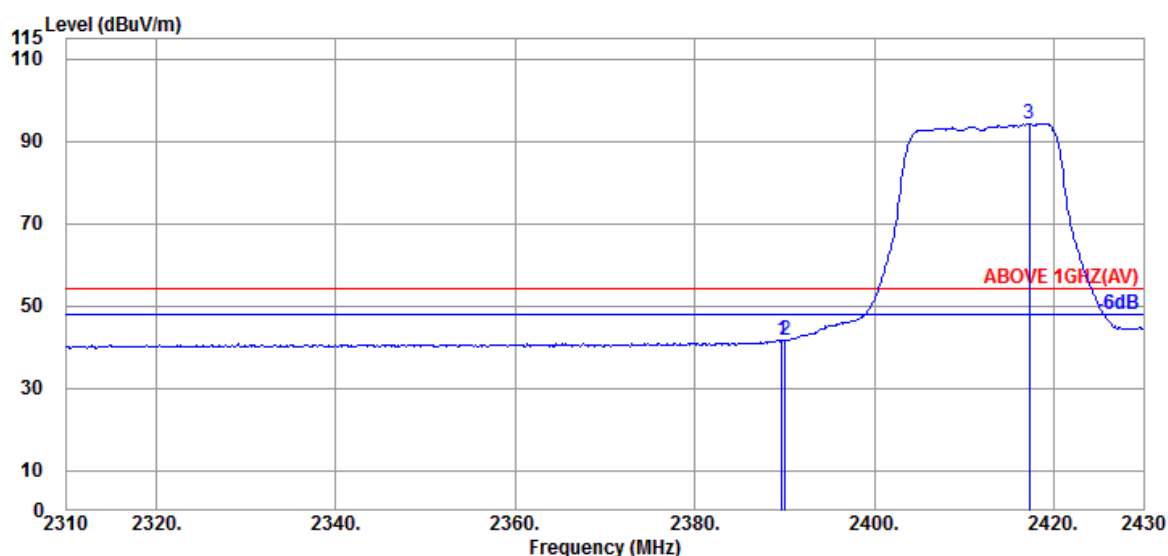


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.95	47.63	41.60	54.00	12.40	Average
2390.040	28.20	5.72	39.95	47.79	41.76	54.00	12.24	Average
@ 2417.280	28.26	5.76	39.95	100.25	94.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

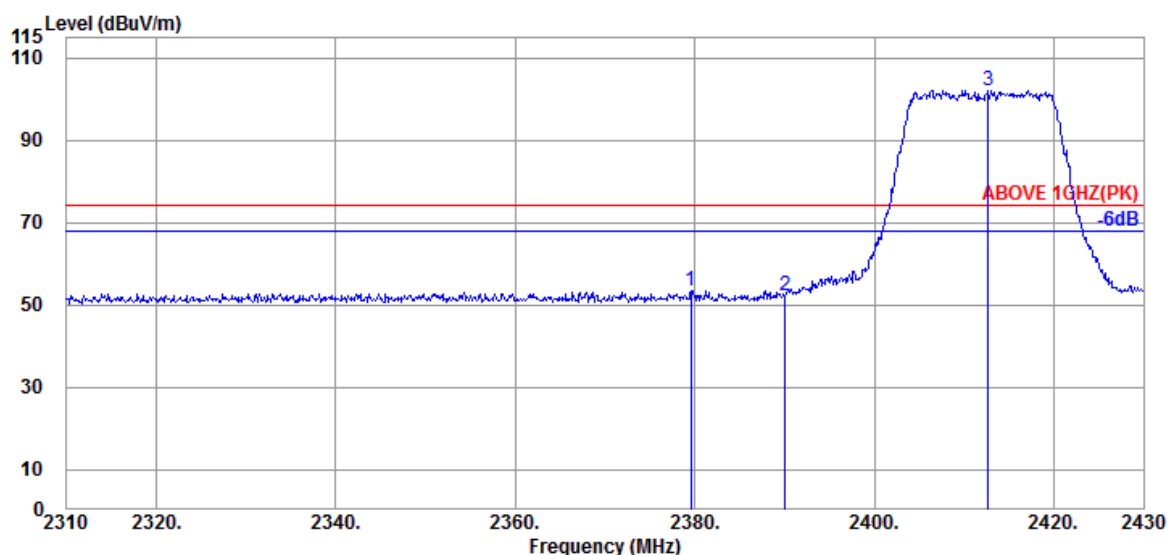

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2379.600	28.20	5.71	39.96	59.56	53.51	74.00	20.49	Peak
2390.040	28.20	5.72	39.95	58.10	52.07	74.00	21.93	Peak
@ 2412.720	28.26	5.76	39.95	108.17	102.24	---	---	Peak

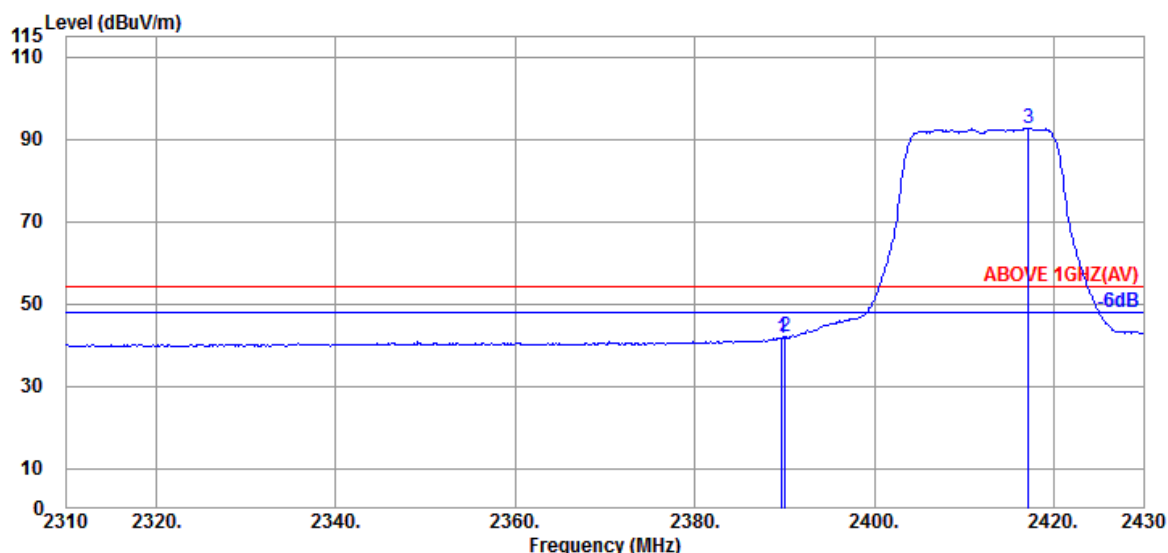


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.95	47.71	41.68	54.00	12.32	Average
2390.040	28.20	5.72	39.95	47.86	41.83	54.00	12.17	Average
@ 2417.160	28.26	5.76	39.95	98.61	92.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

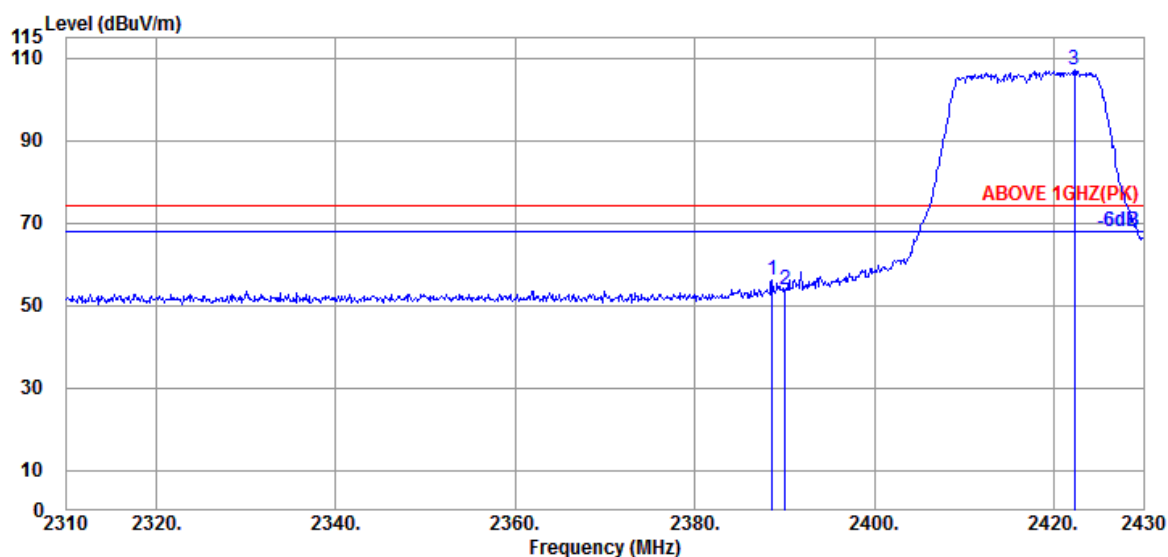

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.20	5.72	39.95	62.12	56.09	74.00	17.91	Peak
2390.040	28.20	5.72	39.95	59.76	53.73	74.00	20.27	Peak
@ 2422.320	28.29	5.77	39.95	112.85	106.96	---	---	Peak

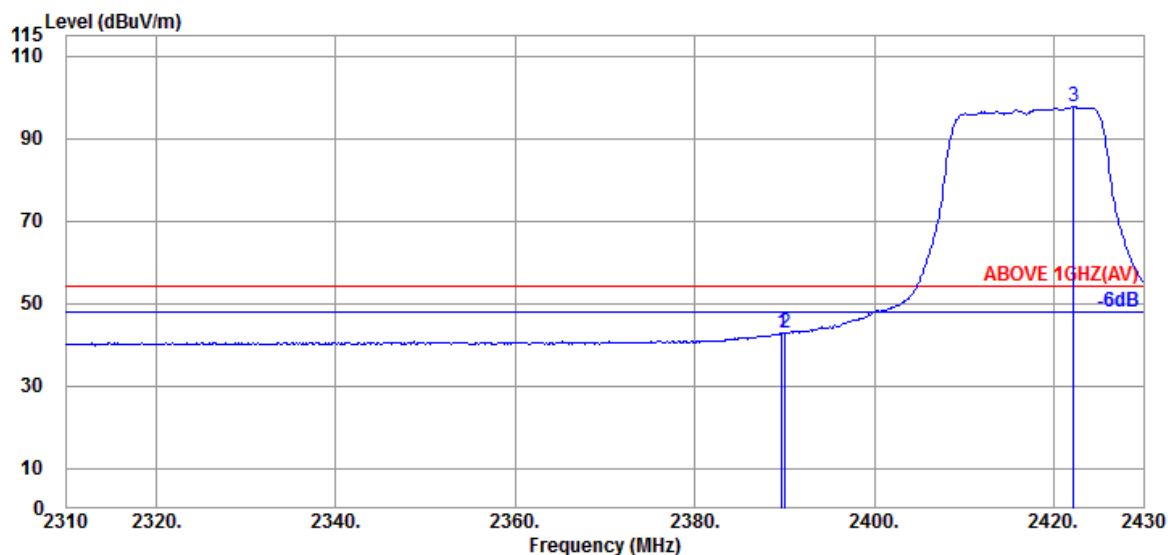

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.95	48.68	42.65	54.00	11.35	Average
2390.040	28.20	5.72	39.95	49.00	42.97	54.00	11.03	Average
@ 2422.200	28.29	5.77	39.95	103.58	97.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

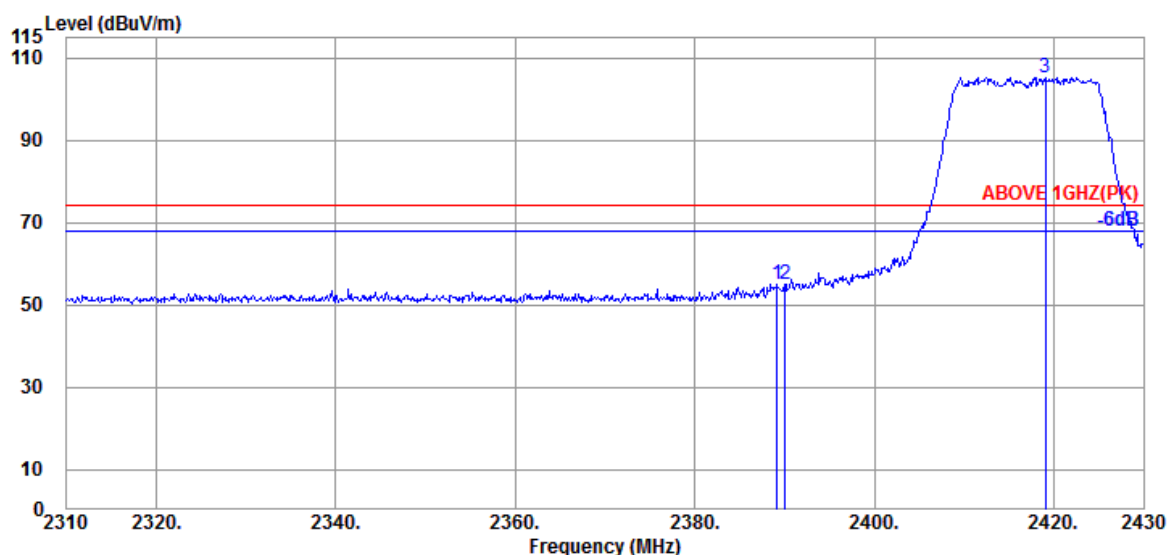

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	5.72	39.95	61.11	55.08	74.00	18.92	Peak
2390.040	28.20	5.72	39.95	60.97	54.94	74.00	19.06	Peak
@ 2419.080	28.29	5.77	39.95	111.19	105.30	---	---	Peak

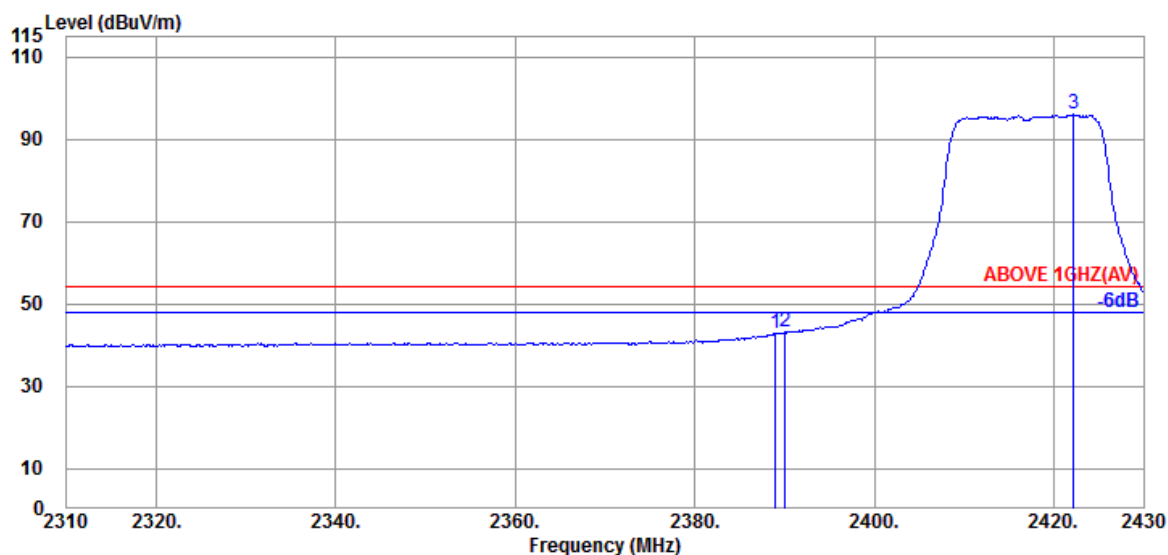

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.20	5.72	39.95	49.00	42.97	54.00	11.03	Average
2390.040	28.20	5.72	39.95	49.04	43.01	54.00	10.99	Average
@ 2422.200	28.29	5.77	39.95	101.89	96.00	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350

Report Number: EM-F220112


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

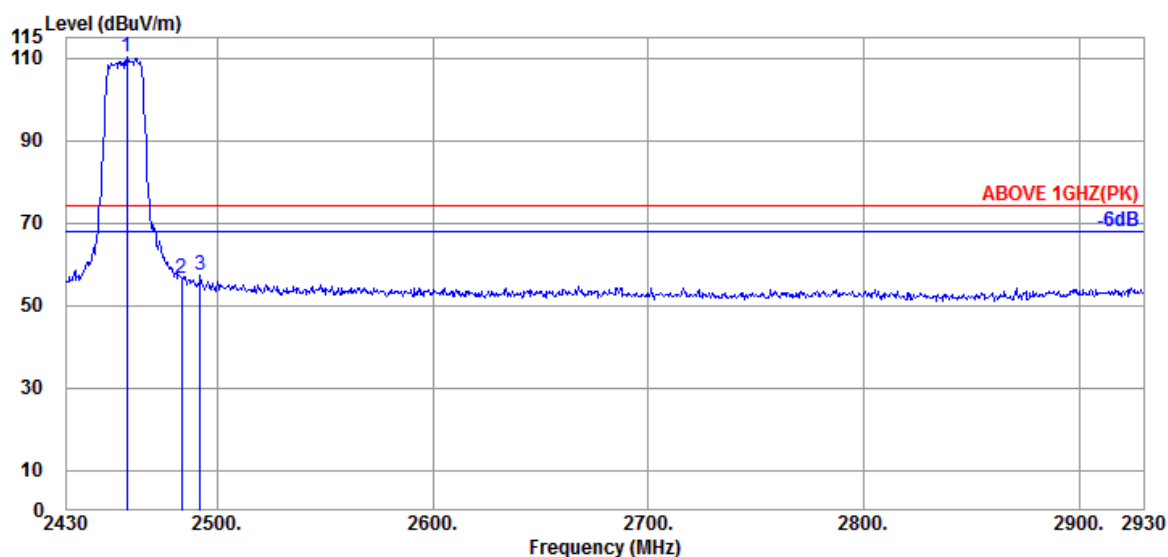

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.000	28.41	5.83	39.95	115.86	110.15	---	---	Peak
2483.500	28.47	5.87	39.94	61.99	56.39	74.00	17.61	Peak
2492.000	28.49	5.88	39.94	62.74	57.17	74.00	16.83	Peak

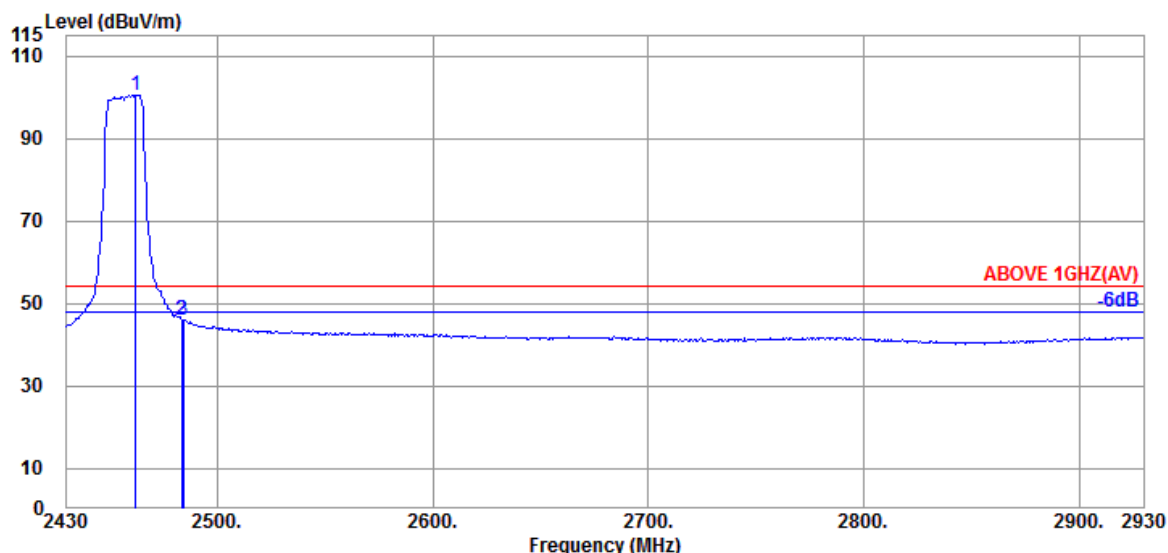


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.000	28.43	5.84	39.95	106.19	100.51	---	---	Average
2483.500	28.47	5.87	39.94	51.60	46.00	54.00	8.00	Average
2484.000	28.47	5.87	39.94	51.60	46.00	54.00	8.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

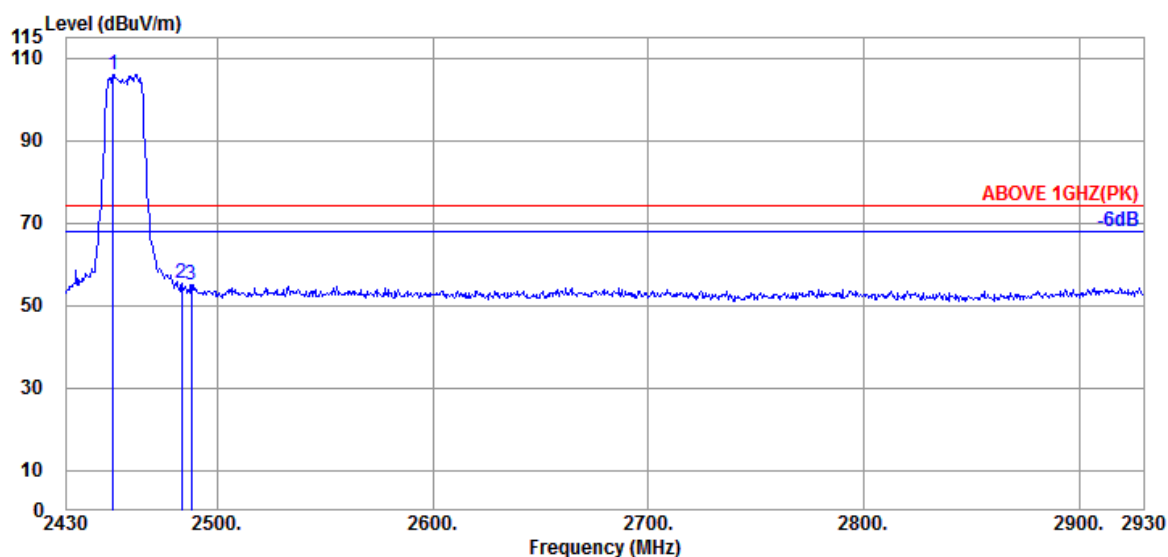

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2451.500	28.40	5.81	39.95	111.75	106.01	---	---	Peak
2483.500	28.47	5.87	39.94	60.87	55.27	74.00	18.73	Peak
2488.000	28.47	5.87	39.94	60.66	55.06	74.00	18.94	Peak

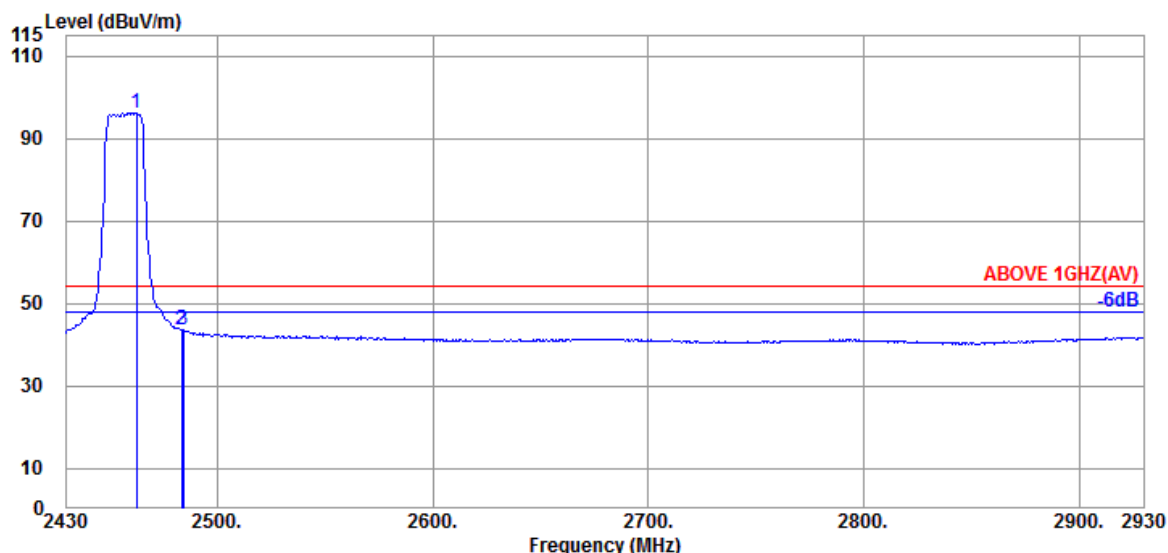

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.43	5.84	39.95	101.89	96.21	---	---	Average
2483.500	28.47	5.87	39.94	49.06	43.46	54.00	10.54	Average
2484.000	28.47	5.87	39.94	49.13	43.53	54.00	10.47	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

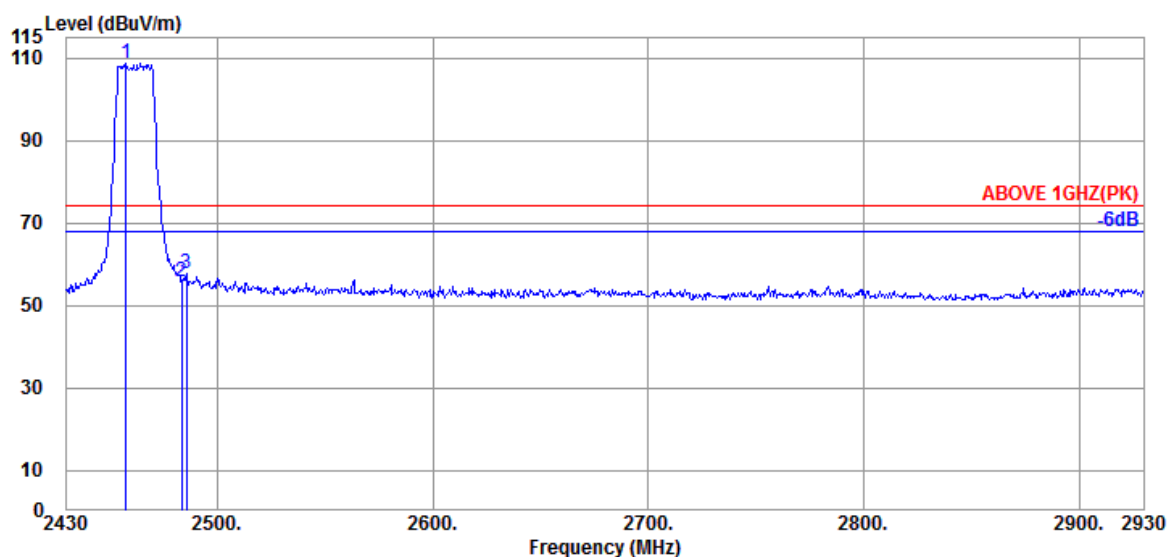

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	28.41	5.83	39.95	114.48	108.77	---	---	Peak
2483.500	28.47	5.87	39.94	61.16	55.56	74.00	18.44	Peak
2485.500	28.47	5.87	39.94	63.44	57.84	74.00	16.16	Peak

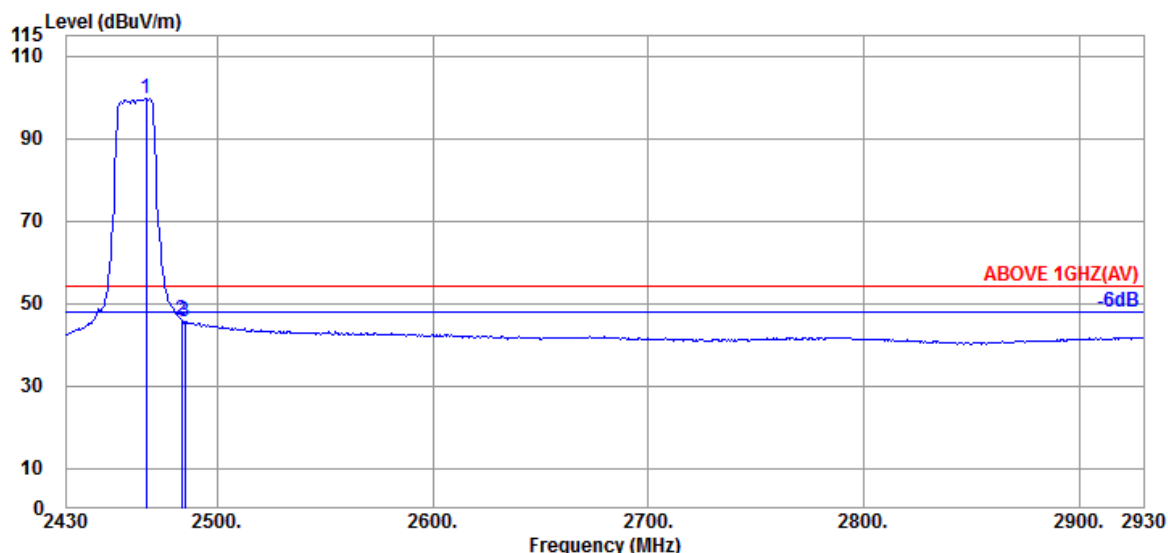

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	5.84	39.94	105.48	99.81	---	---	Average
2483.500	28.47	5.87	39.94	51.43	45.83	54.00	8.17	Average
2485.000	28.47	5.87	39.94	51.17	45.57	54.00	8.43	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

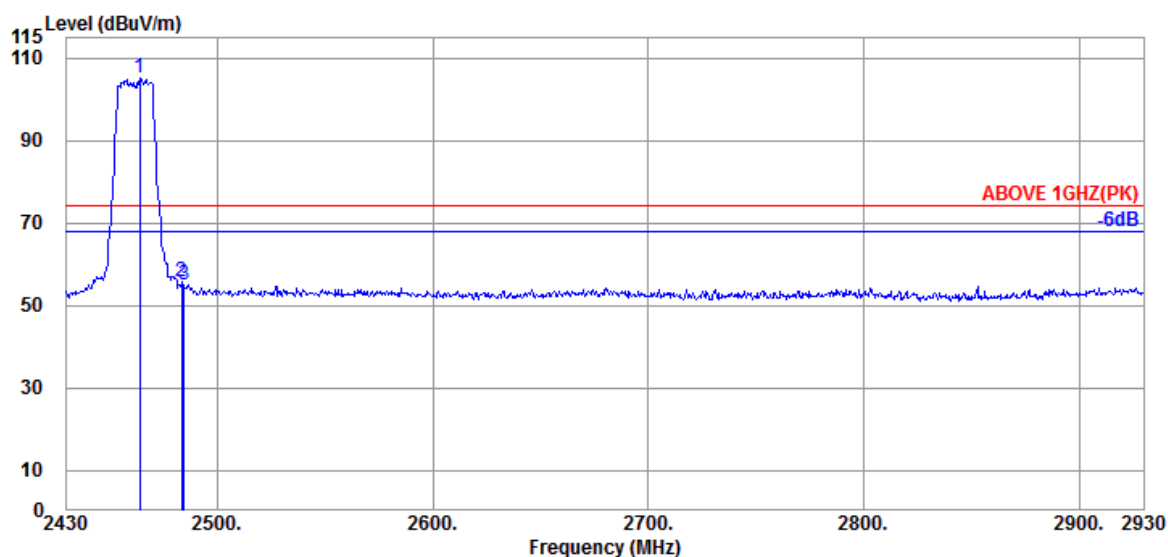

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.43	5.84	39.95	110.75	105.07	---	---	Peak
2483.500	28.47	5.87	39.94	61.23	55.63	74.00	18.37	Peak
2484.500	28.47	5.87	39.94	60.56	54.96	74.00	19.04	Peak

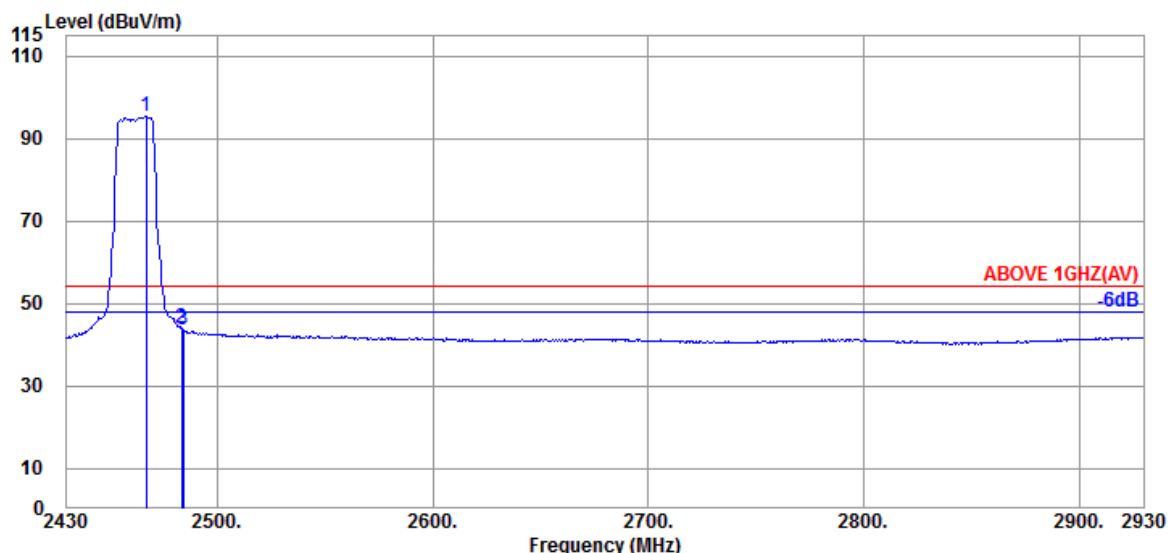

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.43	5.84	39.94	100.99	95.32	---	---	Average
2483.500	28.47	5.87	39.94	49.37	43.77	54.00	10.23	Average
2484.000	28.47	5.87	39.94	49.06	43.46	54.00	10.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

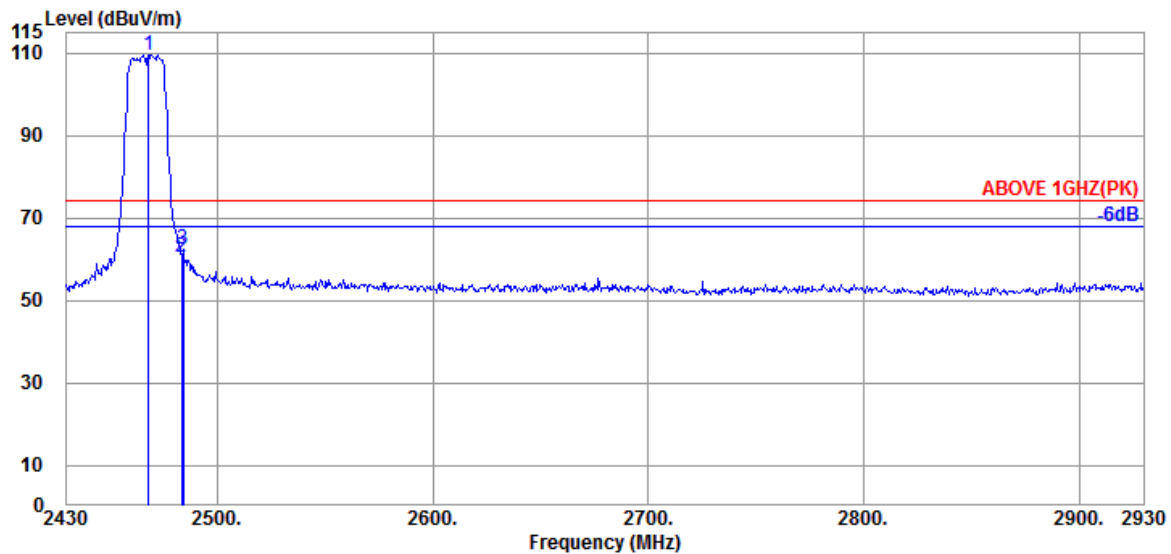

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2468.000	28.44	5.85	39.94	115.19	109.54	---	---	Peak
2483.500	28.47	5.87	39.94	66.12	60.52	74.00	13.48	Peak
2484.000	28.47	5.87	39.94	67.90	62.30	74.00	11.70	Peak

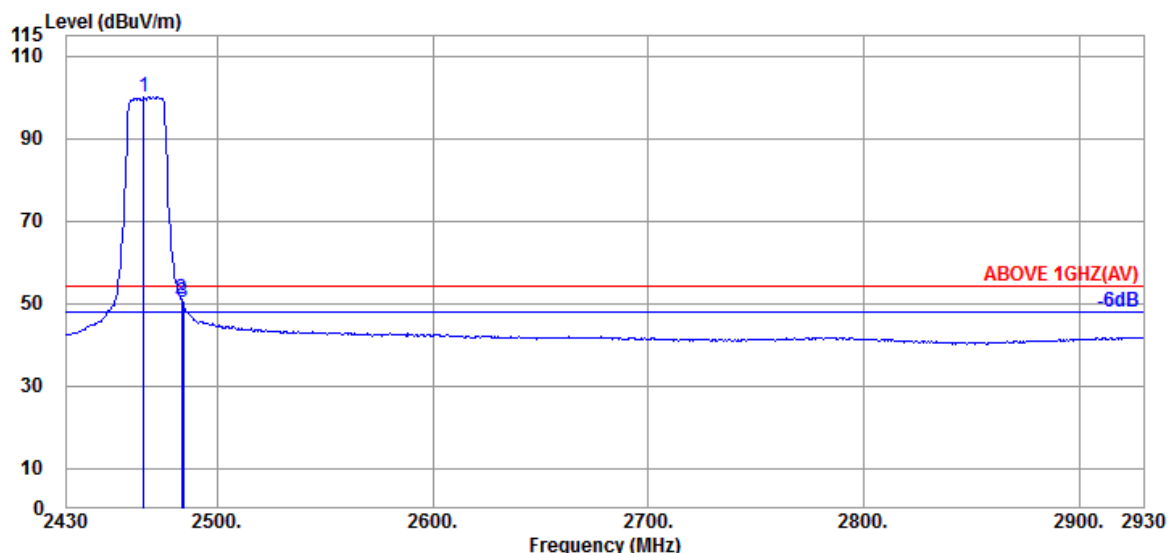

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.000	28.43	5.84	39.95	105.80	100.12	---	---	Average
2483.500	28.47	5.87	39.94	56.61	51.01	54.00	2.99	Average
2484.000	28.47	5.87	39.94	55.98	50.38	54.00	3.62	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

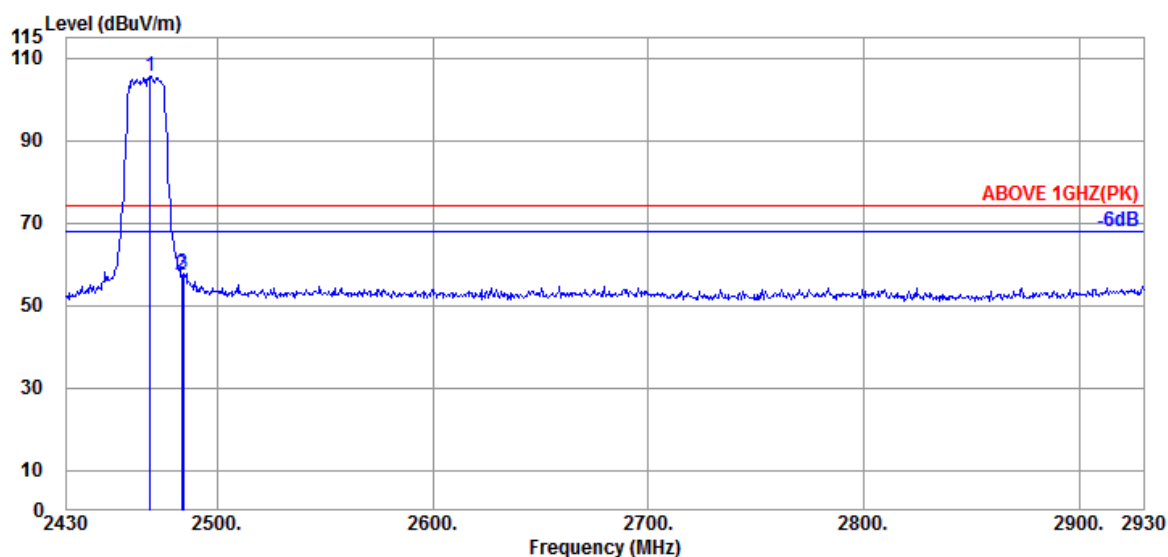

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.000	28.44	5.85	39.94	111.22	105.57	---	---	Peak
2483.500	28.47	5.87	39.94	63.01	57.41	74.00	16.59	Peak
2484.000	28.47	5.87	39.94	63.33	57.73	74.00	16.27	Peak

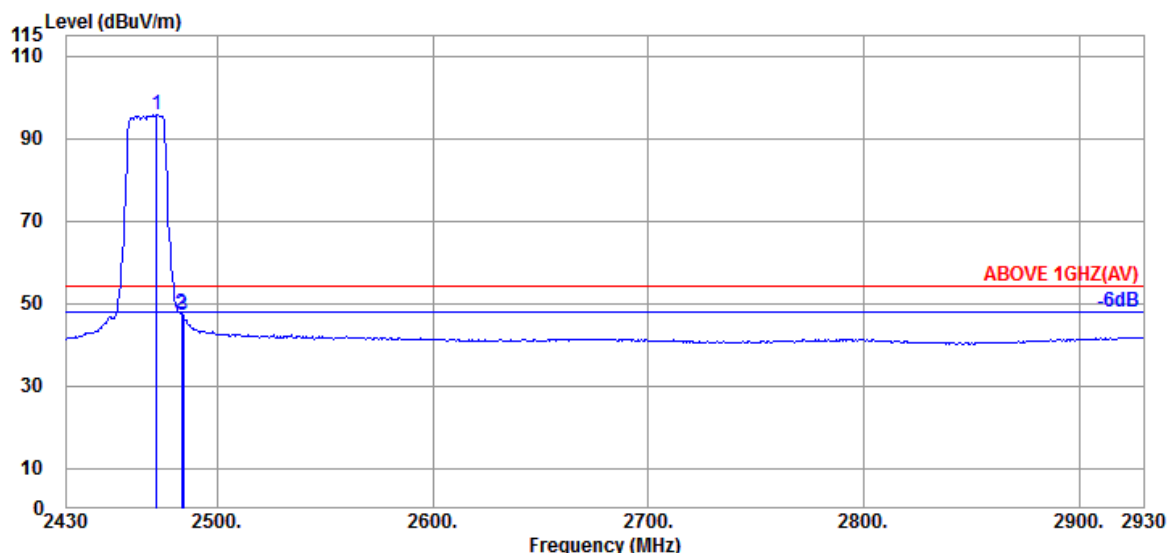

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.000	28.44	5.85	39.94	101.43	95.78	---	---	Average
2483.500	28.47	5.87	39.94	52.97	47.37	54.00	6.63	Average
2484.000	28.47	5.87	39.94	52.65	47.05	54.00	6.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350


Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

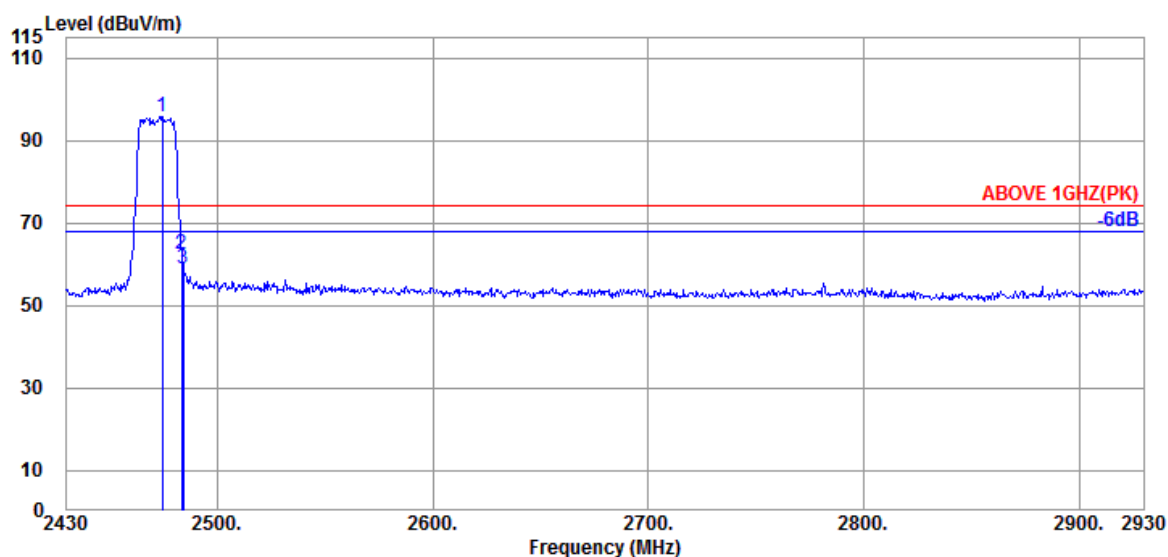

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2474.500	28.44	5.85	39.94	101.41	95.76	---	---	Peak
2483.500	28.47	5.87	39.94	67.94	62.34	74.00	11.66	Peak
2484.000	28.47	5.87	39.94	64.45	58.85	74.00	15.15	Peak

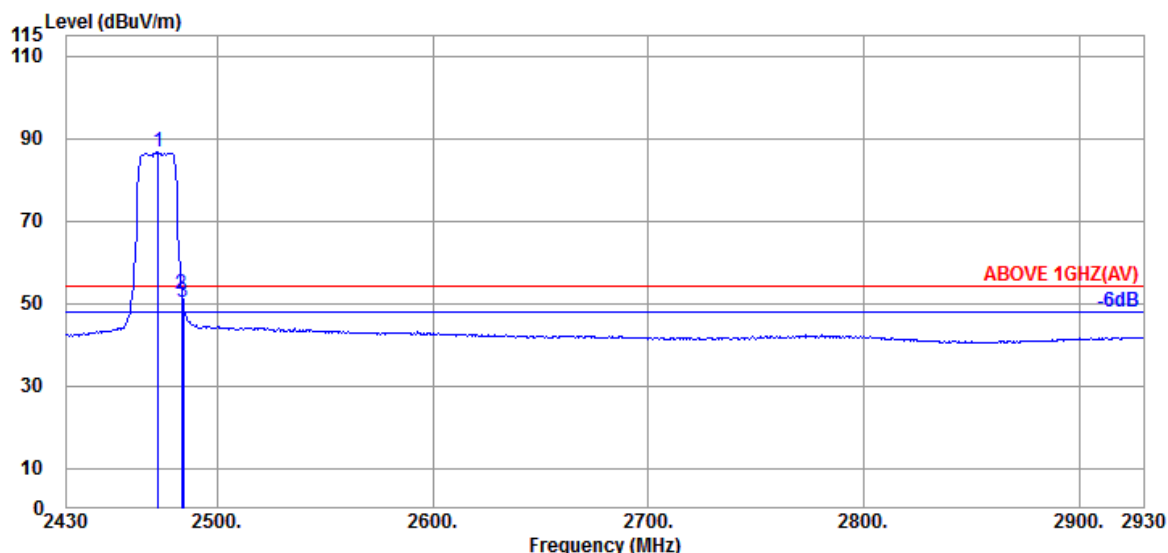


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.500	28.44	5.85	39.94	92.24	86.59	---	---	Average
2483.500	28.47	5.87	39.94	57.81	52.21	54.00	1.79	Average
2484.000	28.47	5.87	39.94	55.79	50.19	54.00	3.81	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

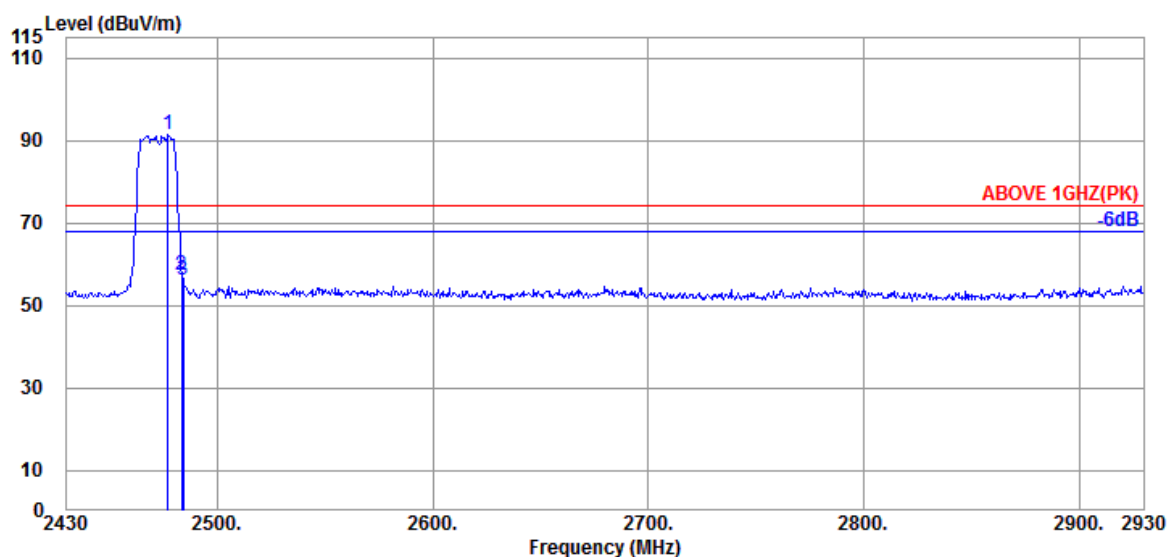

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.000	28.46	5.86	39.94	97.04	91.42	---	---	Peak
2483.500	28.47	5.87	39.94	62.96	57.36	74.00	16.64	Peak
2484.000	28.47	5.87	39.94	61.85	56.25	74.00	17.75	Peak

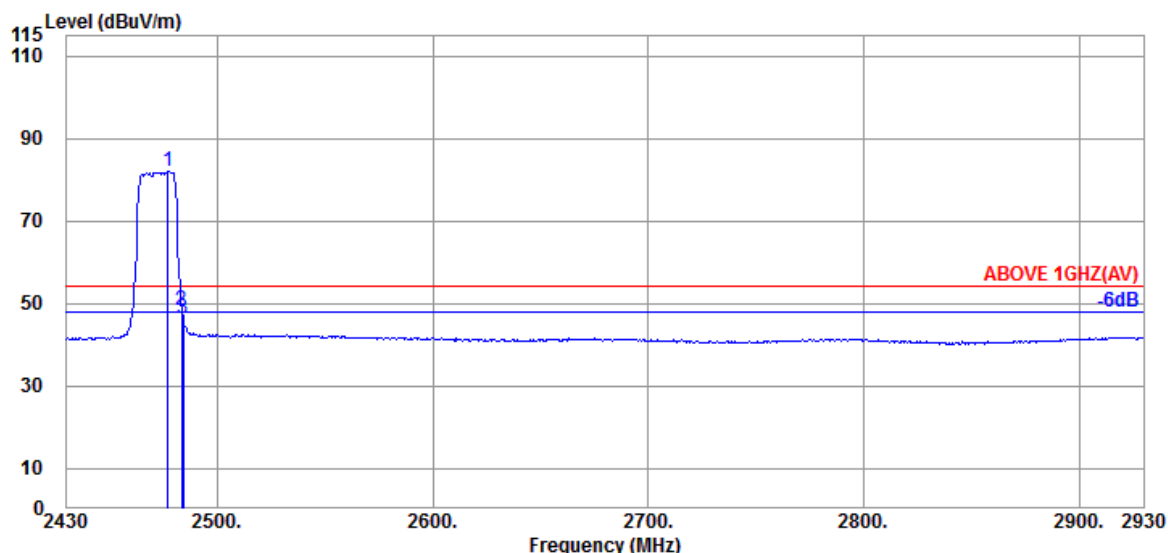


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.000	28.46	5.86	39.94	87.69	82.07	---	---	Average
2483.500	28.47	5.87	39.94	53.89	48.29	54.00	5.71	Average
2484.000	28.47	5.87	39.94	51.90	46.30	54.00	7.70	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

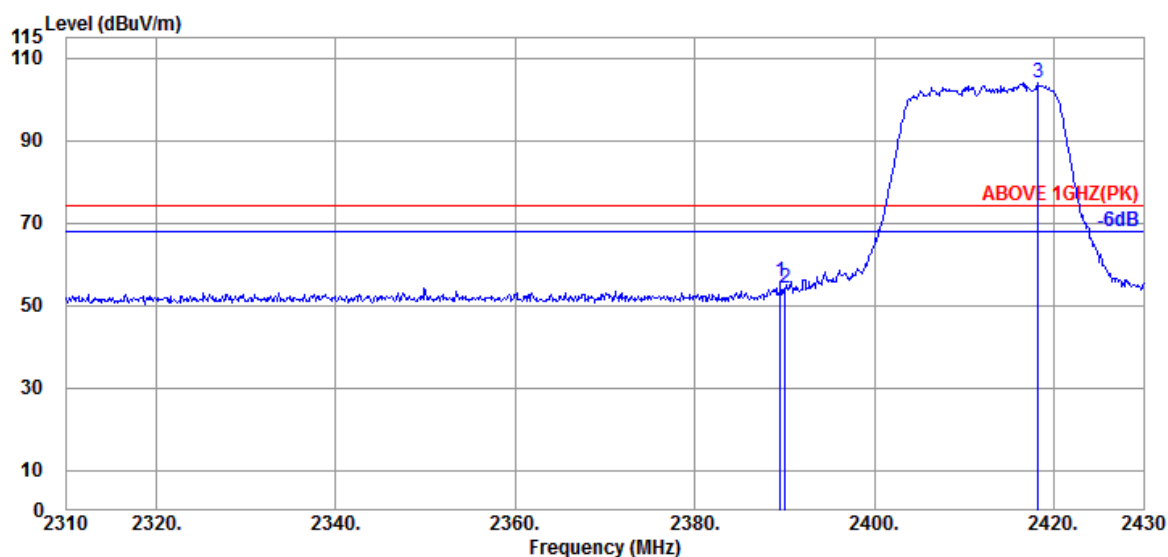

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.20	5.72	39.95	61.69	55.66	74.00	18.34	Peak
2390.040	28.20	5.72	39.95	60.31	54.28	74.00	19.72	Peak
@ 2418.240	28.29	5.77	39.95	109.76	103.87	---	---	Peak

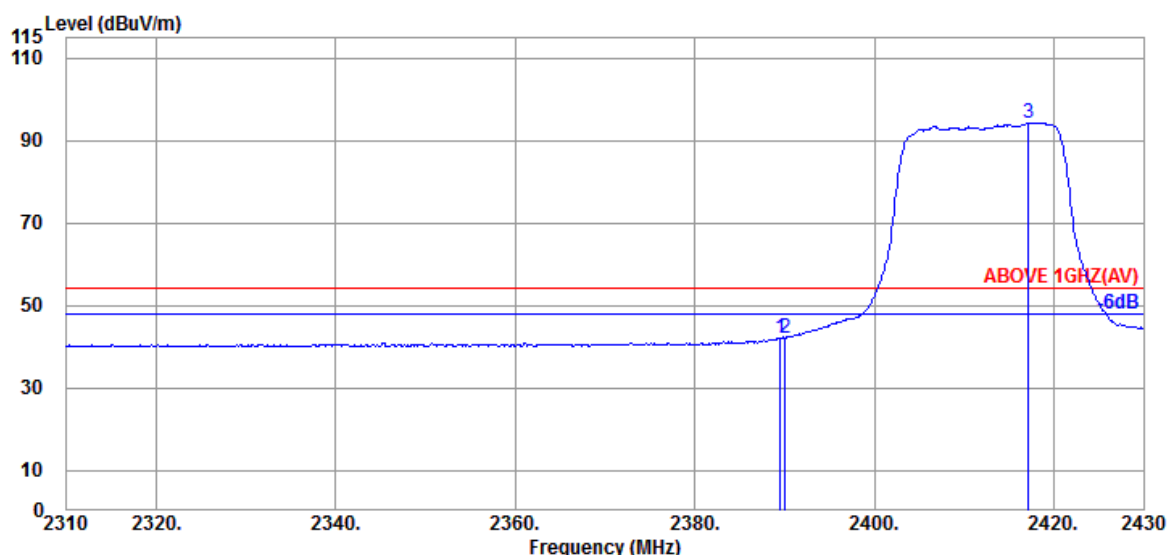


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.20	5.72	39.95	48.12	42.09	54.00	11.91	Average
2390.040	28.20	5.72	39.95	48.22	42.19	54.00	11.81	Average
@ 2417.160	28.26	5.76	39.95	100.30	94.37	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

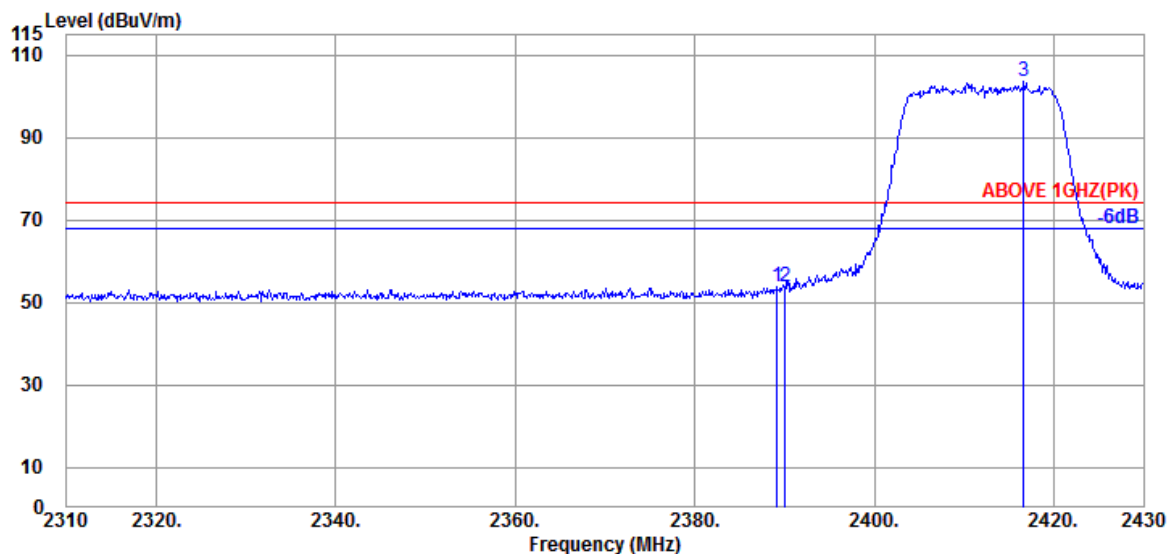

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.20	5.72	39.95	59.93	53.90	74.00	20.10	Peak
2390.040	28.20	5.72	39.95	59.65	53.62	74.00	20.38	Peak
@ 2416.680	28.26	5.76	39.95	109.46	103.53	---	---	Peak

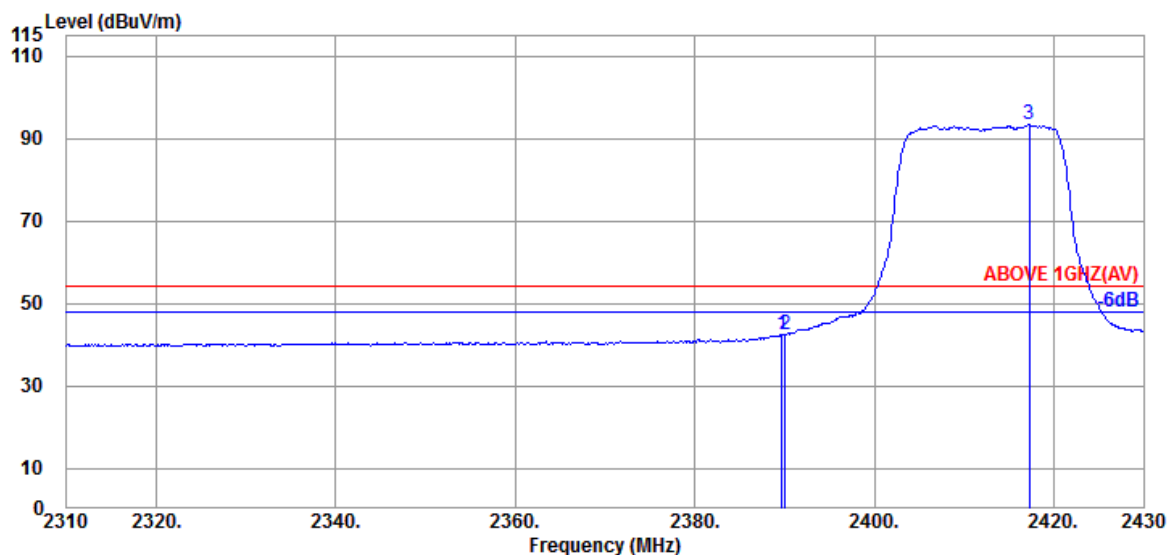

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.20	5.72	39.95	48.42	42.39	54.00	11.61	Average
2390.040	28.20	5.72	39.95	48.56	42.53	54.00	11.47	Average
@ 2417.280	28.26	5.76	39.95	99.32	93.39	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

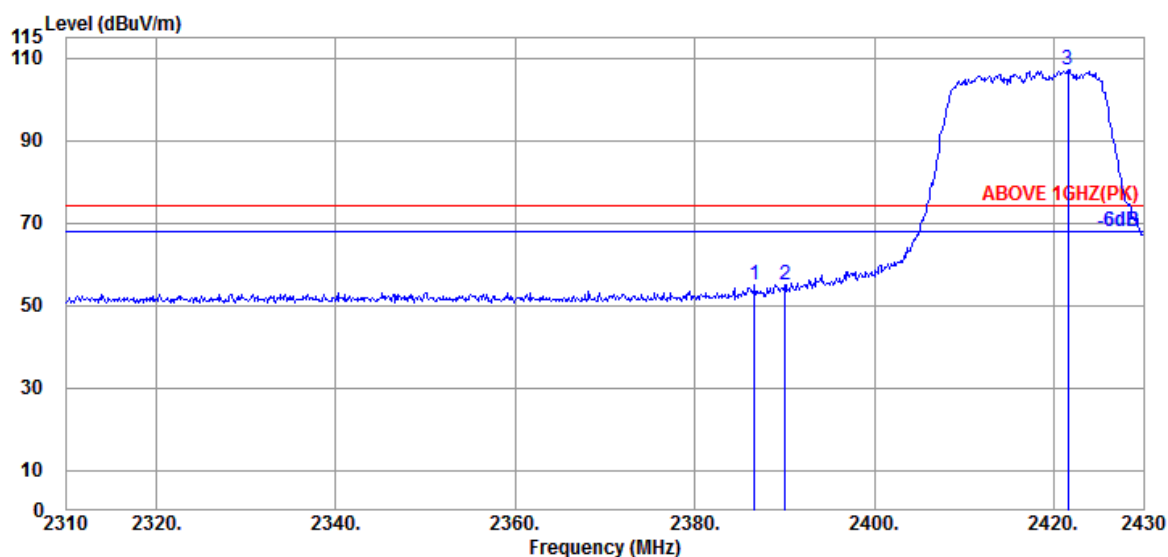

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.680	28.20	5.72	39.96	60.83	54.79	74.00	19.21	Peak
2390.040	28.20	5.72	39.95	60.96	54.93	74.00	19.07	Peak
@ 2421.600	28.29	5.77	39.95	113.10	107.21	---	---	Peak

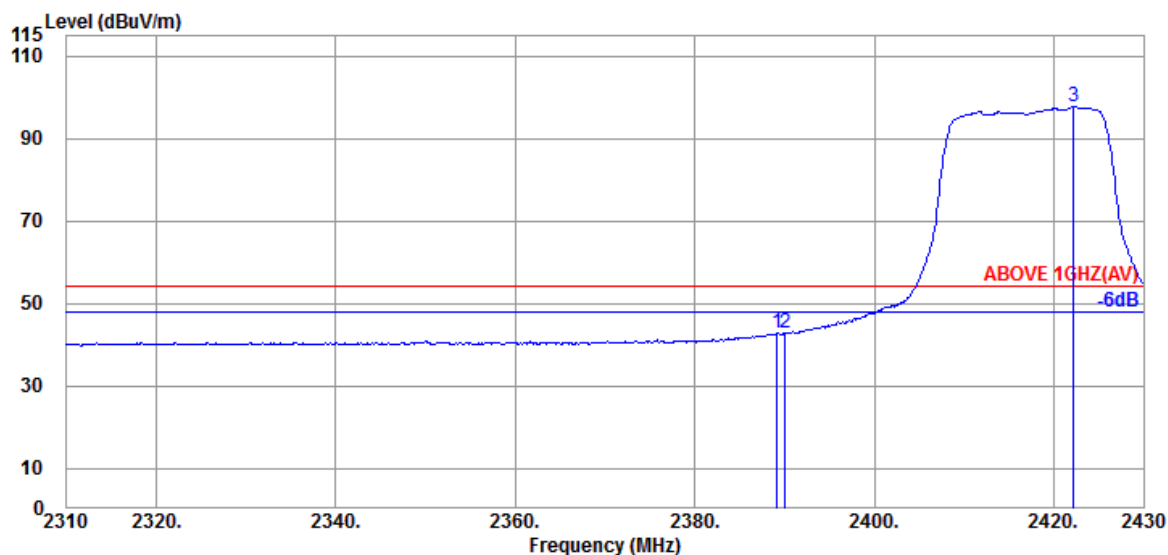

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.200	28.20	5.72	39.95	48.76	42.73	54.00	11.27	Average
2390.040	28.20	5.72	39.95	48.79	42.76	54.00	11.24	Average
@ 2422.200	28.29	5.77	39.95	103.62	97.73	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350

Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

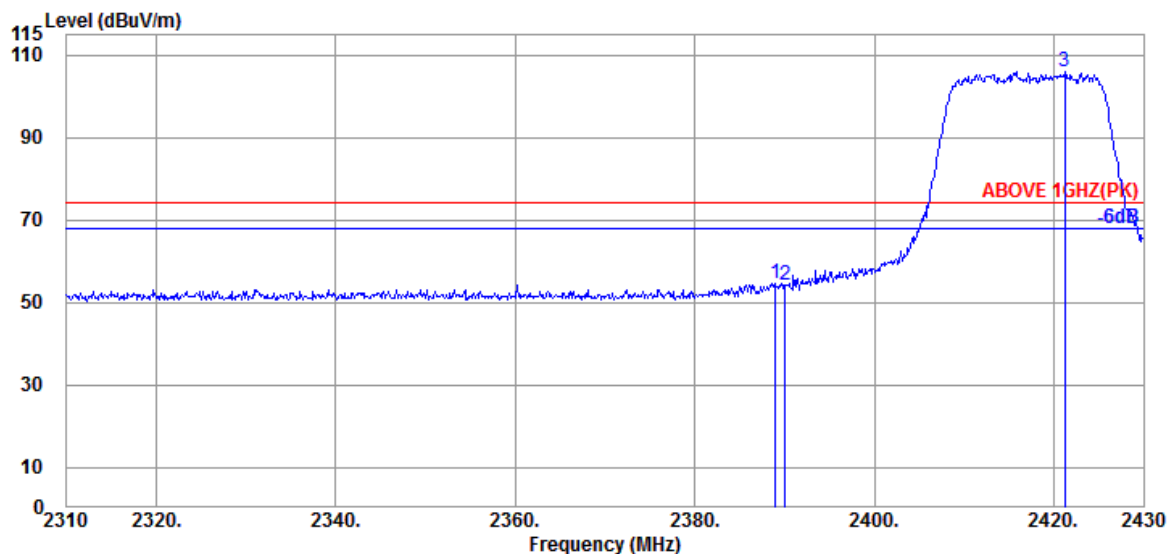

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.20	5.72	39.95	60.63	54.60	74.00	19.40	Peak
2390.040	28.20	5.72	39.95	60.19	54.16	74.00	19.84	Peak
@ 2421.240	28.29	5.77	39.95	111.89	106.00	---	---	Peak

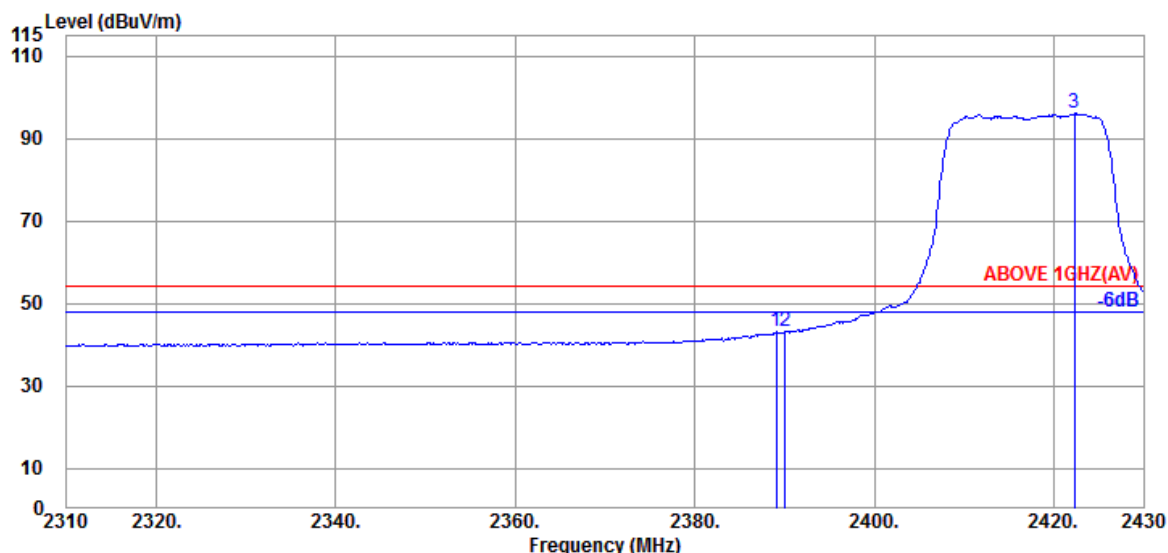

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.20	5.72	39.95	49.06	43.03	54.00	10.97	Average
2390.040	28.20	5.72	39.95	49.14	43.11	54.00	10.89	Average
@ 2422.320	28.29	5.77	39.95	101.92	96.03	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350


Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

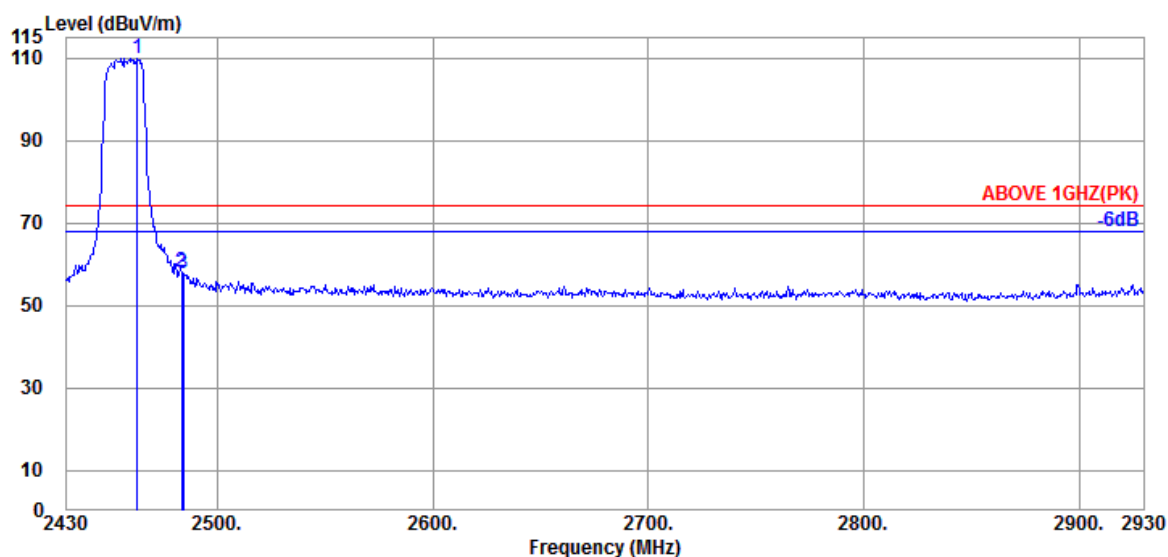

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2463.000	28.43	5.84	39.95	115.60	109.92	---	---	Peak
2483.500	28.47	5.87	39.94	63.51	57.91	74.00	16.09	Peak
2484.000	28.47	5.87	39.94	63.20	57.60	74.00	16.40	Peak

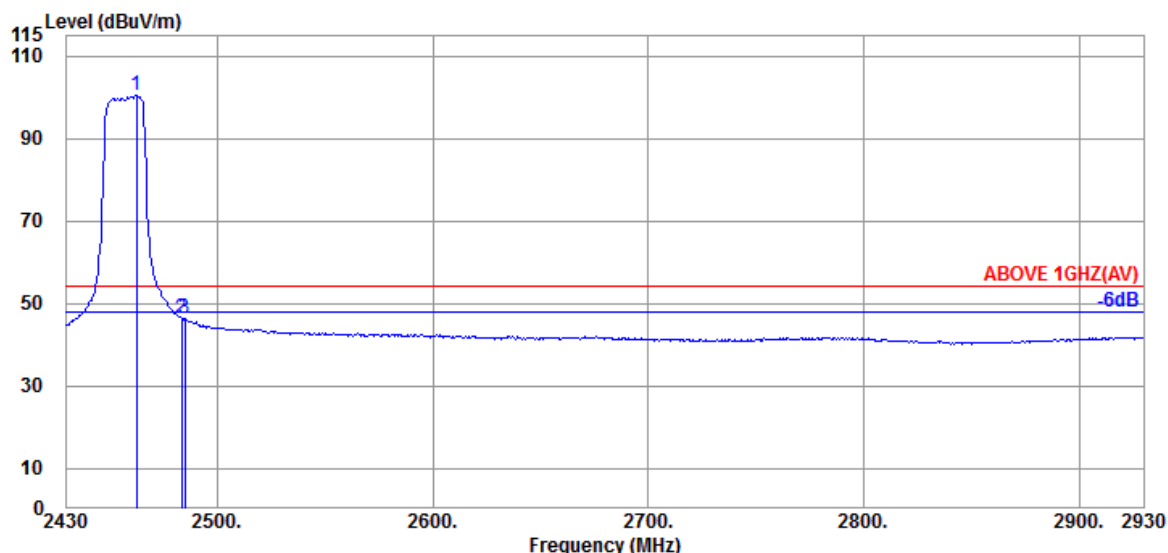


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.500	28.43	5.84	39.95	106.24	100.56	---	---	Average
2483.500	28.47	5.87	39.94	51.89	46.29	54.00	7.71	Average
2485.000	28.47	5.87	39.94	51.83	46.23	54.00	7.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

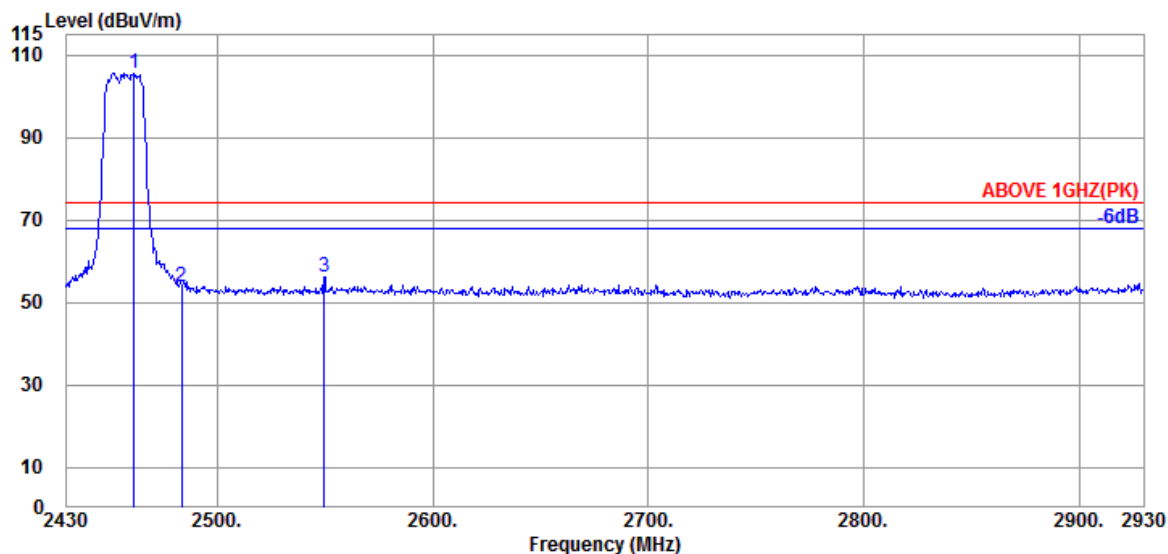

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.500	28.43	5.84	39.95	111.27	105.59	---	---	Peak
2483.500	28.47	5.87	39.94	59.41	53.81	74.00	20.19	Peak
2549.500	28.70	6.01	39.96	61.22	55.97	74.00	18.03	Peak

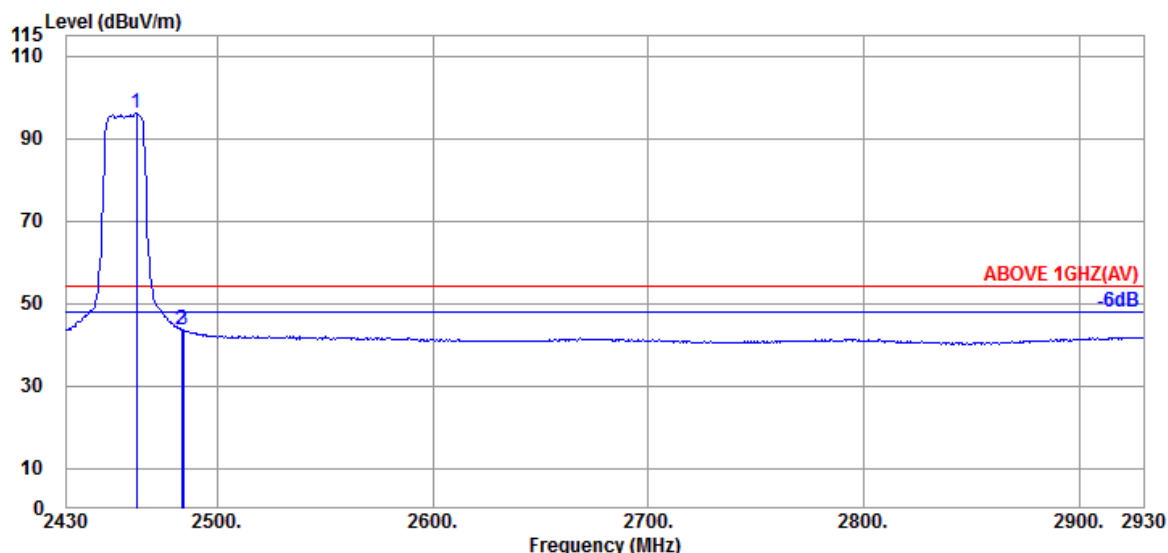


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2462.500	28.43	5.84	39.95	101.96	96.28	---	---	Average
2483.500	28.47	5.87	39.94	49.27	43.67	54.00	10.33	Average
2484.000	28.47	5.87	39.94	49.20	43.60	54.00	10.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

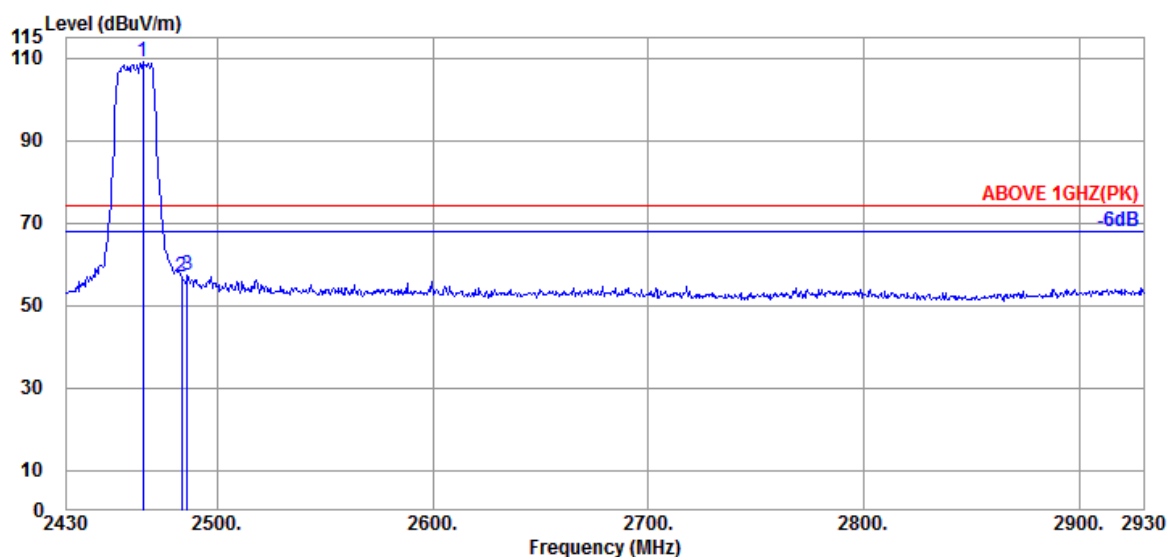

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	5.84	39.95	114.67	108.99	---	---	Peak
2483.500	28.47	5.87	39.94	62.49	56.89	74.00	17.11	Peak
2486.000	28.47	5.87	39.94	62.84	57.24	74.00	16.76	Peak

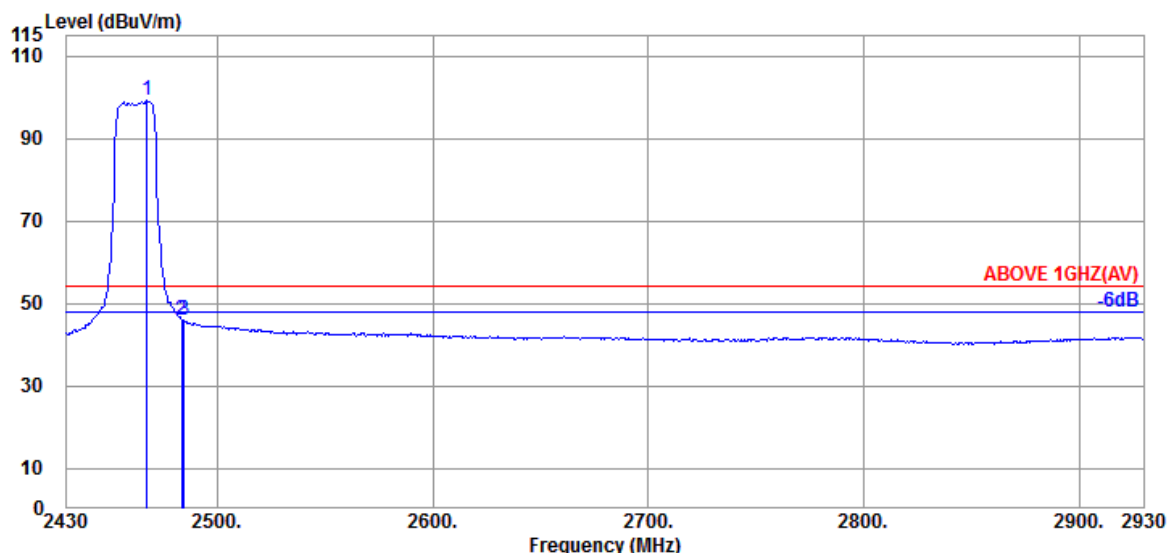

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.43	5.84	39.94	104.86	99.19	---	---	Average
2483.500	28.47	5.87	39.94	51.51	45.91	54.00	8.09	Average
2484.500	28.47	5.87	39.94	51.42	45.82	54.00	8.18	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

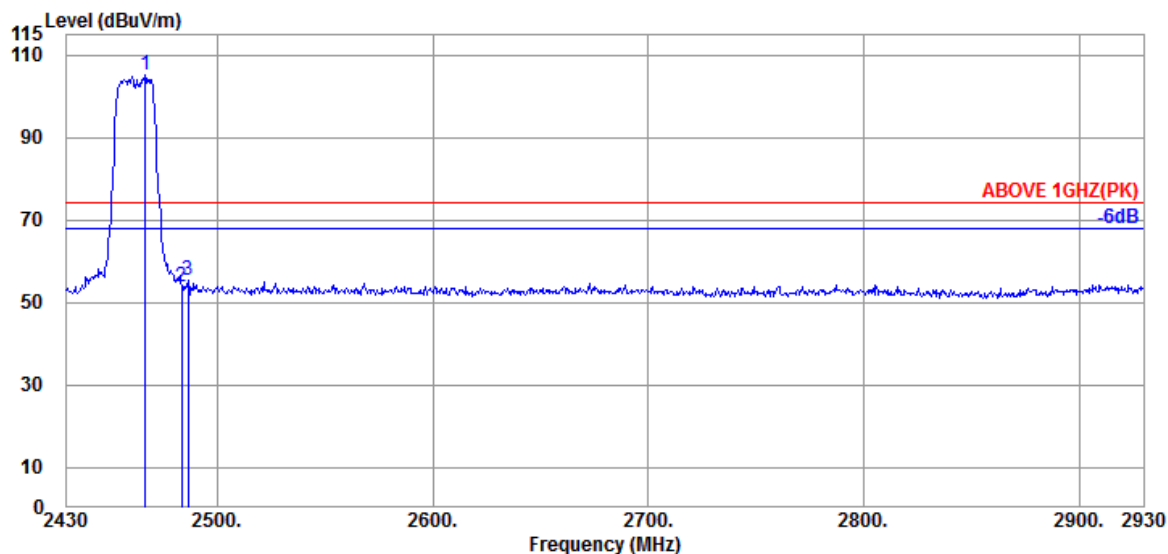

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.500	28.43	5.84	39.95	110.67	104.99	---	---	Peak
2483.500	28.47	5.87	39.94	59.51	53.91	74.00	20.09	Peak
2486.500	28.47	5.87	39.94	60.80	55.20	74.00	18.80	Peak

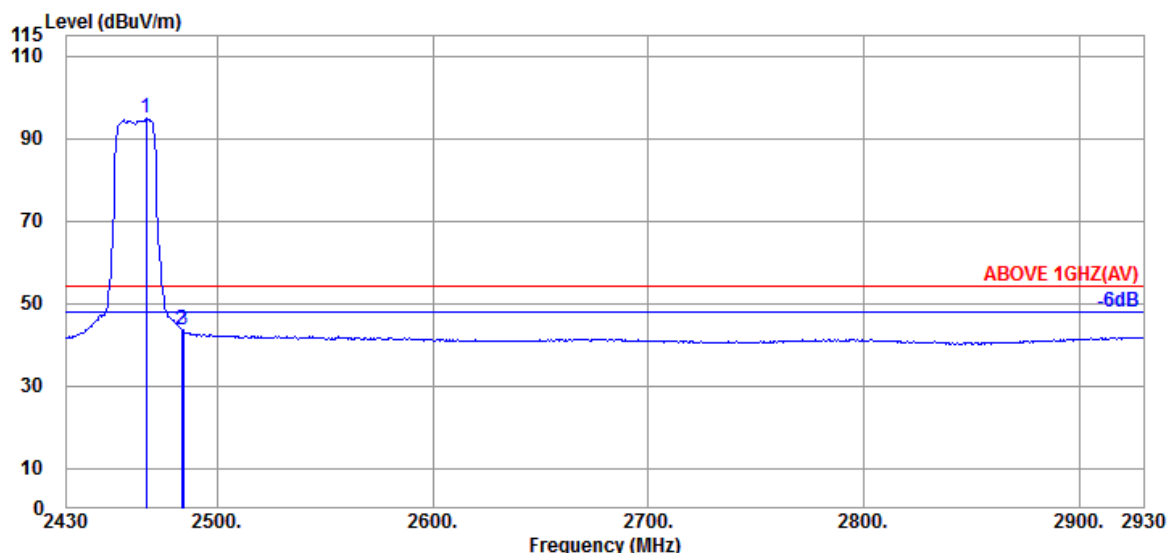

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2467.000	28.43	5.84	39.94	100.71	95.04	---	---	Average
2483.500	28.47	5.87	39.94	49.21	43.61	54.00	10.39	Average
2484.000	28.47	5.87	39.94	49.26	43.66	54.00	10.34	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201350

Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

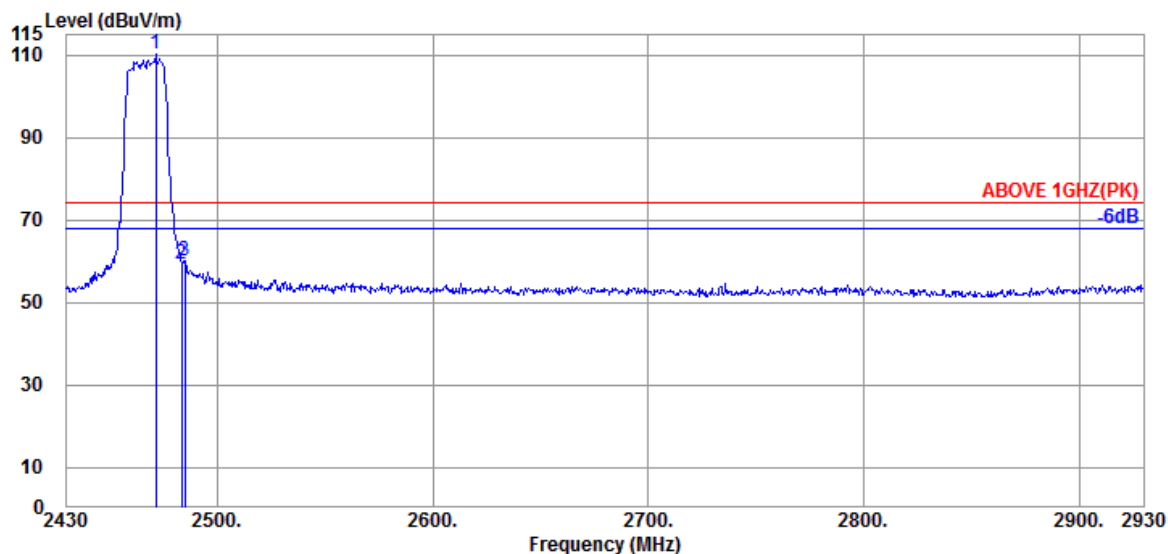

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.500	28.44	5.85	39.94	115.97	110.32	---	---	Peak
2483.500	28.47	5.87	39.94	64.99	59.39	74.00	14.61	Peak
2485.000	28.47	5.87	39.94	65.73	60.13	74.00	13.87	Peak

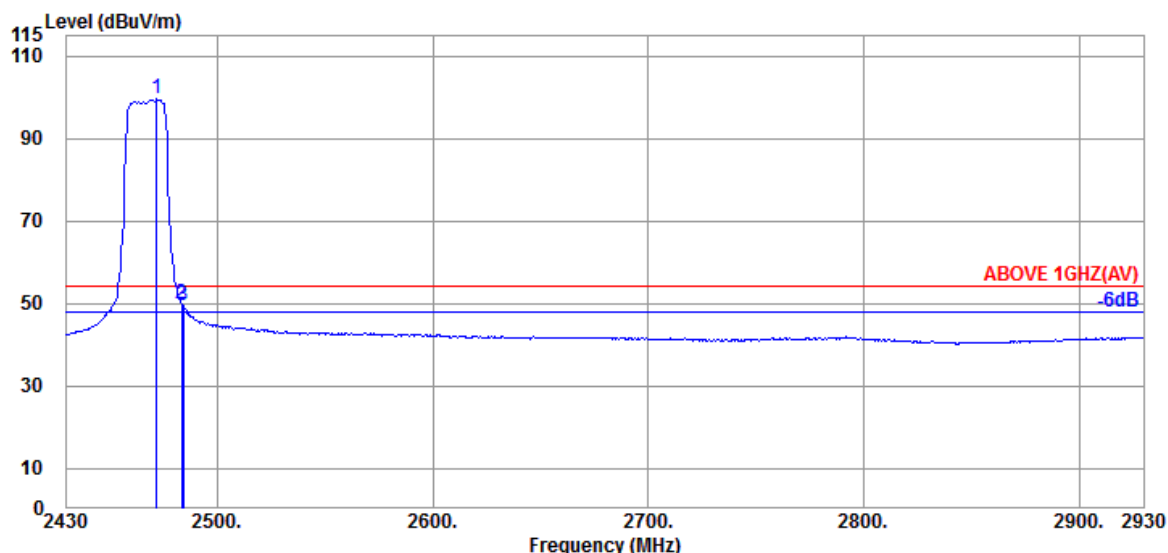

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2472.000	28.44	5.85	39.94	105.24	99.59	---	---	Average
2483.500	28.47	5.87	39.94	55.39	49.79	54.00	4.21	Average
2484.000	28.47	5.87	39.94	54.87	49.27	54.00	4.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350

Report Number: EM-F220112


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

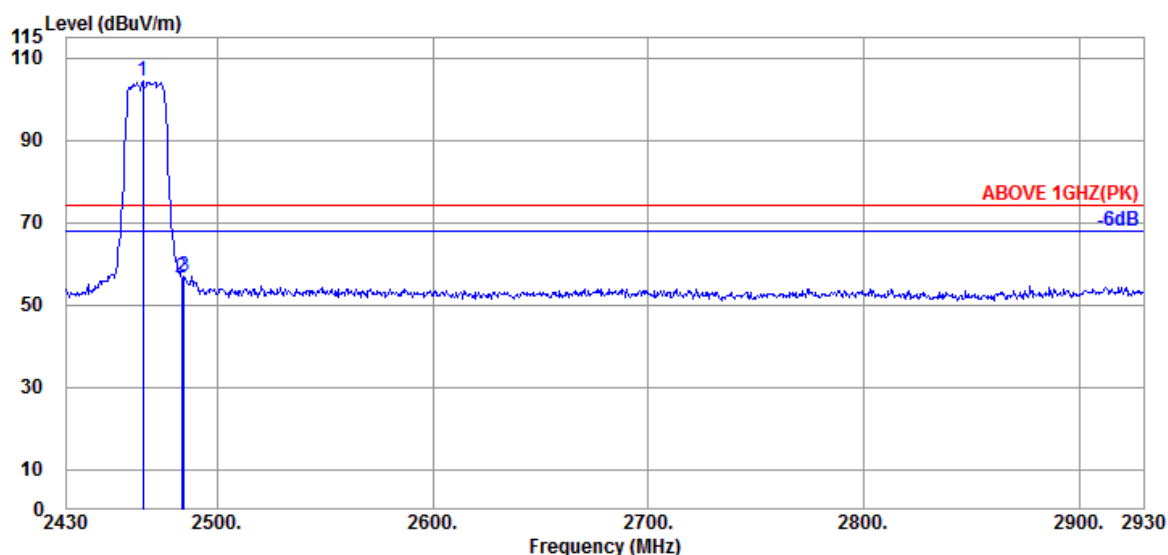

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.43	5.84	39.95	110.14	104.46	---	---	Peak
2483.500	28.47	5.87	39.94	62.09	56.49	74.00	17.51	Peak
2484.500	28.47	5.87	39.94	62.49	56.89	74.00	17.11	Peak

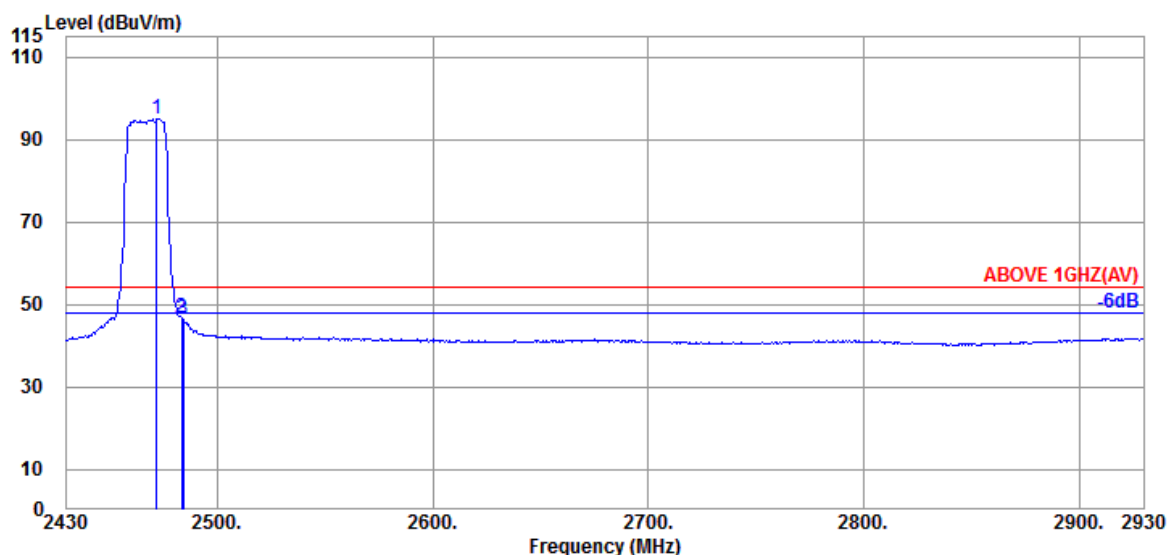

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	28.44	5.85	39.94	100.82	95.17	---	---	Average
2483.500	28.47	5.87	39.94	52.15	46.55	54.00	7.45	Average
2484.000	28.47	5.87	39.94	51.88	46.28	54.00	7.72	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

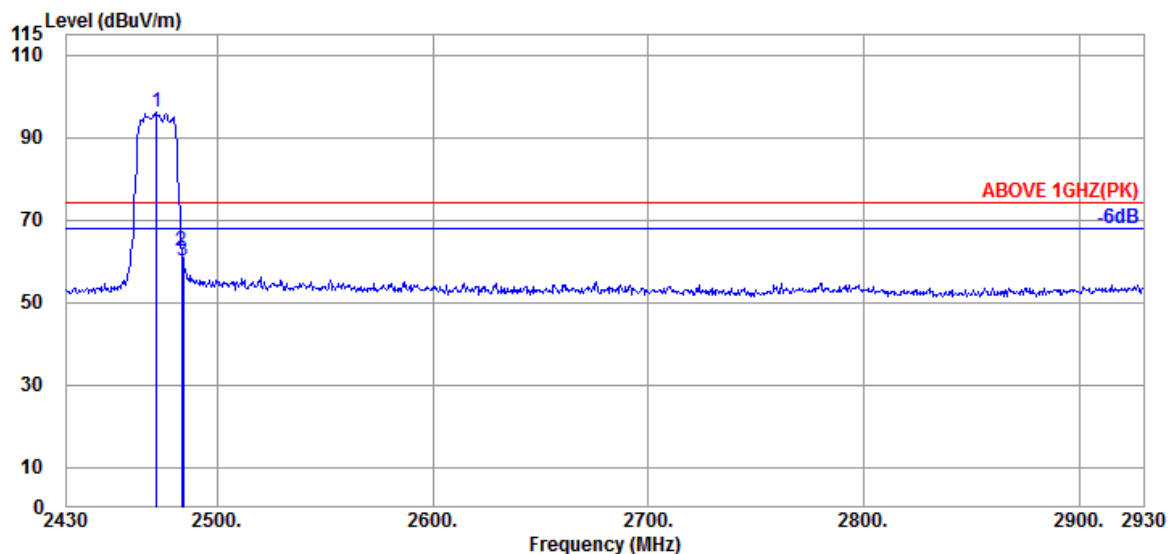

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	28.44	5.85	39.94	101.72	96.07	---	---	Peak
2483.500	28.47	5.87	39.94	68.00	62.40	74.00	11.60	Peak
2484.000	28.47	5.87	39.94	65.58	59.98	74.00	14.02	Peak

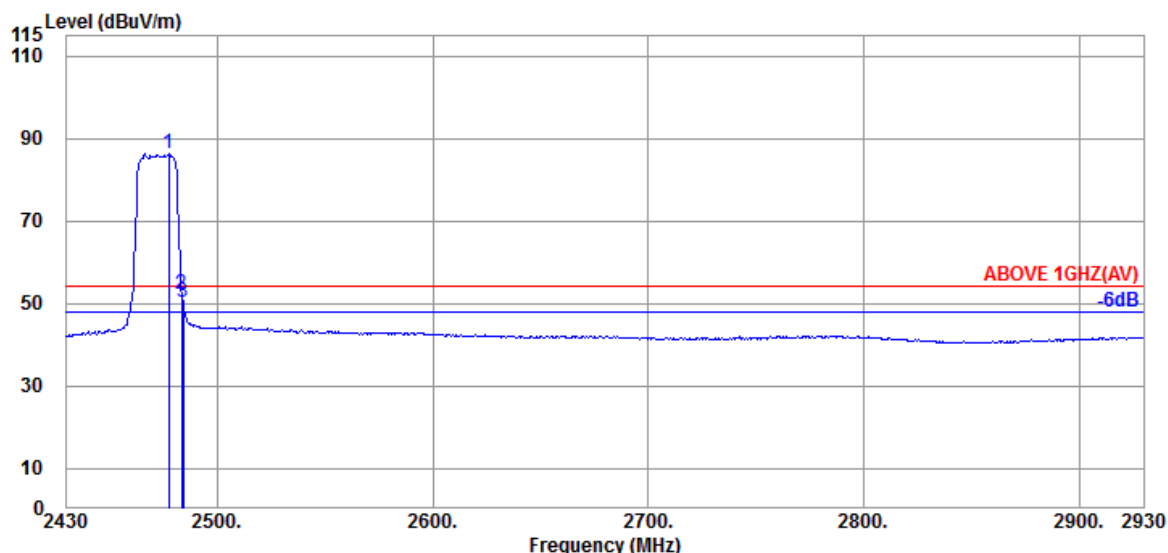

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.46	5.86	39.94	91.87	86.25	---	---	Average
2483.500	28.47	5.87	39.94	57.86	52.26	54.00	1.74	Average
2484.000	28.47	5.87	39.94	55.65	50.05	54.00	3.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

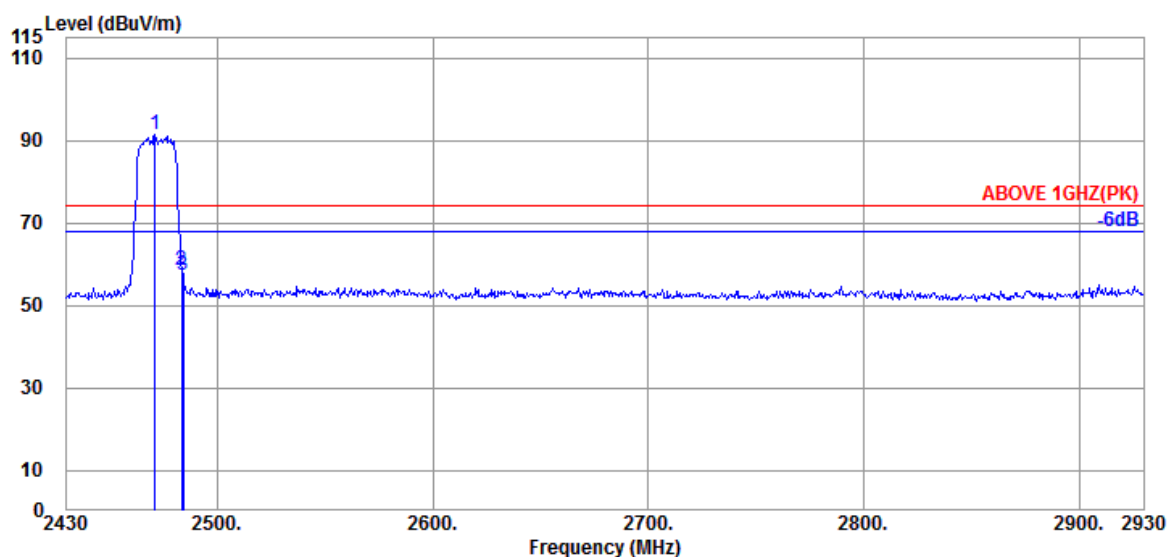

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.44	5.85	39.94	97.00	91.35	---	---	Peak
2483.500	28.47	5.87	39.94	64.20	58.60	74.00	15.40	Peak
2484.000	28.47	5.87	39.94	63.09	57.49	74.00	16.51	Peak

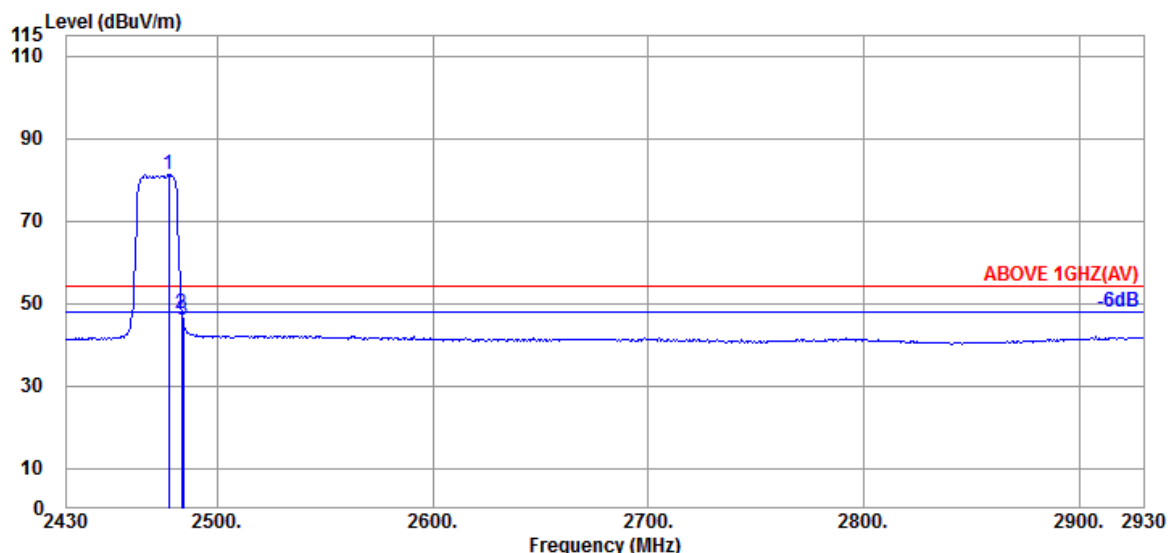

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.500	28.46	5.86	39.94	86.98	81.36	---	---	Average
2483.500	28.47	5.87	39.94	53.28	47.68	54.00	6.32	Average
2484.000	28.47	5.87	39.94	51.65	46.05	54.00	7.95	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

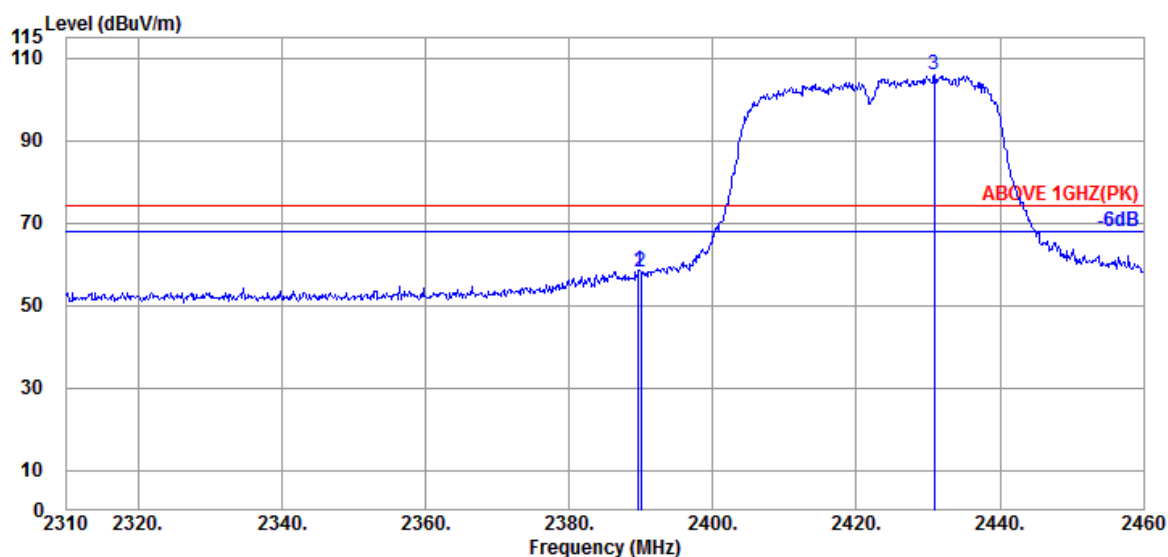

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.72	39.95	64.65	58.62	74.00	15.38	Peak
2389.950	28.20	5.72	39.95	63.94	57.91	74.00	16.09	Peak
@ 2430.900	28.31	5.78	39.95	111.67	105.81	---	---	Peak

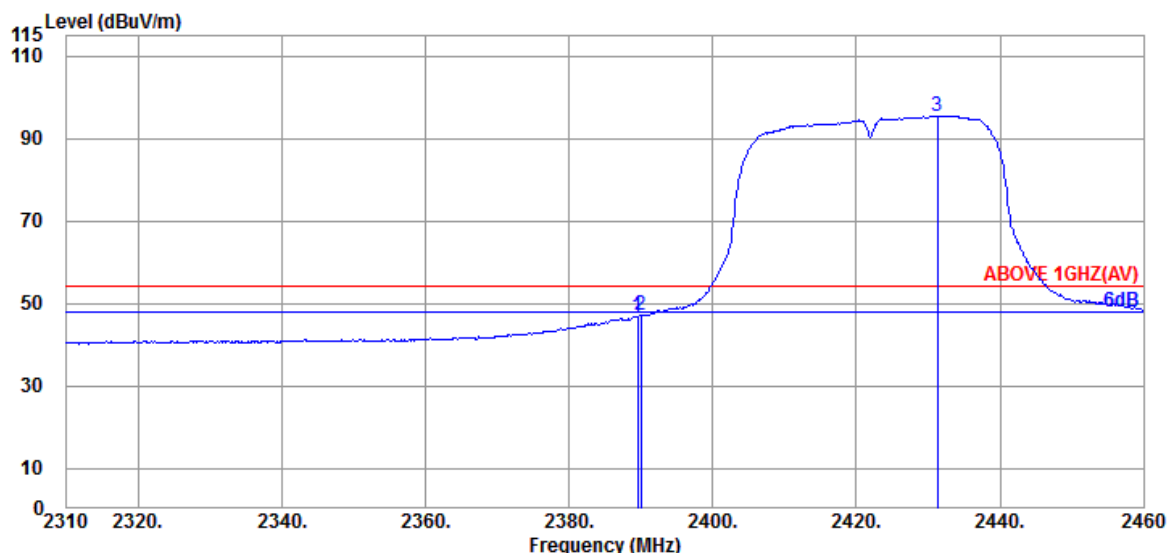

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.20	5.72	39.95	52.84	46.81	54.00	7.19	Average
2389.950	28.20	5.72	39.95	53.07	47.04	54.00	6.96	Average
@ 2431.350	28.31	5.78	39.95	101.38	95.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: C1M2201350

Report Number: EM-F220112


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

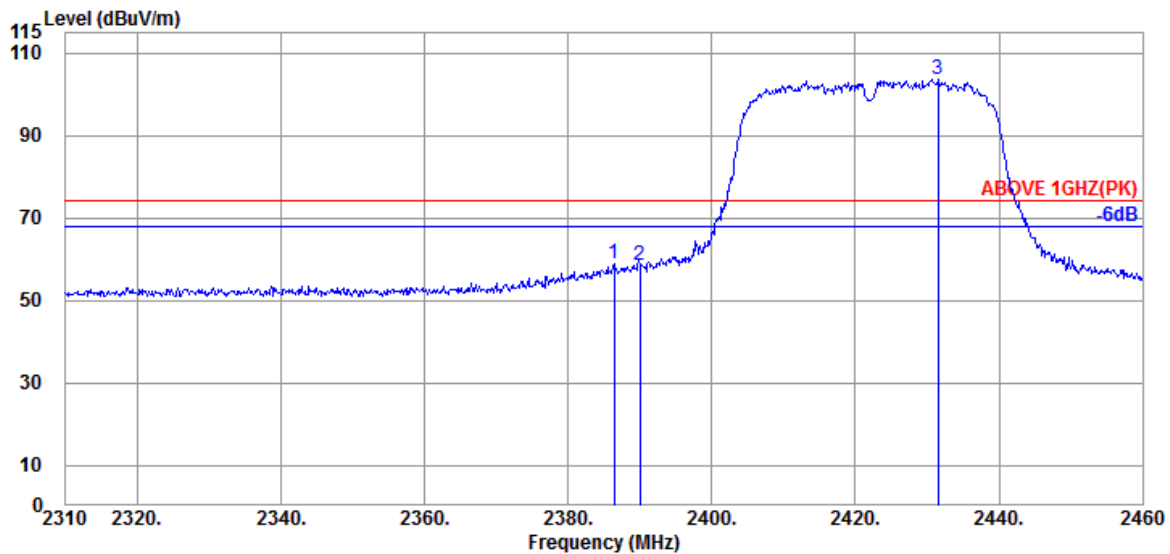

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2386.350	28.20	5.72	39.96	64.99	58.95	74.00	15.05	Peak
2389.950	28.20	5.72	39.95	64.48	58.45	74.00	15.55	Peak
@ 2431.500	28.31	5.78	39.95	109.64	103.78	---	---	Peak

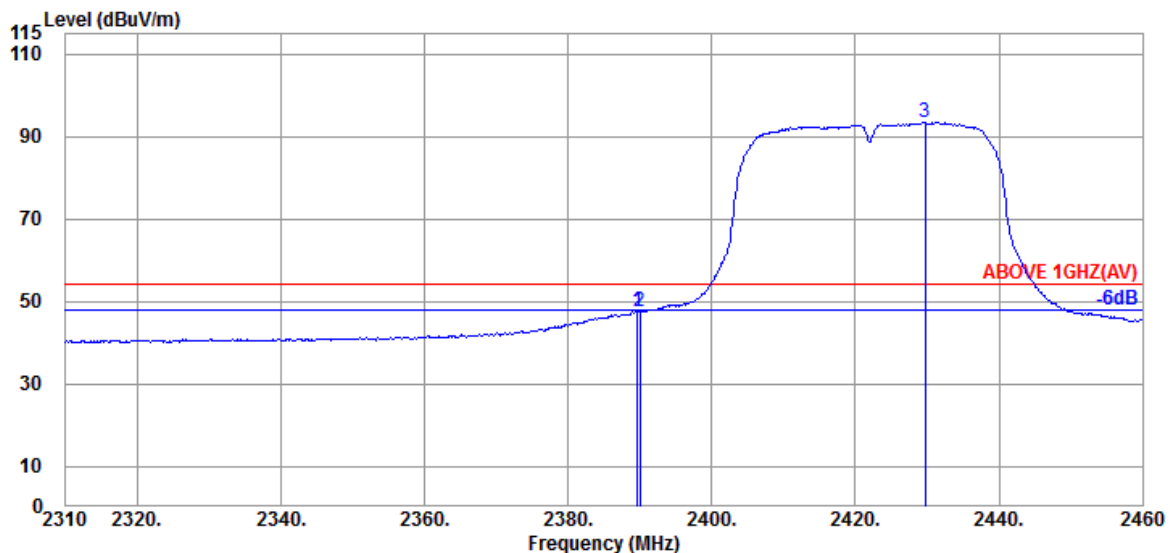


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.20	5.72	39.95	53.65	47.62	54.00	6.38	Average
2389.950	28.20	5.72	39.95	53.47	47.44	54.00	6.56	Average
@ 2429.700	28.31	5.78	39.95	99.30	93.44	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

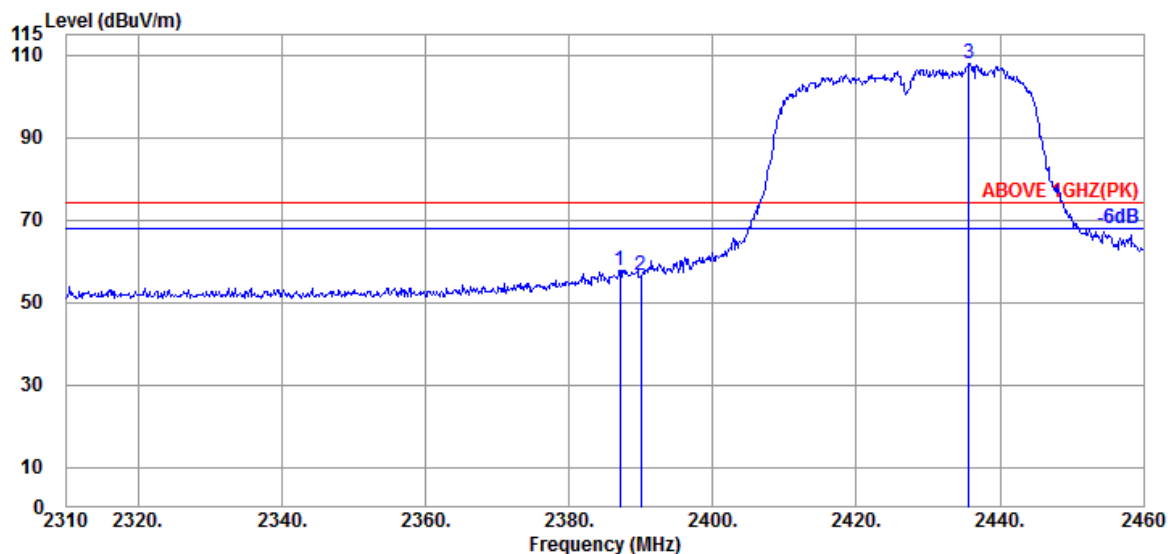

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2387.100	28.20	5.72	39.96	63.91	57.87	74.00	16.13	Peak
2389.950	28.20	5.72	39.95	62.66	56.63	74.00	17.37	Peak
@ 2435.700	28.34	5.79	39.95	113.73	107.91	---	---	Peak

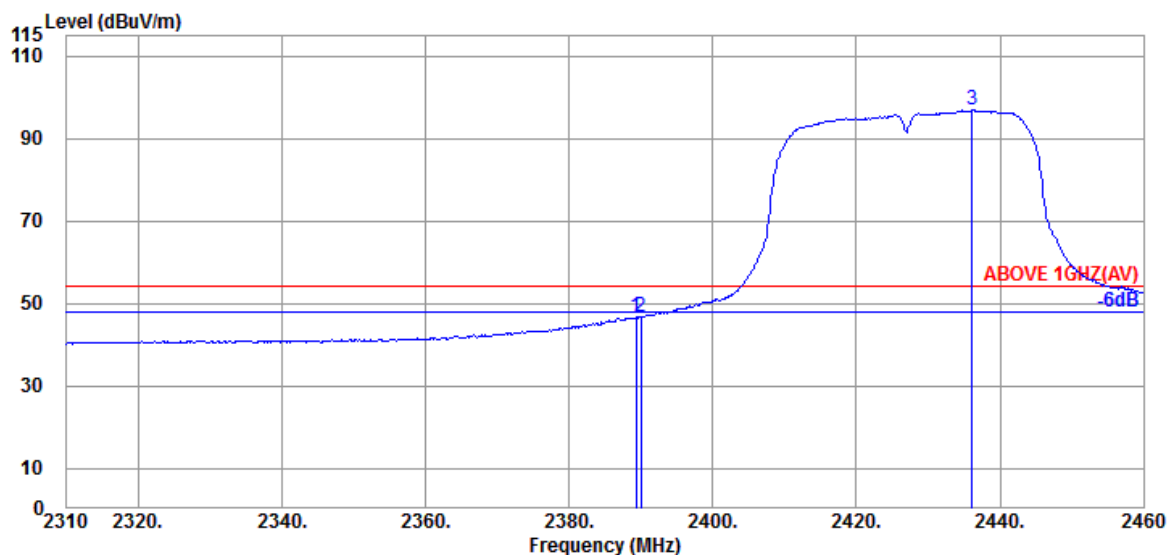


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.20	5.72	39.95	52.57	46.54	54.00	7.46	Average
2389.950	28.20	5.72	39.95	52.66	46.63	54.00	7.37	Average
@ 2436.150	28.34	5.79	39.95	102.67	96.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2427MHz
------	--------------	-----------	------------

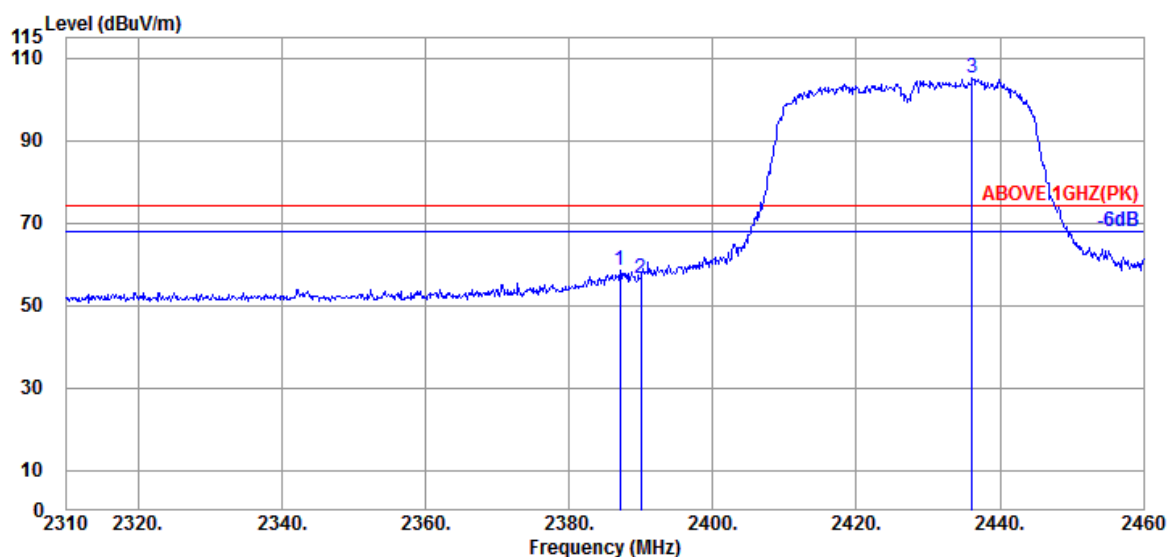

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.100	28.20	5.72	39.96	64.48	58.44	74.00	15.56	Peak
2389.950	28.20	5.72	39.95	62.47	56.44	74.00	17.56	Peak
@ 2436.150	28.34	5.79	39.95	111.01	105.19	---	---	Peak

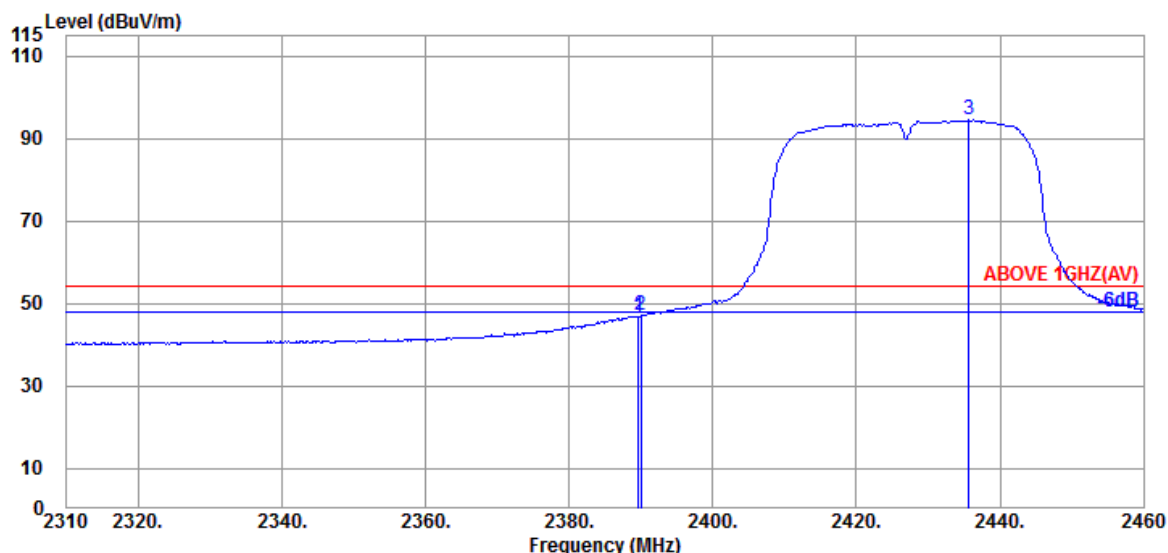


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.20	5.72	39.95	52.87	46.84	54.00	7.16	Average
2389.950	28.20	5.72	39.95	53.04	47.01	54.00	6.99	Average
@ 2435.700	28.34	5.79	39.95	100.25	94.43	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

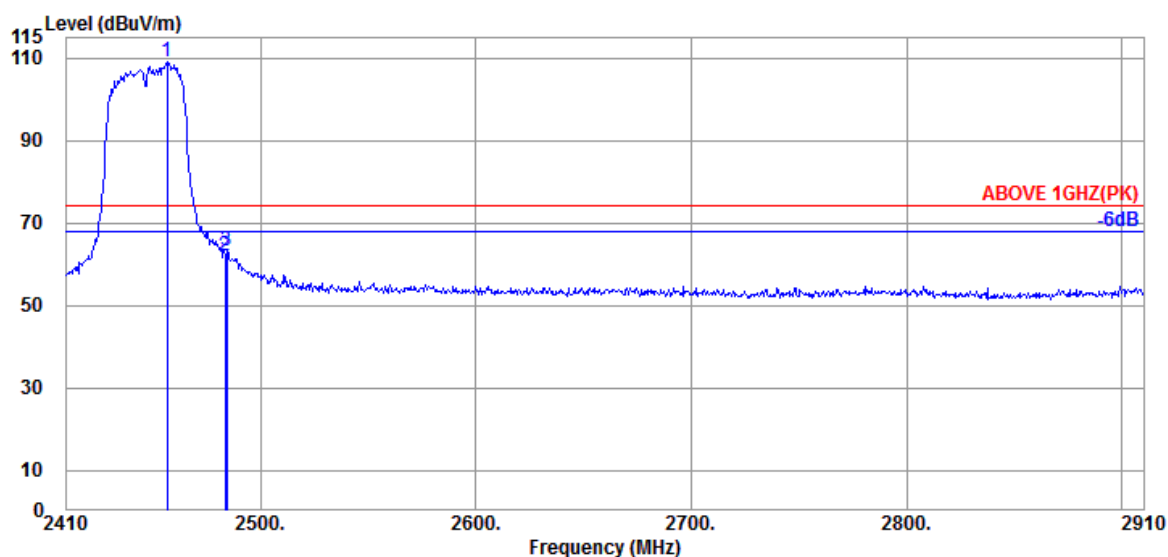

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	28.41	5.83	39.95	114.83	109.12	---	---	Peak
2483.500	28.47	5.87	39.94	67.74	62.14	74.00	11.86	Peak
2484.500	28.47	5.87	39.94	68.77	63.17	74.00	10.83	Peak

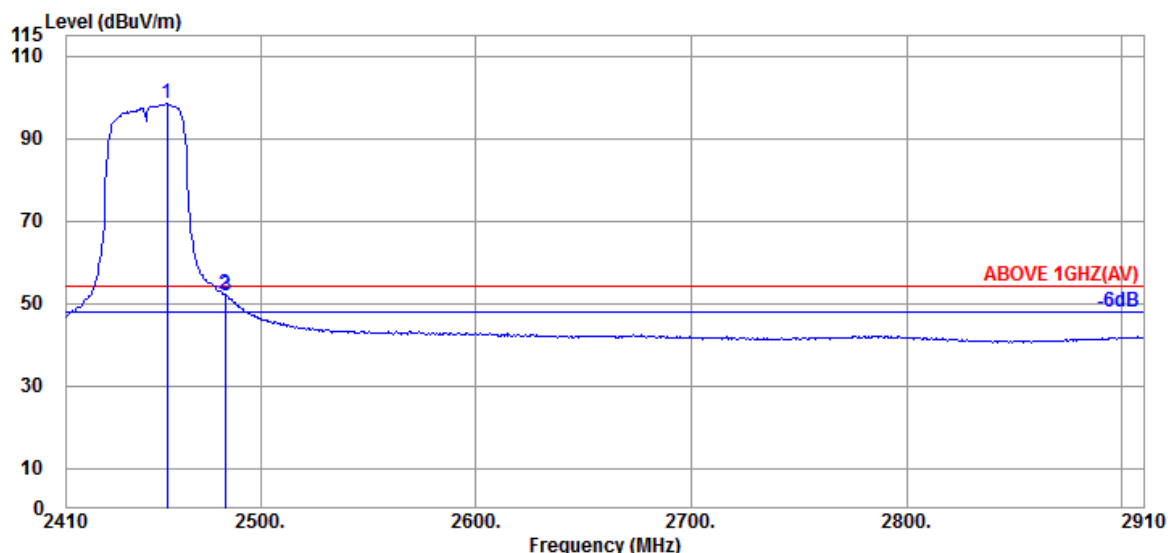

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	28.41	5.83	39.95	104.29	98.58	---	---	Average
2483.500	28.47	5.87	39.94	57.75	52.15	54.00	1.85	Average
2484.000	28.47	5.87	39.94	57.46	51.86	54.00	2.14	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2447MHz
------	--------------	-----------	------------

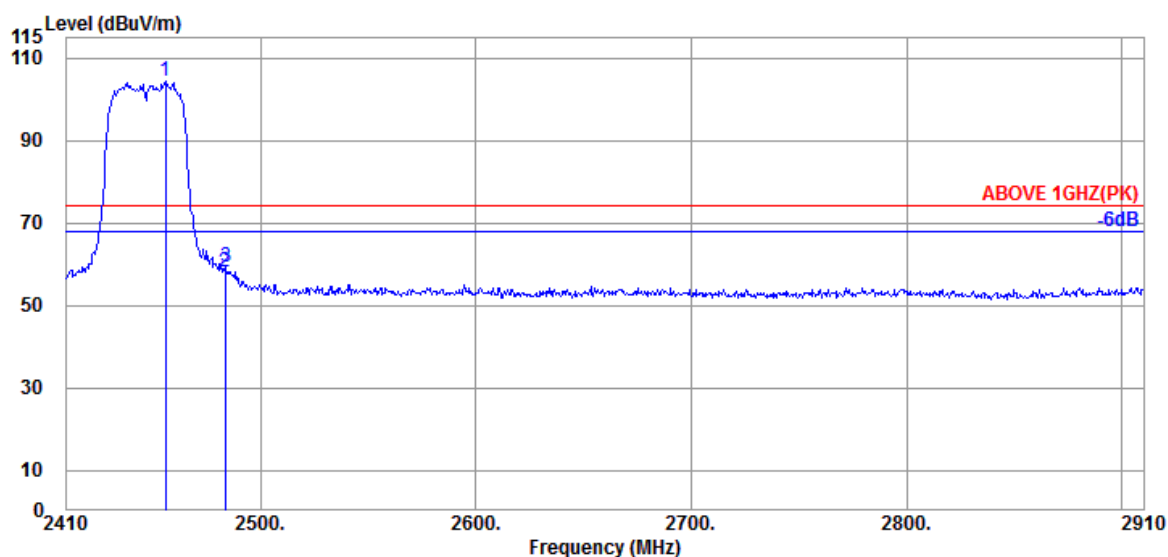

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.000	28.41	5.83	39.95	109.96	104.25	---	---	Peak
2483.500	28.47	5.87	39.94	63.71	58.11	74.00	15.89	Peak
2484.000	28.47	5.87	39.94	64.77	59.17	74.00	14.83	Peak

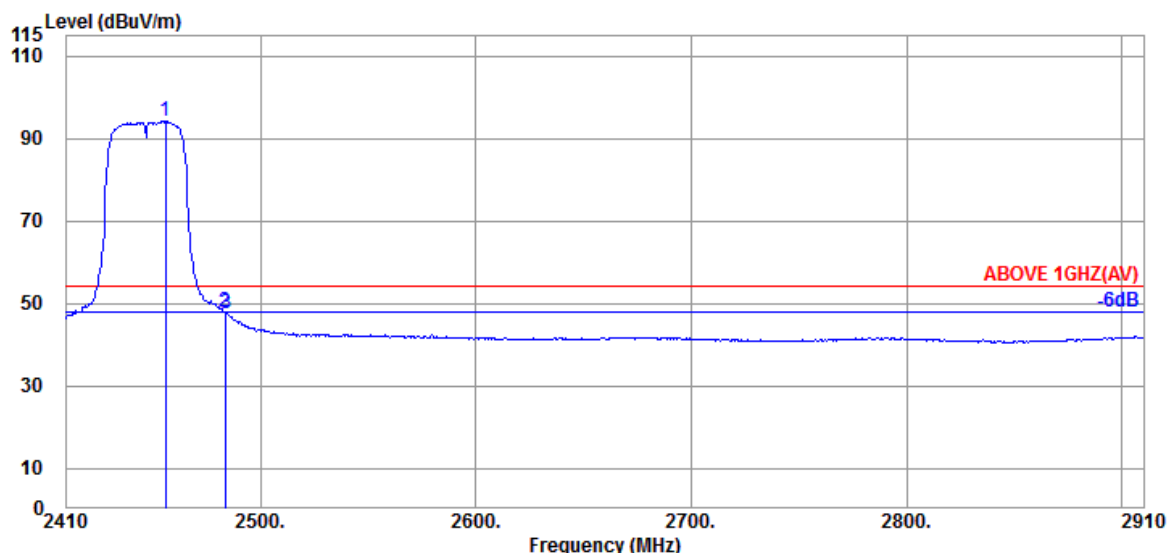


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.000	28.41	5.83	39.95	99.90	94.19	---	---	Average
2483.500	28.47	5.87	39.94	53.34	47.74	54.00	6.26	Average
2484.000	28.47	5.87	39.94	53.21	47.61	54.00	6.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

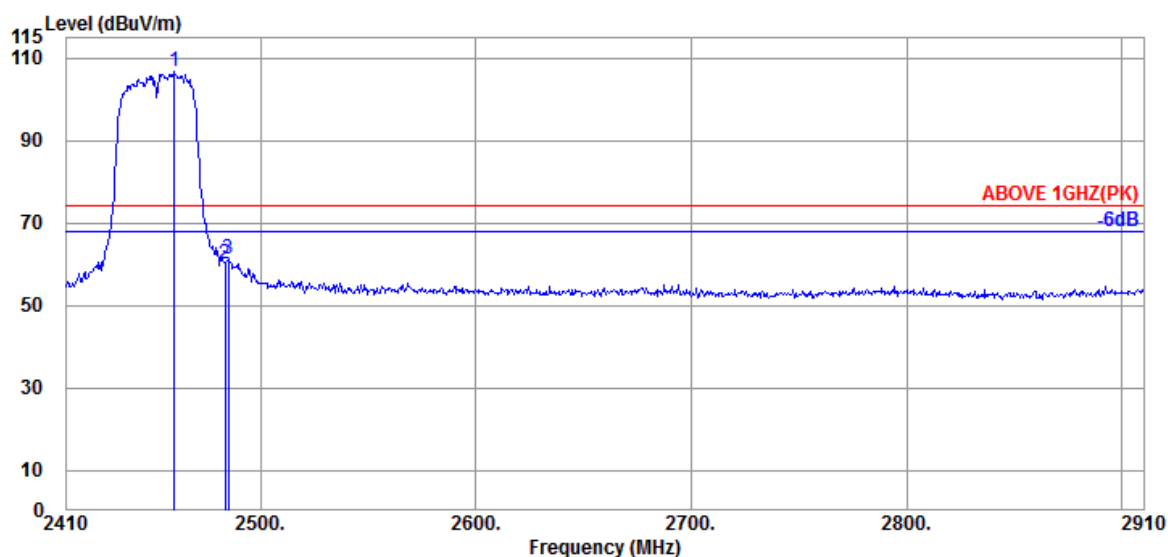

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.000	28.41	5.83	39.95	112.65	106.94	---	---	Peak
2483.500	28.47	5.87	39.94	65.83	60.23	74.00	13.77	Peak
2485.000	28.47	5.87	39.94	66.91	61.31	74.00	12.69	Peak

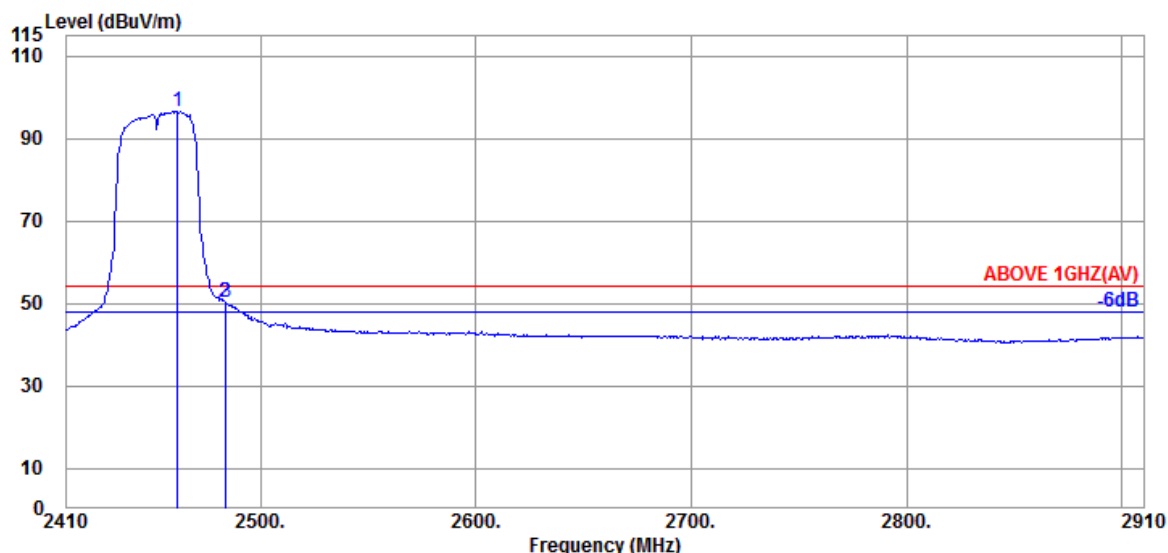

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.500	28.43	5.84	39.95	102.36	96.68	---	---	Average
2483.500	28.47	5.87	39.94	55.69	50.09	54.00	3.91	Average
2484.000	28.47	5.87	39.94	56.00	50.40	54.00	3.60	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

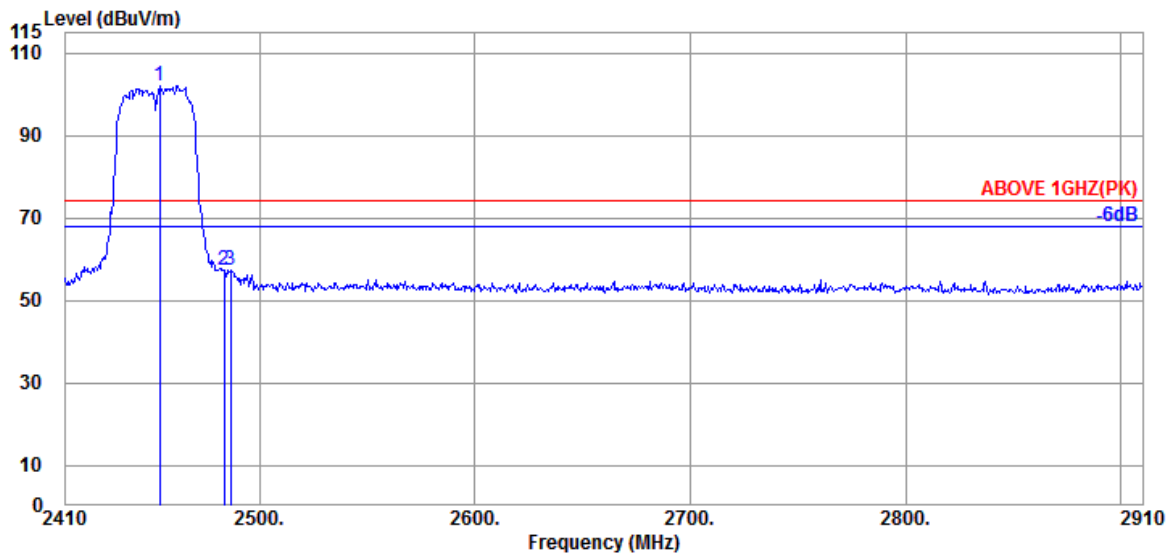

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.500	28.41	5.83	39.95	107.68	101.97	---	---	Peak
2483.500	28.47	5.87	39.94	62.86	57.26	74.00	16.74	Peak
2486.500	28.47	5.87	39.94	62.99	57.39	74.00	16.61	Peak

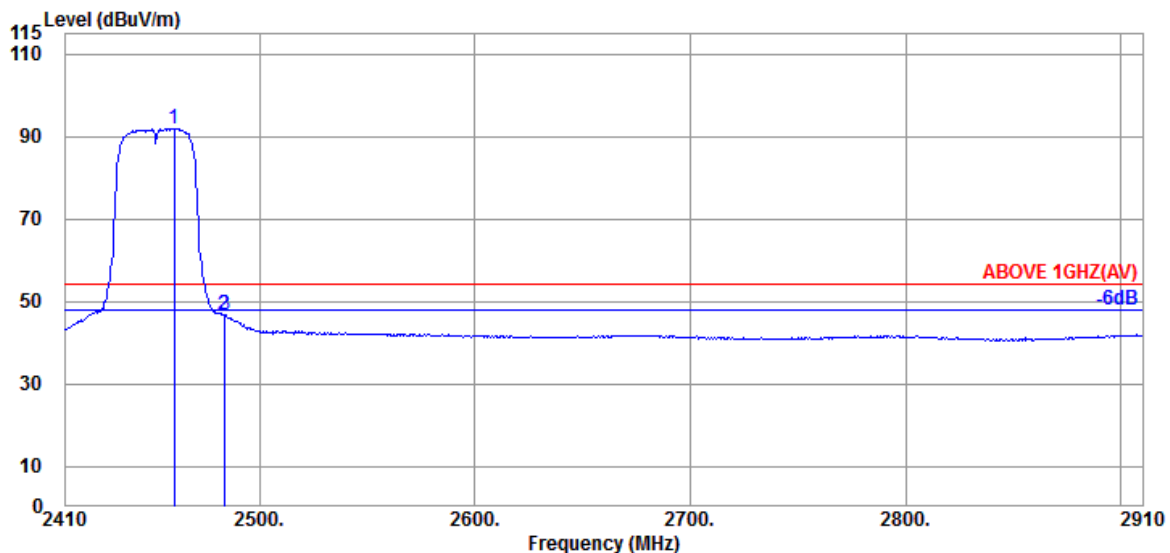

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.500	28.43	5.84	39.95	97.60	91.92	---	---	Average
2483.500	28.47	5.87	39.94	52.35	46.75	54.00	7.25	Average
2484.000	28.47	5.87	39.94	52.29	46.69	54.00	7.31	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

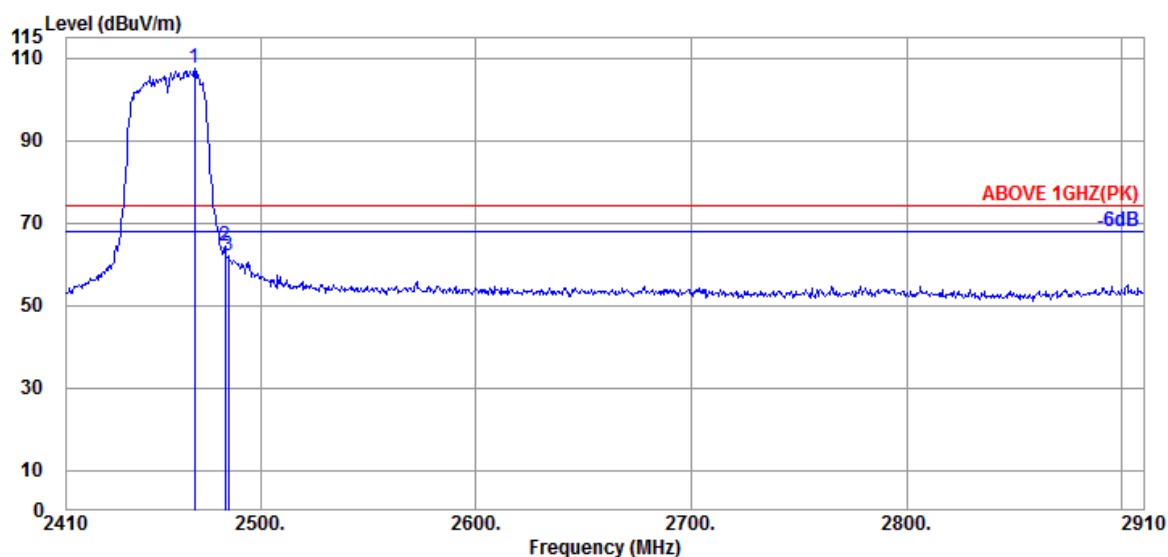

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.500	28.44	5.85	39.94	113.02	107.37	---	---	Peak
2483.500	28.47	5.87	39.94	70.03	64.43	74.00	9.57	Peak
2485.000	28.47	5.87	39.94	67.61	62.01	74.00	11.99	Peak

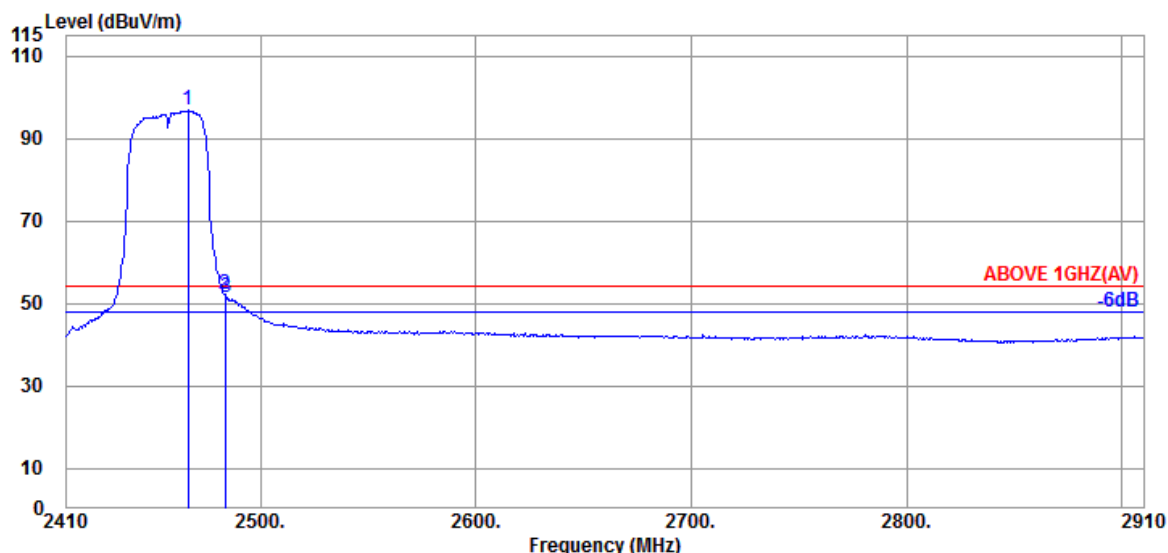

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2466.500	28.43	5.84	39.95	102.52	96.84	---	---	Average
2483.500	28.47	5.87	39.94	57.73	52.13	54.00	1.87	Average
2484.000	28.47	5.87	39.94	57.16	51.56	54.00	2.44	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350


Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

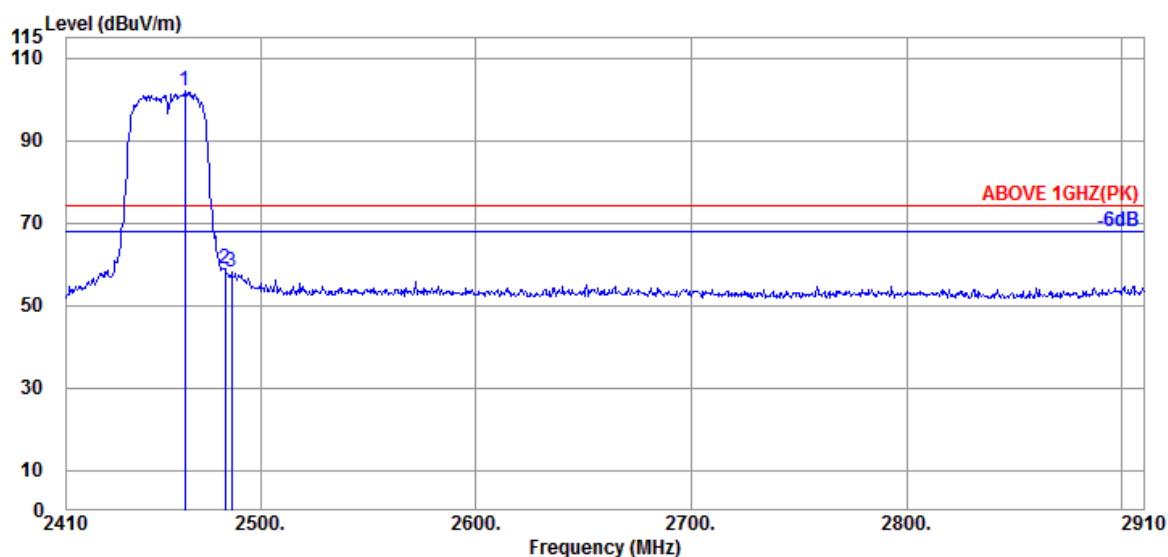

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2465.000	28.43	5.84	39.95	107.55	101.87	---	---	Peak
2483.500	28.47	5.87	39.94	64.41	58.81	74.00	15.19	Peak
2486.500	28.47	5.87	39.94	63.50	57.90	74.00	16.10	Peak

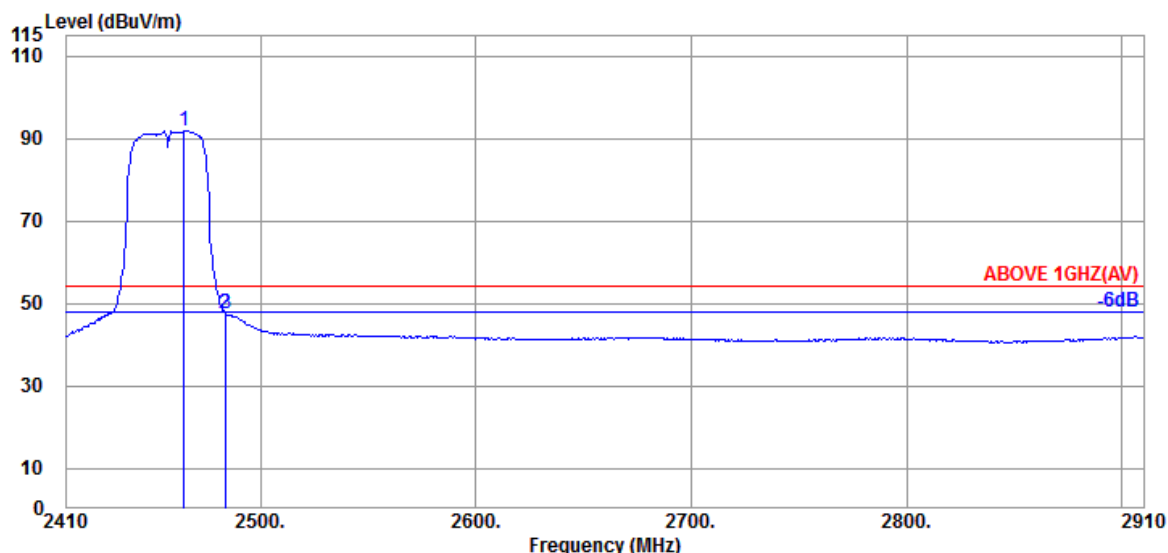

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.500	28.43	5.84	39.95	97.44	91.76	---	---	Average
2483.500	28.47	5.87	39.94	53.26	47.66	54.00	6.34	Average
2484.000	28.47	5.87	39.94	52.92	47.32	54.00	6.68	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

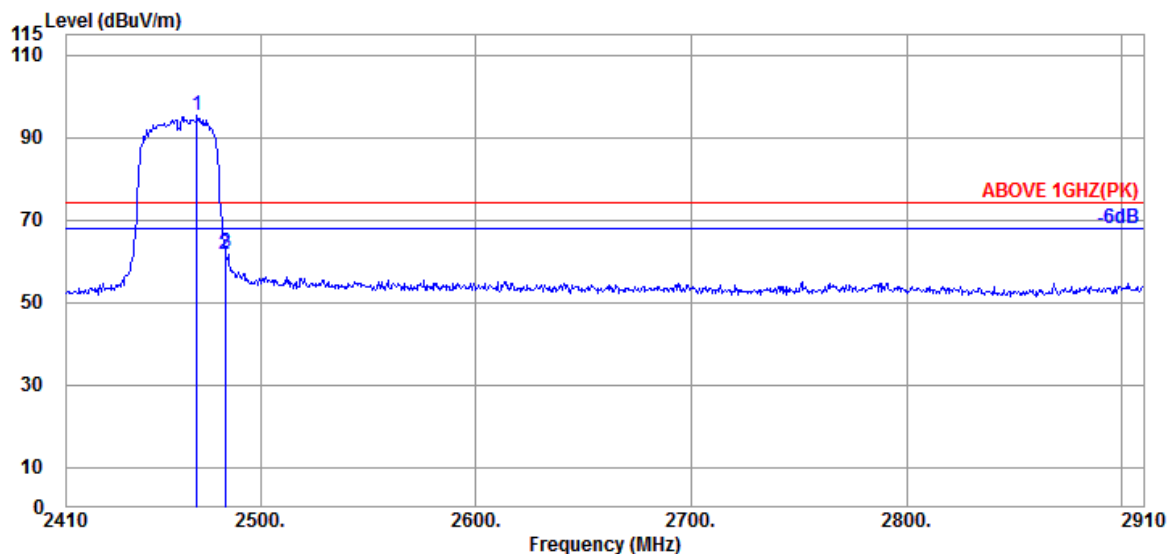

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2470.500	28.44	5.85	39.94	101.16	95.51	---	---	Peak
2483.500	28.47	5.87	39.94	67.38	61.78	74.00	12.22	Peak
2484.000	28.47	5.87	39.94	67.60	62.00	74.00	12.00	Peak

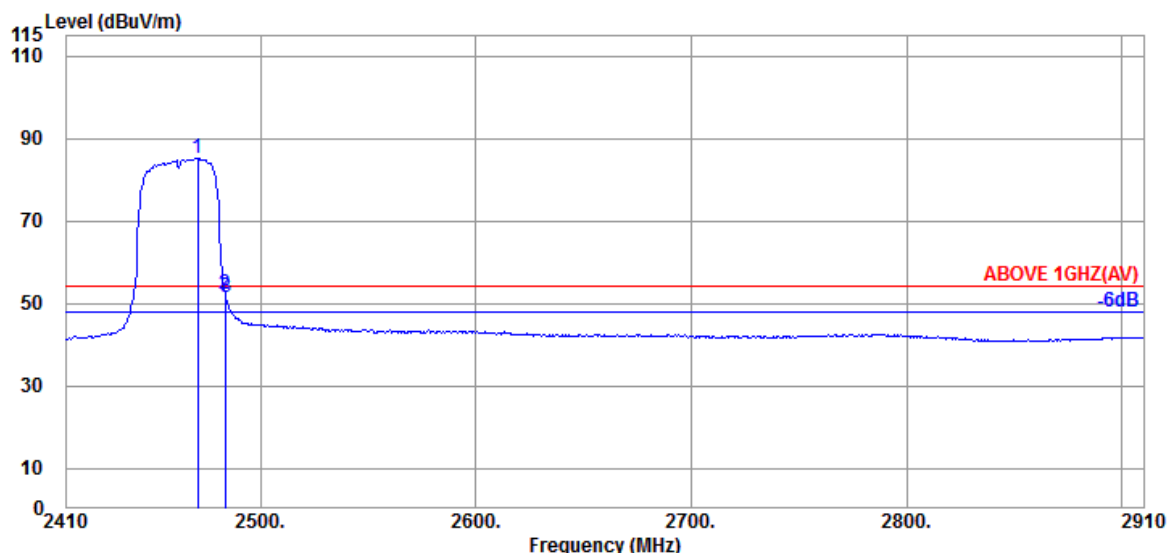

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.44	5.85	39.94	90.90	85.25	---	---	Average
2483.500	28.47	5.87	39.94	57.85	52.25	54.00	1.75	Average
2484.000	28.47	5.87	39.94	56.91	51.31	54.00	2.69	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350


Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

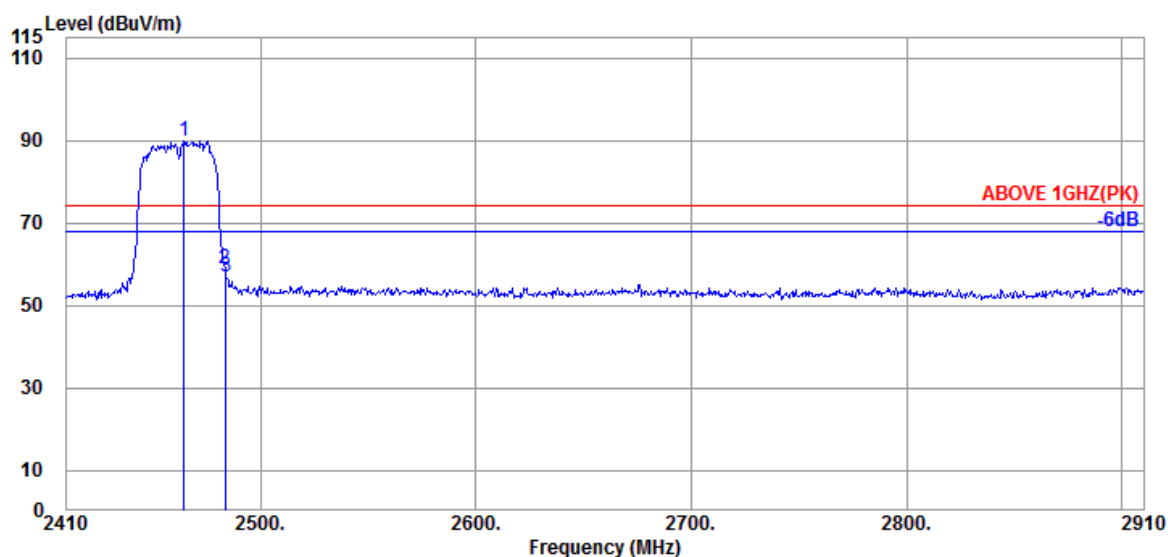

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.500	28.43	5.84	39.95	95.65	89.97	---	---	Peak
2483.500	28.47	5.87	39.94	64.30	58.70	74.00	15.30	Peak
2484.000	28.47	5.87	39.94	62.47	56.87	74.00	17.13	Peak

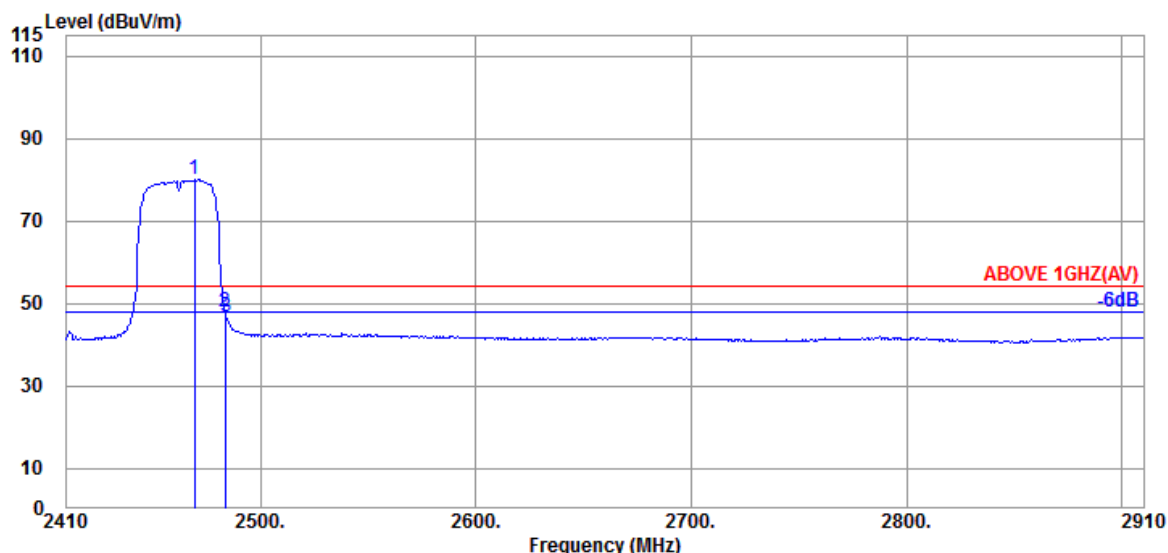

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2469.500	28.44	5.85	39.94	85.71	80.06	---	---	Average
2483.500	28.47	5.87	39.94	53.58	47.98	54.00	6.02	Average
2484.000	28.47	5.87	39.94	52.40	46.80	54.00	7.20	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2201350

Report Number: EM-F220112

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	43.75	46.24	54.00	7.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	44.44	46.93	54.00	7.07	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	39.43	41.92	54.00	12.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	39.51	42.00	54.00	12.00	Peak

Mode	802.11n-HT20	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	39.00	41.49	54.00	12.51	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	39.34	41.83	54.00	12.17	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	38.75	41.24	54.00	12.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.20	8.64	39.35	39.04	41.53	54.00	12.47	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.