



Appendix H: Test Data for E-UTRA Band 38

Product Name: Tablet PC

Test Model: L10

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Ling Zhu





H.1 Conducted Output Power Data

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band38	5MHz	QPSK	37775	1RB#0	24.80	PASS
Band38	5MHz	QPSK	37775	1RB#12	25.04	PASS
Band38	5MHz	QPSK	37775	1RB#24	24.64	PASS
Band38	5MHz	QPSK	37775	12RB#0	23.99	PASS
Band38	5MHz	QPSK	37775	12RB#6	24.00	PASS
Band38	5MHz	QPSK	37775	12RB#13	23.95	PASS
Band38	5MHz	QPSK	37775	25RB#0	24.00	PASS
Band38	5MHz	QPSK	38000	1RB#0	24.10	PASS
Band38	5MHz	QPSK	38000	1RB#12	24.43	PASS
Band38	5MHz	QPSK	38000	1RB#24	24.06	PASS
Band38	5MHz	QPSK	38000	12RB#0	23.87	PASS
Band38	5MHz	QPSK	38000	12RB#6	23.81	PASS
Band38	5MHz	QPSK	38000	12RB#13	23.90	PASS
Band38	5MHz	QPSK	38000	25RB#0	23.84	PASS
Band38	5MHz	QPSK	38225	1RB#0	24.13	PASS
Band38	5MHz	QPSK	38225	1RB#12	24.47	PASS
Band38	5MHz	QPSK	38225	1RB#24	23.97	PASS
Band38	5MHz	QPSK	38225	12RB#0	24.21	PASS
Band38	5MHz	QPSK	38225	12RB#6	24.23	PASS
Band38	5MHz	QPSK	38225	12RB#13	24.18	PASS
Band38	5MHz	QPSK	38225	25RB#0	24.11	PASS
Band38	5MHz	16QAM	37775	1RB#0	24.22	PASS
Band38	5MHz	16QAM	37775	1RB#12	24.17	PASS
Band38	5MHz	16QAM	37775	1RB#24	24.15	PASS
Band38	5MHz	16QAM	37775	12RB#0	23.07	PASS
Band38	5MHz	16QAM	37775	12RB#6	23.18	PASS
Band38	5MHz	16QAM	37775	12RB#13	23.12	PASS
Band38	5MHz	16QAM	37775	25RB#0	23.21	PASS
Band38	5MHz	16QAM	38000	1RB#0	23.99	PASS
Band38	5MHz	16QAM	38000	1RB#12	24.08	PASS
Band38	5MHz	16QAM	38000	1RB#24	24.16	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	5MHz	16QAM	38000	12RB#0	22.90	PASS
Band38	5MHz	16QAM	38000	12RB#6	22.92	PASS
Band38	5MHz	16QAM	38000	12RB#13	22.88	PASS
Band38	5MHz	16QAM	38000	25RB#0	22.96	PASS
Band38	5MHz	16QAM	38225	1RB#0	24.33	PASS
Band38	5MHz	16QAM	38225	1RB#12	24.68	PASS
Band38	5MHz	16QAM	38225	1RB#24	24.21	PASS
Band38	5MHz	16QAM	38225	12RB#0	23.30	PASS
Band38	5MHz	16QAM	38225	12RB#6	23.30	PASS
Band38	5MHz	16QAM	38225	12RB#13	23.16	PASS
Band38	5MHz	16QAM	38225	25RB#0	23.27	PASS
Band38	10MHz	QPSK	37800	1RB#0	25.06	PASS
Band38	10MHz	QPSK	37800	1RB#24	24.98	PASS
Band38	10MHz	QPSK	37800	1RB#49	24.95	PASS
Band38	10MHz	QPSK	37800	25RB#0	23.98	PASS
Band38	10MHz	QPSK	37800	25RB#12	23.94	PASS
Band38	10MHz	QPSK	37800	25RB#25	23.91	PASS
Band38	10MHz	QPSK	37800	50RB#0	23.89	PASS
Band38	10MHz	QPSK	38000	1RB#0	24.38	PASS
Band38	10MHz	QPSK	38000	1RB#24	24.52	PASS
Band38	10MHz	QPSK	38000	1RB#49	24.70	PASS
Band38	10MHz	QPSK	38000	25RB#0	23.72	PASS
Band38	10MHz	QPSK	38000	25RB#12	23.73	PASS
Band38	10MHz	QPSK	38000	25RB#25	23.90	PASS
Band38	10MHz	QPSK	38000	50RB#0	23.80	PASS
Band38	10MHz	QPSK	38200	1RB#0	24.57	PASS
Band38	10MHz	QPSK	38200	1RB#24	24.76	PASS
Band38	10MHz	QPSK	38200	1RB#49	24.86	PASS
Band38	10MHz	QPSK	38200	25RB#0	24.19	PASS
Band38	10MHz	QPSK	38200	25RB#12	24.20	PASS
Band38	10MHz	QPSK	38200	25RB#25	24.28	PASS
Band38	10MHz	QPSK	38200	50RB#0	24.20	PASS
Band38	10MHz	16QAM	37800	1RB#0	24.37	PASS
Band38	10MHz	16QAM	37800	1RB#24	24.26	PASS
Band38	10MHz	16QAM	37800	1RB#49	24.22	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	10MHz	16QAM	37800	25RB#0	23.01	PASS
Band38	10MHz	16QAM	37800	25RB#12	22.98	PASS
Band38	10MHz	16QAM	37800	25RB#25	23.05	PASS
Band38	10MHz	16QAM	37800	50RB#0	22.96	PASS
Band38	10MHz	16QAM	38000	1RB#0	24.06	PASS
Band38	10MHz	16QAM	38000	1RB#24	24.08	PASS
Band38	10MHz	16QAM	38000	1RB#49	24.17	PASS
Band38	10MHz	16QAM	38000	25RB#0	22.88	PASS
Band38	10MHz	16QAM	38000	25RB#12	22.89	PASS
Band38	10MHz	16QAM	38000	25RB#25	22.90	PASS
Band38	10MHz	16QAM	38000	50RB#0	22.90	PASS
Band38	10MHz	16QAM	38200	1RB#0	23.99	PASS
Band38	10MHz	16QAM	38200	1RB#24	23.93	PASS
Band38	10MHz	16QAM	38200	1RB#49	24.03	PASS
Band38	10MHz	16QAM	38200	25RB#0	23.58	PASS
Band38	10MHz	16QAM	38200	25RB#12	23.58	PASS
Band38	10MHz	16QAM	38200	25RB#25	23.65	PASS
Band38	10MHz	16QAM	38200	50RB#0	23.26	PASS
Band38	15MHz	QPSK	37825	1RB#0	25.01	PASS
Band38	15MHz	QPSK	37825	1RB#38	24.93	PASS
Band38	15MHz	QPSK	37825	1RB#74	24.78	PASS
Band38	15MHz	QPSK	37825	38RB#0	23.96	PASS
Band38	15MHz	QPSK	37825	38RB#18	23.95	PASS
Band38	15MHz	QPSK	37825	38RB#37	23.95	PASS
Band38	15MHz	QPSK	37825	75RB#0	23.96	PASS
Band38	15MHz	QPSK	38000	1RB#0	24.61	PASS
Band38	15MHz	QPSK	38000	1RB#38	24.59	PASS
Band38	15MHz	QPSK	38000	1RB#74	24.62	PASS
Band38	15MHz	QPSK	38000	38RB#0	23.82	PASS
Band38	15MHz	QPSK	38000	38RB#18	23.82	PASS
Band38	15MHz	QPSK	38000	38RB#37	23.82	PASS
Band38	15MHz	QPSK	38000	75RB#0	23.82	PASS
Band38	15MHz	QPSK	38175	1RB#0	24.89	PASS
Band38	15MHz	QPSK	38175	1RB#38	24.96	PASS
Band38	15MHz	QPSK	38175	1RB#74	24.84	PASS





Band38	15MHz	QPSK	38175	38RB#0	24.23	PASS
Band38	15MHz	QPSK	38175	38RB#18	24.10	PASS
Band38	15MHz	QPSK	38175	38RB#37	24.09	PASS
Band38	15MHz	QPSK	38175	75RB#0	24.09	PASS
Band38	15MHz	16QAM	37825	1RB#0	24.29	PASS
Band38	15MHz	16QAM	37825	1RB#38	24.30	PASS
Band38	15MHz	16QAM	37825	1RB#74	24.17	PASS
Band38	15MHz	16QAM	37825	38RB#0	23.95	PASS
Band38	15MHz	16QAM	37825	38RB#18	23.95	PASS
Band38	15MHz	16QAM	37825	38RB#37	23.96	PASS
Band38	15MHz	16QAM	37825	75RB#0	23.04	PASS
Band38	15MHz	16QAM	38000	1RB#0	24.01	PASS
Band38	15MHz	16QAM	38000	1RB#38	24.07	PASS
Band38	15MHz	16QAM	38000	1RB#74	24.28	PASS
Band38	15MHz	16QAM	38000	38RB#0	23.82	PASS
Band38	15MHz	16QAM	38000	38RB#18	23.82	PASS
Band38	15MHz	16QAM	38000	38RB#37	23.82	PASS
Band38	15MHz	16QAM	38000	75RB#0	22.92	PASS
Band38	15MHz	16QAM	38175	1RB#0	23.45	PASS
Band38	15MHz	16QAM	38175	1RB#38	23.51	PASS
Band38	15MHz	16QAM	38175	1RB#74	23.53	PASS
Band38	15MHz	16QAM	38175	38RB#0	24.10	PASS
Band38	15MHz	16QAM	38175	38RB#18	24.09	PASS
Band38	15MHz	16QAM	38175	38RB#37	24.09	PASS
Band38	15MHz	16QAM	38175	75RB#0	23.30	PASS
Band38	20MHz	QPSK	37850	1RB#0	24.81	PASS
Band38	20MHz	QPSK	37850	1RB#49	24.69	PASS
Band38	20MHz	QPSK	37850	1RB#99	24.69	PASS
Band38	20MHz	QPSK	37850	50RB#0	23.85	PASS
Band38	20MHz	QPSK	37850	50RB#25	23.86	PASS
Band38	20MHz	QPSK	37850	50RB#50	23.78	PASS
Band38	20MHz	QPSK	37850	100RB#0	23.80	PASS
Band38	20MHz	QPSK	38000	1RB#0	24.74	PASS
Band38	20MHz	QPSK	38000	1RB#49	24.69	PASS
Band38	20MHz	QPSK	38000	1RB#99	25.15	PASS





Band38	20MHz	QPSK	38000	50RB#0	23.80	PASS
Band38	20MHz	QPSK	38000	50RB#25	23.82	PASS
Band38	20MHz	QPSK	38000	50RB#50	24.00	PASS
Band38	20MHz	QPSK	38000	100RB#0	23.89	PASS
Band38	20MHz	QPSK	38150	1RB#0	24.74	PASS
Band38	20MHz	QPSK	38150	1RB#49	24.88	PASS
Band38	20MHz	QPSK	38150	1RB#99	25.15	PASS
Band38	20MHz	QPSK	38150	50RB#0	24.04	PASS
Band38	20MHz	QPSK	38150	50RB#25	24.05	PASS
Band38	20MHz	QPSK	38150	50RB#50	24.21	PASS
Band38	20MHz	QPSK	38150	100RB#0	24.10	PASS
Band38	20MHz	16QAM	37850	1RB#0	24.14	PASS
Band38	20MHz	16QAM	37850	1RB#49	24.04	PASS
Band38	20MHz	16QAM	37850	1RB#99	24.03	PASS
Band38	20MHz	16QAM	37850	50RB#0	23.18	PASS
Band38	20MHz	16QAM	37850	50RB#25	23.18	PASS
Band38	20MHz	16QAM	37850	50RB#50	22.94	PASS
Band38	20MHz	16QAM	37850	100RB#0	22.94	PASS
Band38	20MHz	16QAM	38000	1RB#0	23.61	PASS
Band38	20MHz	16QAM	38000	1RB#49	23.66	PASS
Band38	20MHz	16QAM	38000	1RB#99	23.98	PASS
Band38	20MHz	16QAM	38000	50RB#0	22.90	PASS
Band38	20MHz	16QAM	38000	50RB#25	22.91	PASS
Band38	20MHz	16QAM	38000	50RB#50	23.04	PASS
Band38	20MHz	16QAM	38000	100RB#0	22.94	PASS
Band38	20MHz	16QAM	38150	1RB#0	23.79	PASS
Band38	20MHz	16QAM	38150	1RB#49	23.93	PASS
Band38	20MHz	16QAM	38150	1RB#99	23.90	PASS
Band38	20MHz	16QAM	38150	50RB#0	23.10	PASS
Band38	20MHz	16QAM	38150	50RB#25	23.11	PASS
Band38	20MHz	16QAM	38150	50RB#50	23.25	PASS
Band38	20MHz	16QAM	38150	100RB#0	23.24	PASS





H.2 Peak-to-Average Ratio(CCDF)

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band38	5MHz	QPSK	37775	25RB#0	3.54	13	PASS
Band38	5MHz	QPSK	38000	25RB#0	3.22	13	PASS
Band38	5MHz	QPSK	38225	25RB#0	4.06	13	PASS
Band38	5MHz	16QAM	37775	25RB#0	4.32	13	PASS
Band38	5MHz	16QAM	38000	25RB#0	4.04	13	PASS
Band38	5MHz	16QAM	38225	25RB#0	4.93	13	PASS
Band38	10MHz	QPSK	37800	50RB#0	3.42	13	PASS
Band38	10MHz	QPSK	38000	50RB#0	3.32	13	PASS
Band38	10MHz	QPSK	38200	50RB#0	4.20	13	PASS
Band38	10MHz	16QAM	37800	50RB#0	4.20	13	PASS
Band38	10MHz	16QAM	38000	50RB#0	4.11	13	PASS
Band38	10MHz	16QAM	38200	50RB#0	4.95	13	PASS
Band38	15MHz	QPSK	37825	75RB#0	3.87	13	PASS
Band38	15MHz	QPSK	38000	75RB#0	3.78	13	PASS
Band38	15MHz	QPSK	38175	75RB#0	4.57	13	PASS
Band38	15MHz	16QAM	37825	75RB#0	4.49	13	PASS
Band38	15MHz	16QAM	38000	75RB#0	4.52	13	PASS
Band38	15MHz	16QAM	38175	75RB#0	5.22	13	PASS
Band38	20MHz	QPSK	37850	100RB#0	4.09	13	PASS
Band38	20MHz	QPSK	38000	100RB#0	4.10	13	PASS
Band38	20MHz	QPSK	38150	100RB#0	4.70	13	PASS
Band38	20MHz	16QAM	37850	100RB#0	4.75	13	PASS
Band38	20MHz	16QAM	38000	100RB#0	4.88	13	PASS
Band38	20MHz	16QAM	38150	100RB#0	5.38	13	PASS






Test Graphs

Band38-5MHz-QPSK-37775-25RB#0

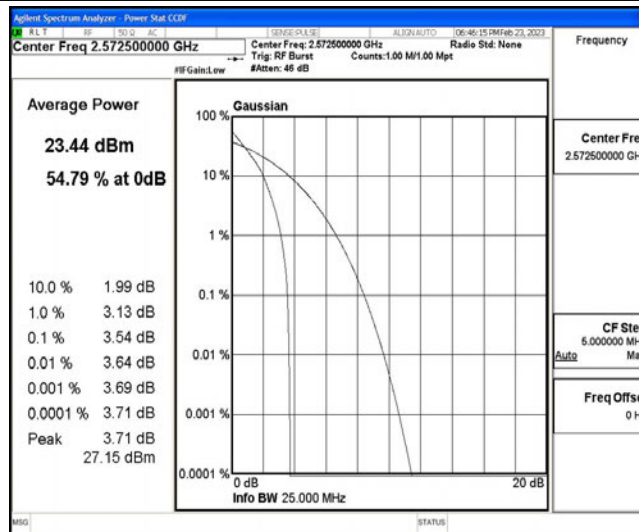


Band38-5MHz-QPSK-38000-25RB#0

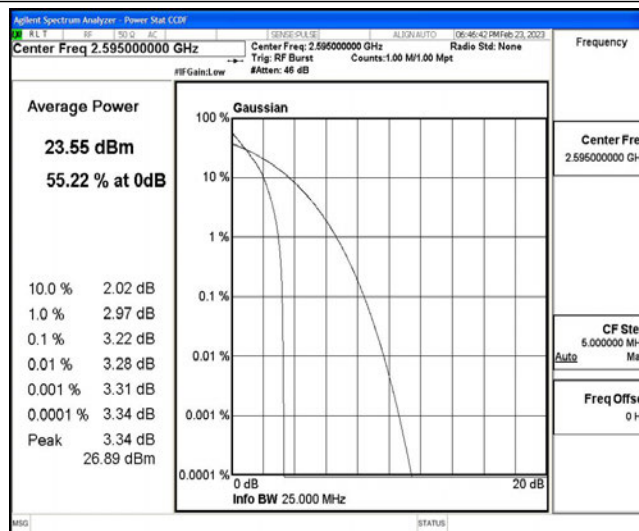


Band38-5MHz-QPSK-38225-25RB#0




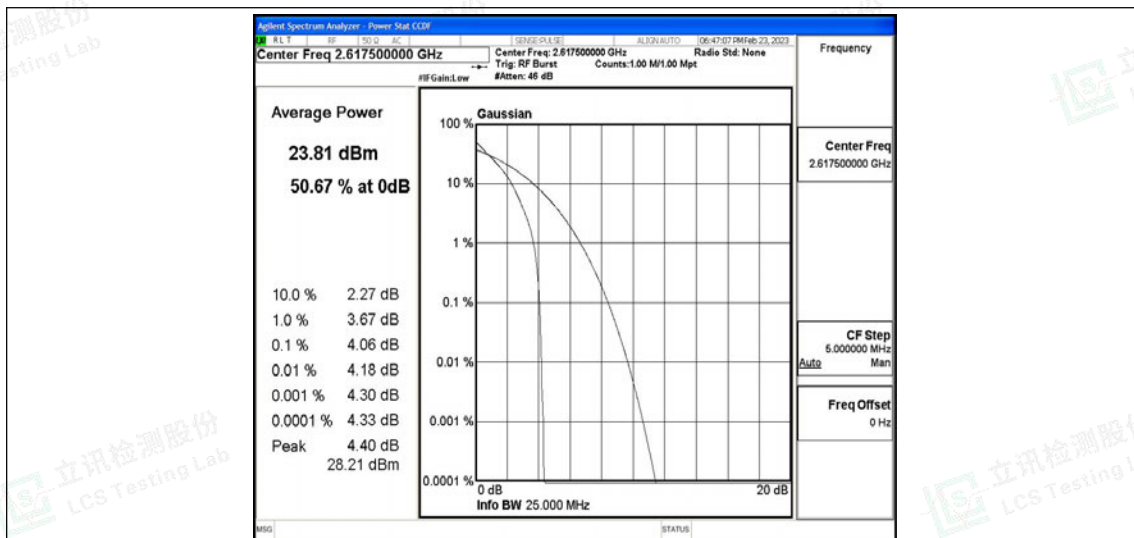

Band38-5MHz-16QAM-37775-25RB#0

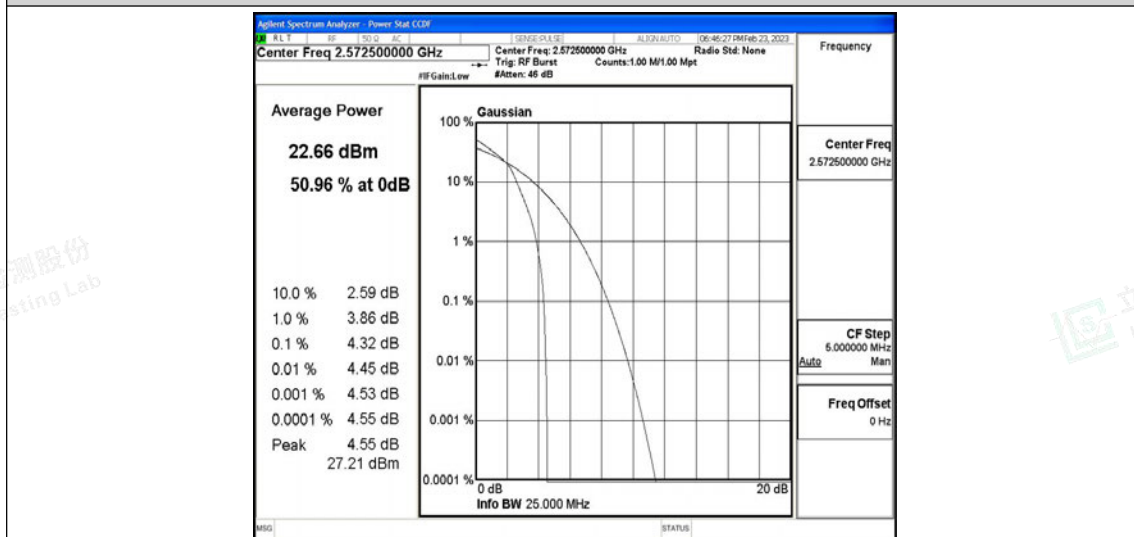


Band38-5MHz-16QAM-38000-25RB#0

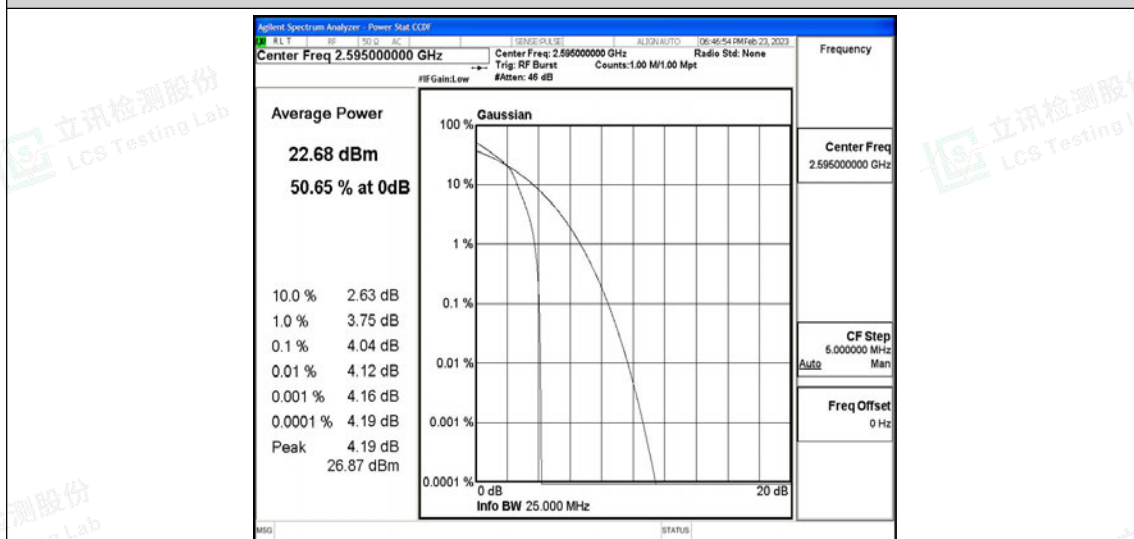


Band38-5MHz-16QAM-38225-25RB#0




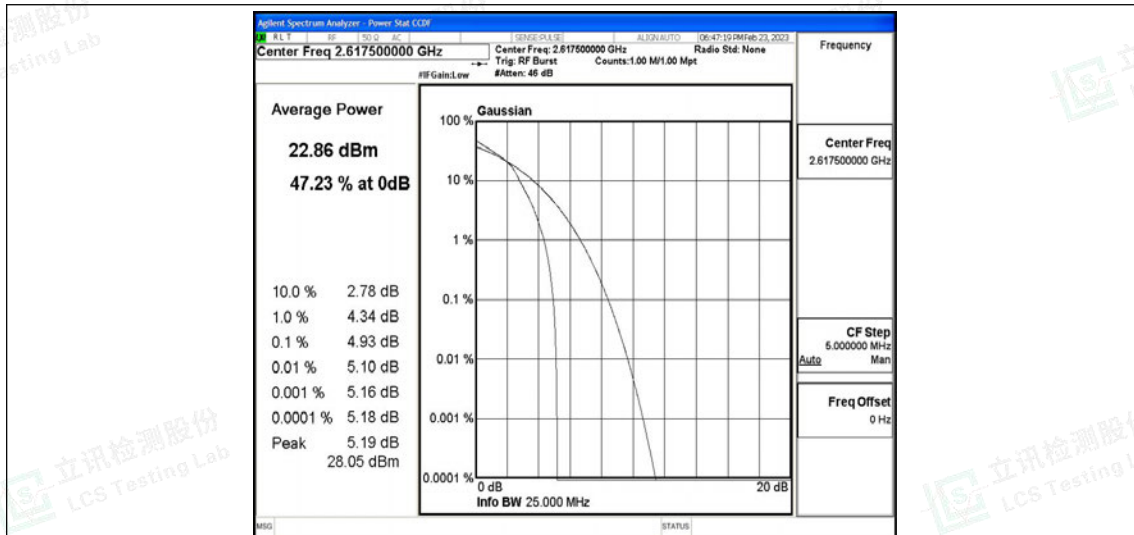

Band38-10MHz-QPSK-37800-50RB#0

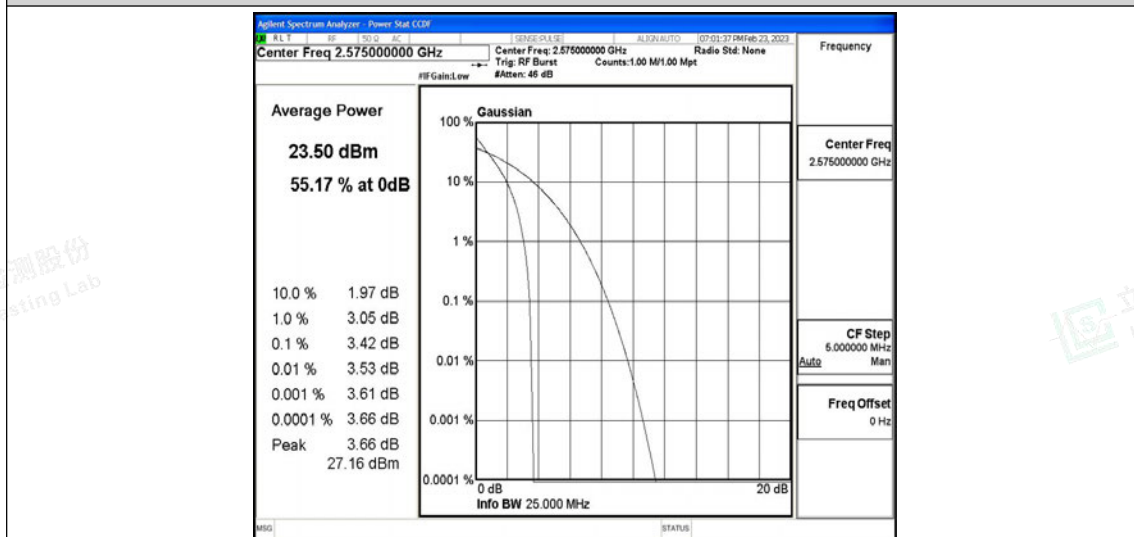


Band38-10MHz-QPSK-38000-50RB#0

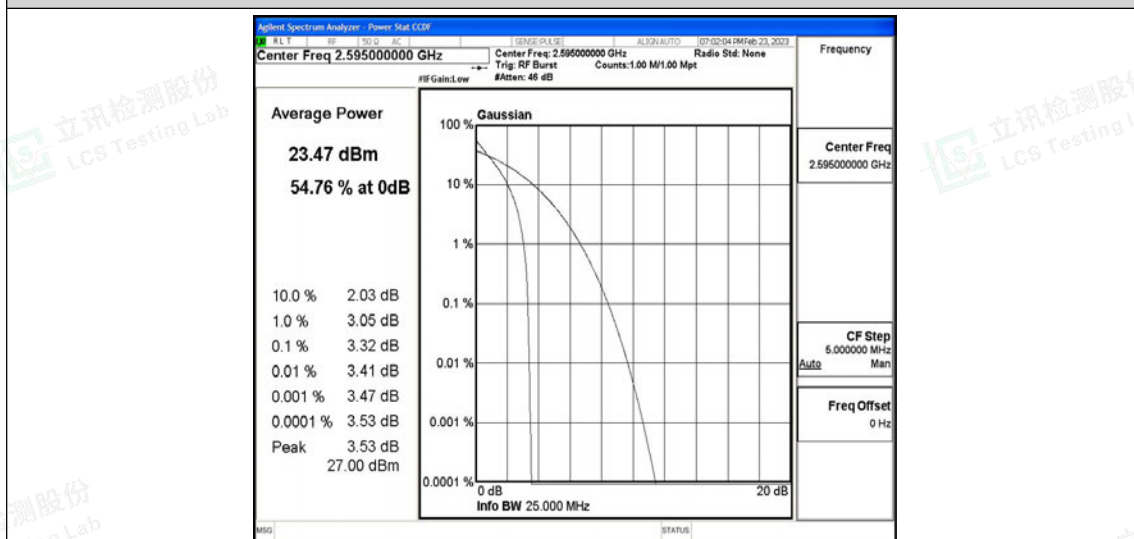


Band38-10MHz-QPSK-38200-50RB#0




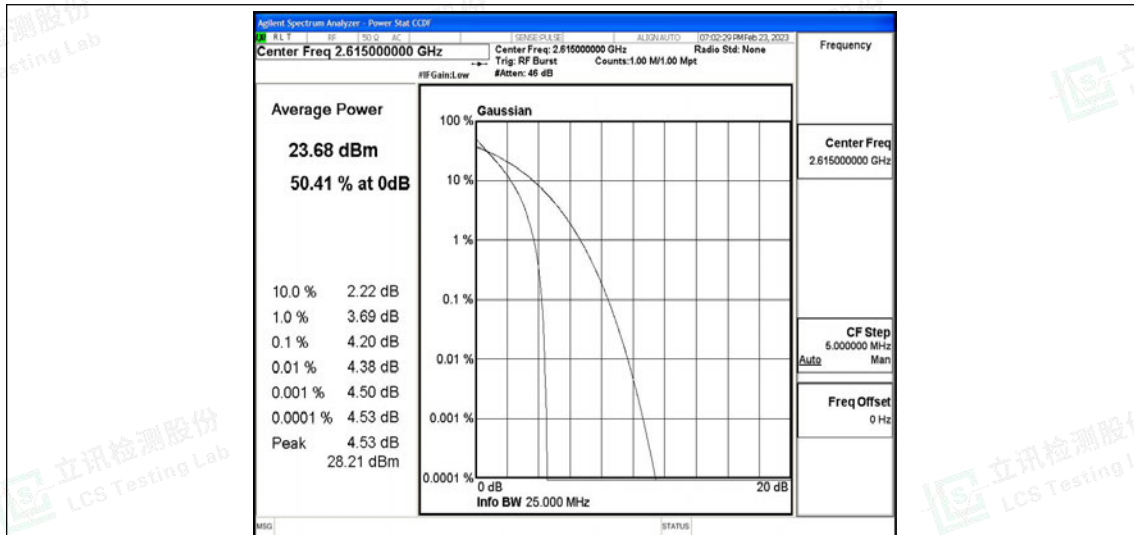

Band38-10MHz-16QAM-37800-50RB#0

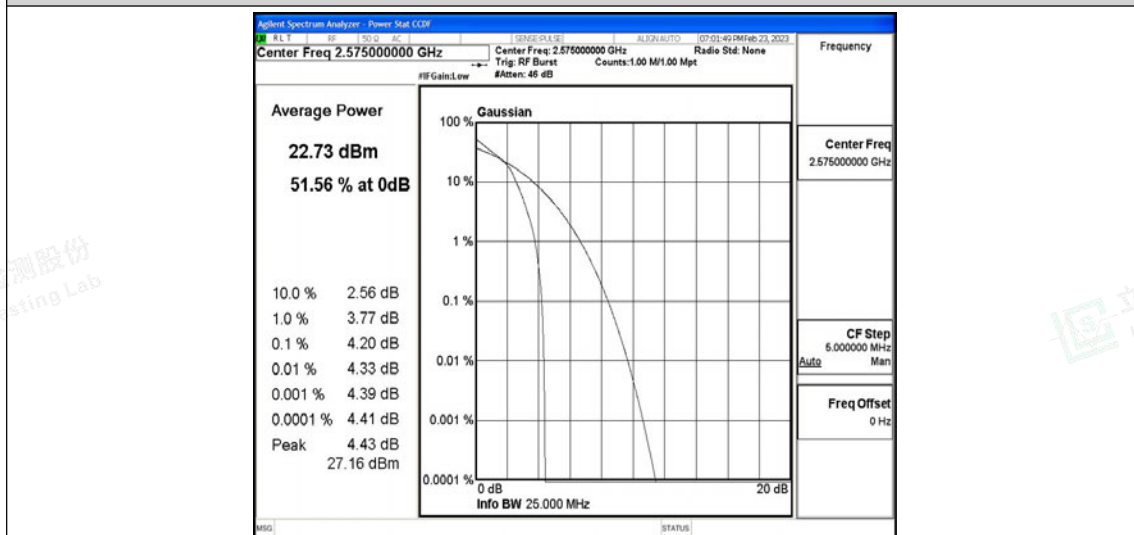


Band38-10MHz-16QAM-38000-50RB#0

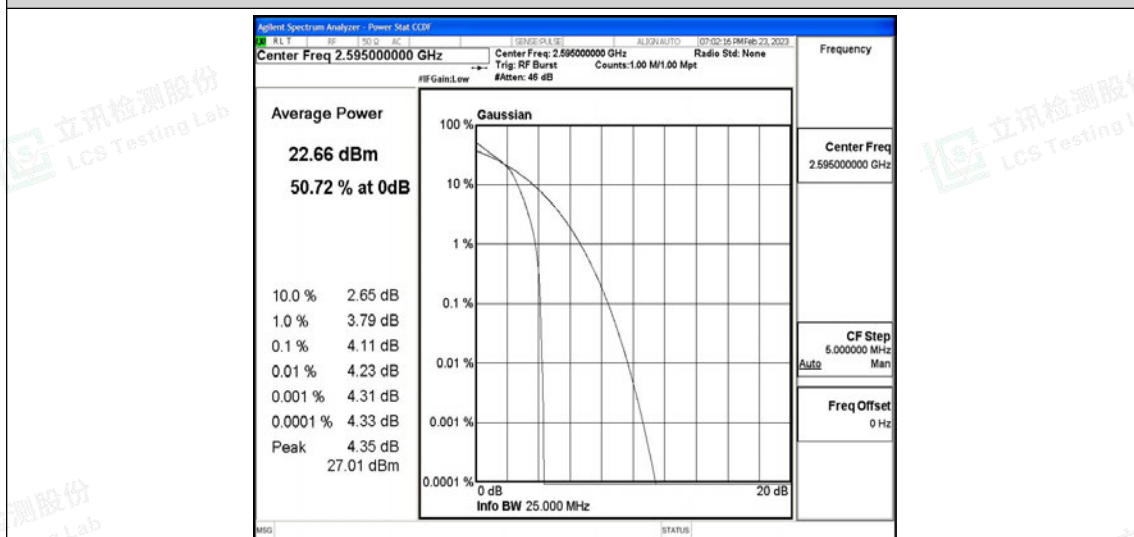


Band38-10MHz-16QAM-38200-50RB#0




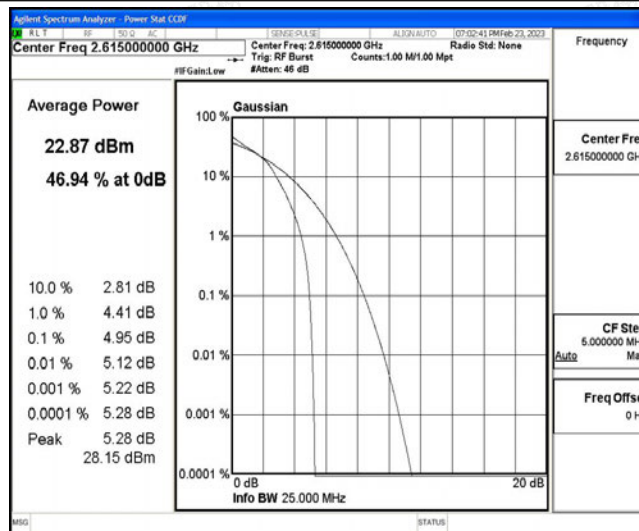

Band38-15MHz-QPSK-37825-75RB#0

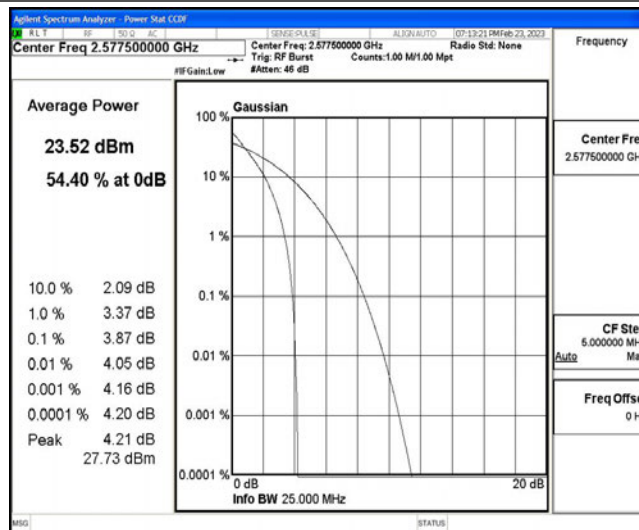

Band38-15MHz-QPSK-38000-75RB#0

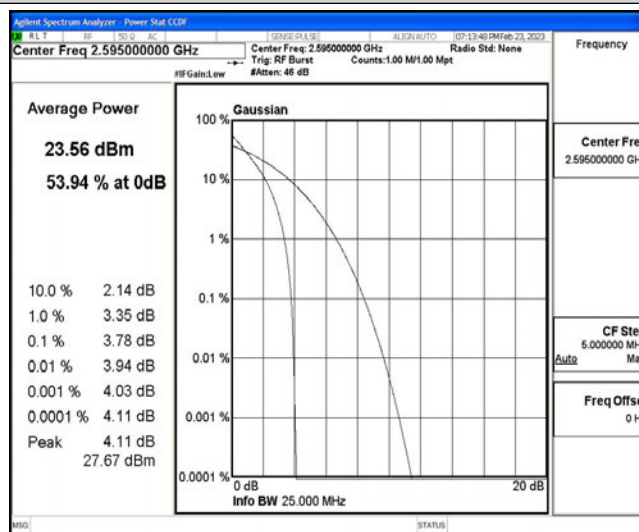

Band38-15MHz-QPSK-38175-75RB#0




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

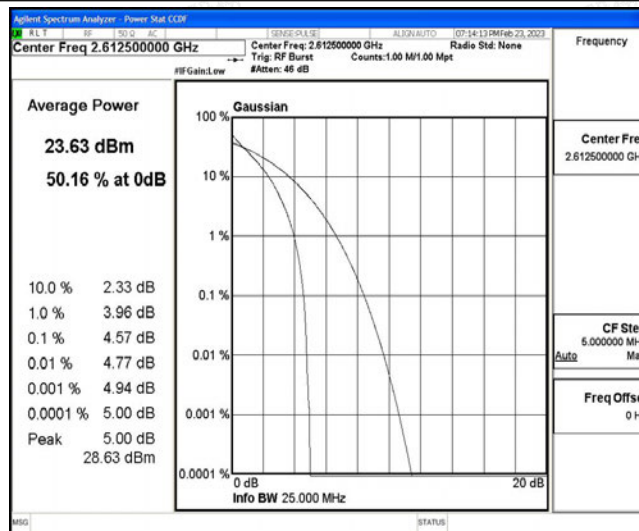

Band38-15MHz-16QAM-37825-75RB#0

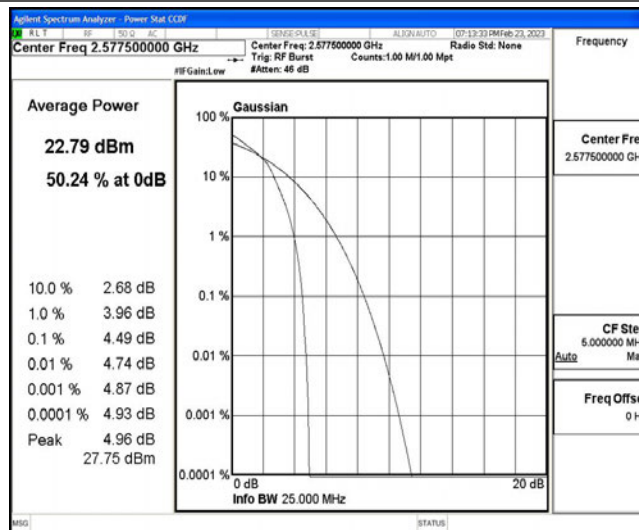

Band38-15MHz-16QAM-38000-75RB#0

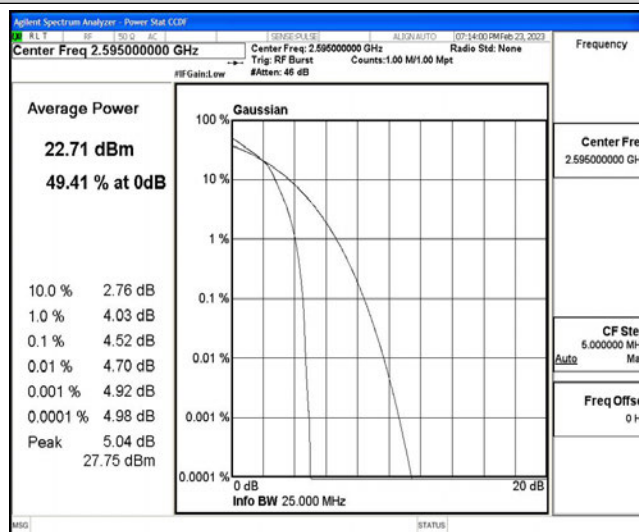

Band38-15MHz-16QAM-38175-75RB#0




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

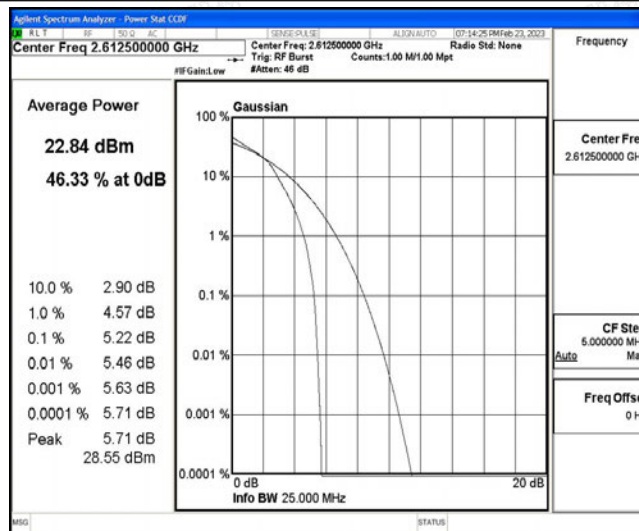

Band38-20MHz-QPSK-37850-100RB#0

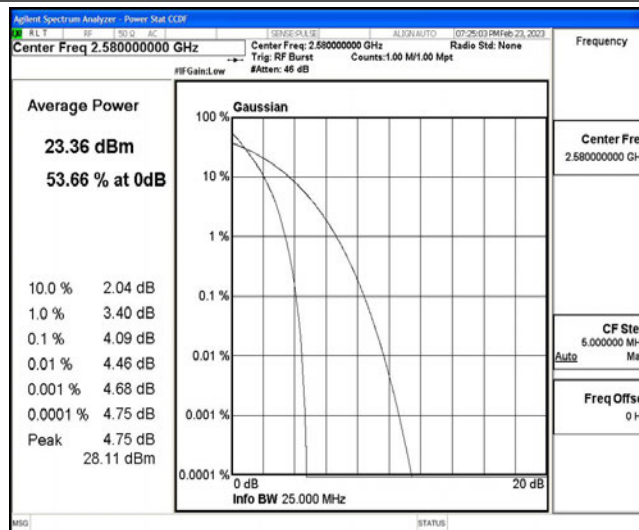

Band38-20MHz-QPSK-38000-100RB#0

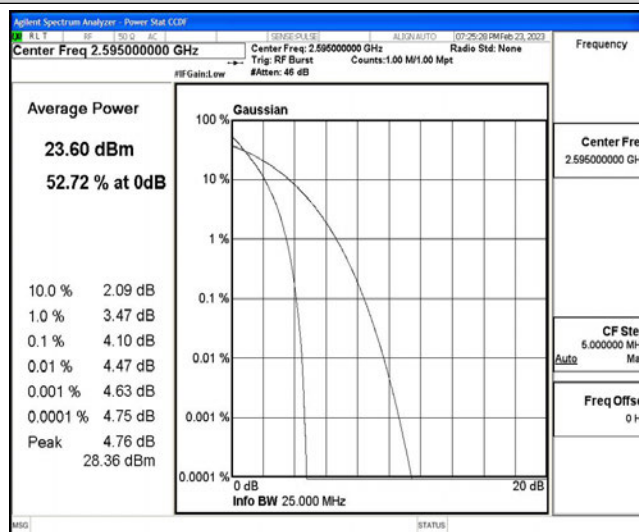

Band38-20MHz-QPSK-38150-100RB#0




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

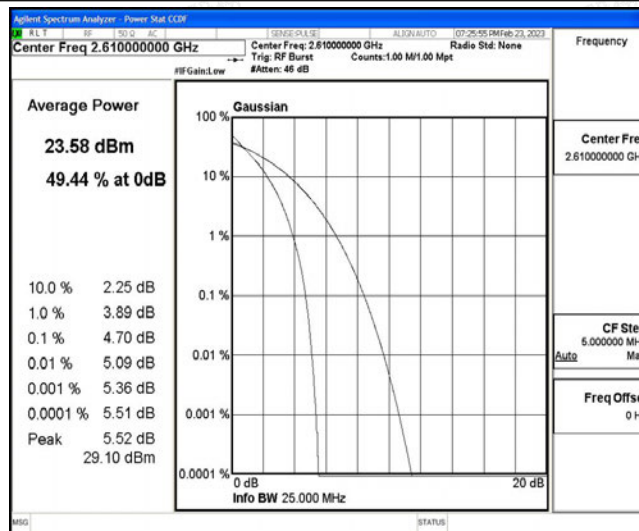

Band38-20MHz-16QAM-37850-100RB#0

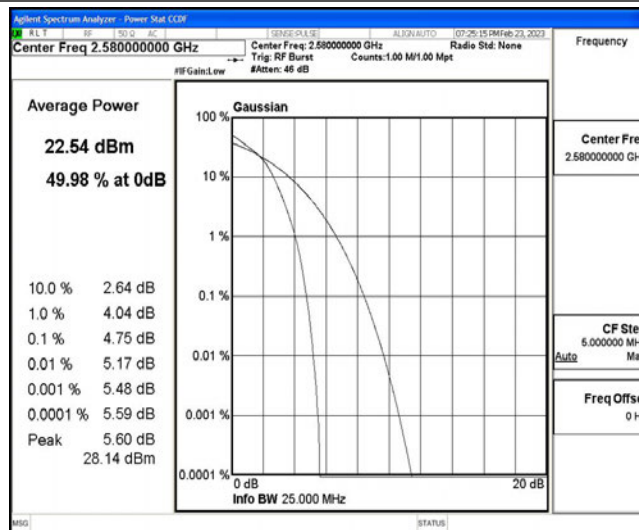

Band38-20MHz-16QAM-38000-100RB#0

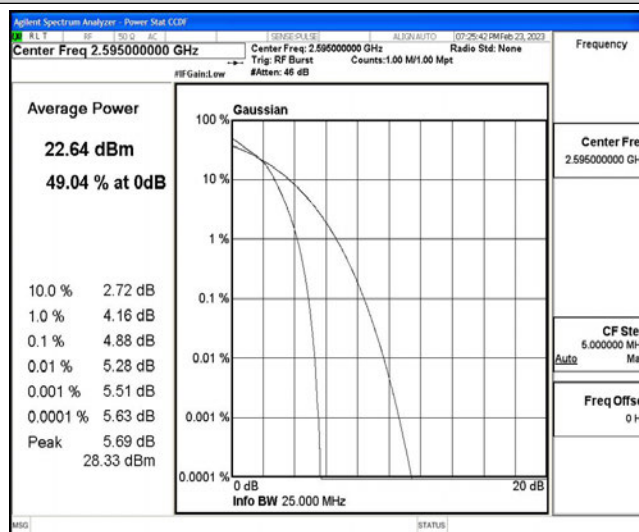

Band38-20MHz-16QAM-38150-100RB#0




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

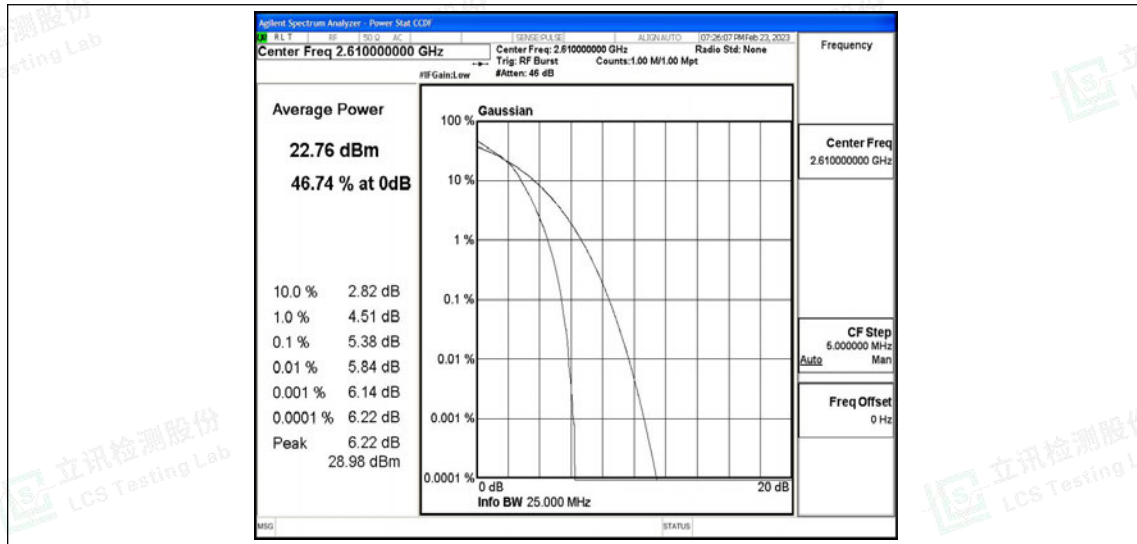



H.3 26dB Bandwidth and Occupied Bandwidth

Test Result


Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band38	5MHz	QPSK	37775	25RB#0	4.5119	5.386	PASS
Band38	5MHz	QPSK	38000	25RB#0	4.5234	5.406	PASS
Band38	5MHz	QPSK	38225	25RB#0	4.4956	5.016	PASS
Band38	5MHz	16QAM	37775	25RB#0	4.5246	5.664	PASS
Band38	5MHz	16QAM	38000	25RB#0	4.5252	5.323	PASS
Band38	5MHz	16QAM	38225	25RB#0	4.5075	5.064	PASS
Band38	10MHz	QPSK	37800	50RB#0	9.0025	10.26	PASS
Band38	10MHz	QPSK	38000	50RB#0	9.0410	10.17	PASS
Band38	10MHz	QPSK	38200	50RB#0	9.0117	9.941	PASS
Band38	10MHz	16QAM	37800	50RB#0	9.0434	10.31	PASS
Band38	10MHz	16QAM	38000	50RB#0	9.0173	10.50	PASS
Band38	10MHz	16QAM	38200	50RB#0	9.0111	10.39	PASS
Band38	15MHz	QPSK	37825	75RB#0	13.551	15.53	PASS
Band38	15MHz	QPSK	38000	75RB#0	13.554	15.04	PASS
Band38	15MHz	QPSK	38175	75RB#0	13.525	15.40	PASS
Band38	15MHz	16QAM	37825	75RB#0	13.575	15.62	PASS
Band38	15MHz	16QAM	38000	75RB#0	13.545	16.33	PASS
Band38	15MHz	16QAM	38175	75RB#0	13.463	14.87	PASS
Band38	20MHz	QPSK	37850	100RB#0	18.050	20.04	PASS
Band38	20MHz	QPSK	38000	100RB#0	18.030	19.88	PASS
Band38	20MHz	QPSK	38150	100RB#0	17.954	19.83	PASS
Band38	20MHz	16QAM	37850	100RB#0	18.055	21.63	PASS
Band38	20MHz	16QAM	38000	100RB#0	18.003	20.18	PASS
Band38	20MHz	16QAM	38150	100RB#0	18.005	19.68	PASS






Test Graphs

Band38-5MHz-QPSK-37775-25RB#0

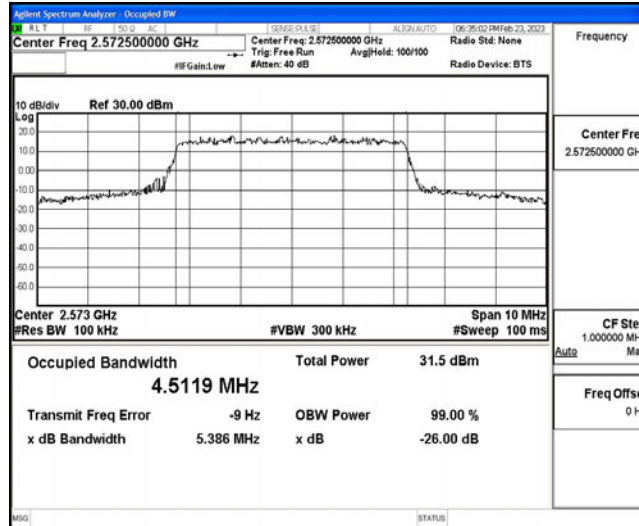


Band38-5MHz-QPSK-38000-25RB#0

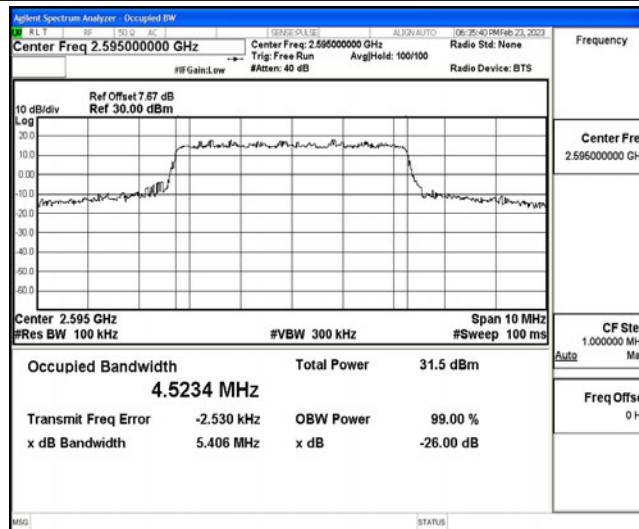


Band38-5MHz-QPSK-38225-25RB#0




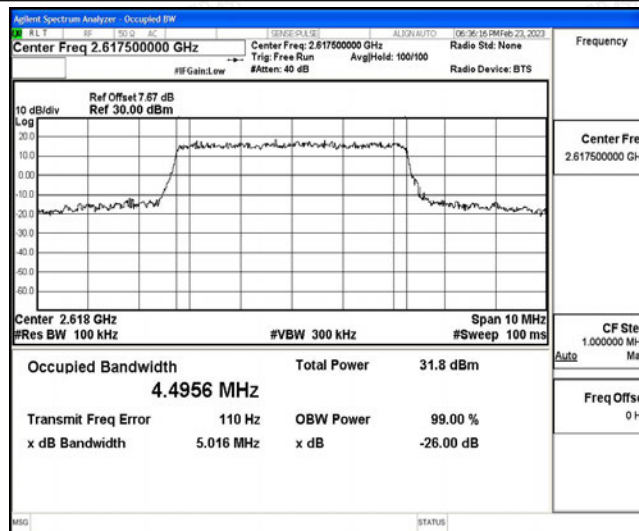

Band38-5MHz-16QAM-37775-25RB#0

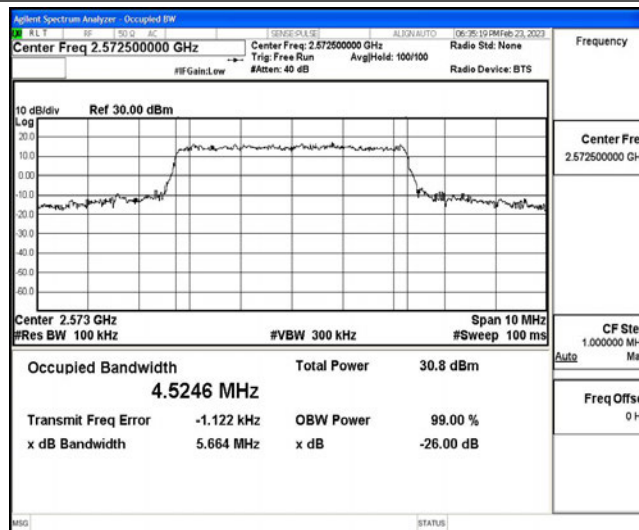


Band38-5MHz-16QAM-38000-25RB#0

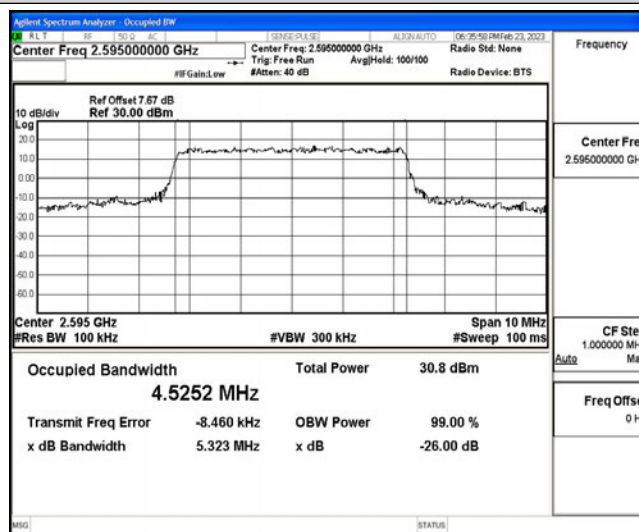


Band38-5MHz-16QAM-38225-25RB#0




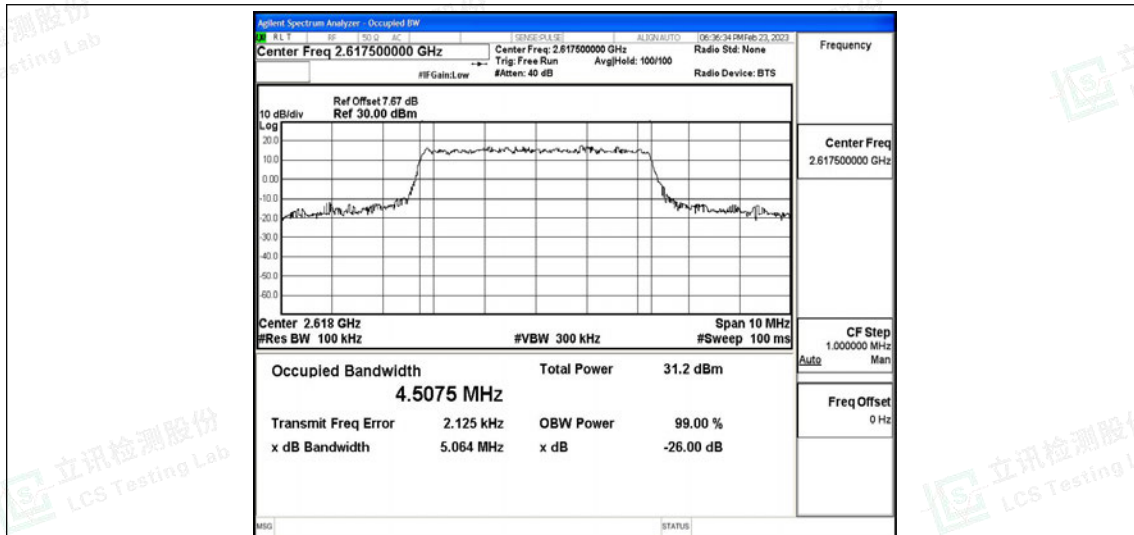

Band38-10MHz-QPSK-37800-50RB#0

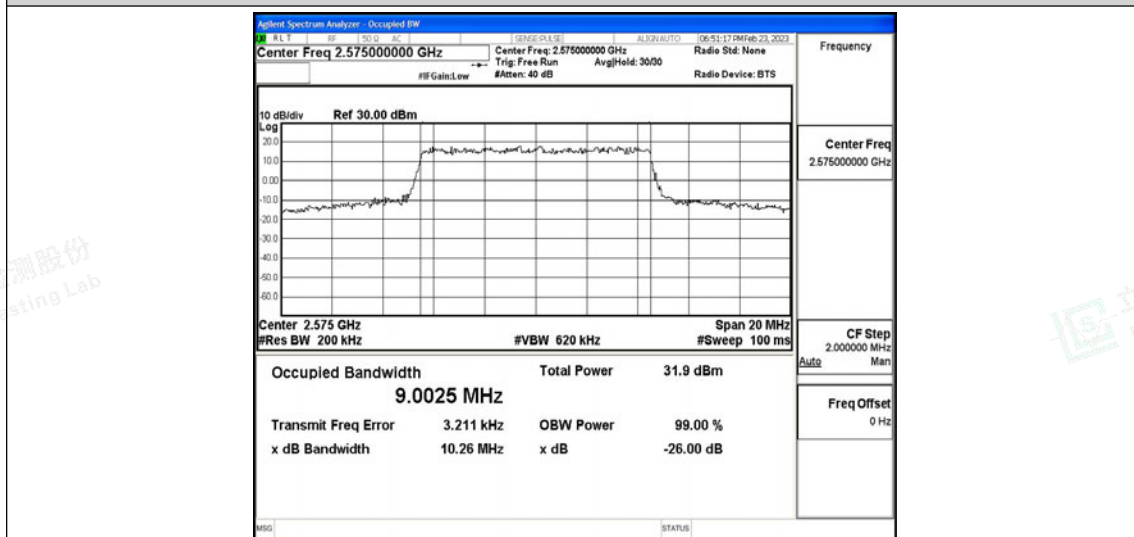


Band38-10MHz-QPSK-38000-50RB#0

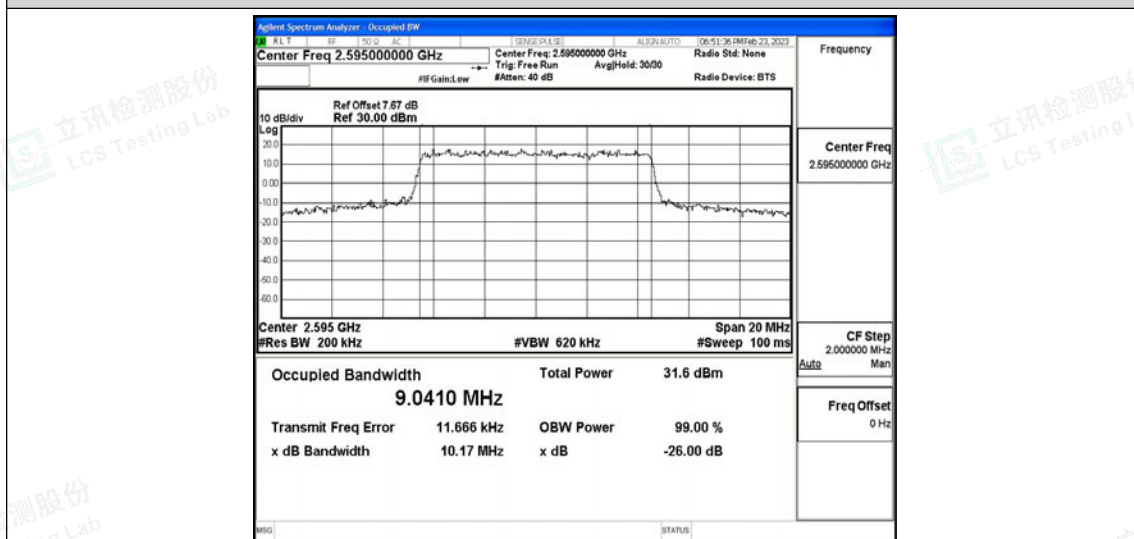


Band38-10MHz-QPSK-38200-50RB#0




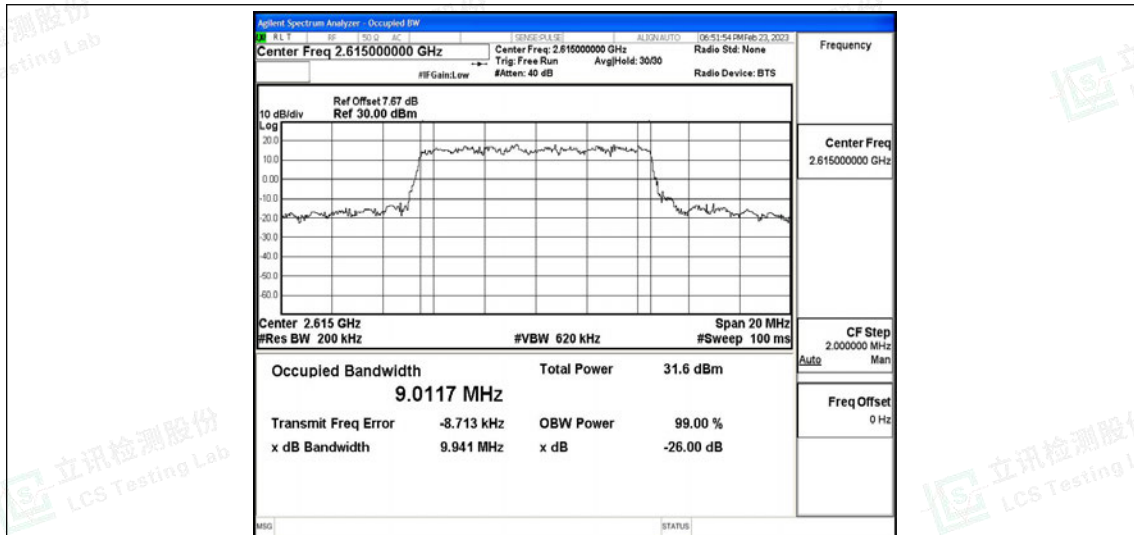

Band38-10MHz-16QAM-37800-50RB#0

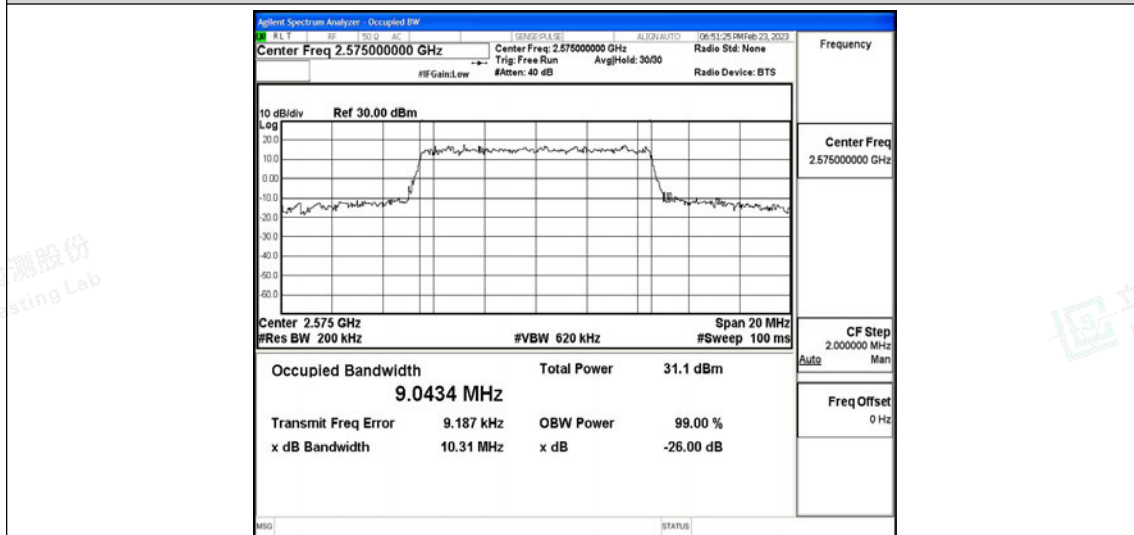


Band38-10MHz-16QAM-38000-50RB#0

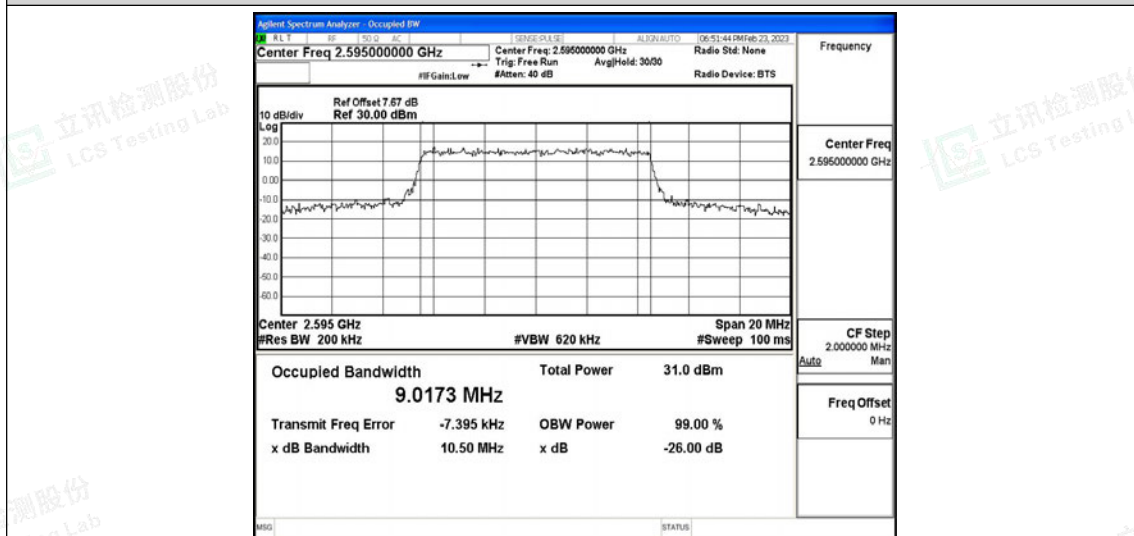


Band38-10MHz-16QAM-38200-50RB#0




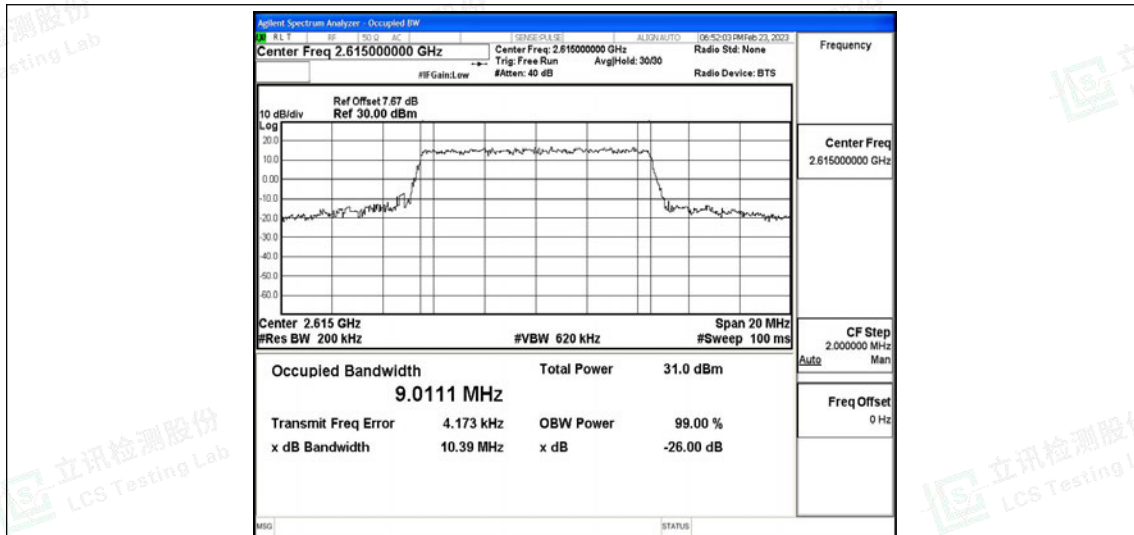

Band38-15MHz-QPSK-37825-75RB#0

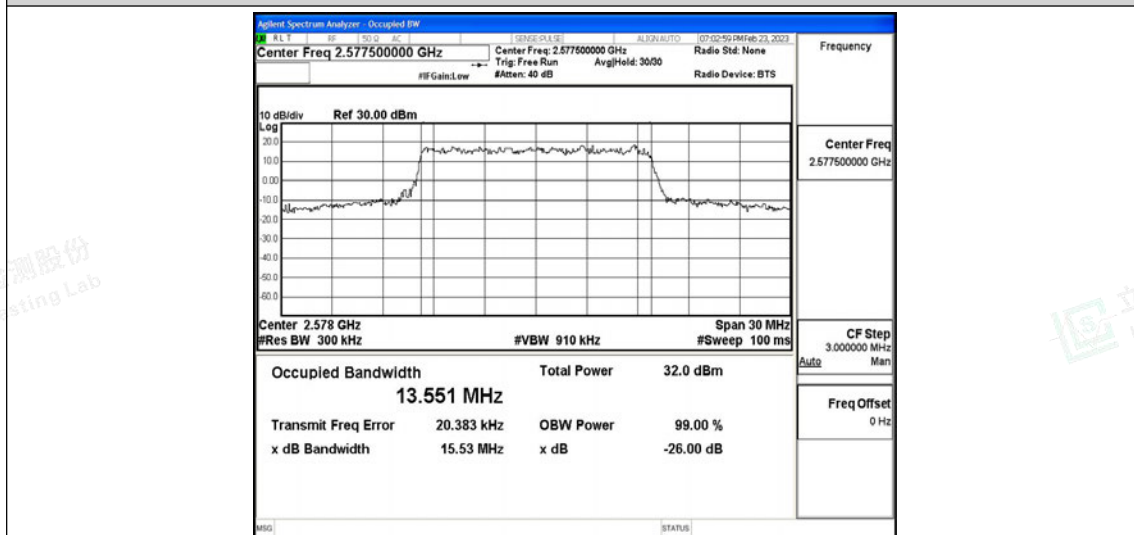


Band38-15MHz-QPSK-38000-75RB#0

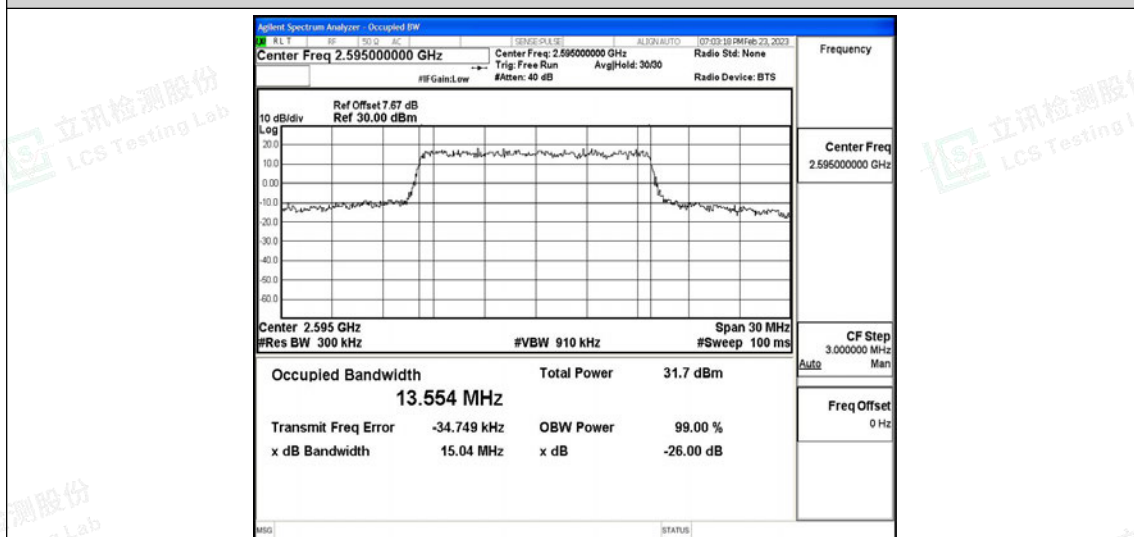


Band38-15MHz-QPSK-38175-75RB#0




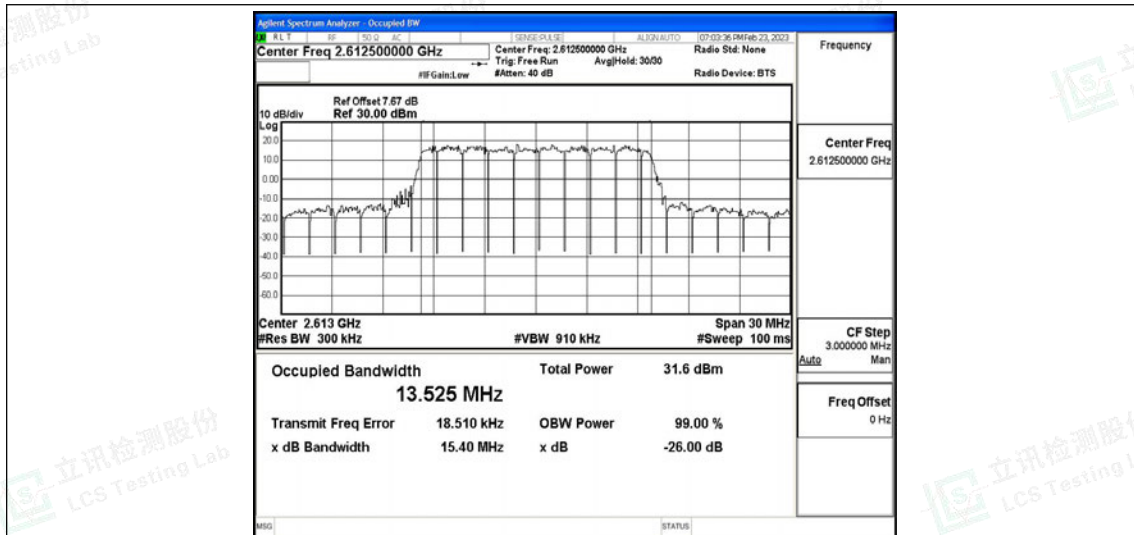

Band38-15MHz-16QAM-37825-75RB#0

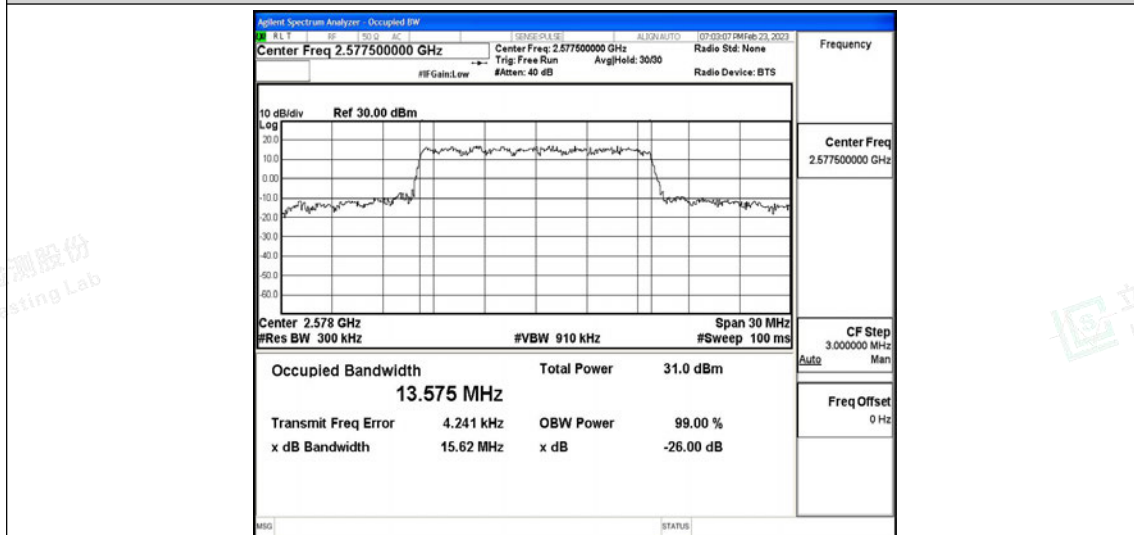


Band38-15MHz-16QAM-38000-75RB#0

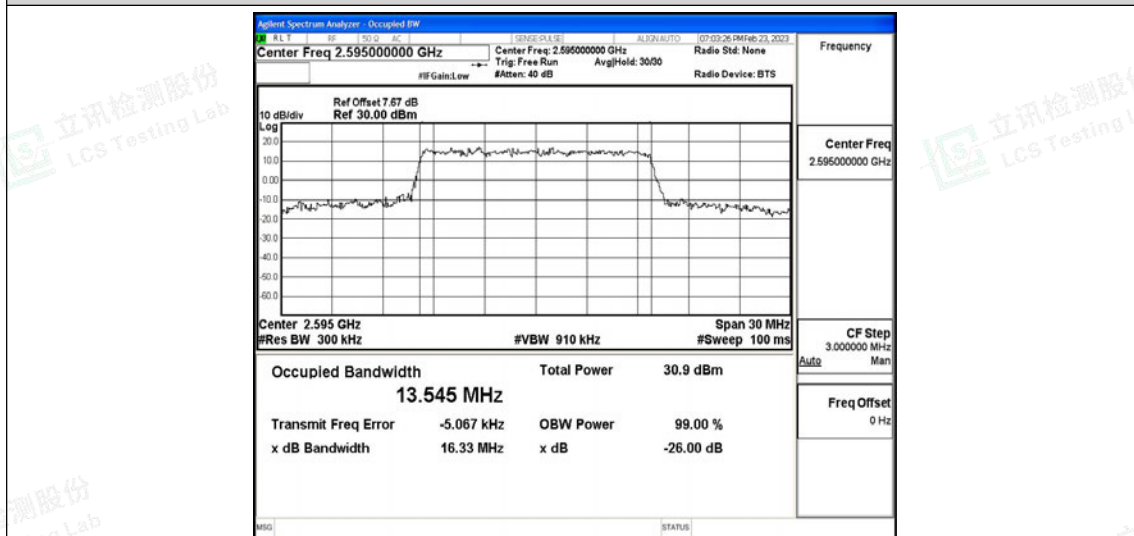


Band38-15MHz-16QAM-38175-75RB#0




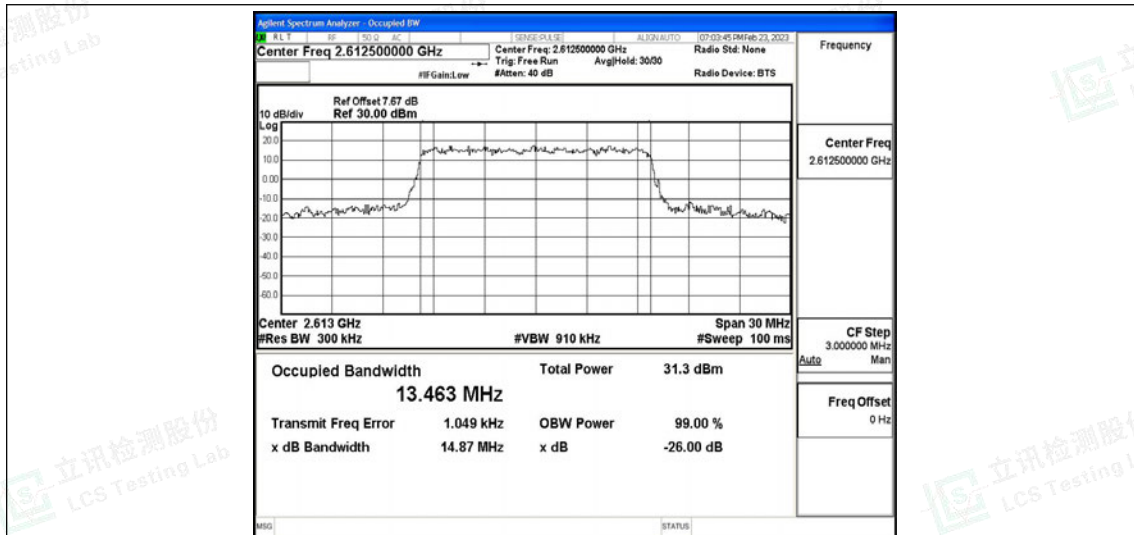

Band38-20MHz-QPSK-37850-100RB#0

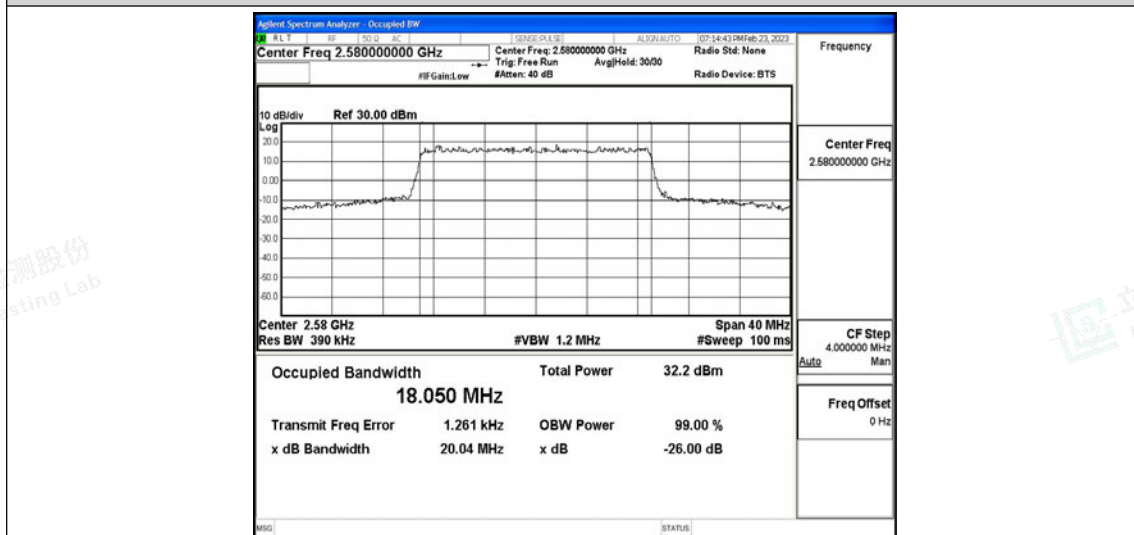


Band38-20MHz-QPSK-38000-100RB#0

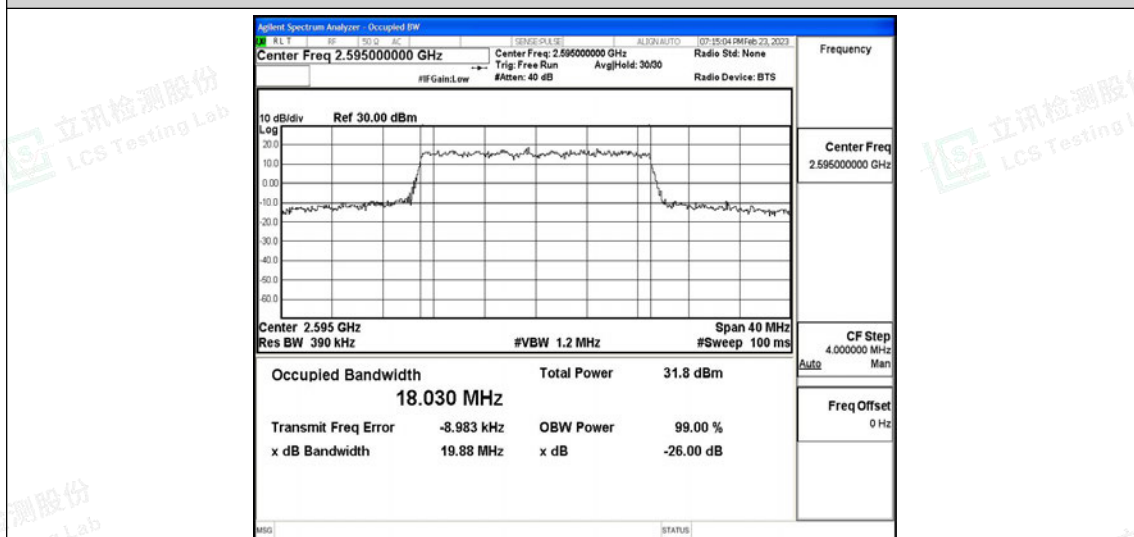


Band38-20MHz-QPSK-38150-100RB#0




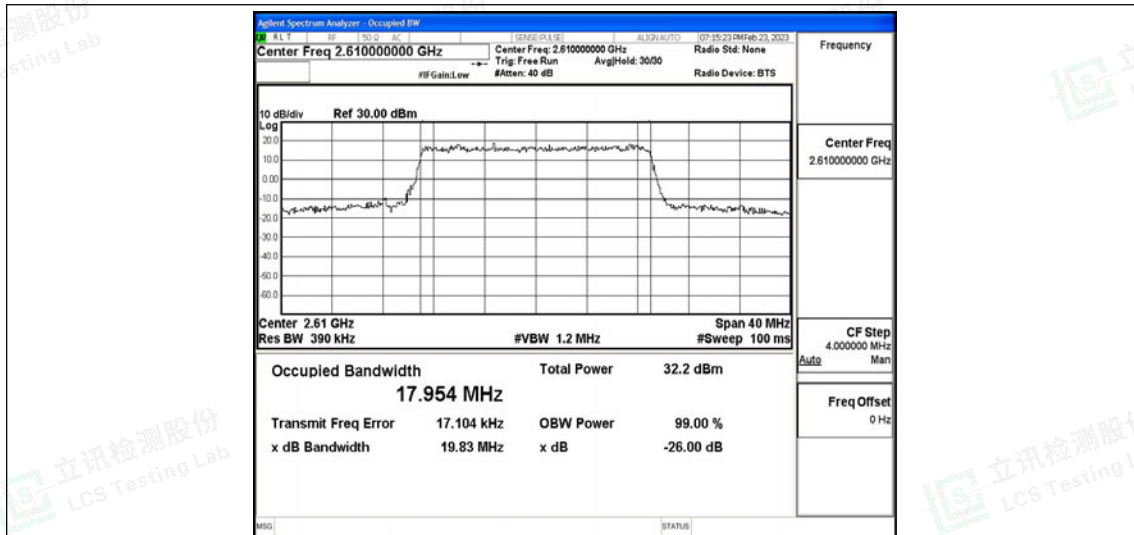

Band38-20MHz-16QAM-37850-100RB#0

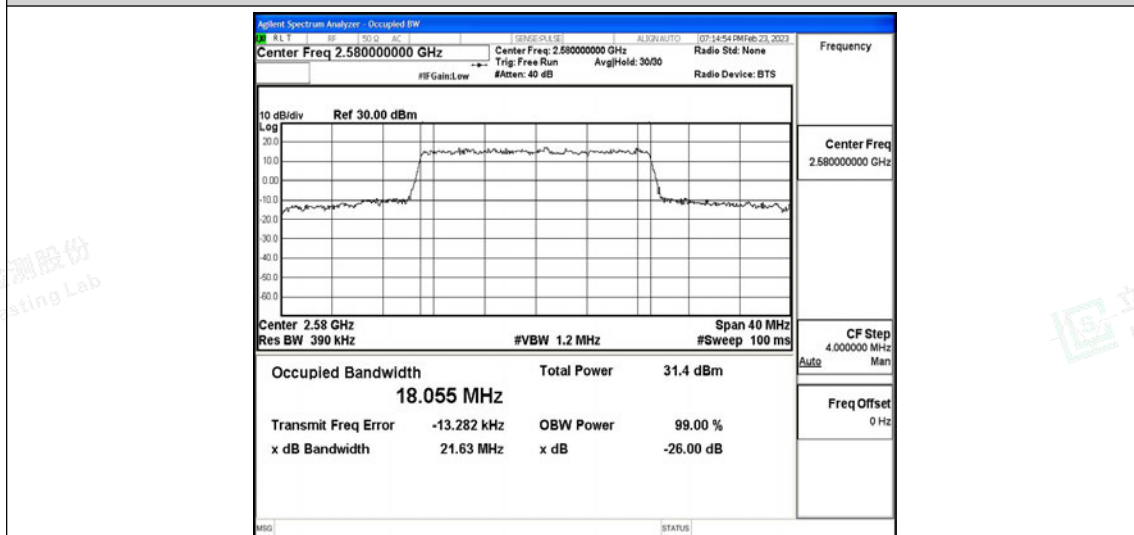


Band38-20MHz-16QAM-38000-100RB#0

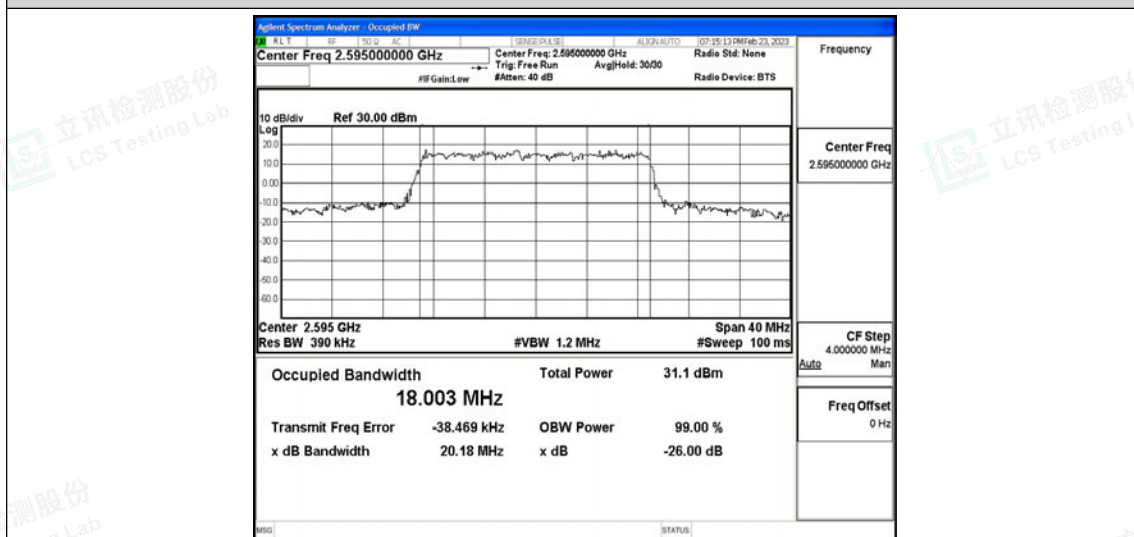

Band38-20MHz-16QAM-38150-100RB#0



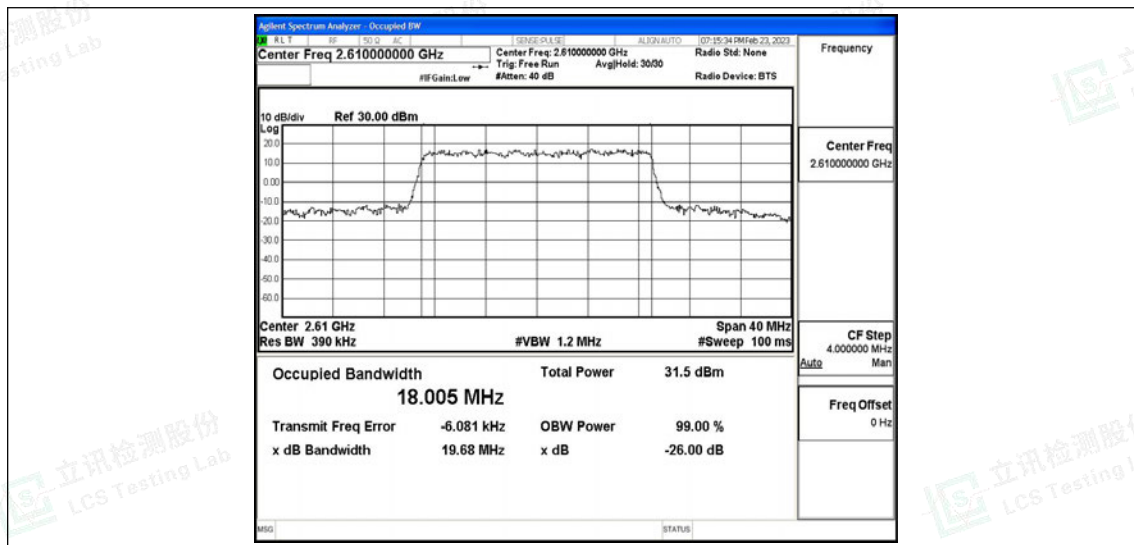




H.4 Band Edge

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band38	5MHz	QPSK	37775	25RB#0	-44.10,-44.89,-25.50,-23.52	PASS
Band38	5MHz	QPSK	38225	25RB#0	-23.99,-29.08,-43.50,-44.17	PASS
Band38	5MHz	16QAM	37775	25RB#0	-44.84,-43.99,-26.75,-24.44	PASS
Band38	5MHz	16QAM	38225	25RB#0	-24.64,-30.31,-43.78,-45.19	PASS
Band38	10MHz	QPSK	37800	50RB#0	-43.68,-28.85,-23.51,-21.81	PASS
Band38	10MHz	QPSK	38200	50RB#0	-27.26,-28.38,-32.31,-42.74	PASS
Band38	10MHz	16QAM	37800	50RB#0	-43.74,-31.22,-25.57,-25.23	PASS
Band38	10MHz	16QAM	38200	50RB#0	-27.38,-30.05,-34.74,-42.89	PASS
Band38	15MHz	QPSK	37825	75RB#0	-41.66,-25.03,-21.65,-20.70	PASS
Band38	15MHz	QPSK	38175	75RB#0	-24.95,-25.66,-28.35,-41.21	PASS
Band38	15MHz	16QAM	37825	75RB#0	-42.36,-26.23,-23.83,-22.38	PASS
Band38	15MHz	16QAM	38175	75RB#0	-26.86,-28.55,-30.65,-41.10	PASS
Band38	20MHz	QPSK	37850	100RB#0	-42.06,-23.93,-22.16,-20.63	PASS
Band38	20MHz	QPSK	38150	100RB#0	-25.97,-26.92,-28.99,-41.65	PASS
Band38	20MHz	16QAM	37850	100RB#0	-42.50,-26.43,-23.83,-24.03	PASS
Band38	20MHz	16QAM	38150	100RB#0	-28.38,-28.90,-30.80,-41.17	PASS

Test Graphs

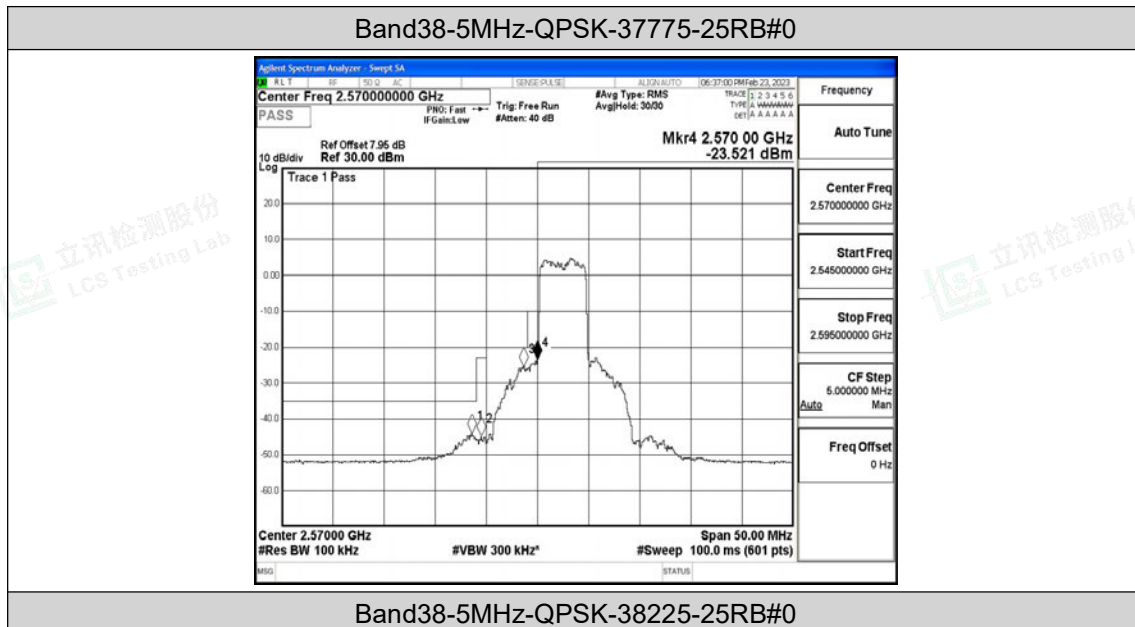


Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

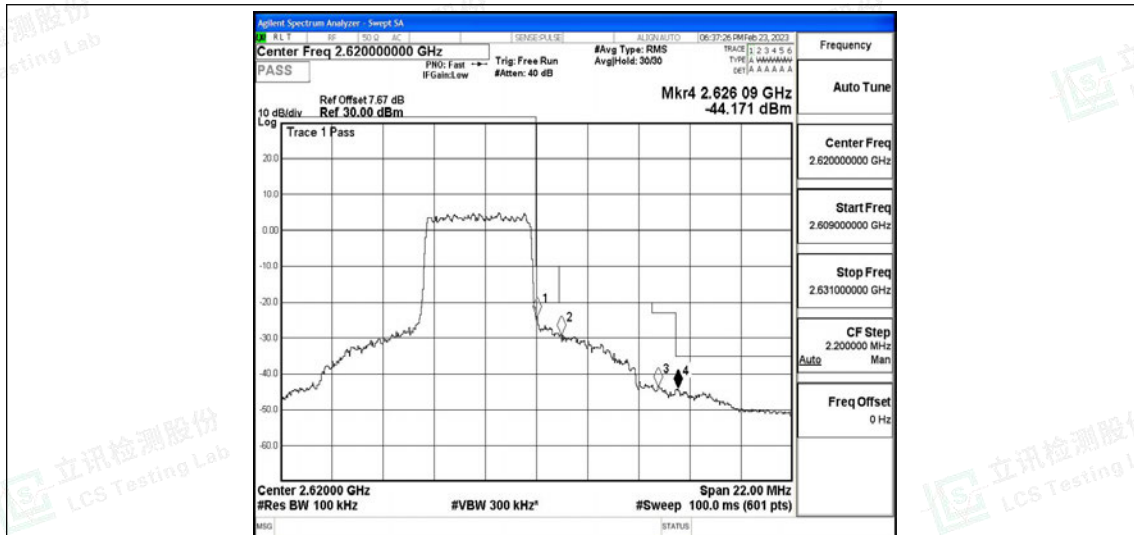

Band38-5MHz-16QAM-37775-25RB#0

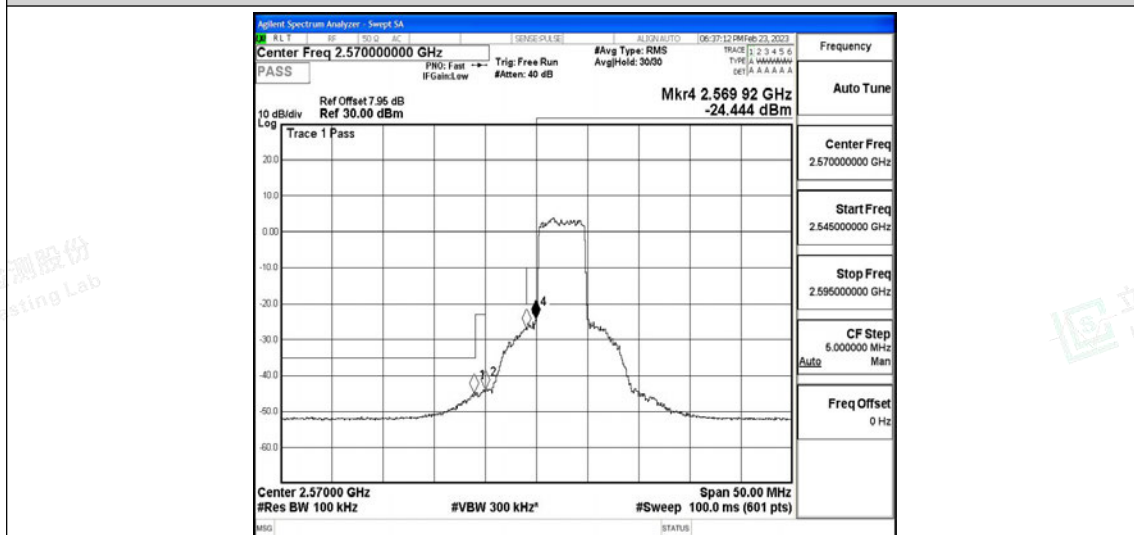


Band38-5MHz-16QAM-38225-25RB#0

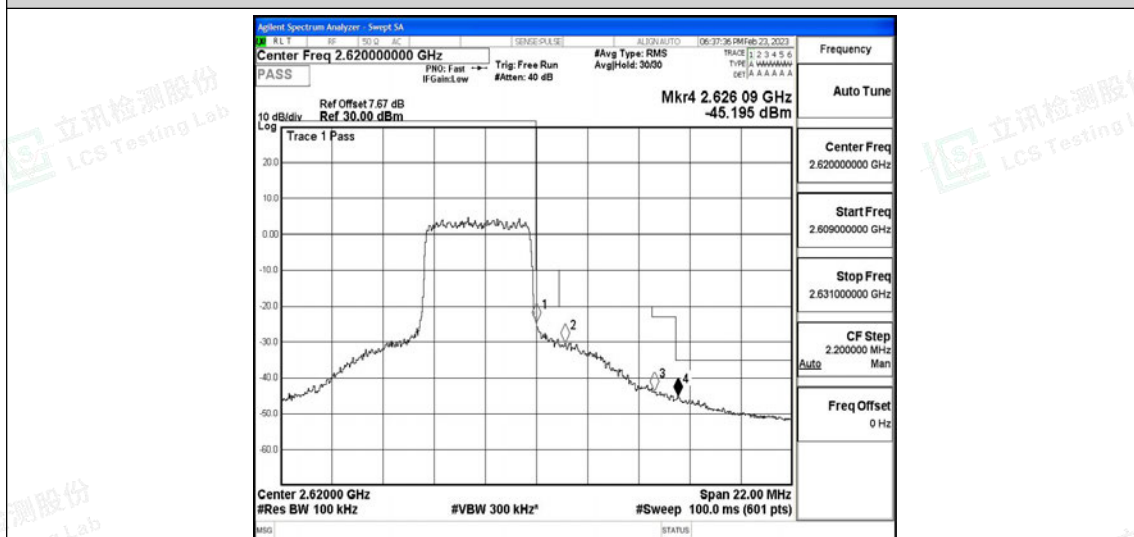


Band38-10MHz-QPSK-37800-50RB#0




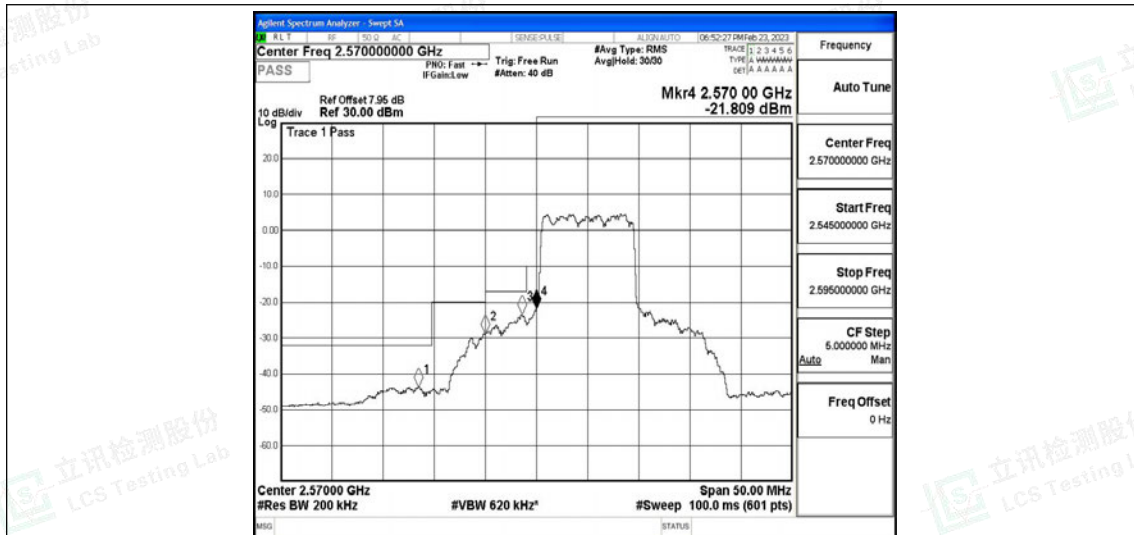

Band38-10MHz-QPSK-38200-50RB#0

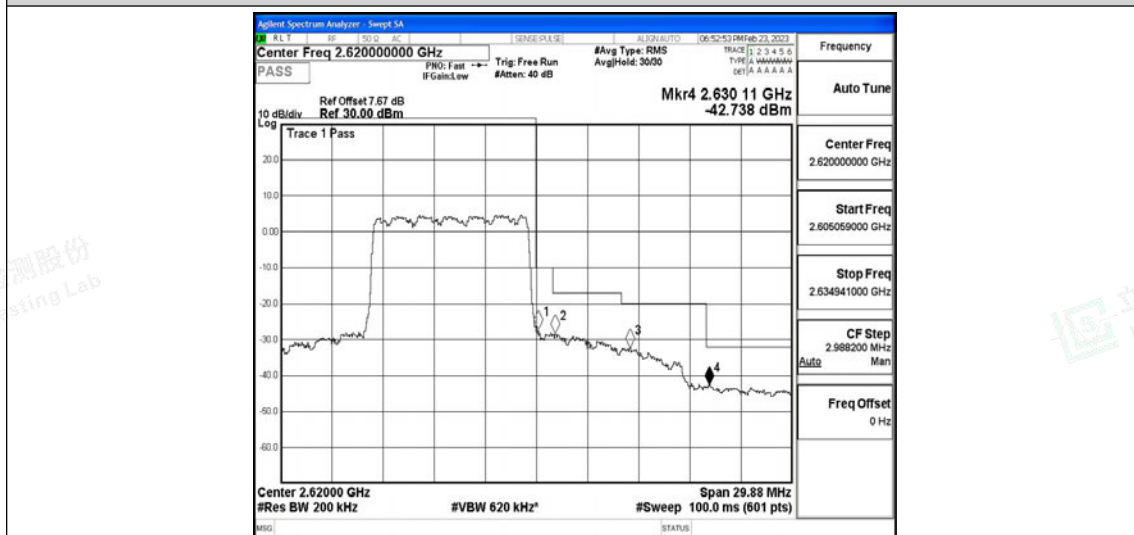


Band38-10MHz-16QAM-37800-50RB#0

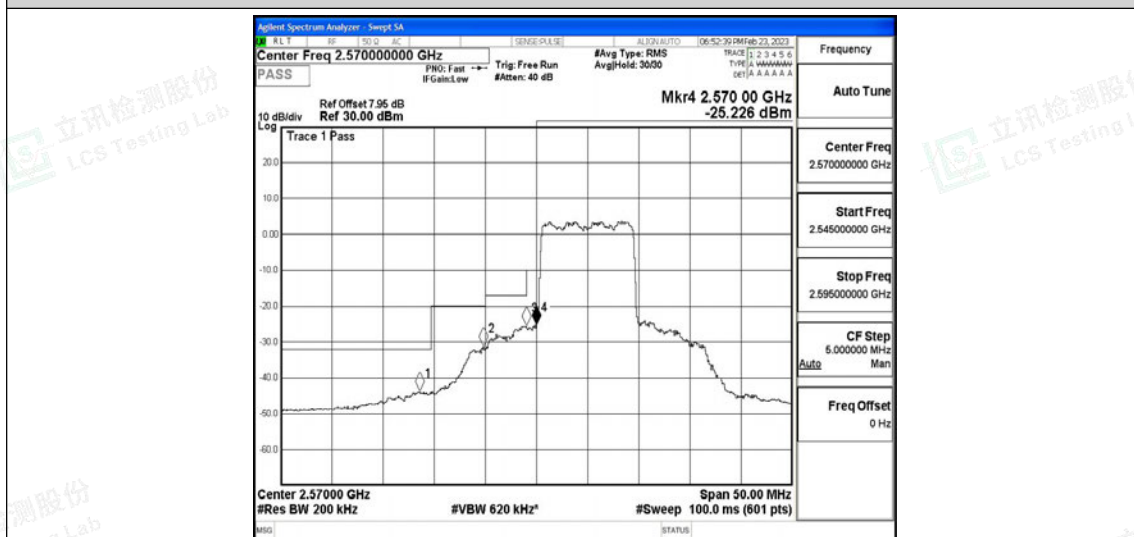


Band38-10MHz-16QAM-38200-50RB#0




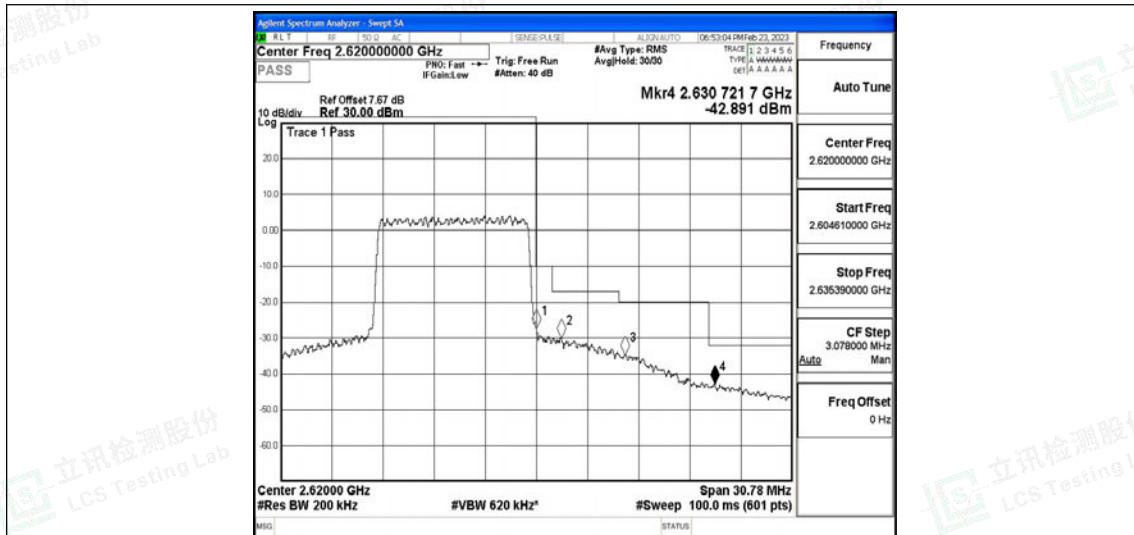

Band38-15MHz-QPSK-37825-75RB#0

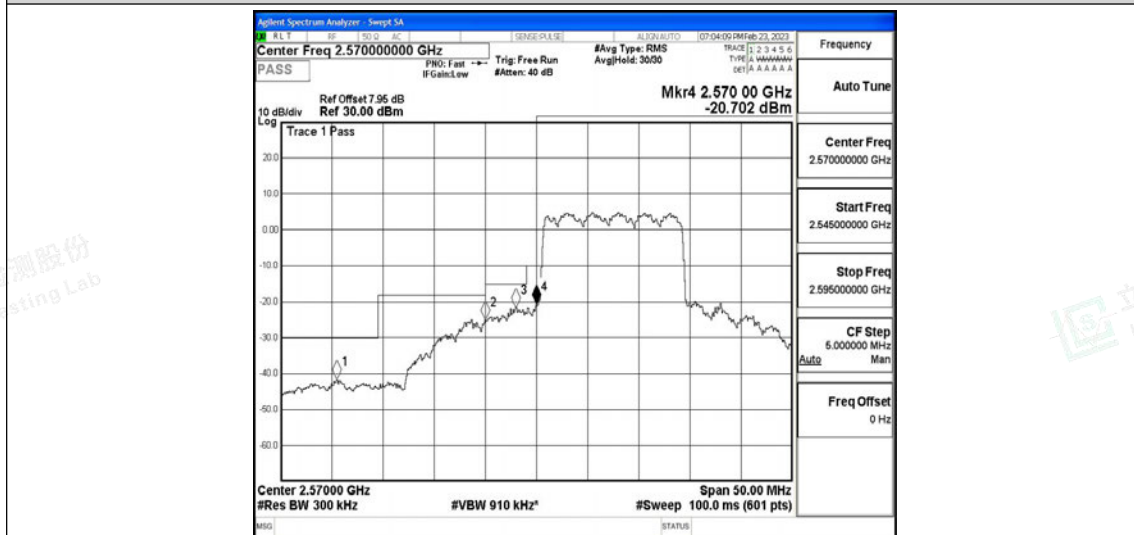


Band38-15MHz-QPSK-38175-75RB#0

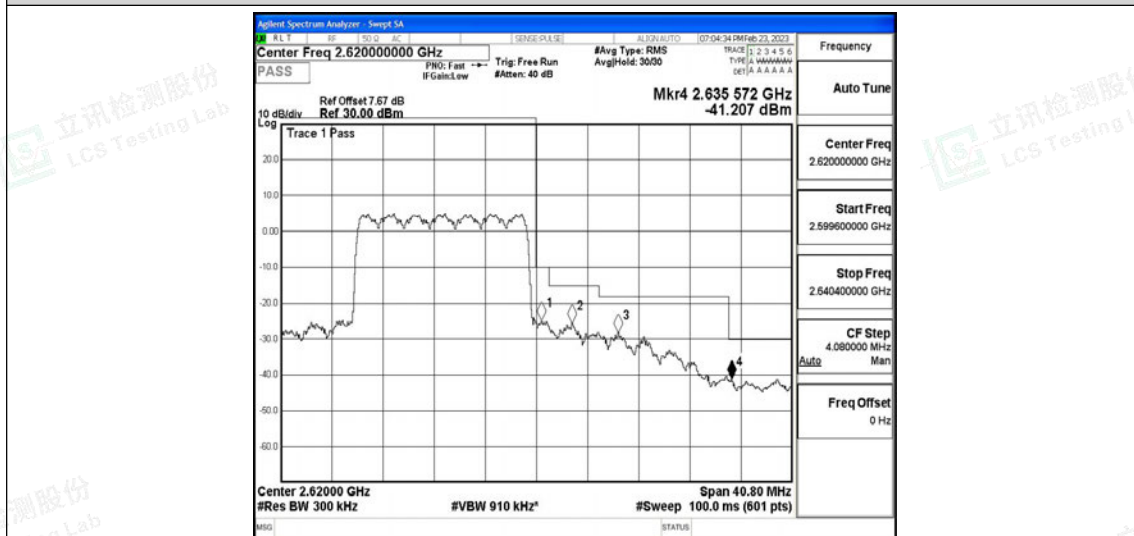


Band38-15MHz-16QAM-37825-75RB#0




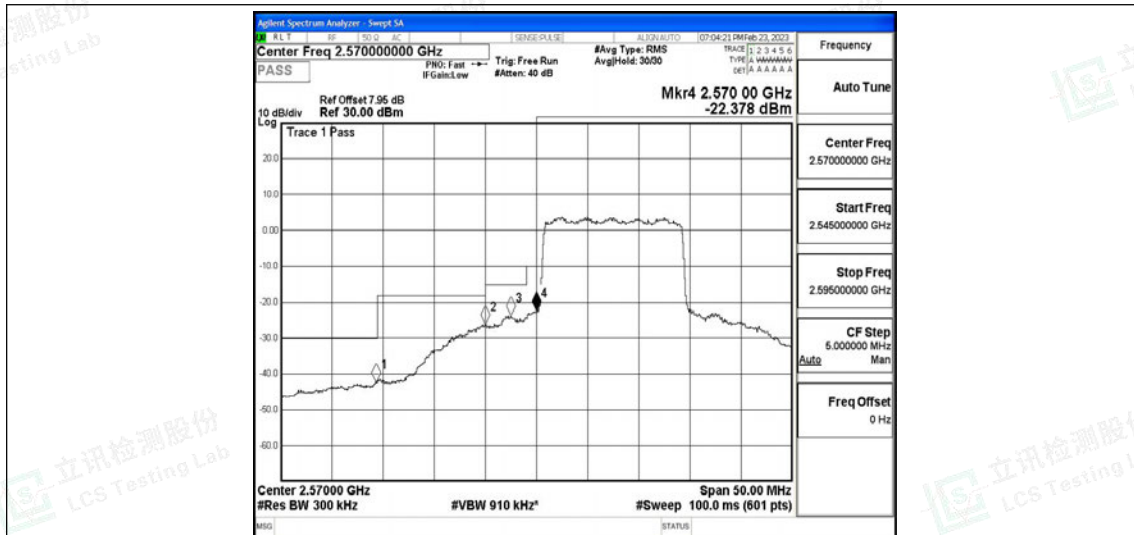

Band38-15MHz-16QAM-38175-75RB#0

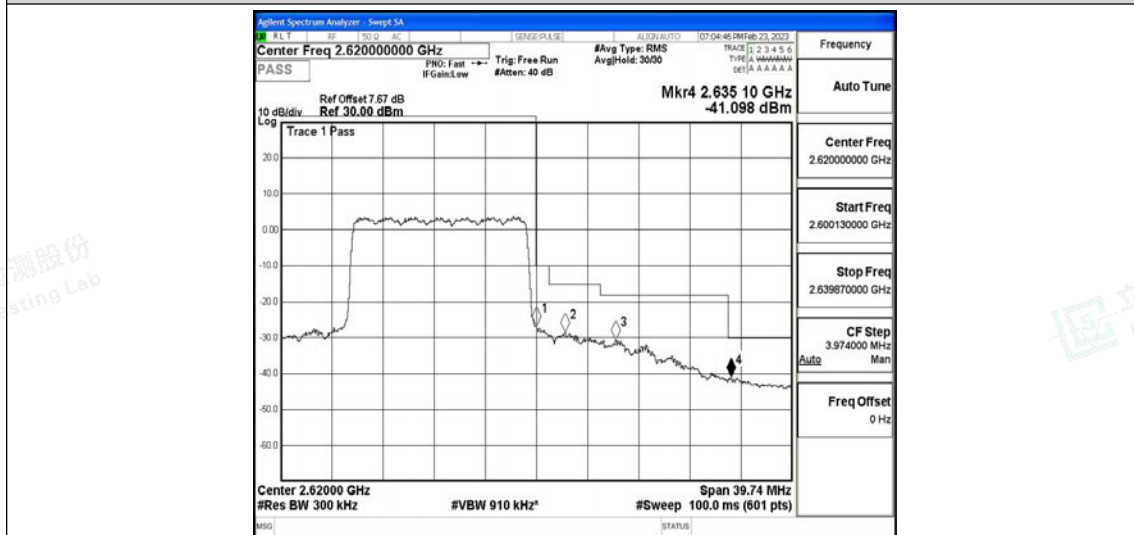


Band38-20MHz-QPSK-37850-100RB#0

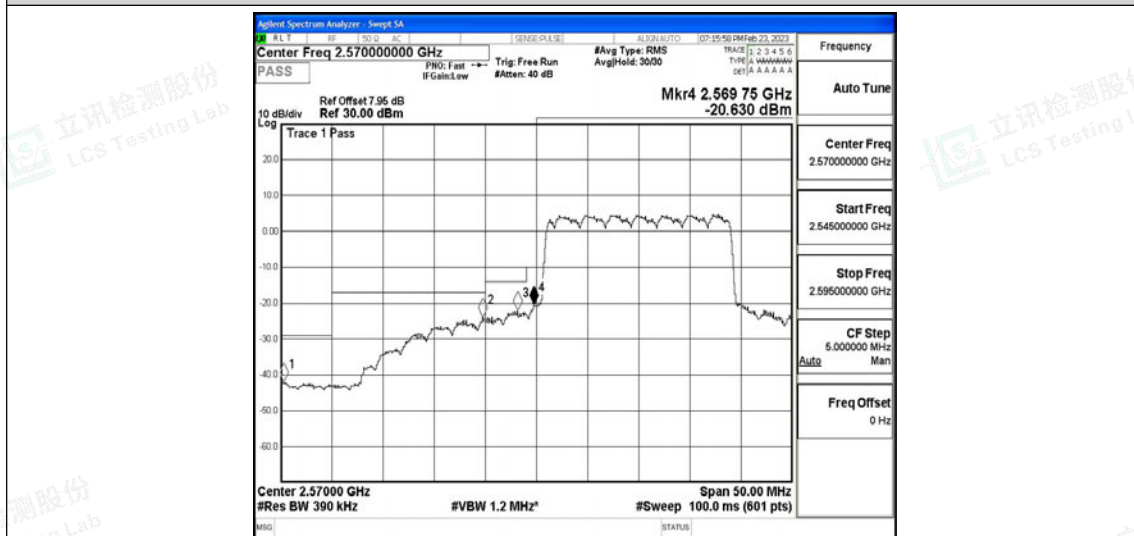


Band38-20MHz-QPSK-38150-100RB#0




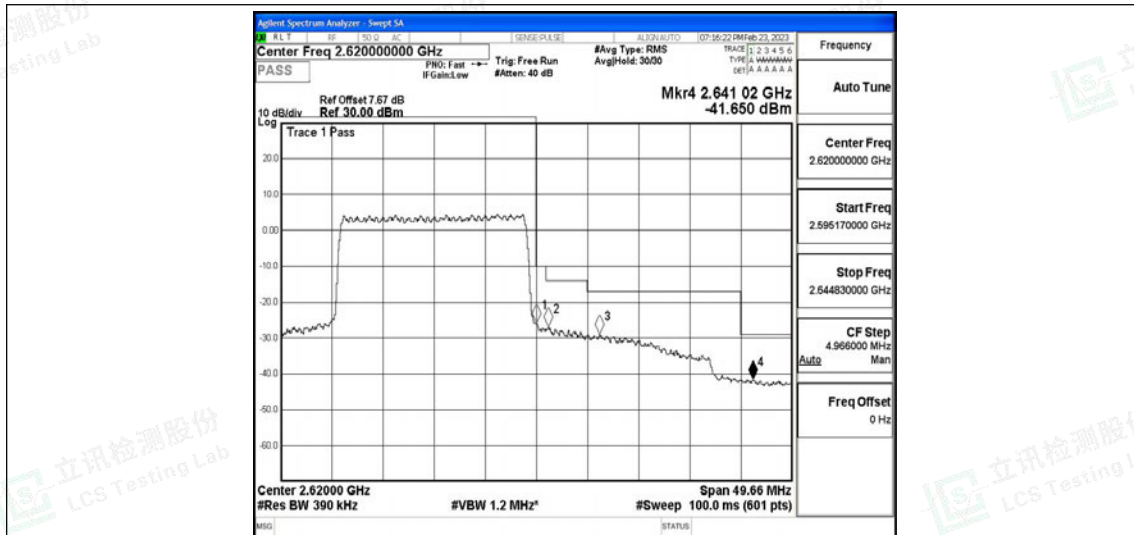

Band38-20MHz-16QAM-37850-100RB#0

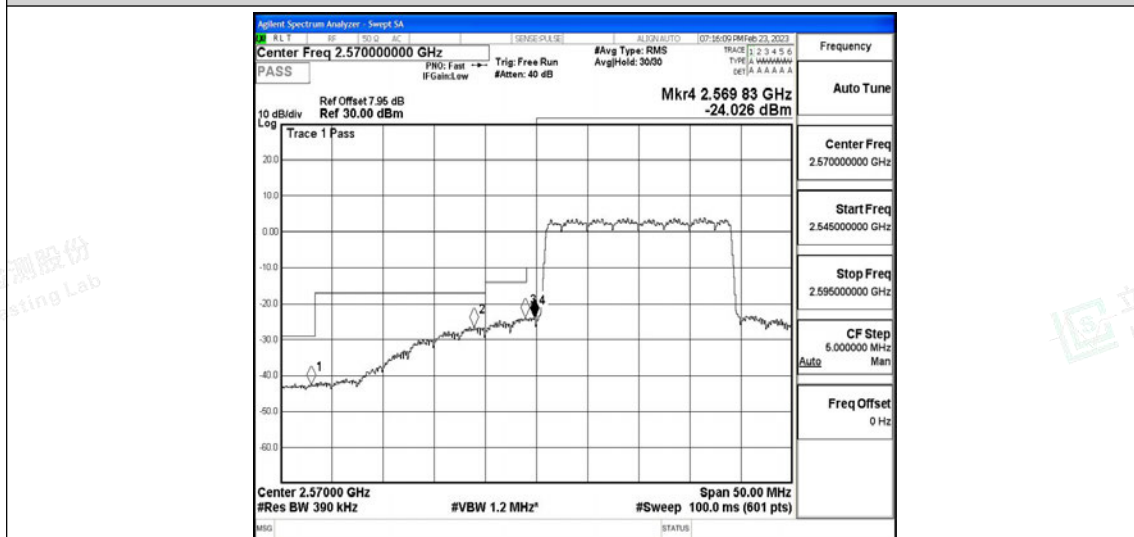

Band38-20MHz-16QAM-38150-100RB#0

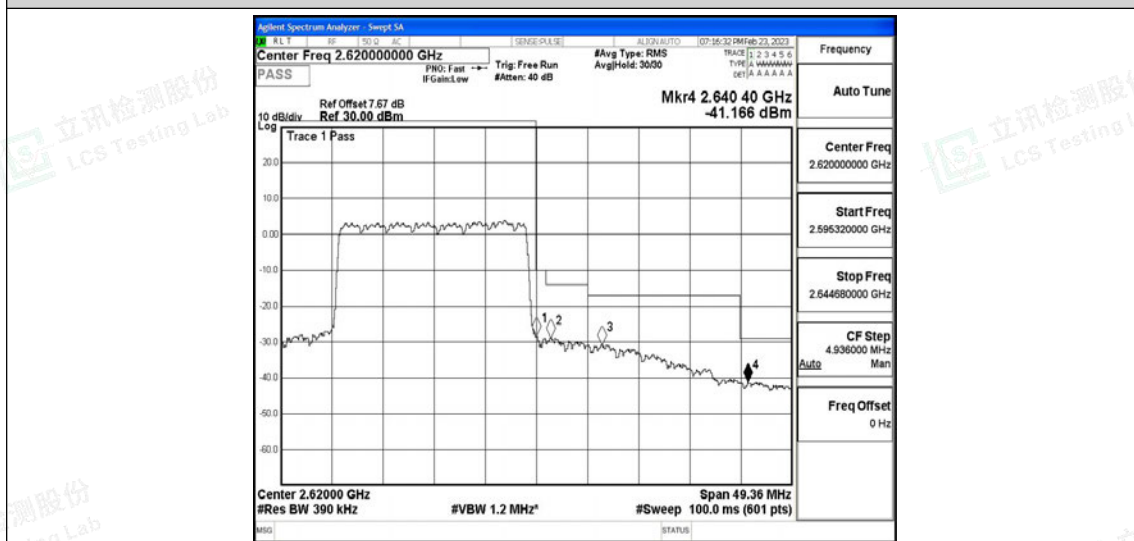



H.5 Conducted Spurious Emission

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Frequency Range	Result (dBm)	Verdict
Band38	5MHz	QPSK	37775	1RB#0	Range1:0.009~0.15MHz	-65.28	PASS
Band38	5MHz	QPSK	37775	1RB#0	Range2:0.15~30MHz	-51.09	PASS
Band38	5MHz	QPSK	37775	1RB#0	Range3:30~1000MHz	-42.29	PASS
Band38	5MHz	QPSK	37775	1RB#0	Range4:1000~10000MHz	-44.9	PASS
Band38	5MHz	QPSK	37775	1RB#0	Range5:10000~20000MHz	-48.96	PASS
Band38	5MHz	QPSK	37775	1RB#0	Range6:20000~26500MHz	-37.01	PASS
Band38	5MHz	QPSK	38000	1RB#0	Range1:0.009~0.15MHz	-65.85	PASS
Band38	5MHz	QPSK	38000	1RB#0	Range2:0.15~30MHz	-51.14	PASS
Band38	5MHz	QPSK	38000	1RB#0	Range3:30~1000MHz	-42.47	PASS
Band38	5MHz	QPSK	38000	1RB#0	Range4:1000~10000MHz	-44.9	PASS
Band38	5MHz	QPSK	38000	1RB#0	Range5:10000~20000MHz	-49.15	PASS
Band38	5MHz	QPSK	38000	1RB#0	Range6:20000~26500MHz	-37.05	PASS
Band38	5MHz	QPSK	38225	1RB#0	Range1:0.009~0.15MHz	-60.62	PASS
Band38	5MHz	QPSK	38225	1RB#0	Range2:0.15~30MHz	-51.79	PASS
Band38	5MHz	QPSK	38225	1RB#0	Range3:30~1000MHz	-40.26	PASS
Band38	5MHz	QPSK	38225	1RB#0	Range4:1000~10000MHz	-45.09	PASS
Band38	5MHz	QPSK	38225	1RB#0	Range5:10000~20000MHz	-49.21	PASS
Band38	5MHz	QPSK	38225	1RB#0	Range6:20000~26500MHz	-36.91	PASS
Band38	5MHz	16QAM	37775	1RB#0	Range1:0.009~0.15MHz	-64.53	PASS
Band38	5MHz	16QAM	37775	1RB#0	Range2:0.15~30MHz	-50.85	PASS
Band38	5MHz	16QAM	37775	1RB#0	Range3:30~1000MHz	-41.66	PASS
Band38	5MHz	16QAM	37775	1RB#0	Range4:1000~10000MHz	-44.85	PASS
Band38	5MHz	16QAM	37775	1RB#0	Range5:10000~20000MHz	-49.11	PASS
Band38	5MHz	16QAM	37775	1RB#0	Range6:20000~26500MHz	-37.11	PASS
Band38	5MHz	16QAM	38000	1RB#0	Range1:0.009~0.15MHz	-63.37	PASS
Band38	5MHz	16QAM	38000	1RB#0	Range2:0.15~30MHz	-48.39	PASS
Band38	5MHz	16QAM	38000	1RB#0	Range3:30~1000MHz	-42.08	PASS
Band38	5MHz	16QAM	38000	1RB#0	Range4:1000~10000MHz	-44.94	PASS
Band38	5MHz	16QAM	38000	1RB#0	Range5:10000~20000MHz	-49.26	PASS
Band38	5MHz	16QAM	38000	1RB#0	Range6:20000~26500MHz	-36.88	PASS
Band38	5MHz	16QAM	38225	1RB#0	Range1:0.009~0.15MHz	-65.04	PASS
Band38	5MHz	16QAM	38225	1RB#0	Range2:0.15~30MHz	-49.91	PASS
Band38	5MHz	16QAM	38225	1RB#0	Range3:30~1000MHz	-41.83	PASS
Band38	5MHz	16QAM	38225	1RB#0	Range4:1000~10000MHz	-45.01	PASS
Band38	5MHz	16QAM	38225	1RB#0	Range5:10000~20000MHz	-49.2	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	5MHz	16QAM	38225	1RB#0	Range6:20000~26500MHz	-36.88	PASS
Band38	10MHz	QPSK	37800	1RB#0	Range1:0.009~0.15MHz	-63.25	PASS
Band38	10MHz	QPSK	37800	1RB#0	Range2:0.15~30MHz	-51.17	PASS
Band38	10MHz	QPSK	37800	1RB#0	Range3:30~1000MHz	-41.87	PASS
Band38	10MHz	QPSK	37800	1RB#0	Range4:1000~10000MHz	-44.79	PASS
Band38	10MHz	QPSK	37800	1RB#0	Range5:10000~20000MHz	-49.08	PASS
Band38	10MHz	QPSK	37800	1RB#0	Range6:20000~26500MHz	-37.03	PASS
Band38	10MHz	QPSK	38000	1RB#0	Range1:0.009~0.15MHz	-65.27	PASS
Band38	10MHz	QPSK	38000	1RB#0	Range2:0.15~30MHz	-50.24	PASS
Band38	10MHz	QPSK	38000	1RB#0	Range3:30~1000MHz	-41.63	PASS
Band38	10MHz	QPSK	38000	1RB#0	Range4:1000~10000MHz	-44.85	PASS
Band38	10MHz	QPSK	38000	1RB#0	Range5:10000~20000MHz	-49.05	PASS
Band38	10MHz	QPSK	38000	1RB#0	Range6:20000~26500MHz	-37.09	PASS
Band38	10MHz	QPSK	38200	1RB#0	Range1:0.009~0.15MHz	-65.15	PASS
Band38	10MHz	QPSK	38200	1RB#0	Range2:0.15~30MHz	-51.69	PASS
Band38	10MHz	QPSK	38200	1RB#0	Range3:30~1000MHz	-42.08	PASS
Band38	10MHz	QPSK	38200	1RB#0	Range4:1000~10000MHz	-45.01	PASS
Band38	10MHz	QPSK	38200	1RB#0	Range5:10000~20000MHz	-49.01	PASS
Band38	10MHz	QPSK	38200	1RB#0	Range6:20000~26500MHz	-37.11	PASS
Band38	10MHz	16QAM	37800	1RB#0	Range1:0.009~0.15MHz	-65.96	PASS
Band38	10MHz	16QAM	37800	1RB#0	Range2:0.15~30MHz	-50.53	PASS
Band38	10MHz	16QAM	37800	1RB#0	Range3:30~1000MHz	-42.18	PASS
Band38	10MHz	16QAM	37800	1RB#0	Range4:1000~10000MHz	-45.04	PASS
Band38	10MHz	16QAM	37800	1RB#0	Range5:10000~20000MHz	-49.22	PASS
Band38	10MHz	16QAM	37800	1RB#0	Range6:20000~26500MHz	-36.99	PASS
Band38	10MHz	16QAM	38000	1RB#0	Range1:0.009~0.15MHz	-64.31	PASS
Band38	10MHz	16QAM	38000	1RB#0	Range2:0.15~30MHz	-50.53	PASS
Band38	10MHz	16QAM	38000	1RB#0	Range3:30~1000MHz	-41.35	PASS
Band38	10MHz	16QAM	38000	1RB#0	Range4:1000~10000MHz	-44.78	PASS
Band38	10MHz	16QAM	38000	1RB#0	Range5:10000~20000MHz	-49.06	PASS
Band38	10MHz	16QAM	38000	1RB#0	Range6:20000~26500MHz	-36.97	PASS
Band38	10MHz	16QAM	38200	1RB#0	Range1:0.009~0.15MHz	-64.16	PASS
Band38	10MHz	16QAM	38200	1RB#0	Range2:0.15~30MHz	-51.87	PASS
Band38	10MHz	16QAM	38200	1RB#0	Range3:30~1000MHz	-42.44	PASS
Band38	10MHz	16QAM	38200	1RB#0	Range4:1000~10000MHz	-45	PASS
Band38	10MHz	16QAM	38200	1RB#0	Range5:10000~20000MHz	-49.16	PASS
Band38	10MHz	16QAM	38200	1RB#0	Range6:20000~26500MHz	-36.89	PASS
Band38	15MHz	QPSK	37825	1RB#0	Range1:0.009~0.15MHz	-65.33	PASS
Band38	15MHz	QPSK	37825	1RB#0	Range2:0.15~30MHz	-50.62	PASS
Band38	15MHz	QPSK	37825	1RB#0	Range3:30~1000MHz	-42.67	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band38	15MHz	QPSK	37825	1RB#0	Range4:1000~10000MHz	-45.01	PASS
Band38	15MHz	QPSK	37825	1RB#0	Range5:10000~20000MHz	-48.98	PASS
Band38	15MHz	QPSK	37825	1RB#0	Range6:20000~26500MHz	-37.09	PASS
Band38	15MHz	QPSK	38000	1RB#0	Range1:0.009~0.15MHz	-65.71	PASS
Band38	15MHz	QPSK	38000	1RB#0	Range2:0.15~30MHz	-51.12	PASS
Band38	15MHz	QPSK	38000	1RB#0	Range3:30~1000MHz	-41.78	PASS
Band38	15MHz	QPSK	38000	1RB#0	Range4:1000~10000MHz	-44.9	PASS
Band38	15MHz	QPSK	38000	1RB#0	Range5:10000~20000MHz	-49.22	PASS
Band38	15MHz	QPSK	38000	1RB#0	Range6:20000~26500MHz	-37	PASS
Band38	15MHz	QPSK	38175	1RB#0	Range1:0.009~0.15MHz	-64.97	PASS
Band38	15MHz	QPSK	38175	1RB#0	Range2:0.15~30MHz	-51.59	PASS
Band38	15MHz	QPSK	38175	1RB#0	Range3:30~1000MHz	-42.88	PASS
Band38	15MHz	QPSK	38175	1RB#0	Range4:1000~10000MHz	-44.85	PASS
Band38	15MHz	QPSK	38175	1RB#0	Range5:10000~20000MHz	-48.99	PASS
Band38	15MHz	QPSK	38175	1RB#0	Range6:20000~26500MHz	-36.97	PASS
Band38	15MHz	16QAM	37825	1RB#0	Range1:0.009~0.15MHz	-66.03	PASS
Band38	15MHz	16QAM	37825	1RB#0	Range2:0.15~30MHz	-51.61	PASS
Band38	15MHz	16QAM	37825	1RB#0	Range3:30~1000MHz	-40.9	PASS
Band38	15MHz	16QAM	37825	1RB#0	Range4:1000~10000MHz	-44.98	PASS
Band38	15MHz	16QAM	37825	1RB#0	Range5:10000~20000MHz	-49.12	PASS
Band38	15MHz	16QAM	37825	1RB#0	Range6:20000~26500MHz	-36.81	PASS
Band38	15MHz	16QAM	38000	1RB#0	Range1:0.009~0.15MHz	-64.63	PASS
Band38	15MHz	16QAM	38000	1RB#0	Range2:0.15~30MHz	-49.64	PASS
Band38	15MHz	16QAM	38000	1RB#0	Range3:30~1000MHz	-41.77	PASS
Band38	15MHz	16QAM	38000	1RB#0	Range4:1000~10000MHz	-44.75	PASS
Band38	15MHz	16QAM	38000	1RB#0	Range5:10000~20000MHz	-49.13	PASS
Band38	15MHz	16QAM	38000	1RB#0	Range6:20000~26500MHz	-36.88	PASS
Band38	15MHz	16QAM	38175	1RB#0	Range1:0.009~0.15MHz	-65.36	PASS
Band38	15MHz	16QAM	38175	1RB#0	Range2:0.15~30MHz	-51.85	PASS
Band38	15MHz	16QAM	38175	1RB#0	Range3:30~1000MHz	-41.59	PASS
Band38	15MHz	16QAM	38175	1RB#0	Range4:1000~10000MHz	-44.82	PASS
Band38	15MHz	16QAM	38175	1RB#0	Range5:10000~20000MHz	-49.07	PASS
Band38	15MHz	16QAM	38175	1RB#0	Range6:20000~26500MHz	-37.08	PASS
Band38	20MHz	QPSK	37850	1RB#0	Range1:0.009~0.15MHz	-65.41	PASS
Band38	20MHz	QPSK	37850	1RB#0	Range2:0.15~30MHz	-50.92	PASS
Band38	20MHz	QPSK	37850	1RB#0	Range3:30~1000MHz	-40.56	PASS
Band38	20MHz	QPSK	37850	1RB#0	Range4:1000~10000MHz	-44.91	PASS
Band38	20MHz	QPSK	37850	1RB#0	Range5:10000~20000MHz	-49.26	PASS
Band38	20MHz	QPSK	37850	1RB#0	Range6:20000~26500MHz	-37.02	PASS
Band38	20MHz	QPSK	38000	1RB#0	Range1:0.009~0.15MHz	-65.71	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Band38	20MHz	QPSK	38000	1RB#0	Range2:0.15~30MHz	-50.77	PASS
Band38	20MHz	QPSK	38000	1RB#0	Range3:30~1000MHz	-41.58	PASS
Band38	20MHz	QPSK	38000	1RB#0	Range4:1000~10000MHz	-44.87	PASS
Band38	20MHz	QPSK	38000	1RB#0	Range5:10000~20000MHz	-49.22	PASS
Band38	20MHz	QPSK	38000	1RB#0	Range6:20000~26500MHz	-37	PASS
Band38	20MHz	QPSK	38150	1RB#0	Range1:0.009~0.15MHz	-65.96	PASS
Band38	20MHz	QPSK	38150	1RB#0	Range2:0.15~30MHz	-50.78	PASS
Band38	20MHz	QPSK	38150	1RB#0	Range3:30~1000MHz	-41.84	PASS
Band38	20MHz	QPSK	38150	1RB#0	Range4:1000~10000MHz	-44.97	PASS
Band38	20MHz	QPSK	38150	1RB#0	Range5:10000~20000MHz	-49.12	PASS
Band38	20MHz	QPSK	38150	1RB#0	Range6:20000~26500MHz	-37.07	PASS
Band38	20MHz	16QAM	37850	1RB#0	Range1:0.009~0.15MHz	-64.48	PASS
Band38	20MHz	16QAM	37850	1RB#0	Range2:0.15~30MHz	-52.35	PASS
Band38	20MHz	16QAM	37850	1RB#0	Range3:30~1000MHz	-41.97	PASS
Band38	20MHz	16QAM	37850	1RB#0	Range4:1000~10000MHz	-44.92	PASS
Band38	20MHz	16QAM	37850	1RB#0	Range5:10000~20000MHz	-49.09	PASS
Band38	20MHz	16QAM	37850	1RB#0	Range6:20000~26500MHz	-36.87	PASS
Band38	20MHz	16QAM	38000	1RB#0	Range1:0.009~0.15MHz	-64.6	PASS
Band38	20MHz	16QAM	38000	1RB#0	Range2:0.15~30MHz	-49.74	PASS
Band38	20MHz	16QAM	38000	1RB#0	Range3:30~1000MHz	-41.44	PASS
Band38	20MHz	16QAM	38000	1RB#0	Range4:1000~10000MHz	-44.85	PASS
Band38	20MHz	16QAM	38000	1RB#0	Range5:10000~20000MHz	-49.04	PASS
Band38	20MHz	16QAM	38000	1RB#0	Range6:20000~26500MHz	-37.03	PASS
Band38	20MHz	16QAM	38150	1RB#0	Range1:0.009~0.15MHz	-65.62	PASS
Band38	20MHz	16QAM	38150	1RB#0	Range2:0.15~30MHz	-52.21	PASS
Band38	20MHz	16QAM	38150	1RB#0	Range3:30~1000MHz	-42.62	PASS
Band38	20MHz	16QAM	38150	1RB#0	Range4:1000~10000MHz	-44.87	PASS
Band38	20MHz	16QAM	38150	1RB#0	Range5:10000~20000MHz	-49.16	PASS
Band38	20MHz	16QAM	38150	1RB#0	Range6:20000~26500MHz	-37.13	PASS

Test Graphs


Band38-5MHz-QPSK-37775-1RB#0-Range1:0.009~0.15MHz




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

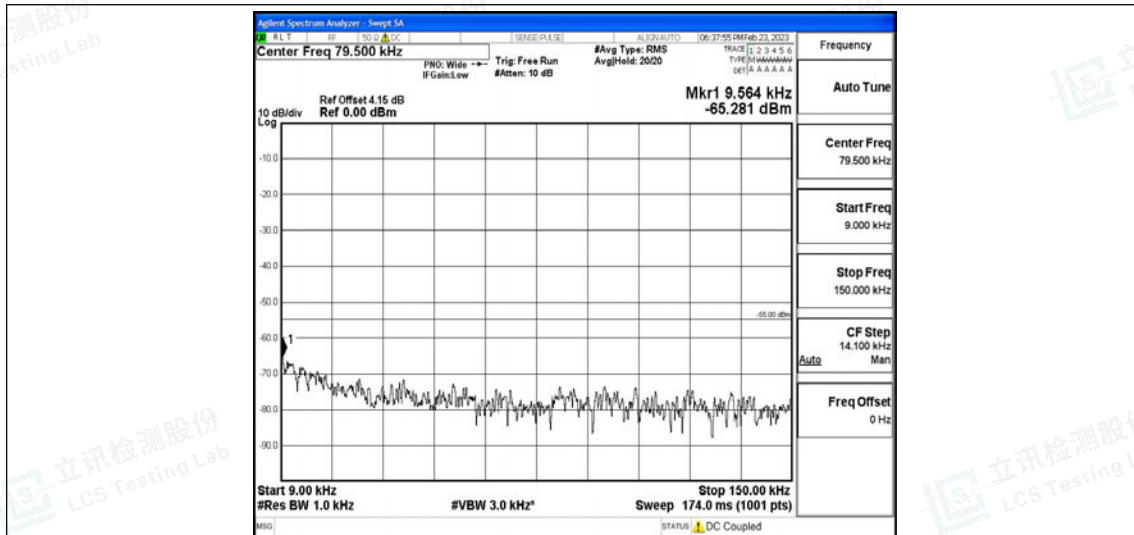

Band38-5MHz-QPSK-37775-1RB#0-Range2:0.15~30MHz

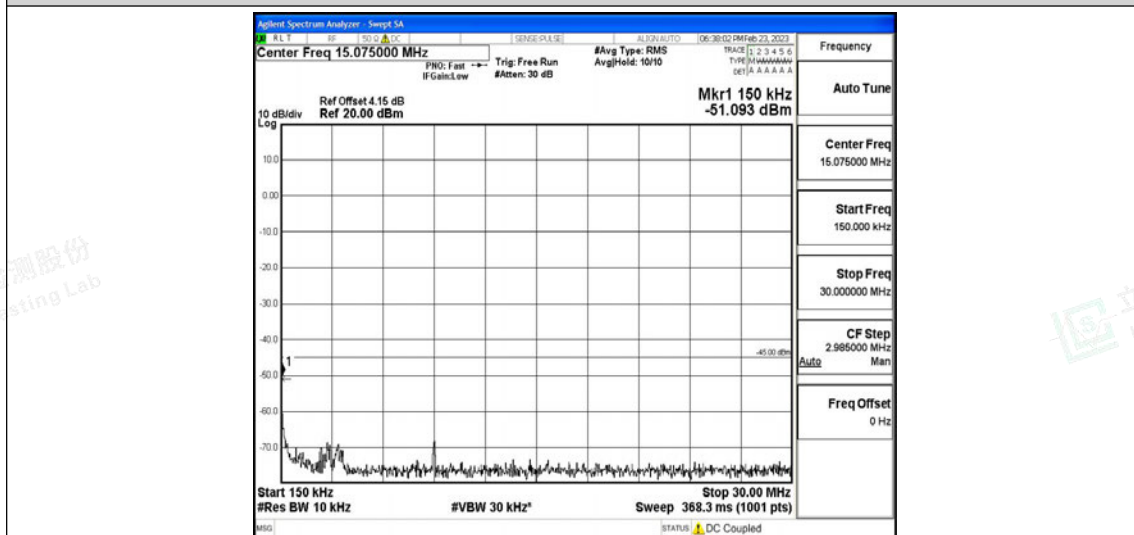


Band38-5MHz-QPSK-37775-1RB#0-Range3:30~1000MHz

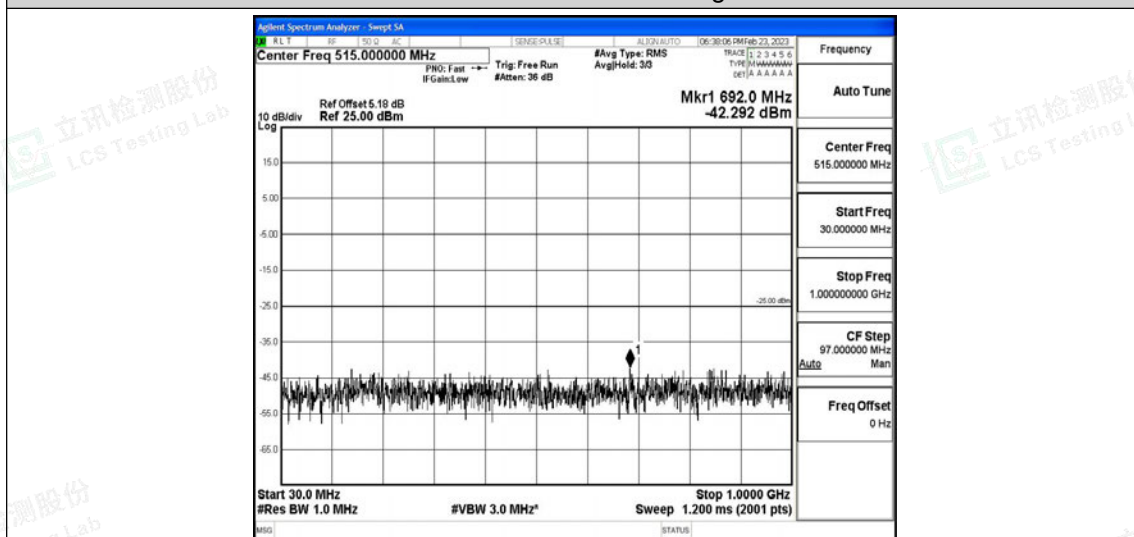


Band38-5MHz-QPSK-37775-1RB#0-Range4:1000~10000MHz




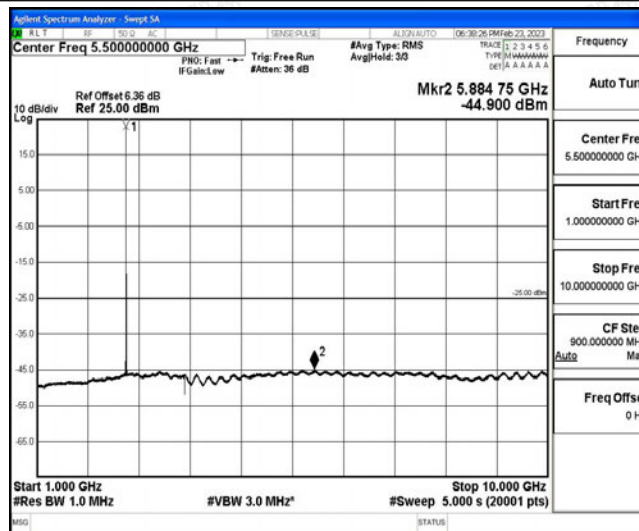

Band38-5MHz-QPSK-37775-1RB#0-Range5:10000~20000MHz

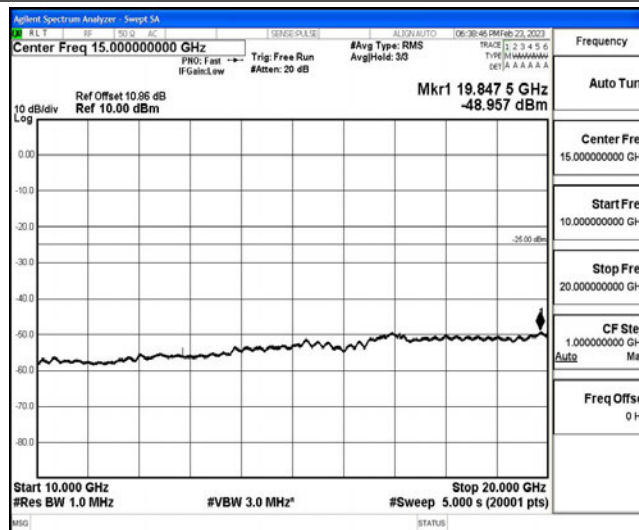


Band38-5MHz-QPSK-37775-1RB#0-Range6:20000~26500MHz

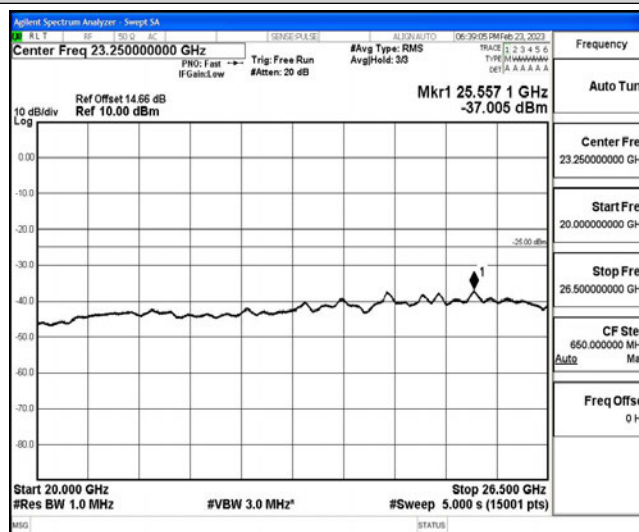


Band38-5MHz-QPSK-38000-1RB#0-Range1:0.009~0.15MHz




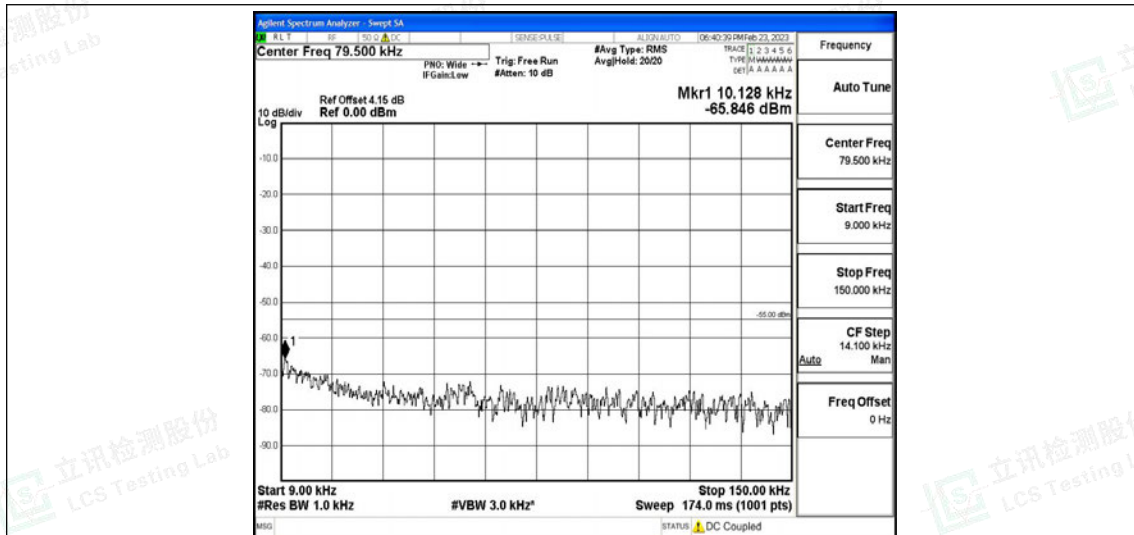

Band38-5MHz-QPSK-38000-1RB#0-Range2:0.15~30MHz

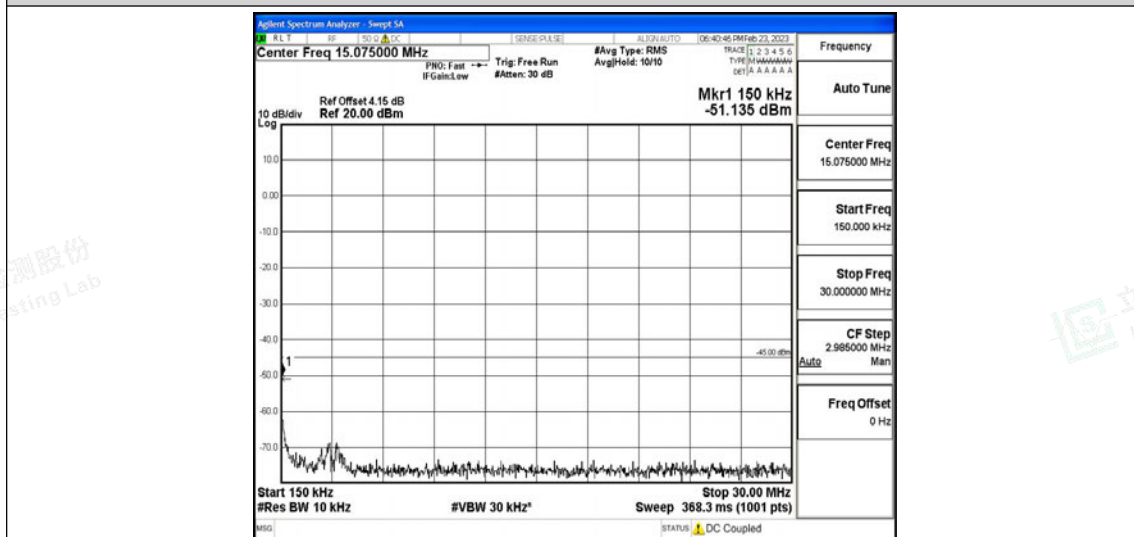


Band38-5MHz-QPSK-38000-1RB#0-Range3:30~1000MHz

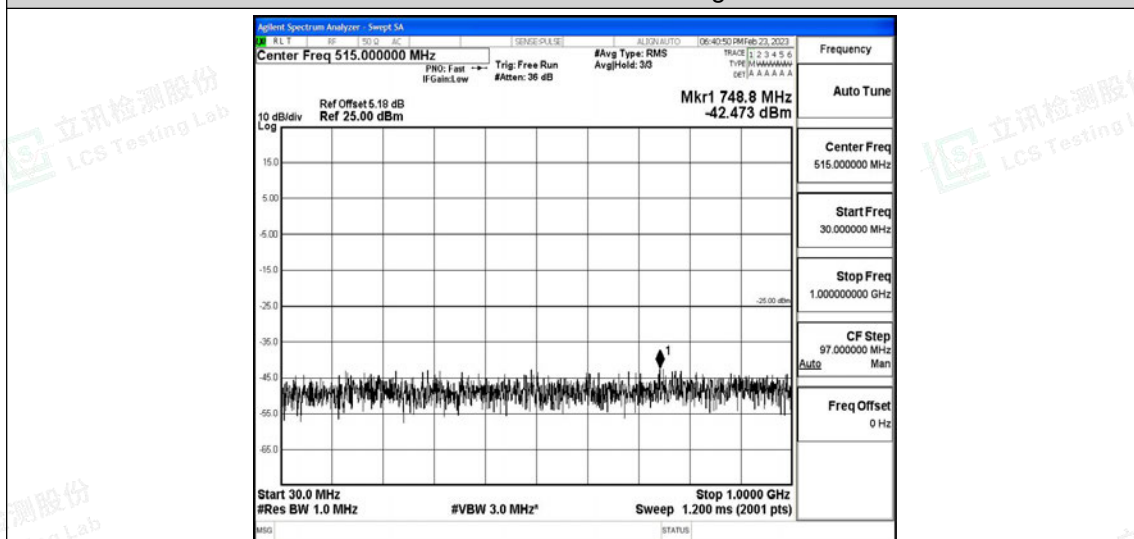


Band38-5MHz-QPSK-38000-1RB#0-Range4:1000~10000MHz




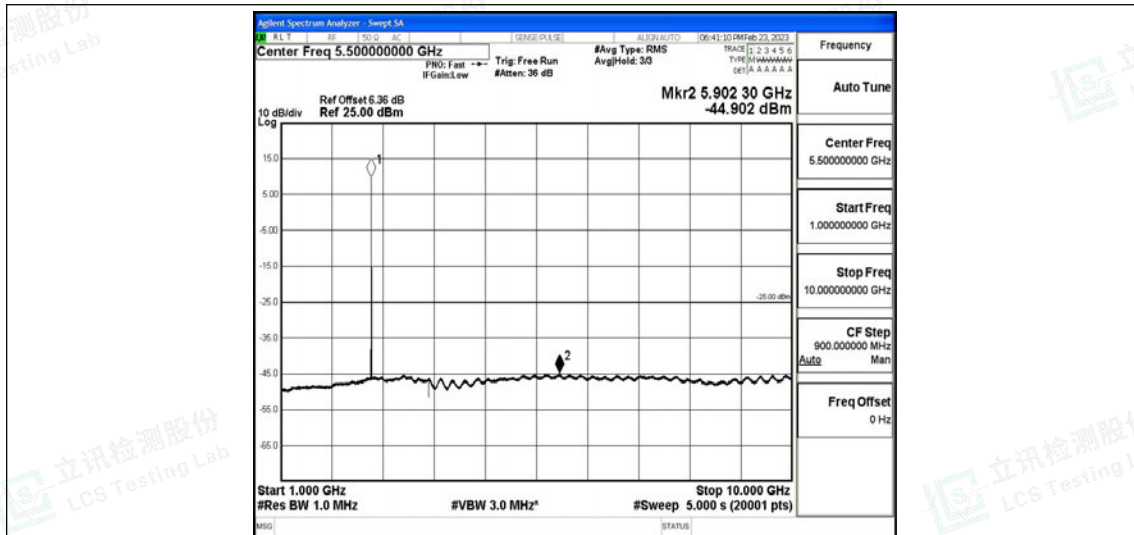

Band38-5MHz-QPSK-38000-1RB#0-Range5:10000~20000MHz

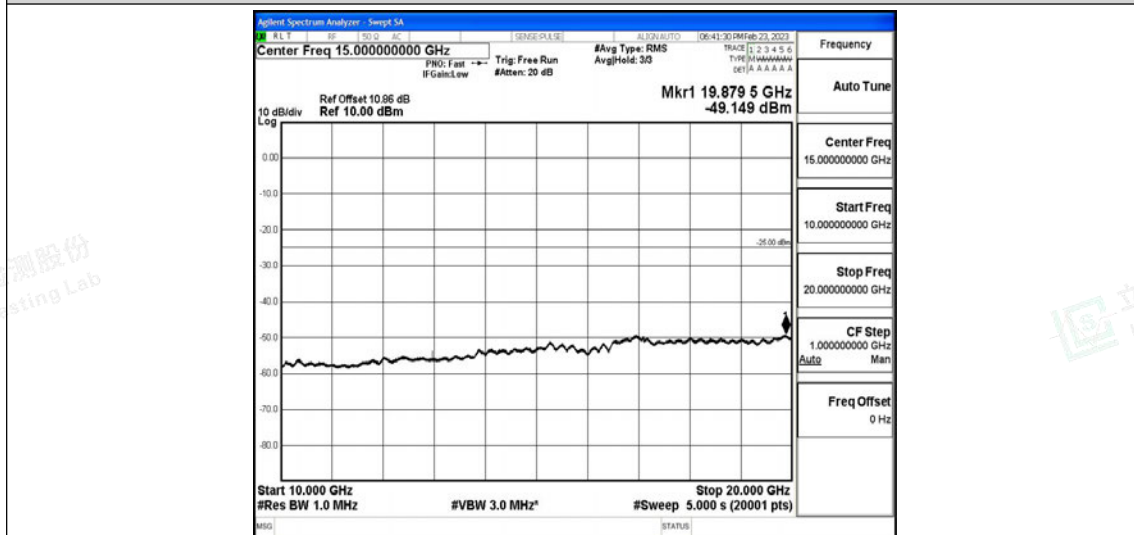


Band38-5MHz-QPSK-38000-1RB#0-Range6:20000~26500MHz

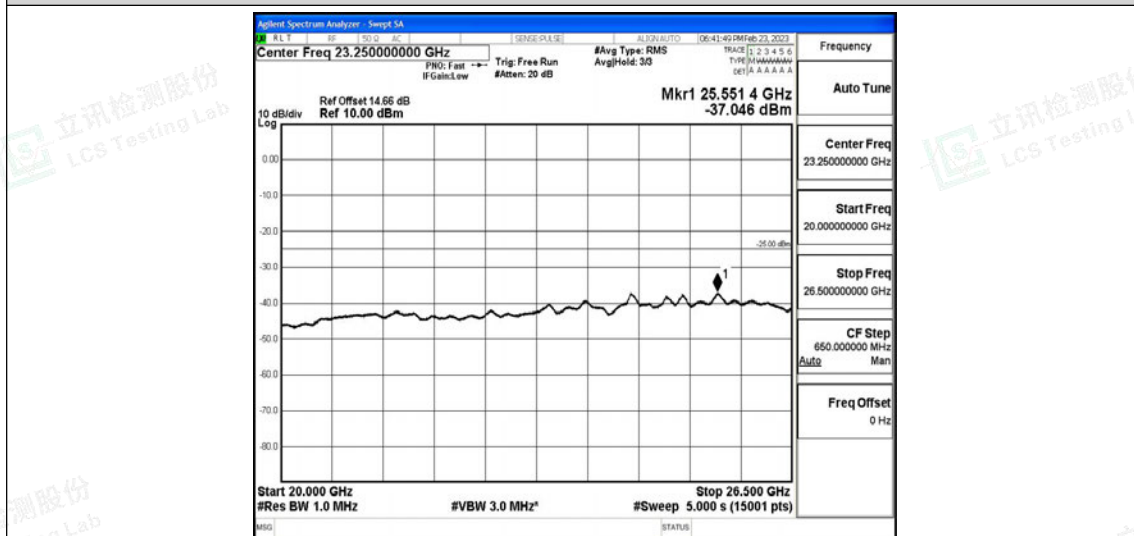


Band38-5MHz-QPSK-38225-1RB#0-Range1:0.009~0.15MHz




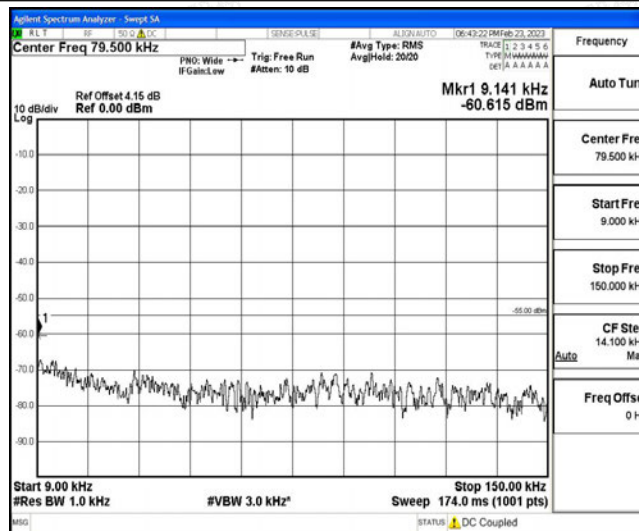

Band38-5MHz-QPSK-38225-1RB#0-Range2:0.15~30MHz

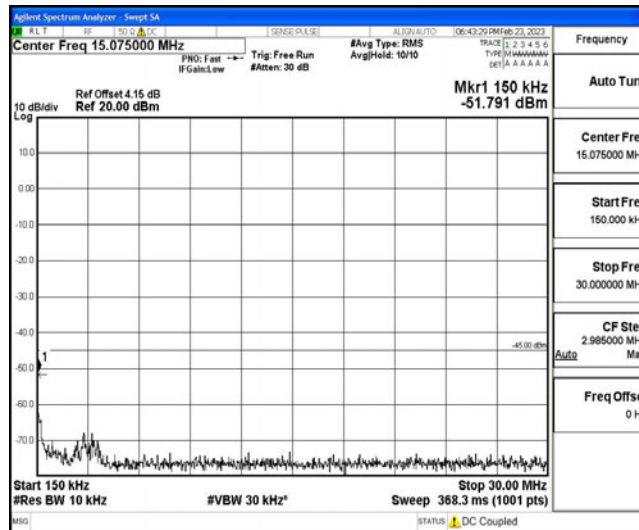


Band38-5MHz-QPSK-38225-1RB#0-Range3:30~1000MHz

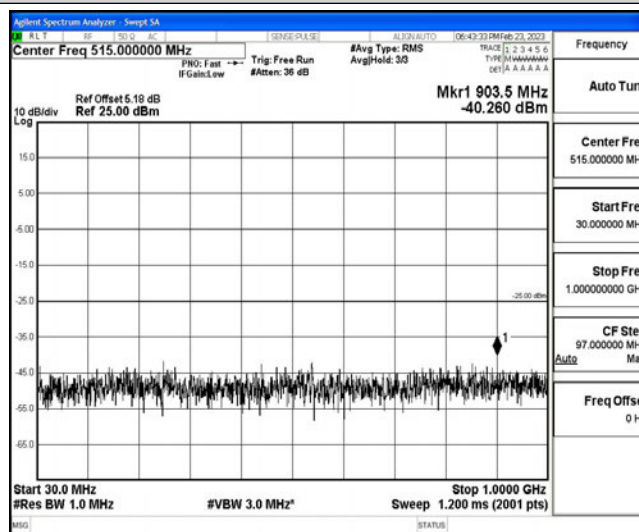


Band38-5MHz-QPSK-38225-1RB#0-Range4:1000~10000MHz




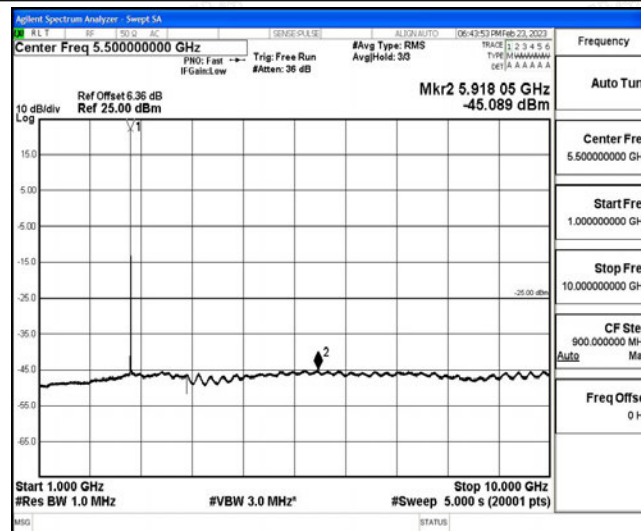

Band38-5MHz-QPSK-38225-1RB#0-Range5:10000~20000MHz

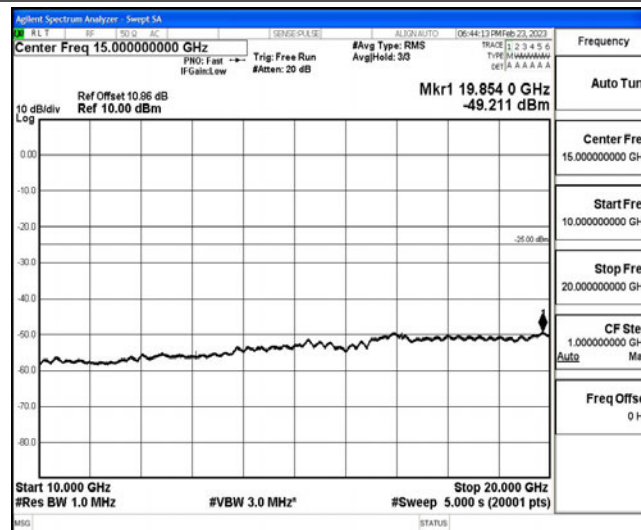


Band38-5MHz-QPSK-38225-1RB#0-Range6:20000~26500MHz

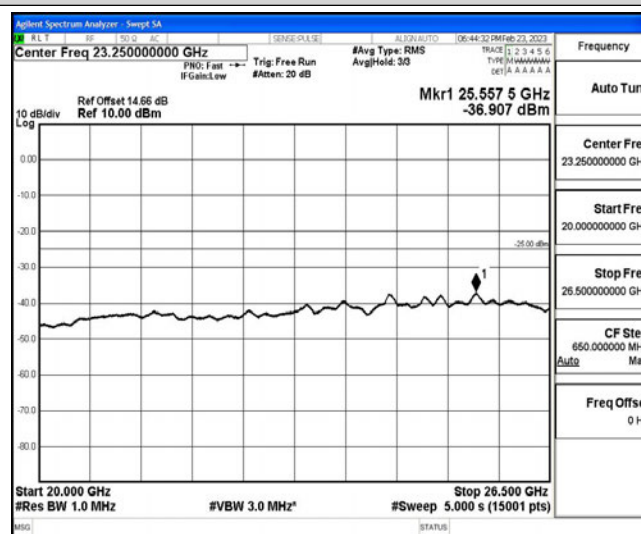


Band38-5MHz-16QAM-37775-1RB#0-Range1:0.009~0.15MHz




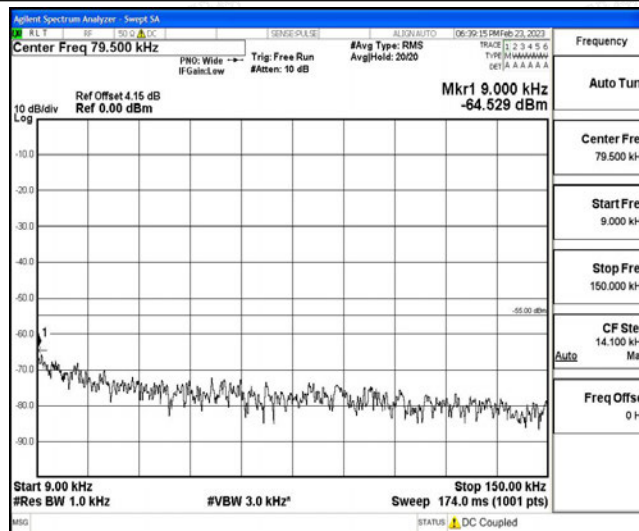

Band38-5MHz-16QAM-37775-1RB#0-Range2:0.15~30MHz

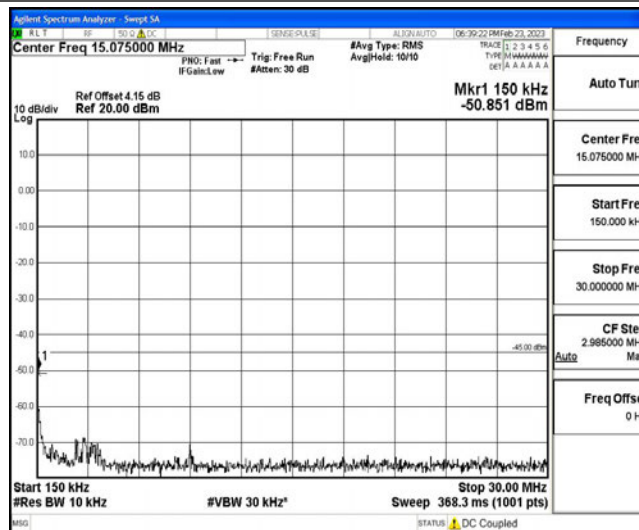


Band38-5MHz-16QAM-37775-1RB#0-Range3:30~1000MHz

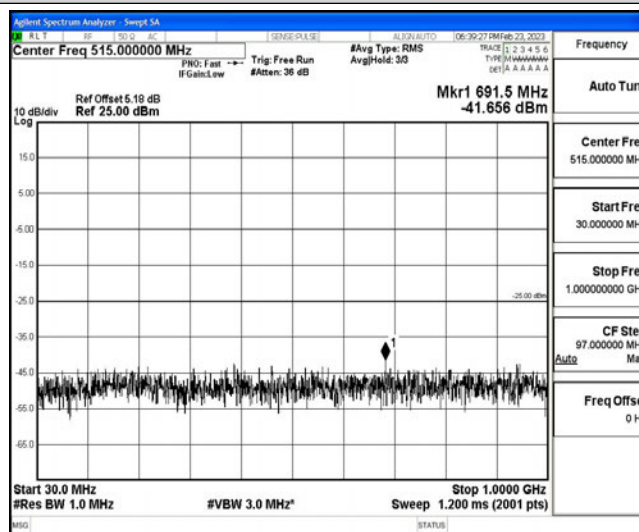


Band38-5MHz-16QAM-37775-1RB#0-Range4:1000~10000MHz




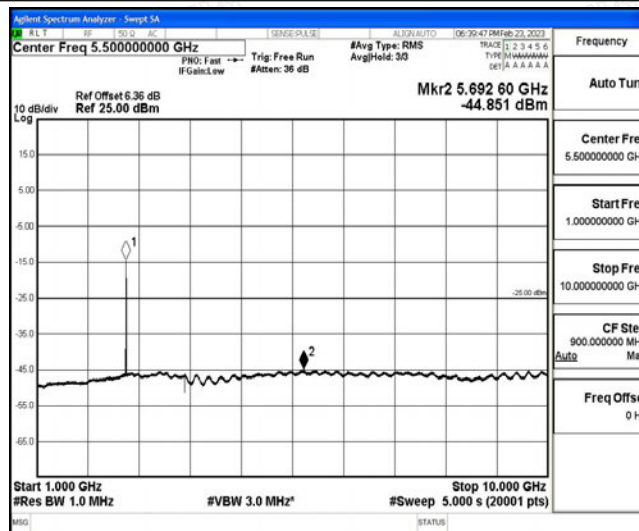

Band38-5MHz-16QAM-37775-1RB#0-Range5:10000~20000MHz

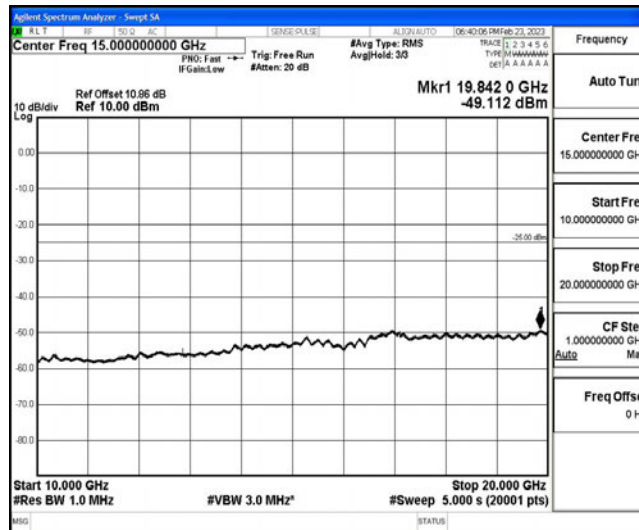


Band38-5MHz-16QAM-37775-1RB#0-Range6:20000~26500MHz

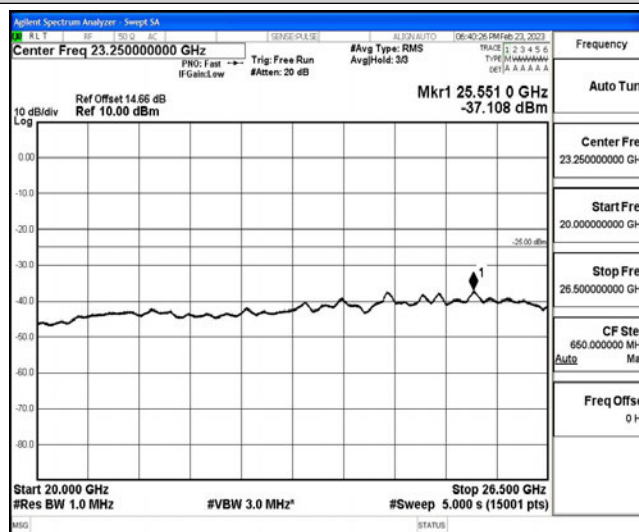


Band38-5MHz-16QAM-38000-1RB#0-Range1:0.009~0.15MHz




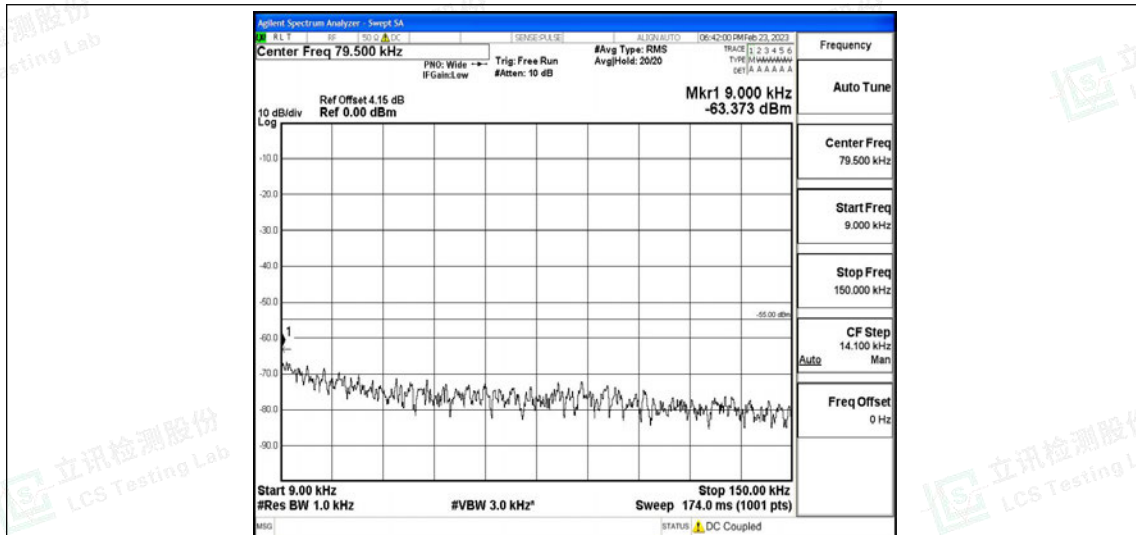

Band38-5MHz-16QAM-38000-1RB#0-Range2:0.15~30MHz

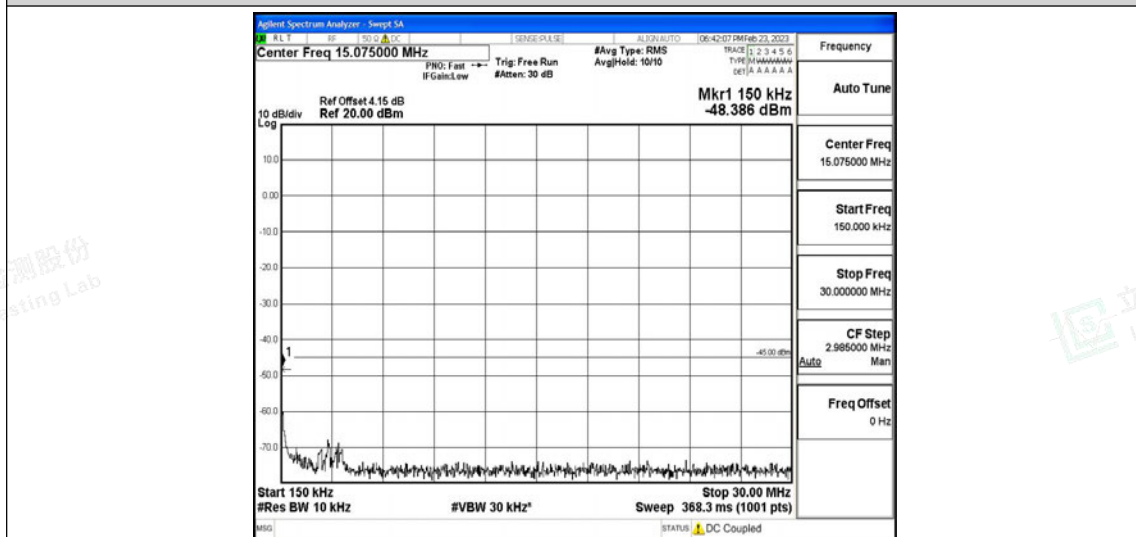


Band38-5MHz-16QAM-38000-1RB#0-Range3:30~1000MHz

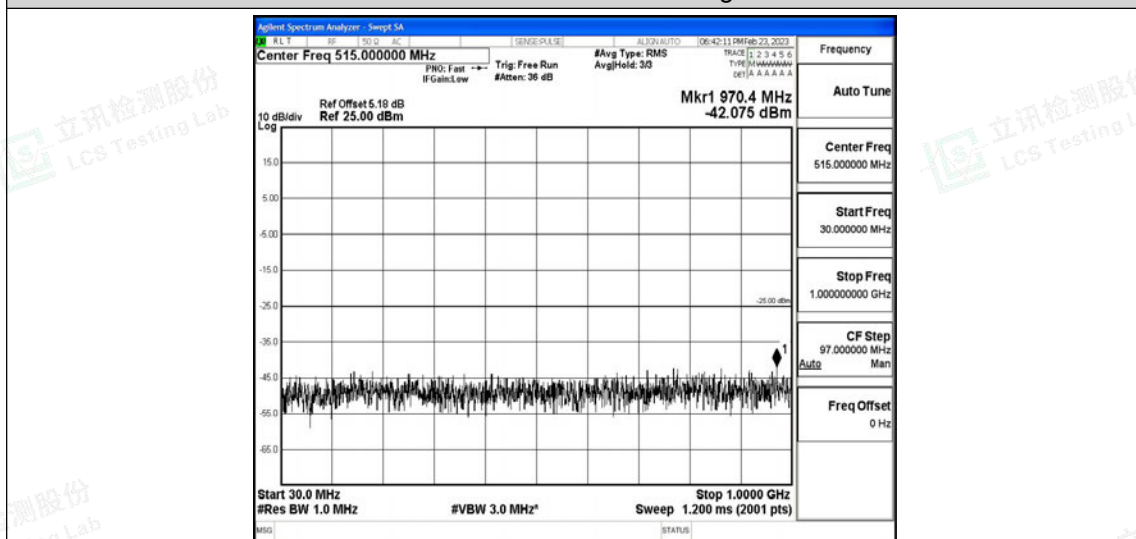


Band38-5MHz-16QAM-38000-1RB#0-Range4:1000~10000MHz




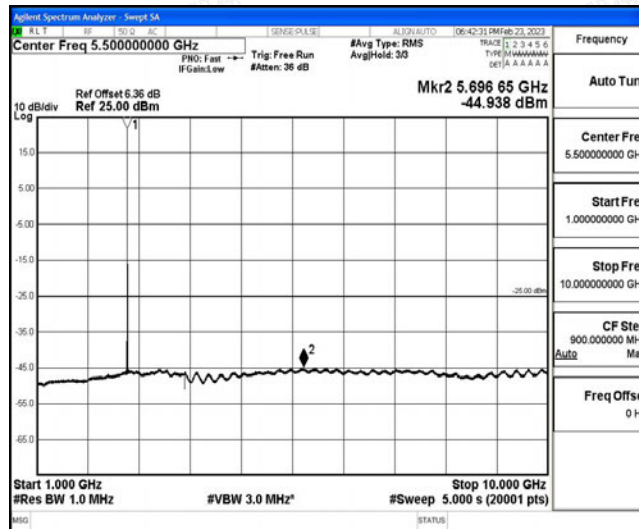

Band38-5MHz-16QAM-38000-1RB#0-Range5:10000~20000MHz

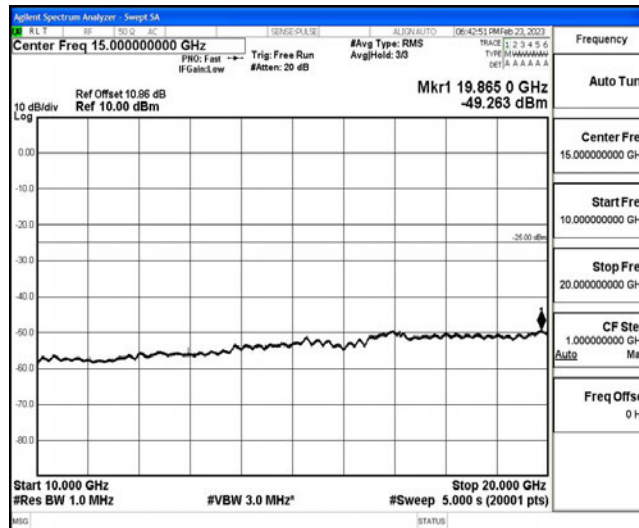


Band38-5MHz-16QAM-38000-1RB#0-Range6:20000~26500MHz

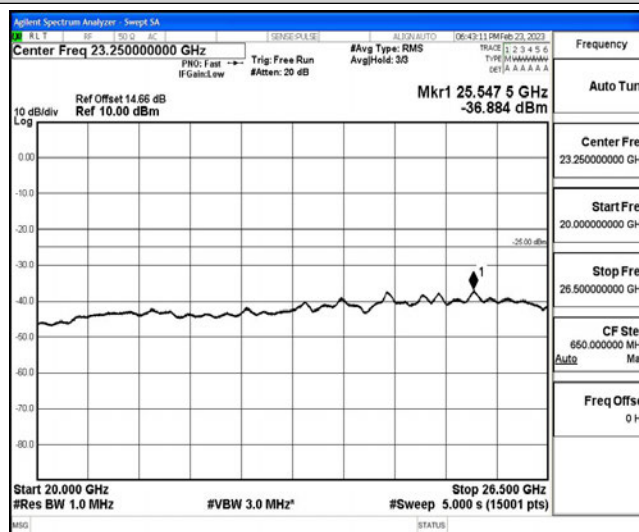


Band38-5MHz-16QAM-38225-1RB#0-Range1:0.009~0.15MHz




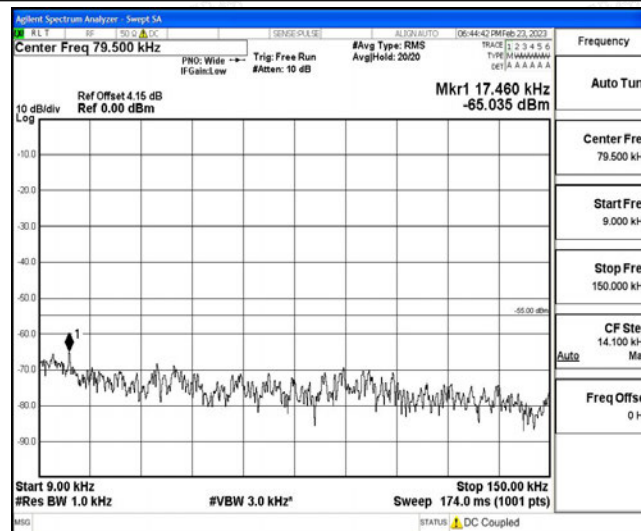

Band38-5MHz-16QAM-38225-1RB#0-Range2:0.15~30MHz

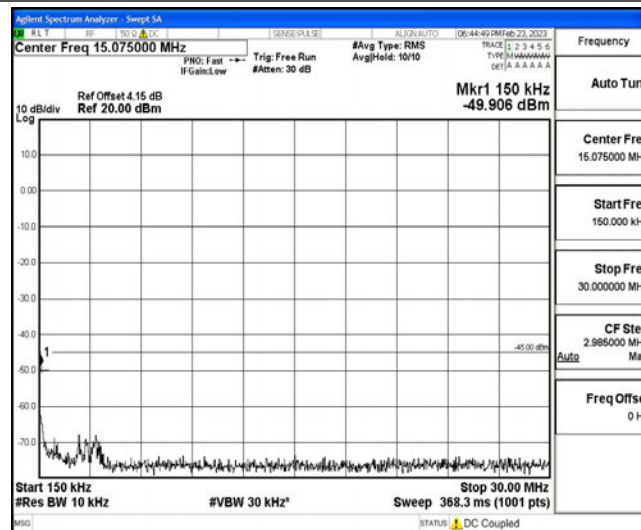


Band38-5MHz-16QAM-38225-1RB#0-Range3:30~1000MHz

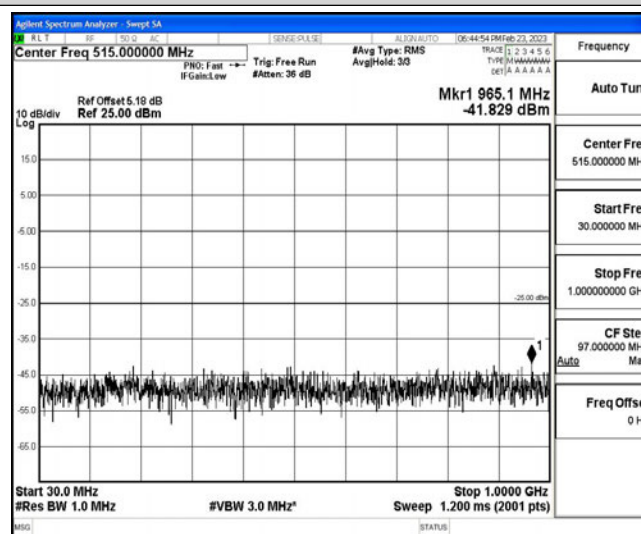


Band38-5MHz-16QAM-38225-1RB#0-Range4:1000~10000MHz




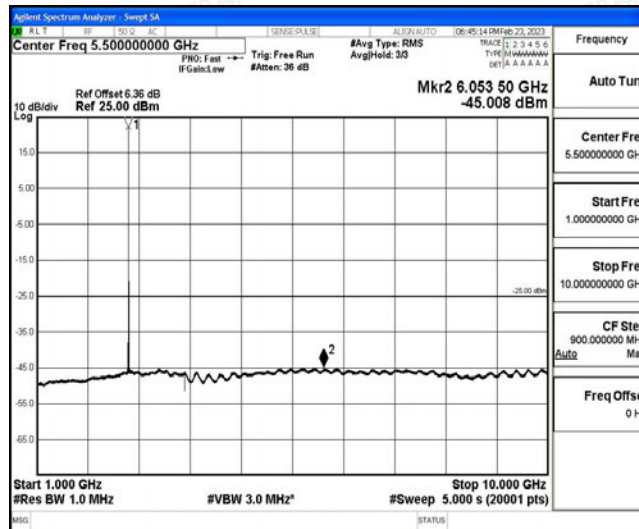

Band38-5MHz-16QAM-38225-1RB#0-Range5:10000~20000MHz

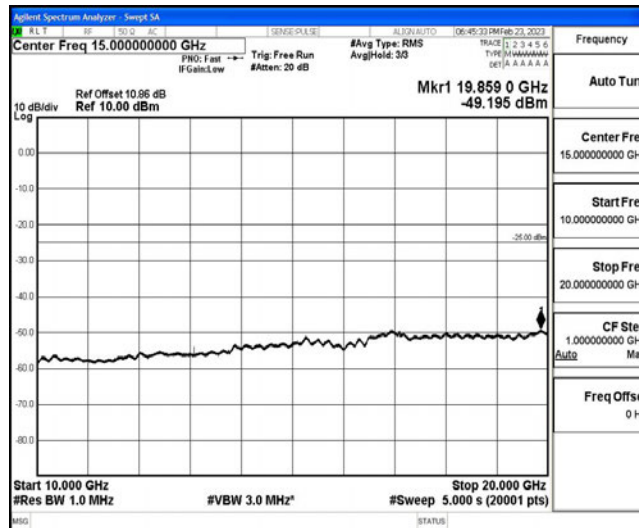


Band38-5MHz-16QAM-38225-1RB#0-Range6:20000~26500MHz

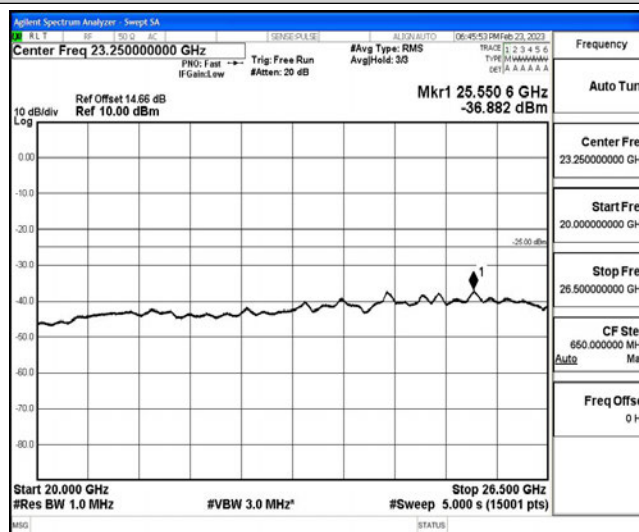


Band38-10MHz-QPSK-37800-1RB#0-Range1:0.009~0.15MHz




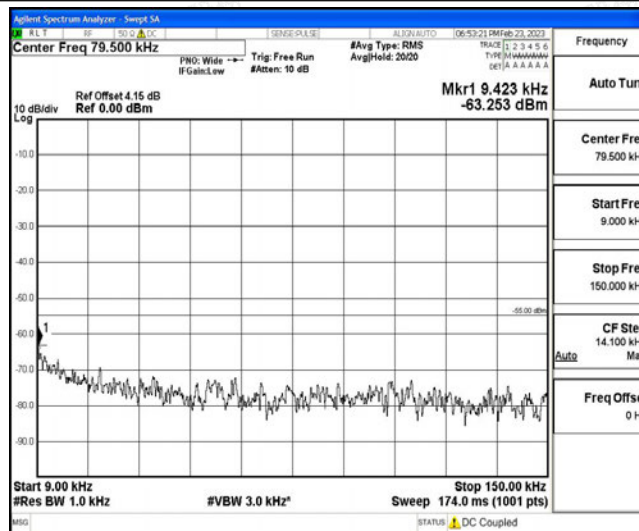

Band38-10MHz-QPSK-37800-1RB#0-Range2:0.15~30MHz

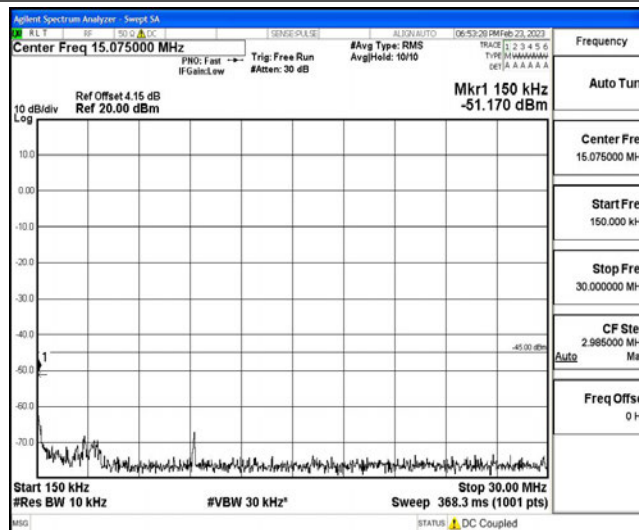

Band38-10MHz-QPSK-37800-1RB#0-Range3:30~1000MHz

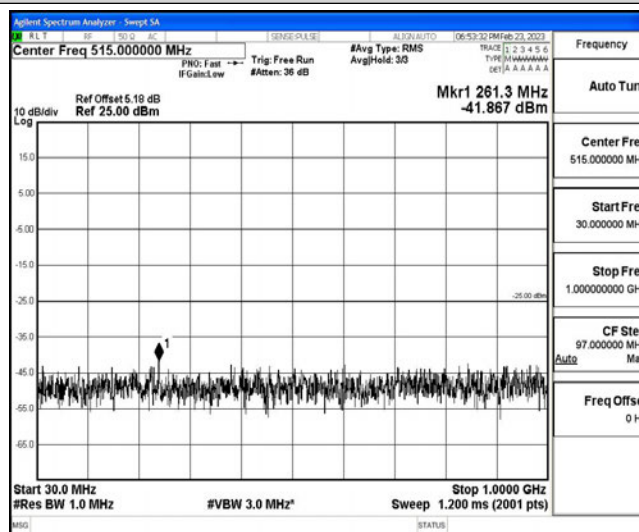

Band38-10MHz-QPSK-37800-1RB#0-Range4:1000~10000MHz

