

Test Report

Report No. : MTi250328001-1105E2

Date of Issue : 2025-04-28

Applicant : Creoh USA LLC

Product : 3-in-1 Magnetic Powerbank

Model(s) : IJS.220

FCC ID : 2AZWG-PBWKS

Shenzhen Microtest Co., Ltd.

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	5
1.3	Description of support units	5
2	Measurement uncertainty	6
3	Test facilities and accreditations	6
3.1	Test laboratory	6
4	List of test equipment	7
5	Test result	8
5.2	Test setup	9
5.3	Test Procedures	9
5.4	Information of test equipment	10
5.5	Test results	11
	Photographs of the Test Setup	27
	Photographs of the EUT	28

Test Result Certification		
Applicant	Creoh USA LLC	
Applicant Address	1750 Cedarbridge Ave Suite 4, Lakewood, New Jersey, USA	
Manufacturer	Creoh USA LLC	
Manufacturer Address	1750 Cedarbridge Ave Suite 4, Lakewood, New Jersey, USA	
Product description		
Product name	3-in-1 Magnetic Powerbank	
Trademark	IT'S JUST SMART	
Model name	IJS.220	
Series Model(s)	N/A	
Standards	FCC CFR 47 PART 1, § 1.1310 part2.1093	
Test method	KDB 680106 D01 Wireless Power Transfer v04	
Testing Information		
Date of test	2025-04-09 to 2025-04-14	
Test Result	Pass	
Prepared by:	Letter Lan	<i>Letter. Lan.</i>
Reviewed by:	David Lee	<i>David. Lee</i>
Approved by:	Lewis Lian	<i>Lewis Lian</i>

1 General Description

1.1 Description of the EUT

Product name:	3-in-1 Magnetic Powerbank
Model name:	IJS.220
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Type-C Input: DC 5V/3A, 9V/2.22A, 12V/1.67A Type-C Output: DC 5V/3A, 9V/2.22A, 12V/1.67A Wireless Output: Phone: 15W (Max) /10W/7.5W/5W, Watch: 2.5W, Earbuds: 3W Battery: DC 3.85V 10000mAh 38.5Wh
Accessories:	Cable: USB-C to USB-C cable (16cm)*1
Hardware version:	XS-F15-V1.0
Software version:	FE32
Test sample(s) number:	MTi250328001-11-R001
RF specification	
Operating frequency range:	Phone: 115-205kHz (5W, 7.5W, 15W) 360kHz (10W) Earbuds: 115-205kHz Watch: 300-350kHz
Modulation type:	ASK
Antenna(s) type:	Coil

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode1	Changing+Wireless Output(Phone 5W)
Mode2	Wireless Output(Phone 5W)
Mode3	Changing+Wireless Output(Watch 2.5W)
Mode4	Wireless Output(Watch 2.5W)
Mode5	Changing+Wireless Output(Earbuds 3W)
Mode6	Wireless Output(Earbuds 3W)
Mode7	Wireless Output(Phone 7.5W)
Mode8	Wireless Output(Phone 10W)
Mode9	Wireless Output(Phone 10W) 360kHz
Mode10	Wireless Output(Phone 15W)

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Phone	X3	/	oppo
watch	Apple watch S7	M0JVGQG1VP	Apple
Phone	13	/	Apple
Air Pods	MQD83CH/A	/	Apple
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurements(3kHz~10MHz)	$\pm 14.8\%$
Electric field measurements(3kHz~10MHz)	$\pm 17.5\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E143	Near-field Electric and Magnetic Field Sensor System	SPEAG	MAGPy-8H3 D+ED3	3101	2024/3/12	2027/3/11

No.	Equipment	Manufacturer	Model	Software version:	Cal. date	Cal. Due
MTI-E016S	MPE test software	SPEAG	MAGPY 2.6	2.6	/	/

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30


f = frequency in MHz

* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

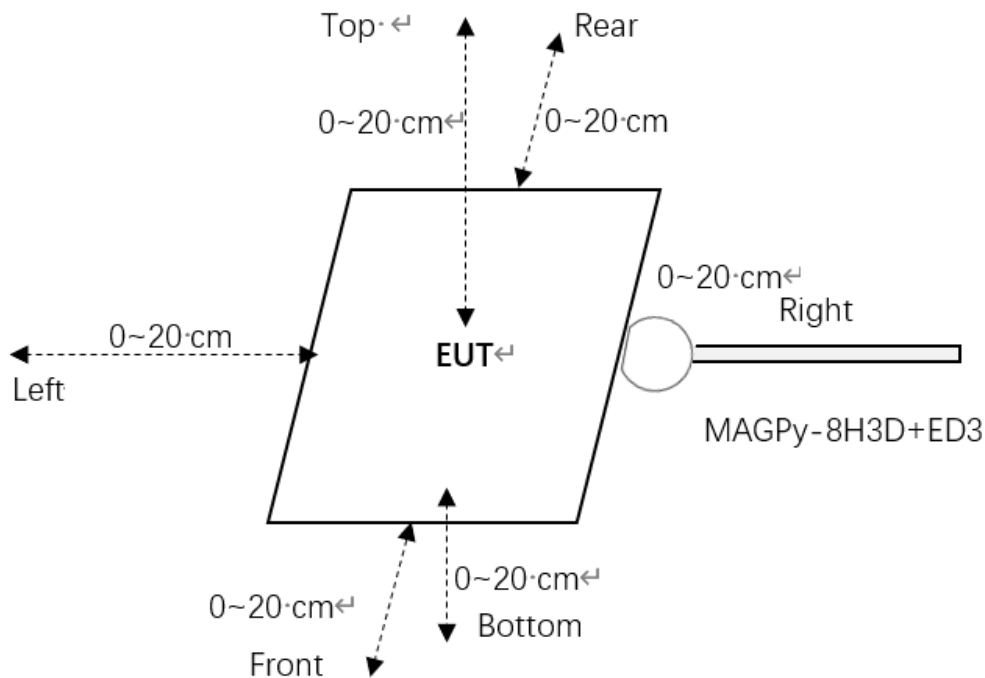

Note: tips mode of the test probe is used for 0cm measurement.


5.3 Test Procedures

a. H-field measurements should be taken 0 cm ~ 20 cm with 2 cm increments from the center of the probe.

The center of the probe to the tip surface of the probe is 18.5 mm, so the directly testing can be performed at the probe center from 2 cm to 20 cm.

To measure the 0 cm H-field, the probe tip mode is used. The total H-field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H-field measured at the top and bottom sensors, H_{top} and H_{bottom} , as well as the normalized H-field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm)

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i$$

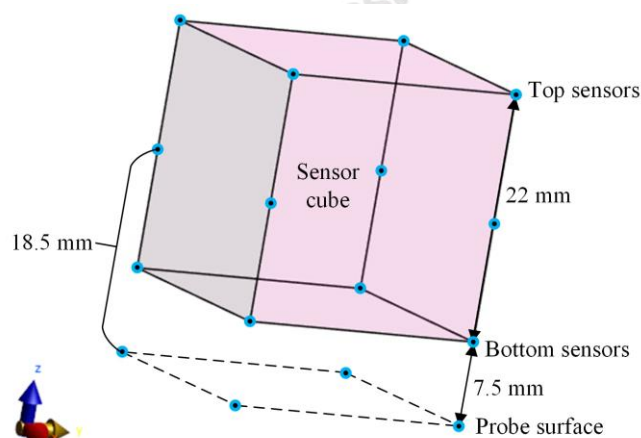

5.4 Information of test equipment

Test equipment: MAGPy-8H3D+ED3	
Diameter	60mm
8 isotropic H-field sensors	Concentric loops of 1cm ² arranged at the corner of a cube of 22mm side length
1 isotropic E-field sensor	Orthogonal dipole/monopole (arm length: 50mm)
Measurement center	18.5mm from the probe tip
Dimensions	110*635*35mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
	
Test probe, without the casing	

Item	Specification
Test frequency range:	3kHz ~ 10MHz
Probe sensitivity	E-field: 0.08-2000 V/m H-field: 0.1-3200 A/m
Probe level response	E-field: ± 1 dB H-field: ± 1 dB
linearity error	E-field: ± 0.3 dB H-field: ± 0.3 dB
Isotropy	E-field: ± 0.8 dB H-field: ± 0.6 dB

5.5 Test results

All client power has been assessed (1%,50%, 99%), and the 1% battery status of client device was the worst.

Test condition 1: Mode9 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.44	1.63	88.34%
Left	0.12		
Right	0.61		
Front	0.51		
Rear	0.82		
Bottom	0.59		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.71	1.63	43.56%
Left	0.06		
Right	0.34		
Front	0.22		
Rear	0.41		
Bottom	0.25		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.35	1.63	21.47%
Left	0.020		
Right	0.14		
Front	0.10		
Rear	0.20		
Bottom	0.110		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.14	1.63	8.59%
Left	0.009		
Right	0.06		
Front	0.04		
Rear	0.09		
Bottom	0.030		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.07	1.63	4.29%
Left	0.006		
Right	0.02		
Front	0.01		
Rear	0.03		
Bottom	0.009		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.04	1.63	2.45%
Left	0.005		
Right	0.009		
Front	0.006		
Rear	0.01		
Bottom	0.006		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.04	1.63	2.45%
Left	0.004		
Right	0.008		
Front	0.006		
Rear	0.01		
Bottom	0.006		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	1.84%
Left	0.004		
Right	0.007		
Front	0.005		
Rear	0.01		
Bottom	0.006		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	1.84%
Left	0.003		
Right	0.006		
Front	0.004		
Rear	0.01		
Bottom	0.006		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	1.84%
Left	0.003		
Right	0.005		
Front	0.003		
Rear	0.01		
Bottom	0.005		

Test condition 2: Mode9 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	1.23%
Left	0.003		
Right	0.003		
Front	0.002		
Rear	0.01		
Bottom	0.004		

Test condition 1: Mode10 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.6	1.63	98.16%
Left	1.08		
Right	0.96		
Front	1.33		
Rear	0.85		
Bottom	0.88		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.54	1.63	94.48%
Left	0.76		
Right	1.21		
Front	1.34		
Rear	0.98		
Bottom	0.62		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.84	1.63	51.53%
Left	0.310		
Right	0.66		
Front	0.69		
Rear	0.47		
Bottom	0.290		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.42	1.63	25.77%
Left	0.150		
Right	0.31		
Front	0.37		
Rear	0.25		
Bottom	0.120		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.21	1.63	12.88%
Left	0.09		
Right	0.14		
Front	0.16		
Rear	0.13		
Bottom	0.06		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.19	1.63	11.60%
Left	0.08		
Right	0.13		
Front	0.14		
Rear	0.12		
Bottom	0.05		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.15	1.63	9.28%
Left	0.06		
Right	0.10		
Front	0.12		
Rear	0.09		
Bottom	0.04		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.12	1.63	7.42%
Left	0.05		
Right	0.08		
Front	0.09		
Rear	0.07		
Bottom	0.03		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.10	1.63	5.94%
Left	0.04		
Right	0.06		
Front	0.07		
Rear	0.06		
Bottom	0.03		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.08	1.63	4.75%
Left	0.03		
Right	0.05		
Front	0.06		
Rear	0.05		
Bottom	0.02		

Test condition 2: Mode10 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.06	1.63	3.80%
Left	0.03		
Right	0.04		
Front	0.05		
Rear	0.04		
Bottom	0.02		

Test condition 1: Mode4 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.59	1.63	97.55%
Left	0.16		
Right	1.08		
Front	1.12		
Rear	1.06		
Bottom	1.08		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.98	1.63	60.12%
Left	0.06		
Right	0.79		
Front	0.82		
Rear	0.68		
Bottom	0.71		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.43	1.63	28.83%
Left	0.010		
Right	0.47		
Front	0.36		
Rear	0.41		
Bottom	0.300		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.27	1.63	16.56%
Left	0.007		
Right	0.21		
Front	0.15		
Rear	0.17		
Bottom	0.150		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.11	1.63	6.75%
Left	0.005		
Right	0.09		
Front	0.06		
Rear	0.09		
Bottom	0.06		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.05	1.63	3.68%
Left	0.004		
Right	0.05		
Front	0.06		
Rear	0.05		
Bottom	0.01		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.04	1.63	3.07%
Left	0.004		
Right	0.05		
Front	0.05		
Rear	0.05		
Bottom	0.01		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	3.07%
Left	0.004		
Right	0.04		
Front	0.04		
Rear	0.05		
Bottom	0.01		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	2.45%
Left	0.004		
Right	0.04		
Front	0.03		
Rear	0.04		
Bottom	0.01		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.03	1.63	1.84%
Left	0.003		
Right	0.03		
Front	0.03		
Rear	0.03		
Bottom	0.01		

Test condition 2: Mode4 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.02	1.63	1.84%
Left	0.003		
Right	0.03		
Front	0.03		
Rear	0.02		
Bottom	0.01		

Test condition 1: Mode6 operating mode with client device (1 % battery status of client device)

-estimated value: 0cm

Estimated value for H-Filed Strength at 0 cm from the edges surrounding the EUT (A/m)

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.61	1.63	98.77%
Left	0.42		
Right	1.54		
Front	1.44		
Rear	1.36		
Bottom	0.57		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 2cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.54	1.63	94.48%
Left	0.19		
Right	1.37		
Front	1.33		
Rear	1.28		
Bottom	0.34		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 4cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	1.31	1.63	80.37%
Left	0.080		
Right	0.96		
Front	0.97		
Rear	0.85		
Bottom	0.140		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 6cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.84	1.63	51.53%
Left	0.030		
Right	0.37		
Front	0.33		
Rear	0.29		
Bottom	0.060		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 8cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.42	1.63	25.77%
Left	0.01		
Right	0.14		
Front	0.12		
Rear	0.09		
Bottom	0.02		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 10cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.21	1.63	12.88%
Left	0.006		
Right	0.05		
Front	0.03		
Rear	0.02		
Bottom	0.009		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 12cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.168	1.63	10.31%
Left	0.0048		
Right	0.04		
Front	0.024		
Rear	0.016		
Bottom	0.0072		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 14cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.134	1.63	8.25%
Left	0.004		
Right	0.032		
Front	0.019		
Rear	0.013		
Bottom	0.006		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 16cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.108	1.63	6.60%
Left	0.003		
Right	0.026		
Front	0.015		
Rear	0.010		
Bottom	0.005		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 18cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.086	1.63	5.28%
Left	0.002		
Right	0.020		
Front	0.012		
Rear	0.008		
Bottom	0.004		

Test condition 2: Mode6 operating mode with client device (1 % battery status of client device)

- Test distance: 20cm

Probe Position	H-field (A/m)		
	Measurement	Limit	Percentage (%)
Z axis	0.069	1.63	4.22%
Left	0.002		
Right	0.016		
Front	0.010		
Rear	0.007		
Bottom	0.003		

Photographs of the Test Setup

See the Appendix - Test Setup.

Photographs of the EUT

See the Appendix - EUT Photos.

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****