


ON I OFF

WiFi Smart Switch

This instruction include the "RF 433MHz remote control", according to product you have.

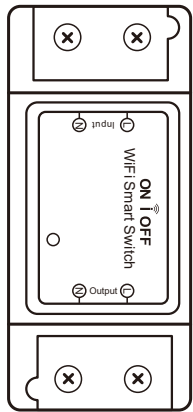


Parameter:

Power supply: 90V~250V AC
Max Current: 10A
WiFi Standard: 2.4GHz b/g/n
Material: ABS VO
Size: 88*38*22mm

checklist: before using the device

- Your smart phone or tablet has connected to a 2.4G WiFi with internet.
- Your have the correct WiFi PWD.
- Your smart phone or tablet must have access to APP Store, Google play.
- Your router is MAC-open.




User Guide

- 1 Start with "Smart Life" APP.




- 2 Register an Intelligent life account.
- 3 If you have Intelligent life account just log in.
- 4 Power up.


Note: the switch operating principle, The connected appliances work/stop through live wire power on/off.



4.1 Appliance wiring instruction.



4.2 Ceiling lamp wiring instruction.




4.3 One wire wiring instruction.



Note: The switch must be powered up by N and L wires.

- 5 Press and hold the button for about 5 seconds until the WiFi LED blinks fast.



- 6 Enter the App, tap "+" in the upper right of the page to enter network connection page.

- 7 There are two network connection methods (Normal mode and AP mode). Normal mode is default. Users could tap the upper right corner to switch the connection method to AP mode.

- 8 please make sure the device's indicator light rapidly flashes (2 times per second), tap to go on to the next step.

- 9 If indicator light is not rapidly flashing, tap "how to set indicator light as rapid flashes" to view operation processes

- 10 Input your WiFi password.
- 11 Name your device.
- 12 the device is online.

RF 433MHz remote control setting (if).

1. Adding remote controller:

Pairing with button: press the button of the receiver 3 times, the LED starts to flash, then enter the pairing state of the remote control, and press the button of the remote control to complete the pairing. The configuration of the remote controller is state switching by default (the configuration can be modified in the app).

Pairing with app: after completing the network distribution, enter the app interface, setting - RF remote control setting - add, and press the remote control. After adding successfully, it is automatically saved as state switching configuration. If you need to modify the configuration, you can enter the list of remote controls in the app to modify it.

2. Modify remote control configuration:

There are 4 ways to modify remote control settings in APP:

a) ON: press the remote controller button to turn on. If the channel has been opened, there will be no action.

b) OFF: press the remote controller button to turn off. If the channel has been closed, there will be no action.

c) Toggle switch state: press a remote controller button to toggle switch state.

d) Is not set: Keep the remote controller button, but no function.

3. Delete the remote controller method:

Button delete: short press the button of the receiver 8 times to clear all paired remote controls of the device.

App delete: enter the remote controller list, select a single remote control and click to the left to delete.

4. Note:

a) If the RF remote controller's button was learned, the switch will not learn this key. You can clear all the learned keys by pressing the button of the receiver 8 times, then learn again, or modify them in the application.

b) The switch can learn up to forty remote control's keys.

TROUBLESHOOTING

Q: How to set indicator light as rapid flashing?

- 1 Power on device, hold the reset button for 5s.
- 2 Confirm indicator light is now rapidly flashing.

Q: How to set indicator light as slow flashing?

- 1 Power on device, hold the reset button for 5s.
- 2 Confirm indicator light is now rapidly flashing.
- 3 Hold reset button for 5s again until indicator light is slowly flashing.

Note: The new added device needs 1min to connect to WiFi and the Internet if it stays offline for a long time please judge the problem by the WiFi LED status.

WiFi LED quickly blinks one time every second, device failed to connect to your WiFi?

- 1 Maybe you have entered wrong WiFi password.
- 2 Device is too far away from your WiFi, please take it closer.
- 3 Make sure your router MAC is open. if still failed, try to open a mobile hot spot and add again.



FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.