


尺寸: 90x100mm

材质: 105g铜版纸+正反单色印刷+风琴折

封面

JOYROOM

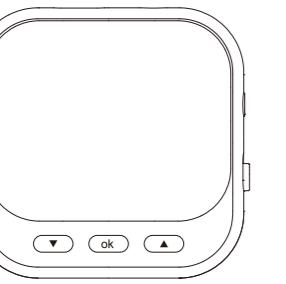

For FAQs and more information, please scan 


WARRANTY CODE **874695**

User Manual
Bluetooth Transmitter & Receiver

For FAQs and more information, please scan 

WARRANTY CODE **874695**

Product diagram

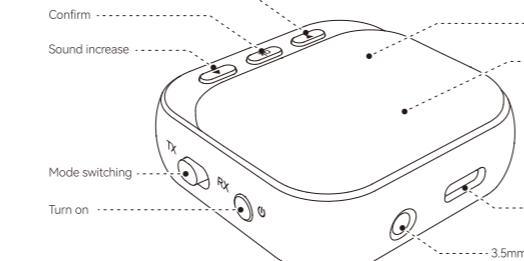

Packing list

Bluetooth transmitter receiver	3.5mm AUX Cable	Charging Cable	RCA Cable	Manual & Warranty Card
--------------------------------	-----------------	----------------	-----------	------------------------

Basic parameters

Model name: JR-CB2S	Pair 2 devices(x): support
Bluetooth version: V5.4	CODEC: SBC
Frequency range: 2.402-2.480GHz	Battery: 400mAh Rechargeable Lithium battery
Rx working time: About 18 hours	Charging voltage: 5V DC >500mA
Tx working time: About 30 hours	Working temperature: -10~55°C
Charging time: About 2 hours	Weight: 27g
Bluetooth protocol: A2DP, AVRCP	Size: 47.5mm*47.5mm*16.3mm

Basic function

Power Button	Power on	Long press "Power Button" 2~3s to power on
	Power off	Long press "Power Button" 2~3s to power off
	Paring	Double press "Power button" to enter pairing mode
	Power off forcibly	In abnormal state, long press "Power button" 8~9s to power off forcibly
OK Button	Select device	When it is in pairing(TX mode), press "ok button" to choose the device
	Continue pause	When it is in RX mode, press "ok button" to continue/pause the music
	Clear up pairing record	When it is power on, long press "ok button" 3s to clean up the pairing record
Switch Mode button	Switch mode	Turn the button to TX to enter TX mode. Turn the button to RX to enter RX mode
	Select item	When it is in TX Mode, press it to go up
Volume up button	Volume Up	RX Mode, press "volume up button" to volume up
	Next song	RX Mode, press "volume up button" 1s to next song
	Select item	When it is in TX Mode, press it to go down
Volume down button	Volume down	RX Mode, press "volume down button" to volume down
	Last song	RX Mode, press "volume down button" 1s to last song

TX Guide

I. TX mode paring and connection

- When it power off, press "swift mode button" to TX, press "power button" 2~3s.
- If it don't pair, double press "power button" to enter pairing mode, red and blue light flash alternately.
- Make your device power on and enter pairing mode. Usually, the flashing mode is alternating red and blue lights or rapid blue lights.
- After JR-CB2S search the device list, choose device by "volume up button" and "volume down button", then press "ok button" to connect.
- After connection, JR-CB2S blue light on, the screen show the name of device connected.

II. TX pair 2 devices

- After connecting the first device A, double-click the "Power button" of JR-CB2S to enter the pairing mode, and the red and blue lights flash alternately (the first connected device is not affected and can be used normally).
- Turn on the second device B (Bluetooth headset, speaker, receiver, etc.) and enter pairing mode.
- After JR-CB2S searches for the pairing name of device B, select the pairing name of device B by pressing the "volume up button" and "volume down button", and click the "ok button" to start the connection. When the connection is successful, the blue light of JR-CB2S will be steady on, and the Bluetooth names of devices A and B will be displayed on the screen.

III. TX mode connect tv

- Connect the JR-CB2S to your TV via a 3.5mm audio cable. You can hear the sound of the TV program by connecting the JR-CB2S device via Bluetooth.
- Turn the "Mode Switch button" to RX and press the power button for 2~3 seconds to start the machine.
- Make your device power on and enter pairing mode. Usually, the flashing mode is alternating red and blue lights or rapid blue lights.
- After JR-CB2S search the device list, choose device by "volume up button" and "volume down button", then press "ok button" to connect.

RX Guide

I. RX mode pairing and connection

- Turn the "Mode Switch button" to RX and press the power button for 2~3 seconds to start the machine.
- If it don't pair, double press "power button" to enter pairing mode, red and blue light flash alternately (the first mobile phone successfully connected will not be affected and can be used normally).

II. RX mode paring 2 devices

- After connecting the first mobile phone (computer, tablet), double-click the "Power button" of JR-CB2S to enter the pairing mode, and the red and blue lights flash alternately (the first mobile phone successfully connected will not be affected and can be used normally).

Basic function

State	Indicator
Power on (RX/TX)	Blue light flash 3 times
Power off (RX/TX)	Red light flash 3 times
Pairing (RX/TX)	Red and blue lights flash alternately
Stand by (RX/TX)	Blue light flashes twice every 5 seconds
connected (RX/TX)	Blue light on
Pair 2 devices (RX/TX)	Blue light on
Link back (RX/TX)	The blue light flashes once every 1 second
Clean up pairing record (RX/TX)	The red and blue lights flash four times simultaneously (the cleared records include TX and RX)
Low battery	Red and blue lights flashing red breath flashing 4 times simultaneously
Charging	Red light on
Full charge	Red light off

FAQ

A. Auto-power off
In the RX/TX state, if no device is connected for more than 10 minutes or the battery voltage is below 3.1V, the device will automatically shut down.

B. How to connect back? What if I can't connect it back?
After the JR-CB2S is successfully connected to the Bluetooth device, it will be automatically connected back to your device every time you start up. If the connection fails, please retry the connection.

C. How to clear pairing records?
In the state of RX or TX in, long press the "Confirm" button for 3 seconds, the display will display the prompt to clear pairing:
Factory Reset ?
Yes: Press (Press the "volume down button" to clear it directly, and the screen displays "Resetting..."). The red and blue lights flash four times simultaneously (the cleared records include TX and RX).
No: Press (Press "volume up button" to cancel).

D. What should I do if there are some exceptions such as power-on failure, abnormal connection and so on?
You can try to power off compulsively, long press the "power button" for 8~10 seconds, you can force power off, and then restart to use.

E. What is the charging voltage and current? What equipment can charge it?
As long as the DC voltage is 5V and the current is more than 500mA, the car charger, the bus charger, and the computer USB can charge the JR-CB2S.

Safety Criteria

1. Please follow the instructions, do not disassemble the product or refit it for any reason, otherwise it may break down or cause damage.
2. Do not immerse it in any liquid or wash it with water.
3. Please use adapters that conform to national/regional safety standards together with the included charging cable to charge the product, otherwise its battery may be damaged or cause safety problems.
4. Please use and store it in normal temperatures; too low or too high temperature (below 0°C or above 45°C) is not permitted.
5. Do not block the openings of the product, such as charging port, indicator, etc.
6. Do not use it at high volume levels or for long periods of time to avoid dizziness or hearing damage.
7. Do not use it under thunderstorm which may lead to abnormal performance and signal interruption.

It is hereby declared that this product model of JOYROOM, complies with the provisions of Directive 2014/53/EU and Directive 2011/65/EU. The full text of the EC Declaration of Conformity can be found on the following website: <https://www.joyroom.com>

This equipment complies with the provisions of Directive 2012/19/EU and 2006/68/EU. It is strictly forbidden to dispose of this equipment with ordinary trash. It must be recycled. This symbol indicates that the product shall not be treated as regular domestic trash, and must be delivered to a recycling center that is capable of recycling electronic and electrical equipment.

⚠ WARNING

① Before installing or operating the product, please refer to the electrical and safety information on the bottom of the shell.
② Disposing of the battery by throwing it into fire or a hot oven, or by mechanically crushing or cutting it may result in an explosion.
③ When the battery is exposed to extremely low air pressure, it may cause an explosion or lead to flammable liquid or gas leakage.
④ Please follow the above safety instructions otherwise it will cause fire, electric shock, damage or other injuries.

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.
3.1101.624725.000000