




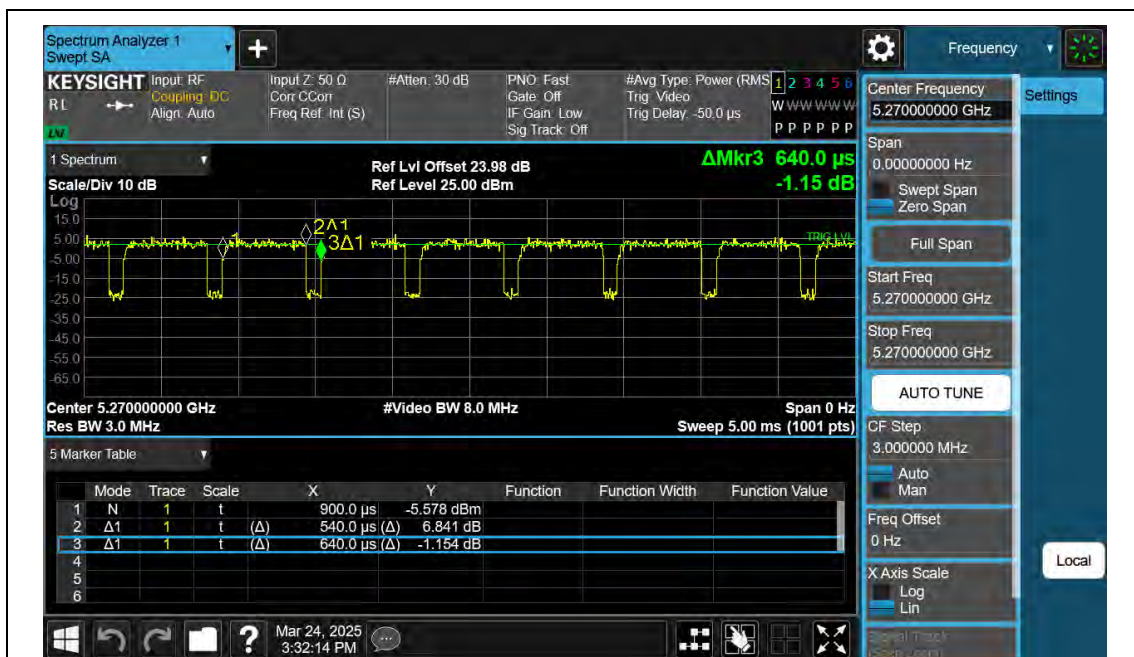


NTNV-11AX40SISO-Ant2-5270

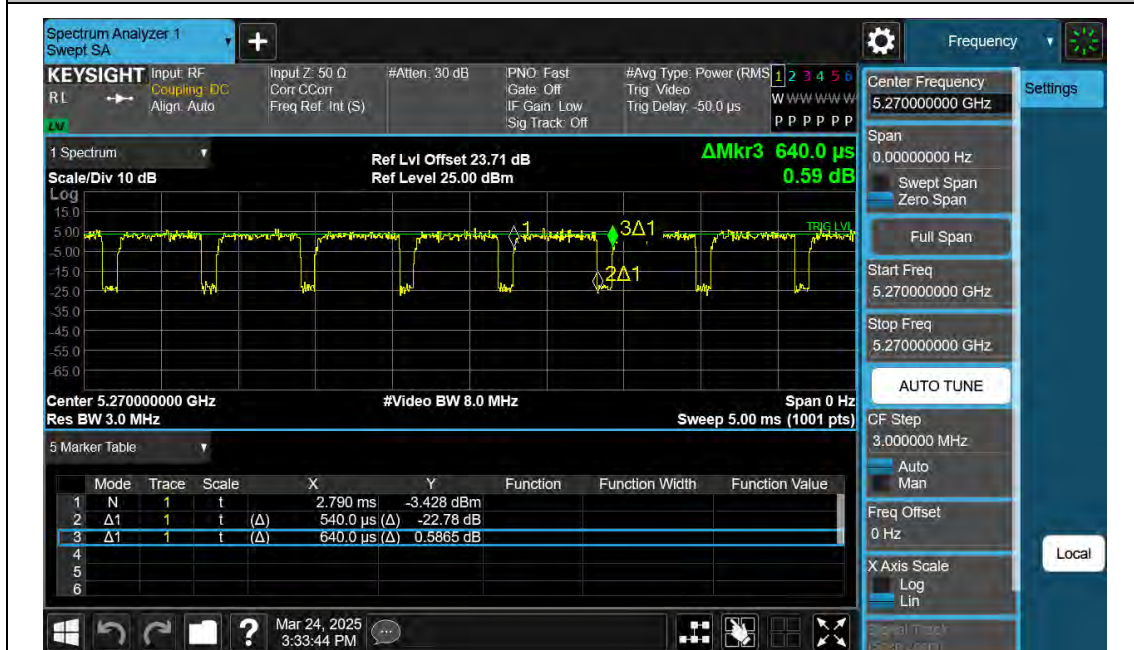


NTNV-11AX40SISO-Ant1-5310

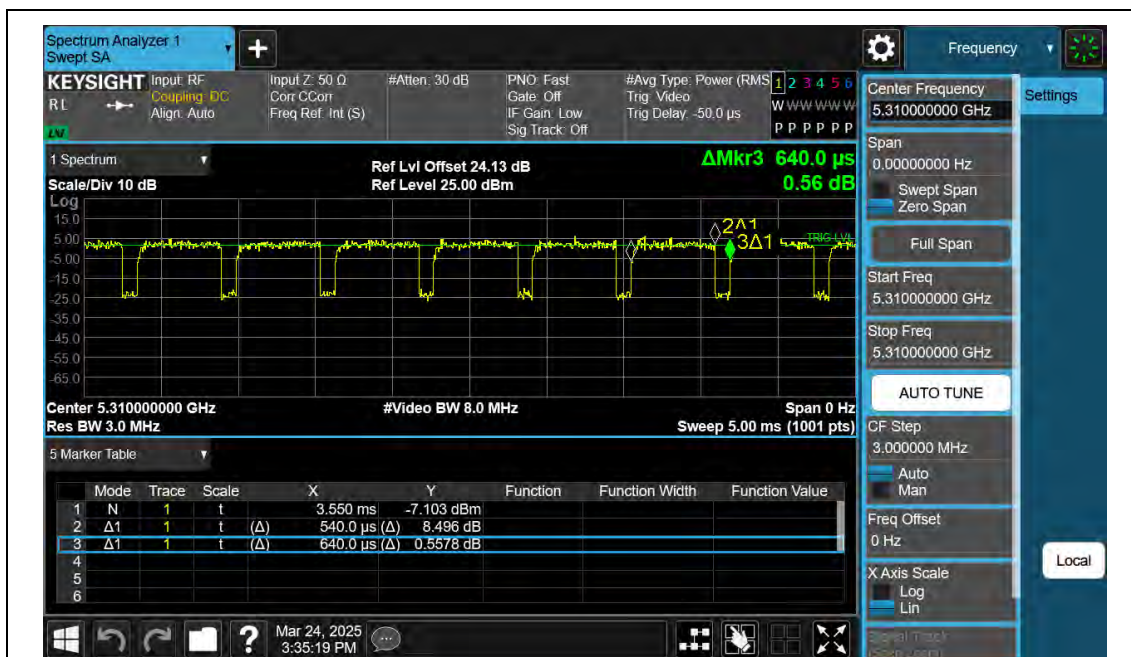


NTNV-11AX40SISO-Ant2-5310

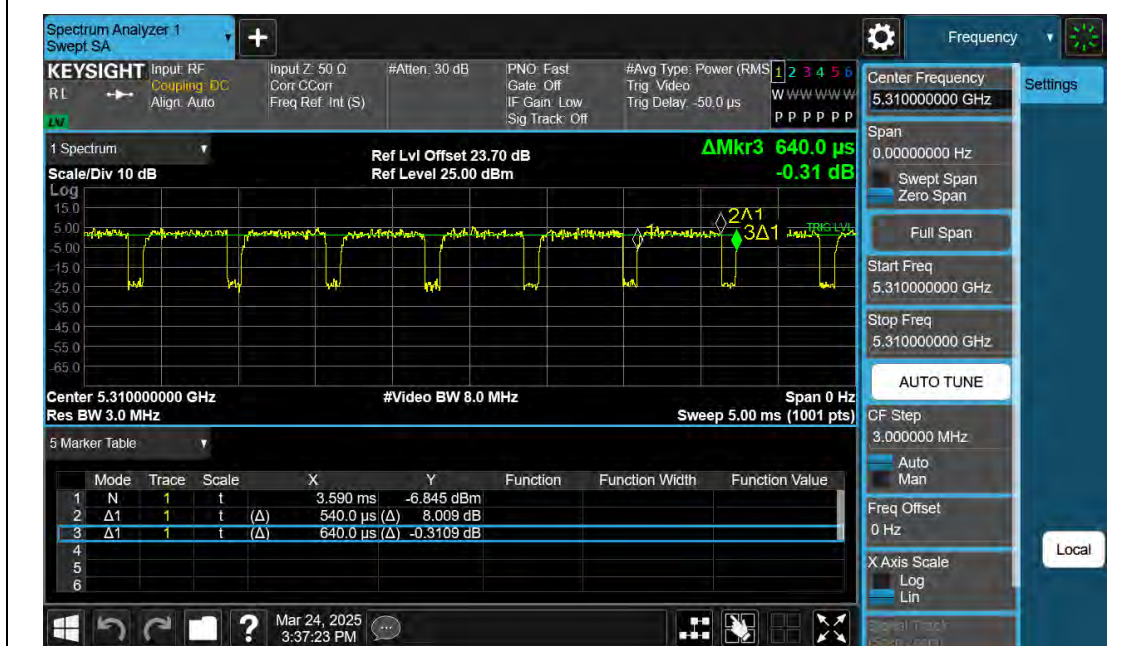


NTNV-11AX40SISO-Ant1-5510

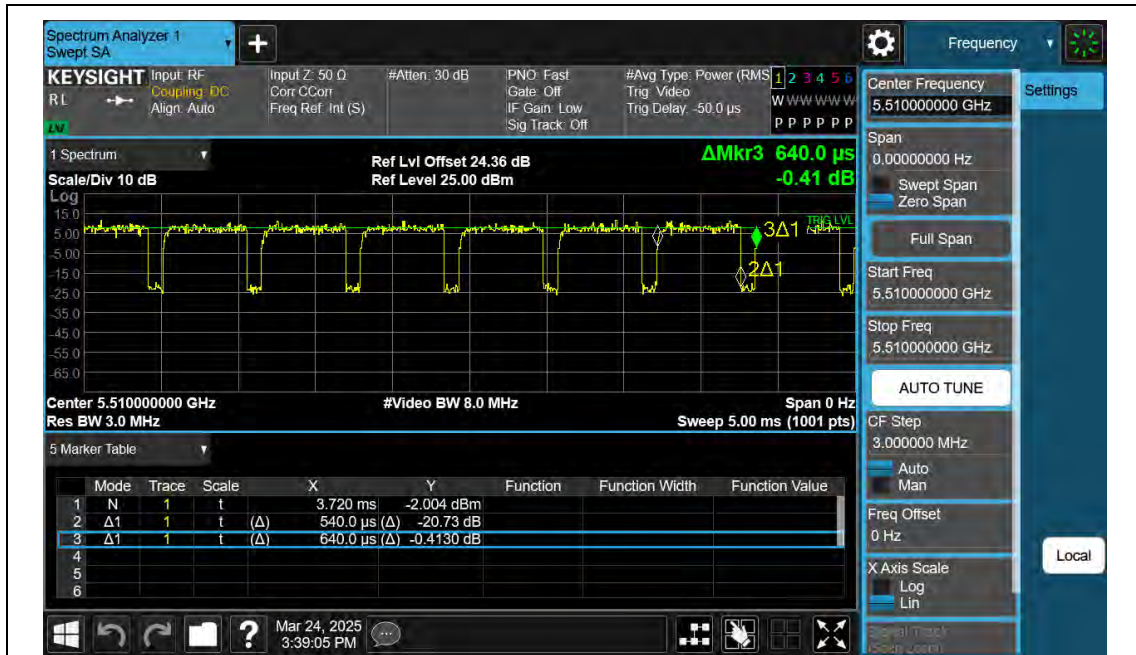


NTNV-11AX40SISO-Ant2-5510

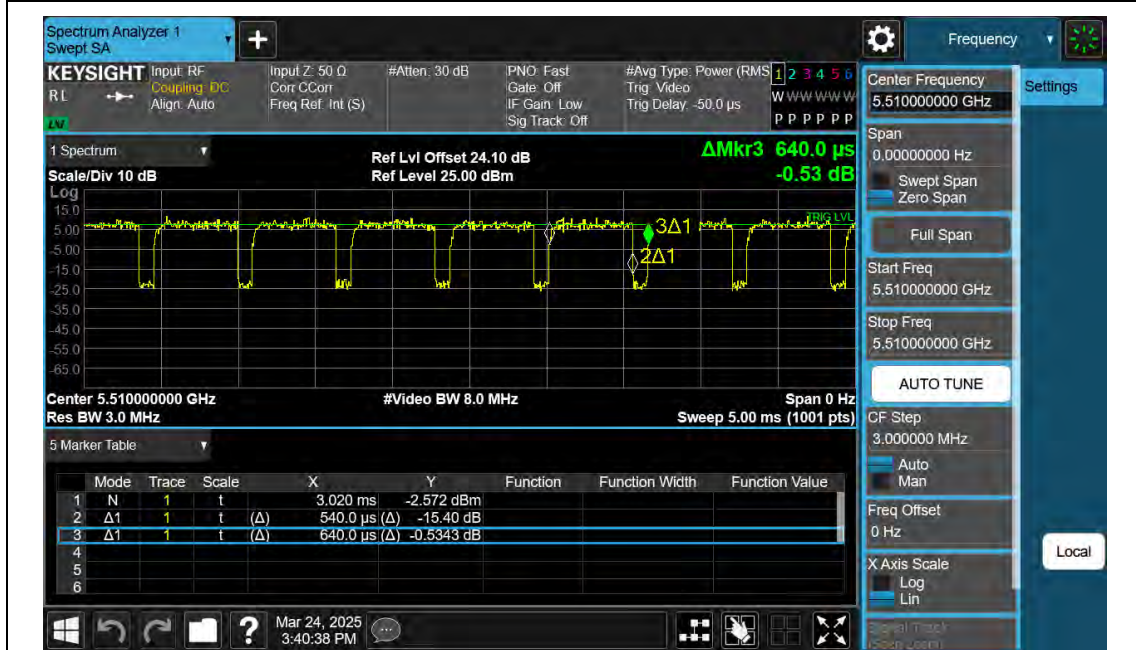


NTNV-11AX40SISO-Ant1-5550

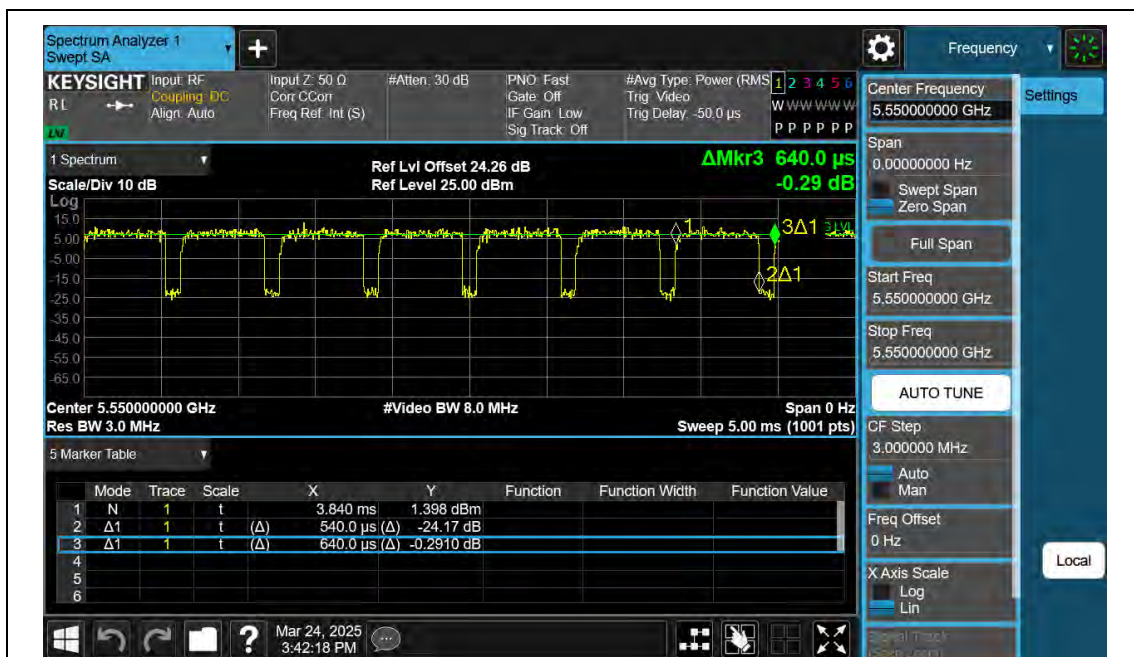


NTNV-11AX40SISO-Ant2-5550

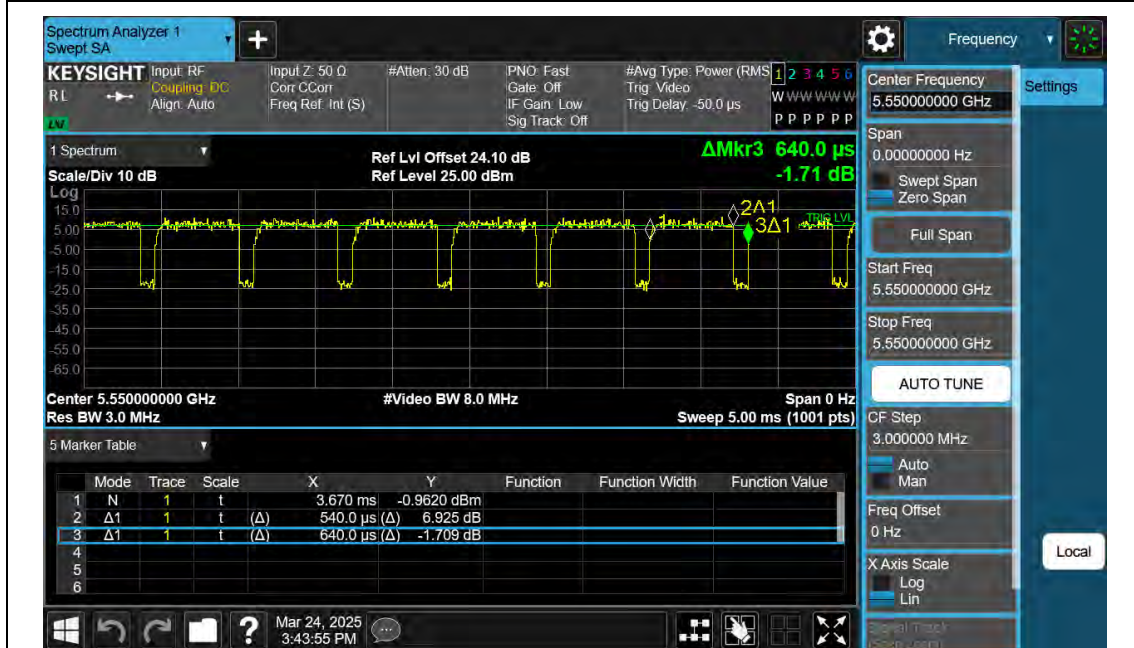


NTNV-11AX40SISO-Ant1-5670

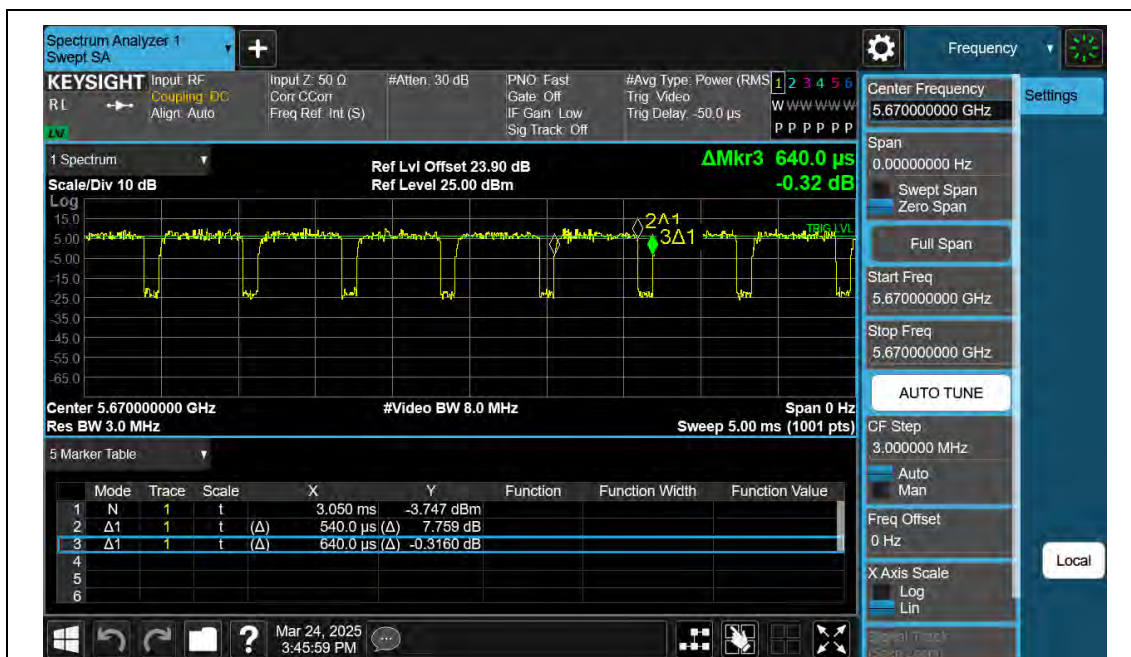


NTNV-11AX40SISO-Ant2-5670

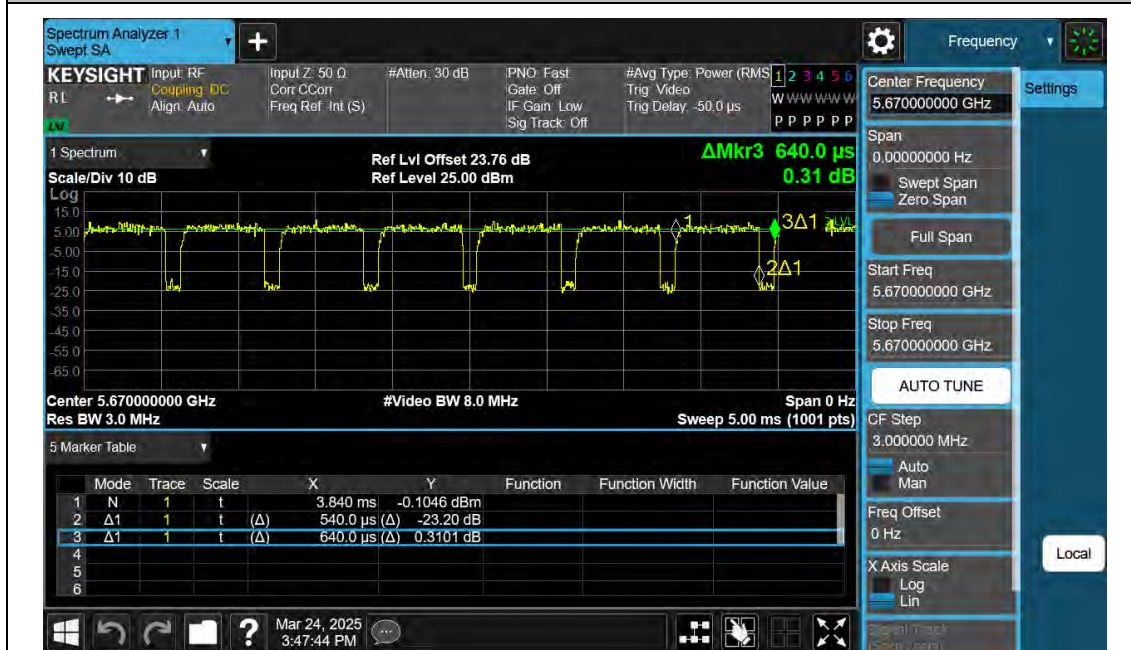


NTNV-11AX40SISO-Ant1-5755

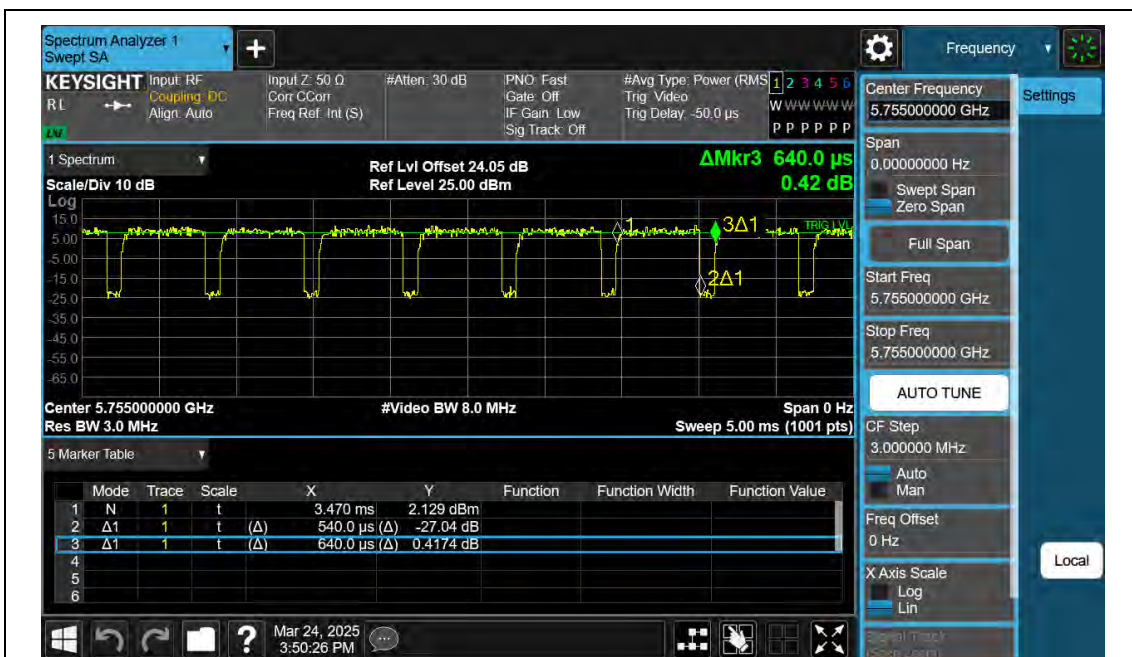


NTNV-11AX40SISO-Ant2-5755

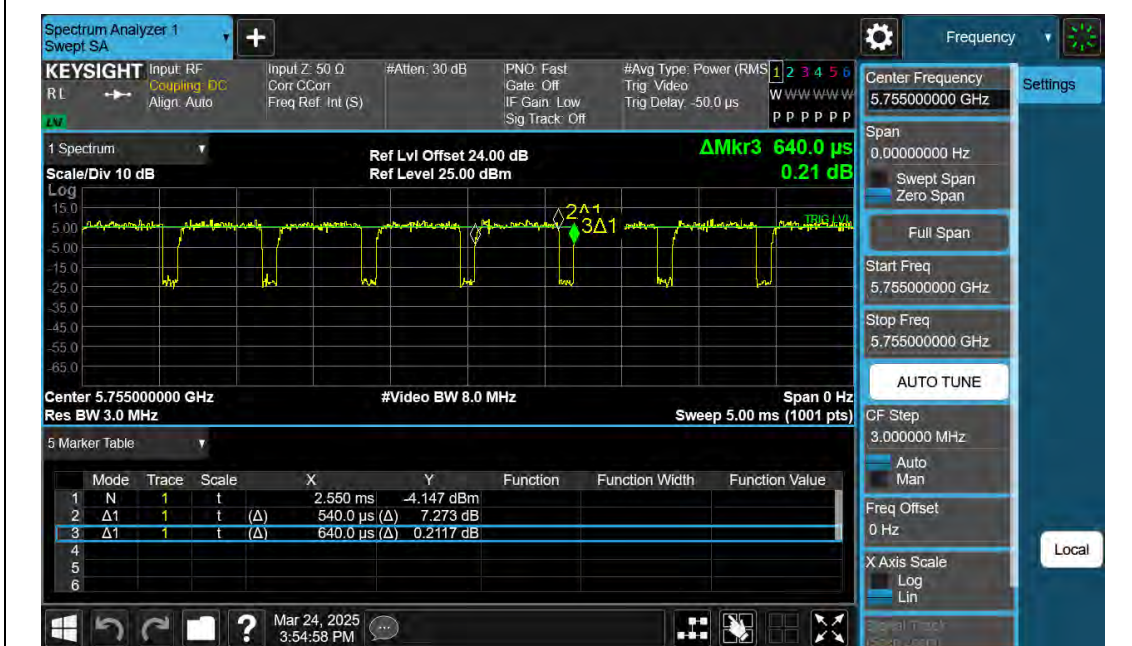


NTNV-11AX40SISO-Ant1-5795

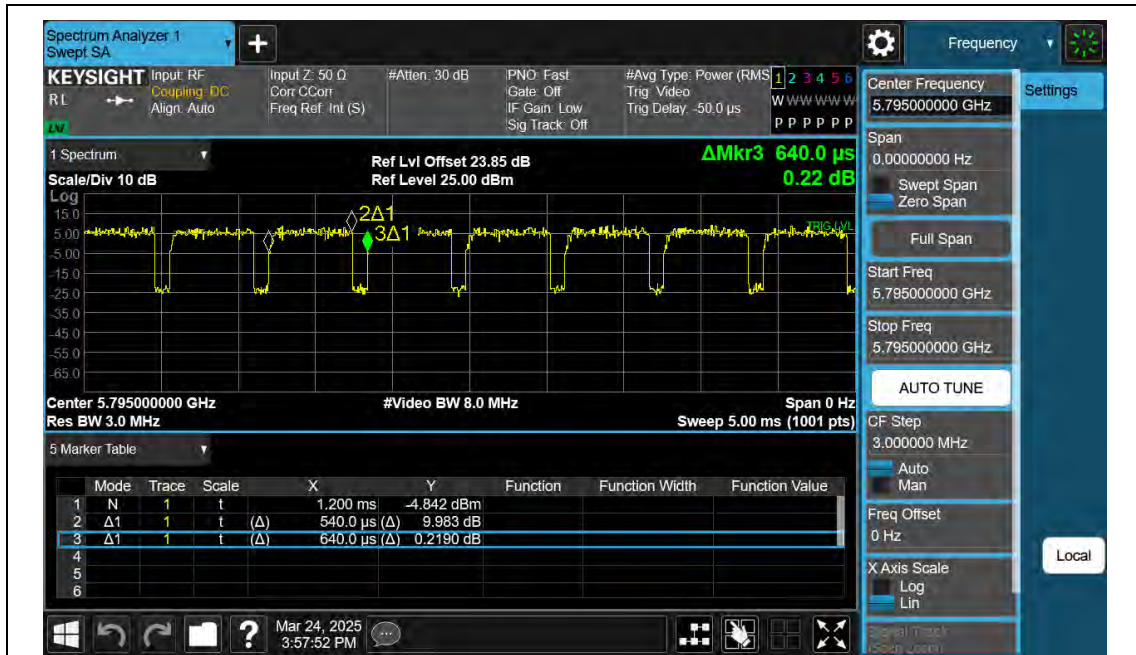


NTNV-11AX40SISO-Ant2-5795

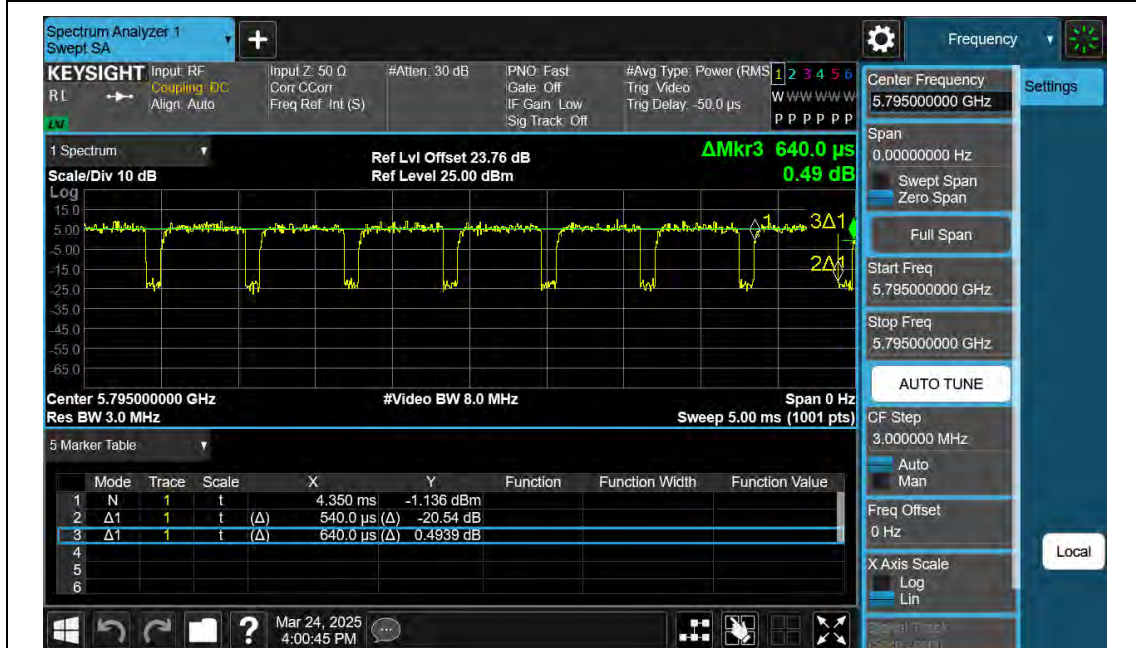


NTNV-11AX80SISO-Ant1-5210

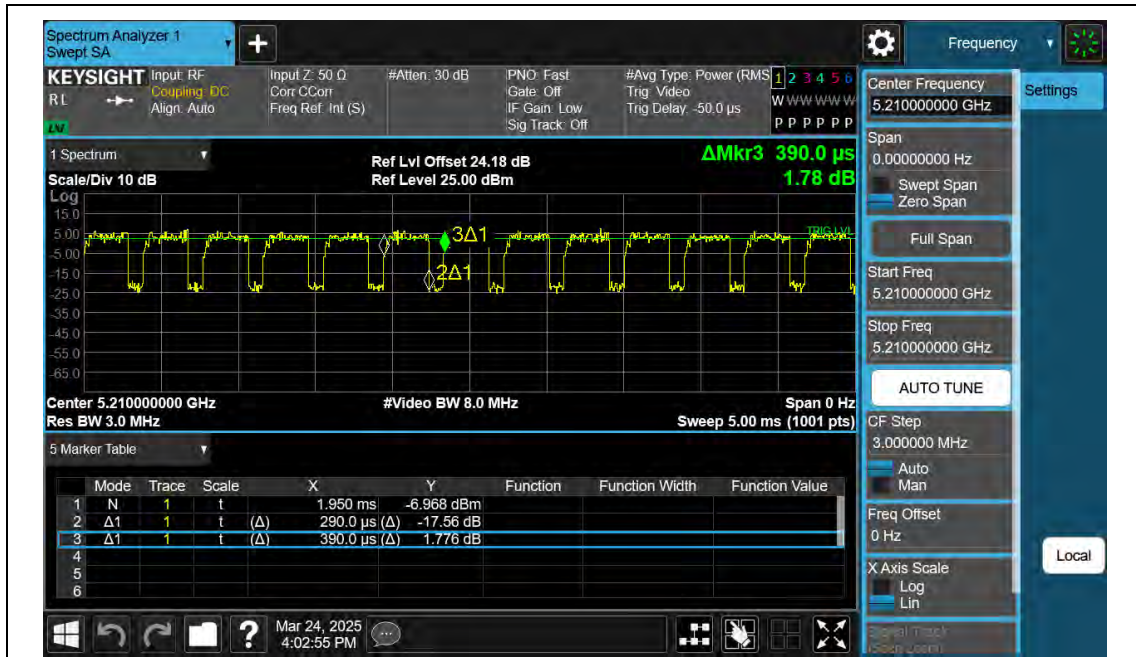


NTNV-11AX80SISO-Ant2-5210

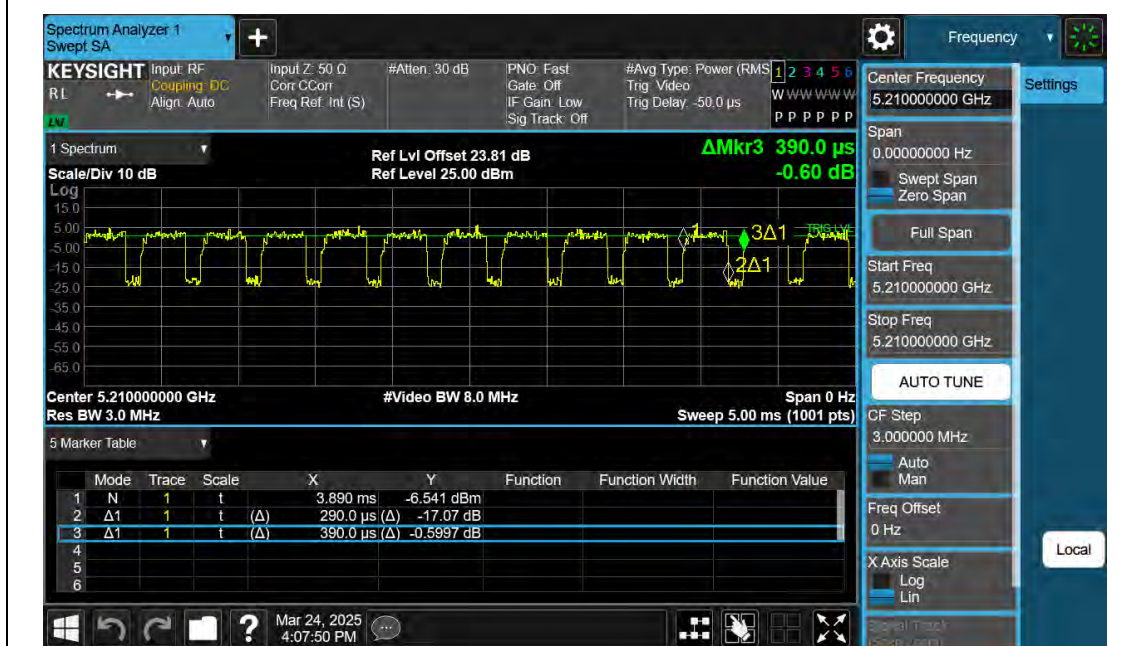


NTNV-11AX80SISO-Ant1-5290

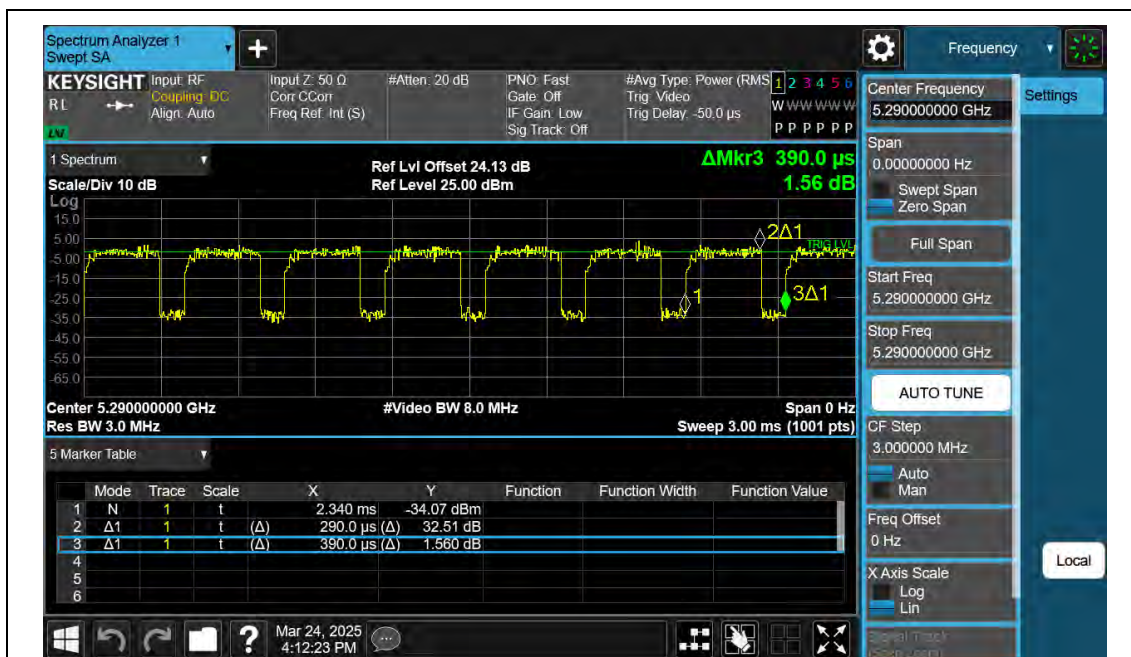


NTNV-11AX80SISO-Ant2-5290

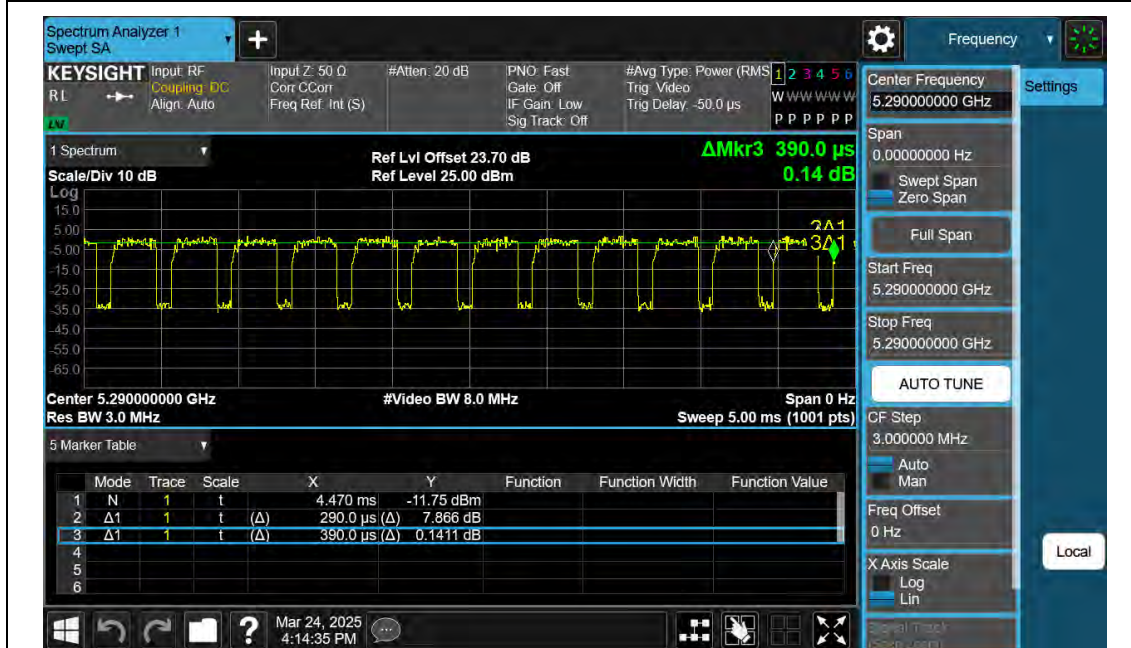


NTNV-11AX80SISO-Ant1-5530

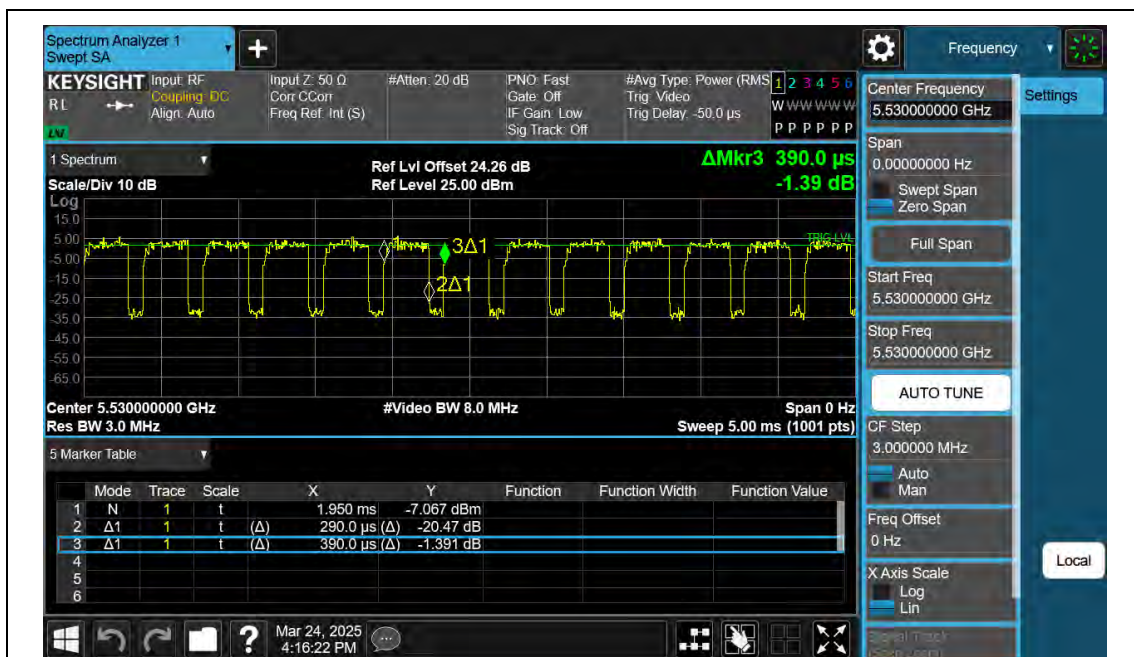


NTNV-11AX80SISO-Ant2-5530

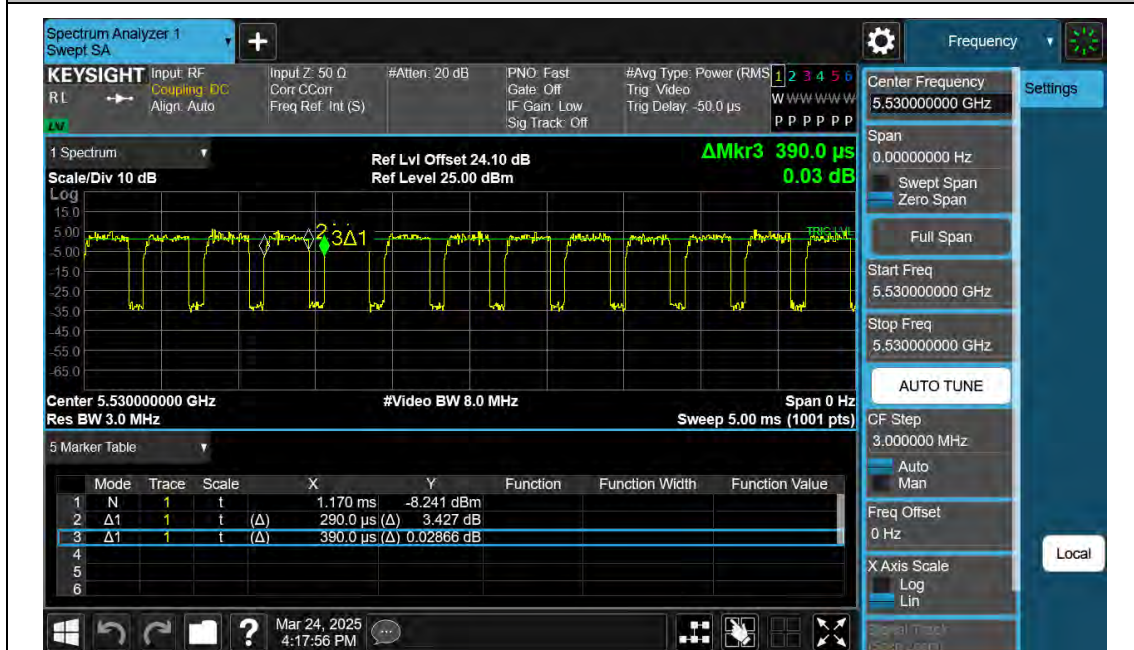


NTNV-11AX80SISO-Ant1-5610

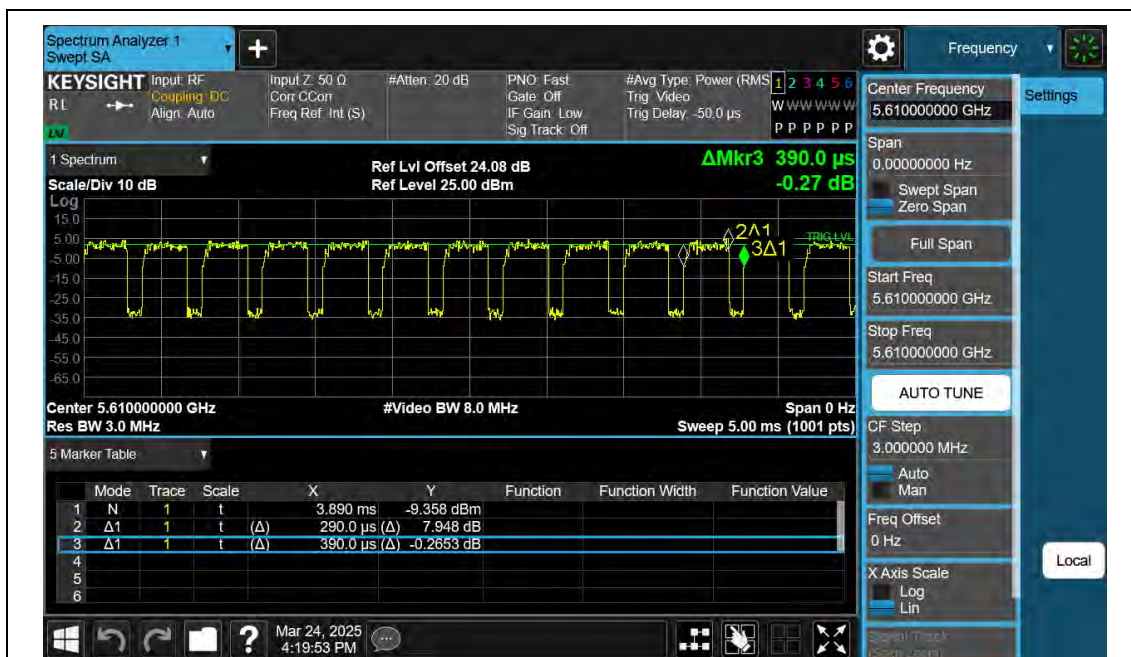


NTNV-11AX80SISO-Ant2-5610

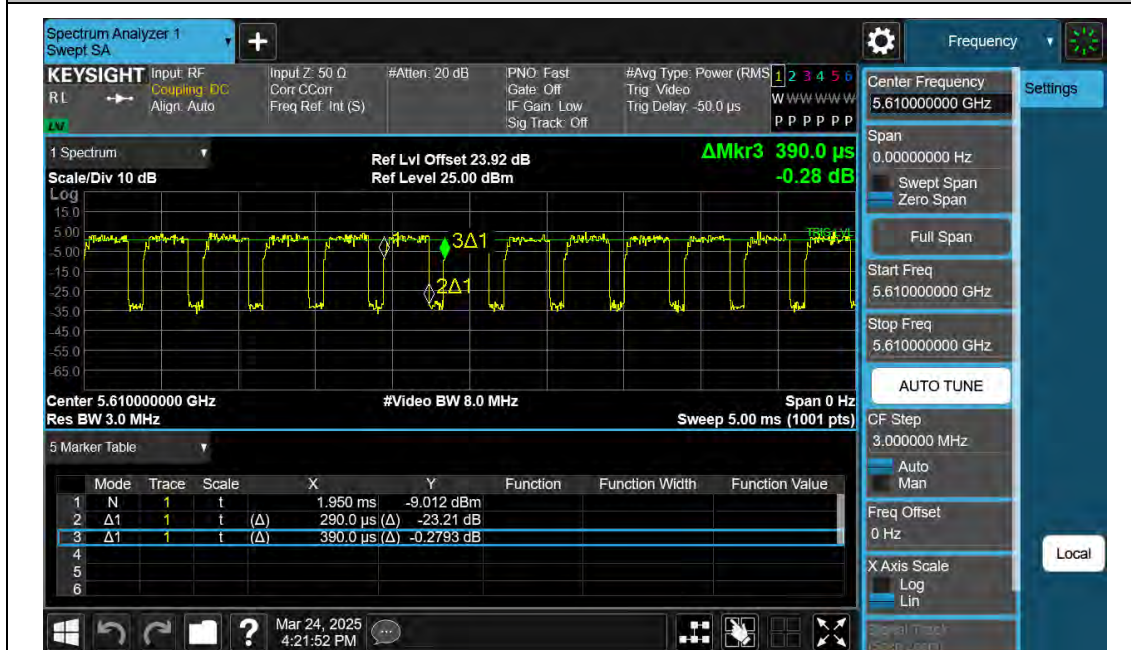

NTNV-11AX80SISO-Ant1-5775

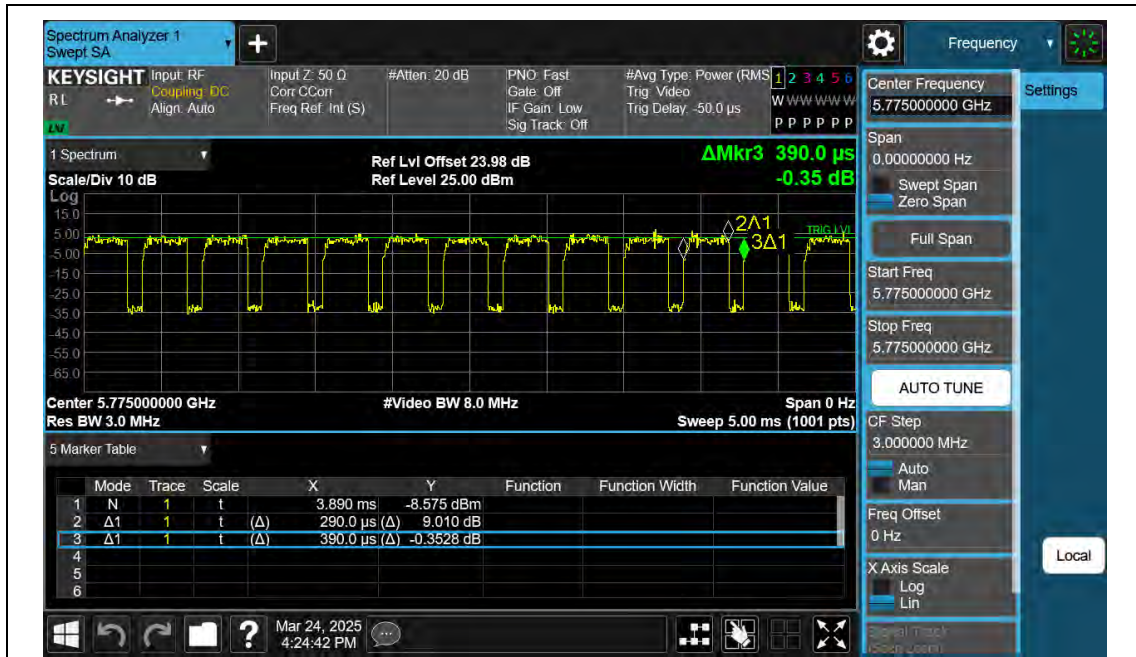

NTNV-11AX80SISO-Ant2-5775

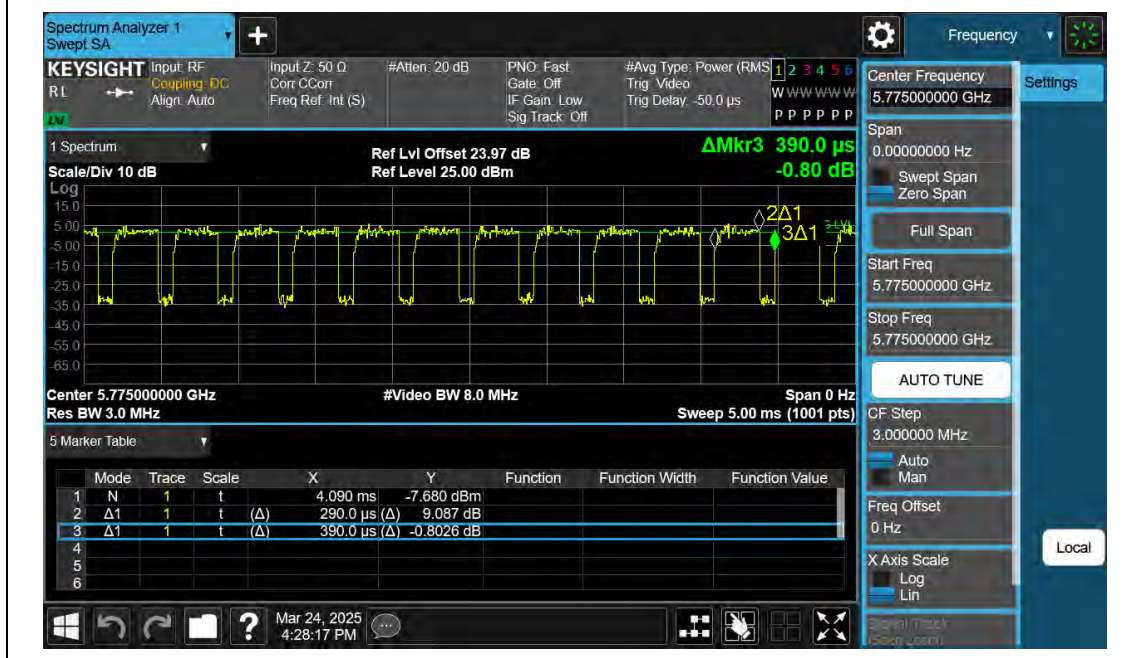

Appendix C: Maximum conducted output power

Test Result Channel Power

Test Mode	Antenna	Frequency [MHz]	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	13.81	64.29	1.92	15.73	≤23.98	PASS
11A	Ant2	5180	13.66	64.29	1.92	15.58	≤23.98	PASS
11A	Ant1	5200	13.66	62.96	2.01	15.67	≤23.98	PASS
11A	Ant2	5200	13.98	62.96	2.01	15.99	≤23.98	PASS
11A	Ant1	5240	12.61	62.96	2.01	14.62	≤23.98	PASS
11A	Ant2	5240	13.21	64.29	1.92	15.13	≤23.98	PASS
11A	Ant1	5260	12.11	64.29	1.92	14.03	≤23.98	PASS
11A	Ant2	5260	16.13	93.33	0.30	16.43	≤23.98	PASS
11A	Ant1	5300	14.96	93.96	0.27	15.23	≤23.98	PASS
11A	Ant2	5300	14.81	93.29	0.30	15.11	≤23.98	PASS
11A	Ant1	5320	14.61	93.29	0.30	14.91	≤23.98	PASS
11A	Ant2	5320	15.58	93.33	0.30	15.88	≤23.98	PASS
11A	Ant1	5500	17.16	93.33	0.30	17.46	≤23.98	PASS
11A	Ant2	5500	17.00	93.33	0.30	17.30	≤23.98	PASS
11A	Ant1	5580	16.44	93.33	0.30	16.74	≤23.98	PASS
11A	Ant2	5580	17.03	93.29	0.30	17.33	≤23.98	PASS
11A	Ant1	5700	17.25	93.29	0.30	17.55	≤23.98	PASS
11A	Ant2	5700	16.51	93.33	0.30	16.81	≤23.98	PASS
11A	Ant1	5745	18.42	93.33	0.30	18.72	≤30.00	PASS
11A	Ant2	5745	18.21	93.29	0.30	18.51	≤30.00	PASS
11A	Ant1	5785	18.01	93.29	0.30	18.31	≤30.00	PASS
11A	Ant2	5785	18.40	93.33	0.30	18.70	≤30.00	PASS
11A	Ant1	5825	17.29	93.33	0.30	17.59	≤30.00	PASS
11A	Ant2	5825	17.70	93.29	0.30	18.00	≤30.00	PASS
11N20SI SO	Ant1	5180	17.17	92.91	0.32	17.49	≤23.98	PASS
11N20SI SO	Ant2	5180	17.42	92.86	0.32	17.74	≤23.98	PASS
11N20SI SO	Ant1	5200	17.64	92.91	0.32	17.96	≤23.98	PASS
11N20SI SO	Ant2	5200	17.80	92.86	0.32	18.12	≤23.98	PASS
11N20SI SO	Ant1	5240	16.56	92.91	0.32	16.88	≤23.98	PASS
11N20SI SO	Ant2	5240	17.22	92.91	0.32	17.54	≤23.98	PASS

11N20SI SO	Ant1	5260	16.15	92.91	0.32	16.47	≤23.98	PASS
11N20SI SO	Ant2	5260	17.03	92.91	0.32	17.35	≤23.98	PASS
11N20SI SO	Ant1	5300	15.80	92.91	0.32	16.12	≤23.98	PASS
11N20SI SO	Ant2	5300	15.75	92.86	0.32	16.07	≤23.98	PASS
11N20SI SO	Ant1	5320	15.44	92.86	0.32	15.76	≤23.98	PASS
11N20SI SO	Ant2	5320	15.63	92.91	0.32	15.95	≤23.98	PASS
11N20SI SO	Ant1	5500	17.14	92.86	0.32	17.46	≤23.98	PASS
11N20SI SO	Ant2	5500	16.93	92.86	0.32	17.25	≤23.98	PASS
11N20SI SO	Ant1	5580	16.43	92.91	0.32	16.75	≤23.98	PASS
11N20SI SO	Ant2	5580	16.81	92.91	0.32	17.13	≤23.98	PASS
11N20SI SO	Ant1	5700	17.24	92.86	0.32	17.56	≤23.98	PASS
11N20SI SO	Ant2	5700	16.64	92.91	0.32	16.96	≤23.98	PASS
11N20SI SO	Ant1	5745	18.65	92.86	0.32	18.97	≤30.00	PASS
11N20SI SO	Ant2	5745	18.46	92.91	0.32	18.78	≤30.00	PASS
11N20SI SO	Ant1	5785	17.92	92.91	0.32	18.24	≤30.00	PASS
11N20SI SO	Ant2	5785	18.42	92.86	0.32	18.74	≤30.00	PASS
11N20SI SO	Ant1	5825	17.35	92.86	0.32	17.67	≤30.00	PASS
11N20SI SO	Ant2	5825	17.70	92.91	0.32	18.02	≤30.00	PASS
11N40SI SO	Ant1	5190	17.59	86.67	0.62	18.21	≤23.98	PASS
11N40SI SO	Ant2	5190	17.56	86.67	0.62	18.18	≤23.98	PASS
11N40SI SO	Ant1	5230	16.86	86.49	0.63	17.49	≤23.98	PASS
11N40SI SO	Ant2	5230	17.35	86.67	0.62	17.97	≤23.98	PASS

11N40SI SO	Ant1	5270	15.57	86.67	0.62	16.19	≤23.98	PASS
11N40SI SO	Ant2	5270	16.26	86.49	0.63	16.89	≤23.98	PASS
11N40SI SO	Ant1	5310	14.91	86.67	0.62	15.53	≤23.98	PASS
11N40SI SO	Ant2	5310	15.06	86.67	0.62	15.68	≤23.98	PASS
11N40SI SO	Ant1	5510	16.67	86.67	0.62	17.29	≤23.98	PASS
11N40SI SO	Ant2	5510	16.32	86.67	0.62	16.94	≤23.98	PASS
11N40SI SO	Ant1	5550	16.53	86.67	0.62	17.15	≤23.98	PASS
11N40SI SO	Ant2	5550	16.51	86.67	0.62	17.13	≤23.98	PASS
11N40SI SO	Ant1	5670	15.99	86.67	0.62	16.61	≤23.98	PASS
11N40SI SO	Ant2	5670	16.01	86.49	0.63	16.64	≤23.98	PASS
11N40SI SO	Ant1	5755	17.90	86.67	0.62	18.52	≤30.00	PASS
11N40SI SO	Ant2	5755	17.91	86.49	0.63	18.54	≤30.00	PASS
11N40SI SO	Ant1	5795	17.34	86.49	0.63	17.97	≤30.00	PASS
11N40SI SO	Ant2	5795	17.65	86.49	0.63	18.28	≤30.00	PASS
11AC20S ISO	Ant1	5180	17.52	92.91	0.32	17.84	≤23.98	PASS
11AC20S ISO	Ant2	5180	17.54	92.96	0.32	17.86	≤23.98	PASS
11AC20S ISO	Ant1	5200	17.78	92.91	0.32	18.10	≤23.98	PASS
11AC20S ISO	Ant2	5200	17.94	92.96	0.32	18.26	≤23.98	PASS
11AC20S ISO	Ant1	5240	16.56	92.91	0.32	16.88	≤23.98	PASS
11AC20S ISO	Ant2	5240	17.20	92.96	0.32	17.52	≤23.98	PASS
11AC20S ISO	Ant1	5260	16.47	92.91	0.32	16.79	≤23.98	PASS
11AC20S ISO	Ant2	5260	17.02	92.91	0.32	17.34	≤23.98	PASS

11AC20S ISO	Ant1	5300	15.90	92.96	0.32	16.22	≤23.98	PASS
11AC20S ISO	Ant2	5300	15.87	92.91	0.32	16.19	≤23.98	PASS
11AC20S ISO	Ant1	5320	15.39	92.96	0.32	15.71	≤23.98	PASS
11AC20S ISO	Ant2	5320	15.63	92.96	0.32	15.95	≤23.98	PASS
11AC20S ISO	Ant1	5500	17.11	92.96	0.32	17.43	≤23.98	PASS
11AC20S ISO	Ant2	5500	16.85	92.91	0.32	17.17	≤23.98	PASS
11AC20S ISO	Ant1	5580	16.46	92.96	0.32	16.78	≤23.98	PASS
11AC20S ISO	Ant2	5580	17.15	92.96	0.32	17.47	≤23.98	PASS
11AC20S ISO	Ant1	5700	17.02	92.96	0.32	17.34	≤23.98	PASS
11AC20S ISO	Ant2	5700	16.38	92.96	0.32	16.70	≤23.98	PASS
11AC20S ISO	Ant1	5745	18.48	92.96	0.32	18.80	≤30.00	PASS
11AC20S ISO	Ant2	5745	18.22	92.96	0.32	18.54	≤30.00	PASS
11AC20S ISO	Ant1	5785	17.98	92.96	0.32	18.30	≤30.00	PASS
11AC20S ISO	Ant2	5785	18.24	92.96	0.32	18.56	≤30.00	PASS
11AC20S ISO	Ant1	5825	17.18	92.91	0.32	17.50	≤30.00	PASS
11AC20S ISO	Ant2	5825	17.70	92.96	0.32	18.02	≤30.00	PASS
11AC40S ISO	Ant1	5190	17.33	86.84	0.61	17.94	≤23.98	PASS
11AC40S ISO	Ant2	5190	17.44	86.67	0.62	18.06	≤23.98	PASS
11AC40S ISO	Ant1	5230	16.67	86.84	0.61	17.28	≤23.98	PASS
11AC40S ISO	Ant2	5230	17.21	86.84	0.61	17.82	≤23.98	PASS
11AC40S ISO	Ant1	5270	15.46	86.84	0.61	16.07	≤23.98	PASS
11AC40S ISO	Ant2	5270	16.14	86.67	0.62	16.76	≤23.98	PASS

11AC40S ISO	Ant1	5310	15.19	86.67	0.62	15.81	≤23.98	PASS
11AC40S ISO	Ant2	5310	15.14	86.84	0.61	15.75	≤23.98	PASS
11AC40S ISO	Ant1	5510	16.61	86.84	0.61	17.22	≤23.98	PASS
11AC40S ISO	Ant2	5510	16.46	86.84	0.61	17.07	≤23.98	PASS
11AC40S ISO	Ant1	5550	16.51	86.67	0.62	17.13	≤23.98	PASS
11AC40S ISO	Ant2	5550	16.49	86.84	0.61	17.10	≤23.98	PASS
11AC40S ISO	Ant1	5670	15.97	86.67	0.62	16.59	≤23.98	PASS
11AC40S ISO	Ant2	5670	15.91	86.84	0.61	16.52	≤23.98	PASS
11AC40S ISO	Ant1	5755	18.07	86.84	0.61	18.68	≤30.00	PASS
11AC40S ISO	Ant2	5755	17.89	86.84	0.61	18.50	≤30.00	PASS
11AC40S ISO	Ant1	5795	17.25	86.84	0.61	17.86	≤30.00	PASS
11AC40S ISO	Ant2	5795	17.71	86.84	0.61	18.32	≤30.00	PASS
11AC80S ISO	Ant1	5210	16.98	76.19	1.18	18.16	≤23.98	PASS
11AC80S ISO	Ant2	5210	17.39	76.19	1.18	18.57	≤23.98	PASS
11AC80S ISO	Ant1	5290	15.17	76.19	1.18	16.35	≤23.98	PASS
11AC80S ISO	Ant2	5290	15.26	76.19	1.18	16.44	≤23.98	PASS
11AC80S ISO	Ant1	5530	16.50	76.19	1.18	17.68	≤23.98	PASS
11AC80S ISO	Ant2	5530	16.40	76.19	1.18	17.58	≤23.98	PASS
11AC80S ISO	Ant1	5610	15.52	76.19	1.18	16.70	≤23.98	PASS
11AC80S ISO	Ant2	5610	15.57	76.19	1.18	16.75	≤23.98	PASS
11AC80S ISO	Ant1	5775	16.92	76.19	1.18	18.10	≤30.00	PASS
11AC80S ISO	Ant2	5775	17.02	76.19	1.18	18.20	≤30.00	PASS

11AX20SI SO	Ant1	5180	18.38	91.07	0.41	18.79	≤23.98	PASS
11AX20SI SO	Ant2	5180	18.32	91.96	0.36	18.68	≤23.98	PASS
11AX20SI SO	Ant1	5200	18.59	91.07	0.41	19.00	≤23.98	PASS
11AX20SI SO	Ant2	5200	18.71	91.07	0.41	19.12	≤23.98	PASS
11AX20SI SO	Ant1	5240	17.76	91.07	0.41	18.17	≤23.98	PASS
11AX20SI SO	Ant2	5240	18.15	91.07	0.41	18.56	≤23.98	PASS
11AX20SI SO	Ant1	5260	17.29	91.07	0.41	17.70	≤23.98	PASS
11AX20SI SO	Ant2	5260	18.13	91.07	0.41	18.54	≤23.98	PASS
11AX20SI SO	Ant1	5300	16.89	91.07	0.41	17.30	≤23.98	PASS
11AX20SI SO	Ant2	5300	16.83	91.07	0.41	17.24	≤23.98	PASS
11AX20SI SO	Ant1	5320	16.61	91.07	0.41	17.02	≤23.98	PASS
11AX20SI SO	Ant2	5320	16.82	91.07	0.41	17.23	≤23.98	PASS
11AX20SI SO	Ant1	5500	18.32	91.07	0.41	18.73	≤23.98	PASS
11AX20SI SO	Ant2	5500	18.06	91.07	0.41	18.47	≤23.98	PASS
11AX20SI SO	Ant1	5580	17.61	91.07	0.41	18.02	≤23.98	PASS
11AX20SI SO	Ant2	5580	18.08	91.07	0.41	18.49	≤23.98	PASS
11AX20SI SO	Ant1	5700	18.37	91.07	0.41	18.78	≤23.98	PASS
11AX20SI SO	Ant2	5700	17.58	91.07	0.41	17.99	≤23.98	PASS
11AX20SI SO	Ant1	5745	17.63	91.96	0.36	17.99	≤30.00	PASS
11AX20SI SO	Ant2	5745	17.29	91.07	0.41	17.70	≤30.00	PASS
11AX20SI SO	Ant1	5785	16.84	91.07	0.41	17.25	≤30.00	PASS
11AX20SI SO	Ant2	5785	17.29	91.07	0.41	17.70	≤30.00	PASS

11AX20SI SO	Ant1	5825	16.16	91.07	0.41	16.57	≤30.00	PASS
11AX20SI SO	Ant2	5825	16.58	91.07	0.41	16.99	≤30.00	PASS
11AX40SI SO	Ant1	5190	16.07	84.38	0.74	16.81	≤23.98	PASS
11AX40SI SO	Ant2	5190	16.30	84.38	0.74	17.04	≤23.98	PASS
11AX40SI SO	Ant1	5230	15.47	84.38	0.74	16.21	≤23.98	PASS
11AX40SI SO	Ant2	5230	16.04	84.38	0.74	16.78	≤23.98	PASS
11AX40SI SO	Ant1	5270	13.99	84.38	0.74	14.73	≤23.98	PASS
11AX40SI SO	Ant2	5270	14.58	84.38	0.74	15.32	≤23.98	PASS
11AX40SI SO	Ant1	5310	13.50	84.38	0.74	14.24	≤23.98	PASS
11AX40SI SO	Ant2	5310	13.51	84.38	0.74	14.25	≤23.98	PASS
11AX40SI SO	Ant1	5510	17.71	84.38	0.74	18.45	≤23.98	PASS
11AX40SI SO	Ant2	5510	17.40	84.38	0.74	18.14	≤23.98	PASS
11AX40SI SO	Ant1	5550	17.43	84.38	0.74	18.17	≤23.98	PASS
11AX40SI SO	Ant2	5550	17.47	84.38	0.74	18.21	≤23.98	PASS
11AX40SI SO	Ant1	5670	16.97	84.38	0.74	17.71	≤23.98	PASS
11AX40SI SO	Ant2	5670	16.91	84.38	0.74	17.65	≤23.98	PASS
11AX40SI SO	Ant1	5755	16.22	84.38	0.74	16.96	≤30.00	PASS
11AX40SI SO	Ant2	5755	16.37	84.38	0.74	17.11	≤30.00	PASS
11AX40SI SO	Ant1	5795	15.78	84.38	0.74	16.52	≤30.00	PASS
11AX40SI SO	Ant2	5795	15.91	84.38	0.74	16.65	≤30.00	PASS
11AX80SI SO	Ant1	5210	15.75	74.36	1.29	17.04	≤23.98	PASS
11AX80SI SO	Ant2	5210	15.87	74.36	1.29	17.16	≤23.98	PASS

11AX80SI SO	Ant1	5290	13.50	74.36	1.29	14.79	≤23.98	PASS
11AX80SI SO	Ant2	5290	13.73	74.36	1.29	15.02	≤23.98	PASS
11AX80SI SO	Ant1	5530	14.78	74.36	1.29	16.07	≤23.98	PASS
11AX80SI SO	Ant2	5530	14.64	74.36	1.29	15.93	≤23.98	PASS
11AX80SI SO	Ant1	5610	13.94	74.36	1.29	15.23	≤23.98	PASS
11AX80SI SO	Ant2	5610	13.98	74.36	1.29	15.27	≤23.98	PASS
11AX80SI SO	Ant1	5775	15.07	74.36	1.29	16.36	≤30.00	PASS
11AX80SI SO	Ant2	5775	15.11	74.36	1.29	16.40	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

Test Graphs Channel Power





11A-Ant2-5200-PASS



11A-Ant1-5240-PASS



11A-Ant2-5240-PASS



11A-Ant1-5260-PASS



11A-Ant2-5260-PASS



11A-Ant1-5300-PASS



11A-Ant2-5300-PASS



11A-Ant1-5320-PASS



11A-Ant2-5320-PASS



11A-Ant1-5500-PASS



11A-Ant2-5500-PASS



11A-Ant1-5580-PASS



11A-Ant2-5580-PASS



11A-Ant1-5700-PASS



11A-Ant2-5700-PASS



11A-Ant1-5745-PASS



11A-Ant2-5745-PASS



11A-Ant1-5785-PASS



11A-Ant2-5785-PASS



11A-Ant1-5825-PASS



11A-Ant2-5825-PASS



11N20SISO-Ant1-5180-PASS



11N20SISO-Ant2-5180-PASS



11N20SISO-Ant1-5200-PASS



11N20SISO-Ant2-5200-PASS



11N20SISO-Ant1-5240-PASS



11N20SISO-Ant2-5240-PASS



11N20SISO-Ant1-5260-PASS



11N20SISO-Ant2-5260-PASS



11N20SISO-Ant1-5300-PASS



11N20SISO-Ant2-5300-PASS



11N20SISO-Ant1-5320-PASS



11N20SISO-Ant2-5320-PASS



11N20SISO-Ant1-5500-PASS




11N20SISO-Ant2-5500-PASS



11N20SISO-Ant1-5580-PASS




11N20SISO-Ant2-5580-PASS

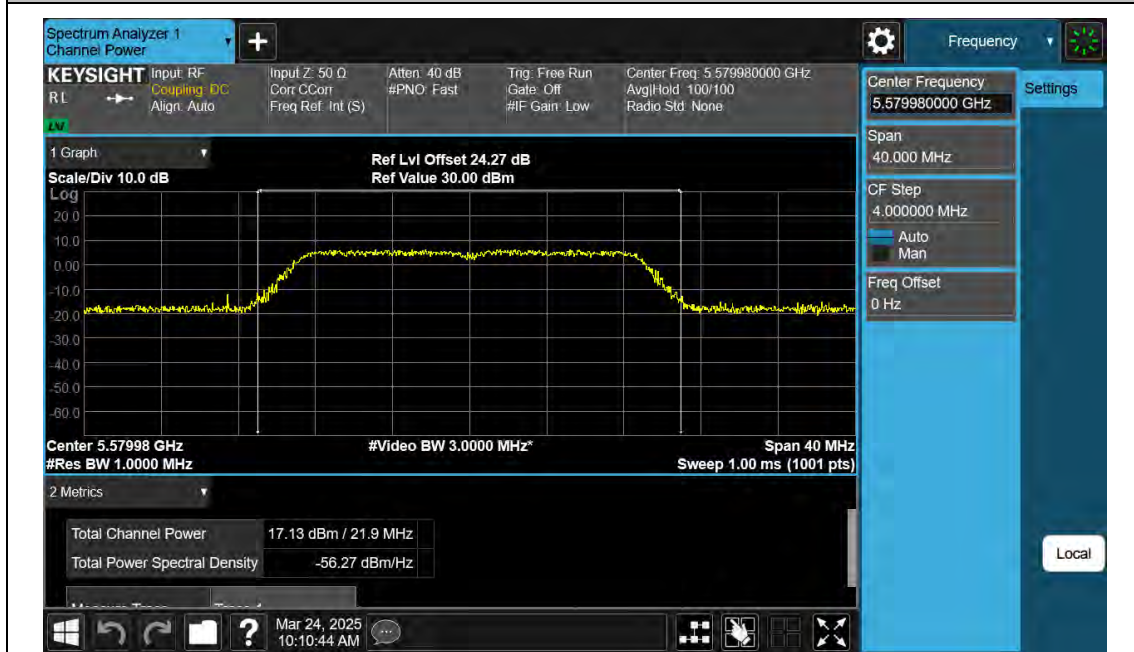

11N20SISO-Ant1-5700-PASS



11N20SISO-Ant2-5700-PASS

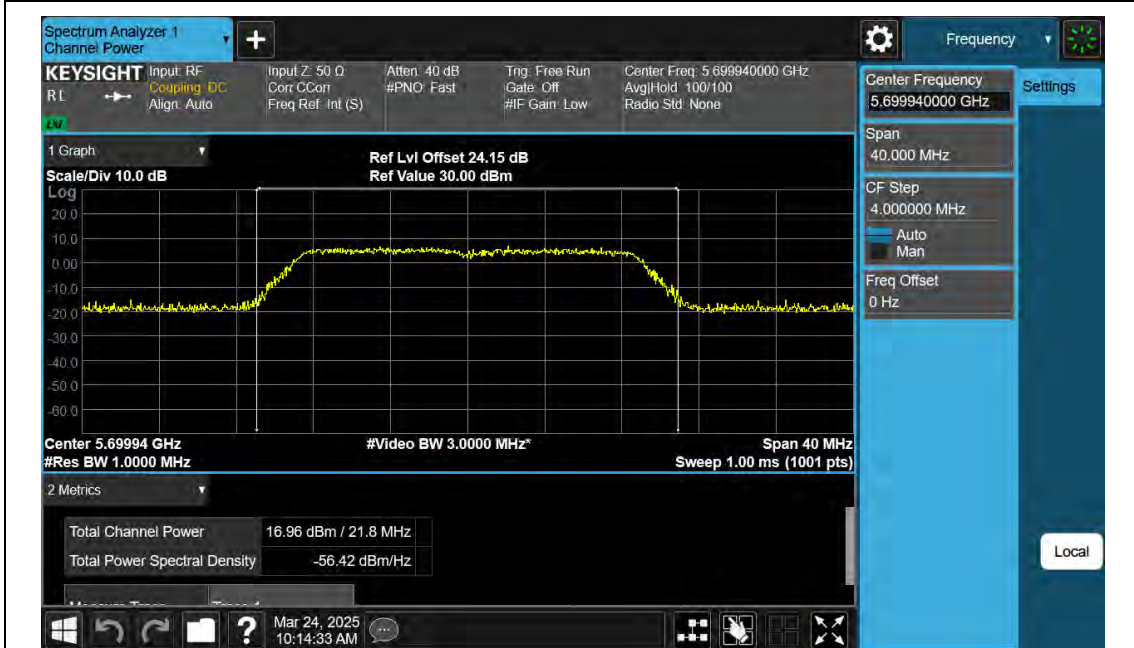

11N20SISO-Ant1-5745-PASS



11N20SISO-Ant2-5745-PASS



11N20SISO-Ant1-5785-PASS



11N20SISO-Ant2-5785-PASS



11N20SISO-Ant1-5825-PASS



11N20SISO-Ant2-5825-PASS



11N40SISO-Ant1-5190-PASS



11N40SISO-Ant2-5190-PASS



11N40SISO-Ant1-5230-PASS



11N40SISO-Ant2-5230-PASS



11N40SISO-Ant1-5270-PASS



11N40SISO-Ant2-5270-PASS



11N40SISO-Ant1-5310-PASS



11N40SISO-Ant2-5310-PASS



11N40SISO-Ant1-5510-PASS



11N40SISO-Ant2-5510-PASS



11N40SISO-Ant1-5550-PASS



11N40SISO-Ant2-5550-PASS



11N40SISO-Ant1-5670-PASS