


① Channel switching button  
 ② Channel LED  
 ③ Microphone indicator  
 ④ Microphone power switch button  
 ⑤ Microphone volume control knob  
 ⑥ Microphone input jack  
 ⑦ Audio input jack  
 ⑧ Charging status indicator  
 ⑨ Power switch  
 ⑩ Charging power input socket  
 ⑪ Battery cover  
 ⑫ Portable buckle

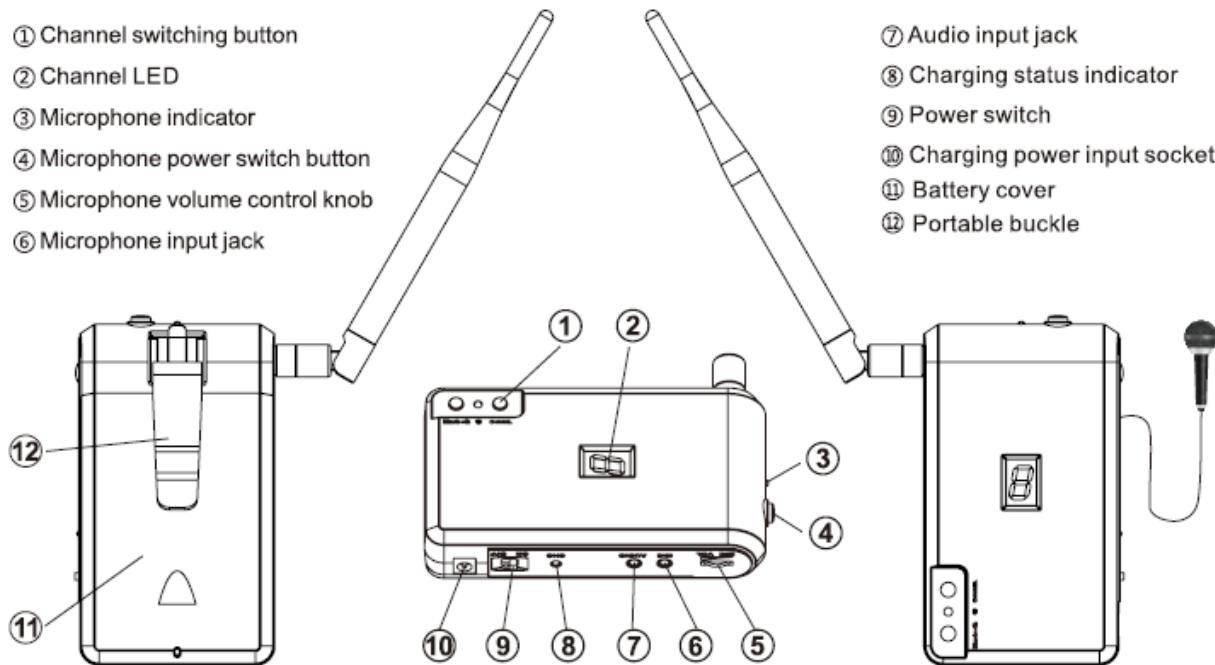

## Technical specifications

1) System: UHF / RF	7 ) Distortion: < 1%
2) Modulation: frequency modulation	8 ) Frequency response: 30hz-15khz
3) Mode: stereo	9 ) Charging adapter: DC12V 1.3A
4) Transmitter channel: three channels	10 ) Battery charging time: about 4 hours
5) Operating distance: > 300m	11 ) Battery continuous service time: more than 10 hours
6) Stereo channel separation: 50dB	

# How to use the transmitter

**Transmission:** turn on the power switch ⑨, connect the audio input at the audio input jack ⑦, match the transmitter with the headphone channel, and then listen to the transmitted audio signal.

**Channel switching:** tap the channel switching button ① to switch the channel display LED ②.

**Charging:** turn off the power switch ⑨, connect the charging adapter at the charging power input jack, the charging indicator ⑧ is on, the charging state indicator is red and the full charge indicator is green

**Charging while working:** connect the charging adapter at the charging power input socket ⑩, turn on the power switch ⑨, and the charging indicator ⑧ is on and always showed red. At this time, it means that the transmitter is charging while working. Only after turning off the power switch ⑨, if the battery is fully charged, the charging indicator ⑧ is showed green, otherwise it is showed red, indicating that it is charging.

**Microphone:** in microphone input jack ⑥, press microphone switch button ④, indicator ③ is on, and the transmitter will give priority to transmitting microphone audio signal. Press microphone switch button ④ again, indicator ③ is off, turn off the microphone, and the transmitter will switch back to the original state.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.