



好天线 · 优比造

东莞市优比电子有限公司



Dongguan UB Electronics Co., Ltd

PUWELL CLOUD Antenna Study

- **Client Name: PUWELL CLOUD**
- **Project Name:Mantis**
- **Debugging frequency band:2400-2500MHz**
- **Valuation date: 2024.06.29**

Internal Antenna

Dongguan UB Electronics Co., Ltd

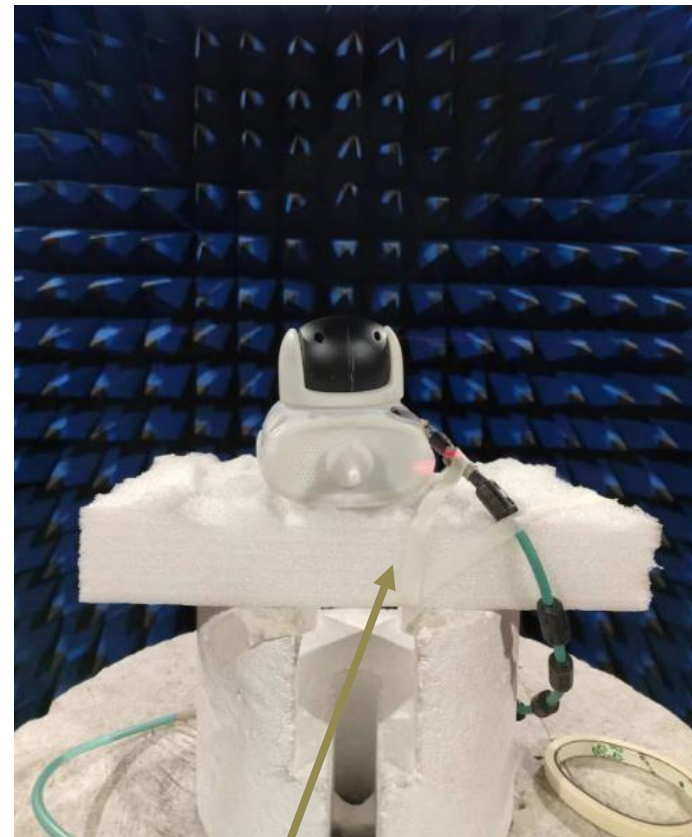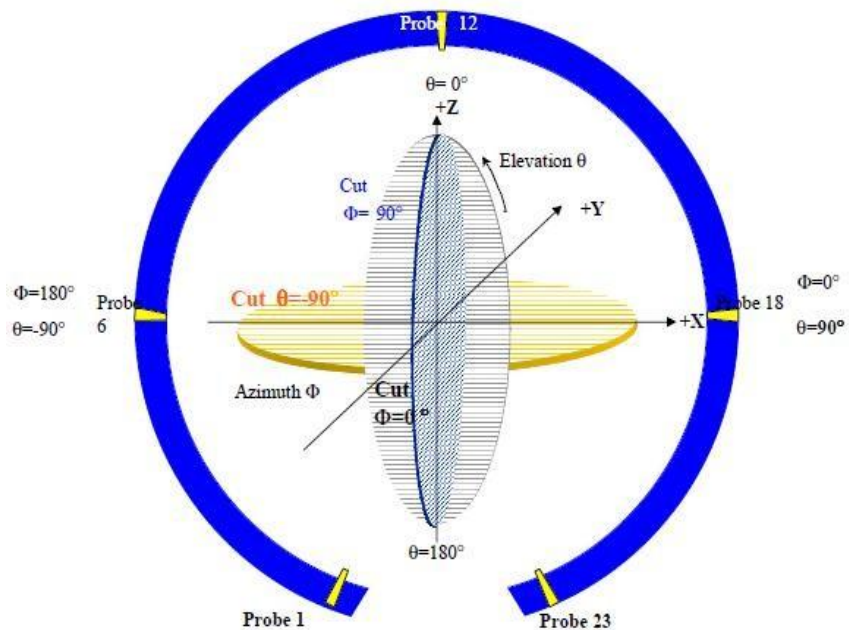


External Antenna


Dongguan UB Electronics Co., Ltd



1.5PF capacitors are connected in parallel close to the module




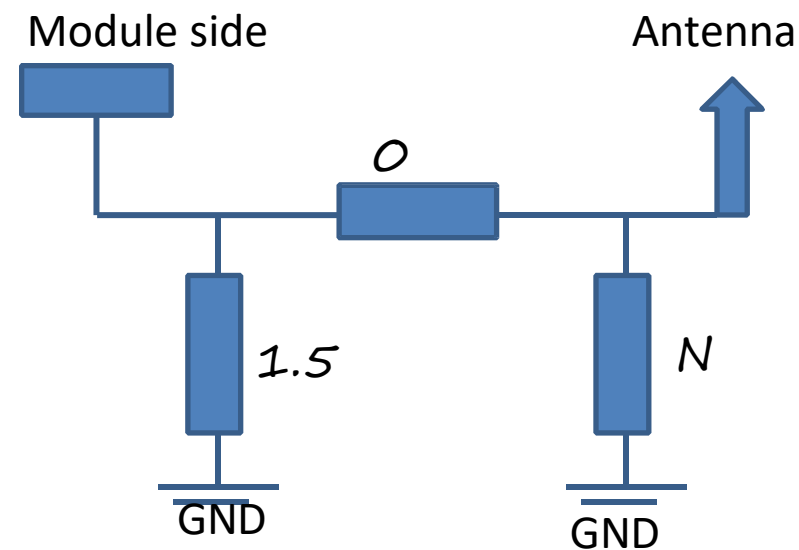


The antenna position is shown in the figure

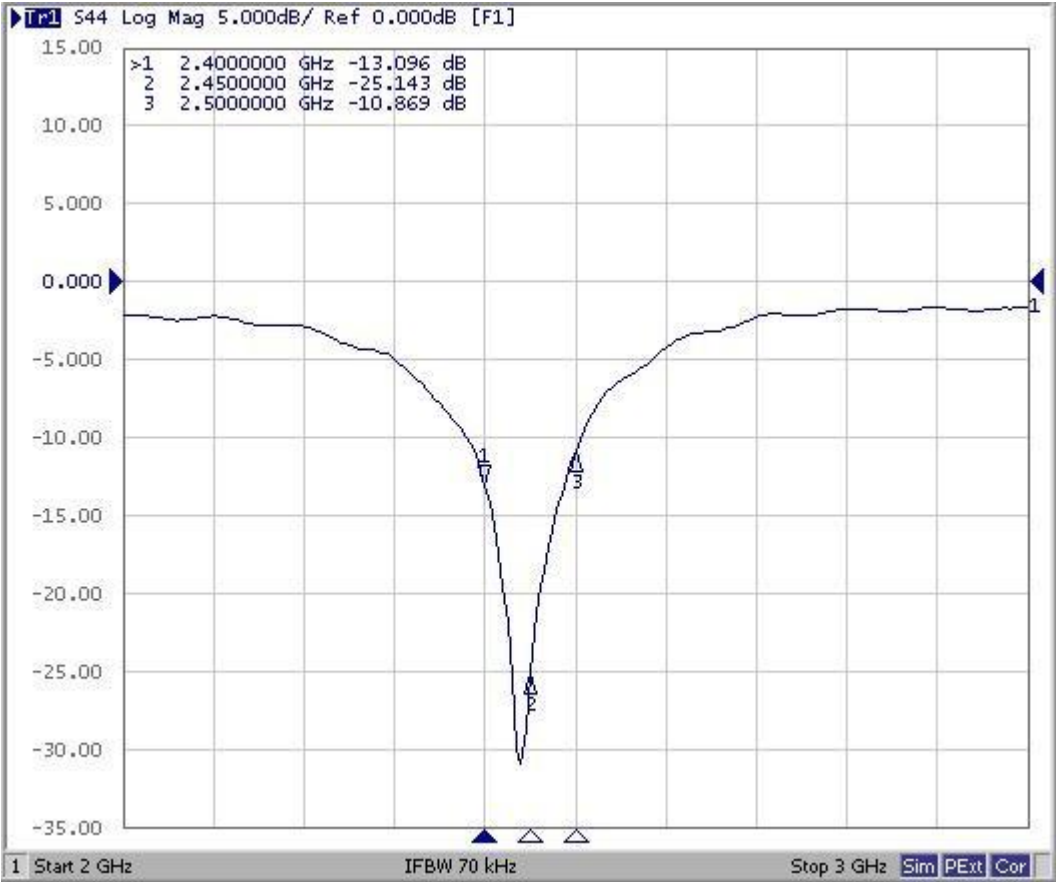


优化后天线			
Frequency/Mhz	Efficiency / dB	Efficiency / %	MaxGain/dBi
2400	-3.48	44.87	1.62
2410	-3.39	45.81	1.79
2420	-3.31	46.67	1.75
2430	-3.3	46.77	1.7
2440	-3.32	46.56	1.76
2450	-3.35	46.24	1.73
2460	-3.43	45.39	1.54
2470	-3.44	45.29	1.5
2480	-3.58	43.85	1.14
2490	-3.68	42.85	0.85
2500	-3.82	41.5	0.48
AVG	-3.46	45.07	1.44


Freespace Environment 2/3D

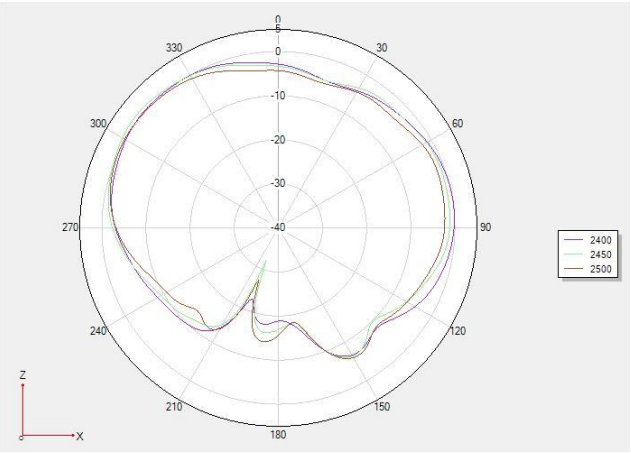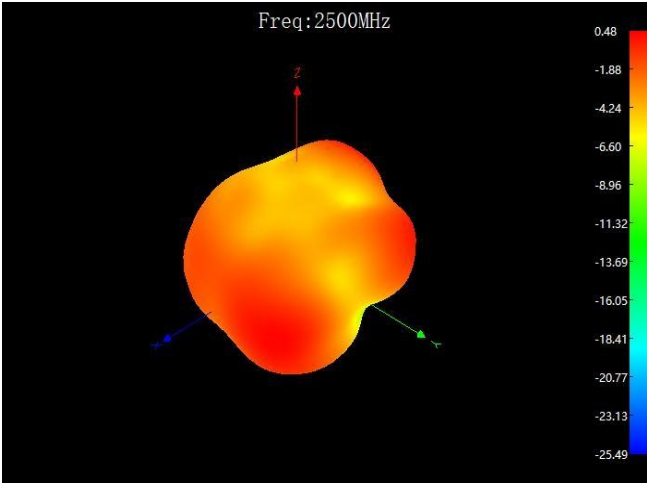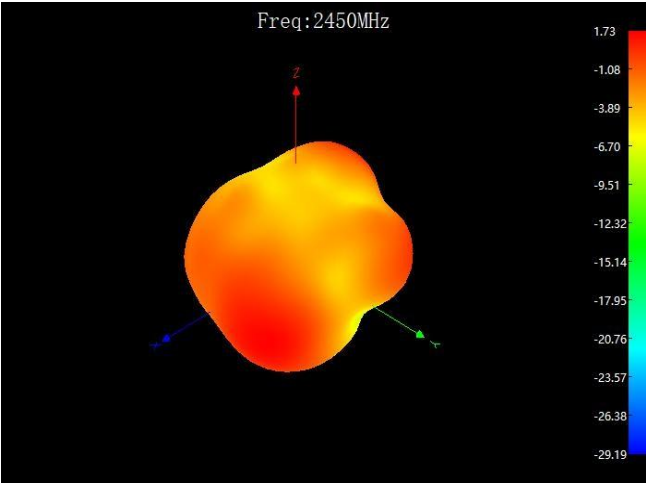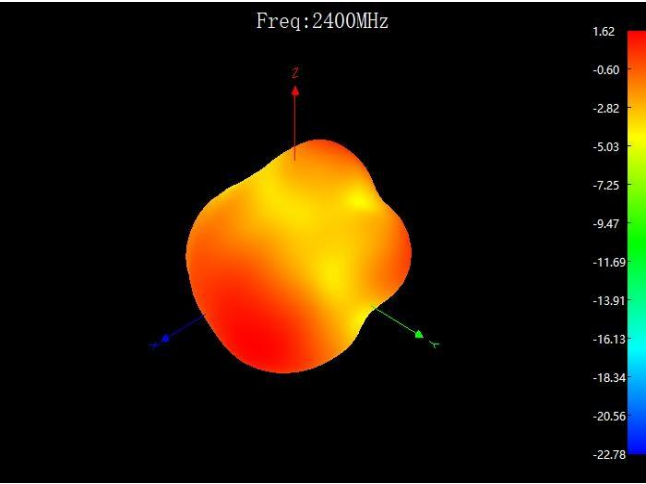

Phi 0

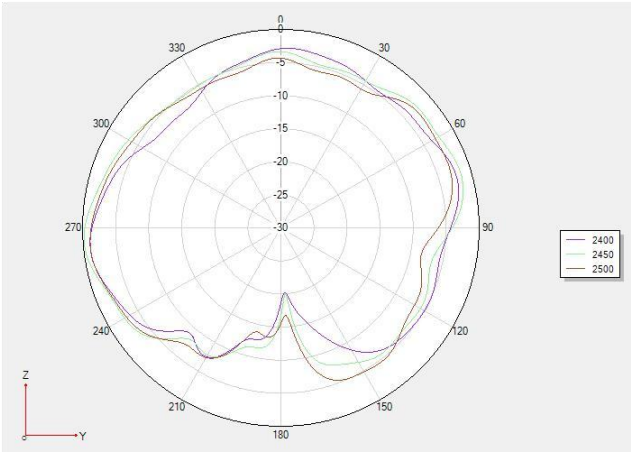

Phi 90

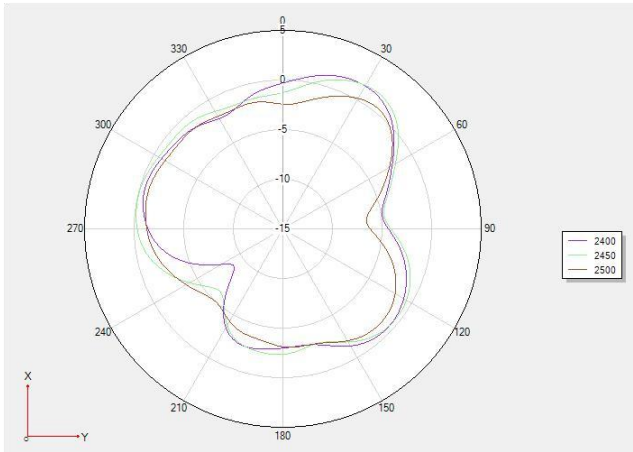

Theta 90

Measurement	Standard	Band	Channel	Frequency	Max	Min	Total	传导
TRP	WIFI (AP)	WIFI_B (11M)	1	2412	21.03	5.35	16.5	19.0
TRP	WIFI (AP)	WIFI_B (11M)	6	2437	23.86	9.8	19.39	20.7
TRP	WIFI (AP)	WIFI_B (11M)	11	2462	23.31	9.91	19.06	21.3
TIS(EIRP)	WIFI (AP)	WIFI_B (11M)	1	2412	-68.14	-84.53	-80.82	
TIS(EIRP)	WIFI (AP)	WIFI_B (11M)	6	2437	-72.52	-85.69	-81.55	
TIS(EIRP)	WIFI (AP)	WIFI_B (11M)	11	2462	-71.01	-84.89	-80.81	

Conclusion

Dongguan UB Electronics Co., Ltd

- The antenna assembly diagram is shown on the third page of the annex, and the antenna π type matching circuit is close to the module position and 1.5PF capacitance.
- According to the data analysis, the test performance of the whole machine is good, the conduction is uneven, and the first channel is low.