



## Xunison Hub D60 5G

### 1 Product Introduction

Xunison Hub D60 5G is a powerful 5G CPE with Wi-Fi 6 Mesh solution, low latency, and high capacity to connect more devices simultaneously with the speeds up to 3.2 Gbps.

Additionally, the product supports advanced technologies such as Voice over LTE (VoLTE) and Voice over New Radio (VoNR), enabling high-quality voice calls over cellular networks.

#### 5G

5G LTE provides a home network with low latency, high speeds and extensive coverage.

#### Wi-Fi 6

The wireless technology in this device supports multiple Wi-Fi standards, including 802.11a/b/g/n/ac/ax, enabling seamless connections with both modern and legacy Wi-Fi devices.



## Xunison Hub D60 5G

### **Mesh**

This feature eliminates Wi-Fi dead zones in your home and expands the coverage area of your Wi-Fi network, so you can enjoy strong and uninterrupted signals throughout your home.

### **Parental Control**

This feature is useful for monitoring and controlling a child's activity on the internet. It includes features such as filtering inappropriate web content, setting time limits, and providing social supervision.

## **2 Product Installation**

The D60 5G supports both wired network and cellular connectivity, giving you the flexibility to choose the connection option that works best for you. Depending on your preference and the availability of networks, you can select either option to connect to the internet.

1. Insert a SIM card to connect to the internet.
2. Connect to the internet by using your home network.

## Xunison Hub D60 5G

### 2.1 - To insert a Nano SIM card into the Xunison Hub D60 5G, follow these steps:

Step 1: Locate the SIM slot located at the bottom of the D60 5G, and carefully follow the printed directions to insert the Nano-SIM card. Note that you should not insert or remove the SIM card while the device is powered on, as this could potentially damage the device.

Step 2: After inserting the SIM card, connect the power adapter to the Xunison Hub D60 5G and power on the device.




## Xunison Hub D60 5G

### 2.2- To connect the device to your home internet, follow these steps:

- Step 1: Connect the Ethernet cable from your home internet to the WAN port on the router (labeled "1").
- Step 2: Connect the power cable (labeled "2") to the device.
- Step 3: Press the power button (labeled "3") to turn on the device.

Note: If you wish to use the device in satellite mode, disconnect cable (1).

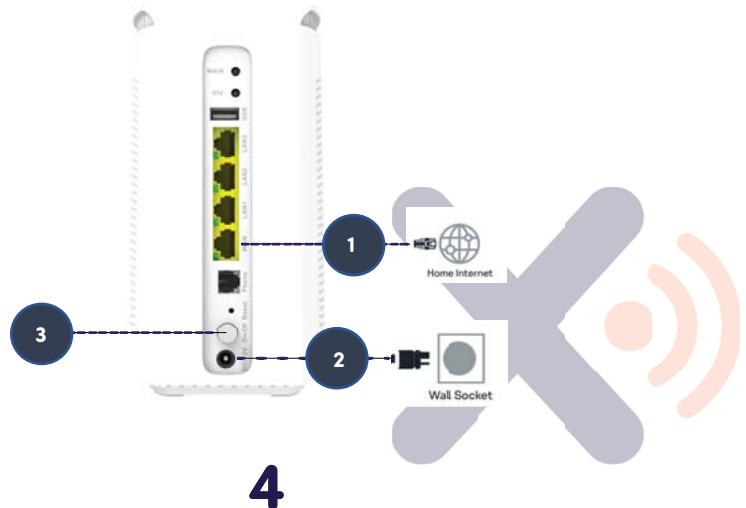

## **Xunison Hub D60 5G**

### **2.3 Product Configuration**

Step 1: Connect your mobile device to the Xunison Hub D60 5G network by entering the Wi-Fi details printed on the device sticker.

Step 2: To install the Xunison app, you can either scan the QR code on the welcome card.

OR

Step 2: Alternatively, you can download the Xunison app from Google Play store or App store.

After installing the app, log in with your registered account to access the features of the Xunison Hub D60 5G.



## Xunison Hub D60 5G

### 3 LED indicators

LEDs	Color	Symbol	Status
Wi-Fi	Solid Green	Wi-Fi	Wi-Fi ON
	Blinking green		Mesh pairing mode
	OFF		Wi-Fi OFF
5G	Solid Green	5G	5G network registered and operational
	Solid Red		5G network registered but no data
	OFF		No 5G network registered/SIM card not
4G	Solid Green	4G	4G network registered and operational
	Slow Blinking Green		3G network registered
	OFF		No 4G/3G network registered/SIM card not inserted
Phone	Green	Phone	VoLTE supported by SIM
	OFF		VoLTE not supported by SIM
Internet	Green	Internet	Internet connected
	OFF		No internet connection
Power	Solid Green	Power	Powered On
	OFF		Powered Off

## Xunison Hub D60 5G

### 4 Ports and Interfaces

	Ports	Description
DIV port, MAIN port	External antenna ports	
USB 2.0	USB is just data transfer	
LAN ports	To connect PCs, Laptops, etc. via Ethernet cables.	
WAN port	Connect Ethernet cable from Xunison Hub D60 5G router to the home internet.	
Phone port	To connect landline to the RJ-11 port for voice calling.	
Power port	For DC power supply (12V 2A).	
SIM slot	To insert 5G/4G SIM for internet connectivity.	



## Xunison Hub D60 5G

Button	Description
POWER	Turn Xunison Hub D60 5G On/Off.
PAIR	Long press the PAIR button for 5-10 seconds to setup the Mesh mode.  <i>Note: To connect to the gateway mode, press the PAIR button for 0-5 seconds.</i>
RESET	Press the “RESET” button for 10 seconds to factory reset the device to the default settings.



## Xunison Hub D60 5G

### 5 Safety Guidelines

#### General tips:

- Use only original and certified cables.
- Avoid exposing the device to water during storage, transportation, and operation.
- Keep the device away from heat sources and ensure adequate ventilation.
- Do not use any corrosive cleaner/oil to clean the device.
- Keep the device out of reach of children.

#### Installation tips:

- Check the cable connections after installing the device.
- Place the Xunison Hub D60 5G in an appropriate location for seamless internet connectivity.
- Restart the device in case of any internet connectivity problems.
- Change your Wi-Fi passwords regularly.

#### Caution:

Do not disassemble the device in case of malfunction or damage. Instead, change the connections and contact technical support for assistance.



## Xunison Hub D60 5G

### 6 RF Parameters

Function	Frequency Range	Transmit Power (EIRP)
2.4 GHz Wi-Fi	2412 ~ 2462 MHz	28.82dBm
5 GHz Wi-Fi	5150 ~ 5850 MHz	29.22dBm

### Support

For answers to your support questions and to access the latest downloads and product services, please visit [www.xunison.com/support](http://www.xunison.com/support). If you experience any issues with our products or features or functionality, you can also submit a ticket to [assistance](http://www.xunison.com/assistance).



## Xunison Hub D60 5G

### Disposal Note

It is important to properly dispose of electronic waste to prevent harm to the environment and human health. This product should be taken to a designated collection point for recycling of waste electrical and electronic equipment. You can contact your household waste disposal service or the seller of the product for more information on where to drop off your waste equipment for recycling.

This means that the device is only permitted to operate on Wireless Access Systems, such as radio local area networks, within the frequency band of 5150–5350 MHz for indoor use only, and only within the countries of the European Union listed: BE/BG/CZ/DK/DE/EE/IE/EL/ES/FR/HR/IT/CY/LV/LT/LU/HU/MT/NL/AT/PL/PT/RO/SI/SK/FI/SE/TR/NO/CH/IS/LI/UK(NI). The device is not permitted to operate outdoors within this frequency band or in other countries outside of the EU without the appropriate regulatory approvals.



## **Xunison Hub D60 5G**

### **Decalartion of Conformity**

Hereby, Xunison Ltd. declares that the radio equipment type D60 5G is in complaince with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet

### **Compliance**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body



Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Bracken Business Park, Bracken Rd, Sandyford Business Park,  
Sandyford, Dublin, Ireland

[www.xunison.com](http://www.xunison.com)