



FCC RF Test Report

APPLICANT : AltoBeam Inc.
EQUIPMENT : ATBM6132
BRAND NAME : ALTOBEAM
MODEL NAME : ATBM6132
FCC ID : 2BAVSATBM6132
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Mar. 20, 2024 ~ Jun. 07, 2024

We, Sporton International Inc.(ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc.(ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Test Software	7
1.8 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode	10
2.3 Connection Diagram of Test System	11
2.4 Support Unit used in test configuration and system	12
2.5 EUT Operation Test Setup	12
2.6 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement	23
3.5 AC Conducted Emission Measurement	28
3.6 Antenna Requirements	30
4 LIST OF MEASURING EQUIPMENT	31
5 MEASUREMENT UNCERTAINTY	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR431203C	Rev. 01	Initial issue of report	Jun. 14, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.53 dB at 5469.60 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 2.27 dB at 2.31 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

AltoBeam Inc.

B808,Tsinghua Tongfang Hi-Tech Plaza,Haidian Beijing China

1.2 Manufacturer

AltoBeam Inc.

B808,Tsinghua Tongfang Hi-Tech Plaza,Haidian Beijing China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ATBM6132
Brand Name	ALTOBEAM
Model Name	ATBM6132
FCC ID	2BAVSATBM6132
HW Version	V1.2
SW Version	V2.10.120
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 20.52 dBm / 0.1127 W 802.11n HT20 : 20.57 dBm / 0.1140 W 802.11n HT40 : 19.05 dBm / 0.0804 W <5260 MHz ~ 5320 MHz> 802.11a : 20.25 dBm / 0.1059 W 802.11n HT20 : 20.27 dBm / 0.1064 W 802.11n HT40 : 19.30 dBm / 0.0851 W <5500 MHz ~ 5700 MHz > 802.11a : 20.30 dBm / 0.1072 W 802.11n HT20 : 20.31 dBm / 0.1074 W 802.11n HT40 : 19.46 dBm / 0.0883 W <5745 MHz ~ 5825 MHz> 802.11a : 20.15 dBm / 0.1035 W 802.11n HT20 : 20.16 dBm / 0.1038 W 802.11n HT40 : 19.21 dBm / 0.0834 W
99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 24.53 MHz 802.11n HT20 : 25.32 MHz 802.11n HT40 : 42.76 MHz <5260 MHz ~ 5320 MHz> 802.11a : 23.08 MHz 802.11n HT20 : 24.13 MHz 802.11n HT40 : 37.66 MHz <5500 MHz ~ 5700 MHz> 802.11a : 27.27 MHz 802.11n HT20 : 28.52 MHz 802.11n HT40 : 49.15 MHz <5745 MHz ~ 5825 MHz> 802.11a : 27.97 MHz 802.11n HT20 : 28.47 MHz 802.11n HT40 : 59.84 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> Rod antenna with gain 3.4 dBi <5260 MHz ~ 5320 MHz> Rod antenna with gain 2.88 dBi <5500 MHz ~ 5700 MHz> Rod antenna with gain 3.67 dBi <5745 MHz ~ 5825 MHz> Rod antenna with gain 2.88 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

Note: WLAN operation in 5600 MHz ~ 5650 MHz is notched.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane for UNII-1/2A/2C, Y plane for UNII-3) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5700MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


AC Conducted Emission	Mode 1 : WLAN Link(5G) + Charging from NB
Remark: For Radiated Test Cases, The tests were performance with Notebook.	

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159

2.3 Connection Diagram of Test System

AC Conducted Emission:

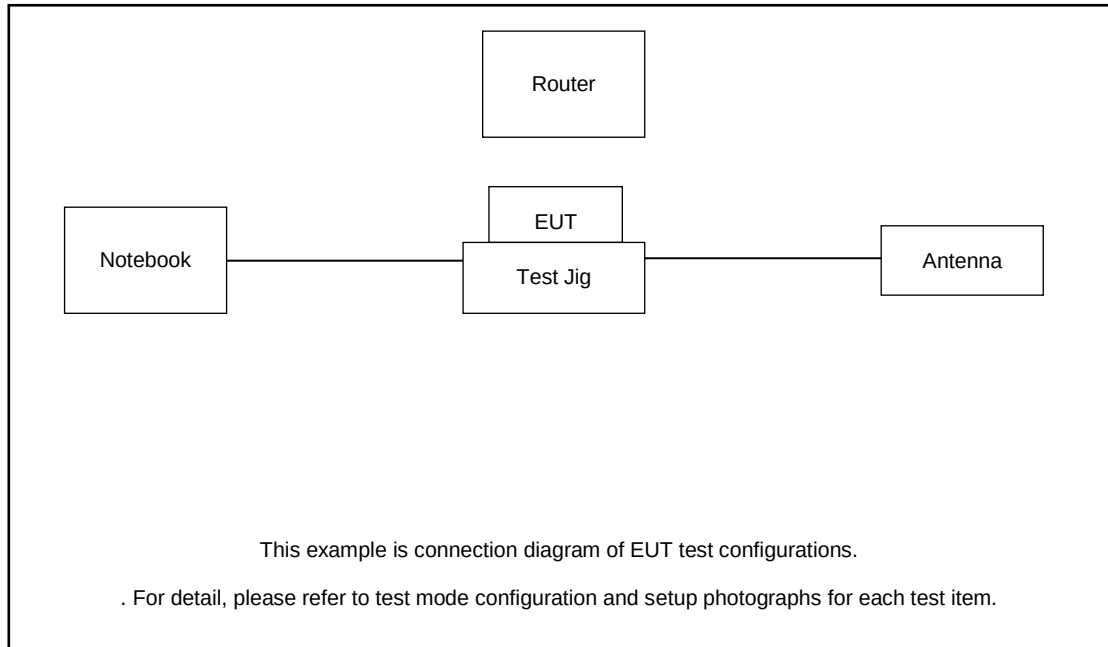

Radiated Emission:

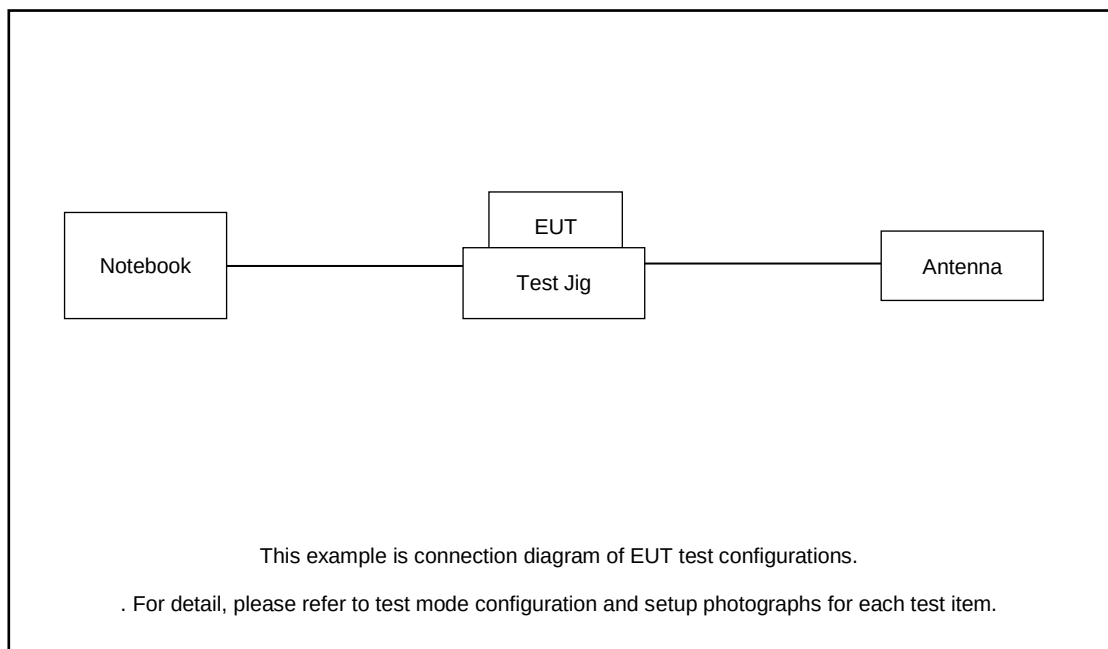

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
2.	Notebook	N/A	N/A	N/A	N/A	N/A
3.	Antenna	N/A	N/A	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.80 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.80 + 10 = 11.80 \text{ (dB)}\end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 * RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.



3.1.4 Test Setup


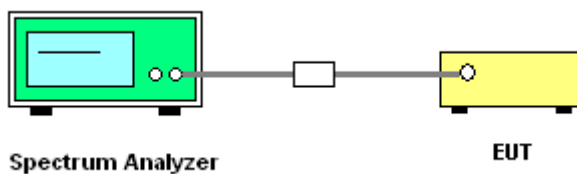


3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

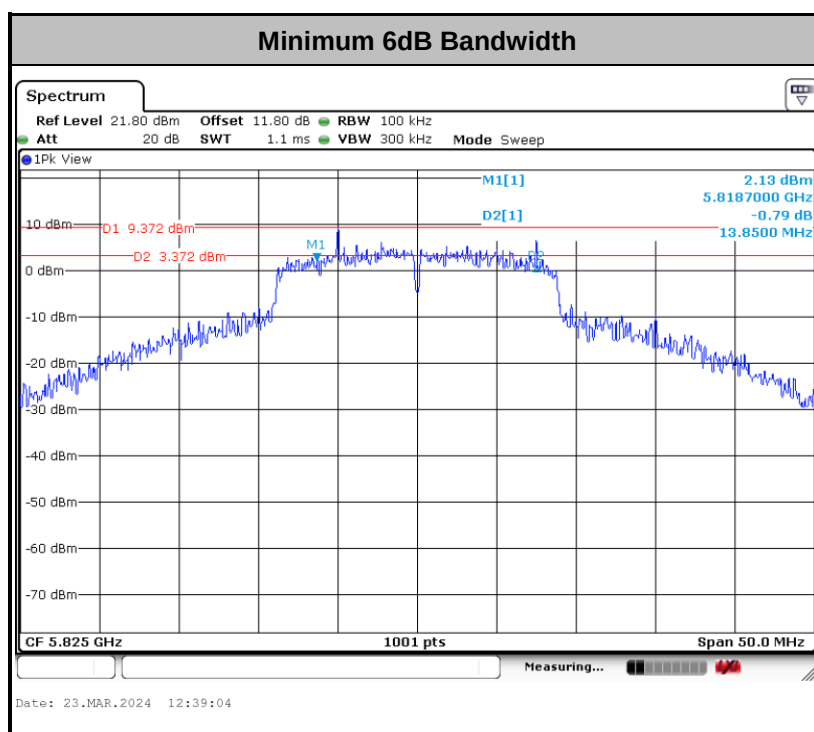

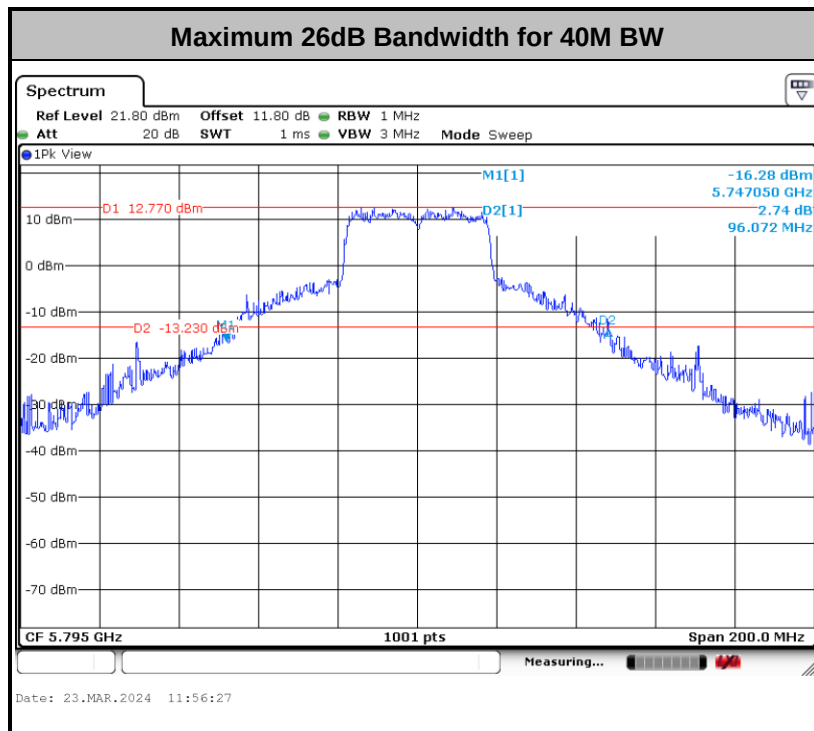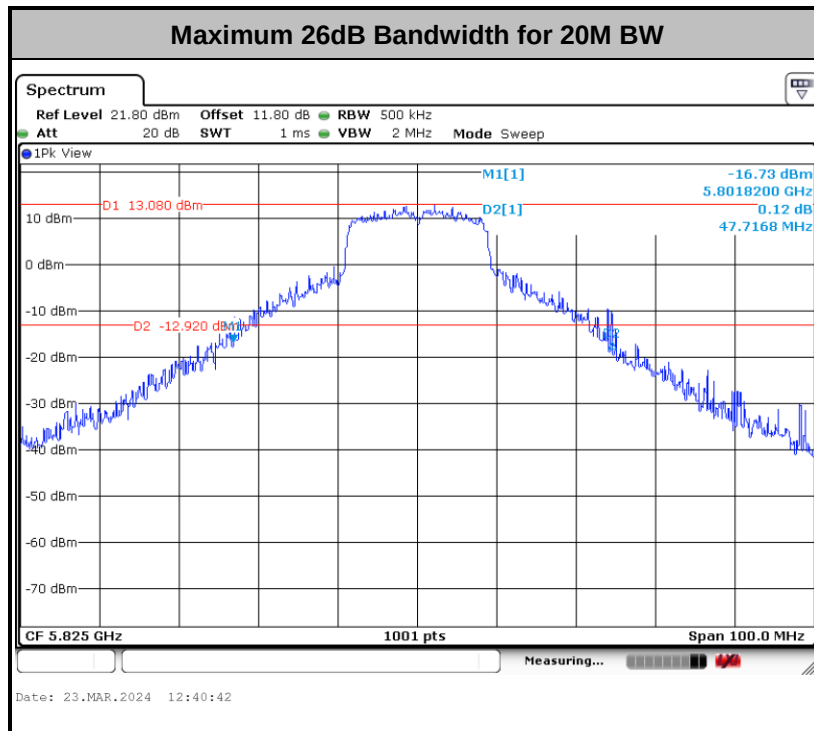

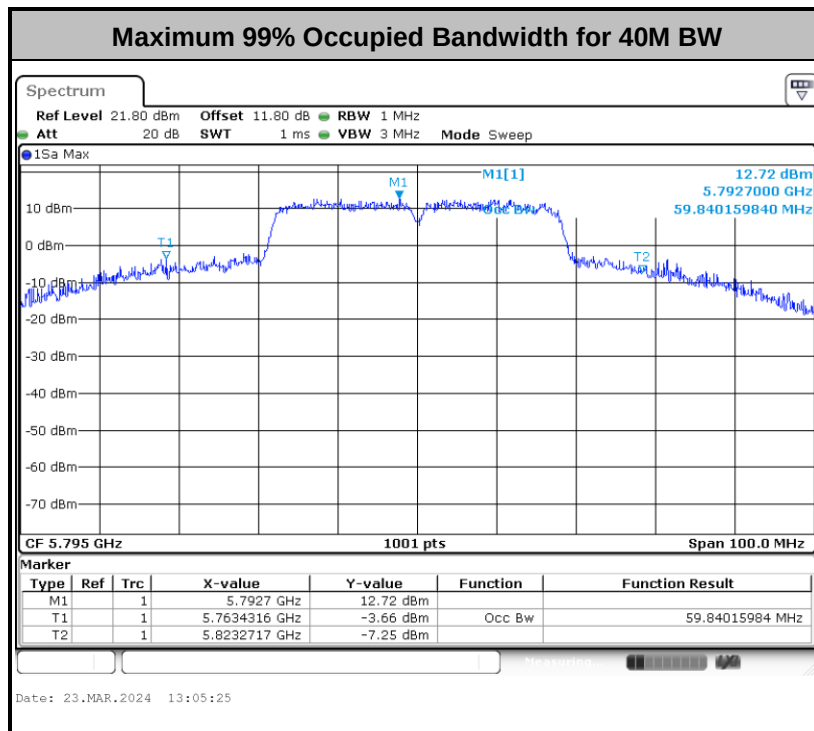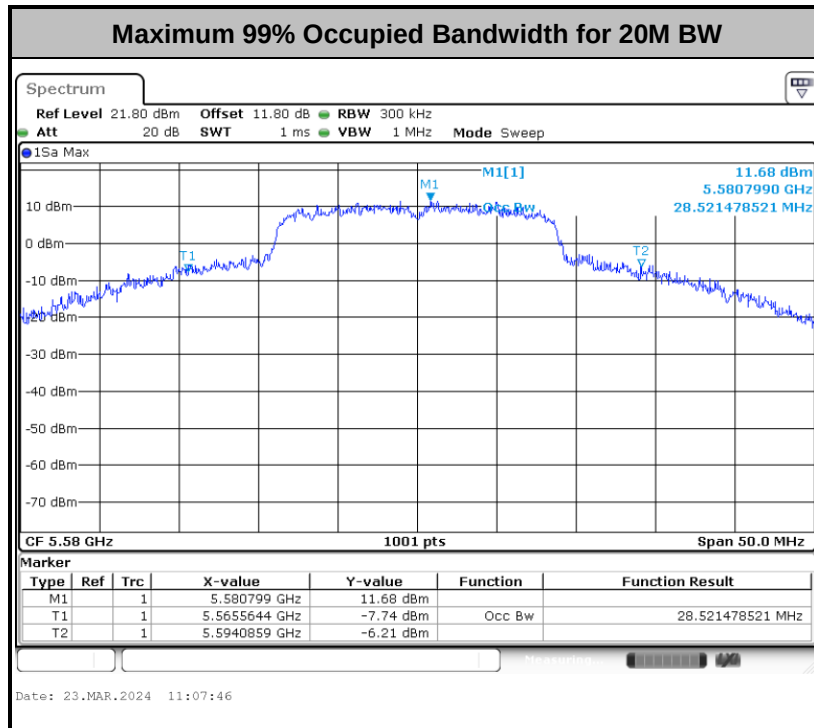

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

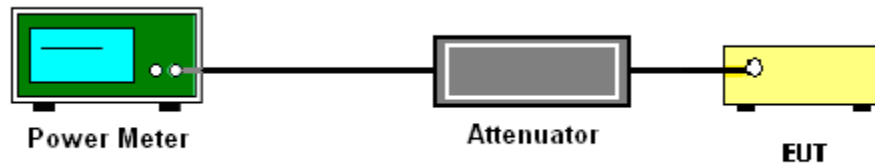

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

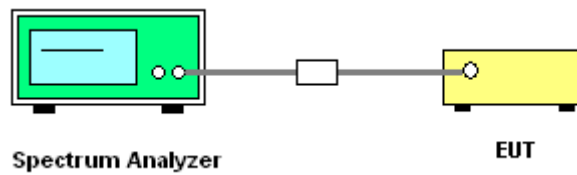

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

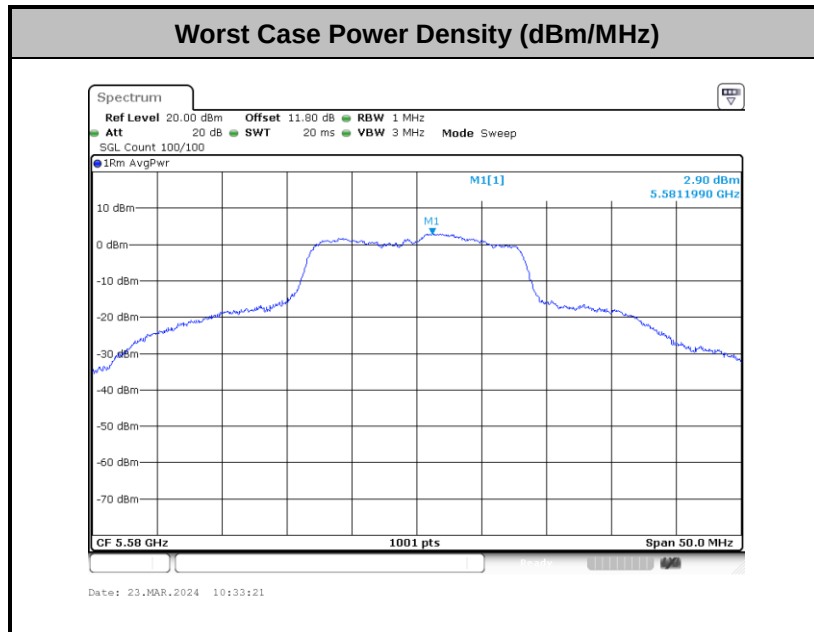

Note: Average Power Density (dB) = Measured value+ Factor

For devices operating in the band UNII-3

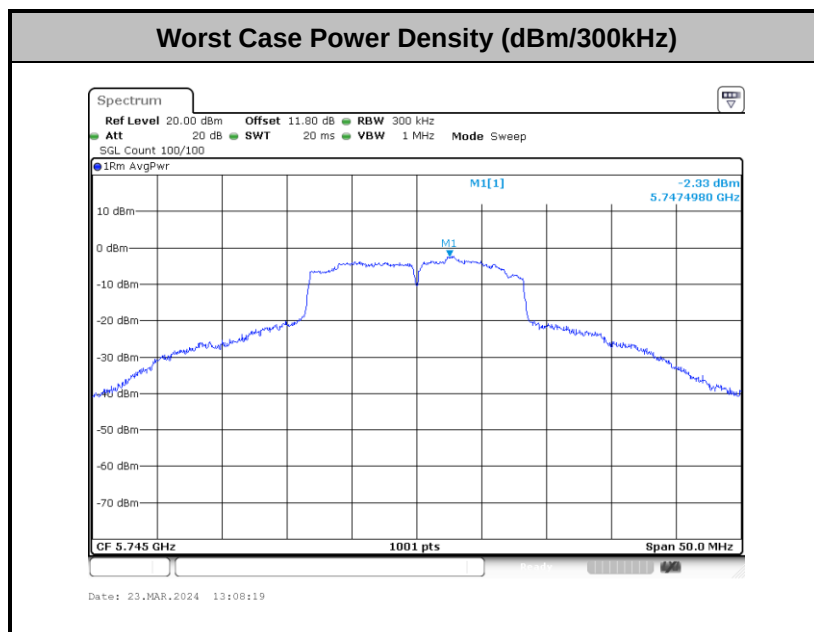

Note: Average Power Density (dB) = Measured value+ Factor

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

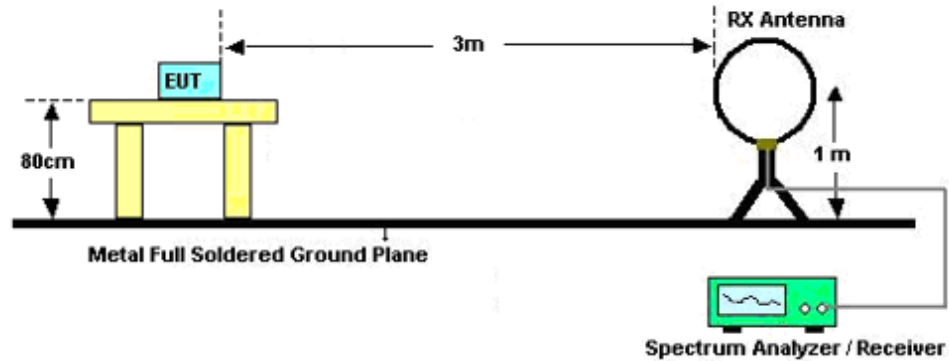

For radiated emissions from 30MHz to 1GHz

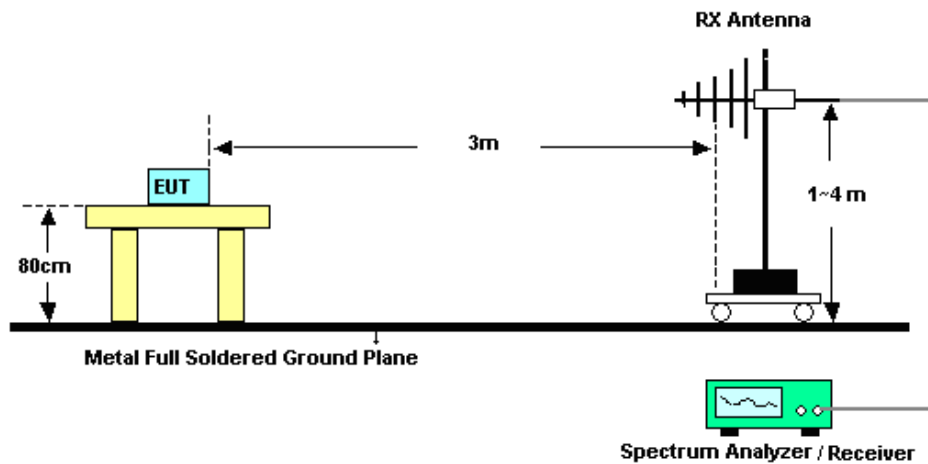

For radiated emissions above 1GHz

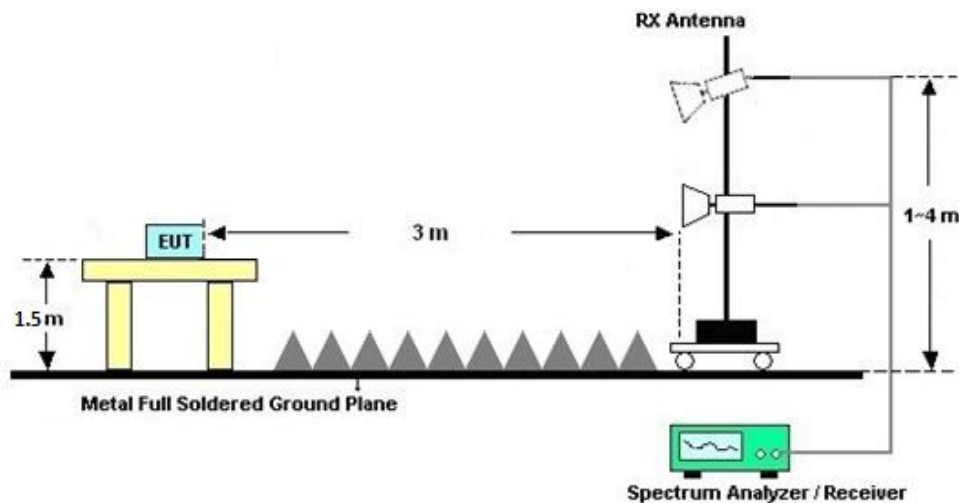

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

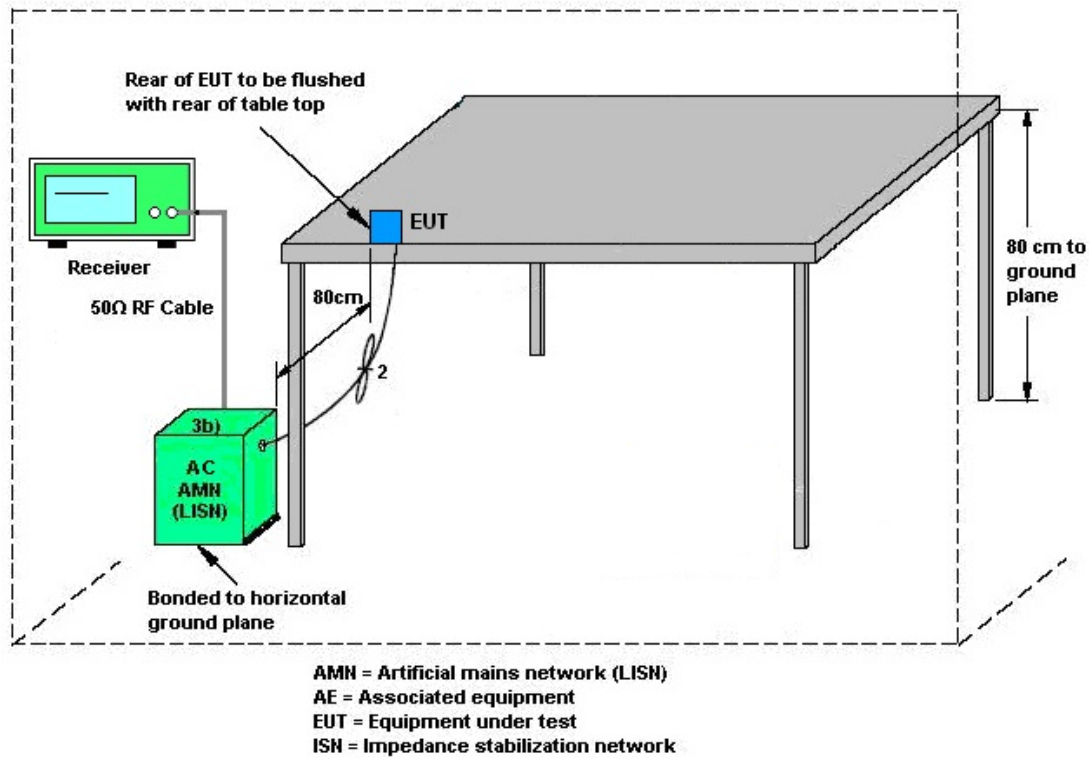

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Mar. 20, 2024~May 28, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Mar. 20, 2024~May 28, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Mar. 20, 2024~May 28, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Mar. 20, 2024~May 28, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Mar. 20, 2024~May 28, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Mar. 20, 2024~Mar. 31, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	May 22, 2024~May 28, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Mar. 20, 2024~Mar. 31, 2024	Apr. 03, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	May 22, 2024~May 28, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Mar. 20, 2024~May 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Mar. 20, 2024~May 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Mar. 20, 2024~May 28, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Mar. 20, 2024~May 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 20, 2024~May 28, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 20, 2024~May 28, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Jun. 07, 2024	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Jun. 07, 2024	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Jun. 07, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Jun. 07, 2024	Jul. 06, 2024	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Mar. 23, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Mar. 23, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Mar. 23, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Mar. 23, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Mar. 23, 2024	Jul. 04, 2024	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/3/23	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

<5180 MHz ~ 5240 MHz>								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)		
11a	6Mbps	1	36	5180	24.53	42.14		
11a	6Mbps	1	44	5220	24.48	41.28		
11a	6Mbps	1	48	5240	18.08	41.66		
HT20	MCS0	1	36	5180	24.93	41.86		
HT20	MCS0	1	44	5220	25.32	42.06		
HT20	MCS0	1	48	5240	18.18	43.00		
HT40	MCS0	1	38	5190	42.76	88.64		
HT40	MCS0	1	46	5230	36.26	86.60		

TEST RESULTS DATA
Average Power Table

<5180 MHz ~ 5240 MHz>										Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	
11a	6Mbps	1	36	5180	6.97	17.20	24.00	3.40	Pass	deltagain=-5.5
11a	6M bps	1	40	5200	6.97	20.03	24.00	3.40	Pass	deltagain=0
11a	6Mbps	1	44	5220	6.97	20.52	24.00	3.40	Pass	deltagain=0
11a	6Mbps	1	48	5240	6.97	20.01	24.00	3.40	Pass	deltagain=-1
HT20	MCS0	1	36	5180	6.92	16.55	24.00	3.40	Pass	deltagain=-5.5
HT20	MCS 0	1	40	5200	6.92	20.01	24.00	3.00	Pass	deltagain=0
HT20	MCS0	1	44	5220	6.92	20.57	24.00	3.40	Pass	deltagain=0
HT20	MCS0	1	48	5240	6.92	20.05	24.00	3.40	Pass	deltagain=-1
HT40	MCS0	1	38	5190	6.09	12.57	24.00	3.40	Pass	deltagain=-8.5
HT40	MCS0	1	46	5230	6.09	19.05	24.00	3.40	Pass	deltagain=-1

TEST RESULTS DATA
Power Spectral Density

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	6.97	9.86	11.00	3.40		Pass
11a	6Mbps	1	44	5220	6.97	9.96	11.00	3.40		Pass
11a	6Mbps	1	48	5240	6.97	9.83	11.00	3.40		Pass
HT20	MCS0	1	36	5180	6.92	9.72	11.00	3.40		Pass
HT20	MCS0	1	44	5220	6.92	9.86	11.00	3.40		Pass
HT20	MCS0	1	48	5240	6.92	9.94	11.00	3.40		Pass
HT40	MCS0	1	38	5190	6.09	5.28	11.00	3.40		Pass
HT40	MCS0	1	46	5230	6.09	5.70	11.00	3.40		Pass

TEST RESULTS DATA
26dB and 99% OBW

<5260 MHz ~ 5320 MHz>								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)		
11a	6M bps	1	52	5260	17.53	40.36		
11a	6M bps	1	60	5300	23.08	39.06		
11a	6M bps	1	64	5320	23.03	39.44		
HT20	MCS 0	1	52	5260	18.23	43.32		
HT20	MCS 0	1	60	5300	24.13	42.50		
HT20	MCS 0	1	64	5320	23.43	40.00		
HT40	MCS 0	1	54	5270	36.96	87.80		
HT40	MCS 0	1	62	5310	37.66	84.55		

TEST RESULTS DATA
Average Power Table

<5260 MHz ~ 5320 MHz>										Power Setting
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	
11a	6M bps	1	52	5260	6.97	20.25	23.98	2.88	Pass	deltagain=0
11a	6M bps	1	60	5300	6.97	20.15	23.98	2.88	Pass	deltagain=0
11a	6M bps	1	64	5320	6.97	17.61	23.98	2.88	Pass	deltagain=-4.5
HT20	MCS 0	1	52	5260	6.92	20.27	23.98	2.88	Pass	deltagain=0
HT20	MCS 0	1	60	5300	6.92	20.17	23.98	2.88	Pass	deltagain=0
HT20	MCS 0	1	64	5320	6.92	17.42	23.98	2.88	Pass	deltagain=-5
HT40	MCS 0	1	54	5270	6.09	19.30	23.98	2.88	Pass	deltagain=0
HT40	MCS 0	1	62	5310	6.09	11.52	23.98	2.88	Pass	deltagain=-7.5

TEST RESULTS DATA
Power Spectral Density

<5260 MHz ~ 5320 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	6.97	9.20	11.00	2.88		Pass
11a	6M bps	1	60	5300	6.97	8.84	11.00	2.88		Pass
11a	6M bps	1	64	5320	6.97	8.66	11.00	2.88		Pass
HT20	MCS 0	1	52	5260	6.92	8.73	11.00	2.88		Pass
HT20	MCS 0	1	60	5300	6.92	8.75	11.00	2.88		Pass
HT20	MCS 0	1	64	5320	6.92	9.10	11.00	2.88		Pass
HT40	MCS 0	1	54	5270	6.09	4.93	11.00	2.88		Pass
HT40	MCS 0	1	62	5310	6.09	4.96	11.00	2.88		Pass

TEST RESULTS DATA
26dB and 99% OBW

<5500 MHz ~ 5700 MHz >								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)		
11a	6M bps	1	100	5500	26.02	42.94		
11a	6M bps	1	116	5580	27.27	44.82		
11a	6M bps	1	140	5700	26.92	42.76		
HT20	MCS 0	1	100	5500	26.77	44.32		
HT20	MCS 0	1	116	5580	28.52	44.96		
HT20	MCS 0	1	140	5700	28.17	43.38		
HT40	MCS 0	1	102	5510	49.15	93.51		
HT40	MCS 0	1	110	5550	46.95	92.75		
HT40	MCS 0	1	134	5670	46.45	90.63		

TEST RESULTS DATA
Average Power Table

<5500 MHz ~ 5700 MHz >										Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	
11a	6M bps	1	100	5500	6.97	18.02	23.98	3.67	Pass	deltagain=-3.5
11a	6M bps	1	116	5580	6.97	20.30	23.98	3.67	Pass	deltagain=1
11a	6Mbps	1	136	5680	6.97	18.53	23.98	3.00	Pass	deltagain=-1.5
11a	6M bps	1	140	5700	6.97	13.20	23.98	3.67	Pass	deltagain=-8.5
HT20	MCS 0	1	100	5500	6.92	17.98	23.98	3.67	Pass	deltagain=-3.5
HT20	MCS 0	1	116	5580	6.92	20.31	23.98	3.67	Pass	deltagain=1
HT20	MCS0	1	136	5680	6.92	18.07	23.98	3.00	Pass	deltagain=-2
HT20	MCS 0	1	140	5700	6.92	12.59	23.98	3.67	Pass	deltagain=-9
HT40	MCS 0	1	102	5510	6.09	13.39	23.98	3.67	Pass	deltagain=-6
HT40	MCS 0	1	110	5550	6.09	18.59	23.98	3.67	Pass	deltagain=-0.5
HT40	MCS0	1	126	5630	6.09	19.46	23.98	3.00	Pass	deltagain=1
HT40	MCS 0	1	134	5670	6.09	15.47	23.98	3.67	Pass	deltagain=-4

TEST RESULTS DATA
Power Spectral Density

<5500 MHz ~ 5700 MHz >										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	6.97	9.83	11.00	3.67		Pass
11a	6M bps	1	116	5580	6.97	9.87	11.00	3.67		Pass
11a	6M bps	1	140	5700	6.97	8.87	11.00	3.67		Pass
HT20	MCS 0	1	100	5500	6.92	9.50	11.00	3.67		Pass
HT20	MCS 0	1	116	5580	6.92	9.59	11.00	3.67		Pass
HT20	MCS 0	1	140	5700	6.92	9.01	11.00	3.67		Pass
HT40	MCS 0	1	102	5510	6.09	6.31	11.00	3.67		Pass
HT40	MCS 0	1	110	5550	6.09	6.47	11.00	3.67		Pass
HT40	MCS 0	1	134	5670	6.09	5.14	11.00	3.67		Pass

TEST RESULTS DATA
Average Power Table

<5745 MHz ~ 5825 MHz>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	6.97	20.12	30.00	2.88	Pass
11a	6Mbps	1	157	5785	6.97	20.13	30.00	2.88	Pass
11a	6Mbps	1	165	5825	6.97	20.15	30.00	2.88	Pass
HT20	MCS 0	1	149	5745	6.92	20.13	30.00	2.88	Pass
HT20	MCS 0	1	157	5785	6.92	20.15	30.00	2.88	Pass
HT20	MCS 0	1	165	5825	6.92	20.16	30.00	2.88	Pass
HT40	MCS 0	1	151	5755	6.09	18.62	30.00	2.88	Pass
HT40	MCS 0	1	159	5795	6.09	19.21	30.00	2.88	Pass

Setting
deltagain=2
deltagain=2
deltagain=2
deltagain=2
deltagain=2
deltagain=2
deltagain=1
deltagain=2

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

<5745 MHz ~ 5825 MHz>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	26.07	42.24	14.25	0.5	Pass
11a	6Mbps	1	157	5785	27.17	43.46	16.45	0.5	Pass
11a	6Mbps	1	165	5825	27.97	44.38	15.40	0.5	Pass
HT20	MCS 0	1	149	5745	27.12	44.82	15.50	0.5	Pass
HT20	MCS 0	1	157	5785	28.27	45.02	17.10	0.5	Pass
HT20	MCS 0	1	165	5825	28.47	47.72	13.85	0.5	Pass
HT40	MCS 0	1	151	5755	37.26	93.80	35.28	0.5	Pass
HT40	MCS 0	1	159	5795	59.84	96.07	35.28	0.5	Pass


TEST RESULTS DATA
Power Spectral Density

<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	6.97	2.22	6.85	30.00	2.88	Pass
11a	6Mbps	1	157	5785	6.97	2.22	6.14	30.00	2.88	Pass
11a	6Mbps	1	165	5825	6.97	2.22	5.90	30.00	2.88	Pass
HT20	MCS 0	1	149	5745	6.92	2.22	5.46	30.00	2.88	Pass
HT20	MCS 0	1	157	5785	6.92	2.22	5.77	30.00	2.88	Pass
HT20	MCS 0	1	165	5825	6.92	2.22	5.63	30.00	2.88	Pass
HT40	MCS 0	1	151	5755	6.09	2.22	2.46	30.00	2.88	Pass
HT40	MCS 0	1	159	5795	6.09	2.22	2.69	30.00	2.88	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

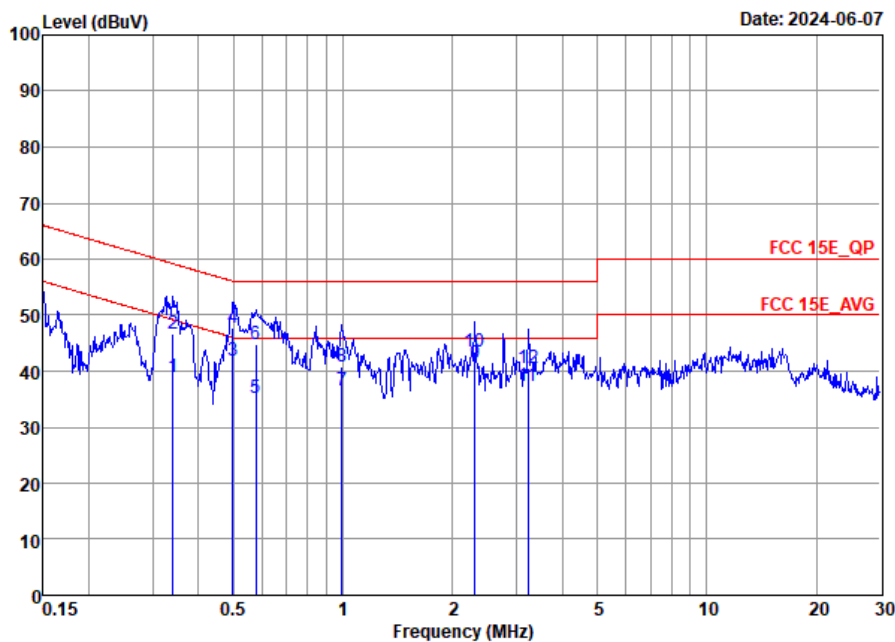


Site : CO01-SZ
Condition: FCC 15E_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.34	39.05	-10.13	49.18	18.69	10.20	10.16	Average
2	0.34	46.65	-12.53	59.18	26.29	10.20	10.16	QP
3 *	0.50	41.92	-4.13	46.05	21.50	10.26	10.16	Average
4	0.50	47.62	-8.43	56.05	27.20	10.26	10.16	QP
5	0.58	35.24	-10.76	46.00	14.90	10.18	10.16	Average
6	0.58	44.84	-11.16	56.00	24.50	10.18	10.16	QP
7	0.99	36.42	-9.58	46.00	16.00	10.26	10.16	Average
8	0.99	40.72	-15.28	56.00	20.30	10.26	10.16	QP
9	2.31	41.38	-4.62	46.00	20.70	10.43	10.25	Average
10	2.31	43.48	-12.52	56.00	22.80	10.43	10.25	QP
11	3.22	37.41	-8.59	46.00	17.01	10.11	10.29	Average
12	3.22	40.51	-15.49	56.00	20.11	10.11	10.29	QP



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

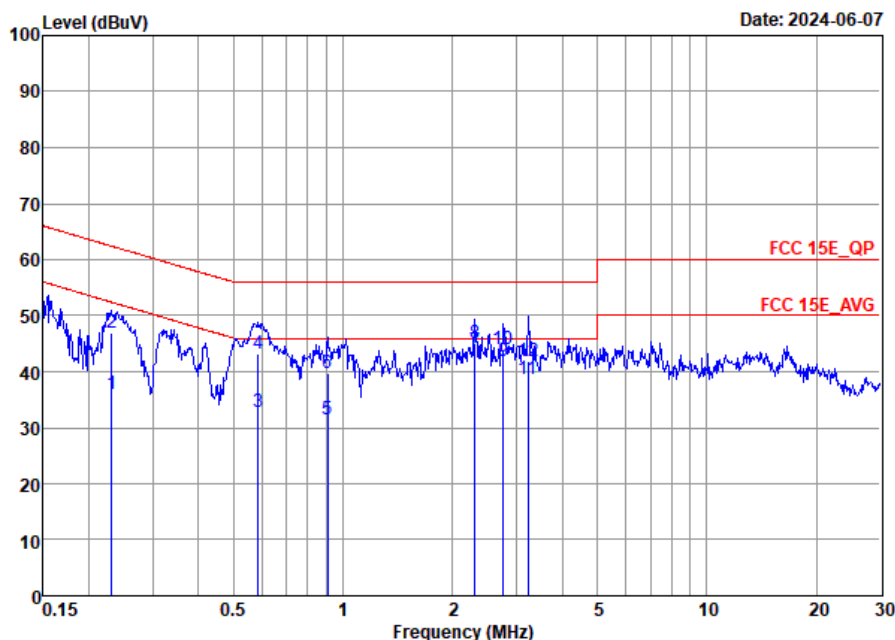

Site : C001-SZ
Condition: FCC 15E_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.23	36.04	-16.35	52.39	15.70	10.19	10.15	Average
2	0.23	46.84	-15.55	62.39	26.50	10.19	10.15	QP
3	0.59	32.71	-13.29	46.00	12.40	10.15	10.16	Average
4	0.59	43.11	-12.89	56.00	22.80	10.15	10.16	QP
5	0.91	31.53	-14.47	46.00	11.00	10.37	10.16	Average
6	0.91	39.63	-16.37	56.00	19.10	10.37	10.16	QP
7 *	2.31	43.73	-2.27	46.00	23.20	10.28	10.25	Average
8	2.31	45.03	-10.97	56.00	24.50	10.28	10.25	QP
9	2.76	41.88	-4.12	46.00	21.31	10.30	10.27	Average
10	2.76	43.88	-12.12	56.00	23.31	10.30	10.27	QP
11	3.22	38.67	-7.33	46.00	17.90	10.48	10.29	Average
12	3.22	41.87	-14.13	56.00	21.10	10.48	10.29	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Shiwei Wen	Relative Humidity :	48~49%
		Temperature :	24℃~25℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	SISO	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	SISO	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	SISO	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	SISO	802.11a	52	5280	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	SISO	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	SISO	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	SISO	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	SISO	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	SISO	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	SISO	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	SISO	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	SISO	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	SISO	802.11n HT20	52	5280	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	SISO	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	SISO	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	SISO	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	SISO	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	SISO	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	SISO	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	SISO	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	SISO	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	SISO	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	SISO	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	SISO	802.11n HT40	134	5670	MCS0	-	-
Mode 25	U-NII-3	5.725-5.85	SISO	802.11a	149	5745	6Mbps	-	-
Mode 26	U-NII-3	5.725-5.85	SISO	802.11a	157	5785	6Mbps	-	-
Mode 27	U-NII-3	5.725-5.85	SISO	802.11a	165	5825	6Mbps	-	-
Mode 28	U-NII-3	5.725-5.85	SISO	802.11n HT20	149	5745	MCS0	-	-
Mode 29	U-NII-3	5.725-5.85	SISO	802.11n HT20	157	5785	MCS0	-	-
Mode 30	U-NII-3	5.725-5.85	SISO	802.11n HT20	165	5825	MCS0	-	-
Mode 31	U-NII-3	5.725-5.85	SISO	802.11n HT40	151	5755	MCS0	-	-
Mode 32	U-NII-3	5.725-5.85	SISO	802.11n HT40	159	5795	MCS0	-	-
Mode 33	U-NII-2C	5.47-5.725	SISO	802.11n HT40 LF	102	5510	MCS0	-	LF
Mode 34	U-NII-3	5.725-5.85	SISO	802.11a LF	149	5745	6Mbps	-	LF
Mode 35	U-NII-1	5.15-5.25	SISO	802.11a	40	5200	6Mbps	-	-
Mode 36	U-NII-1	5.15-5.25	SISO	802.11a	136	5680	6Mbps	-	-
Mode 37	U-NII-1	5.15-5.25	SISO	802.11n HT20	40	5200	MCS0	-	-
Mode 38	U-NII-2C	5.47-5.725	SISO	802.11n HT20	136	5680	MCS0	-	-
Mode 39	U-NII-2C	5.47-5.725	SISO	802.11n HT40	110	5550	MCS0	-	-
Mode 40	U-NII-2C	5.47-5.725	SISO	802.11n HT40	126	5630	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.99	52.95	54.00	-1.05	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	49.56	68.30	-18.74	V	Peak	Pass	Harmonic
2	802.11a	44	5367.50	48.04	54.00	-5.96	H	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	49.89	68.30	-18.41	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	48.85	68.30	-19.45	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	49.75	68.30	-18.55	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	49.88	74.00	-24.12	V	Peak	Pass	Harmonic
6	802.11a	64	5350.00	53.00	54.00	-1.00	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	50.89	74.00	-23.11	H	Peak	Pass	Harmonic
7	802.11a	100	5469.93	67.46	68.30	-0.84	H	PEAK	Pass	Band Edge
7	802.11a	100	11000.00	47.44	54.00	-6.56	H	Average	Pass	Harmonic
8	802.11a	116	5452.26	48.62	54.00	-5.38	H	AVERAGE	Pass	Band Edge
8	802.11a	116	11160.00	49.83	54.00	-4.17	H	Average	Pass	Harmonic
9	802.11a	140	5726.62	65.44	68.30	-2.86	H	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	52.74	54.00	-1.26	V	Average	Pass	Harmonic
10	802.11n HT20	36	5149.96	53.37	54.00	-0.63	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	49.49	68.30	-18.81	H	Peak	Pass	Harmonic
11	802.11n HT20	44	5092.31	48.65	54.00	-5.35	H	AVERAGE	Pass	Band Edge
11	802.11n HT20	44	10440.00	50.11	68.30	-18.19	H	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	49.29	68.30	-19.01	H	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520.00	50.97	68.30	-17.33	V	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	10600.00	50.80	74.00	-23.20	H	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.00	52.19	54.00	-1.81	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	50.78	74.00	-23.22	H	Peak	Pass	Harmonic
16	802.11n HT20	100	5464.68	67.74	68.30	-0.56	H	PEAK	Pass	Band Edge
16	802.11n HT20	100	11000.00	48.01	54.00	-5.99	H	Average	Pass	Harmonic
17	802.11n HT20	116	5442.32	50.64	54.00	-3.36	H	AVERAGE	Pass	Band Edge
17	802.11n HT20	116	11160.00	52.27	54.00	-1.73	H	Average	Pass	Harmonic
18	802.11n HT20	140	5725.26	66.71	68.30	-1.59	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	11400.00	47.71	54.00	-6.29	H	Average	Pass	Harmonic
19	802.11n HT40	38	5149.83	53.42	54.00	-0.58	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	-	-	-	-	-	-	-	Harmonic
20	802.11n HT40	46	5148.93	50.65	54.00	-3.35	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic
21	802.11n HT40	54	5350.29	50.37	54.00	-3.63	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11n HT40	62	5350.59	52.97	54.00	-1.03	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic







23	802.11n HT40	102	5469.60	67.77	68.30	-0.53	H	PEAK	Pass	Band Edge
23	802.11n HT40	102	11020.00	46.52	54.00	-7.48	H	Average	Pass	Harmonic
24	802.11n HT40	134	5729.53	65.72	68.30	-2.58	H	PEAK	Pass	Band Edge
24	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11a	149	-	-	-	-	-	-	-	Band Edge
25	802.11a	149	11490.00	53.29	54.00	-0.71	V	Average	Pass	Harmonic
26	802.11a	157	-	-	-	-	-	-	-	Band Edge
26	802.11a	157	11570.00	53.16	54.00	-0.84	V	Average	Pass	Harmonic
27	802.11a	165	-	-	-	-	-	-	-	Band Edge
27	802.11a	165	11650.00	52.91	54.00	-1.09	H	Average	Pass	Harmonic
28	802.11n HT20	149	5646.26	55.81	68.30	-12.49	V	PEAK	Pass	Band Edge
28	802.11n HT20	149	11490.00	52.87	54.00	-1.13	V	Average	Pass	Harmonic
29	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
29	802.11n HT20	157	11570.00	52.14	54.00	-1.86	V	Average	Pass	Harmonic
30	802.11n HT20	165	5944.88	52.86	68.30	-15.44	H	PEAK	Pass	Band Edge
30	802.11n HT20	165	11650.00	52.63	54.00	-1.37	H	Average	Pass	Harmonic
31	802.11n HT40	151	5651.15	66.28	69.15	-2.87	V	PEAK	Pass	Band Edge
31	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
32	802.11n HT40	159	5641.24	62.88	68.30	-5.42	V	PEAK	Pass	Band Edge
32	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
33	802.11n HT40 LF	102	480.08	38.9	46	-7.1	H	PEAK	Pass	LF
34	802.11a LF	149	480.08	38.15	46	-7.85	H	PEAK	Pass	LF
35	802.11a	40	5149.30	49.73	54.00	-4.27	H	AVERAGE	Pass	Band Edge
35	802.11a	40	-	-	-	-	-	-	-	Harmonic
36	802.11a	136	5727.48	67.24	68.30	-1.06	H	PEAK	Pass	Band Edge
36	802.11a	136	-	-	-	-	-	-	-	Harmonic
37	802.11n HT20	40	5150.00	50.43	54.00	-3.57	H	AVERAGE	Pass	Band Edge
37	802.11n HT20	40	-	-	-	-	-	-	-	Harmonic
38	802.11n HT20	136	5726.28	66.54	68.30	-1.76	H	PEAK	Pass	Band Edge
38	802.11n HT20	136	-	-	-	-	-	-	-	Harmonic
39	802.11n HT40	110	5458.72	53.09	54.00	-0.91	H	AVERAGE	Pass	Band Edge
39	802.11n HT40	110	-	-	-	-	-	-	-	Harmonic
40	802.11n HT40	126	5729.31	61.21	68.30	-7.09	H	PEAK	Pass	Band Edge
40	802.11n HT40	126	-	-	-	-	-	-	-	Harmonic



Mode	1																																																																																														
	Band Edge																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2024-05-23 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5180 MHz. A red limit line is at 70.0 dBuV/m. The blue trace shows a rising signal starting around 5140 MHz, reaching approximately 105 dBuV/m at 5180 MHz. A peak is labeled PART 15.407. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5147.71</td><td>64.69</td><td>74.00</td><td>-9.31</td><td>50.51</td><td>34.87</td><td>11.09</td><td>31.78</td><td>208</td><td>59</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5147.71	64.69	74.00	-9.31	50.51	34.87	11.09	31.78	208	59	PEAK	Level (dBuV/m) Date: 2024-05-23 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red limit line is at 70.0 dBuV/m. The blue trace shows a rising signal starting around 5140 MHz, reaching approximately 105 dBuV/m at 5180 MHz. A peak is labeled PART 15.407. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>108.31</td><td>-----</td><td>-----</td><td>94.18</td><td>34.87</td><td>11.07</td><td>31.81</td><td>208</td><td>59</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	108.31	-----	-----	94.18	34.87	11.07	31.81	208	59	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5147.71	64.69	74.00	-9.31	50.51	34.87	11.09	31.78	208	59	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5180.00	108.31	-----	-----	94.18	34.87	11.07	31.81	208	59	PEAK																																																																																				
Avg	Level (dBuV/m) Date: 2024-05-23 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5180 MHz. A red limit line is at 52.5 dBuV/m. The blue trace shows a rising signal starting around 5140 MHz, reaching approximately 105 dBuV/m at 5180 MHz. A peak is labeled PART 15.407 AVG. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.99</td><td>52.95</td><td>54.00</td><td>-1.05</td><td>38.78</td><td>34.87</td><td>11.08</td><td>31.78</td><td>208</td><td>59</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.99	52.95	54.00	-1.05	38.78	34.87	11.08	31.78	208	59	AVERAGE	Level (dBuV/m) Date: 2024-05-23 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red limit line is at 52.5 dBuV/m. The blue trace shows a rising signal starting around 5140 MHz, reaching approximately 105 dBuV/m at 5180 MHz. A peak is labeled PART 15.407 AVG. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>101.09</td><td>-----</td><td>-----</td><td>86.96</td><td>34.87</td><td>11.07</td><td>31.81</td><td>208</td><td>59</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	101.09	-----	-----	86.96	34.87	11.07	31.81	208	59	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5149.99	52.95	54.00	-1.05	38.78	34.87	11.08	31.78	208	59	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5180.00	101.09	-----	-----	86.96	34.87	11.07	31.81	208	59	AVERAGE																																																																																				

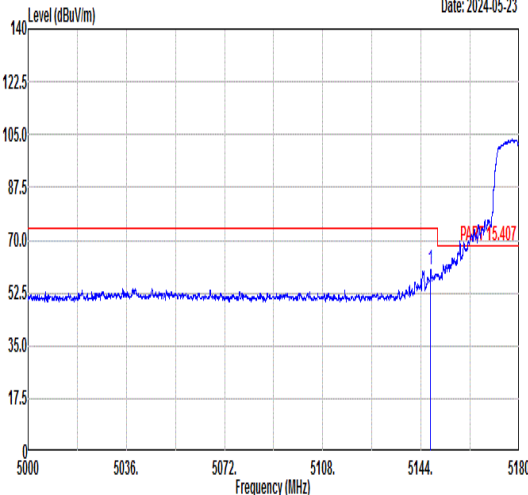
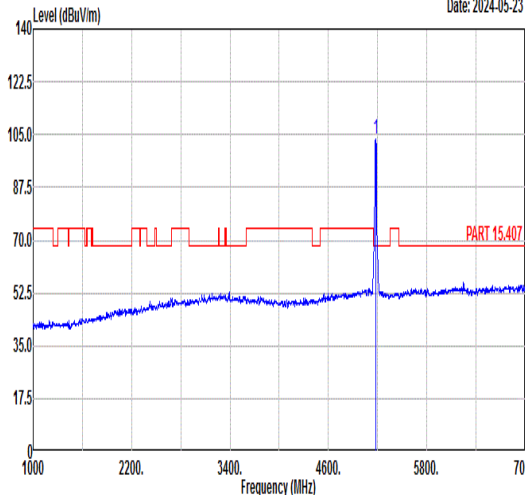
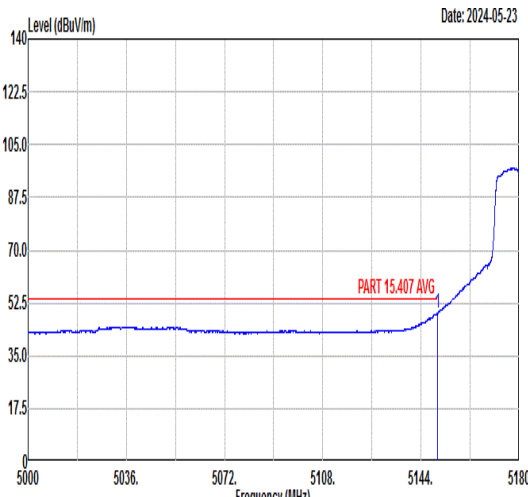
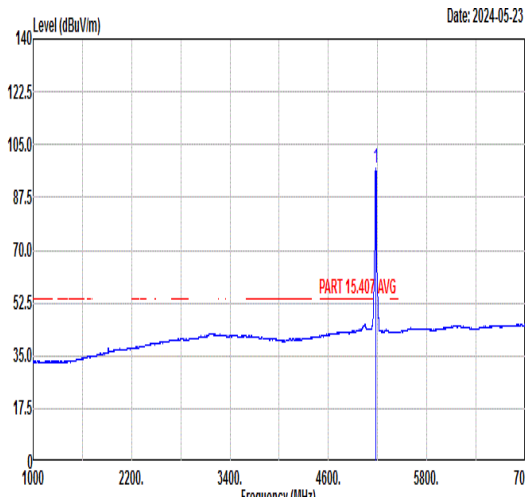


		1																																																																																									
Mode		Band Edge																																																																																									
		U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT		SISO																																																																																									
Pol.		Vertical					Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.51</td><td>60.47</td><td>74.00</td><td>-13.53</td><td>46.29</td><td>34.87</td><td>11.09</td><td>31.78</td><td>236</td><td>166</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.51	60.47	74.00	-13.53	46.29	34.87	11.09	31.78	236	166	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.33</td><td>-----</td><td>-----</td><td>89.20</td><td>34.87</td><td>11.07</td><td>31.81</td><td>236</td><td>166</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.33	-----	-----	89.20	34.87	11.07	31.81	236	166
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5147.51	60.47	74.00	-13.53	46.29	34.87	11.09	31.78	236	166	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5180.00	103.33	-----	-----	89.20	34.87	11.07	31.81	236	166	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>49.07</td><td>54.00</td><td>-4.93</td><td>34.90</td><td>34.87</td><td>11.08</td><td>31.78</td><td>236</td><td>166</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.99	49.07	54.00	-4.93	34.90	34.87	11.08	31.78	236	166	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>96.96</td><td>-----</td><td>-----</td><td>82.83</td><td>34.87</td><td>11.07</td><td>31.81</td><td>236</td><td>166</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	96.96	-----	-----	82.83	34.87	11.07	31.81	236	166
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5149.99	49.07	54.00	-4.93	34.90	34.87	11.08	31.78	236	166	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5180.00	96.96	-----	-----	82.83	34.87	11.07	31.81	236	166	AVERAGE																																																																																



Mode	1																																																																																											
	Harmonic																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2024-03-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>48.19</td><td>68.30</td><td>-20.11</td><td>45.37</td><td>39.44</td><td>14.15</td><td>50.77 -- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>49.70</td><td>74.00</td><td>-24.30</td><td>42.46</td><td>41.82</td><td>16.85</td><td>51.43 -- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	10360.00	48.19	68.30	-20.11	45.37	39.44	14.15	50.77 -- Peak	2	15540.00	49.70	74.00	-24.30	42.46	41.82	16.85	51.43 -- Peak	Level (dBuV/m) Date: 2024-03-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>10360.00</td><td>49.56</td><td>68.30</td><td>-18.74</td><td>46.74</td><td>39.44</td><td>14.15</td><td>50.77 -- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>49.61</td><td>74.00</td><td>-24.39</td><td>42.37</td><td>41.82</td><td>16.85</td><td>51.43 -- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	10360.00	49.56	68.30	-18.74	46.74	39.44	14.15	50.77 -- Peak	2	15540.00	49.61	74.00	-24.39	42.37	41.82	16.85	51.43 -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																					
1	10360.00	48.19	68.30	-20.11	45.37	39.44	14.15	50.77 -- Peak																																																																																				
2	15540.00	49.70	74.00	-24.30	42.46	41.82	16.85	51.43 -- Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																					
1	10360.00	49.56	68.30	-18.74	46.74	39.44	14.15	50.77 -- Peak																																																																																				
2	15540.00	49.61	74.00	-24.39	42.37	41.82	16.85	51.43 -- Peak																																																																																				

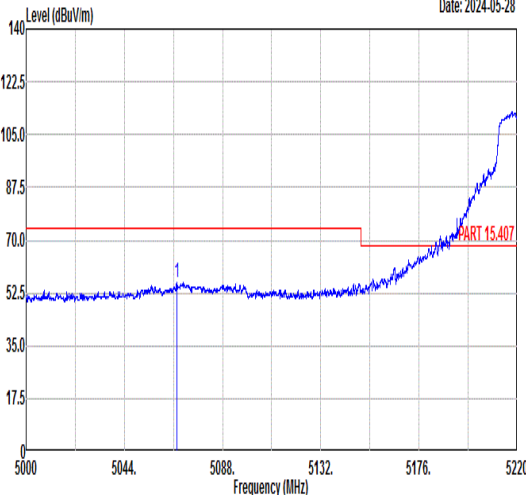
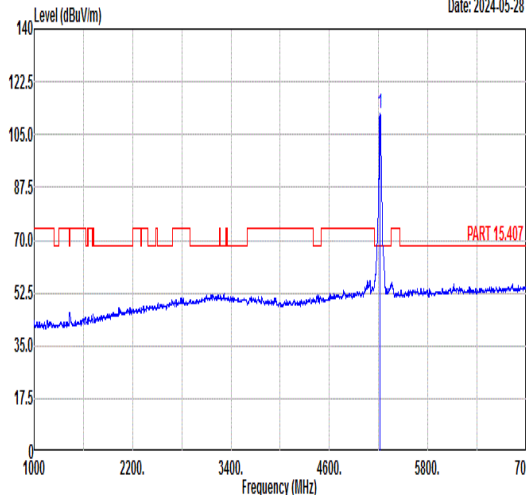
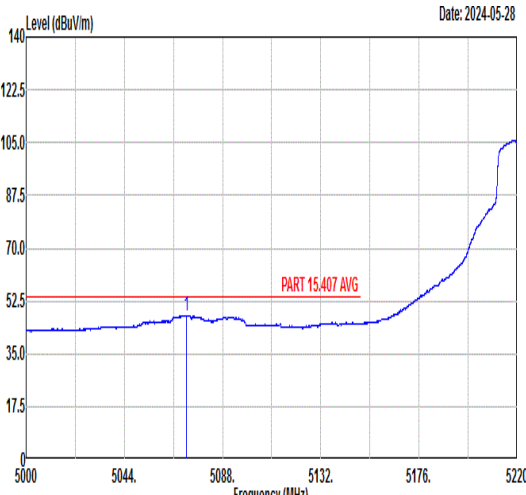
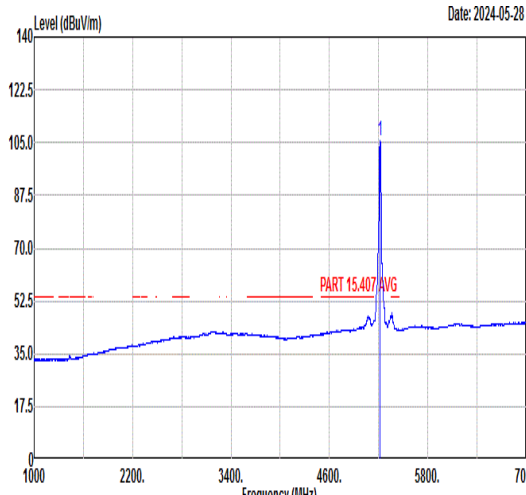


Mode	2																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5067.43</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>41.65</td><td>34.89</td><td>11.13</td><td>31.68</td><td>217</td><td>62</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5067.43	55.99	74.00	-18.01	41.65	34.89	11.13	31.68	217	62	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>111.83</td><td>-----</td><td>-----</td><td>97.78</td><td>34.86</td><td>11.05</td><td>31.86</td><td>217</td><td>62</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	111.83	-----	-----	97.78	34.86	11.05	31.86	217	62
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5067.43	55.99	74.00	-18.01	41.65	34.89	11.13	31.68	217	62	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5220.00	111.83	-----	-----	97.78	34.86	11.05	31.86	217	62	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5071.63</td><td>47.72</td><td>54.00</td><td>-6.28</td><td>33.38</td><td>34.89</td><td>11.13</td><td>31.68</td><td>217</td><td>62</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5071.63	47.72	54.00	-6.28	33.38	34.89	11.13	31.68	217	62	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>105.43</td><td>-----</td><td>-----</td><td>91.38</td><td>34.86</td><td>11.05</td><td>31.86</td><td>217</td><td>62</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	105.43	-----	-----	91.38	34.86	11.05	31.86	217	62
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5071.63	47.72	54.00	-6.28	33.38	34.89	11.13	31.68	217	62	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5220.00	105.43	-----	-----	91.38	34.86	11.05	31.86	217	62	AVERAGE																																																																															



Mode	2																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																		
ANT	SISO																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-05-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5361.26</td><td>56.35</td><td>74.00</td><td>-17.65</td><td>42.62</td><td>34.83</td><td>10.94</td><td>32.04</td><td>217</td><td>62</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5361.26	56.35	74.00	-17.65	42.62	34.83	10.94	32.04	217	62	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5361.26	56.35	74.00	-17.65	42.62	34.83	10.94	32.04	217	62	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-05-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5367.50</td><td>48.04</td><td>54.00</td><td>-5.96</td><td>34.33</td><td>34.83</td><td>10.93</td><td>32.05</td><td>217</td><td>62</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5367.50	48.04	54.00	-5.96	34.33	34.83	10.93	32.05	217	62	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5367.50	48.04	54.00	-5.96	34.33	34.83	10.93	32.05	217	62	AVERAGE																																								

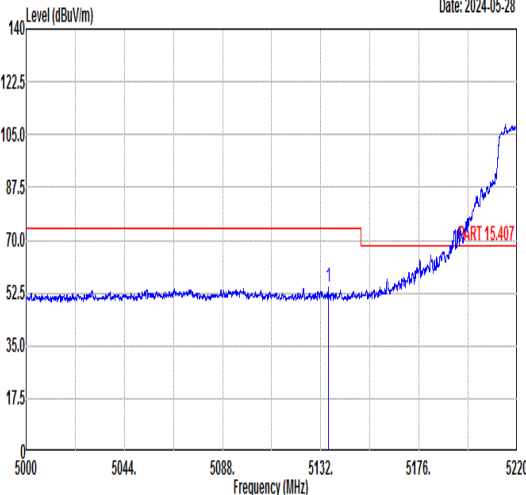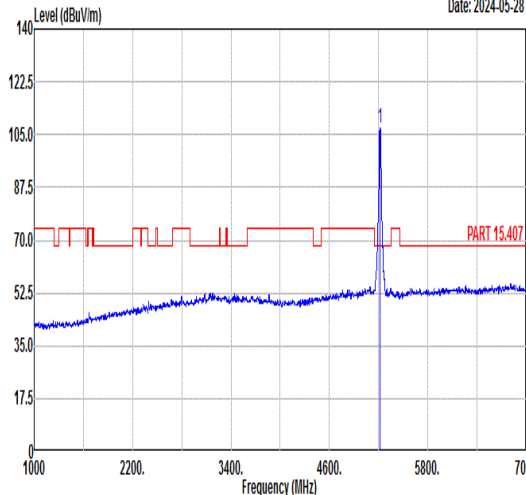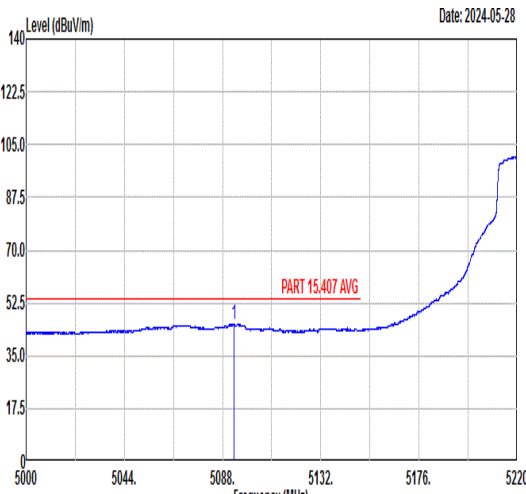
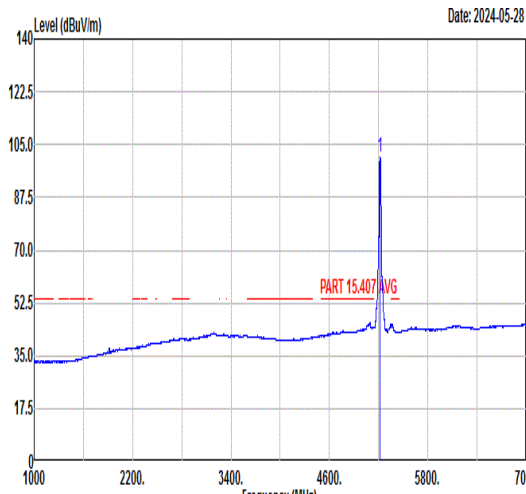


Mode	2																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5135.43</td><td>54.25</td><td>74.00</td><td>-19.75</td><td>40.05</td><td>34.87</td><td>11.09</td><td>31.76</td><td>234</td><td>174</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5135.43	54.25	74.00	-19.75	40.05	34.87	11.09	31.76	234	174	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>107.00</td><td>-----</td><td>-----</td><td>92.97</td><td>34.86</td><td>11.04</td><td>31.87</td><td>234</td><td>174</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	107.00	-----	-----	92.97	34.86	11.04	31.87	234	174
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5135.43	54.25	74.00	-19.75	40.05	34.87	11.09	31.76	234	174	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5220.00	107.00	-----	-----	92.97	34.86	11.04	31.87	234	174	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5092.97</td><td>45.51</td><td>54.00</td><td>-8.49</td><td>31.22</td><td>34.88</td><td>11.12</td><td>31.71</td><td>234</td><td>174</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5092.97	45.51	54.00	-8.49	31.22	34.88	11.12	31.71	234	174	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>100.73</td><td>-----</td><td>-----</td><td>86.68</td><td>34.86</td><td>11.05</td><td>31.86</td><td>234</td><td>174</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	100.73	-----	-----	86.68	34.86	11.05	31.86	234	174
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5092.97	45.51	54.00	-8.49	31.22	34.88	11.12	31.71	234	174	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5220.00	100.73	-----	-----	86.68	34.86	11.05	31.86	234	174	AVERAGE																																																																																





Mode	2																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2024-05-28 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5360.06</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>40.54</td><td>34.83</td><td>10.94</td><td>32.04</td><td>234</td><td>174</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5360.06	54.27	74.00	-19.73	40.54	34.83	10.94	32.04	234	174	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5360.06	54.27	74.00	-19.73	40.54	34.83	10.94	32.04	234	174	PEAK																															
Avg	Date: 2024-05-28 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5373.26</td><td>45.34</td><td>54.00</td><td>-8.66</td><td>31.64</td><td>34.83</td><td>10.93</td><td>32.06</td><td>234</td><td>174</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5373.26	45.34	54.00	-8.66	31.64	34.83	10.93	32.06	234	174	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5373.26	45.34	54.00	-8.66	31.64	34.83	10.93	32.06	234	174	AVERAGE																															

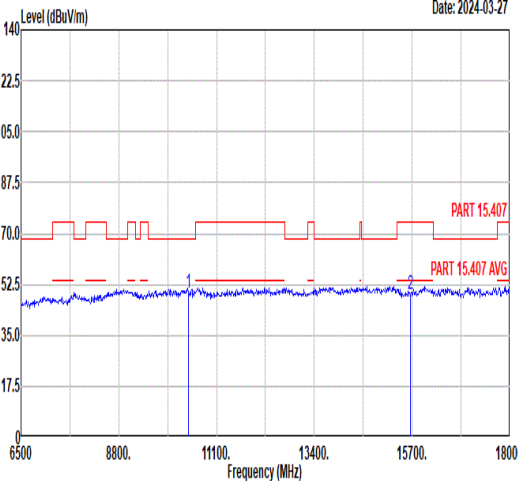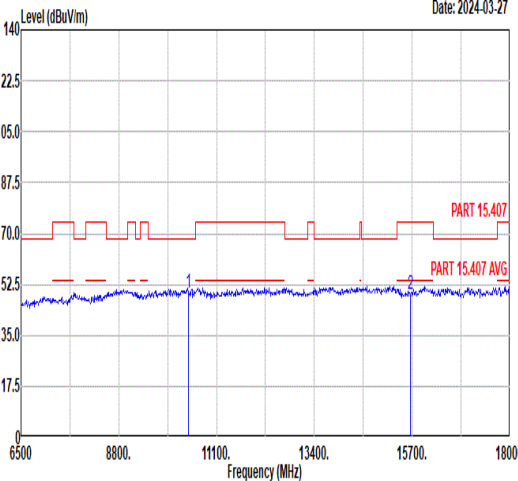

Mode	2																																																																																			
	Harmonic																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																			
ANT	SISO																																																																																			
Pol.	Horizontal						Vertical																																																																													
Peak Avg	 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a red line for the peak level and a blue line for the average level. The peak level is approximately 70 dBuV/m, and the average level is approximately 52.5 dBuV/m. The frequency range is from 6500 to 18000 MHz. The date is 2024-03-27.						 Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue line for the average level. The average level is approximately 52.5 dBuV/m. The frequency range is from 6500 to 18000 MHz. The date is 2024-03-27.																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>49.72</td><td>68.30</td><td>-18.58</td><td>46.83</td><td>39.48</td><td>14.20</td><td>50.79 -- -- Peak</td></tr><tr><td>2</td><td>15660.00</td><td>49.17</td><td>74.00</td><td>-24.83</td><td>41.86</td><td>41.90</td><td>16.94</td><td>51.53 -- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10440.00	49.72	68.30	-18.58	46.83	39.48	14.20	50.79 -- -- Peak	2	15660.00	49.17	74.00	-24.83	41.86	41.90	16.94	51.53 -- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>49.89</td><td>68.30</td><td>-18.41</td><td>47.00</td><td>39.48</td><td>14.20</td><td>50.79 -- -- Peak</td></tr><tr><td>2</td><td>15660.00</td><td>50.31</td><td>74.00</td><td>-23.69</td><td>43.00</td><td>41.90</td><td>16.94</td><td>51.53 -- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1	10440.00	49.89	68.30	-18.41	47.00	39.48	14.20	50.79 -- -- Peak	2	15660.00	50.31	74.00	-23.69	43.00	41.90	16.94	51.53 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1	10440.00	49.72	68.30	-18.58	46.83	39.48	14.20	50.79 -- -- Peak																																																																												
2	15660.00	49.17	74.00	-24.83	41.86	41.90	16.94	51.53 -- -- Peak																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1	10440.00	49.89	68.30	-18.41	47.00	39.48	14.20	50.79 -- -- Peak																																																																												
2	15660.00	50.31	74.00	-23.69	43.00	41.90	16.94	51.53 -- -- Peak																																																																												
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>49.72</td><td>68.30</td><td>-18.58</td><td>46.83</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>49.17</td><td>74.00</td><td>-24.83</td><td>41.86</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10440.00	49.72	68.30	-18.58	46.83	39.48	14.20	50.79	--	--	Peak	2	15660.00	49.17	74.00	-24.83	41.86	41.90	16.94	51.53	--	--	Peak	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>49.89</td><td>68.30</td><td>-18.41</td><td>47.00</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>50.31</td><td>74.00</td><td>-23.69</td><td>43.00</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10440.00	49.89	68.30	-18.41	47.00	39.48	14.20	50.79	--	--	Peak	2	15660.00	50.31	74.00	-23.69	43.00	41.90	16.94	51.53	--	--	Peak	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	10440.00	49.72	68.30	-18.58	46.83	39.48	14.20	50.79	--	--	Peak																																																																									
2	15660.00	49.17	74.00	-24.83	41.86	41.90	16.94	51.53	--	--	Peak																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	10440.00	49.89	68.30	-18.41	47.00	39.48	14.20	50.79	--	--	Peak																																																																									
2	15660.00	50.31	74.00	-23.69	43.00	41.90	16.94	51.53	--	--	Peak																																																																									

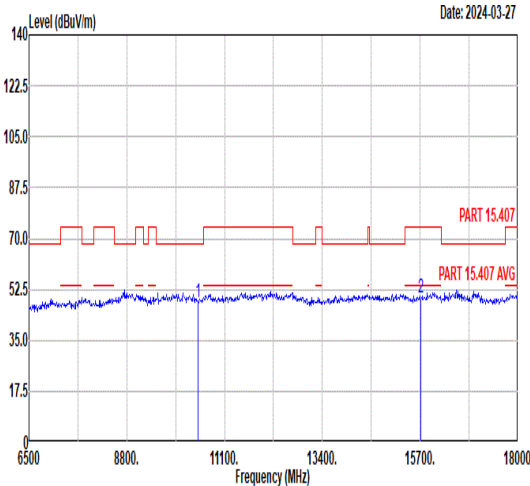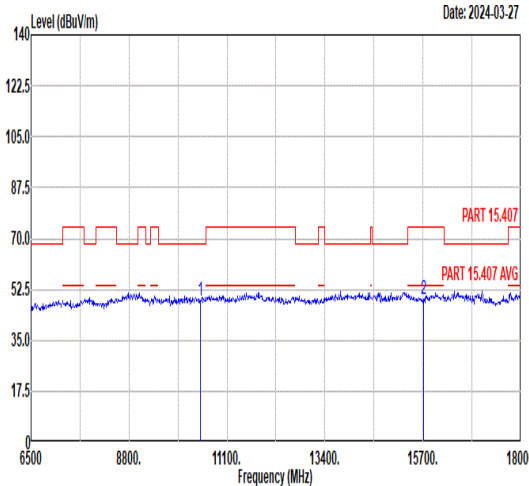

Mode	3																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10480.00</td><td>48.09</td><td>68.30</td><td>-20.21</td><td>45.17</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>49.56</td><td>74.00</td><td>-24.44</td><td>42.22</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10480.00	48.09	68.30	-20.21	45.17	39.49	14.23	50.80	--	--	Peak	2	15720.00	49.56	74.00	-24.44	42.22	41.93	16.99	51.58	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10480.00</td><td>48.85</td><td>68.30</td><td>-19.45</td><td>45.93</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>49.14</td><td>74.00</td><td>-24.86</td><td>41.80</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10480.00	48.85	68.30	-19.45	45.93	39.49	14.23	50.80	--	--	Peak	2	15720.00	49.14	74.00	-24.86	41.80	41.93	16.99	51.58	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10480.00	48.09	68.30	-20.21	45.17	39.49	14.23	50.80	--	--	Peak																																																																																																													
2	15720.00	49.56	74.00	-24.44	42.22	41.93	16.99	51.58	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10480.00	48.85	68.30	-19.45	45.93	39.49	14.23	50.80	--	--	Peak																																																																																																													
2	15720.00	49.14	74.00	-24.86	41.80	41.93	16.99	51.58	--	--	Peak																																																																																																													



Mode	4																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5280MHz																																																																																																	
ANT	SISO																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-03-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10520.00</td><td>49.13</td><td>68.30 -19.17</td><td>46.18</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15780.00</td><td>49.90</td><td>74.00 -24.10</td><td>42.52</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	49.13	68.30 -19.17	46.18	39.50	14.25	50.80	--	--	Peak	2 15780.00	49.90	74.00 -24.10	42.52	41.97	17.04	51.63	--	--	Peak	Level (dBuV/m) Date: 2024-03-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10520.00</td><td>49.75</td><td>68.30 -18.55</td><td>46.80</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15780.00</td><td>50.11</td><td>74.00 -23.89</td><td>42.73</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	49.75	68.30 -18.55	46.80	39.50	14.25	50.80	--	--	Peak	2 15780.00	50.11	74.00 -23.89	42.73	41.97	17.04	51.63	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10520.00	49.13	68.30 -19.17	46.18	39.50	14.25	50.80	--	--	Peak																																																																																									
2 15780.00	49.90	74.00 -24.10	42.52	41.97	17.04	51.63	--	--	Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10520.00	49.75	68.30 -18.55	46.80	39.50	14.25	50.80	--	--	Peak																																																																																									
2 15780.00	50.11	74.00 -23.89	42.73	41.97	17.04	51.63	--	--	Peak																																																																																									



Mode	5																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-03-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>49.51</td><td>74.00</td><td>-24.49</td><td>46.53</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>49.75</td><td>74.00</td><td>-24.25</td><td>42.29</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	49.51	74.00	-24.49	46.53	39.48	14.30	50.80	--	--	Peak	2	15900.00	49.75	74.00	-24.25	42.29	42.04	17.14	51.72	--	--	Peak	Level (dBuV/m) Date: 2024-03-27 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>49.49</td><td>74.00</td><td>-24.51</td><td>46.51</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>49.88</td><td>74.00</td><td>-24.12</td><td>42.42</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	49.49	74.00	-24.51	46.51	39.48	14.30	50.80	--	--	Peak	2	15900.00	49.88	74.00	-24.12	42.42	42.04	17.14	51.72	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10600.00	49.51	74.00	-24.49	46.53	39.48	14.30	50.80	--	--	Peak																																																																																																													
2	15900.00	49.75	74.00	-24.25	42.29	42.04	17.14	51.72	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10600.00	49.49	74.00	-24.51	46.51	39.48	14.30	50.80	--	--	Peak																																																																																																													
2	15900.00	49.88	74.00	-24.12	42.42	42.04	17.14	51.72	--	--	Peak																																																																																																													





Mode	6	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	SISO	
Pol.	Horizontal	Fundamental
Peak	Level (dBuV/m) Date: 2024-05-23 1 5354.66 65.68 74.00 -8.32 51.94 34.83 10.94 32.03 209 60 PEAK	Level (dBuV/m) Date: 2024-05-23 1 5320.00 108.23 ----- 94.41 34.84 10.97 31.99 209 60 PEAK
	Level (dBuV/m) Date: 2024-05-23 1 5350.00 53.00 54.00 -1.00 39.26 34.83 10.94 32.03 209 60 AVERAGE	Level (dBuV/m) Date: 2024-05-23 1 5320.00 101.66 ----- 87.84 34.84 10.97 31.99 209 60 AVERAGE







		6																																																																																								
Mode		Band Edge																																																																																								
		U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-23 532053485376540454325460 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.87</td><td>60.50</td><td>74.00</td><td>-13.50</td><td>46.76</td><td>34.83</td><td>10.94</td><td>32.03</td><td>229</td><td>167</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.87	60.50	74.00	-13.50	46.76	34.83	10.94	32.03	229	167	PEAK	Level (dBuV/m) Date: 2024-05-23 100022003400460058007000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>102.20</td><td>-----</td><td>-----</td><td>88.38</td><td>34.84</td><td>10.97</td><td>31.99</td><td>229</td><td>167</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	102.20	-----	-----	88.38	34.84	10.97	31.99	229	167	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5350.87	60.50	74.00	-13.50	46.76	34.83	10.94	32.03	229	167	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	102.20	-----	-----	88.38	34.84	10.97	31.99	229	167	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2024-05-23 532053485376540454325460 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>48.48</td><td>54.00</td><td>-5.52</td><td>34.74</td><td>34.83</td><td>10.94</td><td>32.03</td><td>229</td><td>167</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.00	48.48	54.00	-5.52	34.74	34.83	10.94	32.03	229	167	AVERAGE	Level (dBuV/m) Date: 2024-05-23 100022003400460058007000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>95.75</td><td>-----</td><td>-----</td><td>81.93</td><td>34.84</td><td>10.97</td><td>31.99</td><td>229</td><td>167</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	95.75	-----	-----	81.93	34.84	10.97	31.99	229	167	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5350.00	48.48	54.00	-5.52	34.74	34.83	10.94	32.03	229	167	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	95.75	-----	-----	81.93	34.84	10.97	31.99	229	167	AVERAGE																																																																															

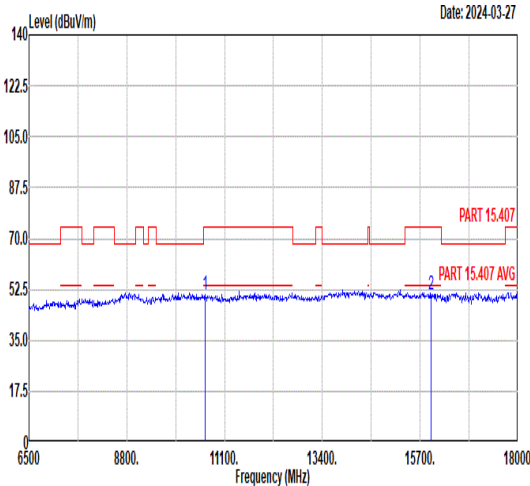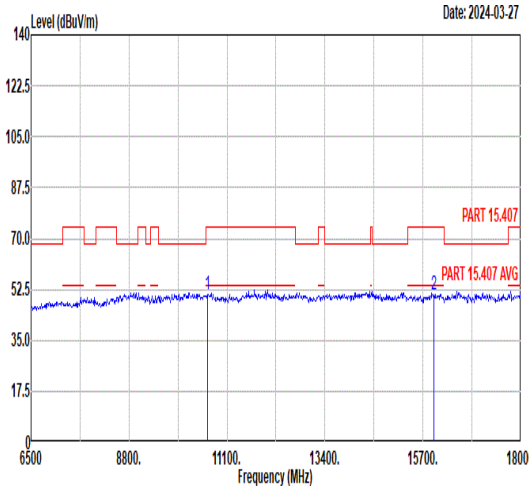

Mode	6																																																																																																																							
	Harmonic																																																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>50.89</td><td>74.00</td><td>-23.11</td><td>47.90</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>50.86</td><td>74.00</td><td>-23.14</td><td>43.36</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10640.00	50.89	74.00	-23.11	47.90	39.47	14.32	50.80	--	--	Peak	2	15960.00	50.86	74.00	-23.14	43.36	42.08	17.19	51.77	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>47.62</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>50.69</td><td>74.00</td><td>-23.31</td><td>43.19</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10640.00	50.61	74.00	-23.39	47.62	39.47	14.32	50.80	--	--	Peak	2	15960.00	50.69	74.00	-23.31	43.19	42.08	17.19	51.77	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10640.00	50.89	74.00	-23.11	47.90	39.47	14.32	50.80	--	--	Peak																																																																																																													
2	15960.00	50.86	74.00	-23.14	43.36	42.08	17.19	51.77	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	10640.00	50.61	74.00	-23.39	47.62	39.47	14.32	50.80	--	--	Peak																																																																																																													
2	15960.00	50.69	74.00	-23.31	43.19	42.08	17.19	51.77	--	--	Peak																																																																																																													

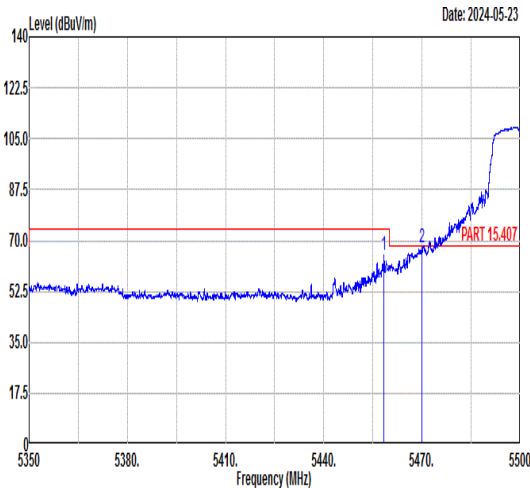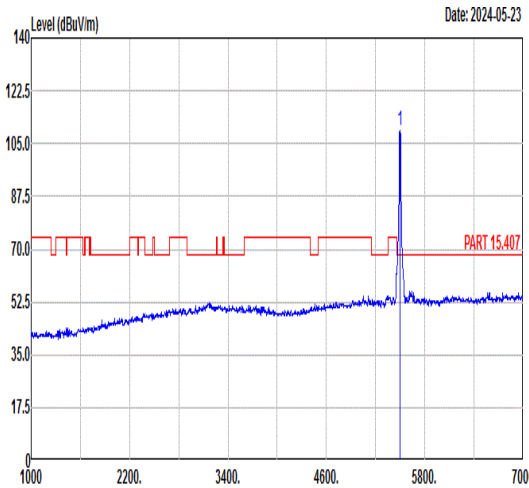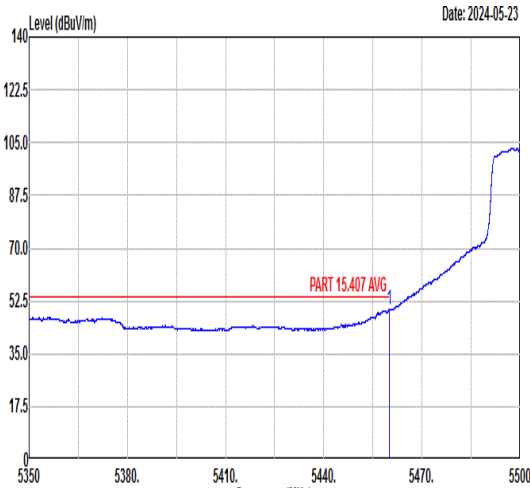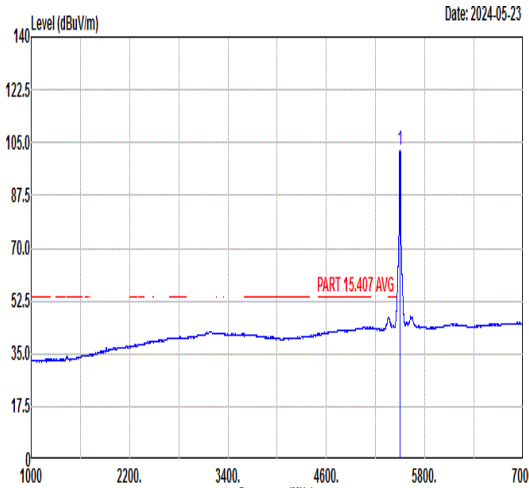

		7																																																																																																								
Mode		Band Edge																																																																																																								
		U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																								
ANT		SISO																																																																																																								
Pol.		Horizontal					Fundamental																																																																																																			
Peak	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.39</td><td>64.91</td><td>74.00</td><td>-9.09</td><td>51.15</td><td>34.81</td><td>11.11</td><td>32.16</td><td>211</td><td>62</td><td>PEAK</td></tr><tr><td>2</td><td>5469.93</td><td>67.46</td><td>68.30</td><td>-0.84</td><td>53.67</td><td>34.81</td><td>11.16</td><td>32.18</td><td>211</td><td>62</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.39	64.91	74.00	-9.09	51.15	34.81	11.11	32.16	211	62	PEAK	2	5469.93	67.46	68.30	-0.84	53.67	34.81	11.16	32.18	211	62	PEAK	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>109.10</td><td>-----</td><td>-----</td><td>95.24</td><td>34.80</td><td>11.27</td><td>32.21</td><td>211</td><td>62</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	109.10	-----	-----	95.24	34.80	11.27	32.21	211	62	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5458.39	64.91	74.00	-9.09	51.15	34.81	11.11	32.16	211	62	PEAK																																																																																															
2	5469.93	67.46	68.30	-0.84	53.67	34.81	11.16	32.18	211	62	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5500.00	109.10	-----	-----	95.24	34.80	11.27	32.21	211	62	PEAK																																																																																															
Avg	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>49.71</td><td>54.00</td><td>-4.29</td><td>35.95</td><td>34.81</td><td>11.12</td><td>32.17</td><td>211</td><td>62</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5460.00	49.71	54.00	-4.29	35.95	34.81	11.12	32.17	211	62	AVERAGE	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>102.60</td><td>-----</td><td>-----</td><td>88.74</td><td>34.80</td><td>11.27</td><td>32.21</td><td>211</td><td>62</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	102.60	-----	-----	88.74	34.80	11.27	32.21	211	62	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5460.00	49.71	54.00	-4.29	35.95	34.81	11.12	32.17	211	62	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5500.00	102.60	-----	-----	88.74	34.80	11.27	32.21	211	62	AVERAGE																																																																																															



		7																																																																				
Mode		Band Edge																																																																				
		U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																				
ANT		SISO																																																																				
Pol.		Vertical					Fundamental																																																															
Peak	Level (dBuV/m) Date: 2024-05-23 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5458.84</td><td>59.78</td><td>74.00</td><td>-14.22</td><td>46.01</td><td>34.81</td><td>11.12</td><td>32.16</td><td>228</td><td>168</td><td>PEAK</td></tr><tr><td>2</td><td>5469.93</td><td>64.14</td><td>68.30</td><td>-4.16</td><td>50.35</td><td>34.81</td><td>11.16</td><td>32.18</td><td>228</td><td>168</td><td>PEAK</td></tr></table> Level (dBuV/m) Date: 2024-05-23 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5500.00</td><td>103.58</td><td>-----</td><td>-----</td><td>89.72</td><td>34.80</td><td>11.27</td><td>32.21</td><td>228</td><td>168</td><td>PEAK</td></tr></table>											MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5458.84	59.78	74.00	-14.22	46.01	34.81	11.12	32.16	228	168	PEAK	2	5469.93	64.14	68.30	-4.16	50.35	34.81	11.16	32.18	228	168	PEAK		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5500.00	103.58	-----	-----	89.72	34.80	11.27	32.21	228	168	PEAK
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																										
1	5458.84	59.78	74.00	-14.22	46.01	34.81	11.12	32.16	228	168	PEAK																																																											
2	5469.93	64.14	68.30	-4.16	50.35	34.81	11.16	32.18	228	168	PEAK																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																											
1	5500.00	103.58	-----	-----	89.72	34.80	11.27	32.21	228	168	PEAK																																																											
Avg	Level (dBuV/m) Date: 2024-05-23 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5460.00</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>32.14</td><td>34.81</td><td>11.12</td><td>32.17</td><td>228</td><td>168</td><td>AVERAGE</td></tr></table> Level (dBuV/m) Date: 2024-05-23 Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5500.00</td><td>97.27</td><td>-----</td><td>-----</td><td>83.41</td><td>34.80</td><td>11.27</td><td>32.21</td><td>228</td><td>168</td><td>AVERAGE</td></tr></table>											MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5460.00	45.90	54.00	-8.10	32.14	34.81	11.12	32.17	228	168	AVERAGE		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5500.00	97.27	-----	-----	83.41	34.80	11.27	32.21	228	168	AVERAGE												
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																										
1	5460.00	45.90	54.00	-8.10	32.14	34.81	11.12	32.17	228	168	AVERAGE																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																											
1	5500.00	97.27	-----	-----	83.41	34.80	11.27	32.21	228	168	AVERAGE																																																											



Mode	7																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-27 11000.00 16500.00 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>56.67</td><td>74.00</td><td>-17.33</td><td>53.53</td><td>39.40</td><td>14.54</td><td>50.80</td><td>138</td><td>360</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>11000.00</td><td>47.44</td><td>54.00</td><td>-6.56</td><td>44.30</td><td>39.40</td><td>14.54</td><td>50.80</td><td>138</td><td>360</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>16500.00</td><td>52.23</td><td>68.30</td><td>-16.07</td><td>44.27</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11000.00	56.67	74.00	-17.33	53.53	39.40	14.54	50.80	138	360	Peak				2	11000.00	47.44	54.00	-6.56	44.30	39.40	14.54	50.80	138	360	Average				3	16500.00	52.23	68.30	-16.07	44.27	42.40	17.36	51.80	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1	11000.00	56.67	74.00	-17.33	53.53	39.40	14.54	50.80	138	360	Peak																																																																																								
2	11000.00	47.44	54.00	-6.56	44.30	39.40	14.54	50.80	138	360	Average																																																																																									
3	16500.00	52.23	68.30	-16.07	44.27	42.40	17.36	51.80	--	--	Peak																																																																																									
Level (dBuV/m) Date: 2024-03-27 11000.00 16500.00 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>52.84</td><td>39.40</td><td>14.54</td><td>50.80</td><td>130</td><td>256</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>11000.00</td><td>46.67</td><td>54.00</td><td>-7.33</td><td>43.53</td><td>39.40</td><td>14.54</td><td>50.80</td><td>130</td><td>256</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>16500.00</td><td>50.94</td><td>68.30</td><td>-17.36</td><td>42.98</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11000.00	55.98	74.00	-18.02	52.84	39.40	14.54	50.80	130	256	Peak				2	11000.00	46.67	54.00	-7.33	43.53	39.40	14.54	50.80	130	256	Average				3	16500.00	50.94	68.30	-17.36	42.98	42.40	17.36	51.80	--	--	Peak				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	11000.00	55.98	74.00	-18.02	52.84	39.40	14.54	50.80	130	256	Peak																																																																																									
2	11000.00	46.67	54.00	-7.33	43.53	39.40	14.54	50.80	130	256	Average																																																																																									
3	16500.00	50.94	68.30	-17.36	42.98	42.40	17.36	51.80	--	--	Peak																																																																																									



		8																																																																																																							
Mode		Band Edge - L																																																																																																							
		U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																							
ANT		SISO																																																																																																							
Pol.		Horizontal					Fundamental																																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-28 Frequency (MHz)					Level (dBuV/m) Date: 2024-05-28 Frequency (MHz)																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5431.56</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>43.99</td><td>34.81</td><td>11.00</td><td>32.13</td><td>203</td><td>66</td><td>PEAK</td></tr><tr><td>2</td><td>5469.97</td><td>54.52</td><td>68.30</td><td>-13.78</td><td>40.73</td><td>34.81</td><td>11.16</td><td>32.18</td><td>203</td><td>66</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5431.56	57.67	74.00	-16.33	43.99	34.81	11.00	32.13	203	66	PEAK	2	5469.97	54.52	68.30	-13.78	40.73	34.81	11.16	32.18	203	66	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>115.08</td><td>-----</td><td>-----</td><td>100.84</td><td>34.91</td><td>11.60</td><td>32.27</td><td>203</td><td>66</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5580.00	115.08	-----	-----	100.84	34.91	11.60	32.27	203	66
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5431.56	57.67	74.00	-16.33	43.99	34.81	11.00	32.13	203	66	PEAK																																																																																														
2	5469.97	54.52	68.30	-13.78	40.73	34.81	11.16	32.18	203	66	PEAK																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5580.00	115.08	-----	-----	100.84	34.91	11.60	32.27	203	66	PEAK																																																																																														
Avg	Level (dBuV/m) Date: 2024-05-28 Frequency (MHz)					Level (dBuV/m) Date: 2024-05-28 Frequency (MHz)																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5452.26</td><td>48.62</td><td>54.00</td><td>-5.38</td><td>34.88</td><td>34.81</td><td>11.09</td><td>32.16</td><td>203</td><td>66</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5452.26	48.62	54.00	-5.38	34.88	34.81	11.09	32.16	203	66	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>107.38</td><td>-----</td><td>-----</td><td>93.12</td><td>34.91</td><td>11.62</td><td>32.27</td><td>203</td><td>66</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5580.00	107.38	-----	-----	93.12	34.91	11.62	32.27	203	66	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5452.26	48.62	54.00	-5.38	34.88	34.81	11.09	32.16	203	66	AVERAGE																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5580.00	107.38	-----	-----	93.12	34.91	11.62	32.27	203	66	AVERAGE																																																																																														






		8																																																																																																								
Mode		Band Edge - L																																																																																																								
		U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																								
ANT		SISO																																																																																																								
Pol.		Vertical					Fundamental																																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-28 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5453.85</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>40.72</td><td>34.81</td><td>11.09</td><td>32.16</td><td>215</td><td>177</td><td>PEAK</td></tr><tr><td>2</td><td>5468.13</td><td>53.25</td><td>68.30</td><td>-15.05</td><td>39.47</td><td>34.81</td><td>11.15</td><td>32.18</td><td>215</td><td>177</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5453.85	54.46	74.00	-19.54	40.72	34.81	11.09	32.16	215	177	PEAK	2	5468.13	53.25	68.30	-15.05	39.47	34.81	11.15	32.18	215	177	PEAK	Level (dBuV/m) Date: 2024-05-28 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>110.72</td><td>-----</td><td>-----</td><td>96.48</td><td>34.91</td><td>11.60</td><td>32.27</td><td>215</td><td>177</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5580.00	110.72	-----	-----	96.48	34.91	11.60	32.27	215	177	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5453.85	54.46	74.00	-19.54	40.72	34.81	11.09	32.16	215	177	PEAK																																																																																															
2	5468.13	53.25	68.30	-15.05	39.47	34.81	11.15	32.18	215	177	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5580.00	110.72	-----	-----	96.48	34.91	11.60	32.27	215	177	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2024-05-28 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5452.93</td><td>46.05</td><td>54.00</td><td>-7.95</td><td>32.31</td><td>34.81</td><td>11.09</td><td>32.16</td><td>215</td><td>177</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5452.93	46.05	54.00	-7.95	32.31	34.81	11.09	32.16	215	177	AVERAGE	Level (dBuV/m) Date: 2024-05-28 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5580.00</td><td>103.76</td><td>-----</td><td>-----</td><td>89.50</td><td>34.91</td><td>11.62</td><td>32.27</td><td>215</td><td>177</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5580.00	103.76	-----	-----	89.50	34.91	11.62	32.27	215	177	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5452.93	46.05	54.00	-7.95	32.31	34.81	11.09	32.16	215	177	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5580.00	103.76	-----	-----	89.50	34.91	11.62	32.27	215	177	AVERAGE																																																																																															






Mode	8																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-29 11160.00 59.93 74.00 -14.07 56.53 39.53 14.64 50.77 105 65 Peak <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>59.93</td><td>74.00</td><td>-14.07</td><td>56.53</td><td>39.53</td><td>14.64</td><td>50.77</td><td>105</td><td>65</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>11160.00</td><td>49.83</td><td>54.00</td><td>-4.17</td><td>46.43</td><td>39.53</td><td>14.64</td><td>50.77</td><td>105</td><td>65</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>16740.00</td><td>49.18</td><td>68.30</td><td>-19.12</td><td>41.05</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11160.00	59.93	74.00	-14.07	56.53	39.53	14.64	50.77	105	65	Peak				2	11160.00	49.83	54.00	-4.17	46.43	39.53	14.64	50.77	105	65	Average				3	16740.00	49.18	68.30	-19.12	41.05	42.45	17.43	51.75	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1	11160.00	59.93	74.00	-14.07	56.53	39.53	14.64	50.77	105	65	Peak																																																																																								
2	11160.00	49.83	54.00	-4.17	46.43	39.53	14.64	50.77	105	65	Average																																																																																									
3	16740.00	49.18	68.30	-19.12	41.05	42.45	17.43	51.75	--	--	Peak																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-03-29 11160.00 59.06 74.00 -14.94 55.66 39.53 14.64 50.77 105 171 Peak <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>59.06</td><td>74.00</td><td>-14.94</td><td>55.66</td><td>39.53</td><td>14.64</td><td>50.77</td><td>105</td><td>171</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>11160.00</td><td>48.12</td><td>54.00</td><td>-5.88</td><td>44.72</td><td>39.53</td><td>14.64</td><td>50.77</td><td>105</td><td>171</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>16740.00</td><td>49.49</td><td>68.30</td><td>-18.81</td><td>41.36</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11160.00	59.06	74.00	-14.94	55.66	39.53	14.64	50.77	105	171	Peak				2	11160.00	48.12	54.00	-5.88	44.72	39.53	14.64	50.77	105	171	Average				3	16740.00	49.49	68.30	-18.81	41.36	42.45	17.43	51.75	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1	11160.00	59.06	74.00	-14.94	55.66	39.53	14.64	50.77	105	171	Peak																																																																																								
2	11160.00	48.12	54.00	-5.88	44.72	39.53	14.64	50.77	105	171	Average																																																																																									
3	16740.00	49.49	68.30	-18.81	41.36	42.45	17.43	51.75	--	--	Peak																																																																																									

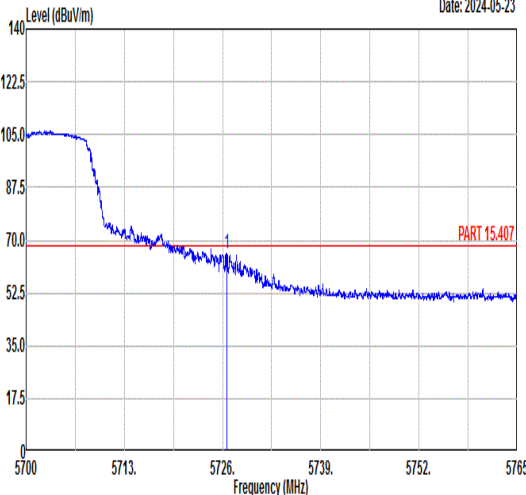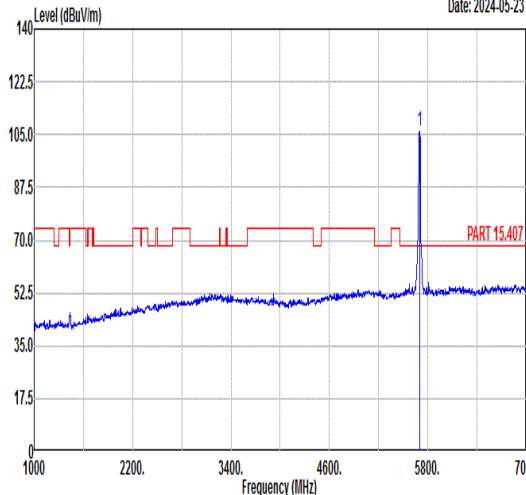
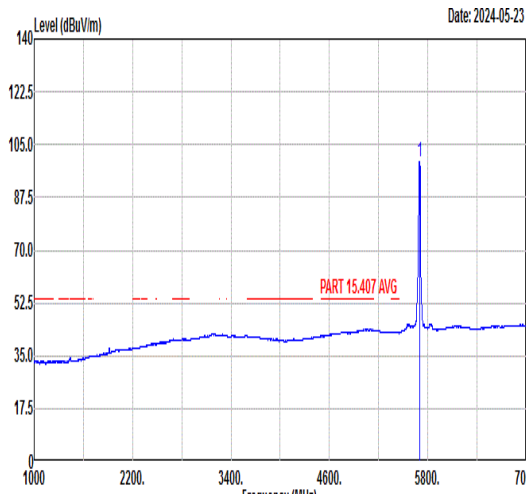


Mode	9																																																																																															
	Band Edge																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																															
ANT	SISO																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue line representing the spectrum, with a red horizontal line at 70.0 dBuV/m labeled 'PART 15.407'. A peak is visible at 5726.62 MHz. The date is 2024-05-23. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5726.62</td><td>65.44</td><td>68.30</td><td>-2.86</td><td>51.06</td><td>35.12</td><td>11.65</td><td>32.39</td><td>200</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5726.62	65.44	68.30	-2.86	51.06	35.12	11.65	32.39	200	65	PEAK	 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue line representing the spectrum, with a red horizontal line at 70.0 dBuV/m labeled 'PART 15.407'. A peak is visible at 5700.00 MHz. The date is 2024-05-23. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5700.00</td><td>106.31</td><td>-----</td><td>-----</td><td>91.94</td><td>35.08</td><td>11.66</td><td>32.37</td><td>200</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	106.31	-----	-----	91.94	35.08	11.66	32.37	200	65	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5726.62	65.44	68.30	-2.86	51.06	35.12	11.65	32.39	200	65	PEAK																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	106.31	-----	-----	91.94	35.08	11.66	32.37	200	65	PEAK																																																																																					
Avg	Blank						 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, Average. The plot shows a blue line representing the spectrum, with a red horizontal line at 52.5 dBuV/m labeled 'PART 15.407 AVG'. A peak is visible at 5700.00 MHz. The date is 2024-05-23. <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5700.00</td><td>99.47</td><td>-----</td><td>-----</td><td>85.09</td><td>35.07</td><td>11.67</td><td>32.36</td><td>200</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	99.47	-----	-----	85.09	35.07	11.67	32.36	200	65	AVERAGE																																										
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5700.00	99.47	-----	-----	85.09	35.07	11.67	32.36	200	65	AVERAGE																																																																																					

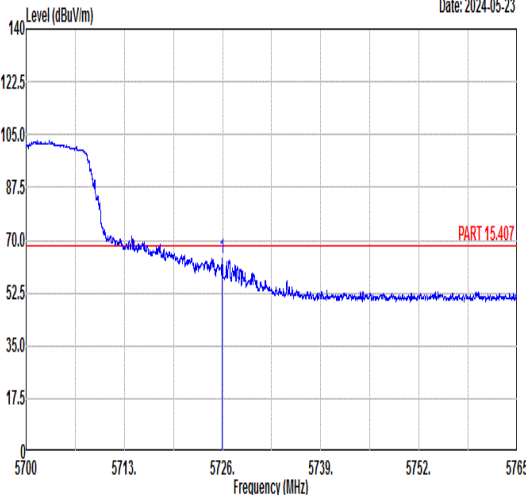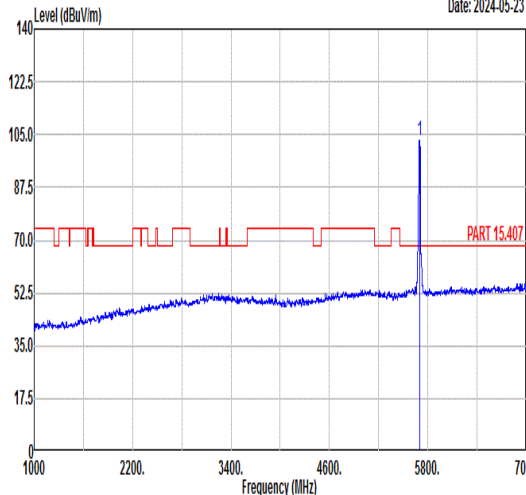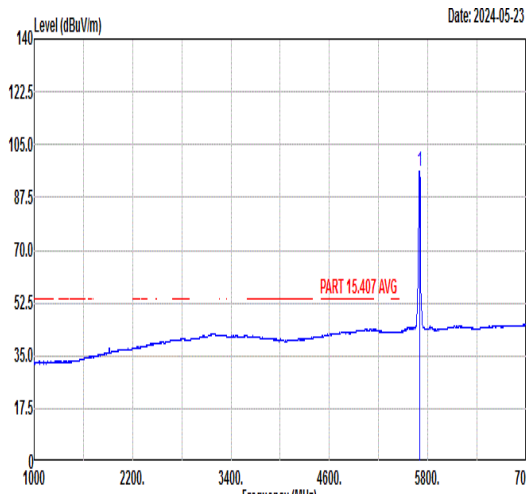

Mode	9																																																																																													
	Band Edge																																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																													
ANT	SISO																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5725.97</td><td>63.70</td><td>68.30</td><td>-4.60</td><td>49.32</td><td>35.12</td><td>11.65</td><td>32.39</td><td>226</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1	5725.97	63.70	68.30	-4.60	49.32	35.12	11.65	32.39	226	168	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5700.00</td><td>102.82</td><td>-----</td><td>-----</td><td>88.45</td><td>35.08</td><td>11.66</td><td>32.37</td><td>226</td><td>168</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	102.82	-----	-----	88.45	35.08	11.66	32.37	226	168
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5725.97	63.70	68.30	-4.60	49.32	35.12	11.65	32.39	226	168	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5700.00	102.82	-----	-----	88.45	35.08	11.66	32.37	226	168	PEAK																																																																																			
Avg	Blank																																																																																													
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5700.00</td><td>96.28</td><td>-----</td><td>-----</td><td>81.90</td><td>35.07</td><td>11.67</td><td>32.36</td><td>226</td><td>168</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5700.00	96.28	-----	-----	81.90	35.07	11.67	32.36	226	168	AVERAGE																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5700.00	96.28	-----	-----	81.90	35.07	11.67	32.36	226	168	AVERAGE																																																																																			



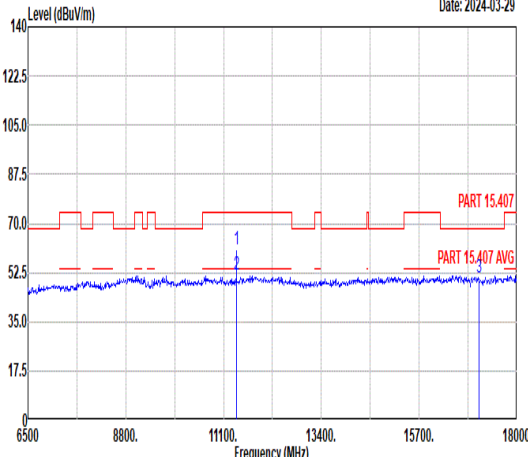
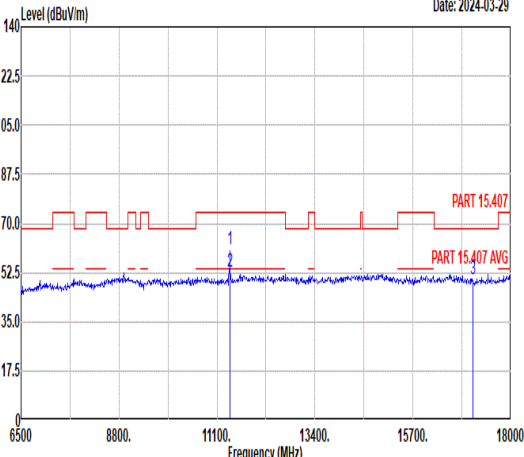


Mode	9																																																																																																		
	Harmonic																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																		
ANT	SISO																																																																																																		
Pol.	Horizontal																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2024-03-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>11400.00</td><td>60.73</td><td>74.00</td><td>-13.27</td><td>56.95</td><td>39.72</td><td>14.78</td><td>50.72</td><td>258</td><td>50</td><td>Peak</td><td colspan="3"></td></tr><tr><td>2</td><td>11400.00</td><td>51.71</td><td>54.00</td><td>-2.29</td><td>47.93</td><td>39.72</td><td>14.78</td><td>50.72</td><td>258</td><td>50</td><td>Average</td><td colspan="3"></td></tr><tr><td>3</td><td>17100.00</td><td>50.91</td><td>68.30</td><td>-17.39</td><td>42.72</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td><td colspan="3"></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11400.00	60.73	74.00	-13.27	56.95	39.72	14.78	50.72	258	50	Peak				2	11400.00	51.71	54.00	-2.29	47.93	39.72	14.78	50.72	258	50	Average				3	17100.00	50.91	68.30	-17.39	42.72	42.46	17.53	51.80	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11400.00	60.73	74.00	-13.27	56.95	39.72	14.78	50.72	258	50	Peak																																																																																								
2	11400.00	51.71	54.00	-2.29	47.93	39.72	14.78	50.72	258	50	Average																																																																																								
3	17100.00	50.91	68.30	-17.39	42.72	42.46	17.53	51.80	--	--	Peak																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-03-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>11400.00</td><td>60.93</td><td>74.00</td><td>-13.07</td><td>57.15</td><td>39.72</td><td>14.78</td><td>50.72</td><td>139</td><td>360</td><td>Peak</td><td colspan="3"></td></tr><tr><td>2</td><td>11400.00</td><td>52.74</td><td>54.00</td><td>-1.26</td><td>48.96</td><td>39.72</td><td>14.78</td><td>50.72</td><td>139</td><td>360</td><td>Average</td><td colspan="3"></td></tr><tr><td>3</td><td>17100.00</td><td>50.09</td><td>68.30</td><td>-18.21</td><td>41.90</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td><td colspan="3"></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11400.00	60.93	74.00	-13.07	57.15	39.72	14.78	50.72	139	360	Peak				2	11400.00	52.74	54.00	-1.26	48.96	39.72	14.78	50.72	139	360	Average				3	17100.00	50.09	68.30	-18.21	41.90	42.46	17.53	51.80	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	11400.00	60.93	74.00	-13.07	57.15	39.72	14.78	50.72	139	360	Peak																																																																																								
2	11400.00	52.74	54.00	-1.26	48.96	39.72	14.78	50.72	139	360	Average																																																																																								
3	17100.00	50.09	68.30	-18.21	41.90	42.46	17.53	51.80	--	--	Peak																																																																																								





		10																																																																																													
Mode		Band Edge																																																																																													
		U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																													
ANT		SISO																																																																																													
Pol.		Horizontal					Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5144.81</td><td>64.49</td><td>74.00</td><td>-9.51</td><td>50.30</td><td>34.87</td><td>11.09</td><td>31.77</td><td>207</td><td>60</td><td>PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>106.47</td><td>-----</td><td>-----</td><td>92.34</td><td>34.87</td><td>11.07</td><td>31.81</td><td>207</td><td>60</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5144.81	64.49	74.00	-9.51	50.30	34.87	11.09	31.77	207	60	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	106.47	-----	-----	92.34	34.87	11.07	31.81	207	60	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5144.81	64.49	74.00	-9.51	50.30	34.87	11.09	31.77	207	60	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5180.00	106.47	-----	-----	92.34	34.87	11.07	31.81	207	60	PEAK																																																																																				
Avg	Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.96</td><td>53.37</td><td>54.00</td><td>-0.63</td><td>39.19</td><td>34.87</td><td>11.09</td><td>31.78</td><td>207</td><td>60</td><td>AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>100.26</td><td>-----</td><td>-----</td><td>86.15</td><td>34.86</td><td>11.07</td><td>31.82</td><td>207</td><td>60</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.96	53.37	54.00	-0.63	39.19	34.87	11.09	31.78	207	60	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	100.26	-----	-----	86.15	34.86	11.07	31.82	207	60	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5149.96	53.37	54.00	-0.63	39.19	34.87	11.09	31.78	207	60	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5180.00	100.26	-----	-----	86.15	34.86	11.07	31.82	207	60	AVERAGE																																																																																				

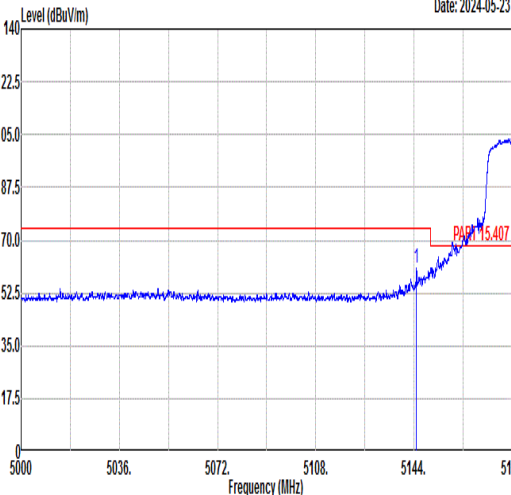
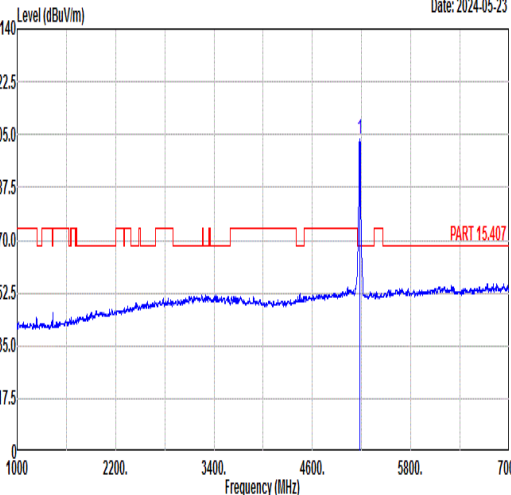
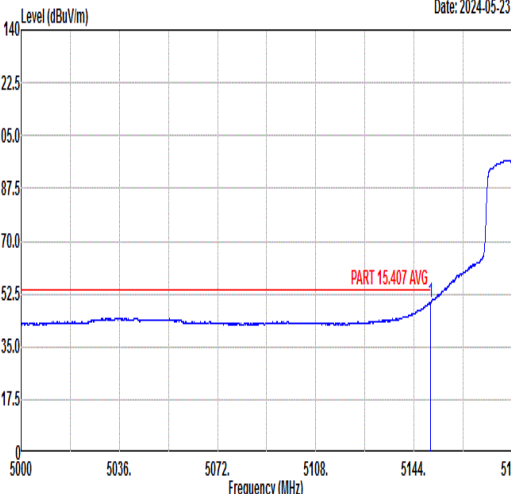
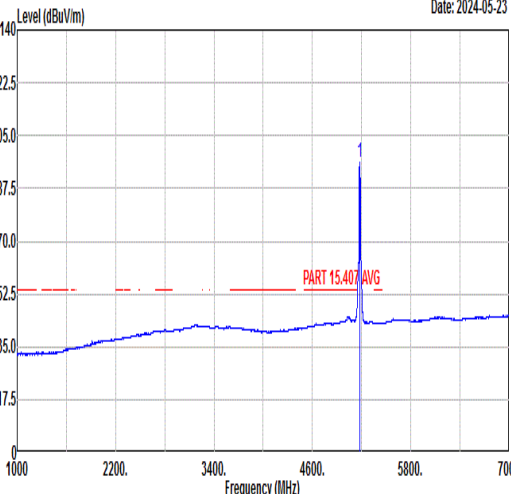


Mode	10																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	 Date: 2024-05-23						 Date: 2024-05-23																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.81</td><td>60.62</td><td>74.00</td><td>-13.38</td><td>46.43</td><td>34.87</td><td>11.09</td><td>31.77</td><td>237</td><td>164</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5144.81	60.62	74.00	-13.38	46.43	34.87	11.09	31.77	237	164	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>103.62</td><td>-----</td><td>-----</td><td>89.51</td><td>34.86</td><td>11.07</td><td>31.82</td><td>237</td><td>164</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	103.62	-----	-----	89.51	34.86	11.07	31.82	237	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5144.81	60.62	74.00	-13.38	46.43	34.87	11.09	31.77	237	164	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	103.62	-----	-----	89.51	34.86	11.07	31.82	237	164	PEAK																																																																																
Avg	 Date: 2024-05-23						 Date: 2024-05-23																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.96</td><td>49.68</td><td>54.00</td><td>-4.32</td><td>35.50</td><td>34.87</td><td>11.09</td><td>31.78</td><td>237</td><td>164</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.96	49.68	54.00	-4.32	35.50	34.87	11.09	31.78	237	164	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>96.33</td><td>-----</td><td>-----</td><td>82.20</td><td>34.87</td><td>11.07</td><td>31.81</td><td>237</td><td>164</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	96.33	-----	-----	82.20	34.87	11.07	31.81	237	164
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.96	49.68	54.00	-4.32	35.50	34.87	11.09	31.78	237	164	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	96.33	-----	-----	82.20	34.87	11.07	31.81	237	164	AVERAGE																																																																																

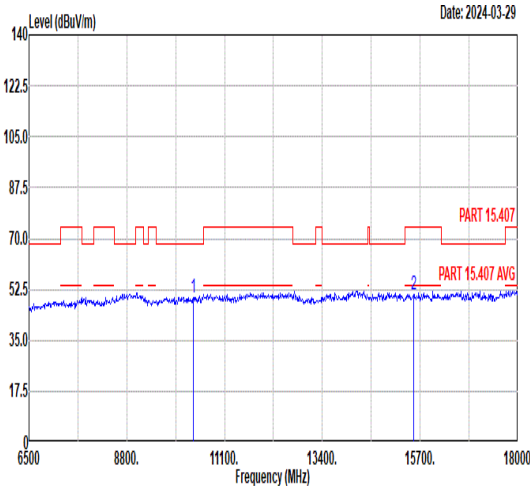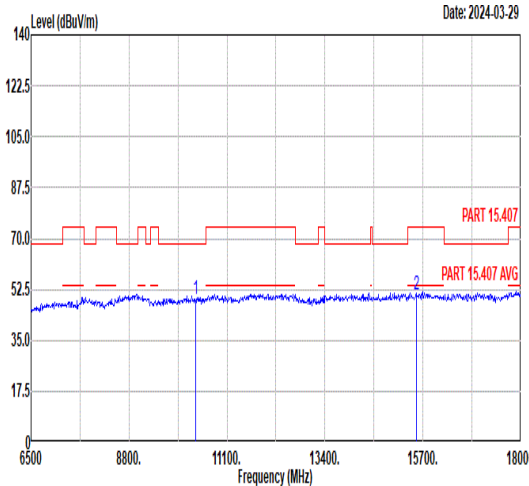

Mode	10																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal					Vertical																																																																																														
Peak Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td></tr><tr><td>1</td><td>10360.00</td><td>49.49</td><td>68.30</td><td>-18.81</td><td>46.67</td><td>39.44</td><td>14.15</td><td>50.77 -- -- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>50.85</td><td>74.00</td><td>-23.15</td><td>43.61</td><td>41.82</td><td>16.85</td><td>51.43 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	49.49	68.30	-18.81	46.67	39.44	14.15	50.77 -- -- Peak	2	15540.00	50.85	74.00	-23.15	43.61	41.82	16.85	51.43 -- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td></tr><tr><td>1</td><td>10360.00</td><td>49.22</td><td>68.30</td><td>-19.08</td><td>46.40</td><td>39.44</td><td>14.15</td><td>50.77 -- -- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>50.85</td><td>74.00</td><td>-23.15</td><td>43.61</td><td>41.82</td><td>16.85</td><td>51.43 -- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	49.22	68.30	-19.08	46.40	39.44	14.15	50.77 -- -- Peak	2	15540.00	50.85	74.00	-23.15	43.61	41.82	16.85	51.43 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	10360.00	49.49	68.30	-18.81	46.67	39.44	14.15	50.77 -- -- Peak																																																																																												
2	15540.00	50.85	74.00	-23.15	43.61	41.82	16.85	51.43 -- -- Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																												
1	10360.00	49.22	68.30	-19.08	46.40	39.44	14.15	50.77 -- -- Peak																																																																																												
2	15540.00	50.85	74.00	-23.15	43.61	41.82	16.85	51.43 -- -- Peak																																																																																												

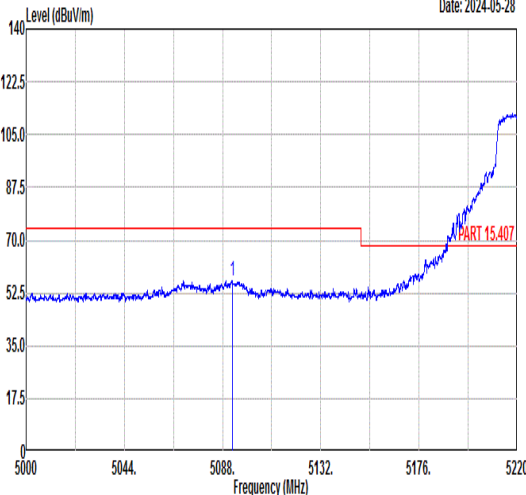
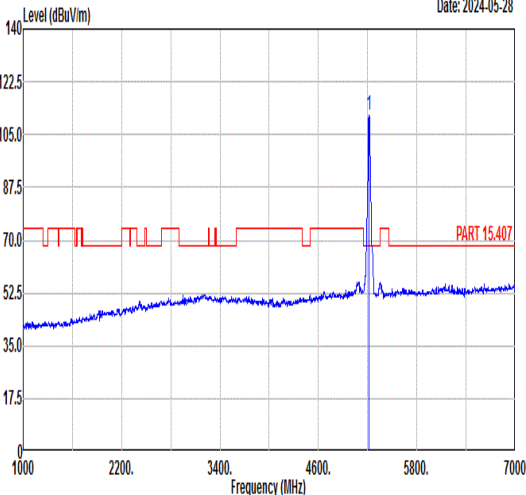
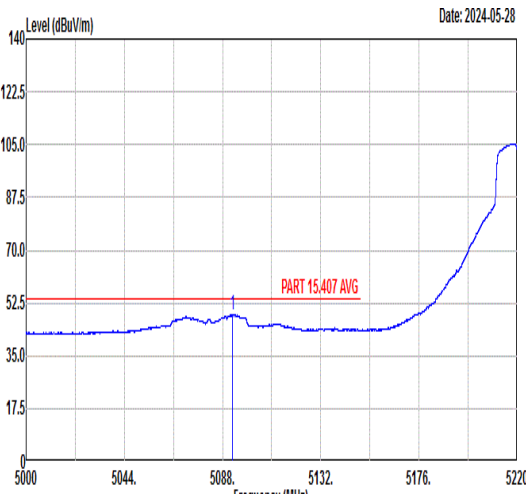
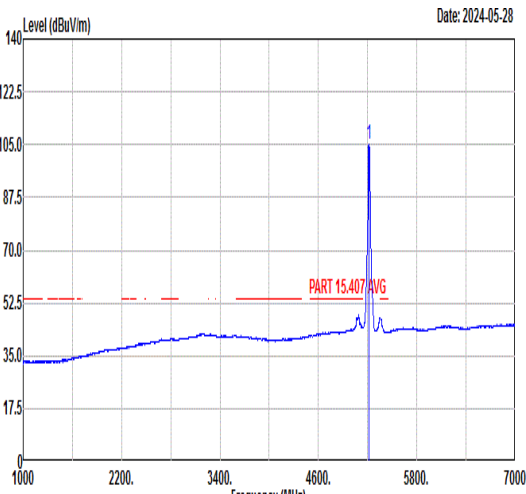


Mode	11																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5092.31</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>42.50</td><td>34.88</td><td>11.12</td><td>31.71</td><td>398</td><td>268</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5092.31	56.79	74.00	-17.21	42.50	34.88	11.12	31.71	398	268	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>111.48</td><td>-----</td><td>-----</td><td>97.43</td><td>34.86</td><td>11.05</td><td>31.86</td><td>398</td><td>268</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	111.48	-----	-----	97.43	34.86	11.05	31.86	398	268
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5092.31	56.79	74.00	-17.21	42.50	34.88	11.12	31.71	398	268	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5220.00	111.48	-----	-----	97.43	34.86	11.05	31.86	398	268	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5092.31</td><td>48.65</td><td>54.00</td><td>-5.35</td><td>34.36</td><td>34.88</td><td>11.12</td><td>31.71</td><td>398</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5092.31	48.65	54.00	-5.35	34.36	34.88	11.12	31.71	398	268	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>105.12</td><td>-----</td><td>-----</td><td>91.07</td><td>34.86</td><td>11.05</td><td>31.86</td><td>398</td><td>268</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	105.12	-----	-----	91.07	34.86	11.05	31.86	398	268
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5092.31	48.65	54.00	-5.35	34.36	34.88	11.12	31.71	398	268	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5220.00	105.12	-----	-----	91.07	34.86	11.05	31.86	398	268	AVERAGE																																																																																



Mode	11										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz										
ANT	SISO										
Pol.	Horizontal										Fundamental
Peak	<										

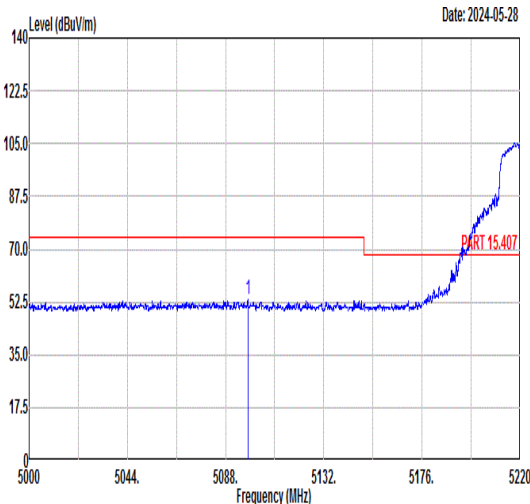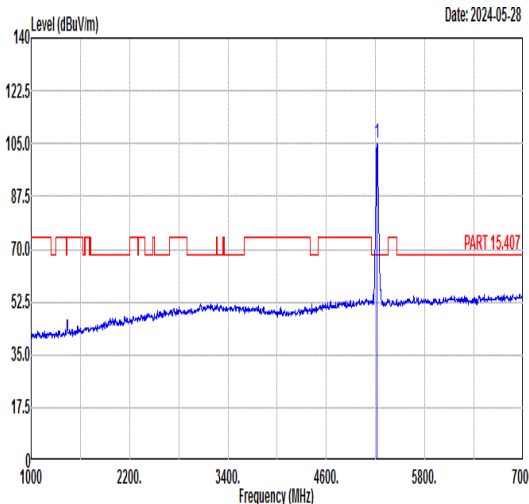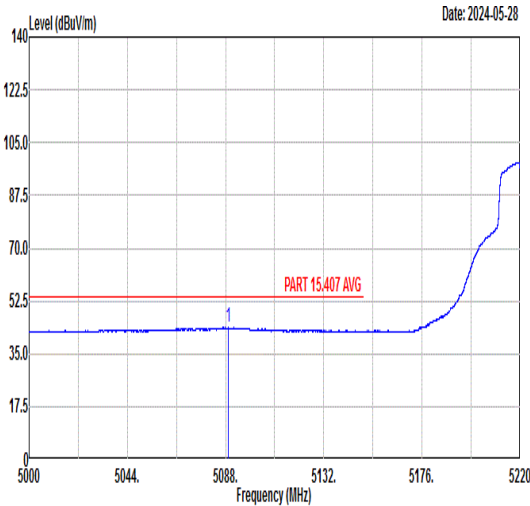
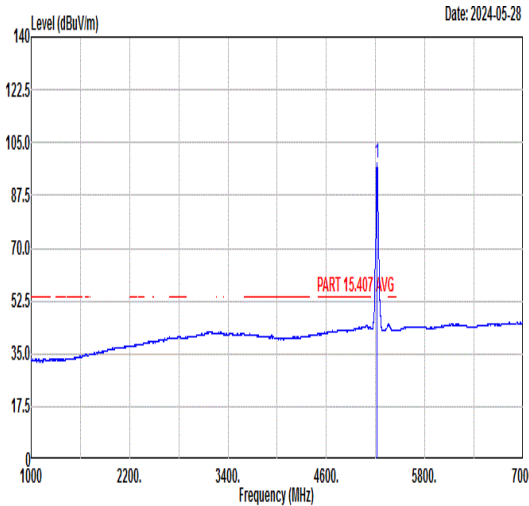


		11																																																																																
Mode		Band Edge - L																																																																																
		U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																
ANT		SISO																																																																																
Pol.		Vertical					Fundamental																																																																											
Peak																																																																																		
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5098.01	53.21	74.00	-20.79	38.94	34.88	11.11	31.72	375	0 PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	105.11	-----	-----	91.08	34.86	11.04	31.87	375	0 PEAK				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5098.01	53.21	74.00	-20.79	38.94	34.88	11.11	31.72	375	0 PEAK																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5220.00	105.11	-----	-----	91.08	34.86	11.04	31.87	375	0 PEAK																																																																								
Avg																																																																																		
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5089.21	43.73	54.00	-10.27	29.44	34.88	11.12	31.71	375	0 AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5220.00	98.28	-----	-----	84.23	34.86	11.05	31.86	375	0 AVERAGE				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5089.21	43.73	54.00	-10.27	29.44	34.88	11.12	31.71	375	0 AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5220.00	98.28	-----	-----	84.23	34.86	11.05	31.86	375	0 AVERAGE																																																																								





Mode	11																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																					
ANT	SISO																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2024-03-29 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>50.11</td><td>68.30</td><td>-18.19</td><td>47.22</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>42.68</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	50.11	68.30	-18.19	47.22	39.48	14.20	50.79	--	Peak	2	15660.00	49.99	74.00	-24.01	42.68	41.90	16.94	51.53	--	Peak	Level (dBuV/m) Date: 2024-03-29 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>49.61</td><td>68.30</td><td>-18.69</td><td>46.72</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>49.29</td><td>74.00</td><td>-24.71</td><td>41.98</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	49.61	68.30	-18.69	46.72	39.48	14.20	50.79	--	Peak	2	15660.00	49.29	74.00	-24.71	41.98	41.90	16.94	51.53	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10440.00	50.11	68.30	-18.19	47.22	39.48	14.20	50.79	--	Peak																																																																																												
2	15660.00	49.99	74.00	-24.01	42.68	41.90	16.94	51.53	--	Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10440.00	49.61	68.30	-18.69	46.72	39.48	14.20	50.79	--	Peak																																																																																												
2	15660.00	49.29	74.00	-24.71	41.98	41.90	16.94	51.53	--	Peak																																																																																												

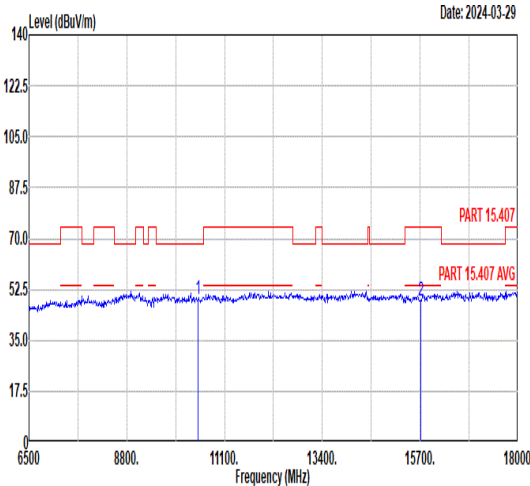
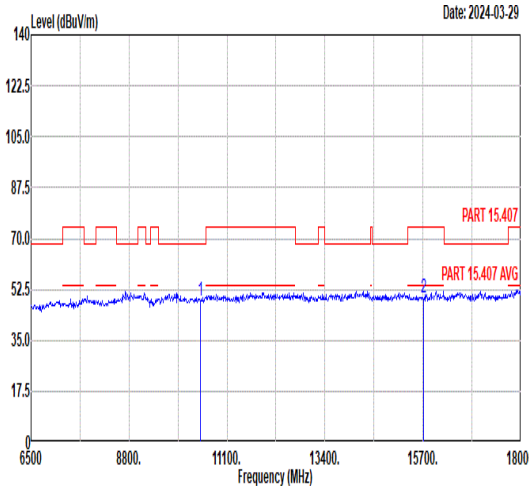


Mode	12																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11n_HT20_CH48_5240MHz																																																																																																					
ANT	SISO																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 10480.00</td><td>49.29</td><td>68.30</td><td>-19.01</td><td>46.37</td><td>39.49</td><td>14.23</td><td>50.80</td><td>-- -- Peak</td></tr><tr><td>2 15720.00</td><td>48.84</td><td>74.00</td><td>-25.16</td><td>41.50</td><td>41.93</td><td>16.99</td><td>51.58</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10480.00	49.29	68.30	-19.01	46.37	39.49	14.23	50.80	-- -- Peak	2 15720.00	48.84	74.00	-25.16	41.50	41.93	16.99	51.58	-- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 10480.00</td><td>48.69</td><td>68.30</td><td>-19.61</td><td>45.77</td><td>39.49</td><td>14.23</td><td>50.80</td><td>-- -- Peak</td></tr><tr><td>2 15720.00</td><td>49.60</td><td>74.00</td><td>-24.40</td><td>42.26</td><td>41.93</td><td>16.99</td><td>51.58</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10480.00	48.69	68.30	-19.61	45.77	39.49	14.23	50.80	-- -- Peak	2 15720.00	49.60	74.00	-24.40	42.26	41.93	16.99	51.58	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10480.00	49.29	68.30	-19.01	46.37	39.49	14.23	50.80	-- -- Peak																																																																																														
2 15720.00	48.84	74.00	-25.16	41.50	41.93	16.99	51.58	-- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10480.00	48.69	68.30	-19.61	45.77	39.49	14.23	50.80	-- -- Peak																																																																																														
2 15720.00	49.60	74.00	-24.40	42.26	41.93	16.99	51.58	-- -- Peak																																																																																														



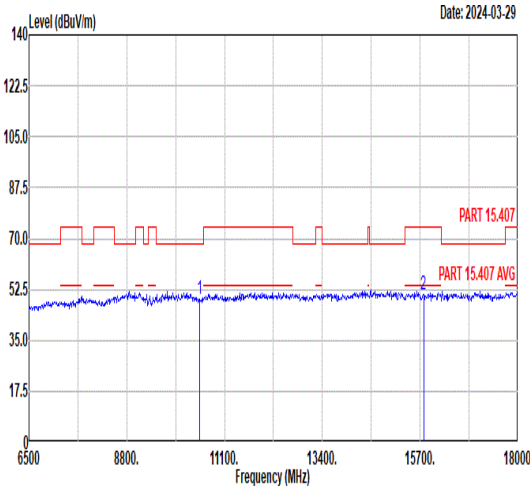
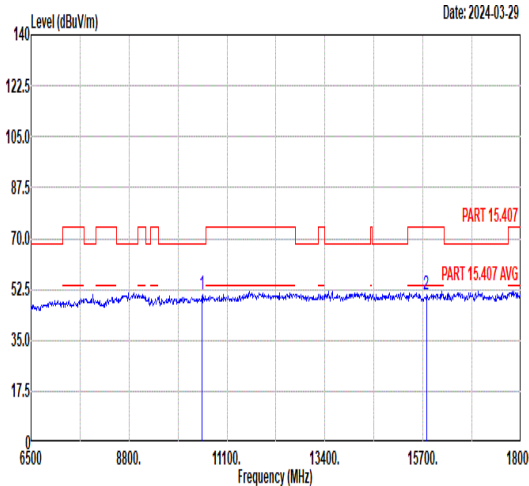


Mode	13																																																																																																									
	Harmonic																																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5280MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10520.00</td><td>49.34</td><td>68.30 -18.96</td><td>46.39</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15780.00</td><td>50.98</td><td>74.00 -23.02</td><td>43.60</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	49.34	68.30 -18.96	46.39	39.50	14.25	50.80	--	--	Peak	2 15780.00	50.98	74.00 -23.02	43.60	41.97	17.04	51.63	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10520.00</td><td>50.97</td><td>68.30 -17.33</td><td>48.02</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15780.00</td><td>50.83</td><td>74.00 -23.17</td><td>43.45</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	50.97	68.30 -17.33	48.02	39.50	14.25	50.80	--	--	Peak	2 15780.00	50.83	74.00 -23.17	43.45	41.97	17.04	51.63	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 10520.00	49.34	68.30 -18.96	46.39	39.50	14.25	50.80	--	--	Peak																																																																																																	
2 15780.00	50.98	74.00 -23.02	43.60	41.97	17.04	51.63	--	--	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1 10520.00	50.97	68.30 -17.33	48.02	39.50	14.25	50.80	--	--	Peak																																																																																																	
2 15780.00	50.83	74.00 -23.17	43.45	41.97	17.04	51.63	--	--	Peak																																																																																																	



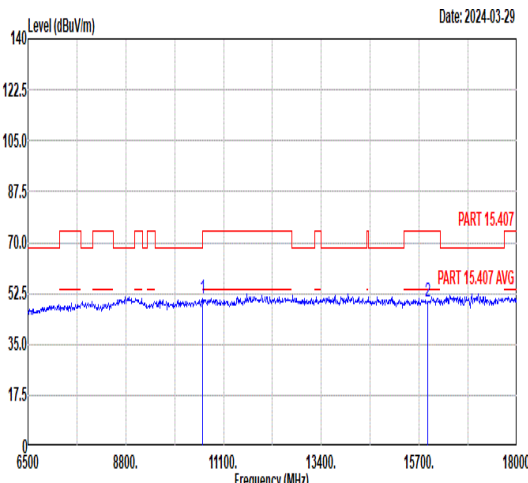
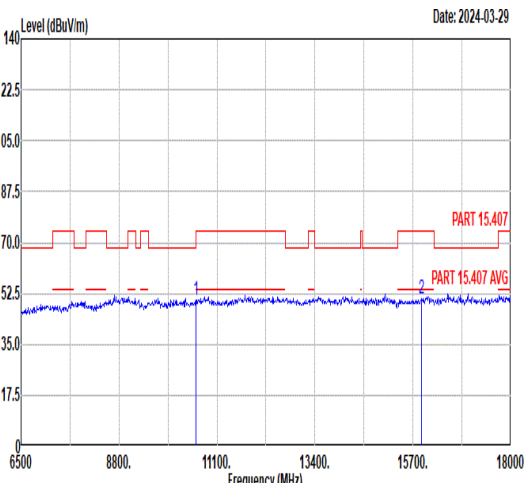


Mode	14																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																					
ANT	SISO																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>50.80</td><td>74.00</td><td>-23.20</td><td>47.82</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>42.36</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	50.80	74.00	-23.20	47.82	39.48	14.30	50.80	--	--	Peak	2	15900.00	49.82	74.00	-24.18	42.36	42.04	17.14	51.72	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10600.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>47.12</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>50.71</td><td>74.00</td><td>-23.29</td><td>43.25</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10600.00	50.10	74.00	-23.90	47.12	39.48	14.30	50.80	--	--	Peak	2	15900.00	50.71	74.00	-23.29	43.25	42.04	17.14	51.72	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10600.00	50.80	74.00	-23.20	47.82	39.48	14.30	50.80	--	--	Peak																																																																																																											
2	15900.00	49.82	74.00	-24.18	42.36	42.04	17.14	51.72	--	--	Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10600.00	50.10	74.00	-23.90	47.12	39.48	14.30	50.80	--	--	Peak																																																																																																											
2	15900.00	50.71	74.00	-23.29	43.25	42.04	17.14	51.72	--	--	Peak																																																																																																											

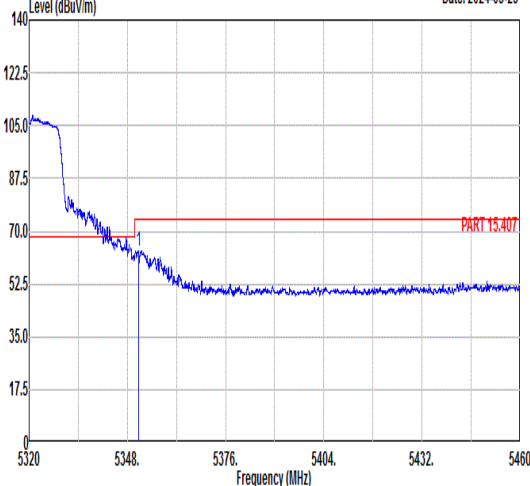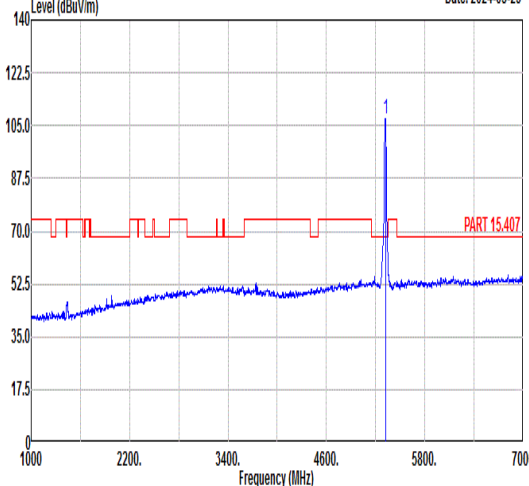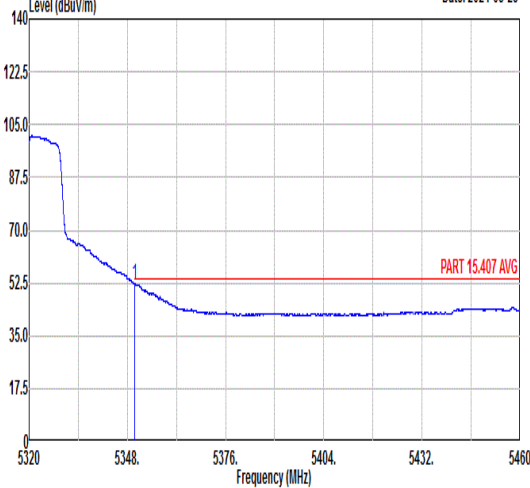
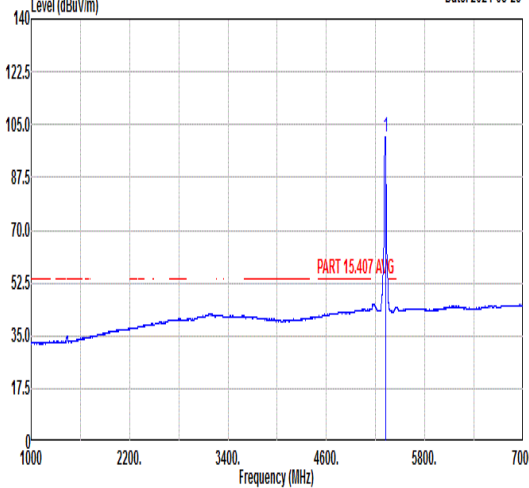


		15																																																																																										
Mode		Band Edge																																																																																										
		U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																										
ANT		SISO																																																																																										
Pol.		Horizontal					Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-05-23  PART 15.407 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.16</td><td>63.55</td><td>74.00</td><td>-10.45</td><td>49.81</td><td>34.83</td><td>10.94</td><td>32.03</td><td>210</td><td>56</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.16	63.55	74.00	-10.45	49.81	34.83	10.94	32.03	210	56	PEAK	Level (dBuV/m) Date: 2024-05-23  PART 15.407 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>107.32</td><td>-----</td><td>-----</td><td>93.50</td><td>34.84</td><td>10.97</td><td>31.99</td><td>210</td><td>56</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	107.32	-----	-----	93.50	34.84	10.97	31.99	210	56	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5351.16	63.55	74.00	-10.45	49.81	34.83	10.94	32.03	210	56	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	107.32	-----	-----	93.50	34.84	10.97	31.99	210	56	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-05-23  PART 15.407 AVG <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>52.19</td><td>54.00</td><td>-1.81</td><td>38.45</td><td>34.83</td><td>10.94</td><td>32.03</td><td>210</td><td>56</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.00	52.19	54.00	-1.81	38.45	34.83	10.94	32.03	210	56	AVERAGE	Level (dBuV/m) Date: 2024-05-23  PART 15.407 AVG <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>100.95</td><td>-----</td><td>-----</td><td>87.13</td><td>34.84</td><td>10.97</td><td>31.99</td><td>210</td><td>56</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	100.95	-----	-----	87.13	34.84	10.97	31.99	210	56	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.00	52.19	54.00	-1.81	38.45	34.83	10.94	32.03	210	56	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	100.95	-----	-----	87.13	34.84	10.97	31.99	210	56	AVERAGE																																																																																	

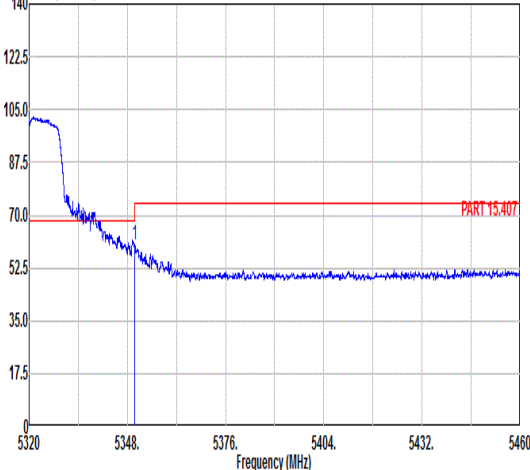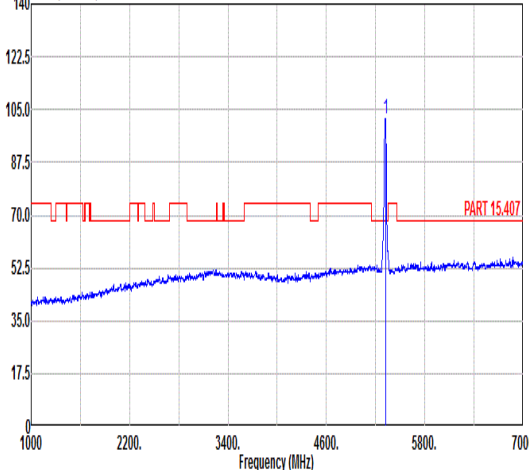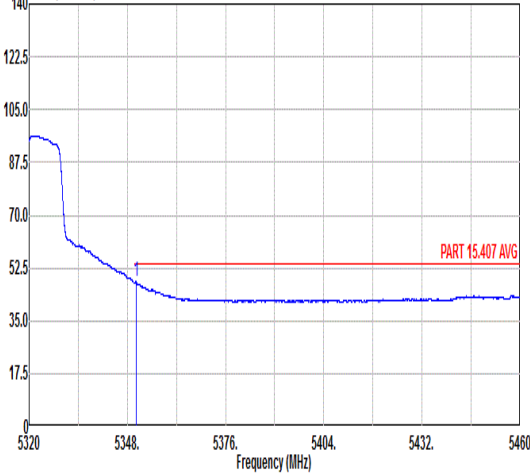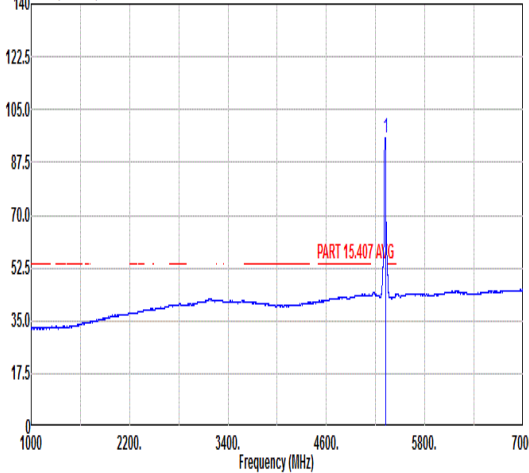

		15																																																																															
Mode		Band Edge																																																																															
		U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																															
ANT		SISO																																																																															
Pol.		Vertical					Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)					Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.17</td><td>60.18</td><td>74.00</td><td>-13.82</td><td>46.44</td><td>34.83</td><td>10.94</td><td>32.03</td><td>231</td><td>167</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.17	60.18	74.00	-13.82	46.44	34.83	10.94	32.03	231	167	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>102.16</td><td>-----</td><td>-----</td><td>88.34</td><td>34.84</td><td>10.97</td><td>31.99</td><td>231</td><td>167</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	102.16	-----	-----	88.34	34.84	10.97	31.99	231	167
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5350.17	60.18	74.00	-13.82	46.44	34.83	10.94	32.03	231	167	PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5320.00	102.16	-----	-----	88.34	34.84	10.97	31.99	231	167	PEAK																																																																						
Avg	Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)					Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.45</td><td>47.84</td><td>54.00</td><td>-6.16</td><td>34.10</td><td>34.83</td><td>10.94</td><td>32.03</td><td>231</td><td>167</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.45	47.84	54.00	-6.16	34.10	34.83	10.94	32.03	231	167	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.88</td><td>-----</td><td>-----</td><td>82.06</td><td>34.84</td><td>10.97</td><td>31.99</td><td>231</td><td>167</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	95.88	-----	-----	82.06	34.84	10.97	31.99	231	167
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5350.45	47.84	54.00	-6.16	34.10	34.83	10.94	32.03	231	167	AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5320.00	95.88	-----	-----	82.06	34.84	10.97	31.99	231	167	AVERAGE																																																																						



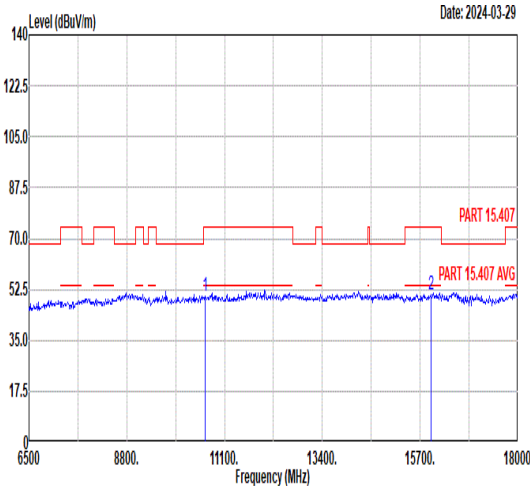
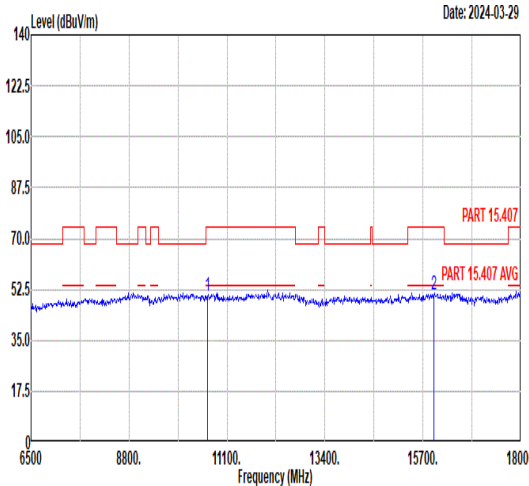


Mode	15																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																																					
ANT	SISO																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>47.00</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>50.78</td><td>74.00</td><td>-23.22</td><td>43.28</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	49.99	74.00	-24.01	47.00	39.47	14.32	50.80	--	--	Peak	2	15960.00	50.78	74.00	-23.22	43.28	42.08	17.19	51.77	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10640.00</td><td>50.16</td><td>74.00</td><td>-23.84</td><td>47.17</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>50.66</td><td>74.00</td><td>-23.34</td><td>43.16</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	50.16	74.00	-23.84	47.17	39.47	14.32	50.80	--	--	Peak	2	15960.00	50.66	74.00	-23.34	43.16	42.08	17.19	51.77	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10640.00	49.99	74.00	-24.01	47.00	39.47	14.32	50.80	--	--	Peak																																																																																																											
2	15960.00	50.78	74.00	-23.22	43.28	42.08	17.19	51.77	--	--	Peak																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	10640.00	50.16	74.00	-23.84	47.17	39.47	14.32	50.80	--	--	Peak																																																																																																											
2	15960.00	50.66	74.00	-23.34	43.16	42.08	17.19	51.77	--	--	Peak																																																																																																											



Mode	16																																																																																																									
	Band Edge																																																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal					Fundamental																																																																																																				
Peak	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5456.59</td><td>60.79</td><td>74.00</td><td>-13.21</td><td>47.03</td><td>34.81</td><td>11.11</td><td>32.16</td><td>210</td><td>62</td><td>PEAK</td></tr><tr><td>2</td><td>5464.68</td><td>67.74</td><td>68.30</td><td>-0.56</td><td>53.96</td><td>34.81</td><td>11.14</td><td>32.17</td><td>210</td><td>62</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5456.59	60.79	74.00	-13.21	47.03	34.81	11.11	32.16	210	62	PEAK	2	5464.68	67.74	68.30	-0.56	53.96	34.81	11.14	32.17	210	62	PEAK	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>108.59</td><td>-----</td><td>-----</td><td>94.73</td><td>34.80</td><td>11.27</td><td>32.21</td><td>210</td><td>62</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	108.59	-----	-----	94.73	34.80	11.27	32.21	210	62	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5456.59	60.79	74.00	-13.21	47.03	34.81	11.11	32.16	210	62	PEAK																																																																																															
2	5464.68	67.74	68.30	-0.56	53.96	34.81	11.14	32.17	210	62	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5500.00	108.59	-----	-----	94.73	34.80	11.27	32.21	210	62	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.89</td><td>49.92</td><td>54.00</td><td>-4.08</td><td>36.16</td><td>34.81</td><td>11.12</td><td>32.17</td><td>210</td><td>62</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.89	49.92	54.00	-4.08	36.16	34.81	11.12	32.17	210	62	AVERAGE	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>101.65</td><td>-----</td><td>-----</td><td>87.79</td><td>34.80</td><td>11.27</td><td>32.21</td><td>210</td><td>62</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	101.65	-----	-----	87.79	34.80	11.27	32.21	210	62	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5459.89	49.92	54.00	-4.08	36.16	34.81	11.12	32.17	210	62	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5500.00	101.65	-----	-----	87.79	34.80	11.27	32.21	210	62	AVERAGE																																																																																															

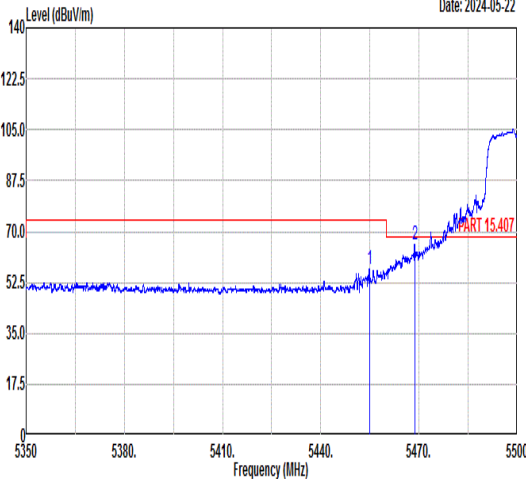
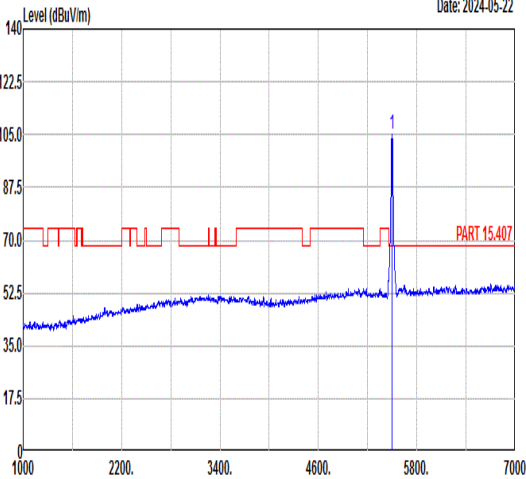
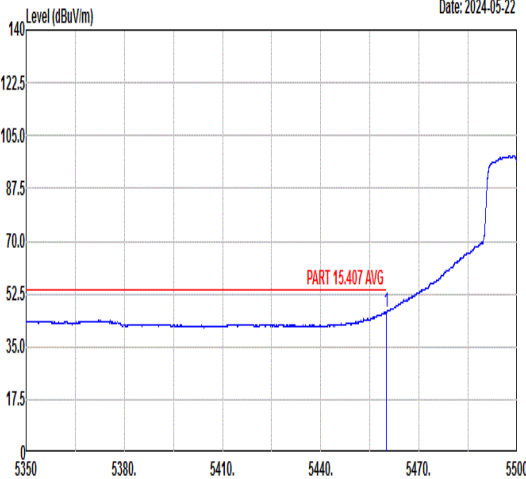
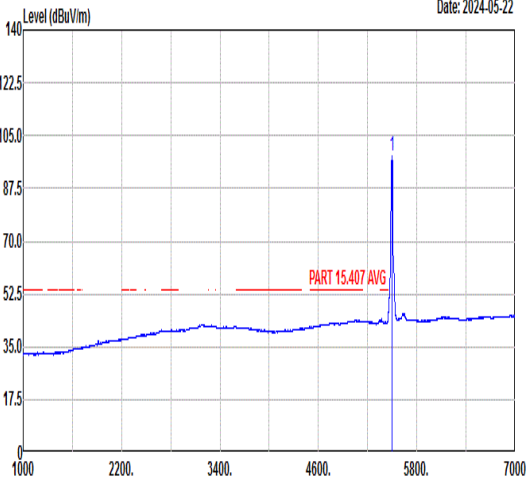


		16																																																																																																							
Mode		Band Edge																																																																																																							
		U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																							
ANT		SISO																																																																																																							
Pol.	Vertical										Fundamental																																																																																														
Peak																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5454.93</td><td>56.90</td><td>74.00</td><td>-17.10</td><td>43.15</td><td>34.81</td><td>11.10</td><td>32.16</td><td>242</td><td>174 PEAK</td></tr><tr><td>2 5468.73</td><td>65.69</td><td>68.30</td><td>-2.61</td><td>51.90</td><td>34.81</td><td>11.16</td><td>32.18</td><td>242</td><td>174 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5454.93	56.90	74.00	-17.10	43.15	34.81	11.10	32.16	242	174 PEAK	2 5468.73	65.69	68.30	-2.61	51.90	34.81	11.16	32.18	242	174 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5500.00</td><td>105.00</td><td>-----</td><td>-----</td><td>91.14</td><td>34.80</td><td>11.27</td><td>32.21</td><td>242</td><td>174 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5500.00	105.00	-----	-----	91.14	34.80	11.27	32.21	242
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1 5454.93	56.90	74.00	-17.10	43.15	34.81	11.10	32.16	242	174 PEAK																																																																																																
2 5468.73	65.69	68.30	-2.61	51.90	34.81	11.16	32.18	242	174 PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1 5500.00	105.00	-----	-----	91.14	34.80	11.27	32.21	242	174 PEAK																																																																																																
Avg																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5460.00</td><td>46.49</td><td>54.00</td><td>-7.51</td><td>32.73</td><td>34.81</td><td>11.12</td><td>32.17</td><td>242</td><td>174 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5460.00	46.49	54.00	-7.51	32.73	34.81	11.12	32.17	242	174 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5500.00</td><td>98.04</td><td>-----</td><td>-----</td><td>84.18</td><td>34.80</td><td>11.27</td><td>32.21</td><td>242</td><td>174 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5500.00	98.04	-----	-----	84.18	34.80	11.27	32.21	242	174 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1 5460.00	46.49	54.00	-7.51	32.73	34.81	11.12	32.17	242	174 AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1 5500.00	98.04	-----	-----	84.18	34.80	11.27	32.21	242	174 AVERAGE																																																																																																



Mode	16																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>56.41</td><td>74.00</td><td>-17.59</td><td>53.27</td><td>39.40</td><td>14.54</td><td>50.80</td><td>259</td><td>66</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>11000.00</td><td>48.01</td><td>54.00</td><td>-5.99</td><td>44.87</td><td>39.40</td><td>14.54</td><td>50.80</td><td>259</td><td>66</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>16500.00</td><td>50.40</td><td>68.30</td><td>-17.90</td><td>42.44</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11000.00	56.41	74.00	-17.59	53.27	39.40	14.54	50.80	259	66	Peak				2	11000.00	48.01	54.00	-5.99	44.87	39.40	14.54	50.80	259	66	Average				3	16500.00	50.40	68.30	-17.90	42.44	42.40	17.36	51.80	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1	11000.00	56.41	74.00	-17.59	53.27	39.40	14.54	50.80	259	66	Peak																																																																																								
2	11000.00	48.01	54.00	-5.99	44.87	39.40	14.54	50.80	259	66	Average																																																																																									
3	16500.00	50.40	68.30	-17.90	42.44	42.40	17.36	51.80	--	--	Peak																																																																																									
Peak Avg	Level (dBuV/m) Date: 2024-03-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>54.06</td><td>74.00</td><td>-19.94</td><td>50.92</td><td>39.40</td><td>14.54</td><td>50.80</td><td>106</td><td>198</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>11000.00</td><td>45.96</td><td>54.00</td><td>-8.04</td><td>42.82</td><td>39.40</td><td>14.54</td><td>50.80</td><td>106</td><td>198</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>16500.00</td><td>50.39</td><td>68.30</td><td>-17.91</td><td>42.43</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11000.00	54.06	74.00	-19.94	50.92	39.40	14.54	50.80	106	198	Peak				2	11000.00	45.96	54.00	-8.04	42.82	39.40	14.54	50.80	106	198	Average				3	16500.00	50.39	68.30	-17.91	42.43	42.40	17.36	51.80	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1	11000.00	54.06	74.00	-19.94	50.92	39.40	14.54	50.80	106	198	Peak																																																																																								
2	11000.00	45.96	54.00	-8.04	42.82	39.40	14.54	50.80	106	198	Average																																																																																									
3	16500.00	50.39	68.30	-17.91	42.43	42.40	17.36	51.80	--	--	Peak																																																																																									

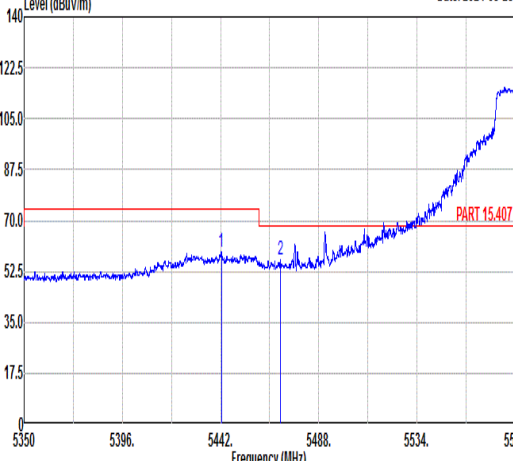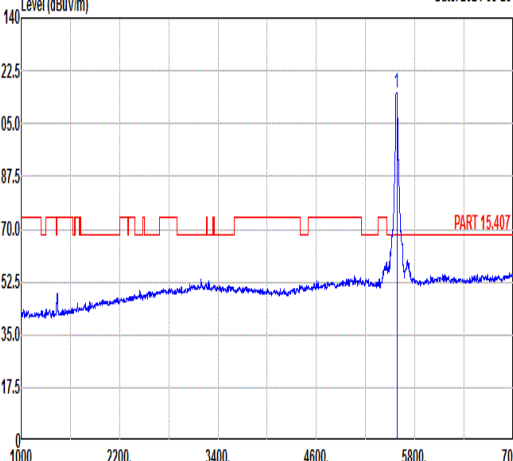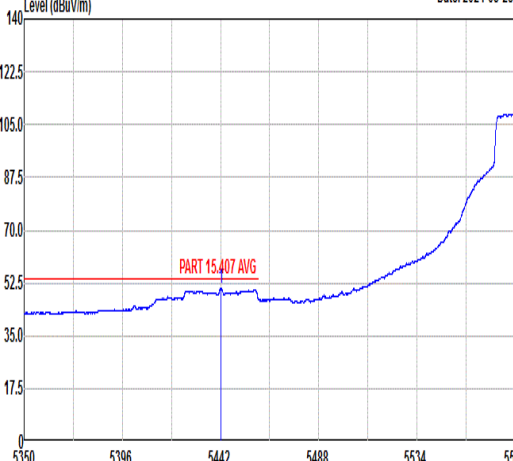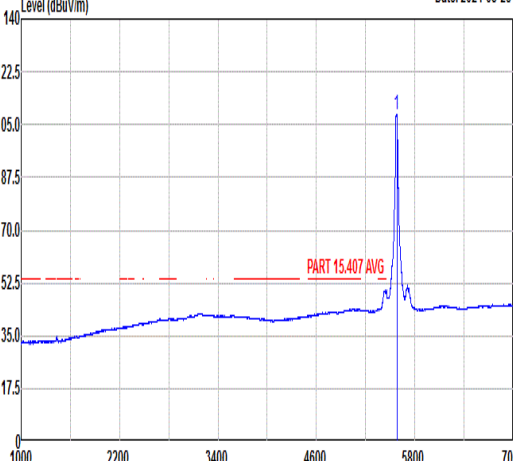

		17																																																																																																											
Mode		Band Edge - L																																																																																																											
		U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																											
ANT		SISO																																																																																																											
Pol.	Horizontal										Fundamental																																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5442.35</td><td>59.17</td><td>74.00</td><td>-14.83</td><td>45.45</td><td>34.81</td><td>11.05</td><td>32.14</td><td>201</td><td>63</td><td>PEAK</td></tr><tr><td>2 5469.97</td><td>56.76</td><td>68.30</td><td>-11.54</td><td>42.97</td><td>34.81</td><td>11.16</td><td>32.18</td><td>201</td><td>63</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5442.35	59.17	74.00	-14.83	45.45	34.81	11.05	32.14	201	63	PEAK	2 5469.97	56.76	68.30	-11.54	42.97	34.81	11.16	32.18	201	63	PEAK	Level (dBuV/m) Date: 2024-05-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5580.00</td><td>115.31</td><td>-----</td><td>-----</td><td>101.07</td><td>34.91</td><td>11.60</td><td>32.27</td><td>201</td><td>63</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5580.00	115.31	-----	-----	101.07	34.91	11.60	32.27	201	63	PEAK
		Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 5442.35	59.17	74.00	-14.83	45.45	34.81	11.05	32.14	201	63	PEAK																																																																																																			
2 5469.97	56.76	68.30	-11.54	42.97	34.81	11.16	32.18	201	63	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 5580.00	115.31	-----	-----	101.07	34.91	11.60	32.27	201	63	PEAK																																																																																																			
Avg	Level (dBuV/m) Date: 2024-05-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5442.32</td><td>50.64</td><td>54.00</td><td>-3.36</td><td>36.92</td><td>34.81</td><td>11.05</td><td>32.14</td><td>201</td><td>63</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5442.32	50.64	54.00	-3.36	36.92	34.81	11.05	32.14	201	63	AVERAGE	Level (dBuV/m) Date: 2024-05-28  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5580.00</td><td>108.40</td><td>-----</td><td>-----</td><td>94.14</td><td>34.91</td><td>11.62</td><td>32.27</td><td>201</td><td>63</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5580.00	108.40	-----	-----	94.14	34.91	11.62	32.27	201	63	AVERAGE											
		Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 5442.32	50.64	54.00	-3.36	36.92	34.81	11.05	32.14	201	63	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 5580.00	108.40	-----	-----	94.14	34.91	11.62	32.27	201	63	AVERAGE																																																																																																			



Mode	17																																																																																																								
	Band Edge - L																																																																																																								
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																								
ANT	SISO																																																																																																								
Pol.	Vertical						Fundamental																																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.02</td><td>52.92</td><td>74.00</td><td>-21.08</td><td>39.17</td><td>34.81</td><td>11.10</td><td>32.16</td><td>400</td><td>352</td><td>PEAK</td></tr><tr><td>2</td><td>5460.98</td><td>52.33</td><td>68.30</td><td>-15.97</td><td>38.57</td><td>34.81</td><td>11.12</td><td>32.17</td><td>400</td><td>352</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.02	52.92	74.00	-21.08	39.17	34.81	11.10	32.16	400	352	PEAK	2	5460.98	52.33	68.30	-15.97	38.57	34.81	11.12	32.17	400	352	PEAK	Level (dBuV/m) Date: 2024-05-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5580.00</td><td>107.00</td><td>-----</td><td>-----</td><td>92.74</td><td>34.91</td><td>11.62</td><td>32.27</td><td>400</td><td>352</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	107.00	-----	-----	92.74	34.91	11.62	32.27	400	352	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5455.02	52.92	74.00	-21.08	39.17	34.81	11.10	32.16	400	352	PEAK																																																																																														
2	5460.98	52.33	68.30	-15.97	38.57	34.81	11.12	32.17	400	352	PEAK																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5580.00	107.00	-----	-----	92.74	34.91	11.62	32.27	400	352	PEAK																																																																																														
Avg	Level (dBuV/m) Date: 2024-05-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.76</td><td>44.14</td><td>54.00</td><td>-9.86</td><td>30.38</td><td>34.81</td><td>11.11</td><td>32.16</td><td>400</td><td>352</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.76	44.14	54.00	-9.86	30.38	34.81	11.11	32.16	400	352	AVERAGE	Level (dBuV/m) Date: 2024-05-28 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5580.00</td><td>99.41</td><td>-----</td><td>-----</td><td>85.15</td><td>34.91</td><td>11.62</td><td>32.27</td><td>400</td><td>352</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5580.00	99.41	-----	-----	85.15	34.91	11.62	32.27	400	352	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5457.76	44.14	54.00	-9.86	30.38	34.81	11.11	32.16	400	352	AVERAGE																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	5580.00	99.41	-----	-----	85.15	34.91	11.62	32.27	400	352	AVERAGE																																																																																														






Mode	17																																																
	Band Edge - R																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																
ANT	SISO																																																
Pol.	Vertical	Fundamental																																															
Peak	Date: 2024-05-28 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5734.03</td><td>55.68</td><td>68.30</td><td>-12.62</td><td>41.29</td><td>35.13</td><td>11.65</td><td>32.39</td><td>400</td><td>352</td><td>PEAK</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5734.03	55.68	68.30	-12.62	41.29	35.13	11.65	32.39	400	352	PEAK	Blank
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5734.03	55.68	68.30	-12.62	41.29	35.13	11.65	32.39	400	352	PEAK																																						






Mode	17																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																															
ANT	SISO																																																																																															
Pol.	Horizontal																																																																																															
Peak Avg	Level (dBuV/m) Date: 2024-03-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>62.56</td><td>74.00</td><td>-11.44</td><td>59.16</td><td>39.53</td><td>14.64</td><td>50.77</td><td>258</td><td>133</td><td colspan="2">Peak</td><td></td></tr><tr><td>2</td><td>11160.00</td><td>52.27</td><td>54.00</td><td>-1.73</td><td>48.87</td><td>39.53</td><td>14.64</td><td>50.77</td><td>258</td><td>133</td><td colspan="2">Average</td><td></td></tr><tr><td>3</td><td>16740.00</td><td>48.95</td><td>68.30</td><td>-19.35</td><td>40.82</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td colspan="2">Peak</td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11160.00	62.56	74.00	-11.44	59.16	39.53	14.64	50.77	258	133	Peak			2	11160.00	52.27	54.00	-1.73	48.87	39.53	14.64	50.77	258	133	Average			3	16740.00	48.95	68.30	-19.35	40.82	42.45	17.43	51.75	--	--	Peak		
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
	1	11160.00	62.56	74.00	-11.44	59.16	39.53	14.64	50.77	258	133	Peak																																																																																				
2	11160.00	52.27	54.00	-1.73	48.87	39.53	14.64	50.77	258	133	Average																																																																																					
3	16740.00	48.95	68.30	-19.35	40.82	42.45	17.43	51.75	--	--	Peak																																																																																					
Vertical																																																																																																
Level (dBuV/m) Date: 2024-03-29 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>58.32</td><td>74.00</td><td>-15.68</td><td>54.92</td><td>39.53</td><td>14.64</td><td>50.77</td><td>108</td><td>195</td><td colspan="2">Peak</td><td></td></tr><tr><td>2</td><td>11160.00</td><td>49.36</td><td>54.00</td><td>-4.64</td><td>45.96</td><td>39.53</td><td>14.64</td><td>50.77</td><td>108</td><td>195</td><td colspan="2">Average</td><td></td></tr><tr><td>3</td><td>16740.00</td><td>49.50</td><td>68.30</td><td>-18.80</td><td>41.37</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td colspan="2">Peak</td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11160.00	58.32	74.00	-15.68	54.92	39.53	14.64	50.77	108	195	Peak			2	11160.00	49.36	54.00	-4.64	45.96	39.53	14.64	50.77	108	195	Average			3	16740.00	49.50	68.30	-18.80	41.37	42.45	17.43	51.75	--	--	Peak			
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	11160.00	58.32	74.00	-15.68	54.92	39.53	14.64	50.77	108	195	Peak																																																																																					
2	11160.00	49.36	54.00	-4.64	45.96	39.53	14.64	50.77	108	195	Average																																																																																					
3	16740.00	49.50	68.30	-18.80	41.37	42.45	17.43	51.75	--	--	Peak																																																																																					

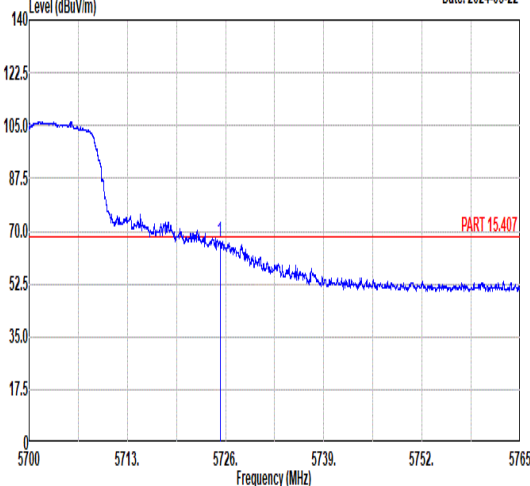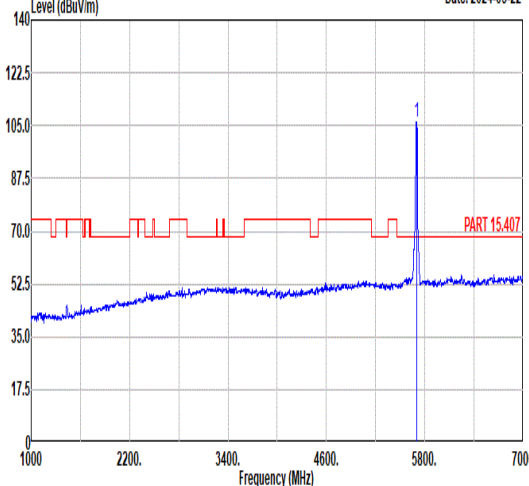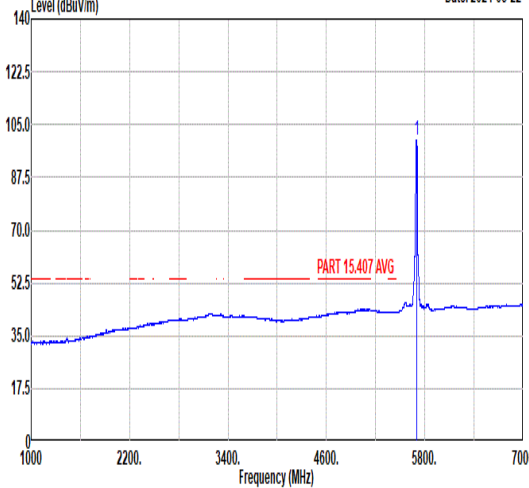

Mode	18																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-05-22  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5725.26</td><td>66.71</td><td>68.30</td><td>-1.59</td><td>52.33</td><td>35.12</td><td>11.65</td><td>32.39</td><td>204</td><td>65 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5725.26	66.71	68.30	-1.59	52.33	35.12	11.65	32.39	204	65 PEAK	Level (dBuV/m) Date: 2024-05-22  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>106.43</td><td>-----</td><td>-----</td><td>92.05</td><td>35.07</td><td>11.67</td><td>32.36</td><td>204</td><td>65 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	106.43	-----	-----	92.05	35.07	11.67	32.36	204	65 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5725.26	66.71	68.30	-1.59	52.33	35.12	11.65	32.39	204	65 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	106.43	-----	-----	92.05	35.07	11.67	32.36	204	65 PEAK																																																																									
Avg	Blank	Level (dBuV/m) Date: 2024-05-22  Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5700.00</td><td>99.74</td><td>-----</td><td>-----</td><td>85.37</td><td>35.08</td><td>11.66</td><td>32.37</td><td>204</td><td>65 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	99.74	-----	-----	85.37	35.08	11.66	32.37	204	65 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	99.74	-----	-----	85.37	35.08	11.66	32.37	204	65 AVERAGE																																																																									

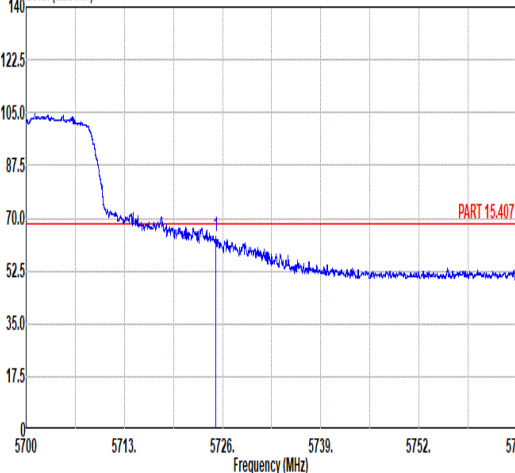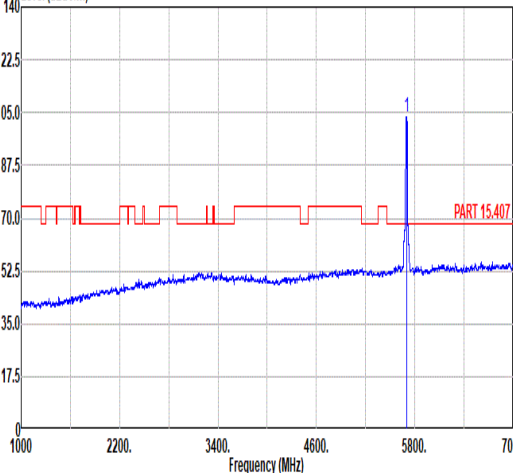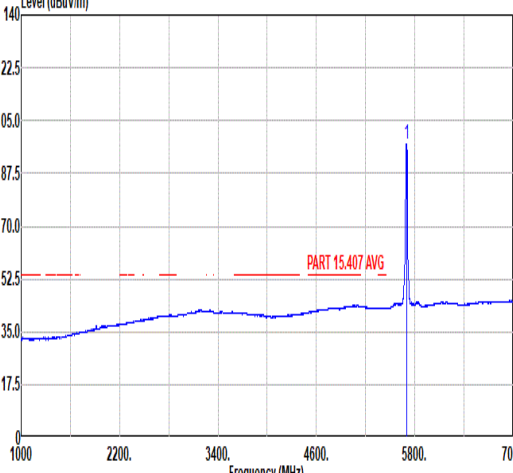

Mode	18																																																																																									
	Band Edge																																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.06</td><td>63.76</td><td>68.30</td><td>-4.54</td><td>49.38</td><td>35.12</td><td>11.65</td><td>32.39</td><td>238 170 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	5725.06	63.76	68.30	-4.54	49.38	35.12	11.65	32.39	238 170 PEAK	Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>103.35</td><td>-----</td><td>-----</td><td>88.98</td><td>35.08</td><td>11.66</td><td>32.37</td><td>238 170 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	5700.00	103.35	-----	-----	88.98	35.08	11.66	32.37	238 170 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	5725.06	63.76	68.30	-4.54	49.38	35.12	11.65	32.39	238 170 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	5700.00	103.35	-----	-----	88.98	35.08	11.66	32.37	238 170 PEAK																																																																																	
Avg	Blank					Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>97.14</td><td>-----</td><td>-----</td><td>82.77</td><td>35.08</td><td>11.66</td><td>32.37</td><td>238 170 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg	1	5700.00	97.14	-----	-----	82.77	35.08	11.66	32.37	238 170 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	cm	deg																																																																																	
1	5700.00	97.14	-----	-----	82.77	35.08	11.66	32.37	238 170 AVERAGE																																																																																	







Mode	18																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-29 11400.00 56.74 74.00 -17.26 52.96 39.72 14.78 50.72 258 130 Peak <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1 11400.00</td><td>56.74</td><td>74.00</td><td>-17.26</td><td>52.96</td><td>39.72</td><td>14.78</td><td>50.72</td><td>258</td><td>130</td><td colspan="4">Peak</td><td></td></tr><tr><td>2 11400.00</td><td>47.71</td><td>54.00</td><td>-6.29</td><td>43.93</td><td>39.72</td><td>14.78</td><td>50.72</td><td>258</td><td>130</td><td colspan="4">Average</td><td></td></tr><tr><td>3 17100.00</td><td>50.63</td><td>68.30</td><td>-17.67</td><td>42.44</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td colspan="4">Peak</td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1 11400.00	56.74	74.00	-17.26	52.96	39.72	14.78	50.72	258	130	Peak					2 11400.00	47.71	54.00	-6.29	43.93	39.72	14.78	50.72	258	130	Average					3 17100.00	50.63	68.30	-17.67	42.44	42.46	17.53	51.80	--	--	Peak				
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1 11400.00	56.74	74.00	-17.26	52.96	39.72	14.78	50.72	258	130	Peak																																																																																									
2 11400.00	47.71	54.00	-6.29	43.93	39.72	14.78	50.72	258	130	Average																																																																																										
3 17100.00	50.63	68.30	-17.67	42.44	42.46	17.53	51.80	--	--	Peak																																																																																										
Vertical																																																																																																				
Level (dBuV/m) Date: 2024-03-29 11400.00 55.07 74.00 -18.93 51.29 39.72 14.78 50.72 108 198 Peak <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1 11400.00</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>51.29</td><td>39.72</td><td>14.78</td><td>50.72</td><td>108</td><td>198</td><td colspan="4">Peak</td><td></td></tr><tr><td>2 11400.00</td><td>44.44</td><td>54.00</td><td>-9.56</td><td>40.66</td><td>39.72</td><td>14.78</td><td>50.72</td><td>108</td><td>198</td><td colspan="4">Average</td><td></td></tr><tr><td>3 17100.00</td><td>50.96</td><td>68.30</td><td>-17.34</td><td>42.77</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td colspan="4">Peak</td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1 11400.00	55.07	74.00	-18.93	51.29	39.72	14.78	50.72	108	198	Peak					2 11400.00	44.44	54.00	-9.56	40.66	39.72	14.78	50.72	108	198	Average					3 17100.00	50.96	68.30	-17.34	42.77	42.46	17.53	51.80	--	--	Peak					
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 11400.00	55.07	74.00	-18.93	51.29	39.72	14.78	50.72	108	198	Peak																																																																																										
2 11400.00	44.44	54.00	-9.56	40.66	39.72	14.78	50.72	108	198	Average																																																																																										
3 17100.00	50.96	68.30	-17.34	42.77	42.46	17.53	51.80	--	--	Peak																																																																																										



Mode	19																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-05-22 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue trace with a sharp peak at 5190 MHz. A red line indicates the limit at 70.0 dBuV/m. The peak is labeled PART 15.407. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.68</td><td>61.67</td><td>74.00</td><td>-12.33</td><td>47.49</td><td>34.87</td><td>11.09</td><td>31.78</td><td>207 81 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.68	61.67	74.00	-12.33	47.49	34.87	11.09	31.78	207 81 PEAK	Level (dBuV/m) Date: 2024-05-22 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue trace with a sharp peak at 5190 MHz. A red line indicates the limit at 70.0 dBuV/m. The peak is labeled PART 15.407. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>98.62</td><td>-----</td><td>-----</td><td>84.51</td><td>34.86</td><td>11.07</td><td>31.82</td><td>207 81 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	98.62	-----	-----	84.51	34.86	11.07	31.82	207 81 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5148.68	61.67	74.00	-12.33	47.49	34.87	11.09	31.78	207 81 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	98.62	-----	-----	84.51	34.86	11.07	31.82	207 81 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-05-22 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue trace with a sharp peak at 5190 MHz. A red line indicates the limit at 54.00 dBuV/m. The peak is labeled PART 15.407 AVG. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.83</td><td>53.42</td><td>54.00</td><td>-0.58</td><td>39.24</td><td>34.87</td><td>11.09</td><td>31.78</td><td>207 81 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5149.83	53.42	54.00	-0.58	39.24	34.87	11.09	31.78	207 81 AVERAGE	Level (dBuV/m) Date: 2024-05-22 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue trace with a sharp peak at 5190 MHz. A red line indicates the limit at 54.00 dBuV/m. The peak is labeled PART 15.407 AVG. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>92.33</td><td>-----</td><td>-----</td><td>78.24</td><td>34.86</td><td>11.06</td><td>31.83</td><td>207 81 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	92.33	-----	-----	78.24	34.86	11.06	31.83	207 81 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.83	53.42	54.00	-0.58	39.24	34.87	11.09	31.78	207 81 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	92.33	-----	-----	78.24	34.86	11.06	31.83	207 81 AVERAGE																																																																									

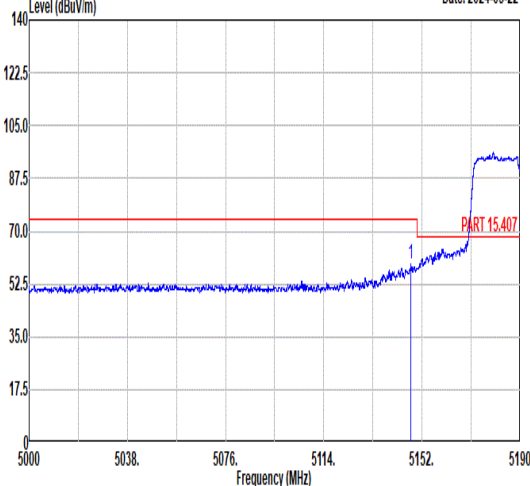
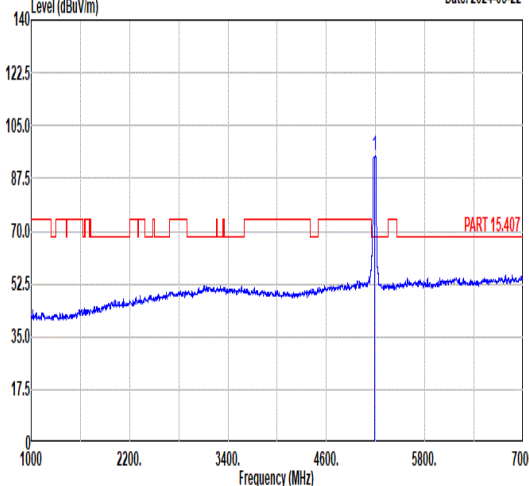
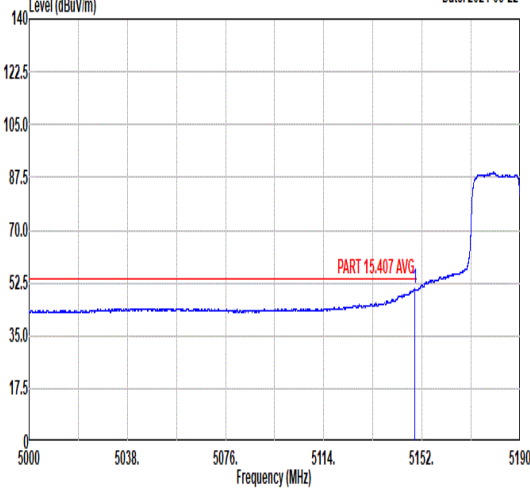
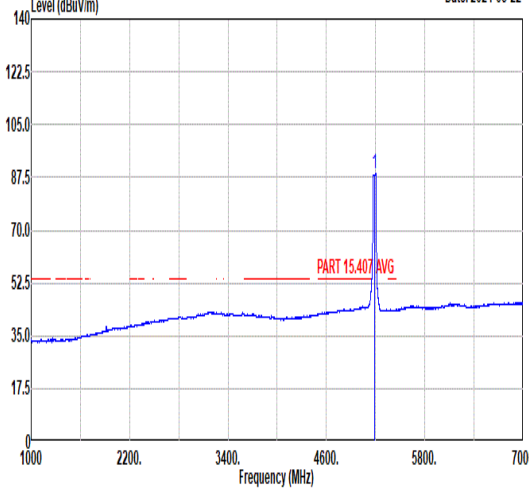


		19																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-22 					Level (dBuV/m) Date: 2024-05-22 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.73</td><td>59.04</td><td>74.00</td><td>-14.96</td><td>44.86</td><td>34.87</td><td>11.09</td><td>31.78</td><td>235 165 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5147.73	59.04	74.00	-14.96	44.86	34.87	11.09	31.78	235 165 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>94.94</td><td>-----</td><td>80.86</td><td>34.86</td><td>11.06</td><td>31.84</td><td>235</td><td>165 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	94.94	-----	80.86	34.86	11.06	31.84	235
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5147.73	59.04	74.00	-14.96	44.86	34.87	11.09	31.78	235 165 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5190.00	94.94	-----	80.86	34.86	11.06	31.84	235	165 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-05-22 					Level (dBuV/m) Date: 2024-05-22 																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.06</td><td>50.46</td><td>54.00</td><td>-3.54</td><td>36.28</td><td>34.87</td><td>11.09</td><td>31.78</td><td>235 165 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.06	50.46	54.00	-3.54	36.28	34.87	11.09	31.78	235 165 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>88.66</td><td>-----</td><td>74.58</td><td>34.86</td><td>11.06</td><td>31.84</td><td>235</td><td>165 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	88.66	-----	74.58	34.86	11.06	31.84	235
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.06	50.46	54.00	-3.54	36.28	34.87	11.09	31.78	235 165 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5190.00	88.66	-----	74.58	34.86	11.06	31.84	235	165 AVERAGE																																																																																







Mode	19																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																					
ANT	SISO																																					
Pol.	Vertical	Fundamental																																				
Peak	Date: 2024-05-22 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5362.94</td><td>52.72</td><td>74.00</td><td>-21.28</td><td>39.01</td><td>34.83</td><td>10.93</td><td>32.05</td><td>235</td><td>165</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5362.94	52.72	74.00	-21.28	39.01	34.83	10.93	32.05	235	165	PEAK	Blank
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																												
1	5362.94	52.72	74.00	-21.28	39.01	34.83	10.93	32.05	235	165	PEAK																											
Avg	Date: 2024-05-22 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5356.19</td><td>42.59</td><td>54.00</td><td>-11.41</td><td>28.86</td><td>34.83</td><td>10.94</td><td>32.04</td><td>235</td><td>165</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5356.19	42.59	54.00	-11.41	28.86	34.83	10.94	32.04	235	165	AVERAGE	Blank
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																												
1	5356.19	42.59	54.00	-11.41	28.86	34.83	10.94	32.04	235	165	AVERAGE																											

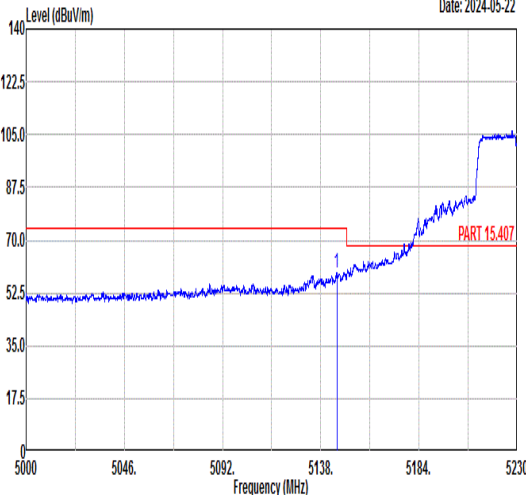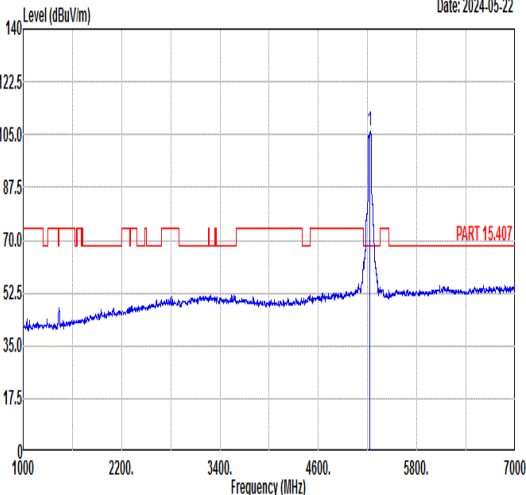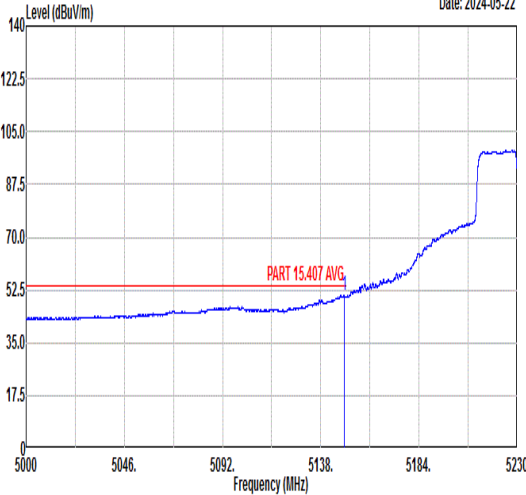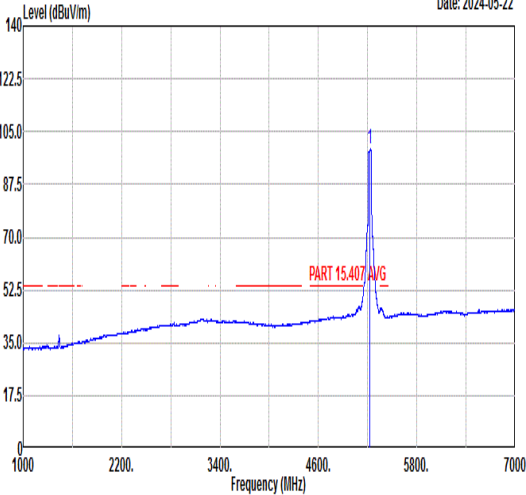

Mode	20																																																																																						
	Band Edge - L																																																																																						
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																						
ANT	SISO																																																																																						
Pol.	Horizontal					Fundamental																																																																																	
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.48</td><td>59.33</td><td>74.00</td><td>-14.67</td><td>45.15</td><td>34.87</td><td>11.09</td><td>31.78</td><td>216</td><td>59 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.48	59.33	74.00	-14.67	45.15	34.87	11.09	31.78	216	59 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>106.15</td><td>-----</td><td>-----</td><td>92.15</td><td>34.85</td><td>11.03</td><td>31.88</td><td>216</td><td>59 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	106.15	-----	-----	92.15	34.85	11.03	31.88	216
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5145.48	59.33	74.00	-14.67	45.15	34.87	11.09	31.78	216	59 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5230.00	106.15	-----	-----	92.15	34.85	11.03	31.88	216	59 PEAK																																																																													
Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.93</td><td>50.65</td><td>54.00</td><td>-3.35</td><td>36.47</td><td>34.87</td><td>11.09</td><td>31.78</td><td>216</td><td>59 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.93	50.65	54.00	-3.35	36.47	34.87	11.09	31.78	216	59 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>99.17</td><td>-----</td><td>-----</td><td>85.18</td><td>34.85</td><td>11.03</td><td>31.89</td><td>216</td><td>59 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	99.17	-----	-----	85.18	34.85	11.03	31.89	216
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5148.93	50.65	54.00	-3.35	36.47	34.87	11.09	31.78	216	59 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	5230.00	99.17	-----	-----	85.18	34.85	11.03	31.89	216	59 AVERAGE																																																																													

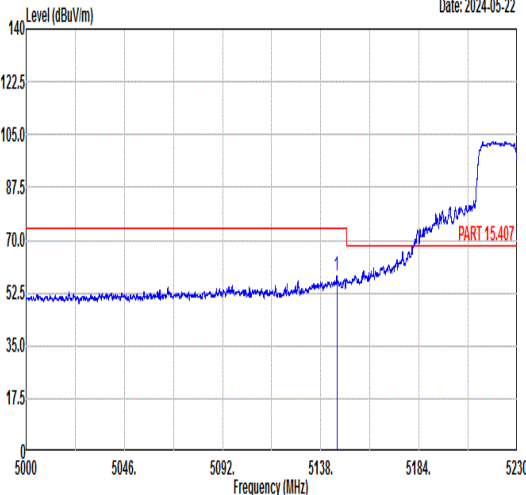
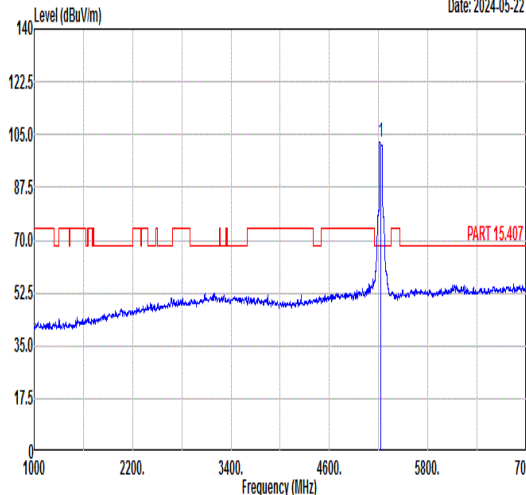
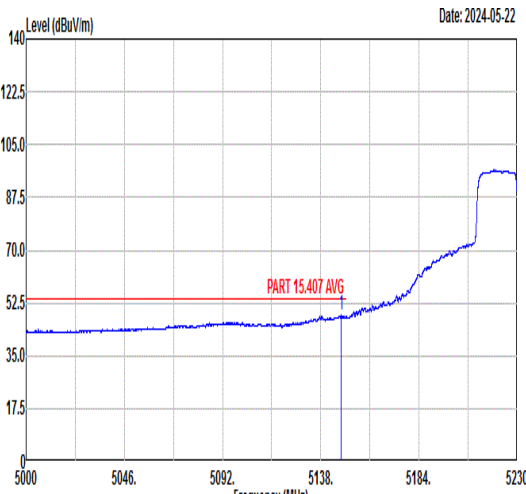
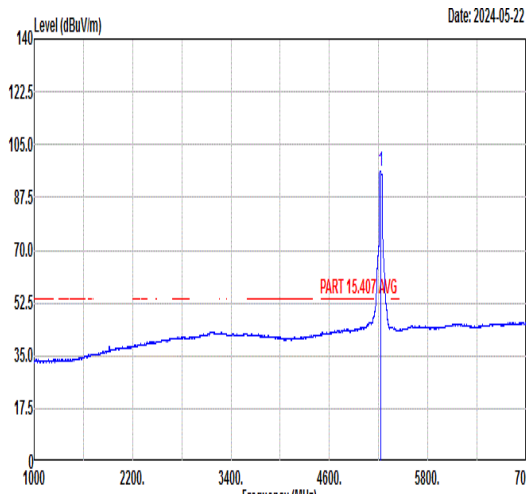


Mode	20																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.48</td><td>58.21</td><td>74.00</td><td>-15.79</td><td>44.03</td><td>34.87</td><td>11.09</td><td>31.78</td><td>231</td><td>166</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.48	58.21	74.00	-15.79	44.03	34.87	11.09	31.78	231	166	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>102.54</td><td>-----</td><td>-----</td><td>88.49</td><td>34.86</td><td>11.05</td><td>31.86</td><td>231</td><td>166</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	102.54	-----	-----	88.49	34.86	11.05	31.86	231	166
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5145.48	58.21	74.00	-15.79	44.03	34.87	11.09	31.78	231	166	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5230.00	102.54	-----	-----	88.49	34.86	11.05	31.86	231	166	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.55</td><td>48.43</td><td>54.00</td><td>-5.57</td><td>34.25</td><td>34.87</td><td>11.09</td><td>31.78</td><td>231</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.55	48.43	54.00	-5.57	34.25	34.87	11.09	31.78	231	166	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>96.39</td><td>-----</td><td>-----</td><td>82.34</td><td>34.86</td><td>11.05</td><td>31.86</td><td>231</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	96.39	-----	-----	82.34	34.86	11.05	31.86	231	166
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5147.55	48.43	54.00	-5.57	34.25	34.87	11.09	31.78	231	166	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5230.00	96.39	-----	-----	82.34	34.86	11.05	31.86	231	166	AVERAGE																																																																																



Mode	20																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																		
ANT	SISO																																																		
Pol.	Vertical						Fundamental																																												
Peak	Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5368.09</td><td>53.56</td><td>74.00</td><td>-20.44</td><td>39.83</td><td>34.83</td><td>10.94</td><td>32.04</td><td>231</td><td>166</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5368.09	53.56	74.00	-20.44	39.83	34.83	10.94	32.04	231	166	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5368.09	53.56	74.00	-20.44	39.83	34.83	10.94	32.04	231	166	PEAK																																								
Avg	Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5370.90</td><td>44.04</td><td>54.00</td><td>-9.96</td><td>30.33</td><td>34.83</td><td>10.93</td><td>32.05</td><td>231</td><td>166</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5370.90	44.04	54.00	-9.96	30.33	34.83	10.93	32.05	231	166	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5370.90	44.04	54.00	-9.96	30.33	34.83	10.93	32.05	231	166	AVERAGE																																								

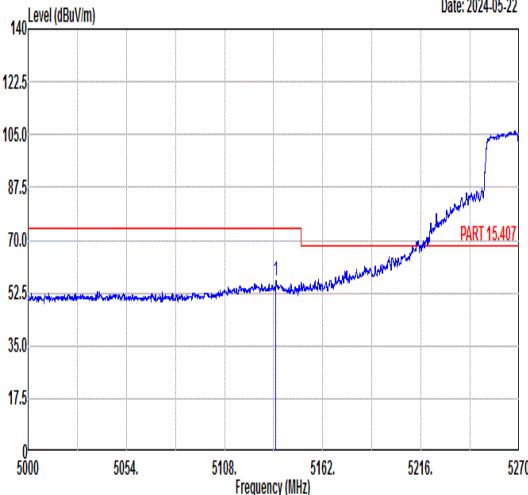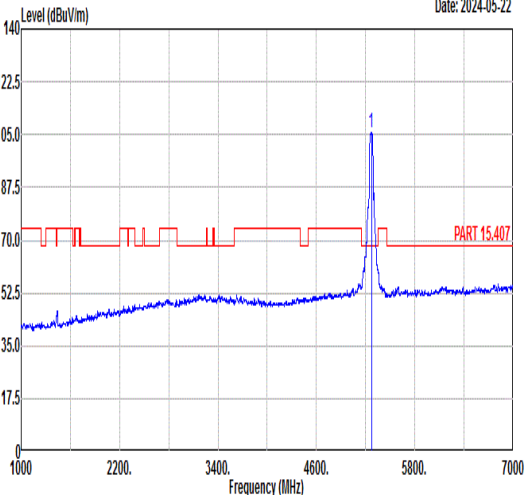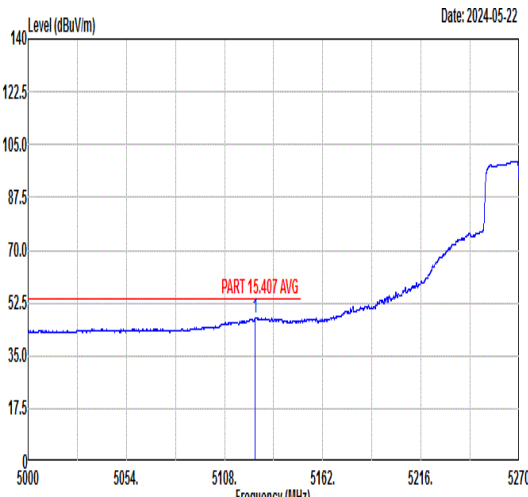
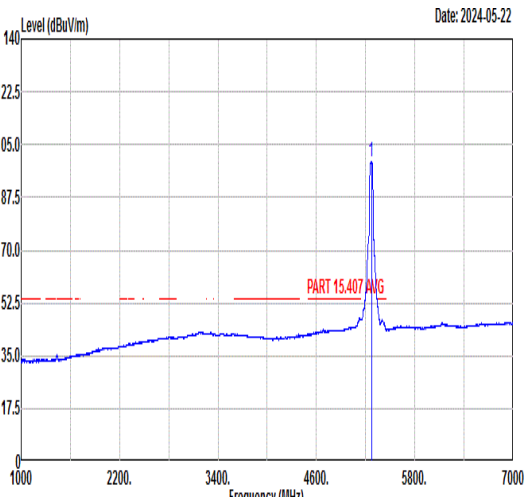


Mode	21																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5136.22</td><td>56.78</td><td>74.00</td><td>-17.22</td><td>42.58</td><td>34.87</td><td>11.09</td><td>31.76</td><td>209</td><td>58</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5136.22	56.78	74.00	-17.22	42.58	34.87	11.09	31.76	209	58	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>105.70</td><td>-----</td><td>-----</td><td>91.76</td><td>34.85</td><td>11.01</td><td>31.92</td><td>209</td><td>58</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	105.70	-----	-----	91.76	34.85	11.01	31.92	209	58
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5136.22	56.78	74.00	-17.22	42.58	34.87	11.09	31.76	209	58	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5270.00	105.70	-----	-----	91.76	34.85	11.01	31.92	209	58	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5124.63</td><td>47.50</td><td>54.00</td><td>-6.50</td><td>33.27</td><td>34.88</td><td>11.10</td><td>31.75</td><td>209</td><td>58</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5124.63	47.50	54.00	-6.50	33.27	34.88	11.10	31.75	209	58	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>99.20</td><td>-----</td><td>-----</td><td>85.27</td><td>34.85</td><td>11.01</td><td>31.93</td><td>209</td><td>58</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	99.20	-----	-----	85.27	34.85	11.01	31.93	209	58
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5124.63	47.50	54.00	-6.50	33.27	34.88	11.10	31.75	209	58	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5270.00	99.20	-----	-----	85.27	34.85	11.01	31.93	209	58	AVERAGE																																																																																







Mode	21																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5125.98</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>40.25</td><td>34.87</td><td>11.10</td><td>31.75</td><td>239</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5125.98	54.47	74.00	-19.53	40.25	34.87	11.10	31.75	239	169	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>101.50</td><td>-----</td><td>-----</td><td>87.57</td><td>34.85</td><td>11.01</td><td>31.93</td><td>239</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	101.50	-----	-----	87.57	34.85	11.01	31.93	239	169
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5125.98	54.47	74.00	-19.53	40.25	34.87	11.10	31.75	239	169	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	101.50	-----	-----	87.57	34.85	11.01	31.93	239	169	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5134.30</td><td>45.60</td><td>54.00</td><td>-8.40</td><td>31.40</td><td>34.87</td><td>11.09</td><td>31.76</td><td>239</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5134.30	45.60	54.00	-8.40	31.40	34.87	11.09	31.76	239	169	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>95.47</td><td>-----</td><td>-----</td><td>81.54</td><td>34.85</td><td>11.01</td><td>31.93</td><td>239</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	95.47	-----	-----	81.54	34.85	11.01	31.93	239	169
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5134.30	45.60	54.00	-8.40	31.40	34.87	11.09	31.76	239	169	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	95.47	-----	-----	81.54	34.85	11.01	31.93	239	169	AVERAGE																																																																																

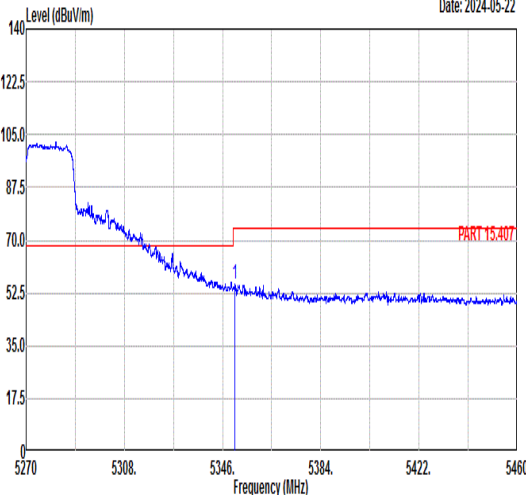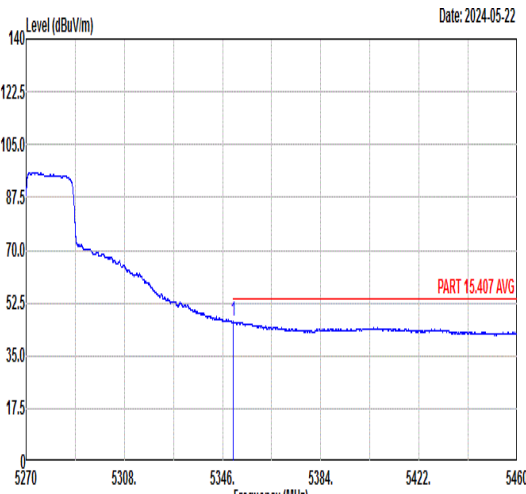

Mode	21																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.85</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>41.48</td><td>34.83</td><td>10.94</td><td>32.03</td><td>239</td><td>169</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.85	55.22	74.00	-18.78	41.48	34.83	10.94	32.03	239	169	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.85	55.22	74.00	-18.78	41.48	34.83	10.94	32.03	239	169	PEAK																															
Avg	Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.09</td><td>46.29</td><td>54.00</td><td>-7.71</td><td>32.55</td><td>34.83</td><td>10.94</td><td>32.03</td><td>239</td><td>169</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.09	46.29	54.00	-7.71	32.55	34.83	10.94	32.03	239	169	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.09	46.29	54.00	-7.71	32.55	34.83	10.94	32.03	239	169	AVERAGE																															

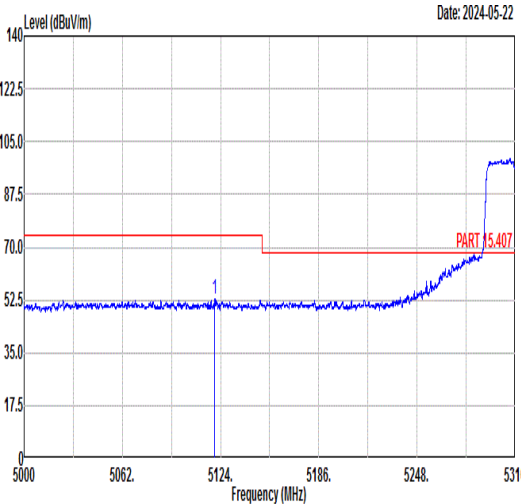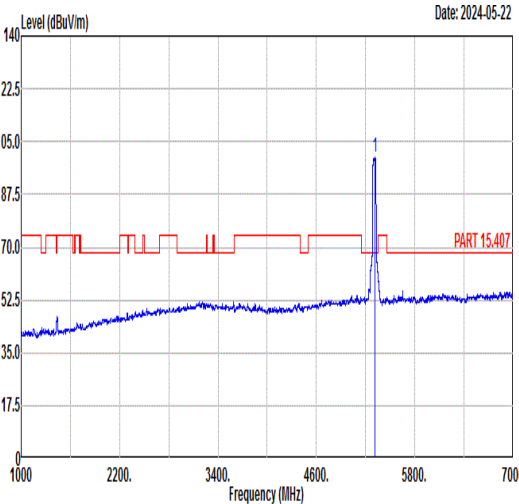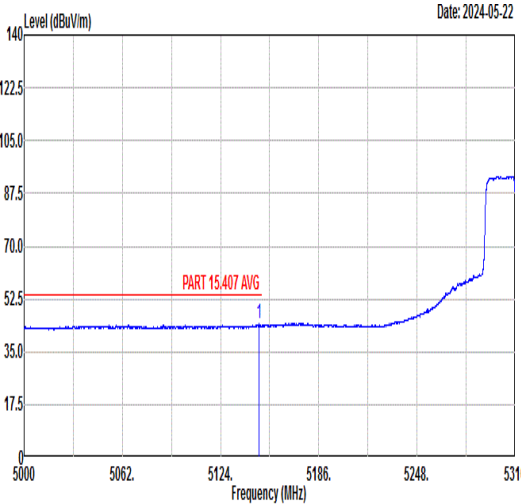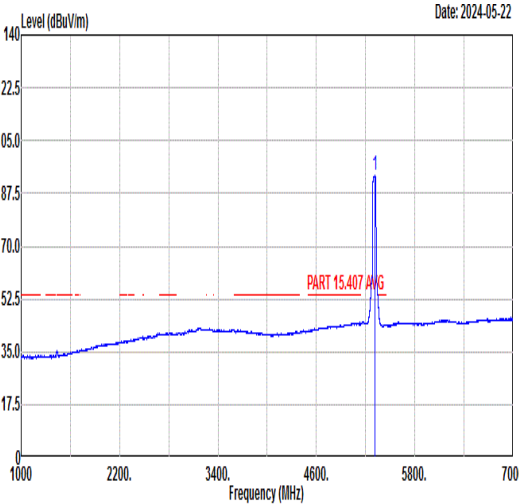

Mode	22																																																																																											
	Band Edge - L																																																																																											
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	 Level (dBuV/m) Date: 2024-05-22 5000 5062. 5124. 5186. 5248. 5310 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5120.44</td><td>52.94</td><td>74.00</td><td>-21.06</td><td>38.70</td><td>34.88</td><td>11.10</td><td>31.74</td><td>208</td><td>56</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5120.44	52.94	74.00	-21.06	38.70	34.88	11.10	31.74	208	56	PEAK	 Level (dBuV/m) Date: 2024-05-22 1000. 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>100.00</td><td>-----</td><td>-----</td><td>86.17</td><td>34.84</td><td>10.97</td><td>31.98</td><td>208</td><td>56</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	100.00	-----	-----	86.17	34.84	10.97	31.98	208	56	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5120.44	52.94	74.00	-21.06	38.70	34.88	11.10	31.74	208	56	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5310.00	100.00	-----	-----	86.17	34.84	10.97	31.98	208	56	PEAK																																																																																	
Avg	 Level (dBuV/m) Date: 2024-05-22 5000 5062. 5124. 5186. 5248. 5310 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.34</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>29.95</td><td>34.87</td><td>11.09</td><td>31.78</td><td>208</td><td>56</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.34	44.13	54.00	-9.87	29.95	34.87	11.09	31.78	208	56	AVERAGE	 Level (dBuV/m) Date: 2024-05-22 1000. 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>93.37</td><td>-----</td><td>-----</td><td>79.55</td><td>34.84</td><td>10.97</td><td>31.99</td><td>208</td><td>56</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	93.37	-----	-----	79.55	34.84	10.97	31.99	208	56	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5148.34	44.13	54.00	-9.87	29.95	34.87	11.09	31.78	208	56	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5310.00	93.37	-----	-----	79.55	34.84	10.97	31.99	208	56	AVERAGE																																																																																	







Mode	22																																																																																														
	Band Edge - L																																																																																														
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																														
ANT	SISO																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5036.15</td><td>52.33</td><td>74.00</td><td>-21.67</td><td>37.93</td><td>34.89</td><td>11.15</td><td>31.64</td><td>238</td><td>167</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5036.15	52.33	74.00	-21.67	37.93	34.89	11.15	31.64	238	167	PEAK	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5310.00</td><td>93.99</td><td>-----</td><td>-----</td><td>80.16</td><td>34.84</td><td>10.97</td><td>31.98</td><td>238</td><td>167</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5310.00	93.99	-----	-----	80.16	34.84	10.97	31.98	238	167	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5036.15	52.33	74.00	-21.67	37.93	34.89	11.15	31.64	238	167	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5310.00	93.99	-----	-----	80.16	34.84	10.97	31.98	238	167	PEAK																																																																																				
Avg	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5124.81</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>29.53</td><td>34.88</td><td>11.10</td><td>31.75</td><td>238</td><td>167</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5124.81	43.76	54.00	-10.24	29.53	34.88	11.10	31.75	238	167	AVERAGE	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5310.00</td><td>87.89</td><td>-----</td><td>-----</td><td>74.06</td><td>34.84</td><td>10.97</td><td>31.98</td><td>238</td><td>167</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5310.00	87.89	-----	-----	74.06	34.84	10.97	31.98	238	167	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5124.81	43.76	54.00	-10.24	29.53	34.88	11.10	31.75	238	167	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5310.00	87.89	-----	-----	74.06	34.84	10.97	31.98	238	167	AVERAGE																																																																																				



Mode	22																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5358.54</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>42.33</td><td>34.83</td><td>10.94</td><td>32.04</td><td>238</td><td>167</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5358.54	56.06	74.00	-17.94	42.33	34.83	10.94	32.04	238	167	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5358.54	56.06	74.00	-17.94	42.33	34.83	10.94	32.04	238	167	PEAK																															
Avg	Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.29</td><td>47.40</td><td>54.00</td><td>-6.60</td><td>33.66</td><td>34.83</td><td>10.94</td><td>32.03</td><td>238</td><td>167</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.29	47.40	54.00	-6.60	33.66	34.83	10.94	32.03	238	167	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5350.29	47.40	54.00	-6.60	33.66	34.83	10.94	32.03	238	167	AVERAGE																															

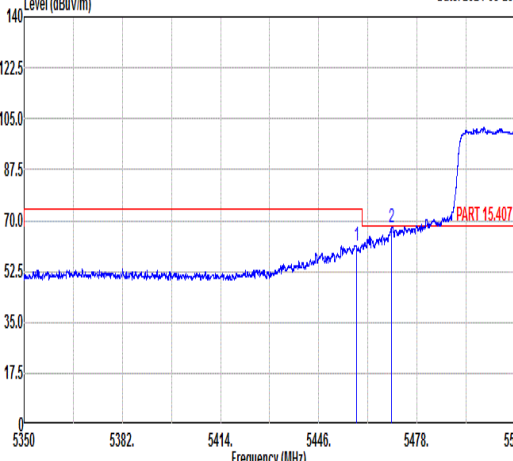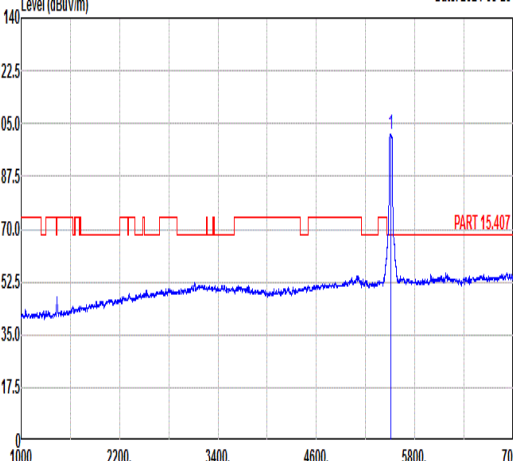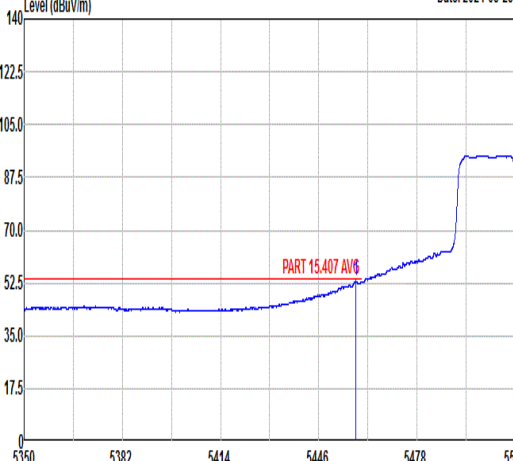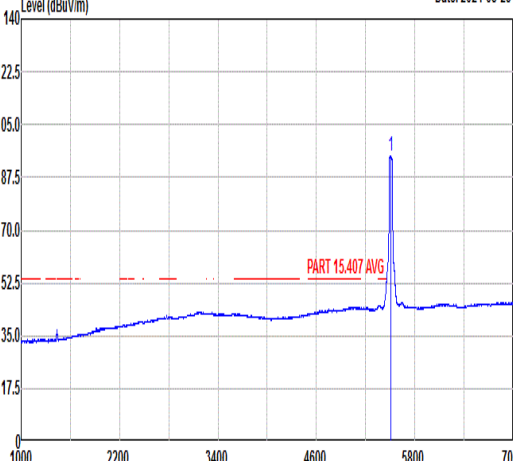

Mode	23																																																																																																									
	Band Edge - L																																																																																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																									
ANT	SISO																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)						Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.26</td><td>61.43</td><td>74.00</td><td>-12.57</td><td>47.67</td><td>34.81</td><td>11.11</td><td>32.16</td><td>210</td><td>61</td><td>PEAK</td></tr><tr><td>2</td><td>5469.60</td><td>67.77</td><td>68.30</td><td>-0.53</td><td>53.98</td><td>34.81</td><td>11.16</td><td>32.18</td><td>210</td><td>61</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.26	61.43	74.00	-12.57	47.67	34.81	11.11	32.16	210	61	PEAK	2	5469.60	67.77	68.30	-0.53	53.98	34.81	11.16	32.18	210	61	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>101.48</td><td>-----</td><td>-----</td><td>87.58</td><td>34.81</td><td>11.30</td><td>32.21</td><td>210</td><td>61</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	101.48	-----	-----	87.58	34.81	11.30	32.21	210	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5458.26	61.43	74.00	-12.57	47.67	34.81	11.11	32.16	210	61	PEAK																																																																																															
2	5469.60	67.77	68.30	-0.53	53.98	34.81	11.16	32.18	210	61	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5510.00	101.48	-----	-----	87.58	34.81	11.30	32.21	210	61	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)						Level (dBuV/m) Date: 2024-05-23  Frequency (MHz)																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.10</td><td>53.22</td><td>54.00</td><td>-0.78</td><td>39.46</td><td>34.81</td><td>11.11</td><td>32.16</td><td>210</td><td>61</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.10	53.22	54.00	-0.78	39.46	34.81	11.11	32.16	210	61	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>94.57</td><td>-----</td><td>-----</td><td>80.71</td><td>34.80</td><td>11.27</td><td>32.21</td><td>210</td><td>61</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	94.57	-----	-----	80.71	34.80	11.27	32.21	210	61	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5458.10	53.22	54.00	-0.78	39.46	34.81	11.11	32.16	210	61	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5510.00	94.57	-----	-----	80.71	34.80	11.27	32.21	210	61	AVERAGE																																																																																															




Mode	23																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																												
ANT	SISO																																												
Pol.	Horizontal	Fundamental																																											
Peak	Date: 2024-05-23 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5748.83</td><td>52.34</td><td>68.30</td><td>-15.96</td><td>37.95</td><td>35.15</td><td>11.64</td><td>32.40</td><td>210</td><td>61 PEAK</td></tr></table> Blank			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5748.83	52.34	68.30	-15.96	37.95	35.15	11.64	32.40	210	61 PEAK	
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5748.83	52.34	68.30	-15.96	37.95	35.15	11.64	32.40	210	61 PEAK																																			



		23																																																																																																								
Mode		Band Edge - L																																																																																																								
		U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																								
ANT		SISO																																																																																																								
Pol.		Vertical					Fundamental																																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.42</td><td>58.37</td><td>74.00</td><td>-15.63</td><td>44.61</td><td>34.81</td><td>11.11</td><td>32.16</td><td>224</td><td>167</td><td>PEAK</td></tr><tr><td>2</td><td>5469.92</td><td>63.22</td><td>68.30</td><td>-5.08</td><td>49.43</td><td>34.81</td><td>11.16</td><td>32.18</td><td>224</td><td>167</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.42	58.37	74.00	-15.63	44.61	34.81	11.11	32.16	224	167	PEAK	2	5469.92	63.22	68.30	-5.08	49.43	34.81	11.16	32.18	224	167	PEAK	Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>98.91</td><td>-----</td><td>-----</td><td>84.94</td><td>34.83</td><td>11.37</td><td>32.23</td><td>224</td><td>167</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	98.91	-----	-----	84.94	34.83	11.37	32.23	224	167	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5458.42	58.37	74.00	-15.63	44.61	34.81	11.11	32.16	224	167	PEAK																																																																																															
2	5469.92	63.22	68.30	-5.08	49.43	34.81	11.16	32.18	224	167	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5510.00	98.91	-----	-----	84.94	34.83	11.37	32.23	224	167	PEAK																																																																																															
Avg	Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.10</td><td>49.76</td><td>54.00</td><td>-4.24</td><td>36.00</td><td>34.81</td><td>11.11</td><td>32.16</td><td>224</td><td>167</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.10	49.76	54.00	-4.24	36.00	34.81	11.11	32.16	224	167	AVERAGE	Level (dBuV/m) Date: 2024-05-23 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>91.66</td><td>-----</td><td>-----</td><td>77.75</td><td>34.81</td><td>11.32</td><td>32.22</td><td>224</td><td>167</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	91.66	-----	-----	77.75	34.81	11.32	32.22	224	167	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5458.10	49.76	54.00	-4.24	36.00	34.81	11.11	32.16	224	167	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5510.00	91.66	-----	-----	77.75	34.81	11.32	32.22	224	167	AVERAGE																																																																																															




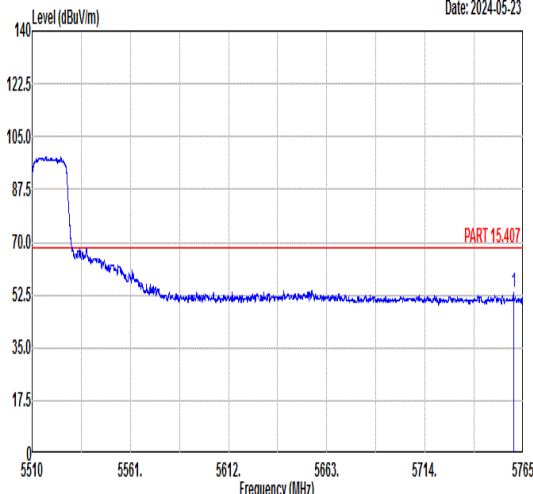


Mode	23																																																
	Band Edge - R																																																
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																
ANT	SISO																																																
Pol.	Vertical	Fundamental																																															
Peak	Date: 2024-05-23 <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5760.03</td><td>53.23</td><td>68.30</td><td>-15.07</td><td>38.84</td><td>35.16</td><td>11.64</td><td>32.41</td><td>224</td><td>167</td><td>PEAK</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5760.03	53.23	68.30	-15.07	38.84	35.16	11.64	32.41	224	167	PEAK	Blank
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5760.03	53.23	68.30	-15.07	38.84	35.16	11.64	32.41	224	167	PEAK																																						



Mode	23																																																																																																			
	Harmonic																																																																																																			
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz (only the worst mode shows above 18GHz)																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-31 11020.00 55.76 74.00 -18.24 52.59 39.42 14.55 50.80 206 37 Peak 11020.00 46.52 54.00 -7.48 43.35 39.42 14.55 50.80 206 37 Average 16530.00 51.34 68.30 -16.96 43.35 42.41 17.37 51.79 -- -- Peak																																																																																																			
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11020.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>52.59</td><td>39.42</td><td>14.55</td><td>50.80</td><td>206</td><td>37</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>11020.00</td><td>46.52</td><td>54.00</td><td>-7.48</td><td>43.35</td><td>39.42</td><td>14.55</td><td>50.80</td><td>206</td><td>37</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>16530.00</td><td>51.34</td><td>68.30</td><td>-16.96</td><td>43.35</td><td>42.41</td><td>17.37</td><td>51.79</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11020.00	55.76	74.00	-18.24	52.59	39.42	14.55	50.80	206	37	Peak				2	11020.00	46.52	54.00	-7.48	43.35	39.42	14.55	50.80	206	37	Average				3	16530.00	51.34	68.30	-16.96	43.35	42.41	17.37	51.79	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11020.00	55.76	74.00	-18.24	52.59	39.42	14.55	50.80	206	37	Peak																																																																																									
2	11020.00	46.52	54.00	-7.48	43.35	39.42	14.55	50.80	206	37	Average																																																																																									
3	16530.00	51.34	68.30	-16.96	43.35	42.41	17.37	51.79	--	--	Peak																																																																																									
Level (dBuV/m) Date: 2024-03-31 11020.00 54.51 74.00 -19.49 51.34 39.42 14.55 50.80 100 152 Peak 11020.00 45.52 54.00 -8.48 42.35 39.42 14.55 50.80 100 152 Average 16530.00 50.60 68.30 -17.70 42.61 42.41 17.37 51.79 -- -- Peak																																																																																																				
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11020.00</td><td>54.51</td><td>74.00</td><td>-19.49</td><td>51.34</td><td>39.42</td><td>14.55</td><td>50.80</td><td>100</td><td>152</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>11020.00</td><td>45.52</td><td>54.00</td><td>-8.48</td><td>42.35</td><td>39.42</td><td>14.55</td><td>50.80</td><td>100</td><td>152</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>16530.00</td><td>50.60</td><td>68.30</td><td>-17.70</td><td>42.61</td><td>42.41</td><td>17.37</td><td>51.79</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11020.00	54.51	74.00	-19.49	51.34	39.42	14.55	50.80	100	152	Peak				2	11020.00	45.52	54.00	-8.48	42.35	39.42	14.55	50.80	100	152	Average				3	16530.00	50.60	68.30	-17.70	42.61	42.41	17.37	51.79	--	--	Peak				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	11020.00	54.51	74.00	-19.49	51.34	39.42	14.55	50.80	100	152	Peak																																																																																									
2	11020.00	45.52	54.00	-8.48	42.35	39.42	14.55	50.80	100	152	Average																																																																																									
3	16530.00	50.60	68.30	-17.70	42.61	42.41	17.37	51.79	--	--	Peak																																																																																									

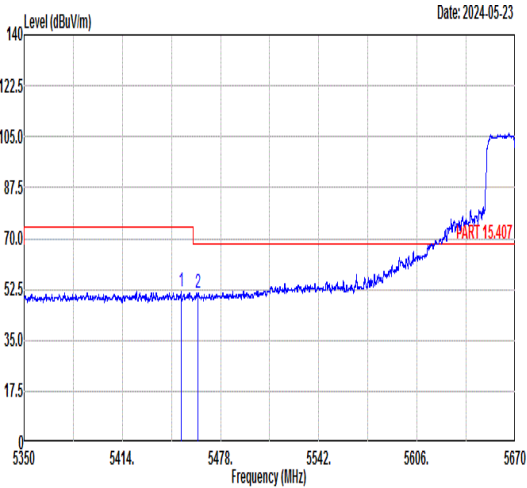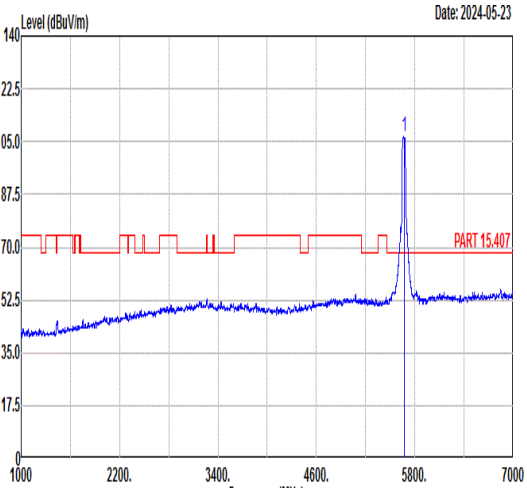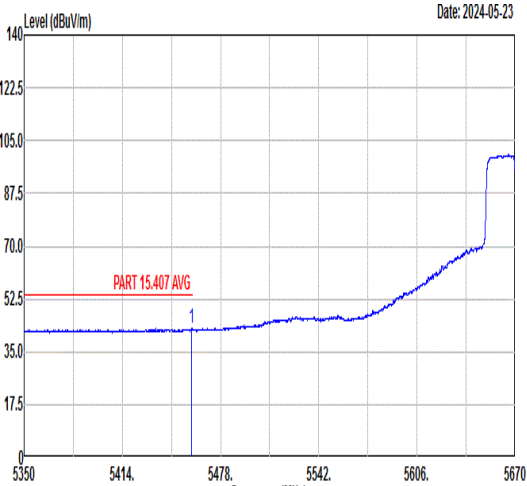
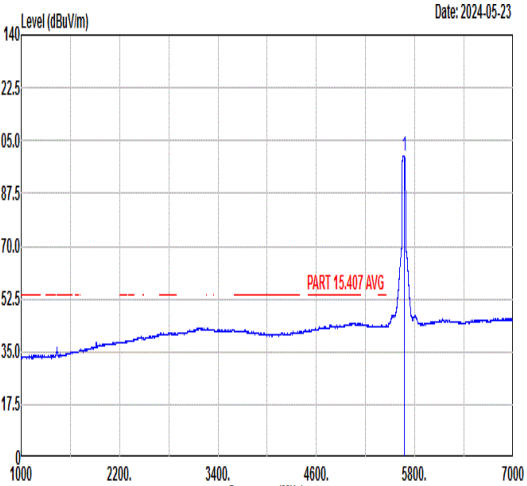


		24																																																																																																								
Mode		Band Edge - L																																																																																																								
		U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																								
ANT		SISO																																																																																																								
Pol.		Horizontal					Fundamental																																																																																																			
Peak	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5452.27</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>38.03</td><td>34.81</td><td>11.09</td><td>32.16</td><td>199</td><td>64</td><td>PEAK</td></tr><tr><td>2</td><td>5463.47</td><td>51.47</td><td>68.30</td><td>-16.83</td><td>37.70</td><td>34.81</td><td>11.13</td><td>32.17</td><td>199</td><td>64</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5452.27	51.77	74.00	-22.23	38.03	34.81	11.09	32.16	199	64	PEAK	2	5463.47	51.47	68.30	-16.83	37.70	34.81	11.13	32.17	199	64	PEAK	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>106.63</td><td>-----</td><td>-----</td><td>92.26</td><td>35.02</td><td>11.68</td><td>32.33</td><td>199</td><td>64</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	106.63	-----	-----	92.26	35.02	11.68	32.33	199	64	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5452.27	51.77	74.00	-22.23	38.03	34.81	11.09	32.16	199	64	PEAK																																																																																															
2	5463.47	51.47	68.30	-16.83	37.70	34.81	11.13	32.17	199	64	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5670.00	106.63	-----	-----	92.26	35.02	11.68	32.33	199	64	PEAK																																																																																															
Avg	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.31</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>28.89</td><td>34.81</td><td>11.12</td><td>32.16</td><td>199</td><td>64</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.31	42.66	54.00	-11.34	28.89	34.81	11.12	32.16	199	64	AVERAGE	 Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>100.04</td><td>-----</td><td>-----</td><td>85.67</td><td>35.03</td><td>11.68</td><td>32.34</td><td>199</td><td>64</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	100.04	-----	-----	85.67	35.03	11.68	32.34	199	64	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5459.31	42.66	54.00	-11.34	28.89	34.81	11.12	32.16	199	64	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5670.00	100.04	-----	-----	85.67	35.03	11.68	32.34	199	64	AVERAGE																																																																																															



Mode	24																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																													
ANT	SISO																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5372.27</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>38.07</td><td>34.83</td><td>10.93</td><td>32.06</td><td>231</td><td>164</td><td>PEAK</td></tr><tr><td>2</td><td>5465.07</td><td>51.11</td><td>68.30</td><td>-17.19</td><td>37.33</td><td>34.81</td><td>11.14</td><td>32.17</td><td>231</td><td>164</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5372.27	51.77	74.00	-22.23	38.07	34.83	10.93	32.06	231	164	PEAK	2	5465.07	51.11	68.30	-17.19	37.33	34.81	11.14	32.17	231	164	PEAK	Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>102.63</td><td>-----</td><td>-----</td><td>88.26</td><td>35.02</td><td>11.68</td><td>32.33</td><td>231</td><td>164</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	102.63	-----	-----	88.26	35.02	11.68	32.33	231	164	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5372.27	51.77	74.00	-22.23	38.07	34.83	10.93	32.06	231	164	PEAK																																																																																			
2	5465.07	51.11	68.30	-17.19	37.33	34.81	11.14	32.17	231	164	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5670.00	102.63	-----	-----	88.26	35.02	11.68	32.33	231	164	PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5416.11</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>28.90</td><td>34.82</td><td>10.94</td><td>32.11</td><td>231</td><td>164</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5416.11	42.55	54.00	-11.45	28.90	34.82	10.94	32.11	231	164	AVERAGE	Level (dBuV/m) Date: 2024-05-23 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>95.85</td><td>-----</td><td>-----</td><td>81.48</td><td>35.03</td><td>11.68</td><td>32.34</td><td>231</td><td>164</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	95.85	-----	-----	81.48	35.03	11.68	32.34	231	164	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5416.11	42.55	54.00	-11.45	28.90	34.82	10.94	32.11	231	164	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5670.00	95.85	-----	-----	81.48	35.03	11.68	32.34	231	164	AVERAGE																																																																																			

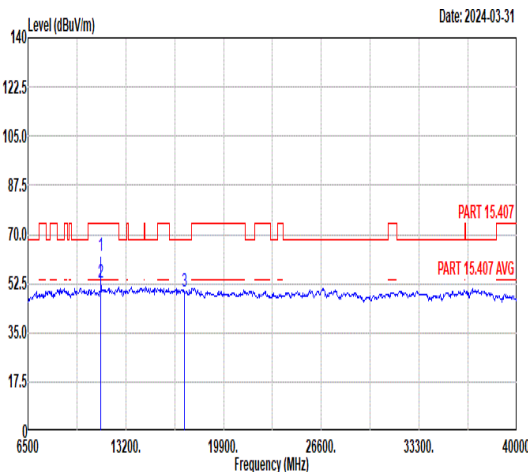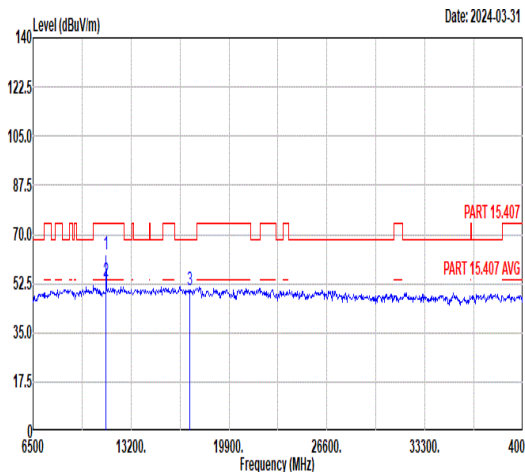

Mode	25																																																																																																																																																																																													
	Harmonic																																																																																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz (only the worst mode shows above 18GHz)																																																																																																																																																																																													
ANT	SISO																																																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																																																							
Peak Avg	 Date: 2024-03-31						 Date: 2024-03-31																																																																																																																																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>11490.00</td><td>62.35</td><td>74.00</td><td>-11.65</td><td>58.43</td><td>39.79</td><td>14.83</td><td>50.70</td><td>201</td><td>60</td><td></td><td>Peak</td><td></td><td></td></tr><tr><td>2</td><td>11490.00</td><td>52.81</td><td>54.00</td><td>-1.19</td><td>48.89</td><td>39.79</td><td>14.83</td><td>50.70</td><td>201</td><td>60</td><td></td><td>Average</td><td></td><td></td></tr><tr><td>3</td><td>17235.00</td><td>49.68</td><td>68.30</td><td>-18.62</td><td>41.63</td><td>42.41</td><td>17.57</td><td>51.93</td><td>--</td><td>--</td><td></td><td>Peak</td><td></td><td></td></tr></table>								Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	11490.00	62.35	74.00	-11.65	58.43	39.79	14.83	50.70	201	60		Peak			2	11490.00	52.81	54.00	-1.19	48.89	39.79	14.83	50.70	201	60		Average			3	17235.00	49.68	68.30	-18.62	41.63	42.41	17.57	51.93	--	--		Peak			<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>11490.00</td><td>62.91</td><td>74.00</td><td>-11.09</td><td>58.99</td><td>39.79</td><td>14.83</td><td>50.70</td><td>155</td><td>353</td><td></td><td>Peak</td><td></td><td></td></tr><tr><td>2</td><td>11490.00</td><td>53.29</td><td>54.00</td><td>-0.71</td><td>49.37</td><td>39.79</td><td>14.83</td><td>50.70</td><td>155</td><td>353</td><td></td><td>Average</td><td></td><td></td></tr><tr><td>3</td><td>17235.00</td><td>50.37</td><td>68.30</td><td>-17.93</td><td>42.32</td><td>42.41</td><td>17.57</td><td>51.93</td><td>--</td><td>--</td><td></td><td>Peak</td><td></td><td></td></tr></table>								Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	11490.00	62.91	74.00	-11.09	58.99	39.79	14.83	50.70	155	353		Peak			2	11490.00	53.29	54.00	-0.71	49.37	39.79	14.83	50.70	155	353		Average			3	17235.00	50.37	68.30	-17.93	42.32	42.41	17.57	51.93	--	--		Peak		
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
1	11490.00	62.35	74.00	-11.65	58.43	39.79	14.83	50.70	201	60		Peak																																																																																																																																																																																		
2	11490.00	52.81	54.00	-1.19	48.89	39.79	14.83	50.70	201	60		Average																																																																																																																																																																																		
3	17235.00	49.68	68.30	-18.62	41.63	42.41	17.57	51.93	--	--		Peak																																																																																																																																																																																		
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																			
1	11490.00	62.91	74.00	-11.09	58.99	39.79	14.83	50.70	155	353		Peak																																																																																																																																																																																		
2	11490.00	53.29	54.00	-0.71	49.37	39.79	14.83	50.70	155	353		Average																																																																																																																																																																																		
3	17235.00	50.37	68.30	-17.93	42.32	42.41	17.57	51.93	--	--		Peak																																																																																																																																																																																		



Mode	26																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-29 Frequency (MHz)																																																																																																			
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11570.00</td><td>59.52</td><td>74.00</td><td>-14.48</td><td>55.44</td><td>39.86</td><td>14.88</td><td>50.66</td><td>202</td><td>62</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>11570.00</td><td>51.24</td><td>54.00</td><td>-2.76</td><td>47.16</td><td>39.86</td><td>14.88</td><td>50.66</td><td>202</td><td>62</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>17355.00</td><td>50.12</td><td>68.30</td><td>-18.18</td><td>42.21</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11570.00	59.52	74.00	-14.48	55.44	39.86	14.88	50.66	202	62	Peak				2	11570.00	51.24	54.00	-2.76	47.16	39.86	14.88	50.66	202	62	Average				3	17355.00	50.12	68.30	-18.18	42.21	42.36	17.60	52.05	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	11570.00	59.52	74.00	-14.48	55.44	39.86	14.88	50.66	202	62	Peak																																																																																									
2	11570.00	51.24	54.00	-2.76	47.16	39.86	14.88	50.66	202	62	Average																																																																																									
3	17355.00	50.12	68.30	-18.18	42.21	42.36	17.60	52.05	--	--	Peak																																																																																									
Level (dBuV/m) Date: 2024-03-29 Frequency (MHz)																																																																																																				
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>11570.00</td><td>62.15</td><td>74.00</td><td>-11.85</td><td>58.07</td><td>39.86</td><td>14.88</td><td>50.66</td><td>194</td><td>353</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>11570.00</td><td>53.16</td><td>54.00</td><td>-0.84</td><td>49.08</td><td>39.86</td><td>14.88</td><td>50.66</td><td>194</td><td>353</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>17355.00</td><td>49.82</td><td>68.30</td><td>-18.48</td><td>41.91</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11570.00	62.15	74.00	-11.85	58.07	39.86	14.88	50.66	194	353	Peak				2	11570.00	53.16	54.00	-0.84	49.08	39.86	14.88	50.66	194	353	Average				3	17355.00	49.82	68.30	-18.48	41.91	42.36	17.60	52.05	--	--	Peak				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	11570.00	62.15	74.00	-11.85	58.07	39.86	14.88	50.66	194	353	Peak																																																																																									
2	11570.00	53.16	54.00	-0.84	49.08	39.86	14.88	50.66	194	353	Average																																																																																									
3	17355.00	49.82	68.30	-18.48	41.91	42.36	17.60	52.05	--	--	Peak																																																																																									






Mode	27																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>11650.00</td><td>62.92</td><td>74.00</td><td>-11.08</td><td>58.68</td><td>39.92</td><td>14.93</td><td>50.61</td><td>100</td><td>12</td><td></td><td></td><td></td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>52.91</td><td>54.00</td><td>-1.09</td><td>48.67</td><td>39.92</td><td>14.93</td><td>50.61</td><td>100</td><td>12</td><td></td><td></td><td></td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>50.19</td><td>68.30</td><td>-18.11</td><td>42.42</td><td>42.31</td><td>17.63</td><td>52.17</td><td>--</td><td>--</td><td></td><td></td><td></td><td>Peak</td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg				1	11650.00	62.92	74.00	-11.08	58.68	39.92	14.93	50.61	100	12				Peak	2	11650.00	52.91	54.00	-1.09	48.67	39.92	14.93	50.61	100	12				Average	3	17475.00	50.19	68.30	-18.11	42.42	42.31	17.63	52.17	--	--				Peak
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																								
	1	11650.00	62.92	74.00	-11.08	58.68	39.92	14.93	50.61	100	12				Peak																																																																																					
2	11650.00	52.91	54.00	-1.09	48.67	39.92	14.93	50.61	100	12				Average																																																																																						
3	17475.00	50.19	68.30	-18.11	42.42	42.31	17.63	52.17	--	--				Peak																																																																																						
Vertical																																																																																																				
Level (dBuV/m) Date: 2024-03-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>11650.00</td><td>61.77</td><td>74.00</td><td>-12.23</td><td>57.53</td><td>39.92</td><td>14.93</td><td>50.61</td><td>158</td><td>354</td><td></td><td></td><td></td><td>Peak</td></tr><tr><td>2</td><td>11650.00</td><td>52.17</td><td>54.00</td><td>-1.83</td><td>47.93</td><td>39.92</td><td>14.93</td><td>50.61</td><td>158</td><td>354</td><td></td><td></td><td></td><td>Average</td></tr><tr><td>3</td><td>17475.00</td><td>49.38</td><td>68.30</td><td>-18.92</td><td>41.61</td><td>42.31</td><td>17.63</td><td>52.17</td><td>--</td><td>--</td><td></td><td></td><td></td><td>Peak</td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg				1	11650.00	61.77	74.00	-12.23	57.53	39.92	14.93	50.61	158	354				Peak	2	11650.00	52.17	54.00	-1.83	47.93	39.92	14.93	50.61	158	354				Average	3	17475.00	49.38	68.30	-18.92	41.61	42.31	17.63	52.17	--	--				Peak	
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																									
1	11650.00	61.77	74.00	-12.23	57.53	39.92	14.93	50.61	158	354				Peak																																																																																						
2	11650.00	52.17	54.00	-1.83	47.93	39.92	14.93	50.61	158	354				Average																																																																																						
3	17475.00	49.38	68.30	-18.92	41.61	42.31	17.63	52.17	--	--				Peak																																																																																						



Mode	28																																																																																																																												
	Band Edge																																																																																																																												
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																												
ANT	SISO																																																																																																																												
Pol.	Horizontal					Fundamental																																																																																																																							
Peak	Date: 2024-03-31 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5606.82</td><td>53.70</td><td>68.30</td><td>-14.60</td><td>39.33</td><td>34.95</td><td>11.71</td><td>32.29</td><td>208</td><td>151 PEAK</td></tr><tr><td>2</td><td>5650.03</td><td>54.05</td><td>68.32</td><td>-14.27</td><td>39.68</td><td>35.01</td><td>11.69</td><td>32.33</td><td>208</td><td>151 PEAK</td></tr><tr><td>3</td><td>5718.32</td><td>79.38</td><td>110.33</td><td>-30.95</td><td>64.99</td><td>35.11</td><td>11.66</td><td>32.38</td><td>208</td><td>151 PEAK</td></tr><tr><td>4</td><td>5721.08</td><td>80.16</td><td>113.25</td><td>-33.09</td><td>65.77</td><td>35.11</td><td>11.66</td><td>32.38</td><td>208</td><td>151 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5606.82	53.70	68.30	-14.60	39.33	34.95	11.71	32.29	208	151 PEAK	2	5650.03	54.05	68.32	-14.27	39.68	35.01	11.69	32.33	208	151 PEAK	3	5718.32	79.38	110.33	-30.95	64.99	35.11	11.66	32.38	208	151 PEAK	4	5721.08	80.16	113.25	-33.09	65.77	35.11	11.66	32.38	208	151 PEAK	Date: 2024-03-31 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>101.03</td><td>-----</td><td>-----</td><td>86.64</td><td>35.14</td><td>11.65</td><td>32.40</td><td>208</td><td>151 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	101.03	-----	-----	86.64	35.14	11.65	32.40	208	151 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5606.82	53.70	68.30	-14.60	39.33	34.95	11.71	32.29	208	151 PEAK																																																																																																																			
2	5650.03	54.05	68.32	-14.27	39.68	35.01	11.69	32.33	208	151 PEAK																																																																																																																			
3	5718.32	79.38	110.33	-30.95	64.99	35.11	11.66	32.38	208	151 PEAK																																																																																																																			
4	5721.08	80.16	113.25	-33.09	65.77	35.11	11.66	32.38	208	151 PEAK																																																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5745.00	101.03	-----	-----	86.64	35.14	11.65	32.40	208	151 PEAK																																																																																																																			
Avg	Blank					Date: 2024-03-31 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5745.00</td><td>93.60</td><td>-----</td><td>-----</td><td>79.22</td><td>35.14</td><td>11.64</td><td>32.40</td><td>208</td><td>151 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5745.00	93.60	-----	-----	79.22	35.14	11.64	32.40	208	151 AVERAGE																																																																										
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5745.00	93.60	-----	-----	79.22	35.14	11.64	32.40	208	151 AVERAGE																																																																																																																			

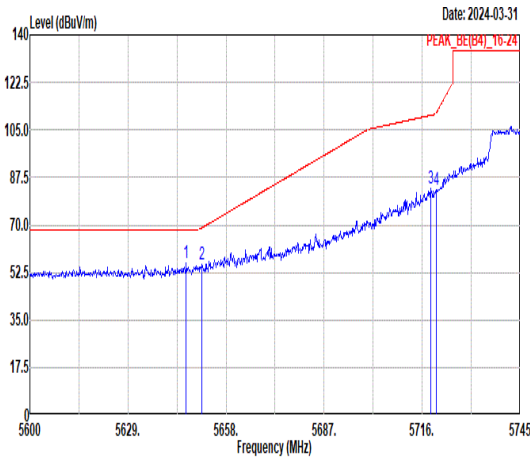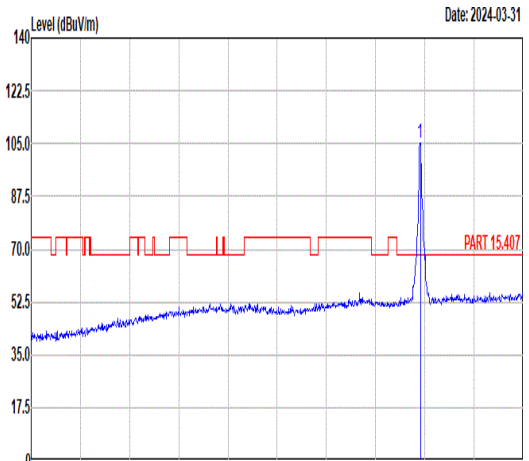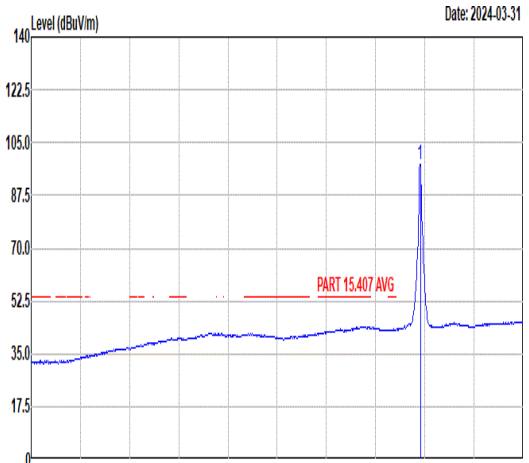

Mode	28																																																																																																																							
	Band Edge																																																																																																																							
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																		
Peak	Date: 2024-03-31 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5646.26</td><td>55.81</td><td>68.30</td><td>-12.49</td><td>41.44</td><td>35.00</td><td>11.69</td><td>32.32</td><td>200</td><td>43 PEAK</td></tr><tr><td>2 5650.90</td><td>55.60</td><td>68.96</td><td>-13.36</td><td>41.23</td><td>35.01</td><td>11.69</td><td>32.33</td><td>200</td><td>43 PEAK</td></tr><tr><td>3 5718.47</td><td>83.41</td><td>110.37</td><td>-26.96</td><td>69.02</td><td>35.11</td><td>11.66</td><td>32.38</td><td>200</td><td>43 PEAK</td></tr><tr><td>4 5720.21</td><td>82.87</td><td>111.27</td><td>-28.40</td><td>68.48</td><td>35.11</td><td>11.66</td><td>32.38</td><td>200</td><td>43 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5646.26	55.81	68.30	-12.49	41.44	35.00	11.69	32.32	200	43 PEAK	2 5650.90	55.60	68.96	-13.36	41.23	35.01	11.69	32.33	200	43 PEAK	3 5718.47	83.41	110.37	-26.96	69.02	35.11	11.66	32.38	200	43 PEAK	4 5720.21	82.87	111.27	-28.40	68.48	35.11	11.66	32.38	200	43 PEAK	Date: 2024-03-31 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>105.37</td><td>-----</td><td>-----</td><td>90.98</td><td>35.14</td><td>11.65</td><td>32.40</td><td>200</td><td>43 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5745.00	105.37	-----	-----	90.98	35.14	11.65	32.40	200	43 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5646.26	55.81	68.30	-12.49	41.44	35.00	11.69	32.32	200	43 PEAK																																																																																																															
2 5650.90	55.60	68.96	-13.36	41.23	35.01	11.69	32.33	200	43 PEAK																																																																																																															
3 5718.47	83.41	110.37	-26.96	69.02	35.11	11.66	32.38	200	43 PEAK																																																																																																															
4 5720.21	82.87	111.27	-28.40	68.48	35.11	11.66	32.38	200	43 PEAK																																																																																																															
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5745.00	105.37	-----	-----	90.98	35.14	11.65	32.40	200	43 PEAK																																																																																																															
Avg	Blank					Date: 2024-03-31 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5745.00</td><td>97.92</td><td>-----</td><td>-----</td><td>83.53</td><td>35.14</td><td>11.65</td><td>32.40</td><td>200</td><td>43 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5745.00	97.92	-----	-----	83.53	35.14	11.65	32.40	200	43 AVERAGE																																																																						
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1 5745.00	97.92	-----	-----	83.53	35.14	11.65	32.40	200	43 AVERAGE																																																																																																															



Mode	28																																																																																																			
	Harmonic																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																			
ANT	SISO																																																																																																			
Pol.	Horizontal																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-03-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>11490.00</td><td>61.20</td><td>74.00</td><td>-12.80</td><td>57.28</td><td>39.79</td><td>14.83</td><td>50.70</td><td>201</td><td>61</td><td>Peak</td><td colspan="3"></td></tr><tr><td>2</td><td>11490.00</td><td>52.53</td><td>54.00</td><td>-1.47</td><td>48.61</td><td>39.79</td><td>14.83</td><td>50.70</td><td>201</td><td>61</td><td>Average</td><td colspan="3"></td></tr><tr><td>3</td><td>17235.00</td><td>50.58</td><td>68.30</td><td>-17.72</td><td>42.53</td><td>42.41</td><td>17.57</td><td>51.93</td><td>--</td><td>--</td><td>Peak</td><td colspan="3"></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11490.00	61.20	74.00	-12.80	57.28	39.79	14.83	50.70	201	61	Peak				2	11490.00	52.53	54.00	-1.47	48.61	39.79	14.83	50.70	201	61	Average				3	17235.00	50.58	68.30	-17.72	42.53	42.41	17.57	51.93	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
	1	11490.00	61.20	74.00	-12.80	57.28	39.79	14.83	50.70	201	61	Peak																																																																																								
2	11490.00	52.53	54.00	-1.47	48.61	39.79	14.83	50.70	201	61	Average																																																																																									
3	17235.00	50.58	68.30	-17.72	42.53	42.41	17.57	51.93	--	--	Peak																																																																																									
Level (dBuV/m) Date: 2024-03-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="6">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="5"></th></tr><tr><td>1</td><td>11490.00</td><td>62.61</td><td>74.00</td><td>-11.39</td><td>58.69</td><td>39.79</td><td>14.83</td><td>50.70</td><td>204</td><td>353</td><td>Peak</td><td colspan="3"></td></tr><tr><td>2</td><td>11490.00</td><td>52.87</td><td>54.00</td><td>-1.13</td><td>48.95</td><td>39.79</td><td>14.83</td><td>50.70</td><td>204</td><td>353</td><td>Average</td><td colspan="3"></td></tr><tr><td>3</td><td>17235.00</td><td>49.73</td><td>68.30</td><td>-18.57</td><td>41.68</td><td>42.41</td><td>17.57</td><td>51.93</td><td>--</td><td>--</td><td>Peak</td><td colspan="3"></td></tr></table>													Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11490.00	62.61	74.00	-11.39	58.69	39.79	14.83	50.70	204	353	Peak				2	11490.00	52.87	54.00	-1.13	48.95	39.79	14.83	50.70	204	353	Average				3	17235.00	49.73	68.30	-18.57	41.68	42.41	17.57	51.93	--	--	Peak				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	11490.00	62.61	74.00	-11.39	58.69	39.79	14.83	50.70	204	353	Peak																																																																																									
2	11490.00	52.87	54.00	-1.13	48.95	39.79	14.83	50.70	204	353	Average																																																																																									
3	17235.00	49.73	68.30	-18.57	41.68	42.41	17.57	51.93	--	--	Peak																																																																																									



Mode	29																																																																																																																																																																																															
	Harmonic																																																																																																																																																																																															
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																																																																																																															
ANT	SISO																																																																																																																																																																																															
Pol.	Horizontal							Vertical																																																																																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-03-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11570.00</td><td>59.88</td><td>74.00</td><td>-14.12</td><td>55.80</td><td>39.86</td><td>14.88</td><td>50.66</td><td>201</td><td>61</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>11570.00</td><td>51.09</td><td>54.00</td><td>-2.91</td><td>47.01</td><td>39.86</td><td>14.88</td><td>50.66</td><td>201</td><td>61</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>17355.00</td><td>50.33</td><td>68.30</td><td>-17.97</td><td>42.42</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11570.00	59.88	74.00	-14.12	55.80	39.86	14.88	50.66	201	61	Peak				2	11570.00	51.09	54.00	-2.91	47.01	39.86	14.88	50.66	201	61	Average				3	17355.00	50.33	68.30	-17.97	42.42	42.36	17.60	52.05	--	--	Peak				Level (dBuV/m) Date: 2024-03-29 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="4"></th><th></th></tr><tr><td>1</td><td>11570.00</td><td>61.50</td><td>74.00</td><td>-12.50</td><td>57.42</td><td>39.86</td><td>14.88</td><td>50.66</td><td>185</td><td>353</td><td>Peak</td><td colspan="2"></td><td></td></tr><tr><td>2</td><td>11570.00</td><td>52.14</td><td>54.00</td><td>-1.86</td><td>48.06</td><td>39.86</td><td>14.88</td><td>50.66</td><td>185</td><td>353</td><td>Average</td><td colspan="2"></td><td></td></tr><tr><td>3</td><td>17355.00</td><td>50.69</td><td>68.30</td><td>-17.61</td><td>42.78</td><td>42.36</td><td>17.60</td><td>52.05</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td></td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg						1	11570.00	61.50	74.00	-12.50	57.42	39.86	14.88	50.66	185	353	Peak				2	11570.00	52.14	54.00	-1.86	48.06	39.86	14.88	50.66	185	353	Average				3	17355.00	50.69	68.30	-17.61	42.78	42.36	17.60	52.05	--	--	Peak			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																						
1	11570.00	59.88	74.00	-14.12	55.80	39.86	14.88	50.66	201	61	Peak																																																																																																																																																																																					
2	11570.00	51.09	54.00	-2.91	47.01	39.86	14.88	50.66	201	61	Average																																																																																																																																																																																					
3	17355.00	50.33	68.30	-17.97	42.42	42.36	17.60	52.05	--	--	Peak																																																																																																																																																																																					
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	11570.00	61.50	74.00	-12.50	57.42	39.86	14.88	50.66	185	353	Peak																																																																																																																																																																																					
2	11570.00	52.14	54.00	-1.86	48.06	39.86	14.88	50.66	185	353	Average																																																																																																																																																																																					
3	17355.00	50.69	68.30	-17.61	42.78	42.36	17.60	52.05	--	--	Peak																																																																																																																																																																																					