


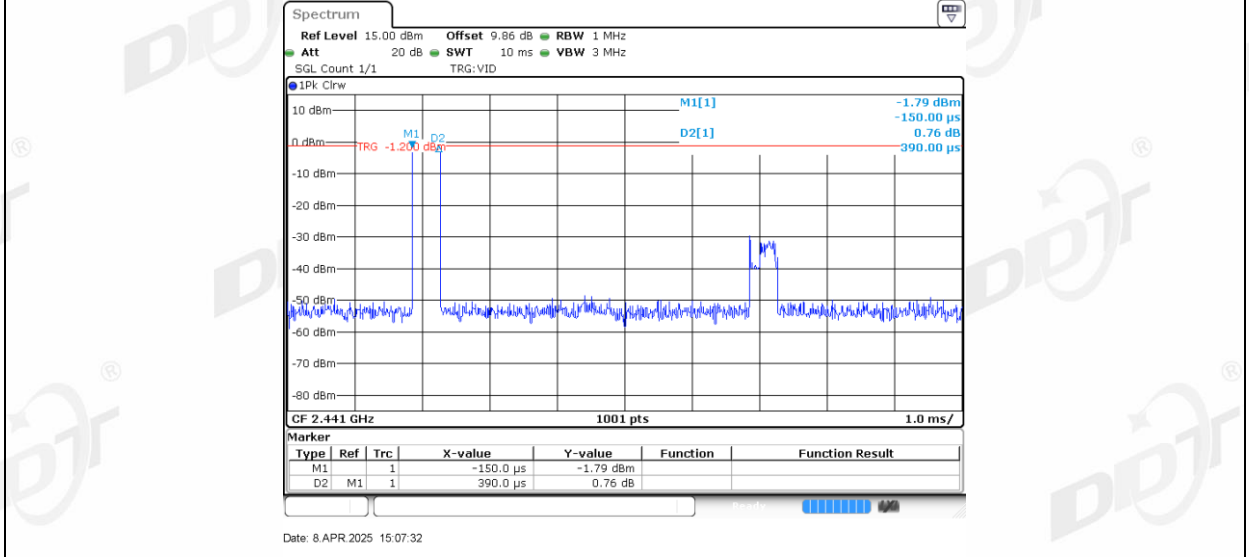


3DH1_Right side Hop


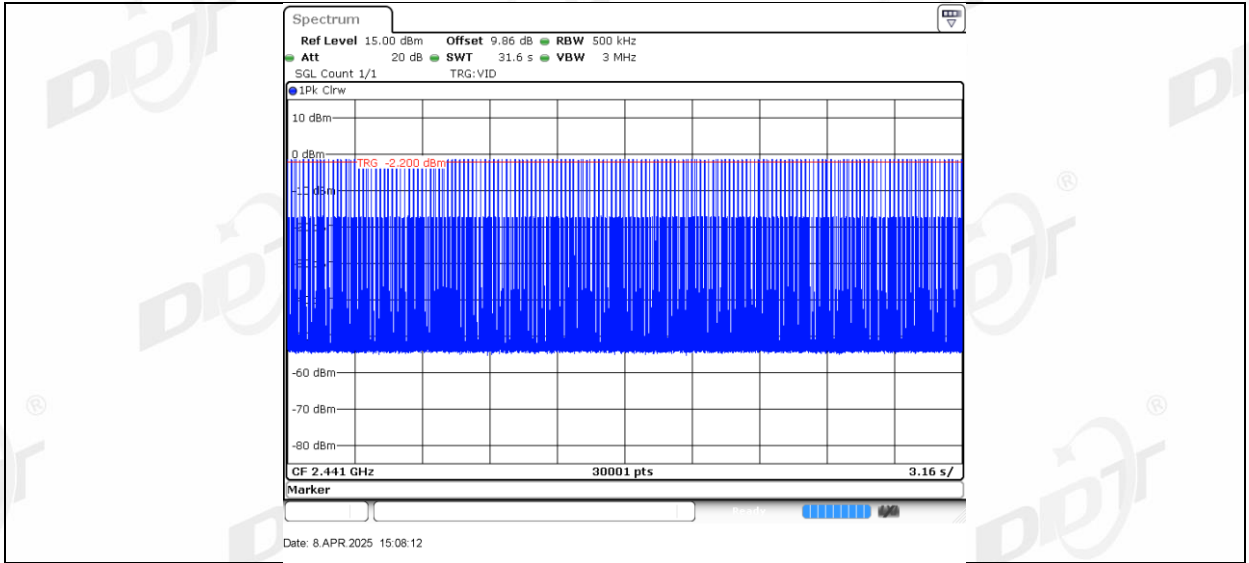


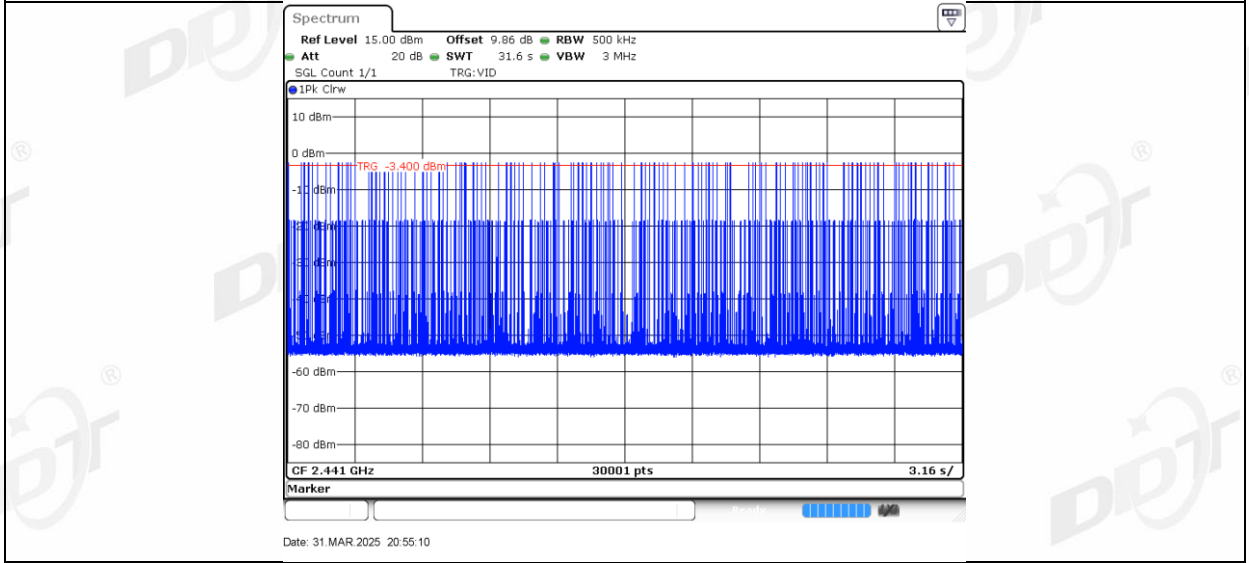


3DH3 Left side Hop

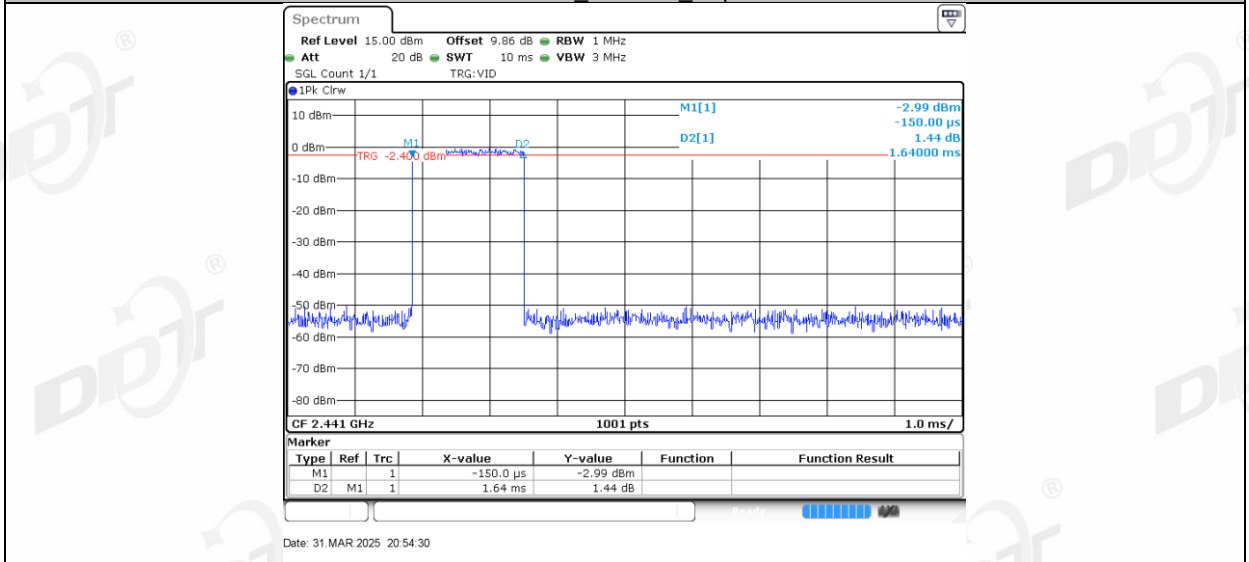


3DH3 Right side Hop

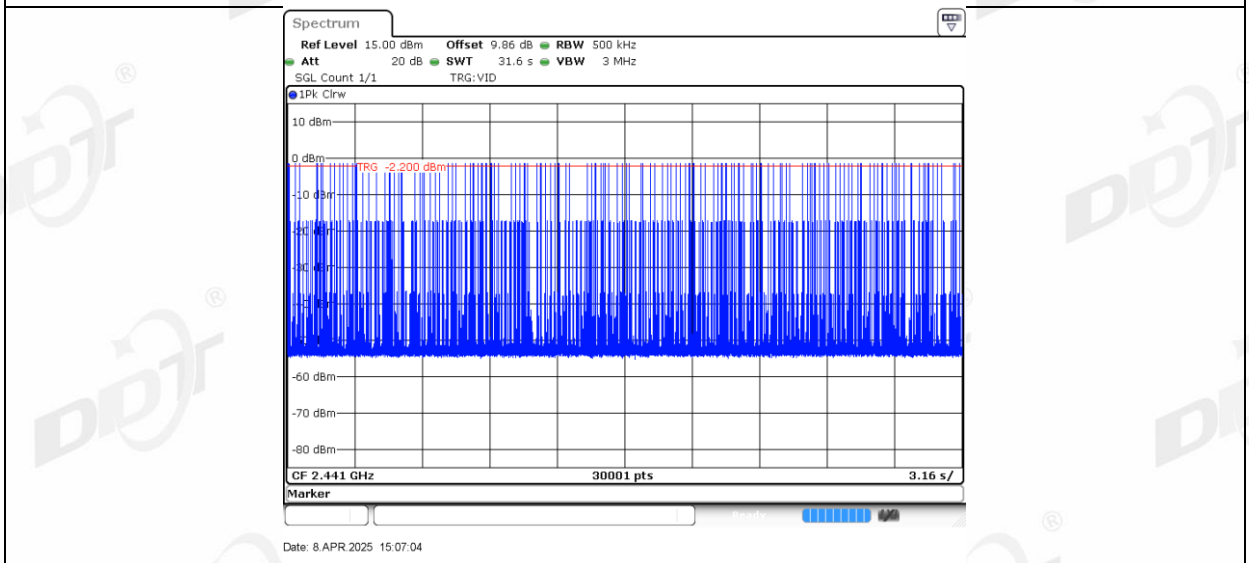
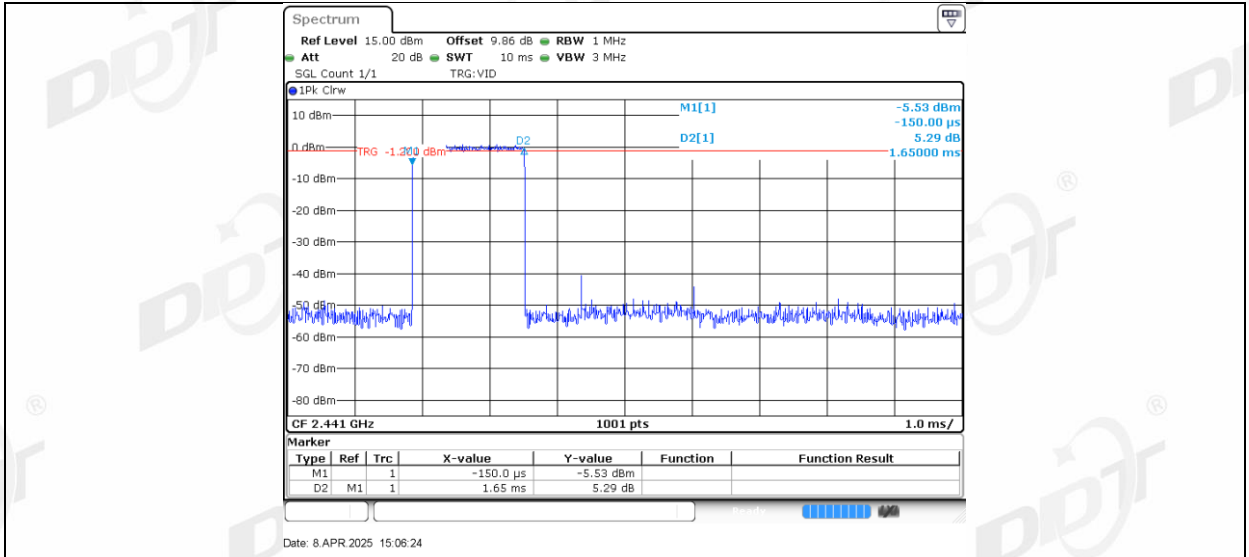


3DH5 Left side Hop

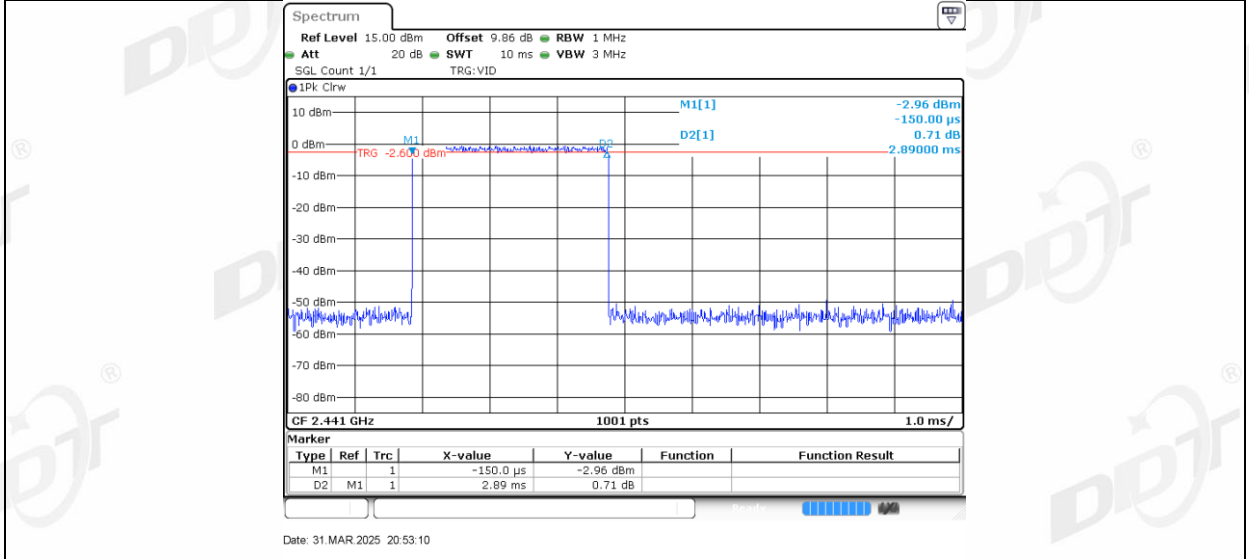

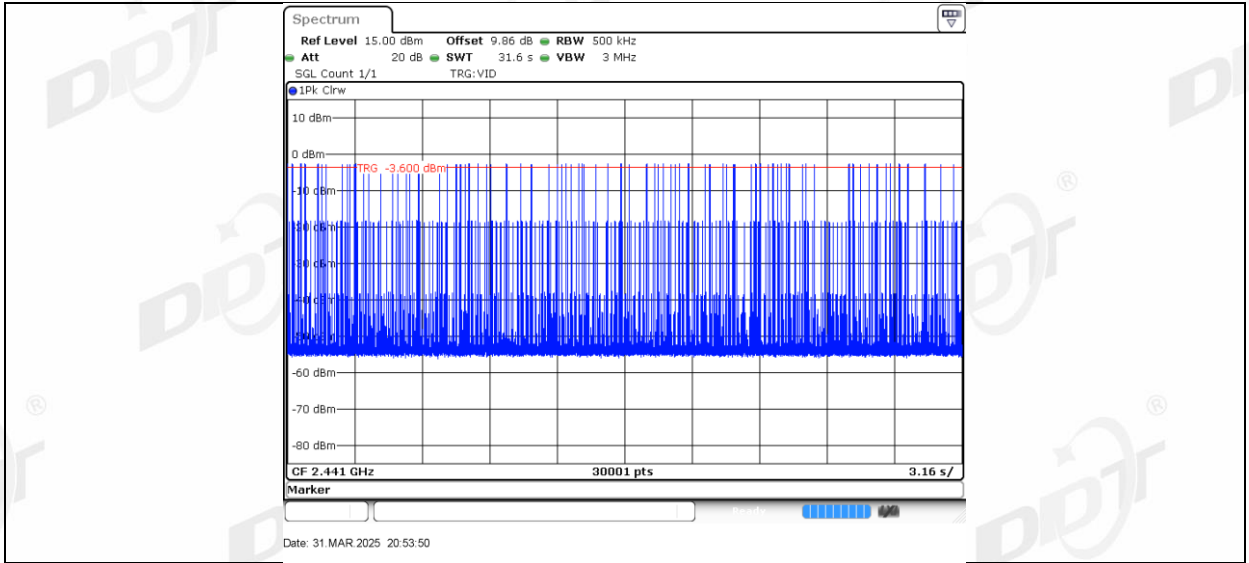


3DH5_Right side_Hop

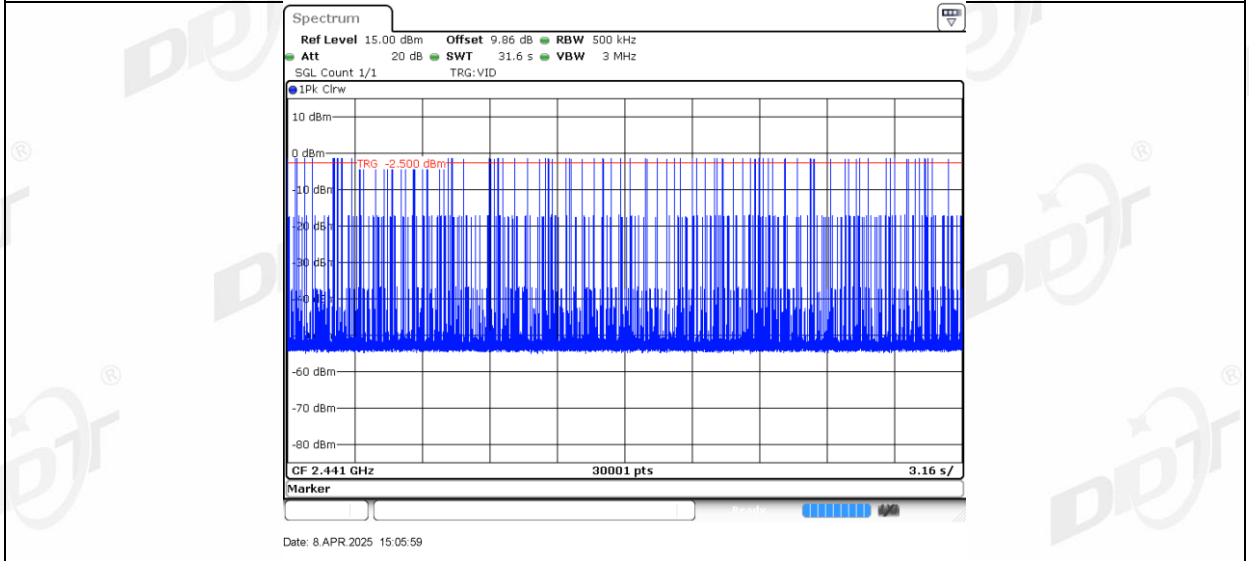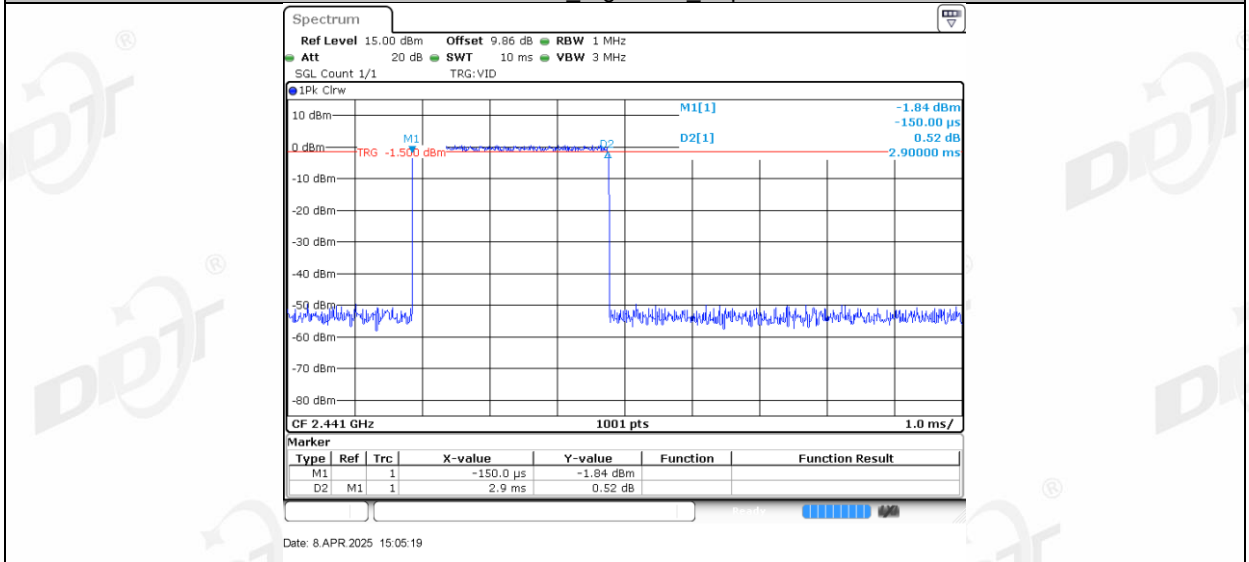

9. Number of Hopping Channel

9.1. Block diagram of test setup

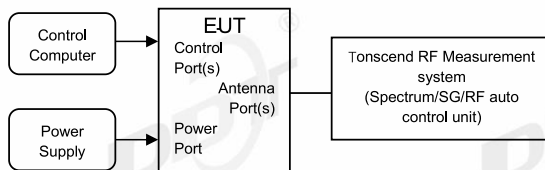

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	$VBW \geq RBW$.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.


9.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3-26.5℃,45.8-47.6%RH	Test Date:	2025.03.31-2025.04.08
Test Power Supply:	Battery	Sample Number:	S25032426-014


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Left side	Hop	79	≥15	PASS
	Right side	Hop	79	≥15	PASS
2DH5	Left side	Hop	79	≥15	PASS
	Right side	Hop	79	≥15	PASS
3DH5	Left side	Hop	79	≥15	PASS
	Right side	Hop	79	≥15	PASS

9.5. Test graphs

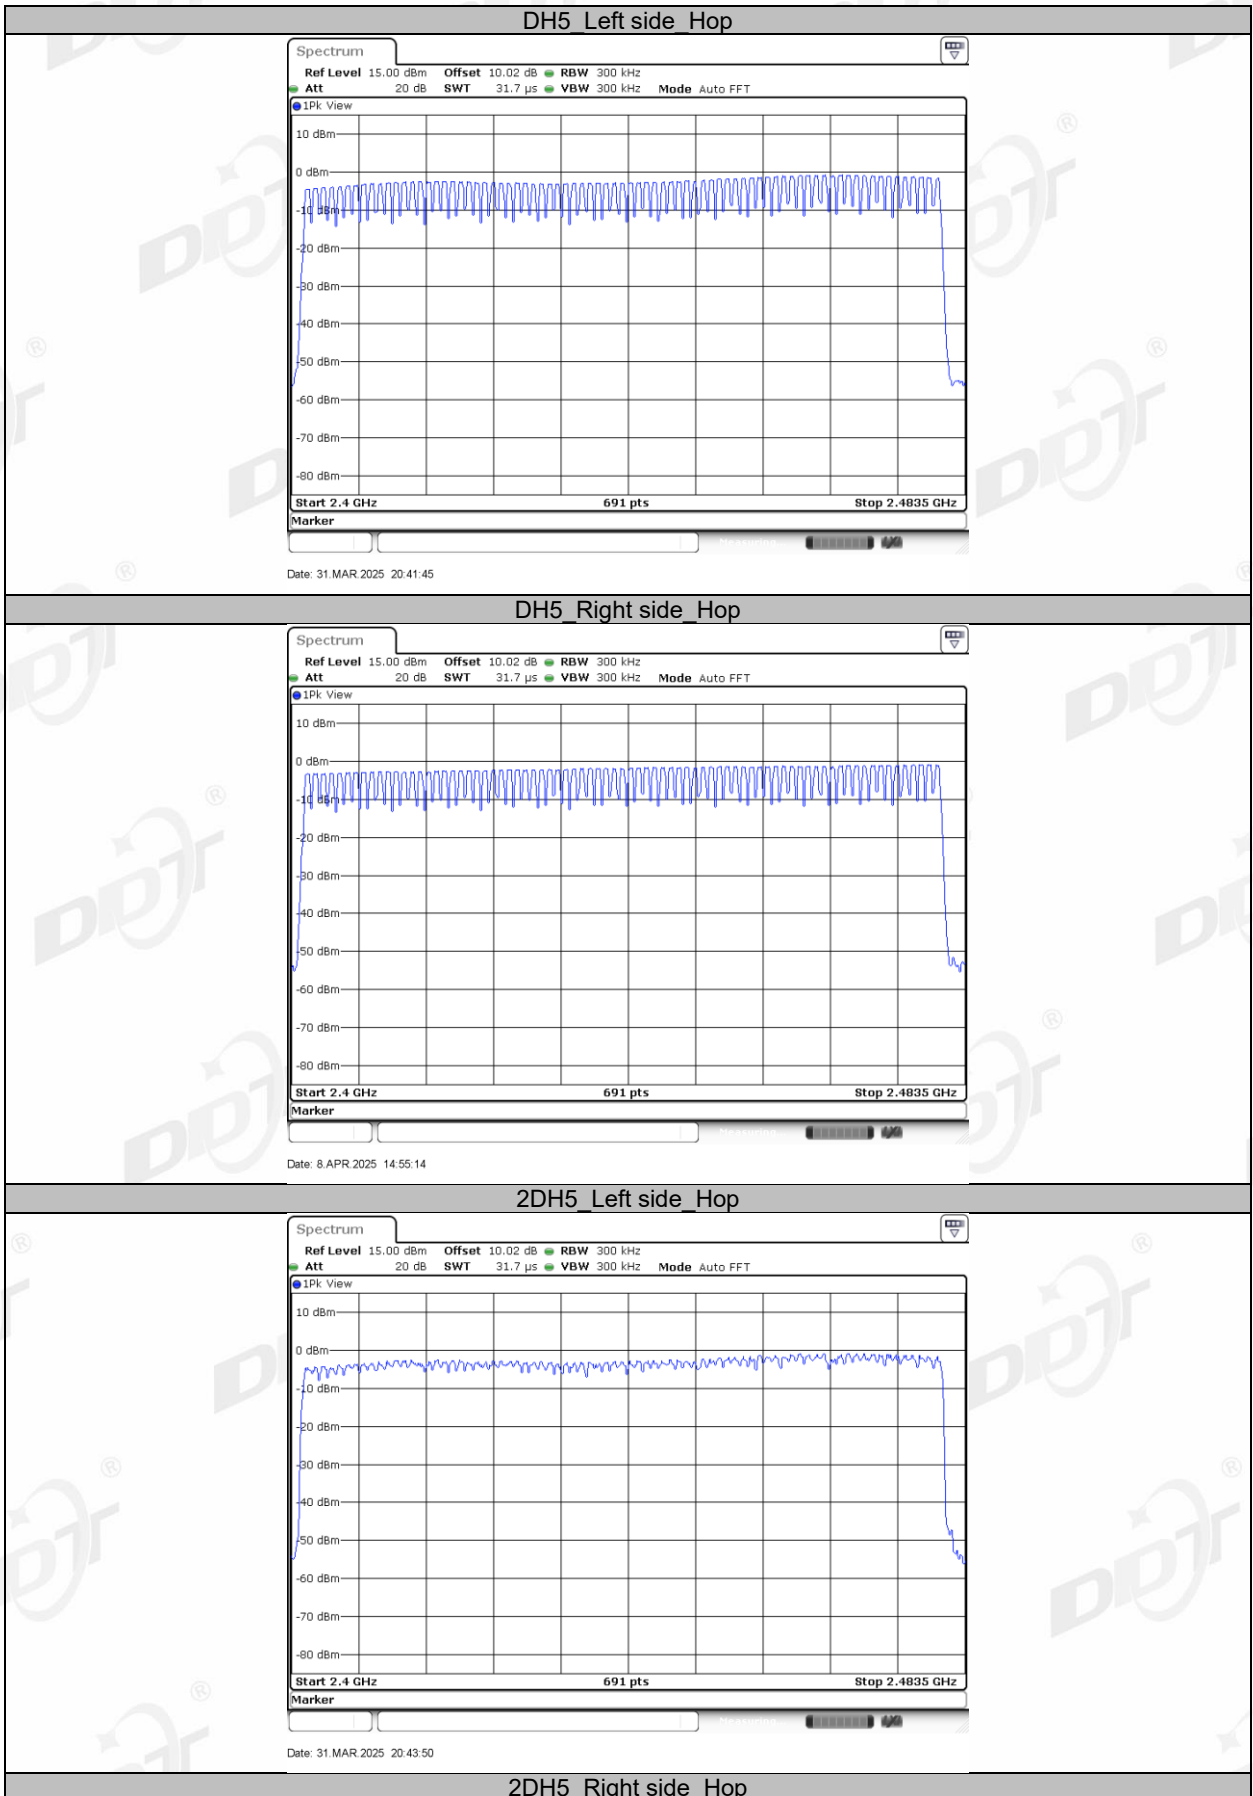


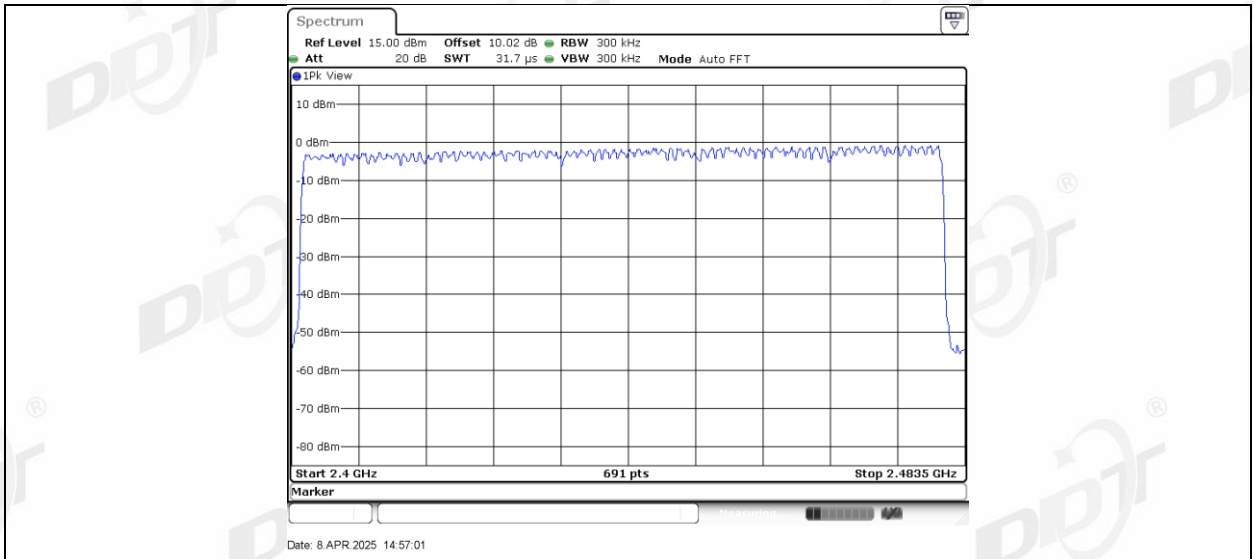

3DH5_Left side_Hop

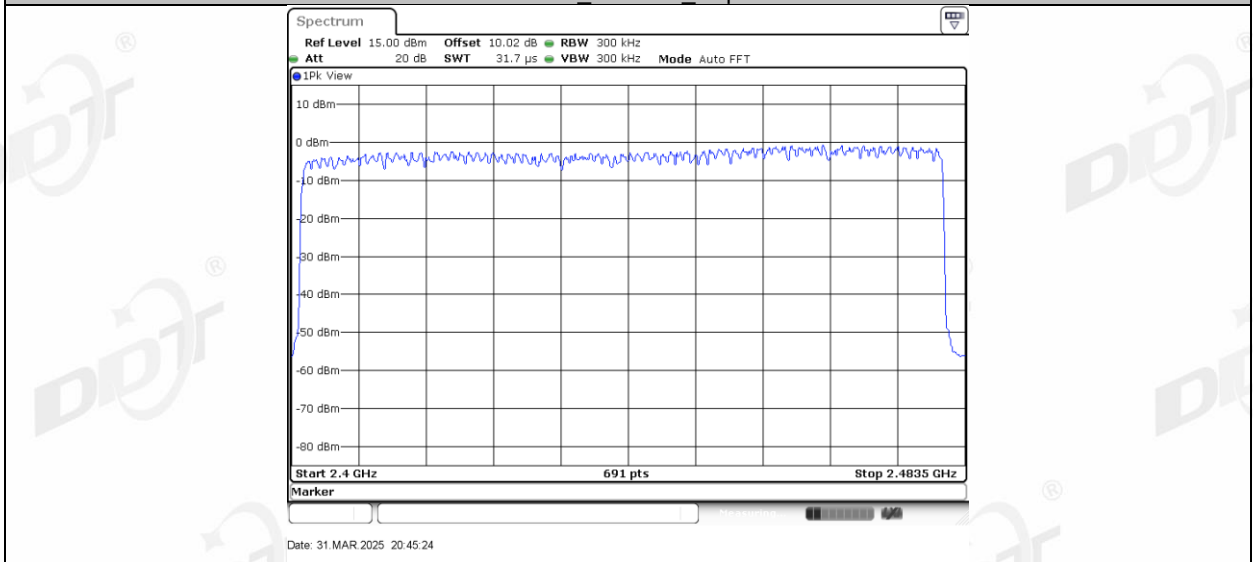


3DH5_Right side_Hop

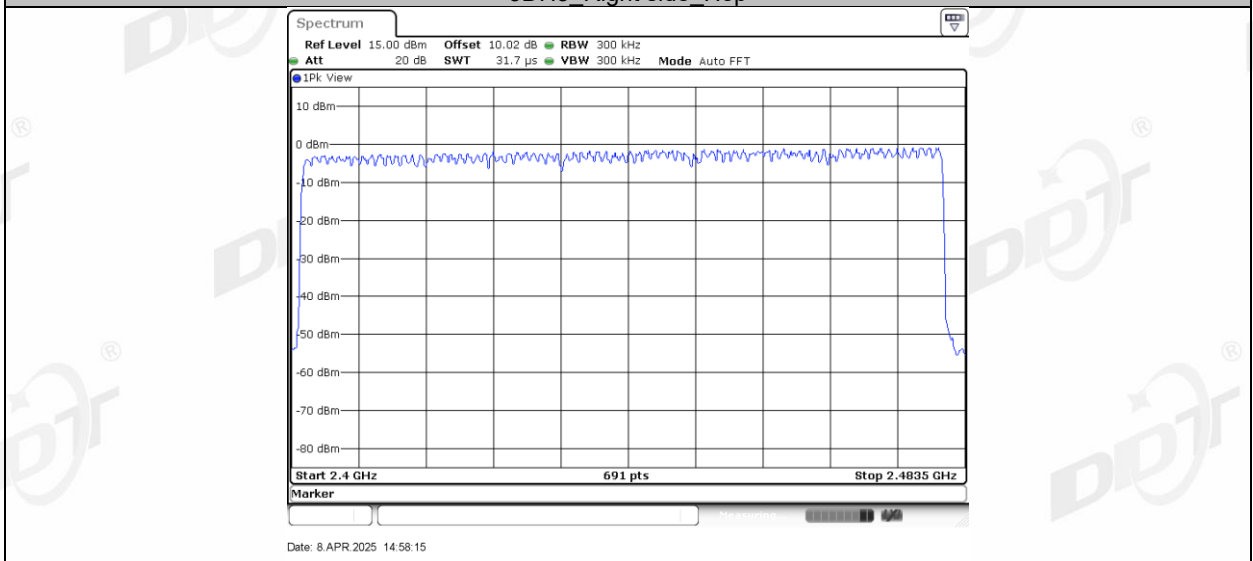

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

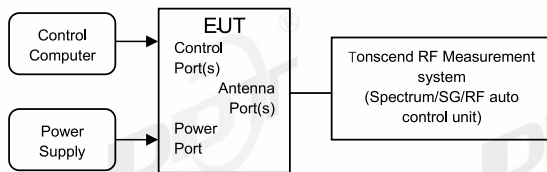

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3-26.5℃,45.8-47.6%RH	Test Date:	2025.03.31-2025.04.08
Test Power Supply:	Battery	Sample Number:	S25032426-014


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs




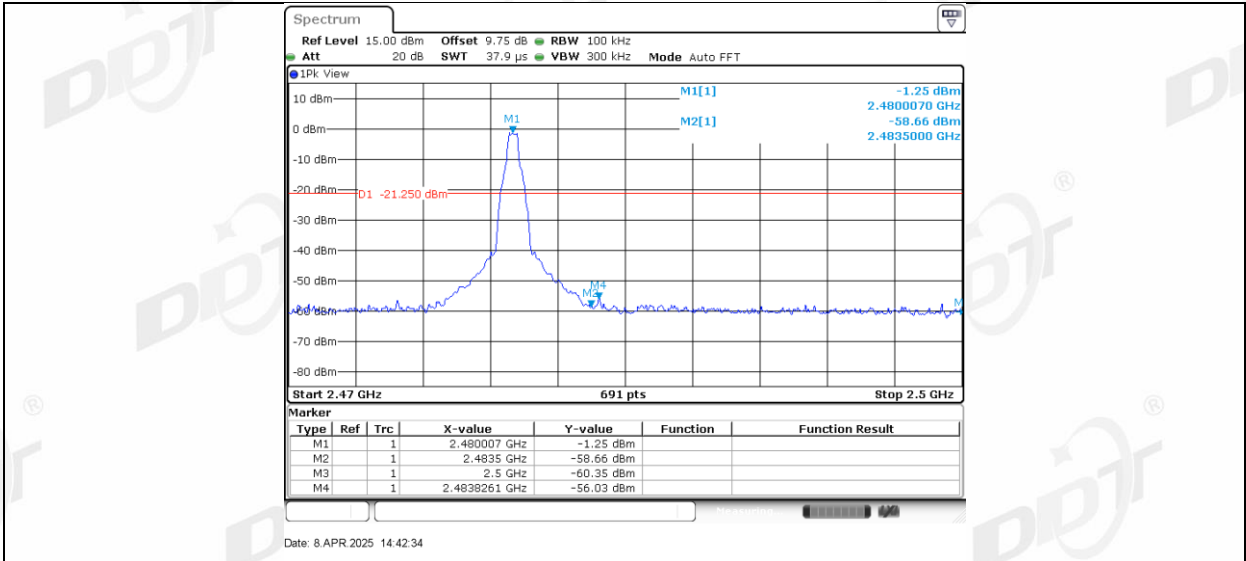


DH5 Left side Low Hop 2402

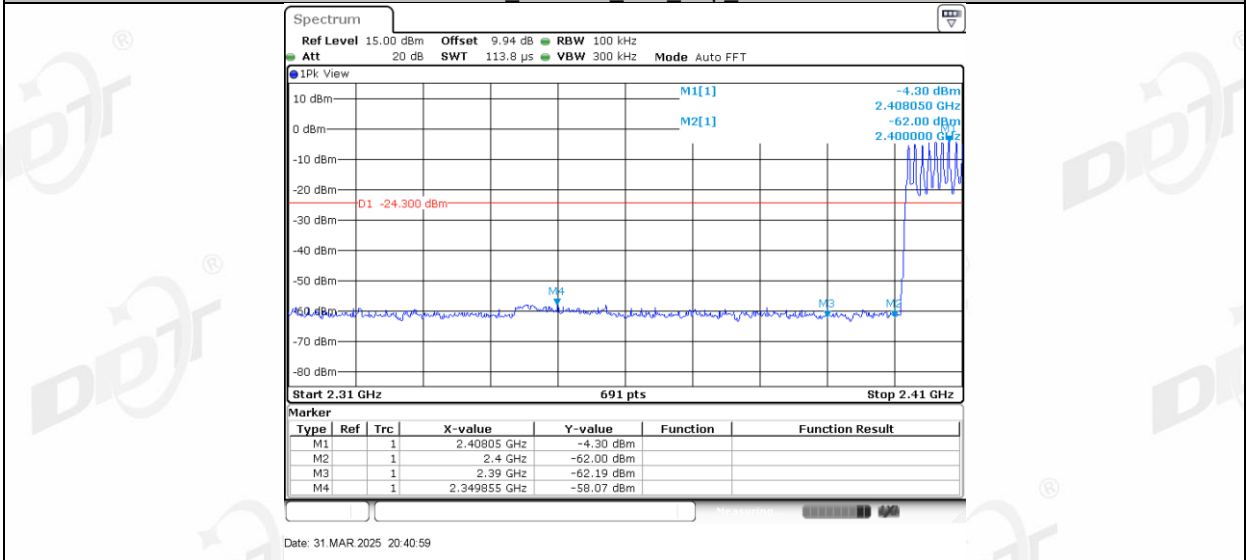


DH5 Right side Low Hop 2402

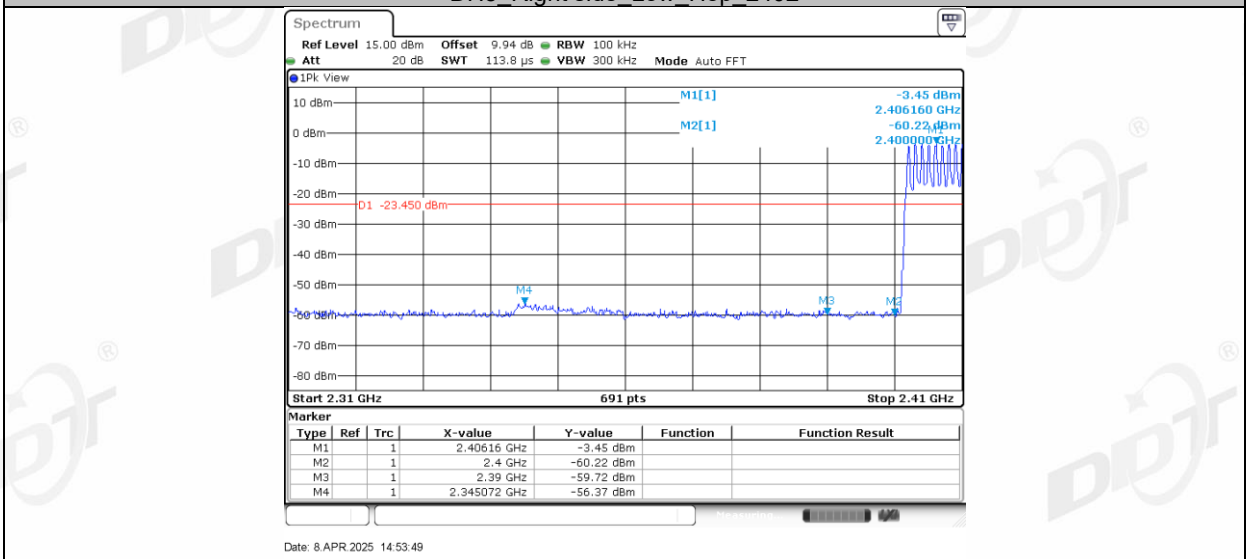


DH5 Left side High Hop 2480

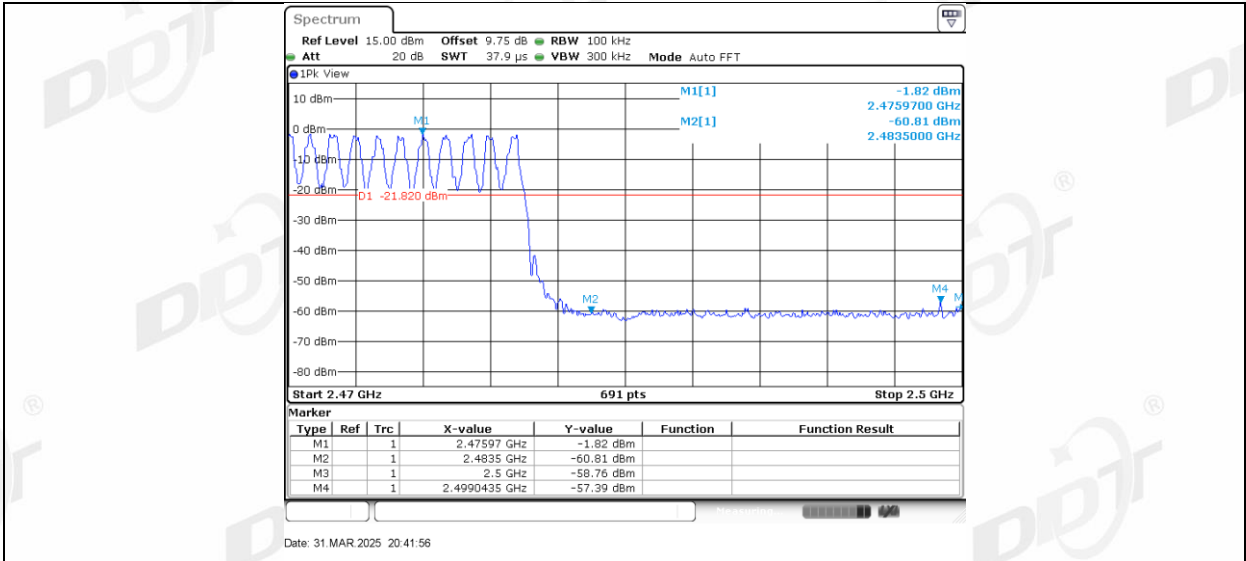




DH5 Right side High Hop 2480



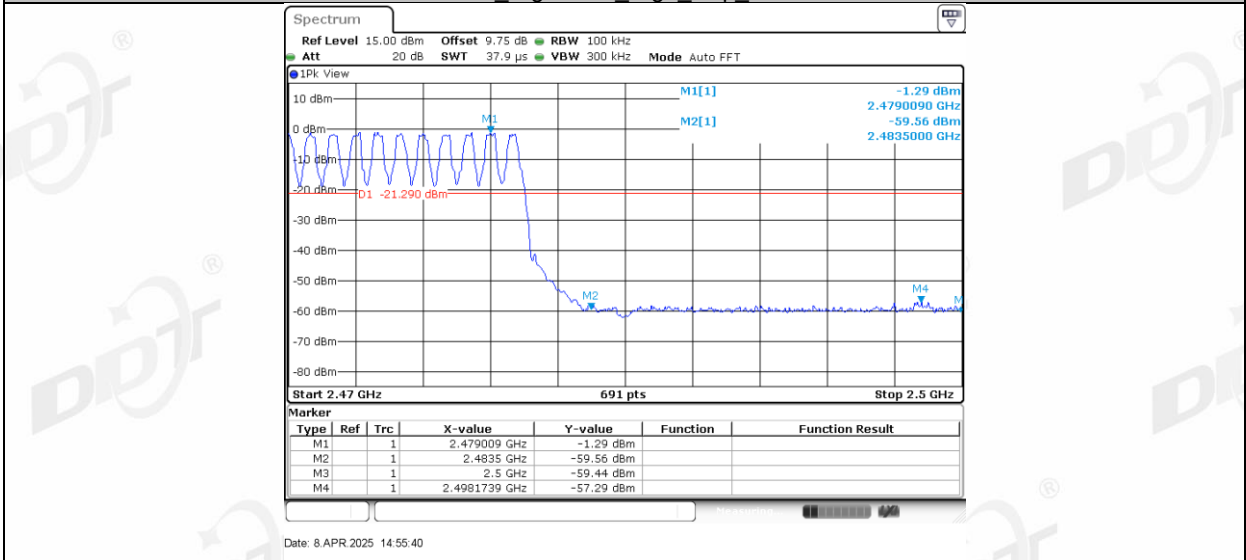


2DH5 Left side Low 2402



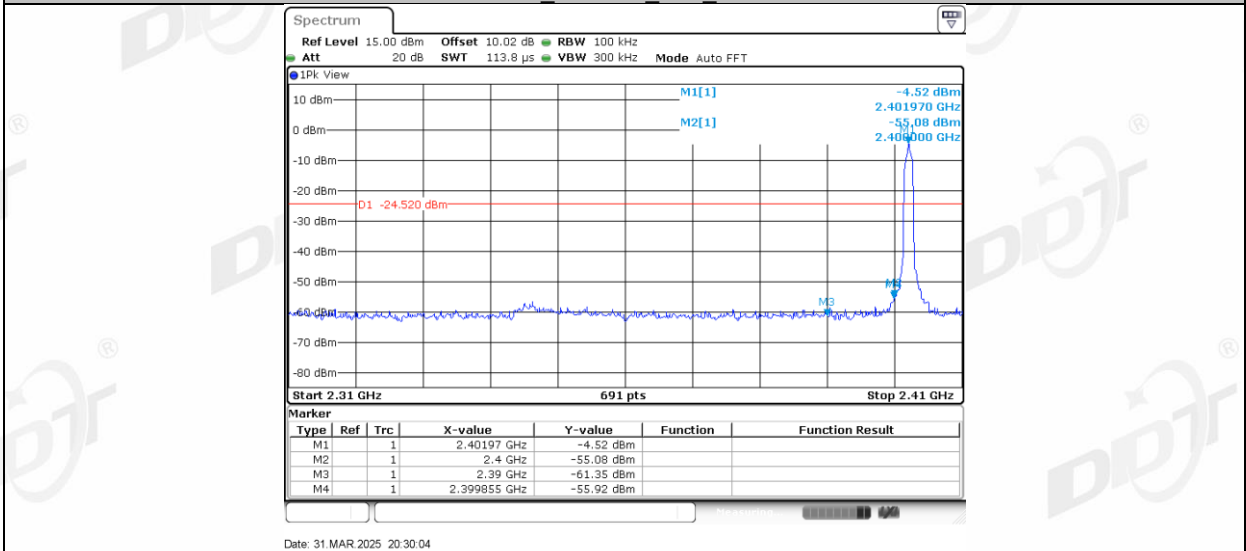





2DH5 Right side Low 2402

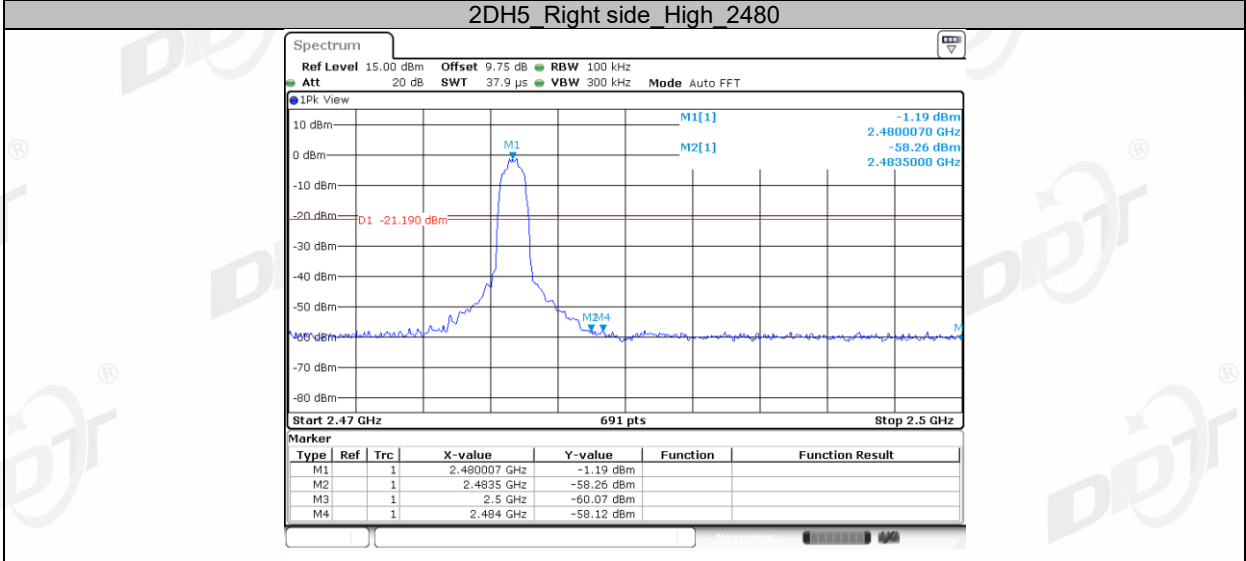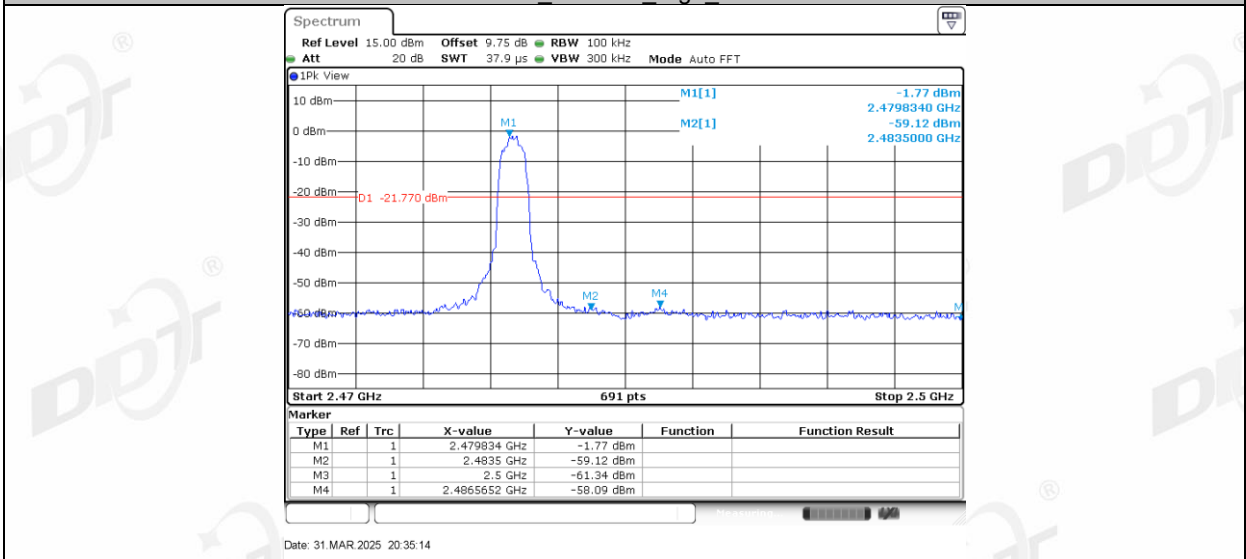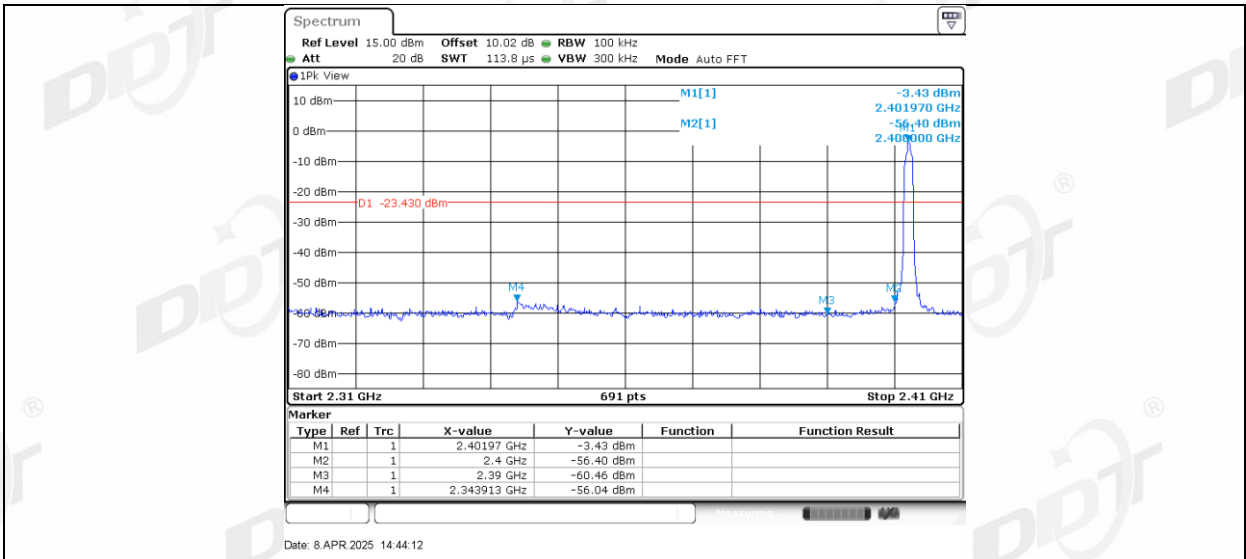

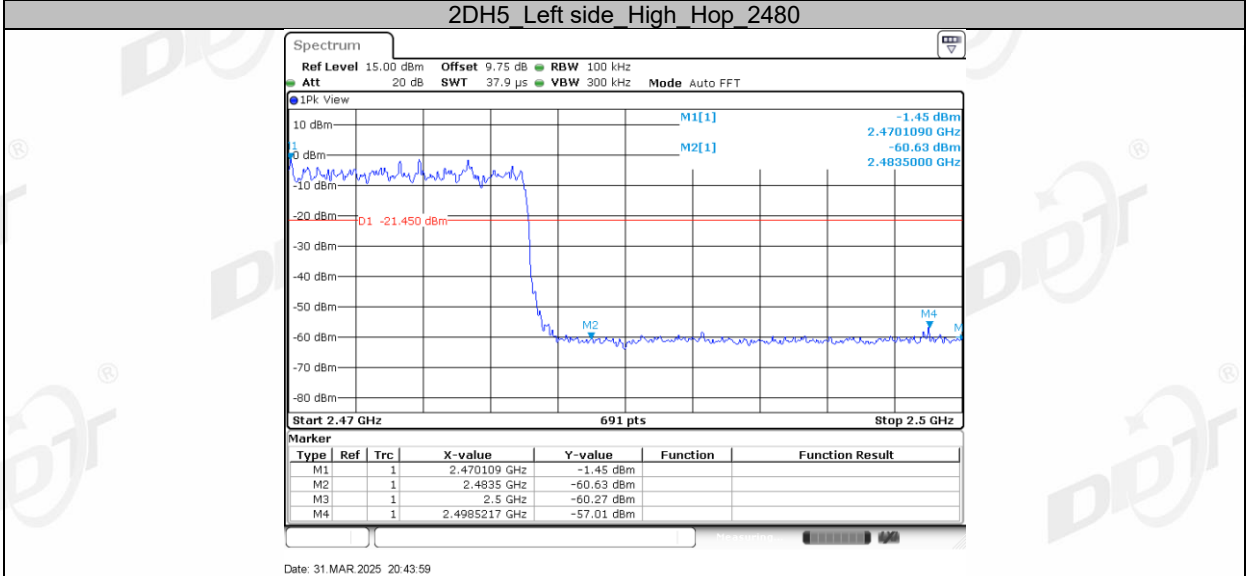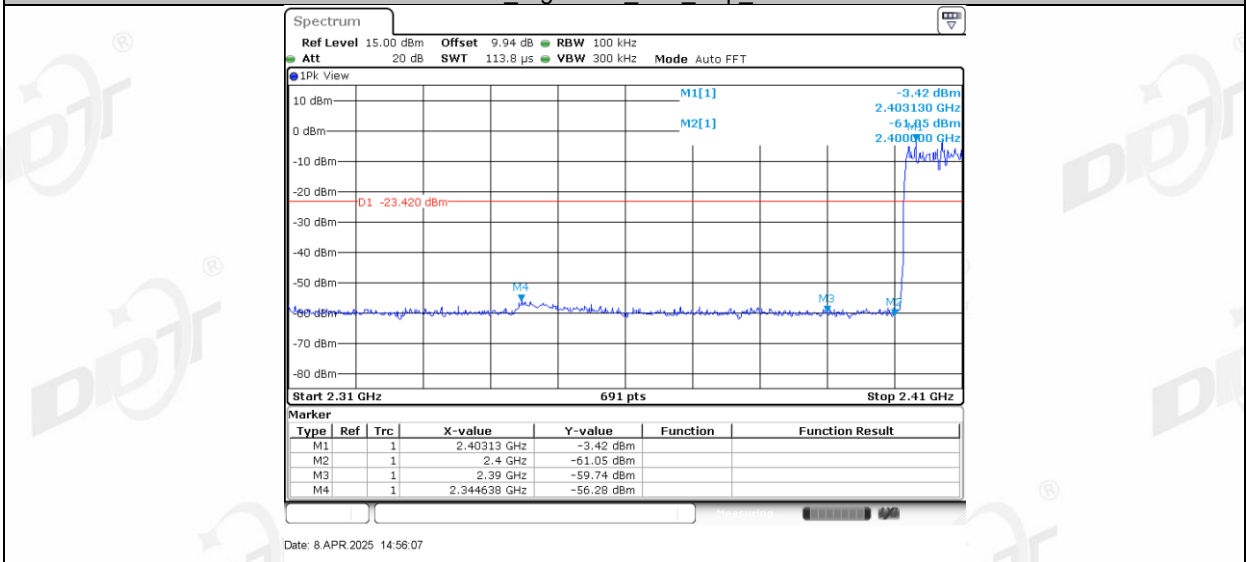
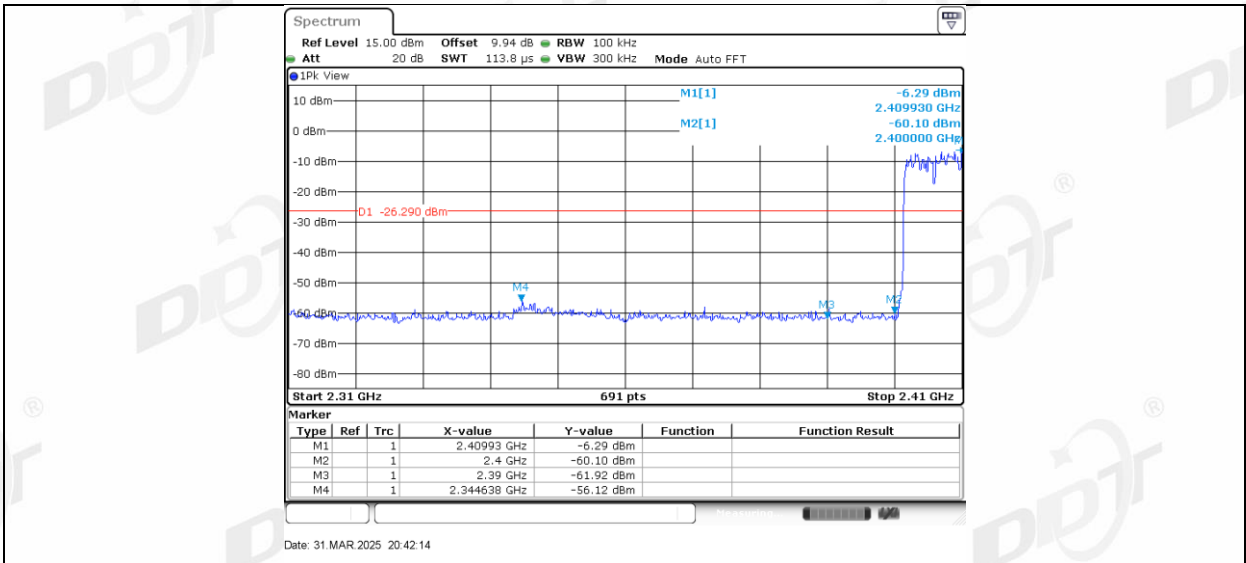


2DH5_Right side_High_Hop_2480

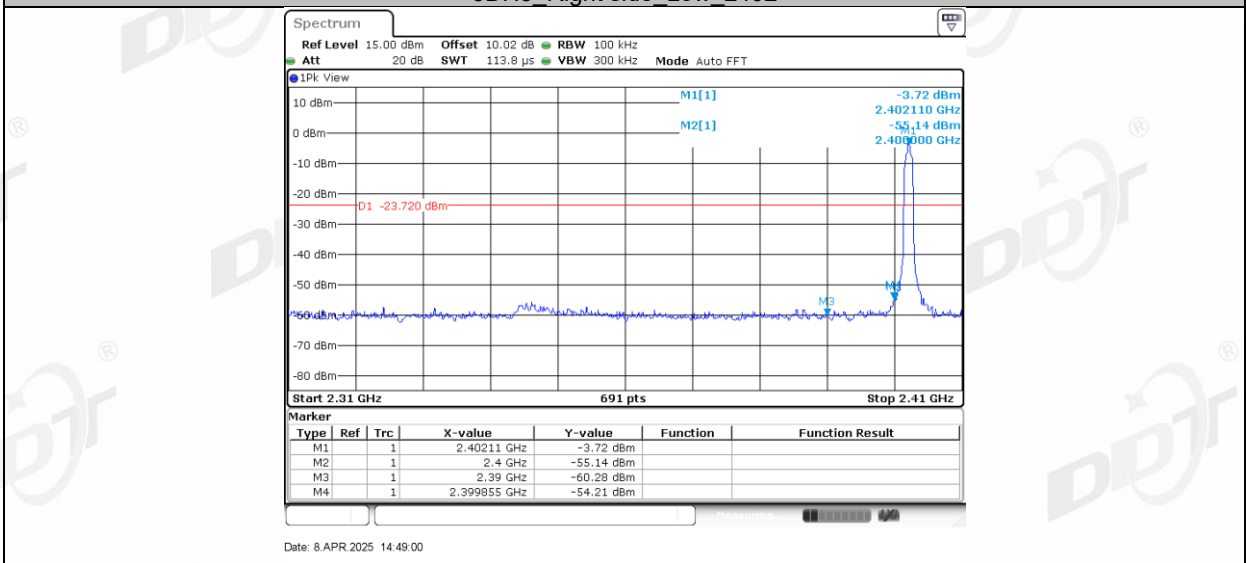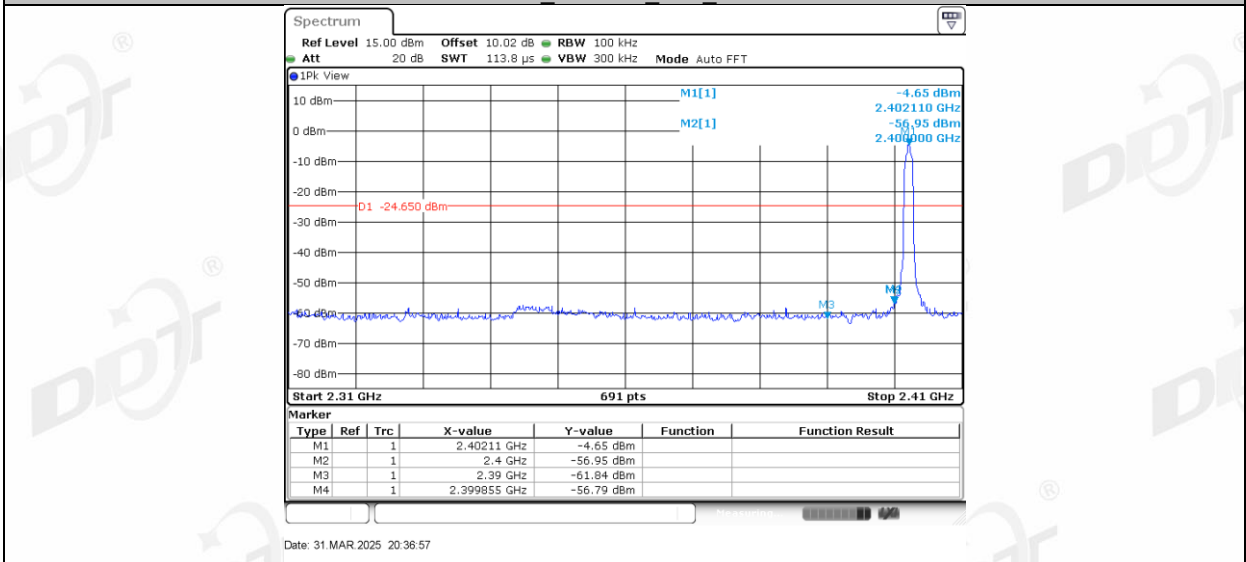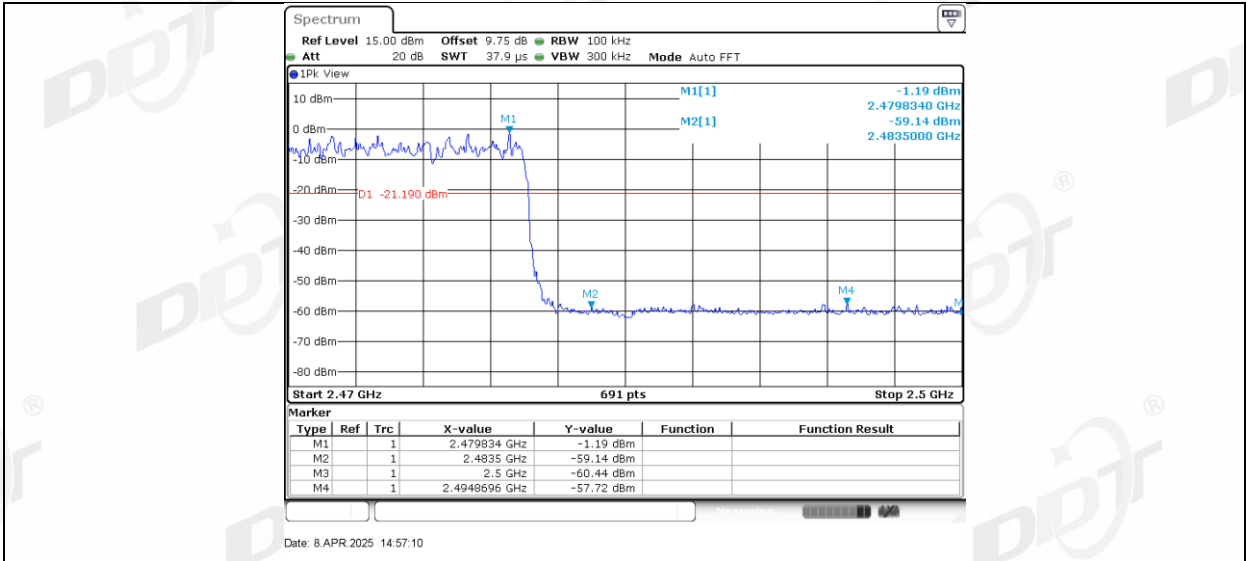

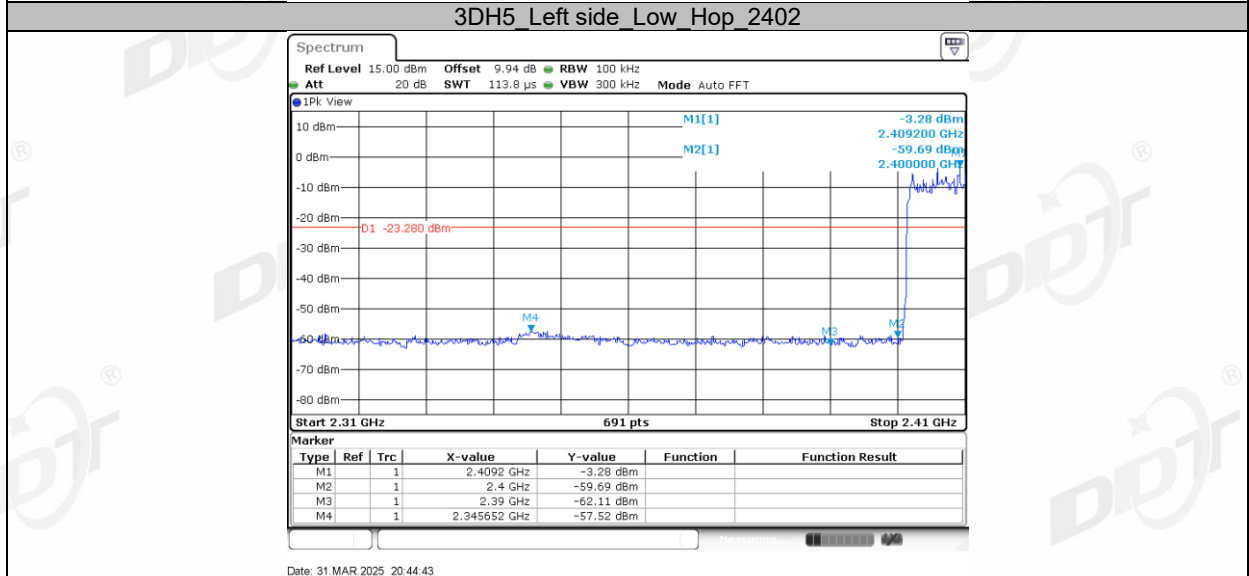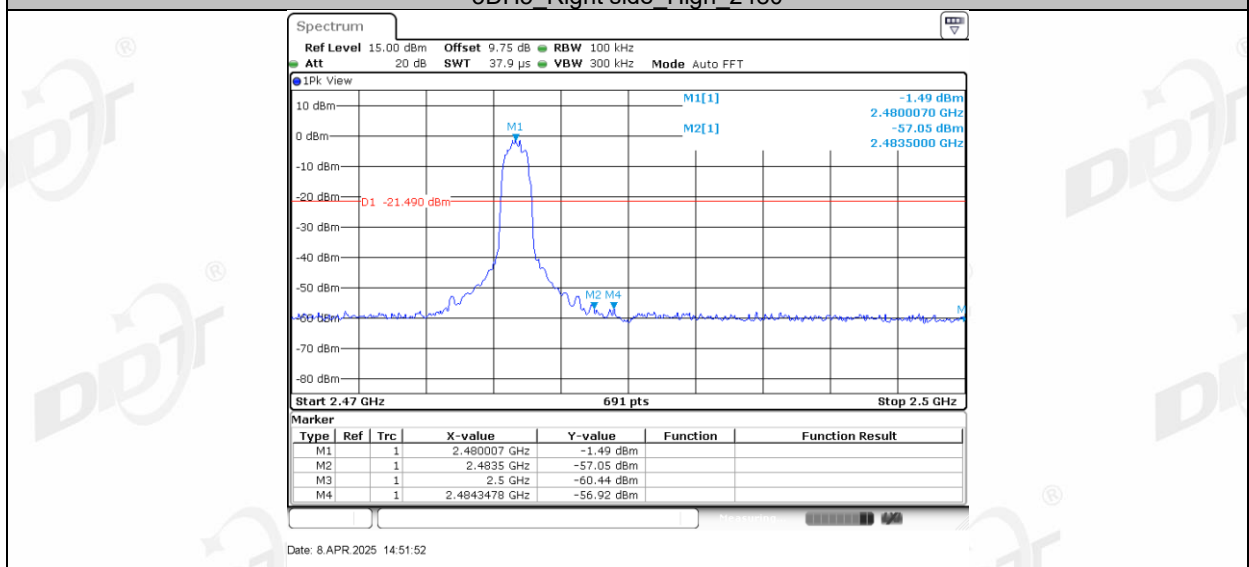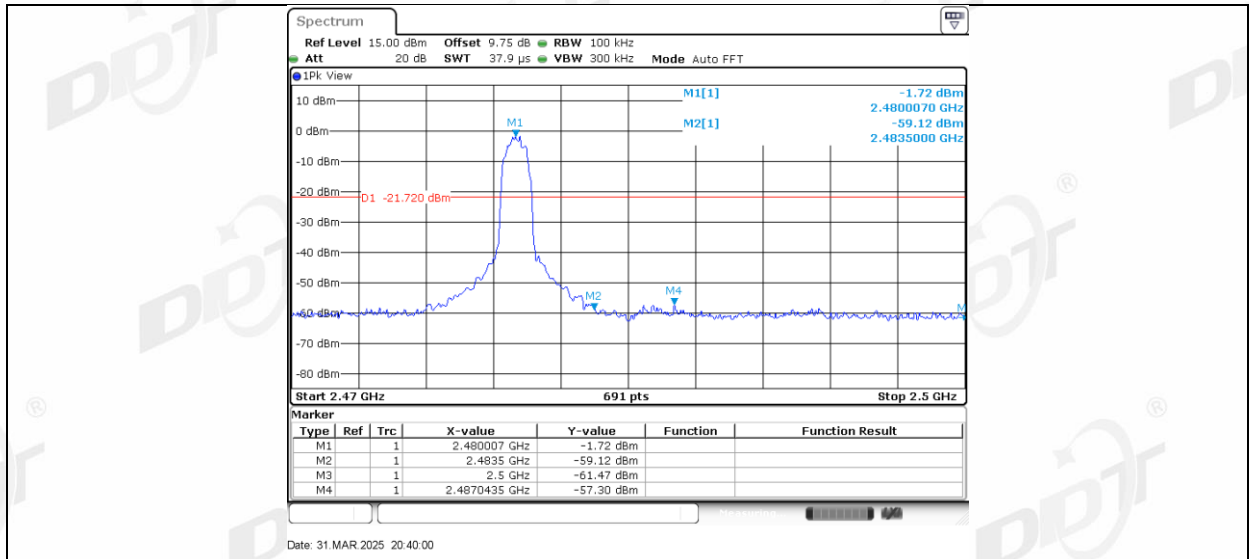


3DH5 Right side Low Hop 2402

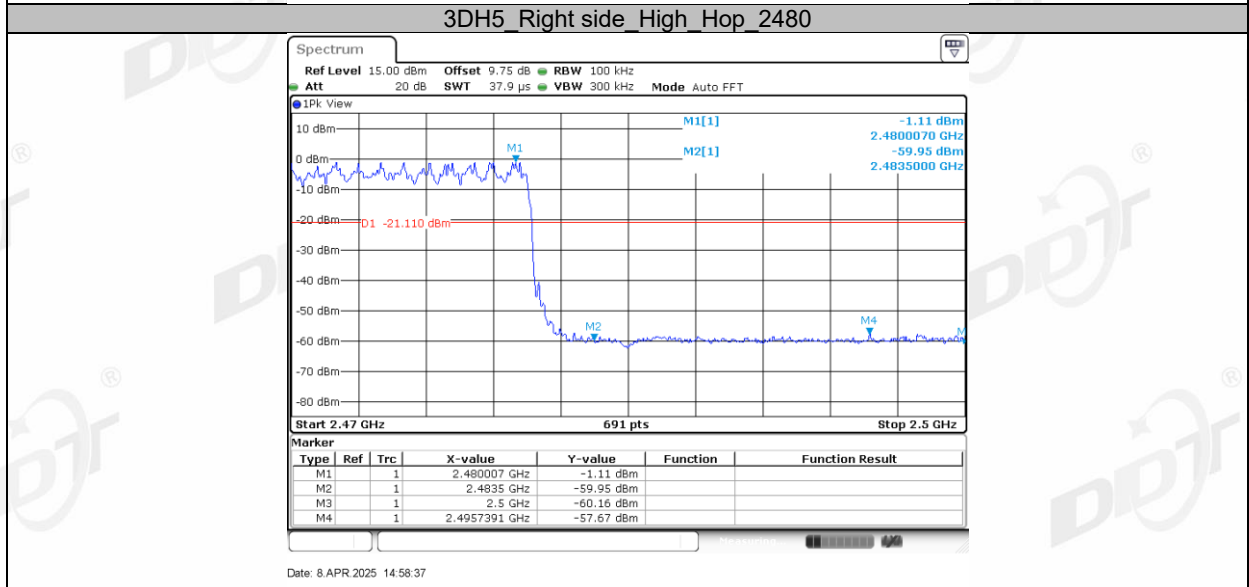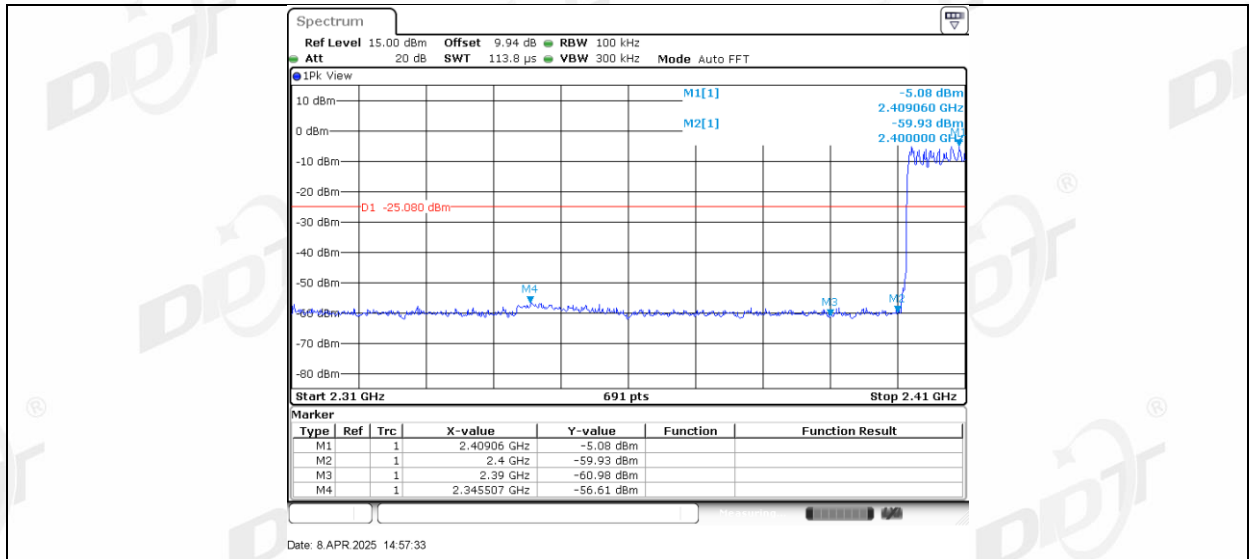

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

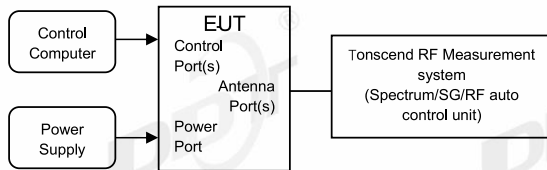

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Test Engineer:	Zeng Zhongyao	Test Site:	RF Measurement System 3#
Ambient Condition:	24.3-26.5℃,45.8-47.6%RH	Test Date:	2025.03.31-2025.04.08
Test Power Supply:	Battery	Sample Number:	S25032426-014


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Test graphs

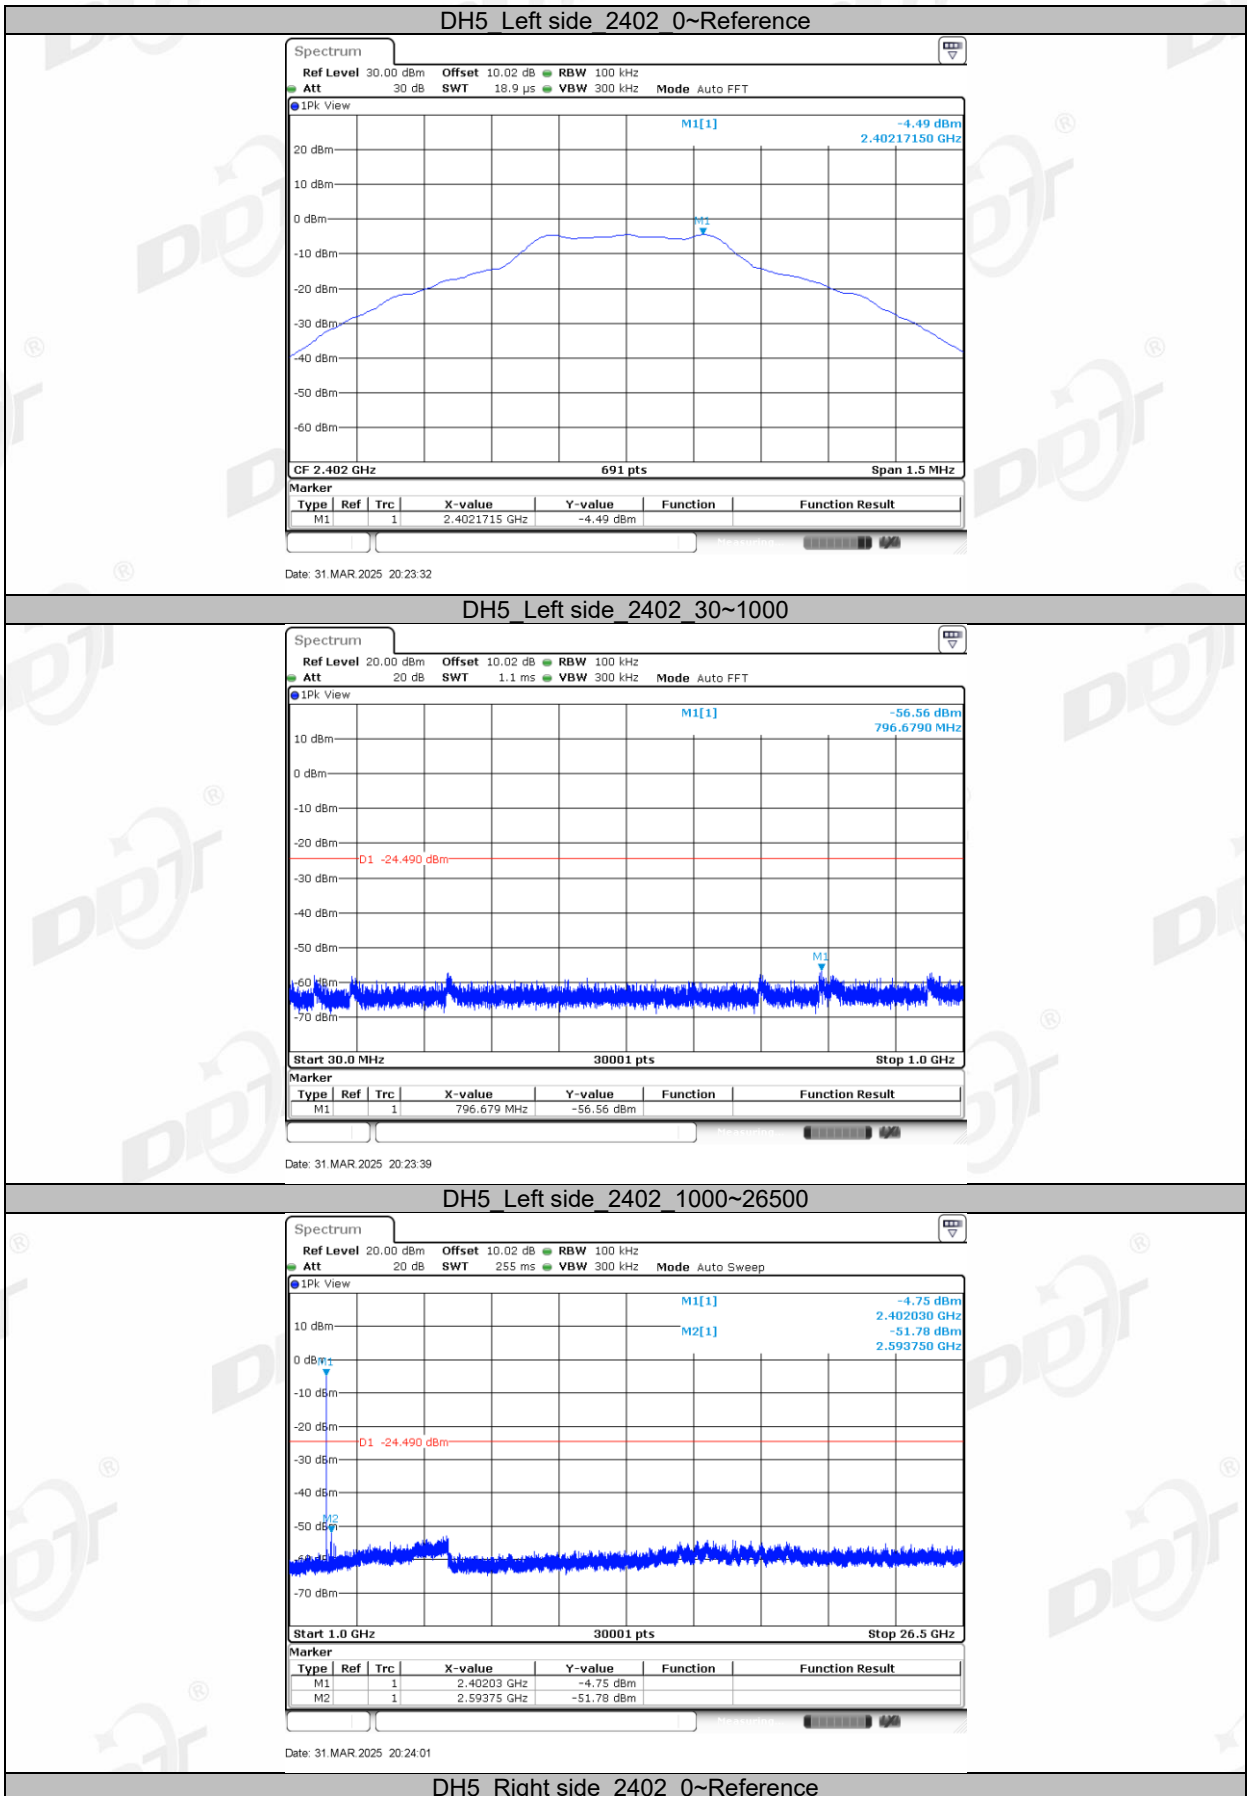


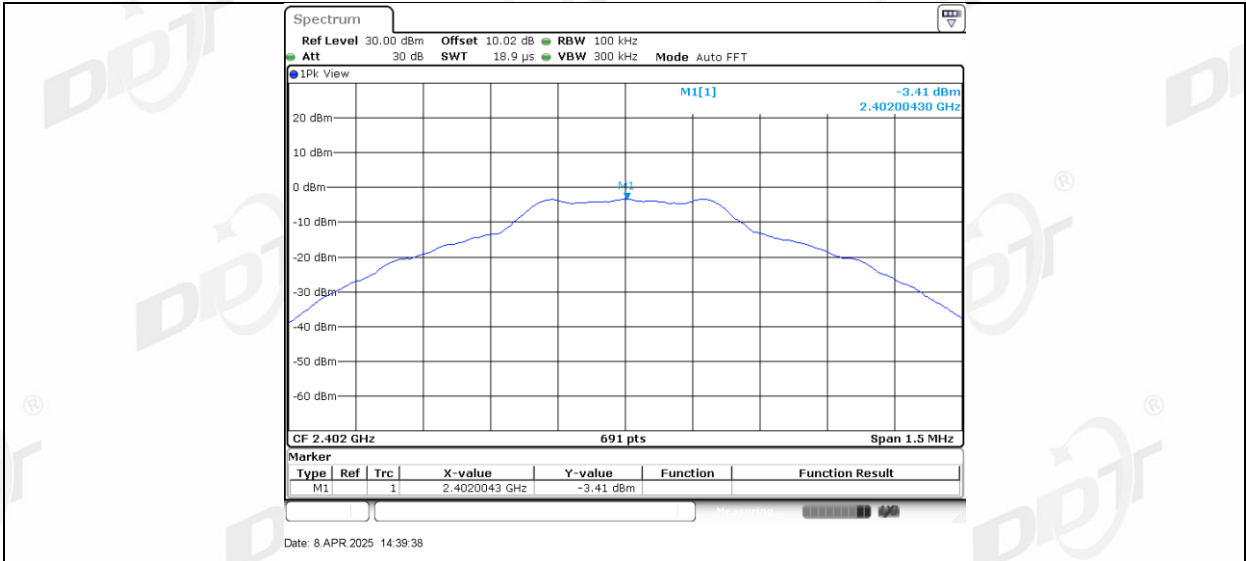


DH5 Right side 2402 30~1000

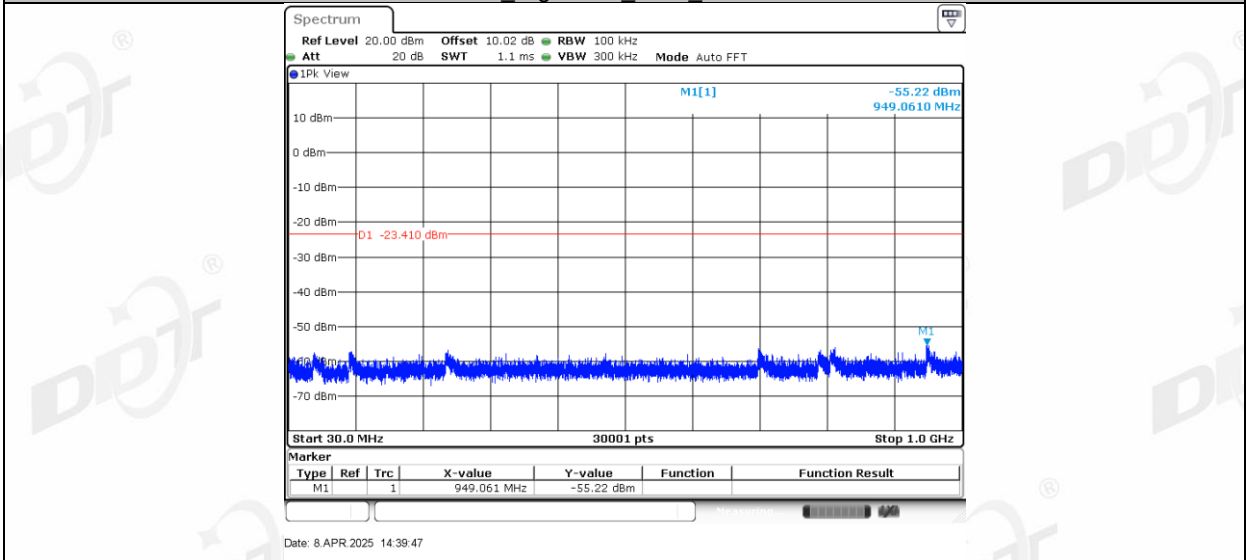


DH5 Right side 2402 1000~26500

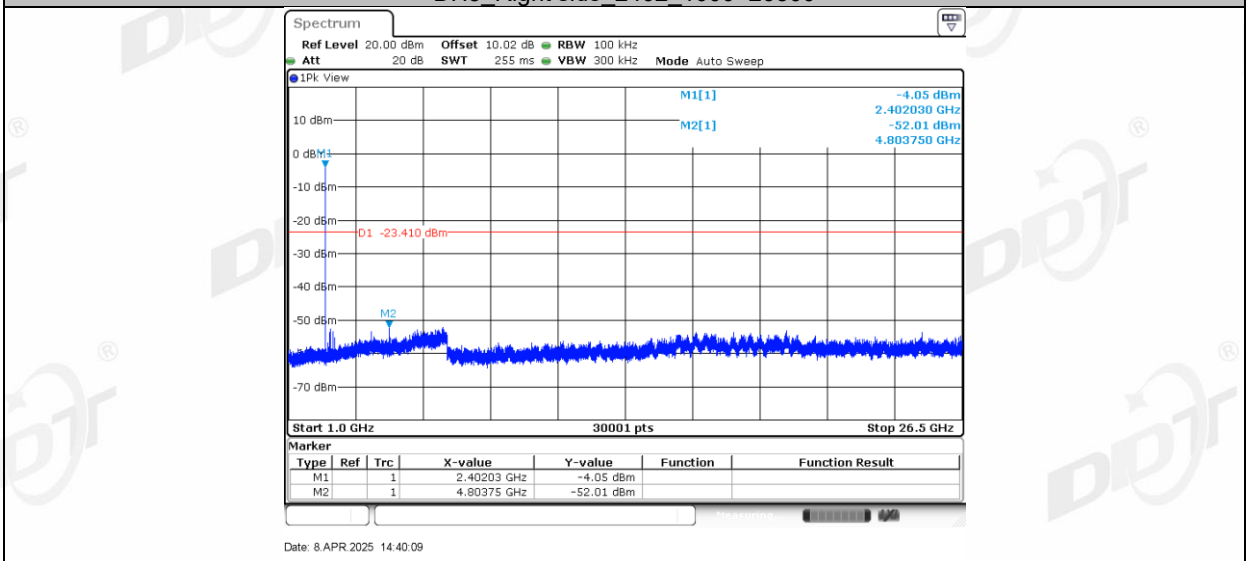


DH5 Left side 2441 0-Reference

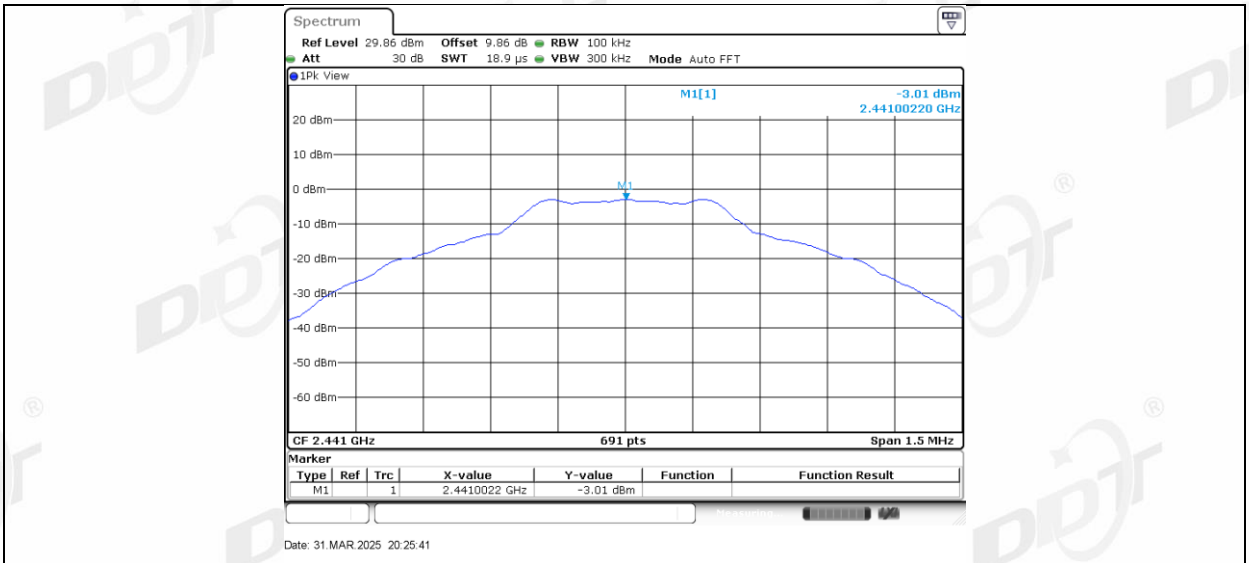


DH5 Left side 2441 30~1000

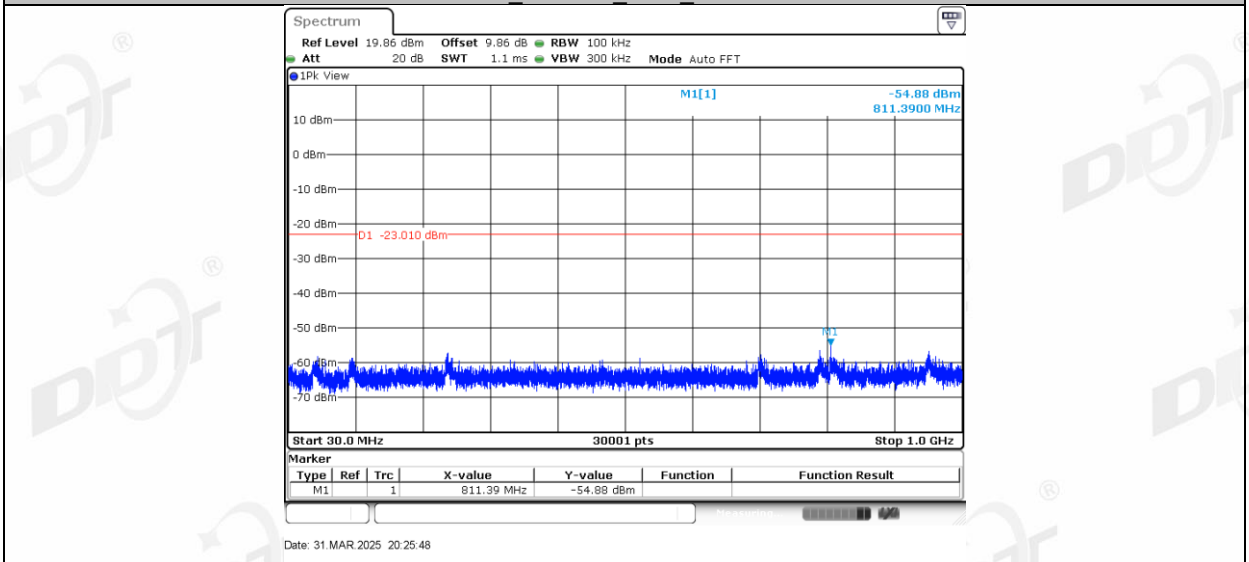


DH5 Left side 2441 1000~26500

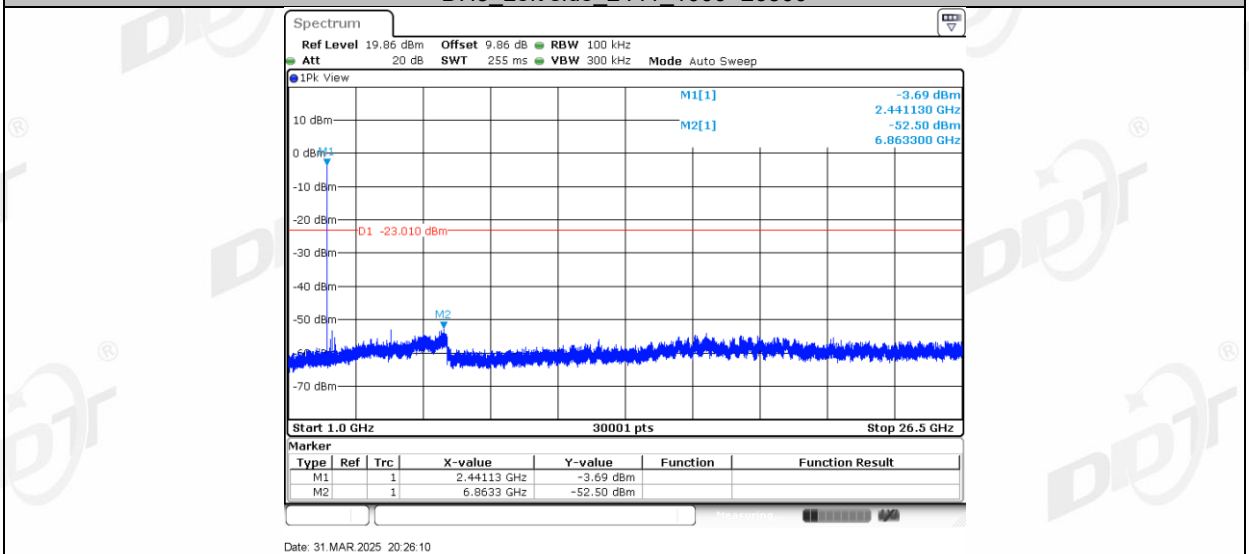


DH5 Right side 2441 0~Reference

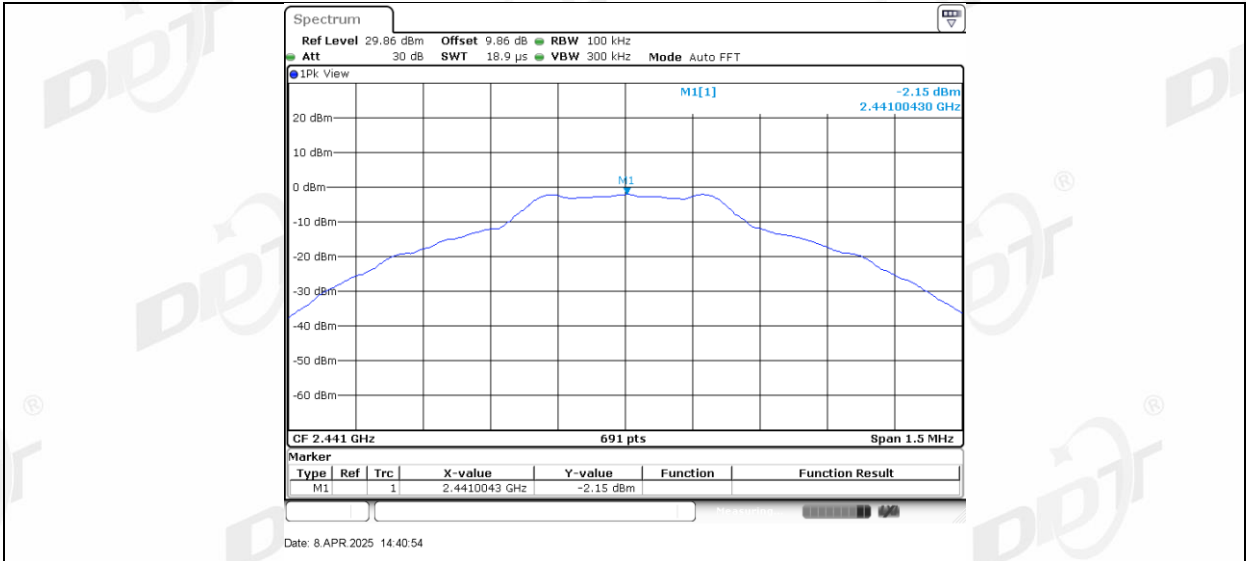


DH5 Right side 2441 30~1000

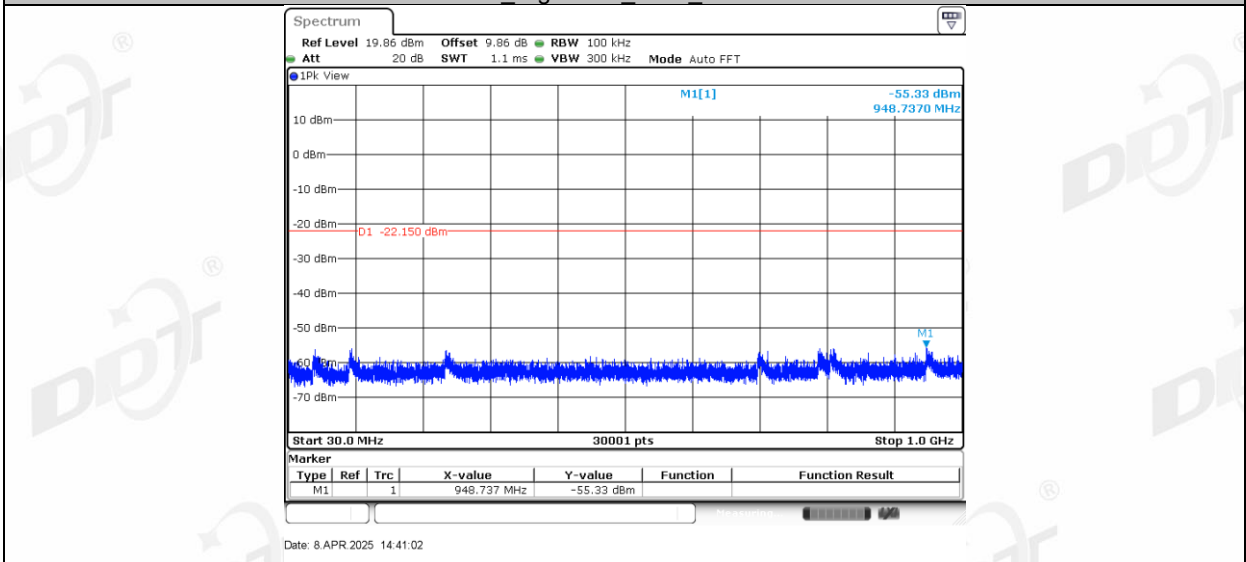


DH5 Right side 2441 1000~26500

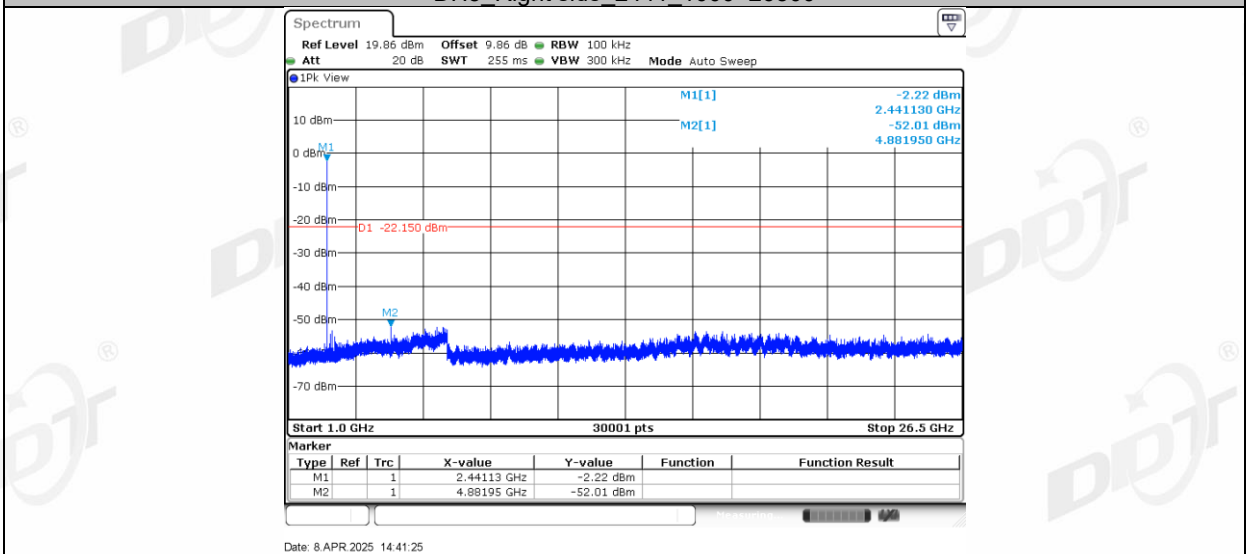


DH5 Left side 2480 0-Reference

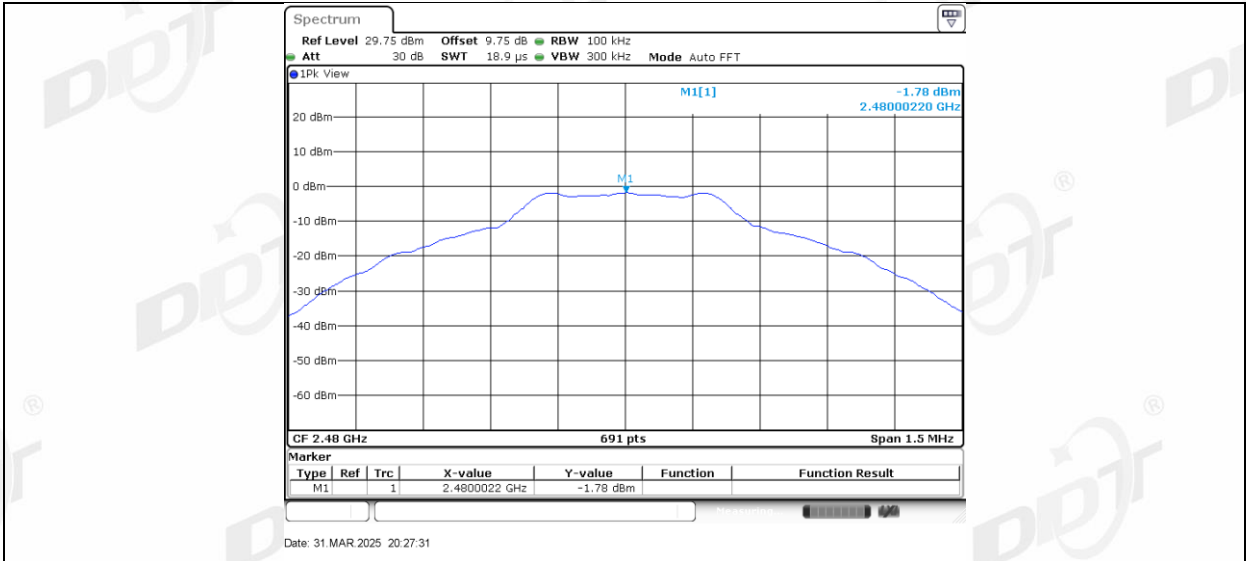


DH5 Left side 2480 30~1000

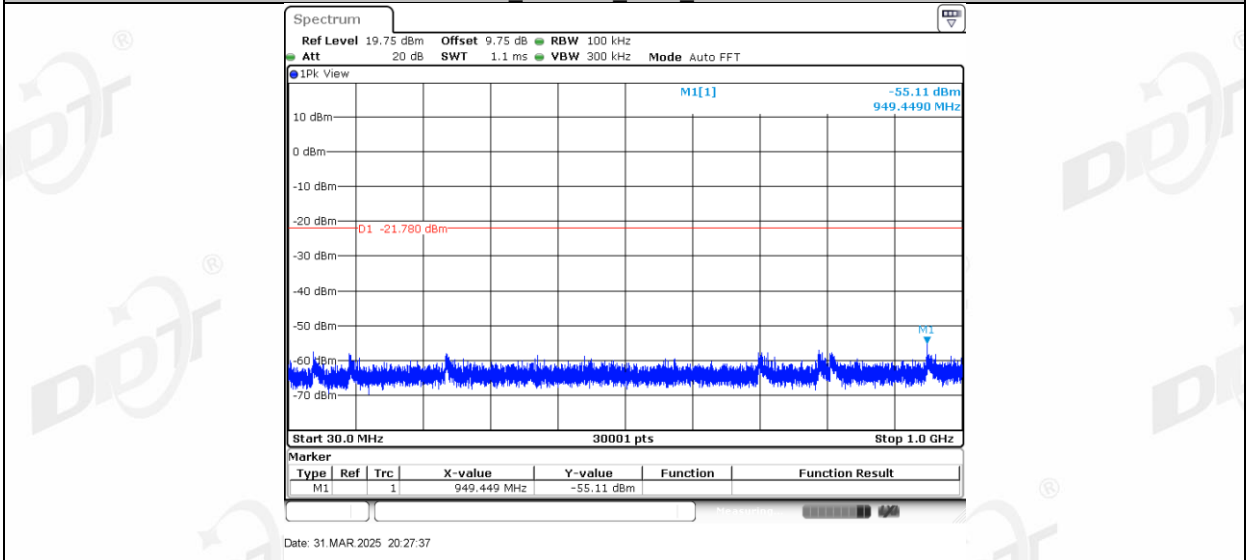


DH5 Left side 2480 1000~26500

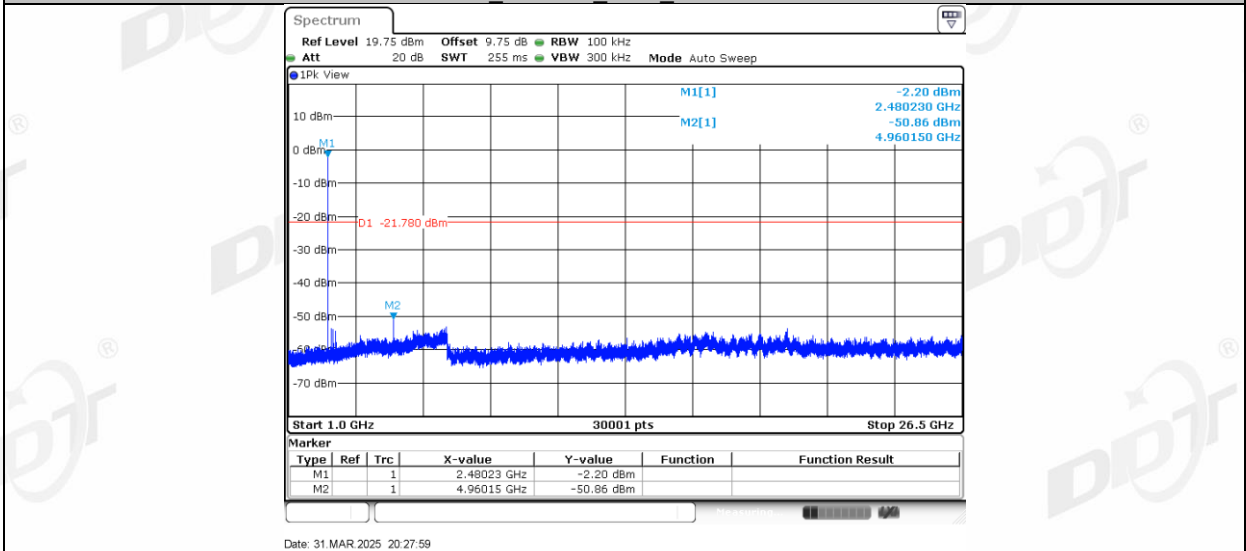


DH5 Right side 2480 0~Reference

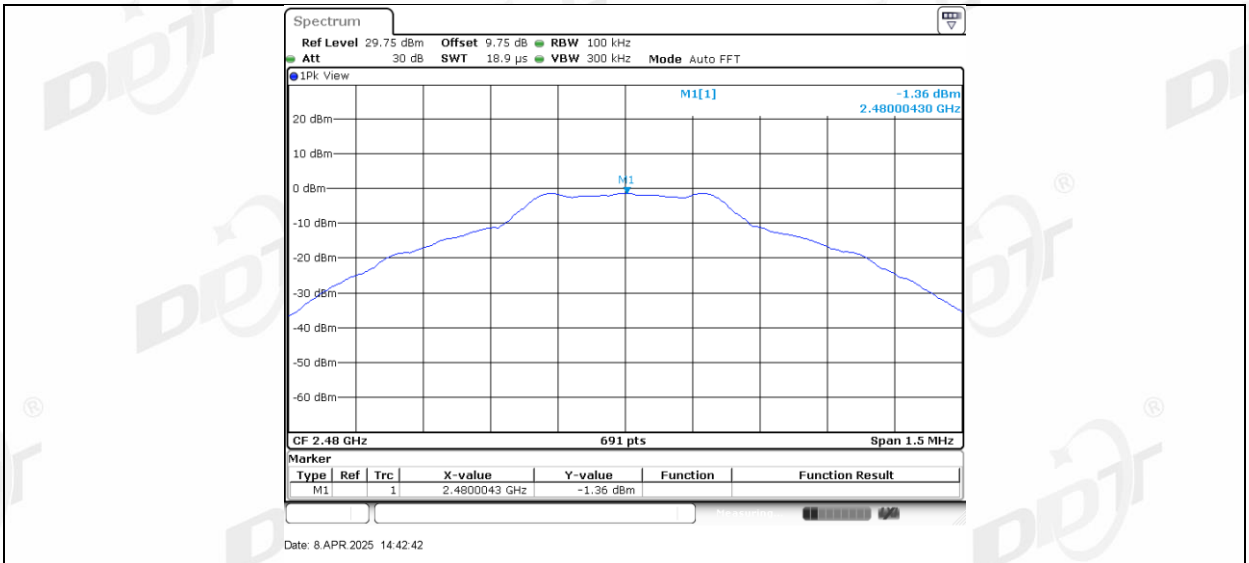




DH5 Right side 2480 30~1000

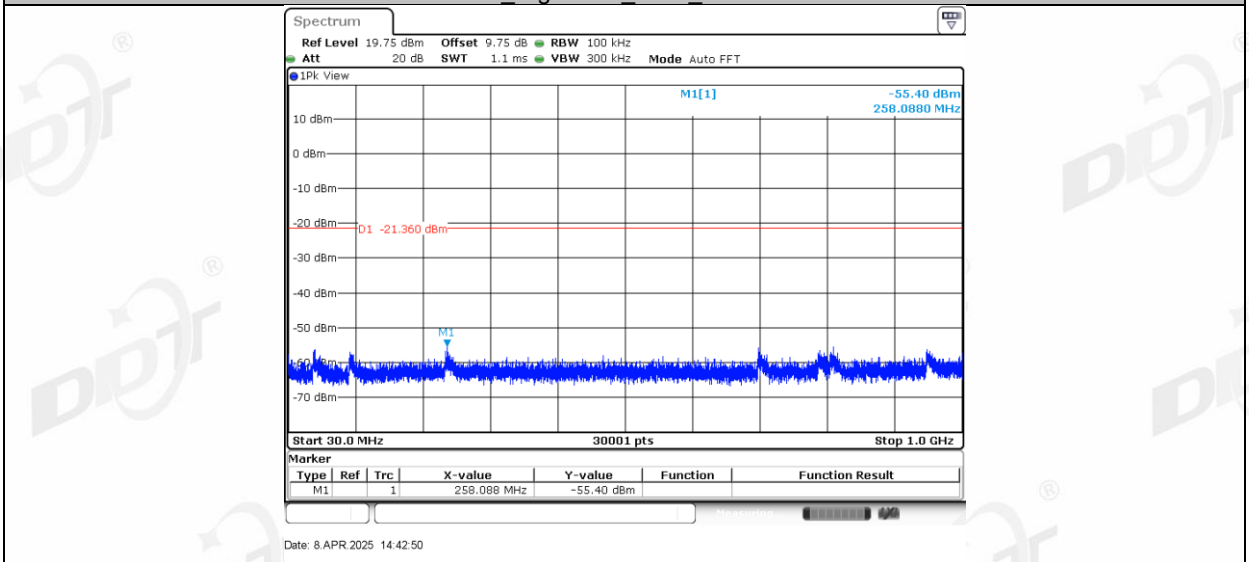


DH5 Right side 2480 1000~26500

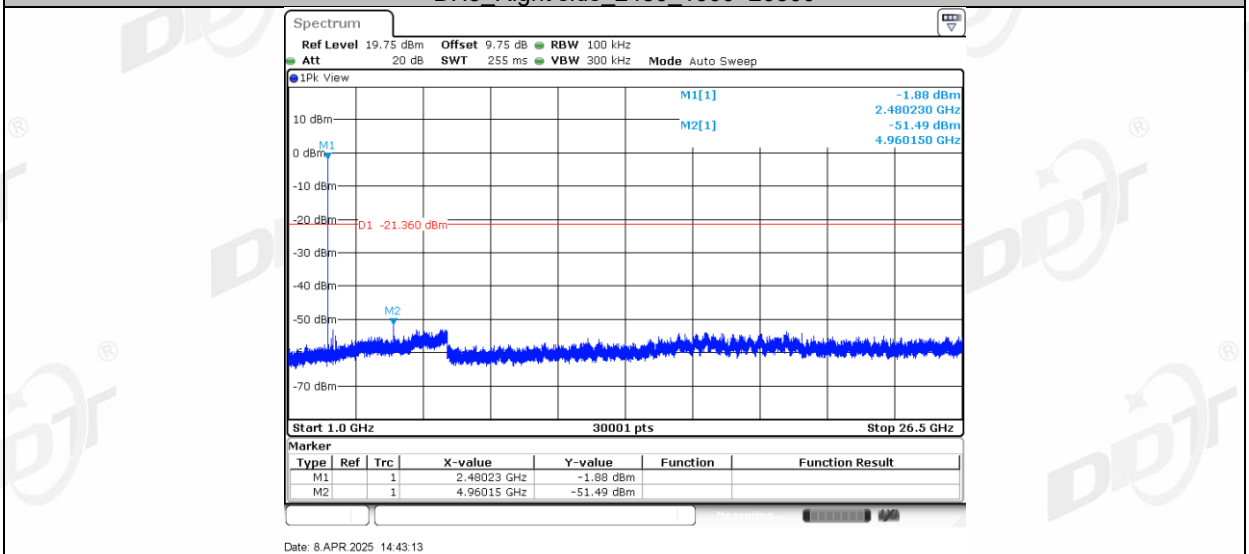


2DH5 Left side 2402 0~Reference

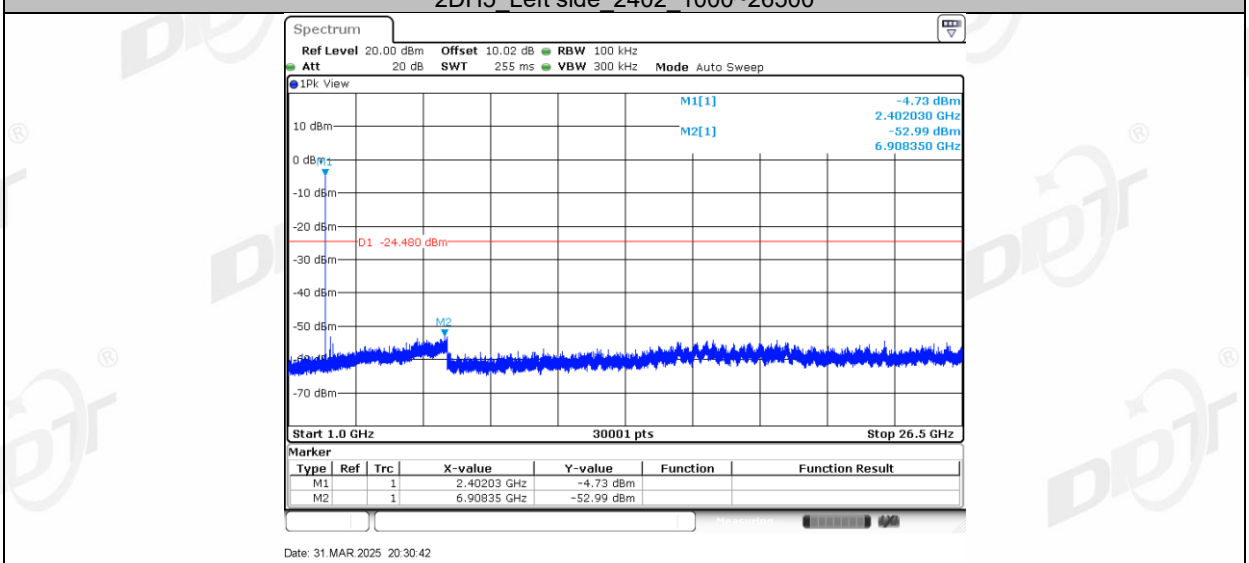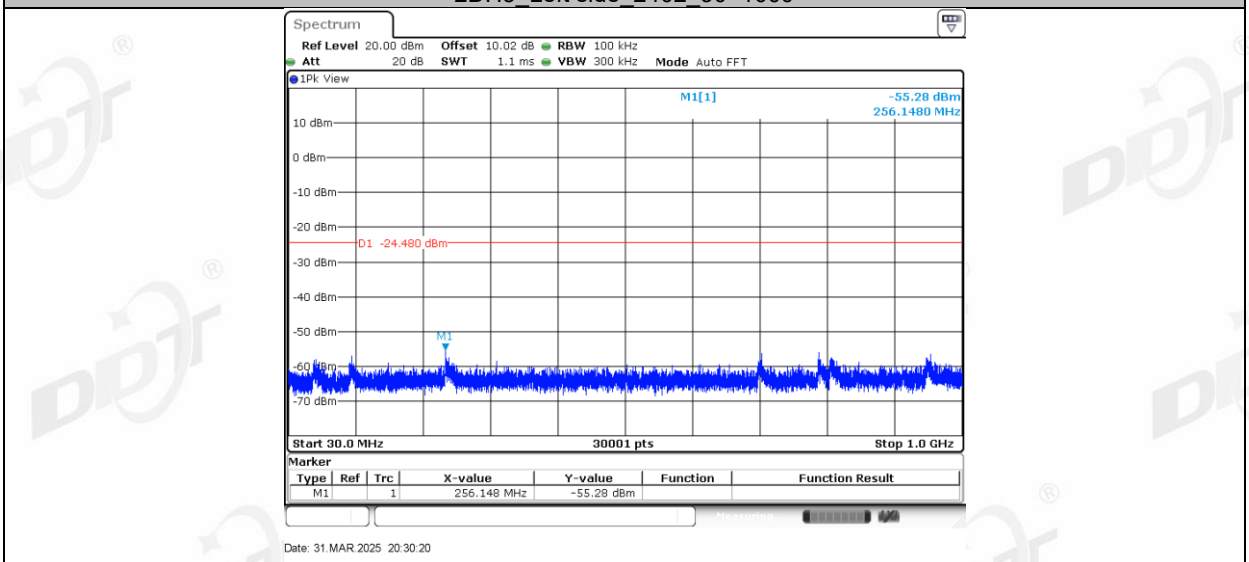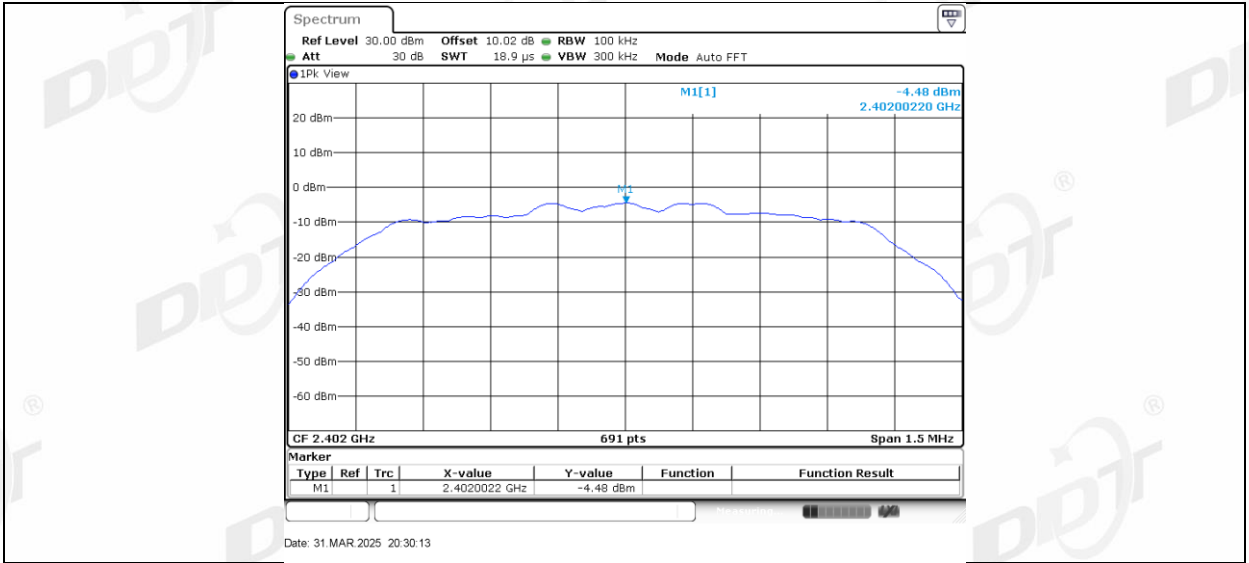


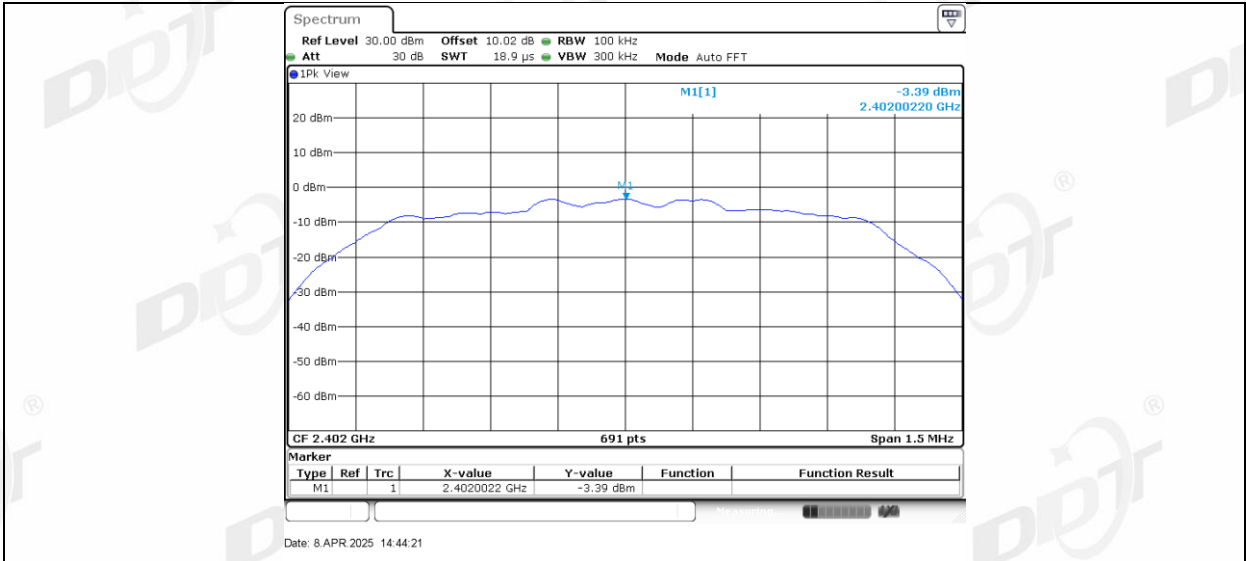


2DH5_Right side_2402_30~1000

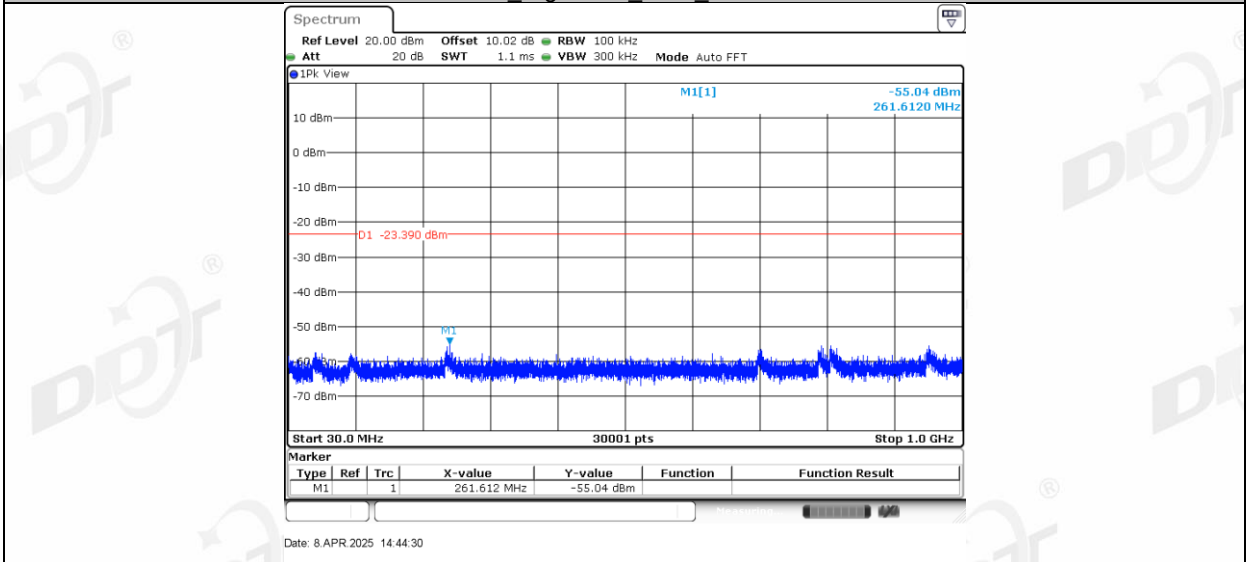


2DH5_Right side_2402_1000~26500

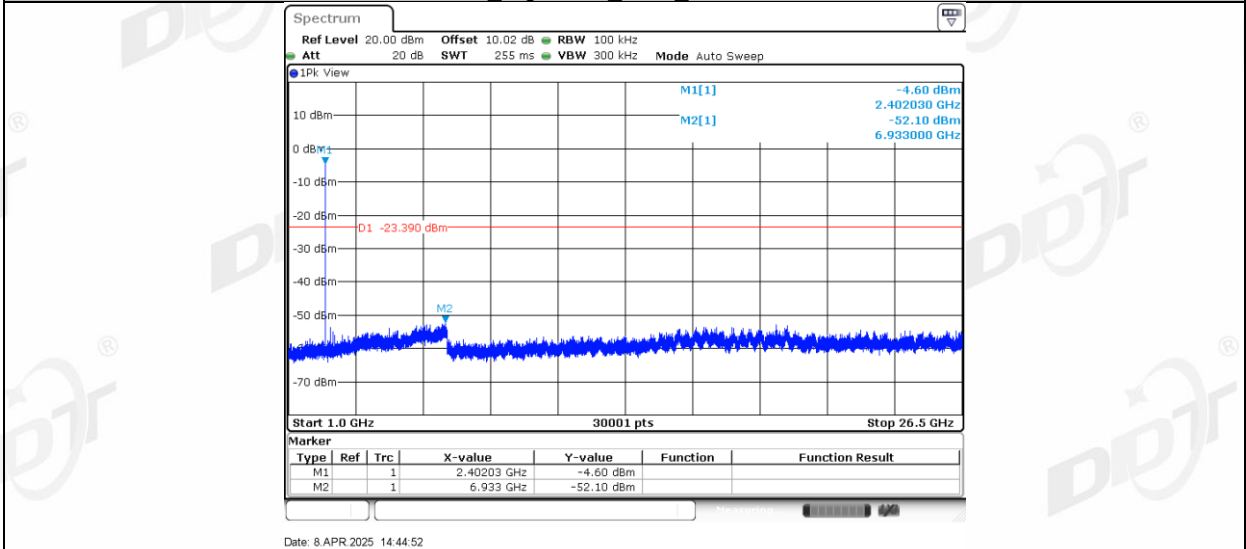


2DH5_Left side_2441_0~Reference

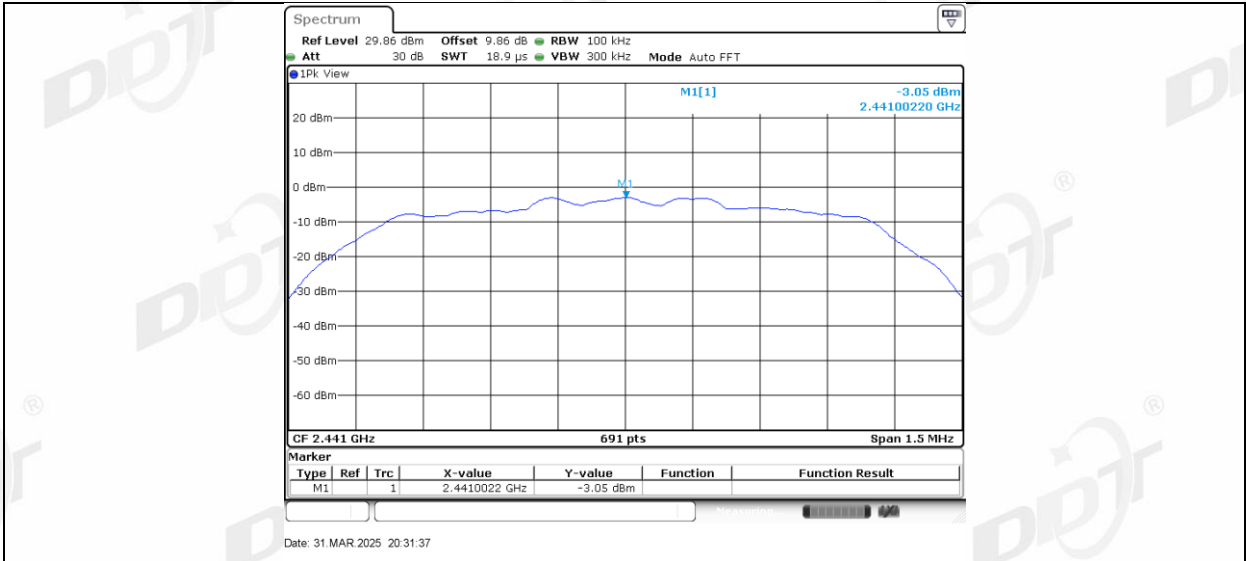




2DH5 Left side 2441 30~1000



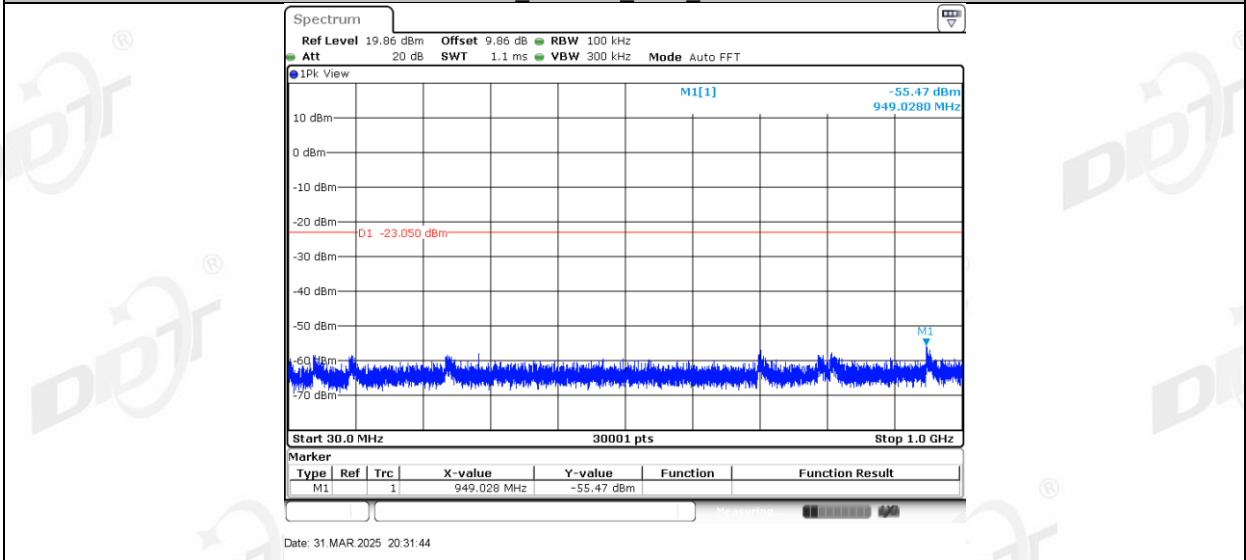



2DH5 Left side 2441 1000~26500

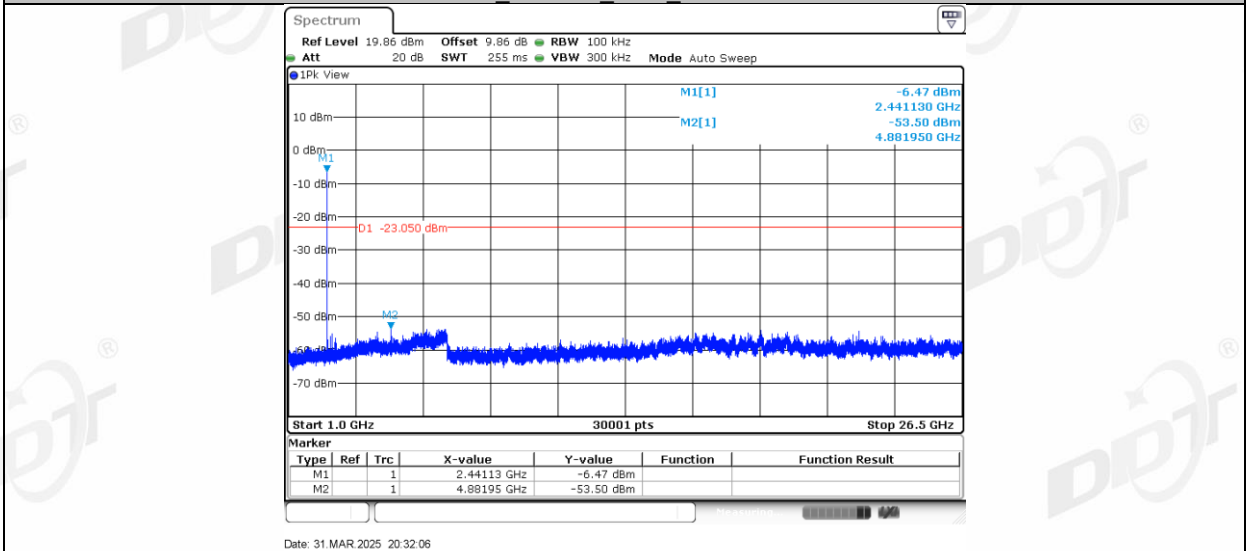


2DH5 Right side 2441 0~Reference

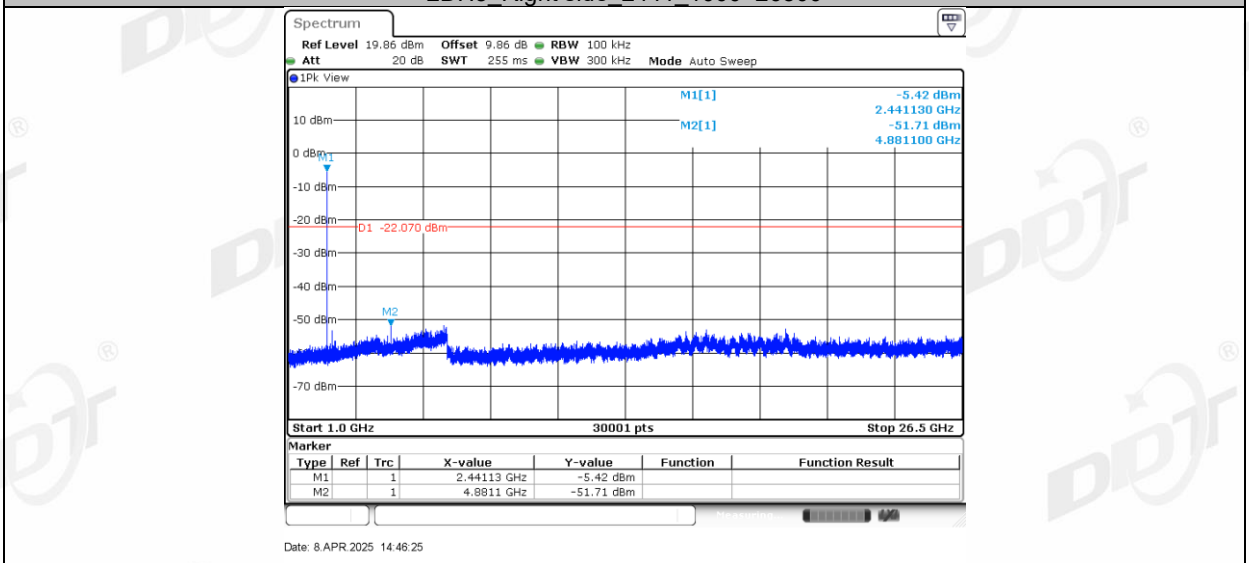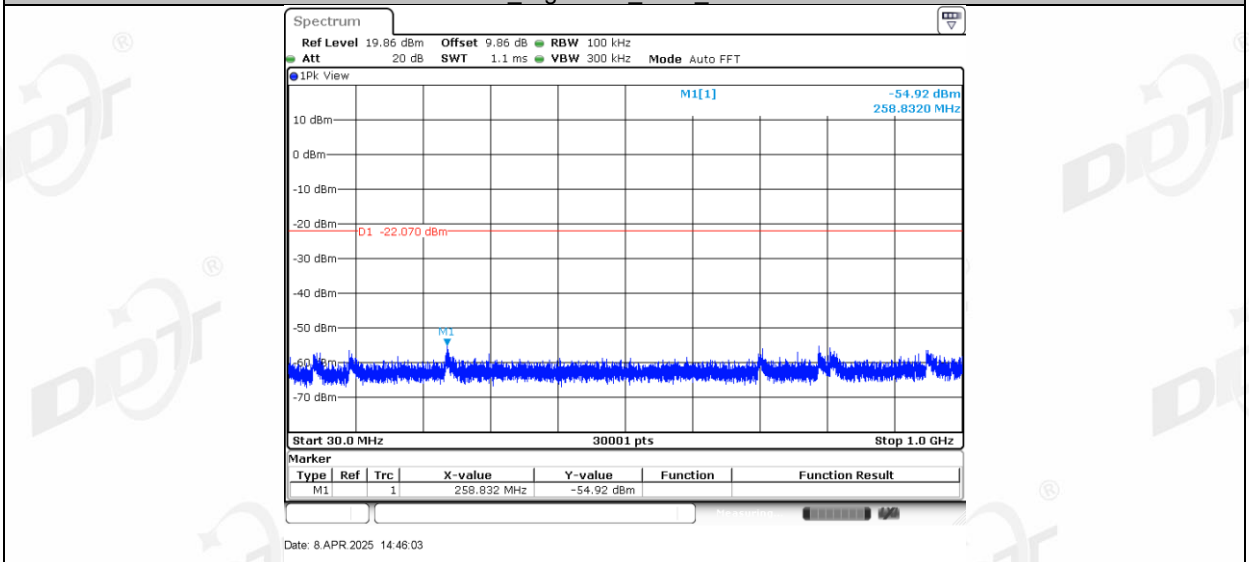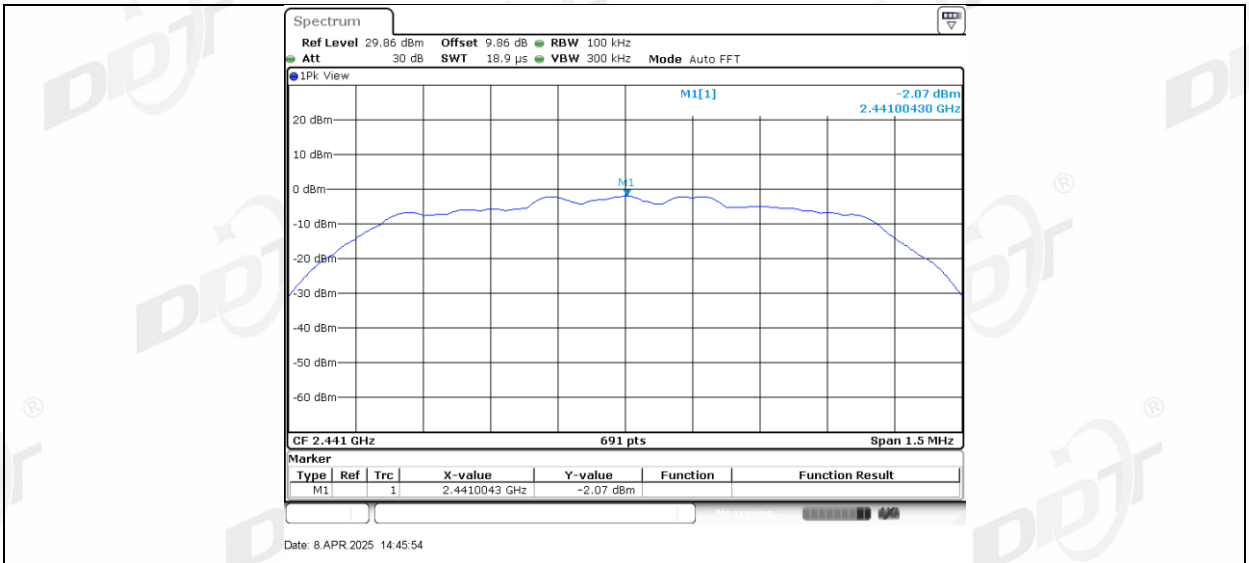

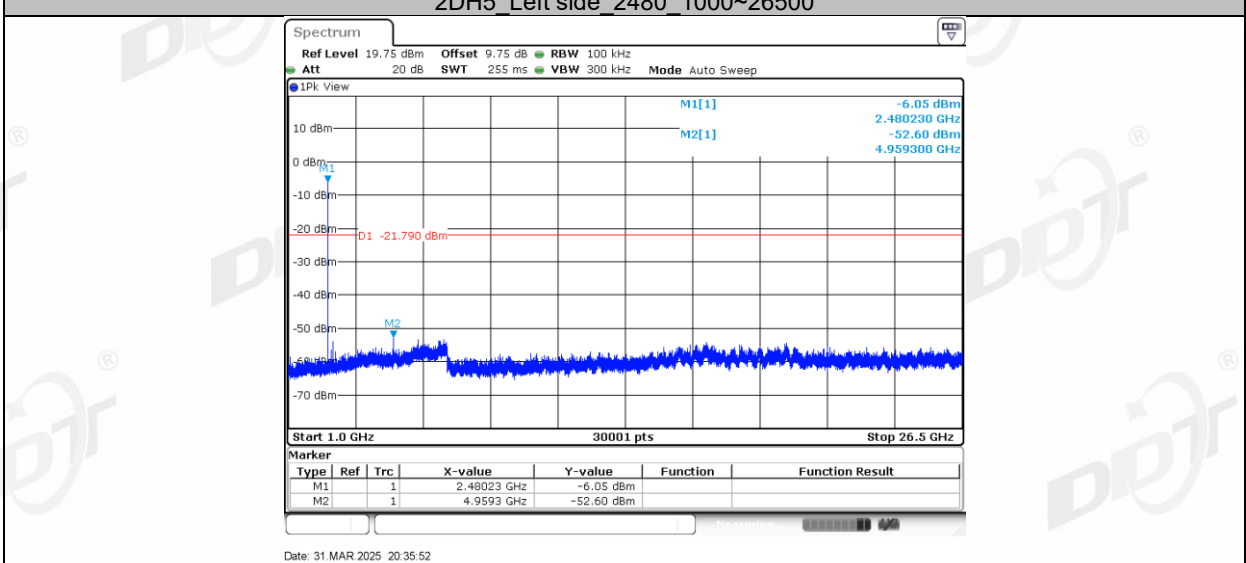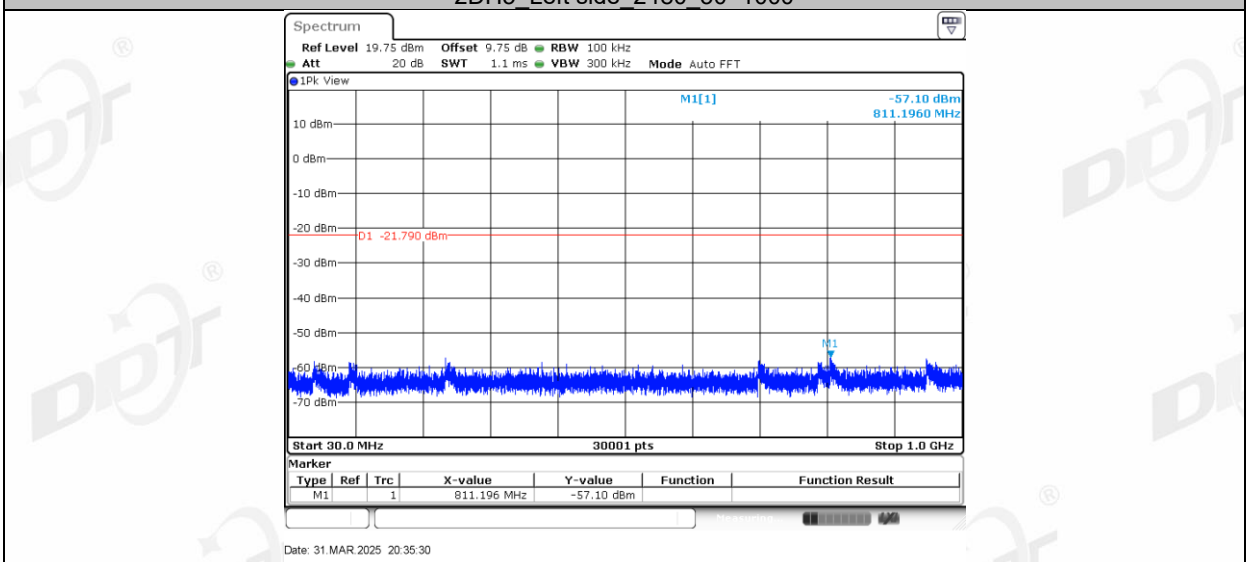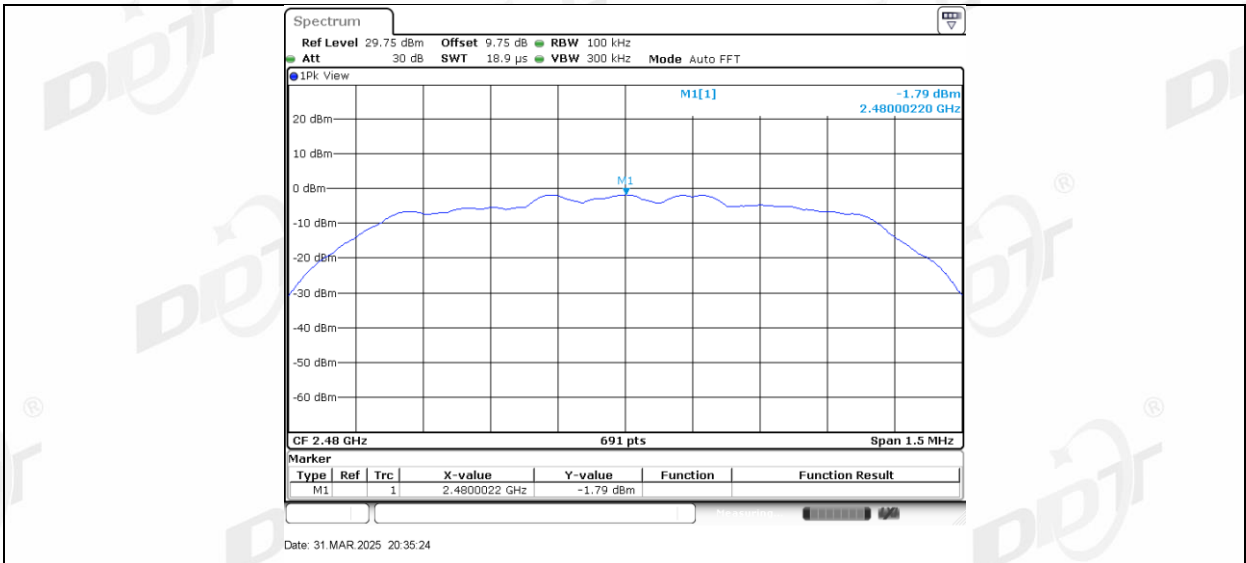


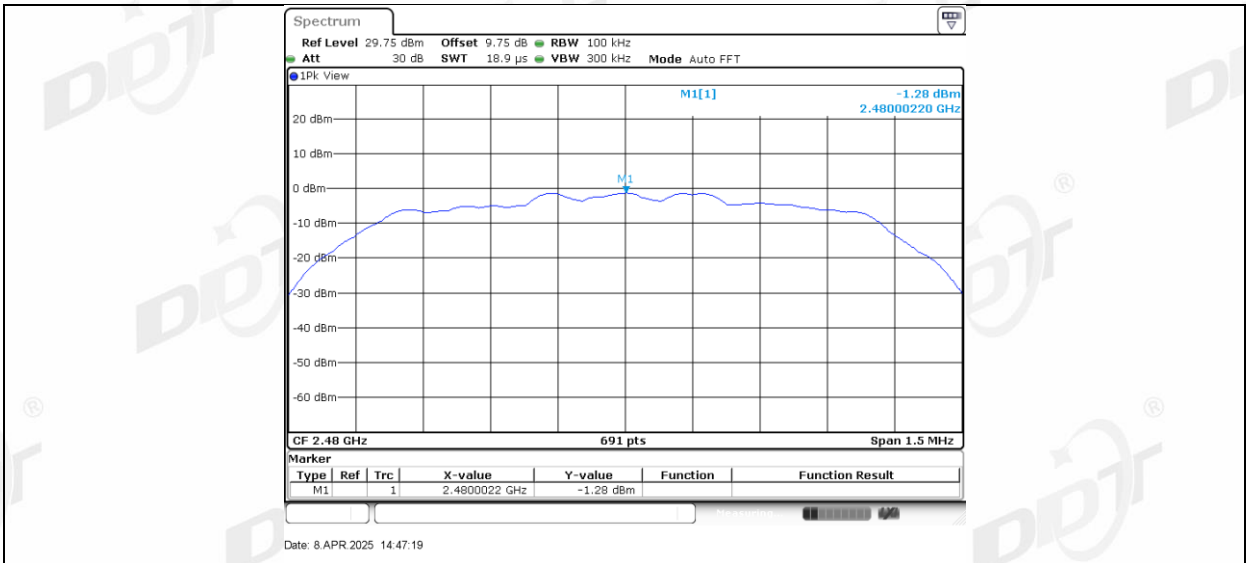


2DH5 Right side 2480 30~1000

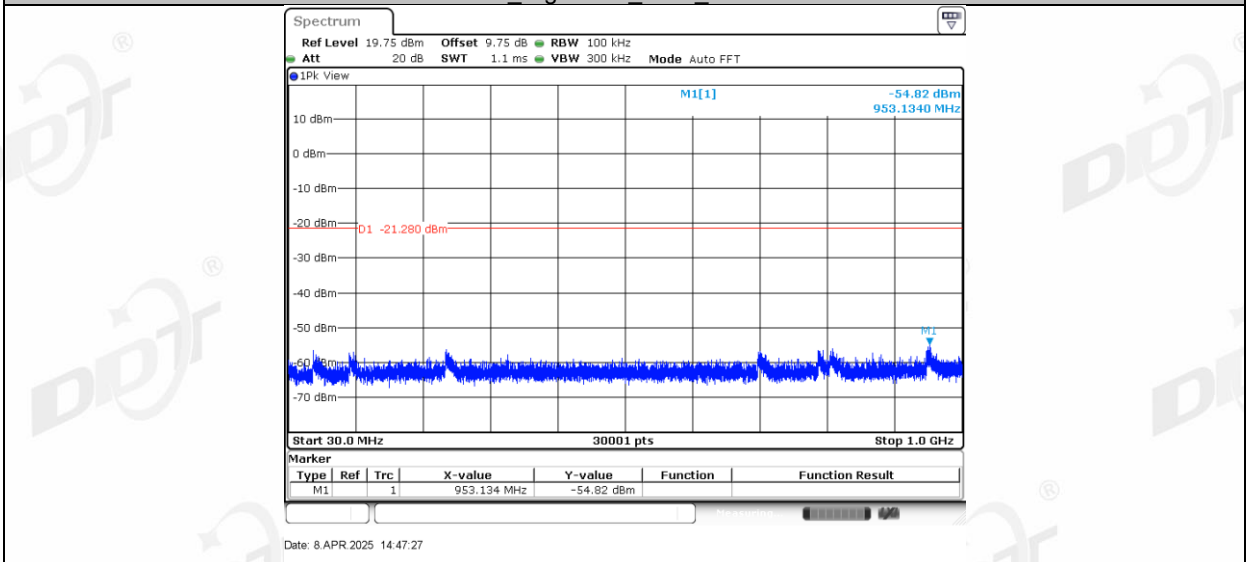


2DH5 Right side 2480 1000~26500

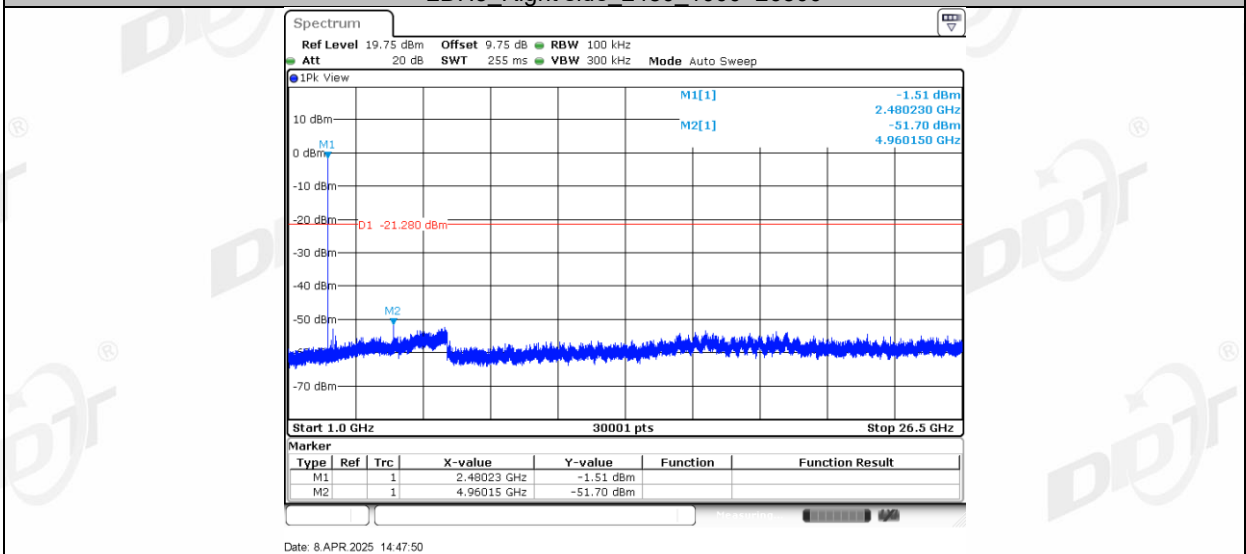


3DH5 Left side 2402 0~Reference

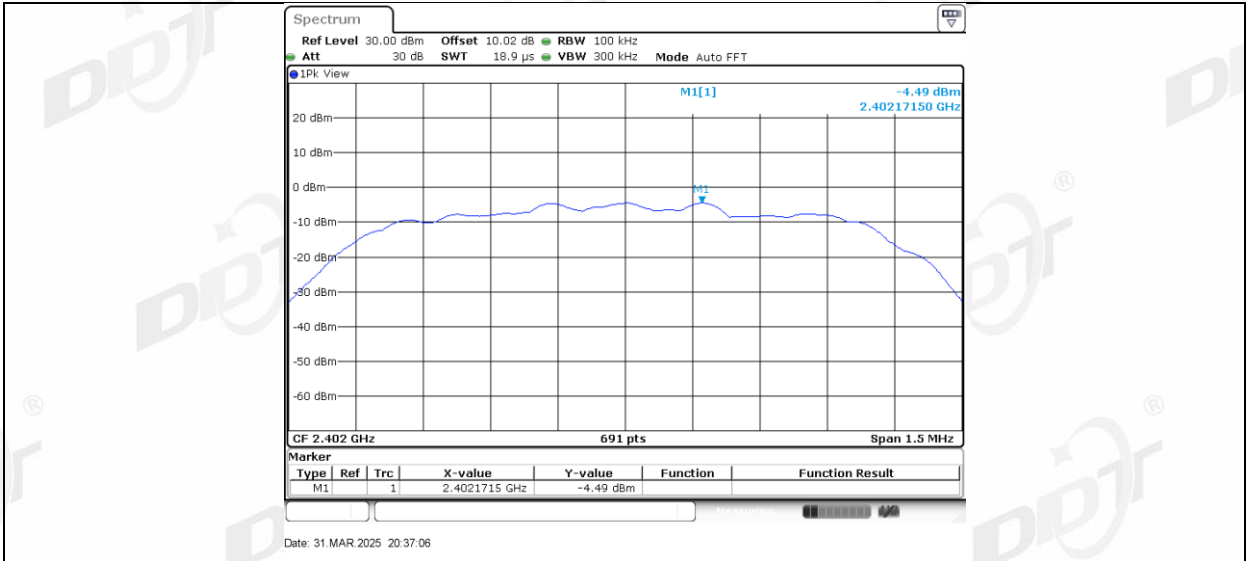


3DH5 Left side 2402 30~1000

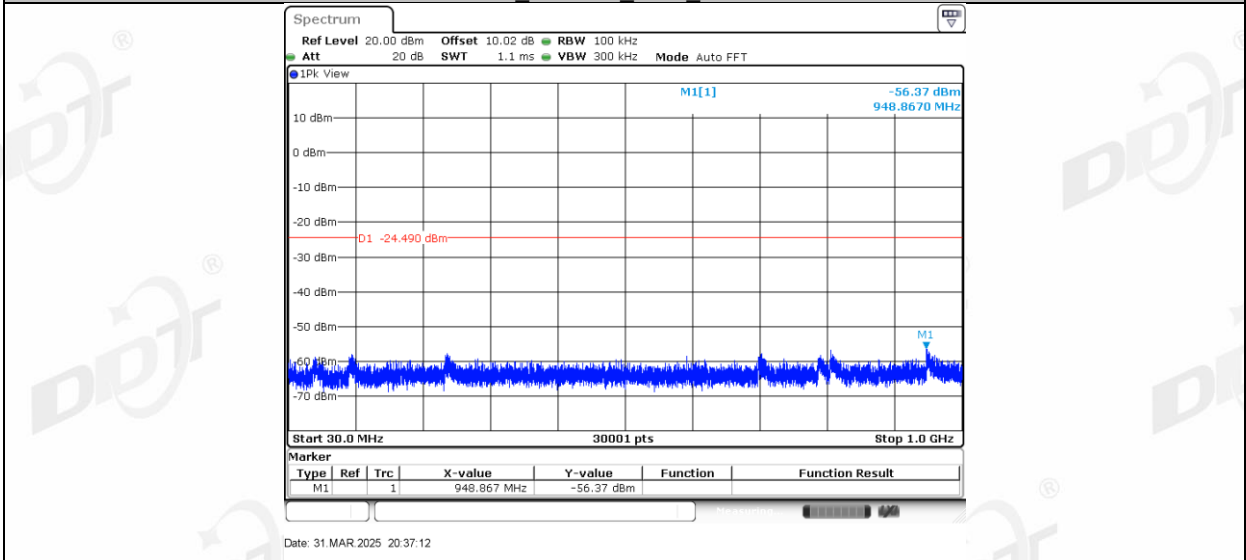


3DH5 Left side 2402 1000~26500

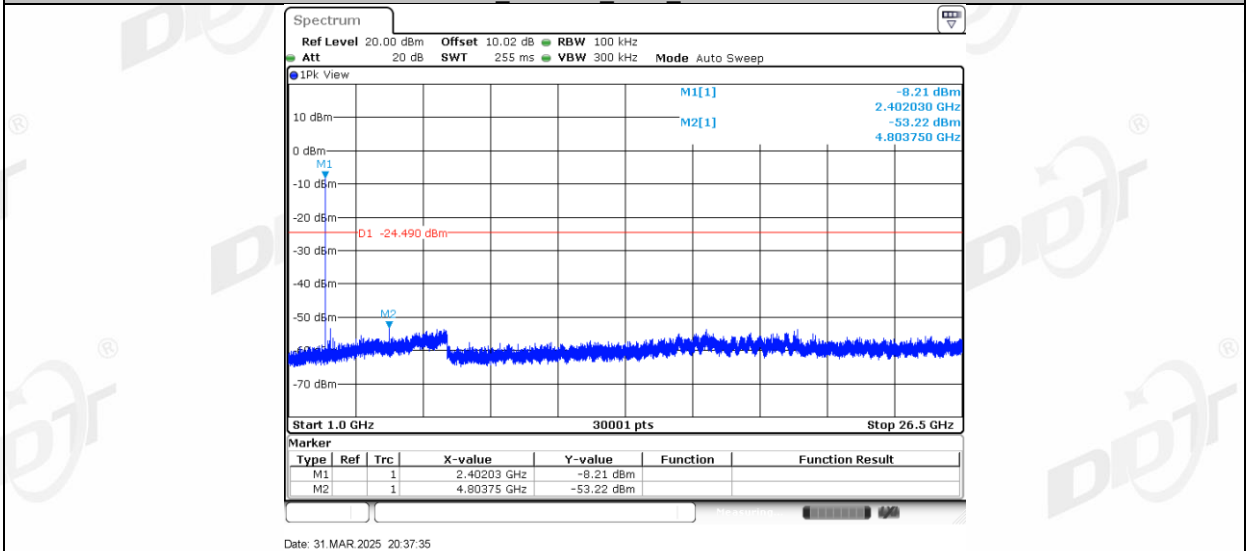


3DH5 Right side 2402 0~Reference

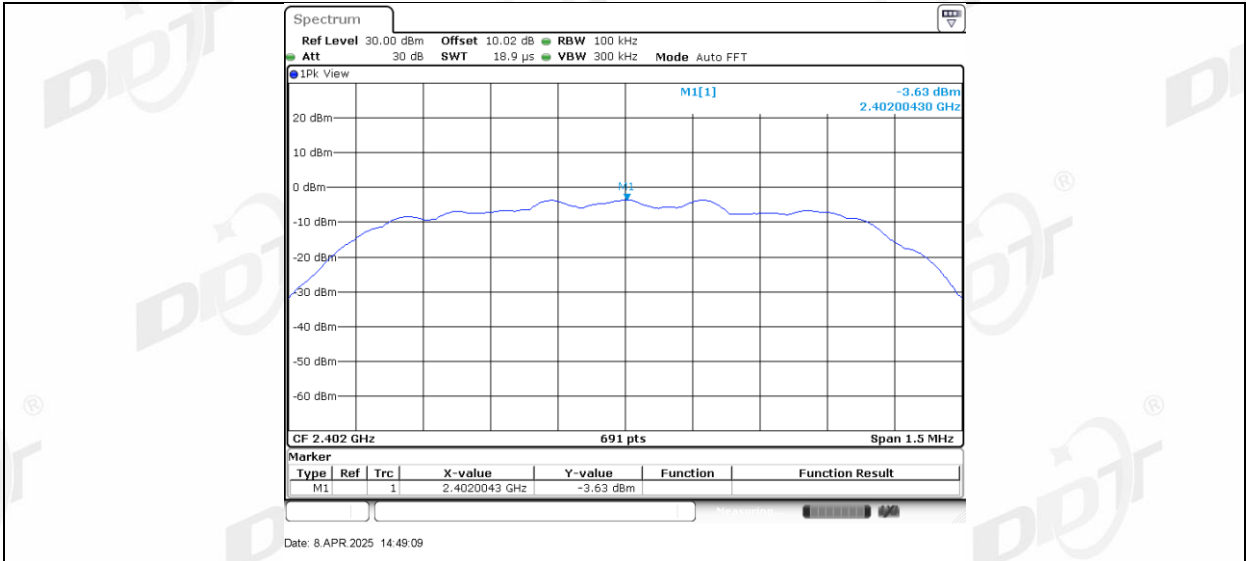




3DH5_Right side_2402_30~1000

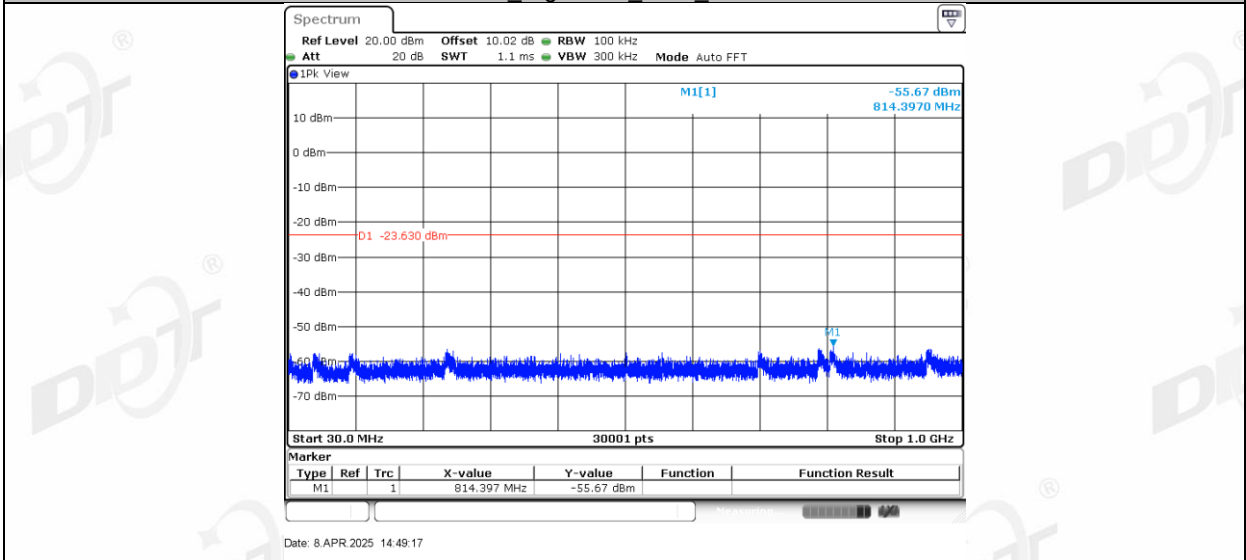


3DH5_Right side_2402_1000~26500

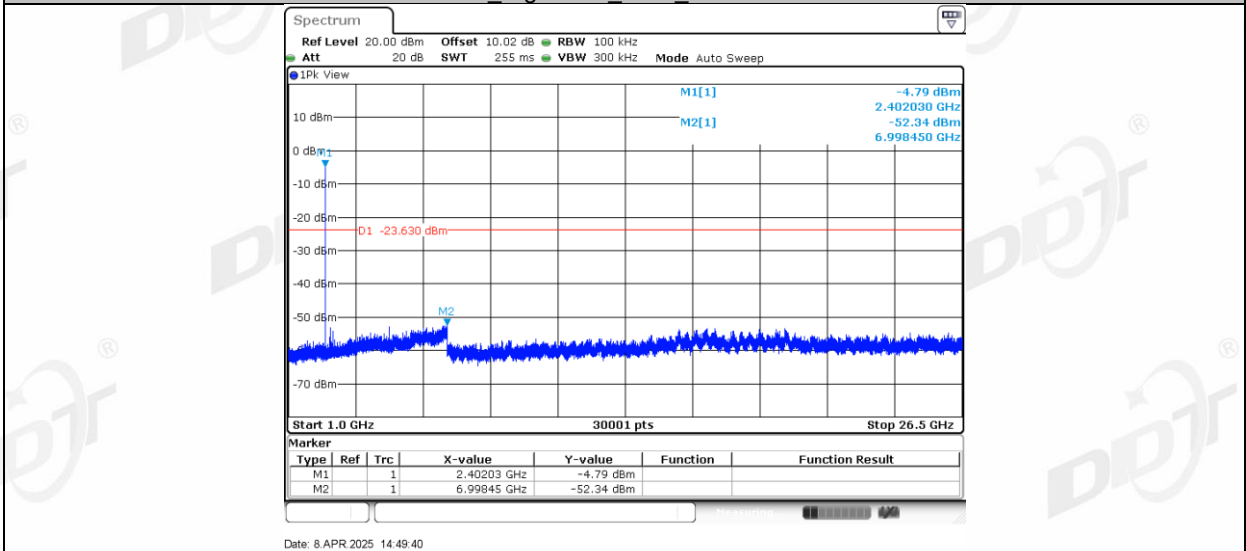


3DH5_Left side_2441_0~Reference

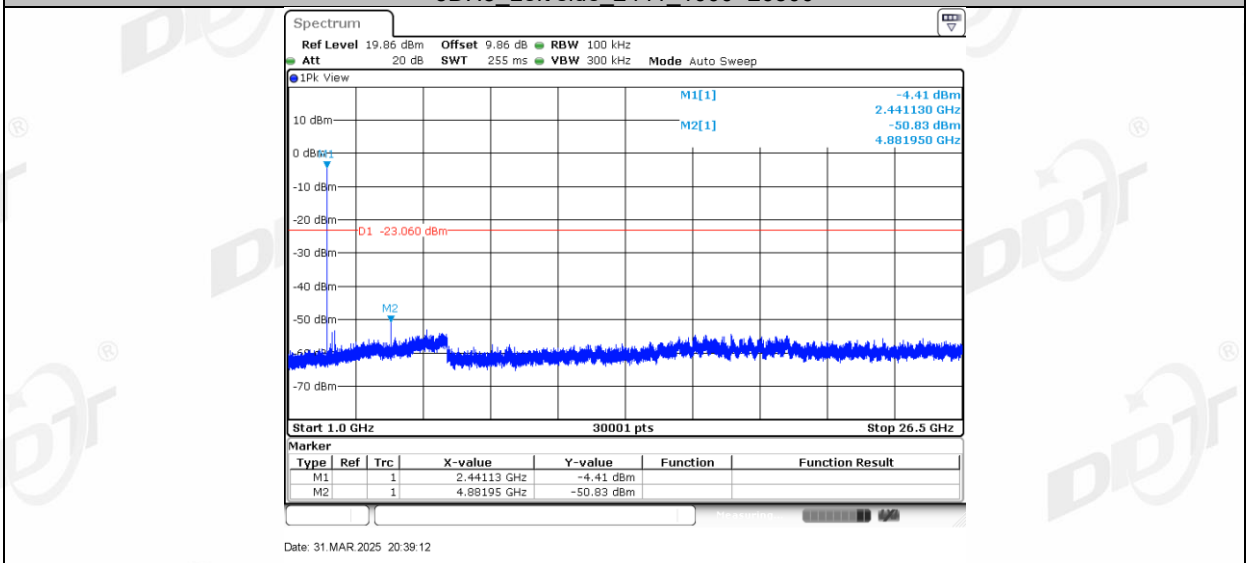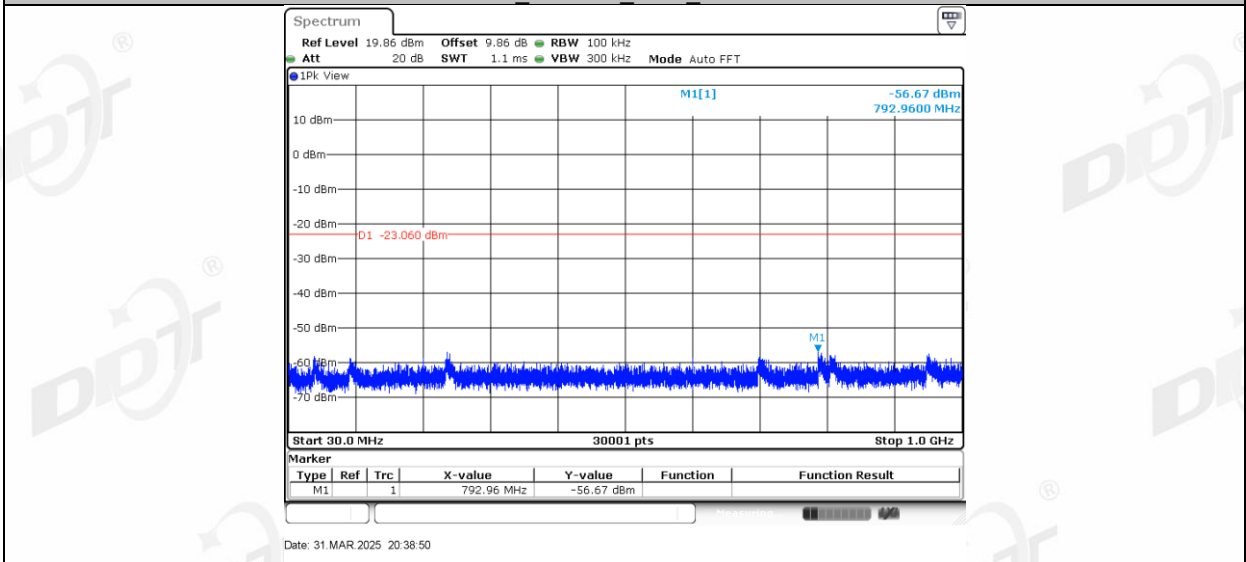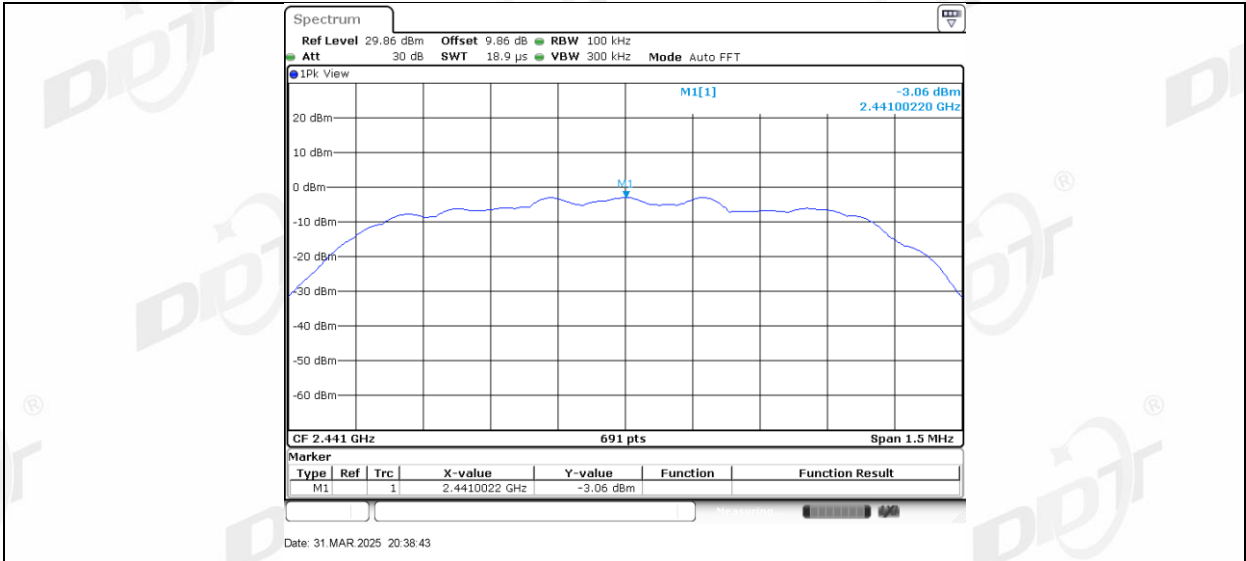


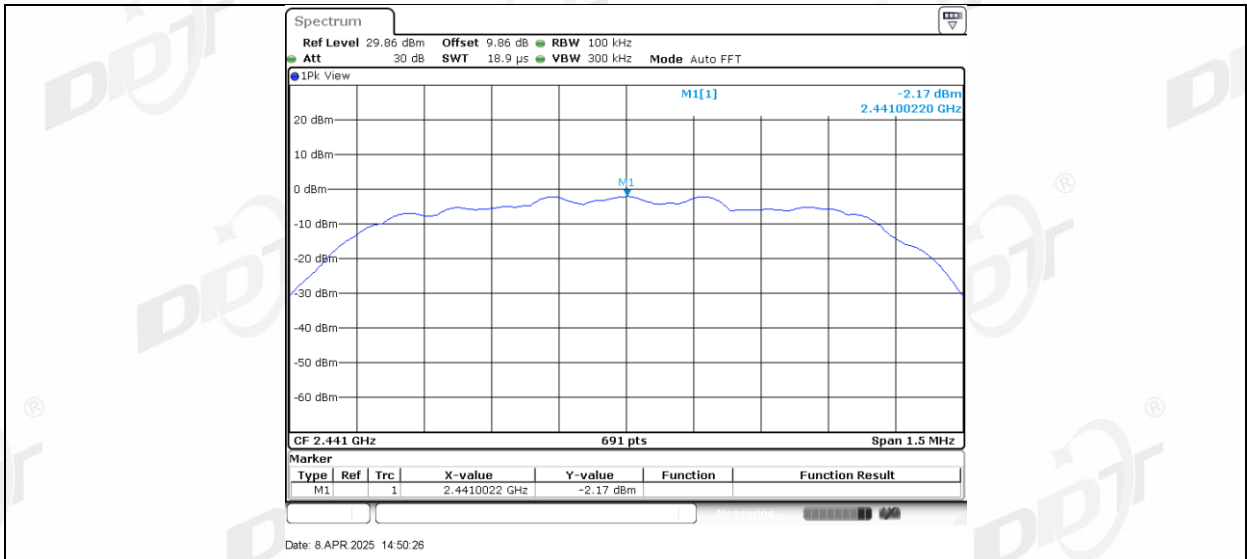

3DH5_Right side_2441_30~1000

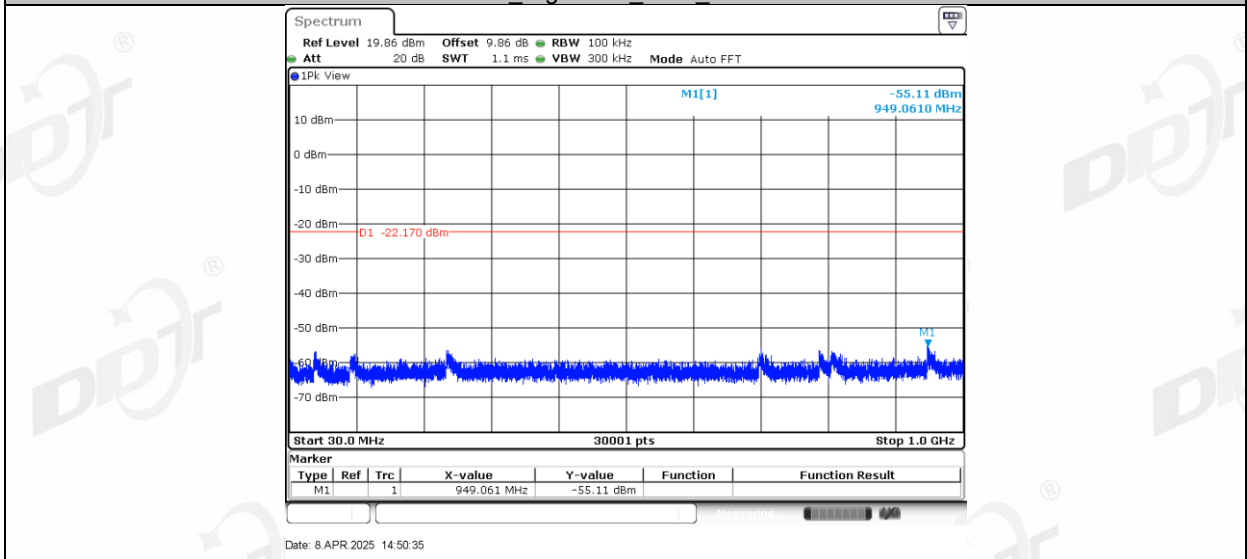

3DH5_Right side_2441_1000~26500

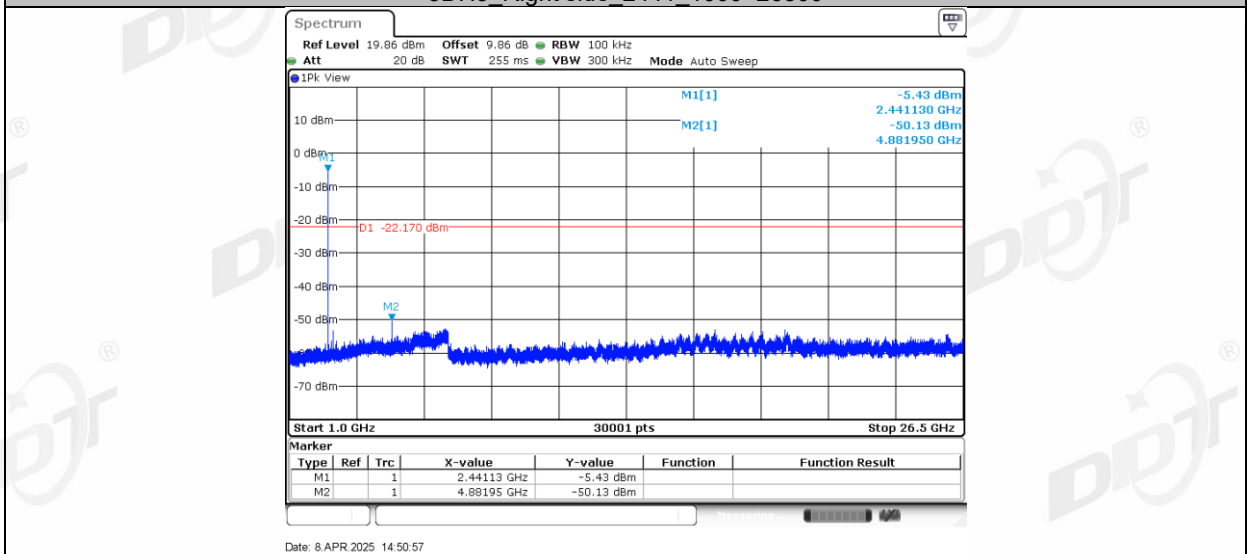

3DH5_Left side_2480_0~Reference

