



802.11n20

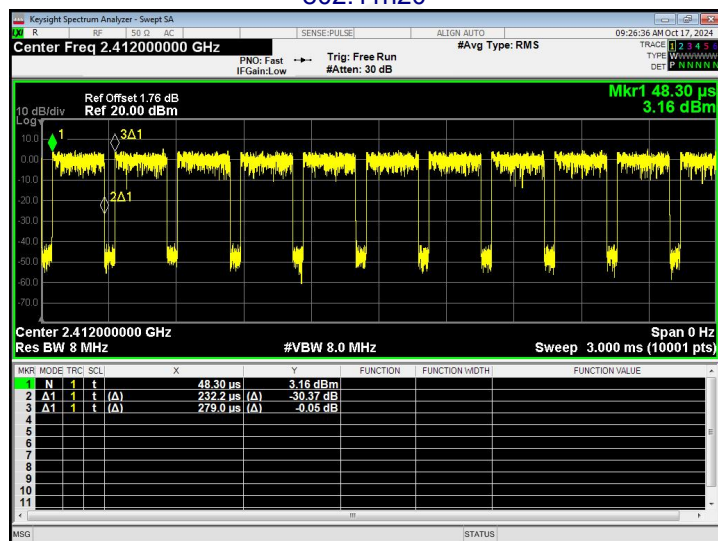

802.11n40

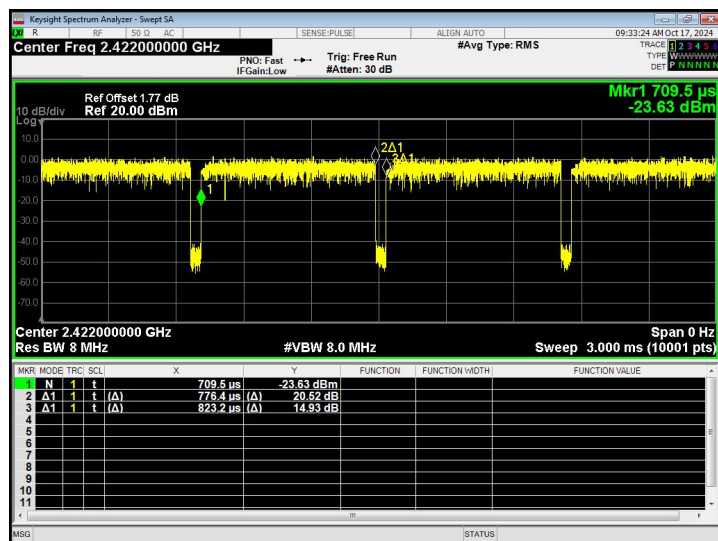

9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


9.6 TEST RESULTS

Pre-test the EUT in continuous transmitting mode with setup as stand-alone in only ANT1 transmits and only ANT2 transmits, found the worst case is ANT1 transmit and report the data.


Test plot as follows:

Test mode:

802.11b

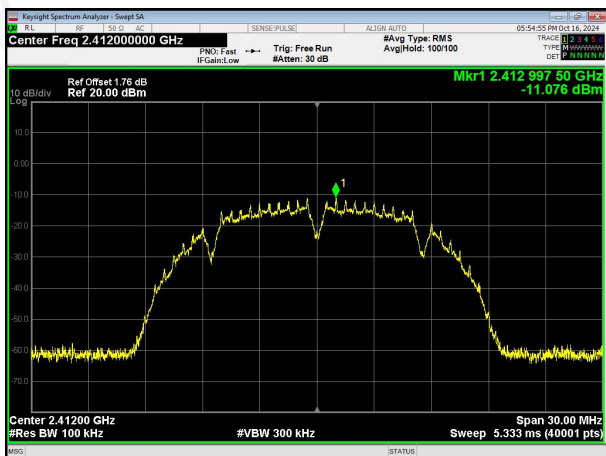


Lowest channel

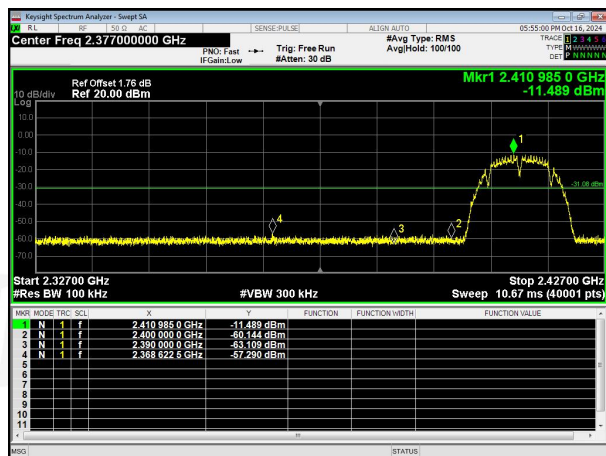


Highest channel

Test mode:

802.11b

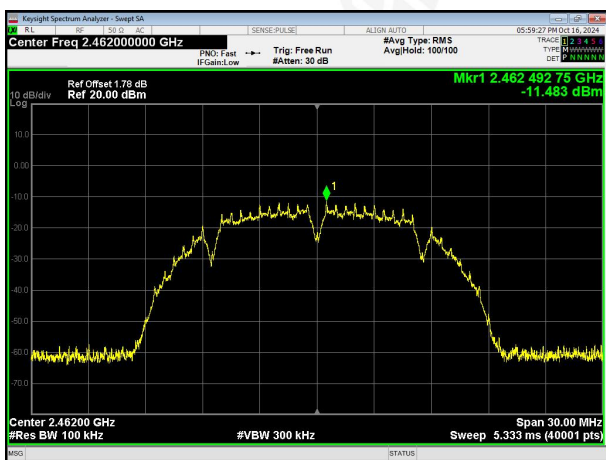


Lowest channel

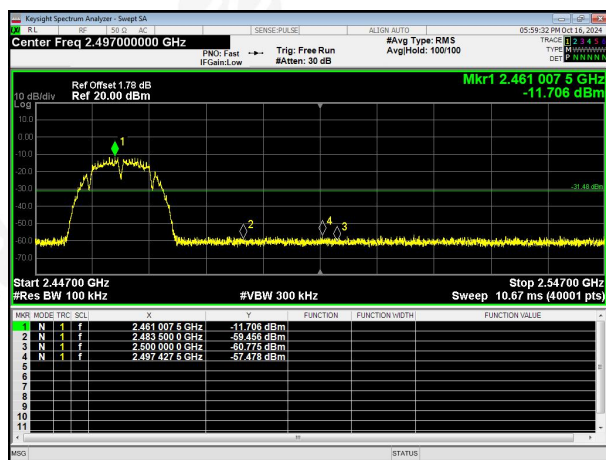


Highest channel

Test mode:

802.11g

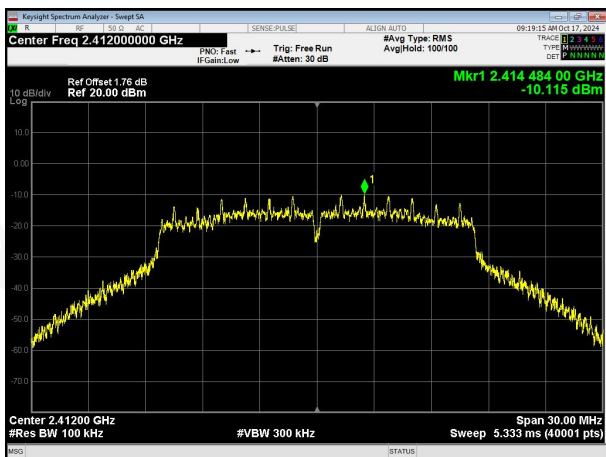


Lowest channel

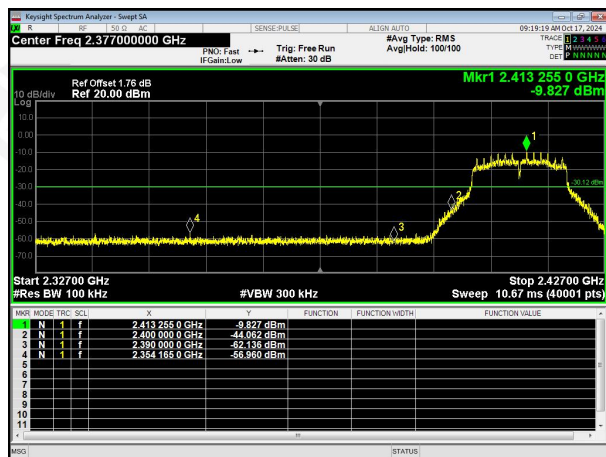


Highest channel

Test mode:

802.11g

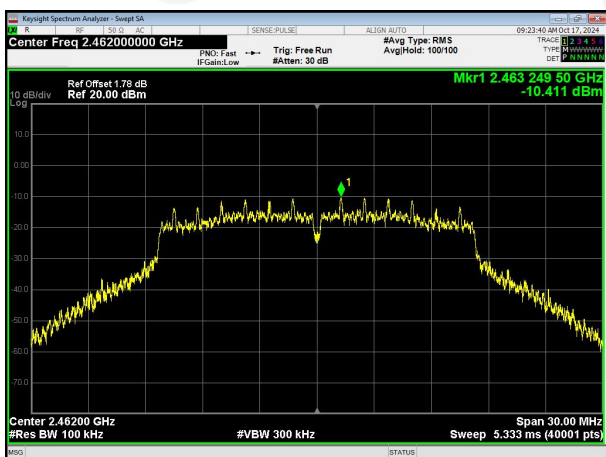


Lowest channel

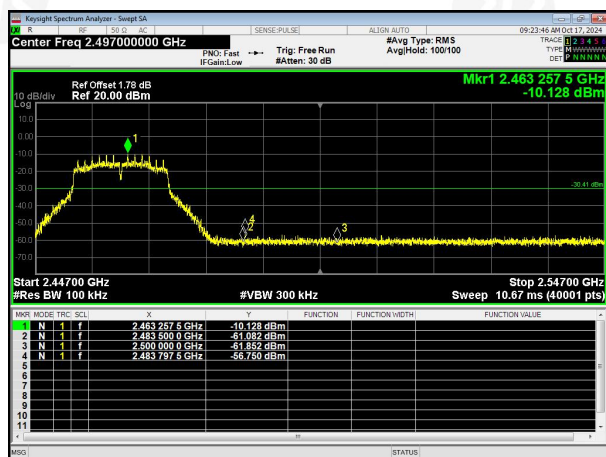


Highest channel

Test mode:

802.11n(HT20)

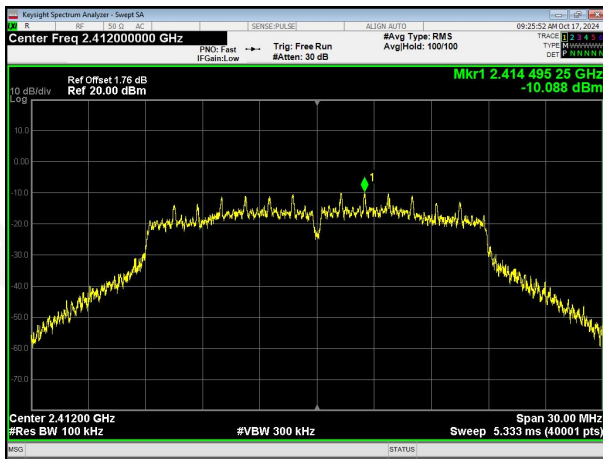


Lowest channel

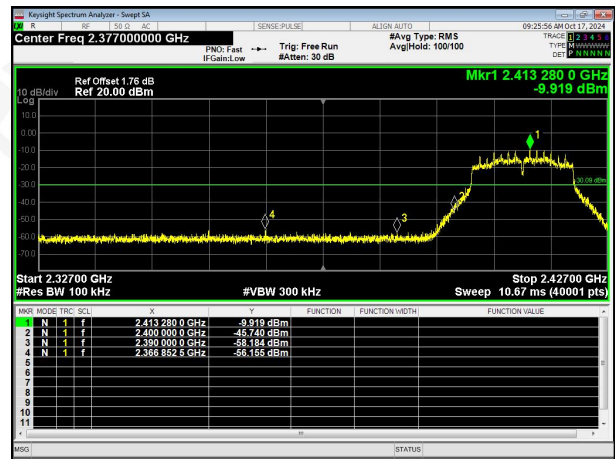


Highest channel

Test mode:

802.11n(HT20)

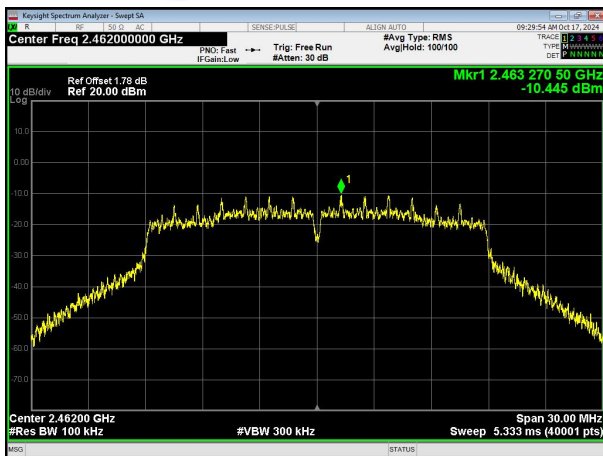


Lowest channel

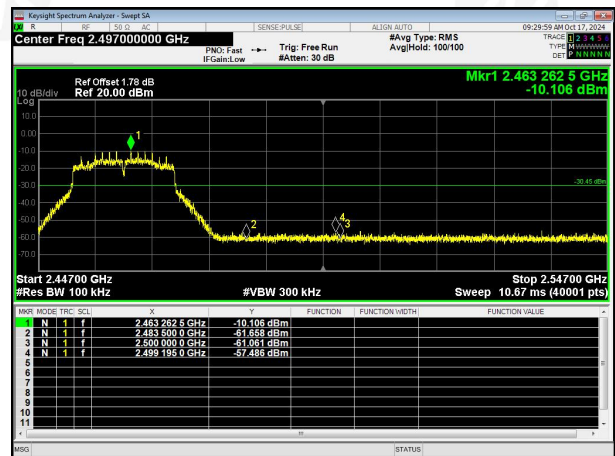


Highest channel

Test mode:

802.11n(HT40)

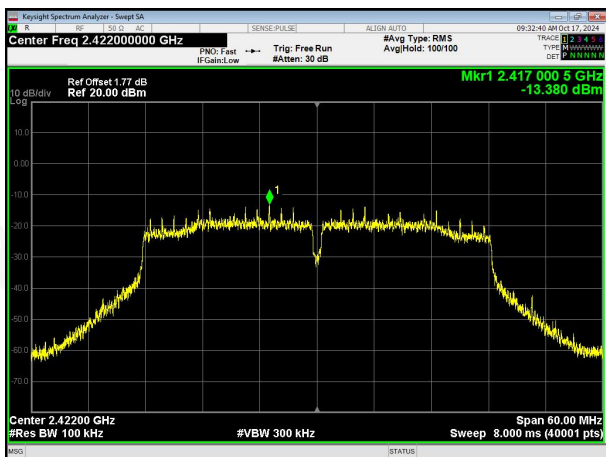


Lowest channel

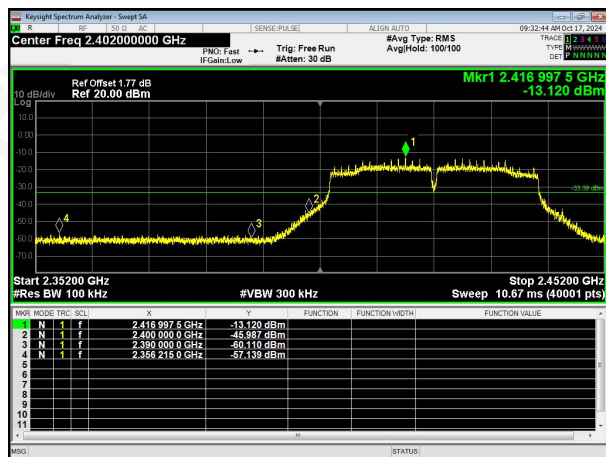


Highest channel

Test mode:

802.11n(HT40)

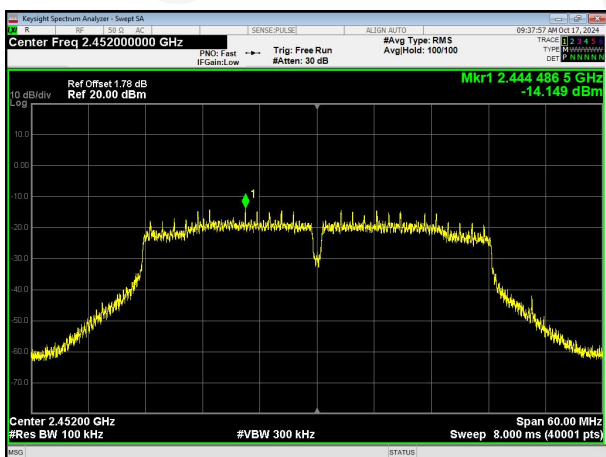

Lowest channel

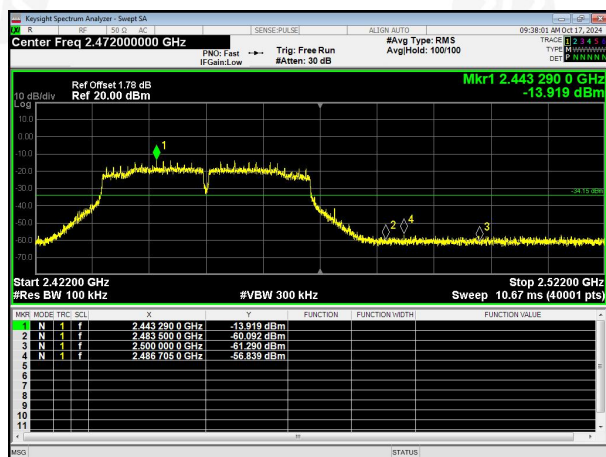



Highest channel

Pre-test the EUT in continuous transmitting mode with setup as stand-alone in only ANT1 transmits and only ANT2 transmits, found the worst case is ANT1 transmit and report the data.



Test plot as follows:

802.11b



Lowest channel

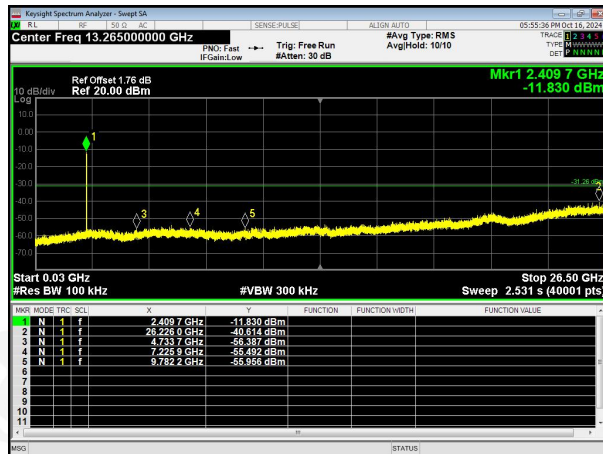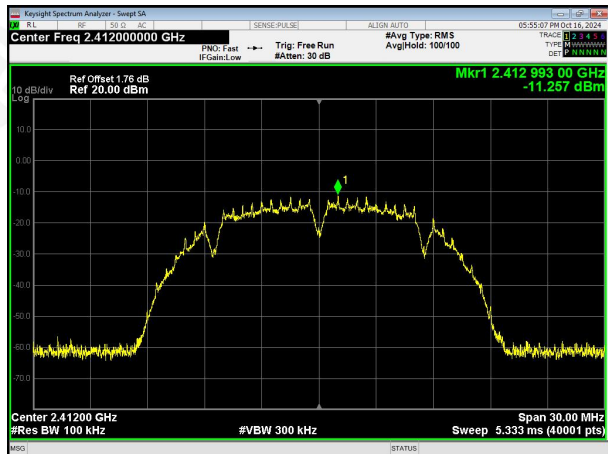

Middle channel

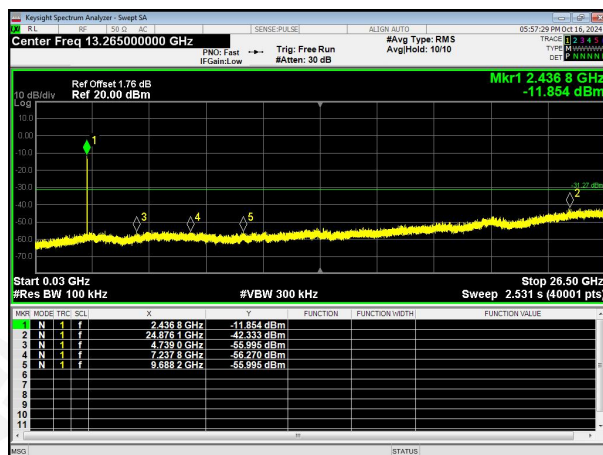
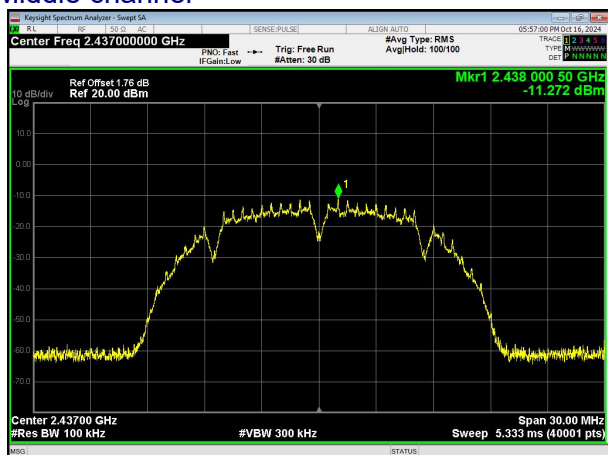


Highest channel

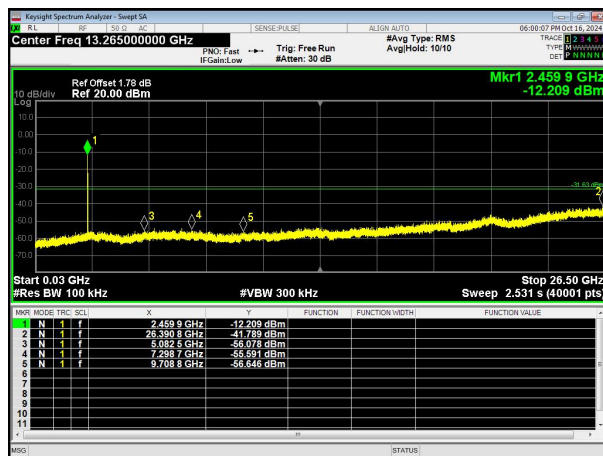
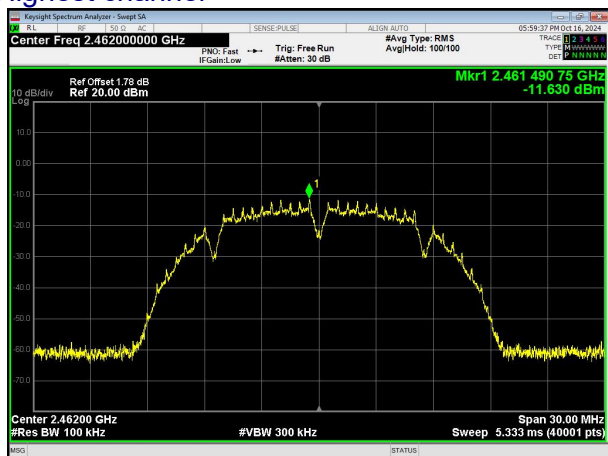


802.11g



Lowest channel

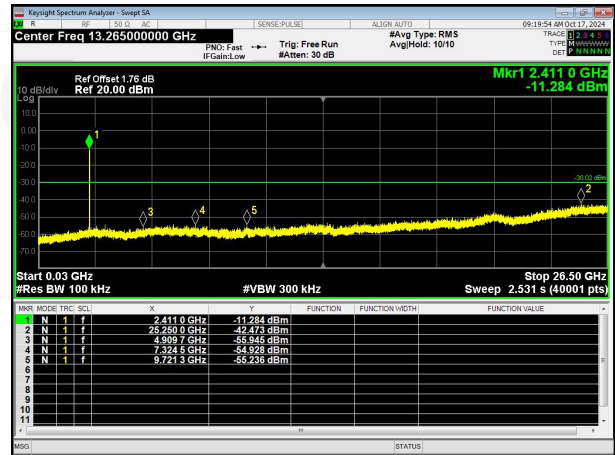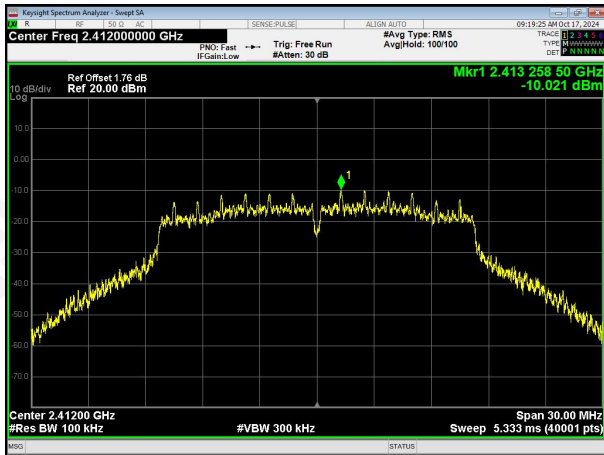

Middle channel

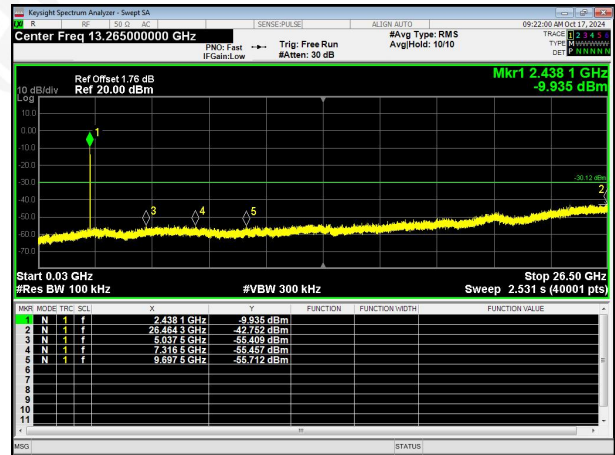
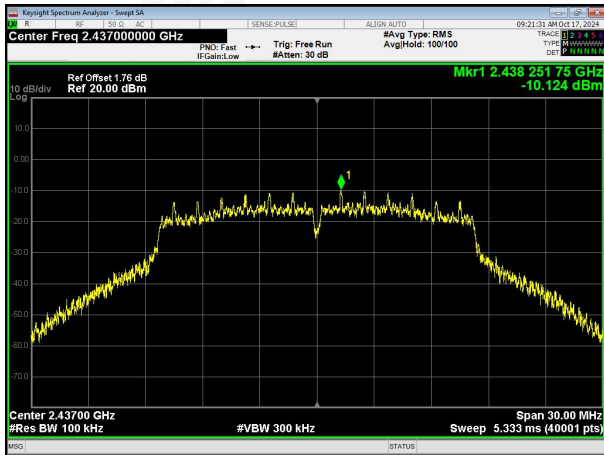


Highest channel

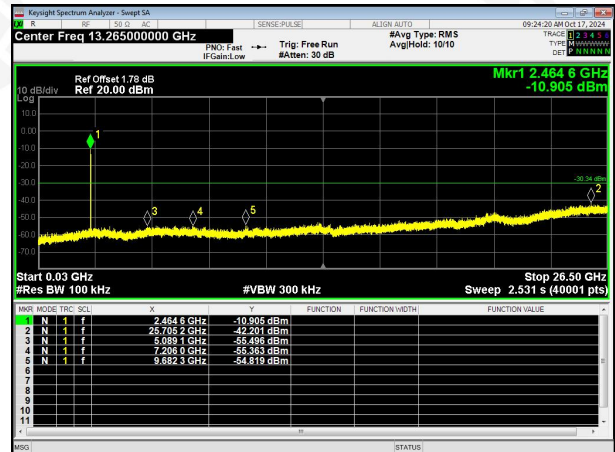
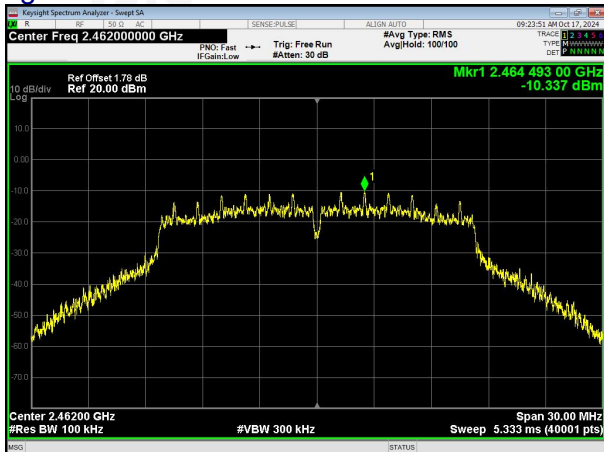


802.11n(HT20)



Lowest channel

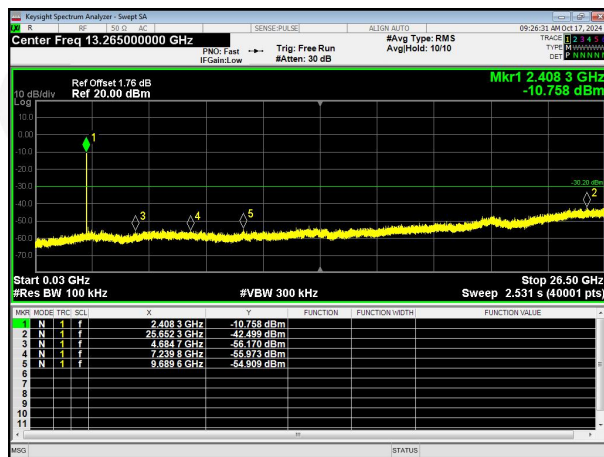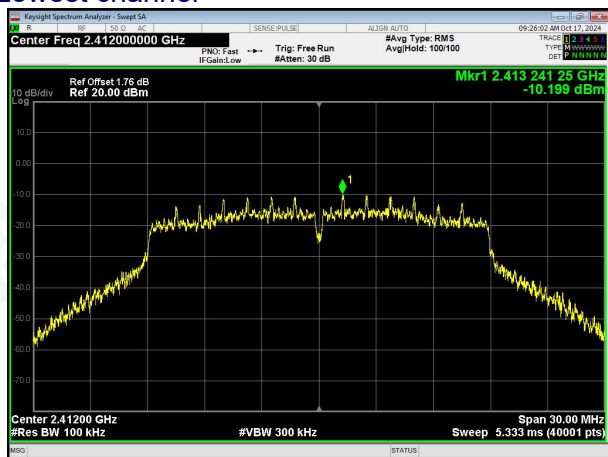

Middle channel

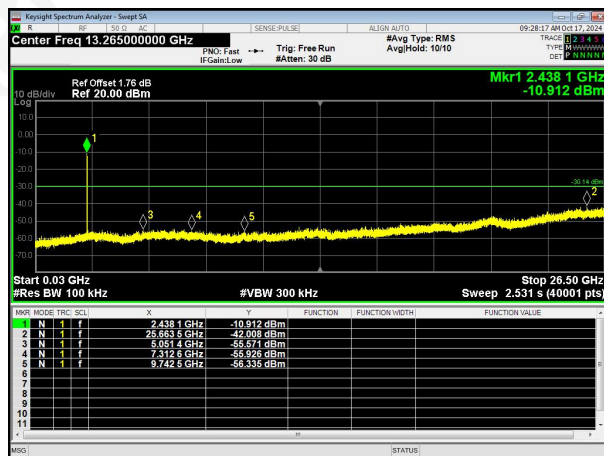
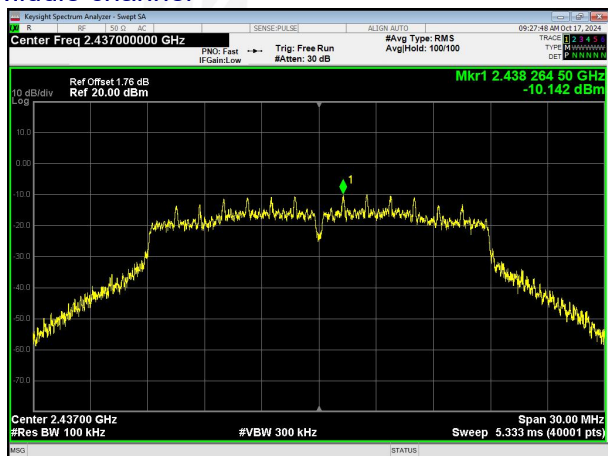


Highest channel

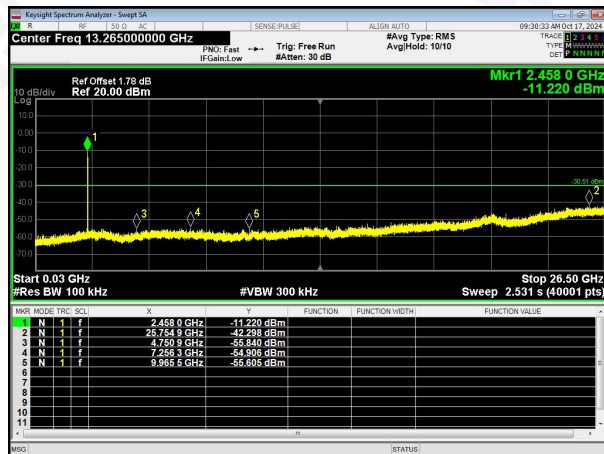
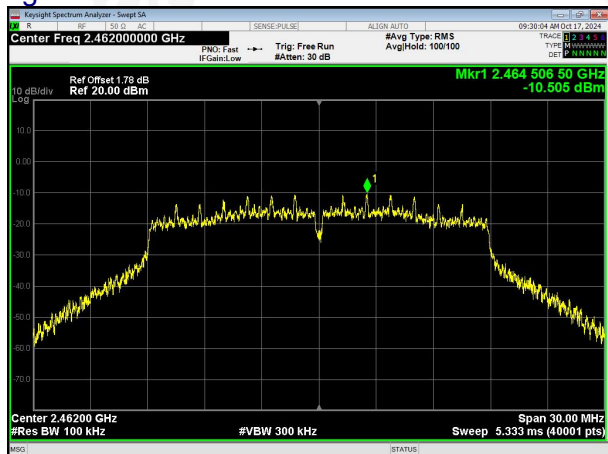


802.11n(HT40)



Lowest channel

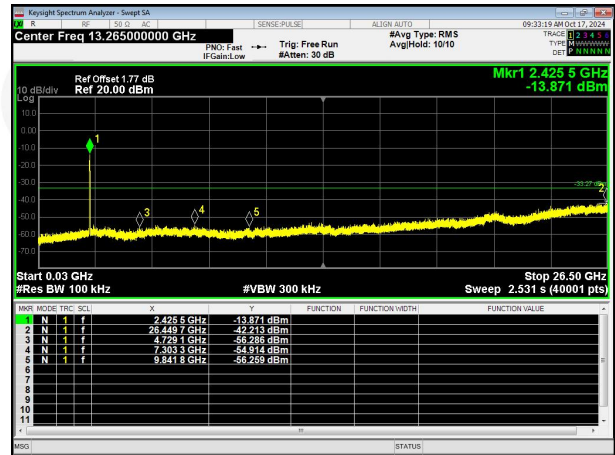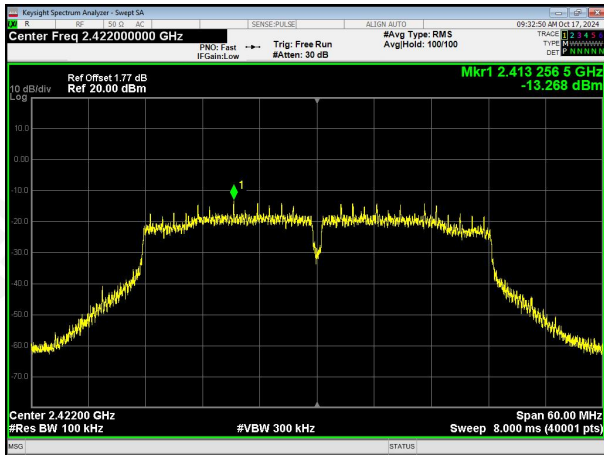

Middle channel

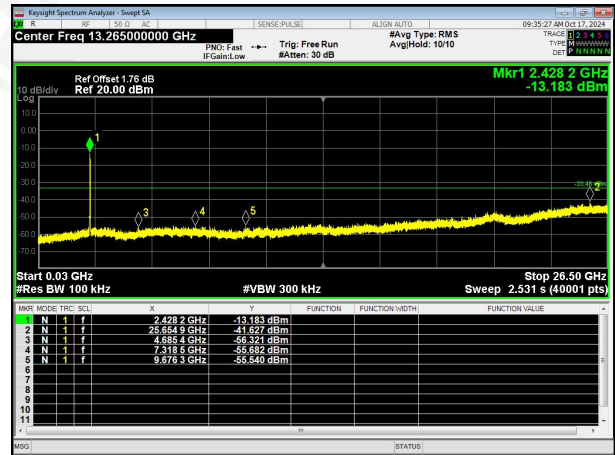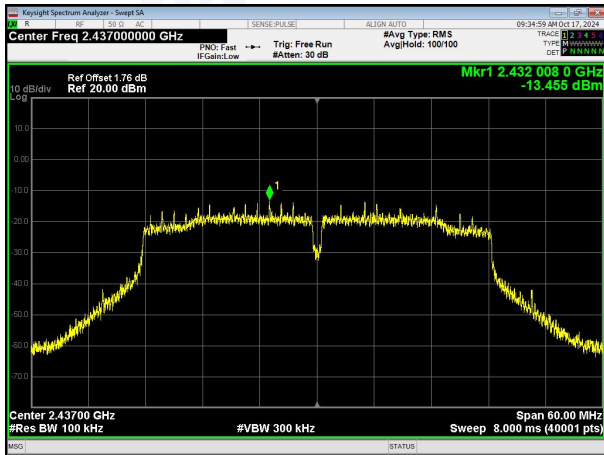

Highest channel

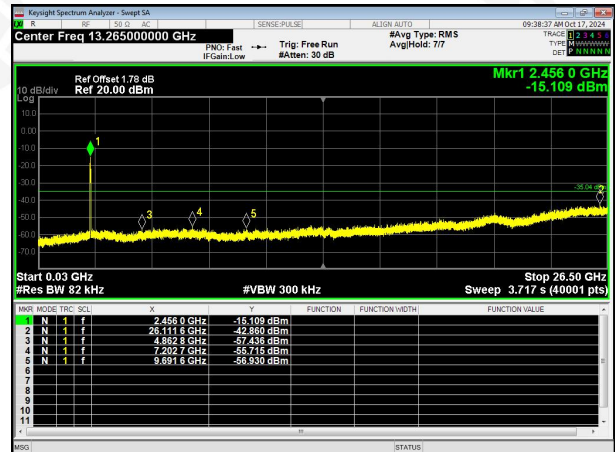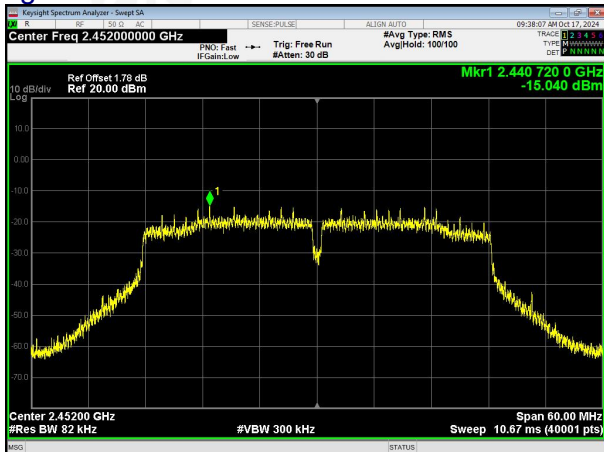

10. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antennas are Integral antenna, the best case gain of the antennas are 4.52dBi, reference to the appendix II for details	

11. TEST SETUP PHOTO

Reference to the appendix I for details.

12. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****