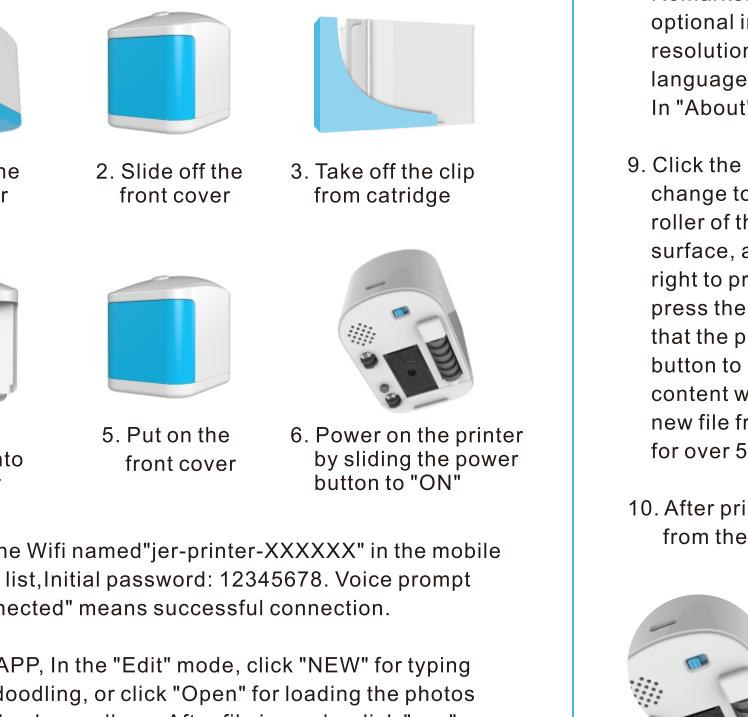


成品尺寸：100X135mm，展开尺寸：400X135mm

材料要求：128g双铜，不过膜

印刷要求：双面四色印刷

<h1>USER MANUAL</h1> <p>APP Installation</p> <p>1. For IOS system: search "JTPRINTER" and download it; For Andriod system search "JTPRINTER" in google play or Myapp and download it. Or scan the following QR code to download the APP.</p> <p>2. Open the APP, click the "Library", and open all folders, then the files inside will be downloaded automatically. Then, the app is ready for the printing.</p>  <p>IOS</p> <p>Android</p>  	<h2>Operation Instruction</h2>  <ol style="list-style-type: none"> 1. Remove the base cover 2. Slide off the front cover 3. Take off the clip from cartridge 4. Slot the cartridge into the printer 5. Put on the front cover 6. Power on the printer by sliding the power button to "ON" 7. Connect the Wifi named "jer-printer-XXXXXX" in the mobile phone wifi list, initial password: 12345678. Voice prompt "WiFi connected" means successful connection. 8. Open the APP, In the "Edit" mode, click "NEW" for typing letters or doodling, or click "Open" for loading the photos from mobile phone album. After file is ready, click "yes", then "send to the printer" to transmit the content to printer. Voice prompt "Data reception completed, please press the key to print" means transmission is successful. 9. Click the button, and the indicator will change to flash in blue, then keep the roller of the printer touching the printing surface, and move the printer from left to right to print. Voice of "Print completed, press the key to repeat print" prompts that the printing is finished and press the button to print it again if necessary. The content will be replaced when receiving a new file from APP, or pressing the button for over 5 seconds to remove it. 10. After printing, power off the printer, remove the cartridge from the printer, and hold it with the cartridge clip. 	<p>In the "Library", there are various files ready for printing. Remarks: In the "settings", AP and STA network modes are optional in network settings, and it is allowed to set printing resolution, ink type, print mode, voice volume, voice language and power save mode in printer settings. In "About", it is available to choose the APP language.</p>  	<p>Note</p> <ol style="list-style-type: none"> 1. It is recommended to clean the printing nozzle with non-dust cloth or paper before re-working, so as to realize better printing performance. 2. When printing, keeping the roller of printer touching the printing surface, otherwise printing will fail. 3. If printing on a curve surface, it is recommended to touch the surface by the printer roller only, keep the nozzle of printer 2-5mm away from the surface. 4. After printing, please put the cartridge back to the cartridge holder. 5. If no any operation over 5 minutes, the printer will enter standby mode automatically. Press the printing button to wake it up. <p>Parameters</p> <table> <tbody> <tr> <td>Product name: portable pinter</td> <td>Wifi: 802.11b/g/n</td> </tr> <tr> <td>Model No: JT01</td> <td>Net Weight: 185g</td> </tr> <tr> <td>Dimension(L×W×H): 79×55×69 mm</td> <td>Input power: 5V 2A</td> </tr> <tr> <td>Printing resolution: 300dpi</td> <td></td> </tr> <tr> <td>Printing range (W×L): 1x16 inches</td> <td></td> </tr> </tbody> </table> <p>Parts in the box</p> <table> <tbody> <tr> <td>printer × 1pc</td> <td>user manual × 1pc</td> </tr> <tr> <td>USB cable × 1pc</td> <td>cartridge × 1pc</td> </tr> </tbody> </table>	Product name: portable pinter	Wifi: 802.11b/g/n	Model No: JT01	Net Weight: 185g	Dimension(L×W×H): 79×55×69 mm	Input power: 5V 2A	Printing resolution: 300dpi		Printing range (W×L): 1x16 inches		printer × 1pc	user manual × 1pc	USB cable × 1pc	cartridge × 1pc	<p>FCC Caution</p> <p>This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.</p> <p>NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:</p> <ul style="list-style-type: none"> -- Reorient or relocate the receiving antenna. -- Increase the separation between the equipment and receiver. -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. -- Consult the dealer or an experienced radio/TV technician for help. <p>The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.</p>
Product name: portable pinter	Wifi: 802.11b/g/n																	
Model No: JT01	Net Weight: 185g																	
Dimension(L×W×H): 79×55×69 mm	Input power: 5V 2A																	
Printing resolution: 300dpi																		
Printing range (W×L): 1x16 inches																		
printer × 1pc	user manual × 1pc																	
USB cable × 1pc	cartridge × 1pc																	