


AppendixA: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.6557	0.5	PASS
BLE_1M	Ant1	2440	0.6912	0.5	PASS
BLE_1M	Ant1	2480	0.6625	0.5	PASS

Test Graphs

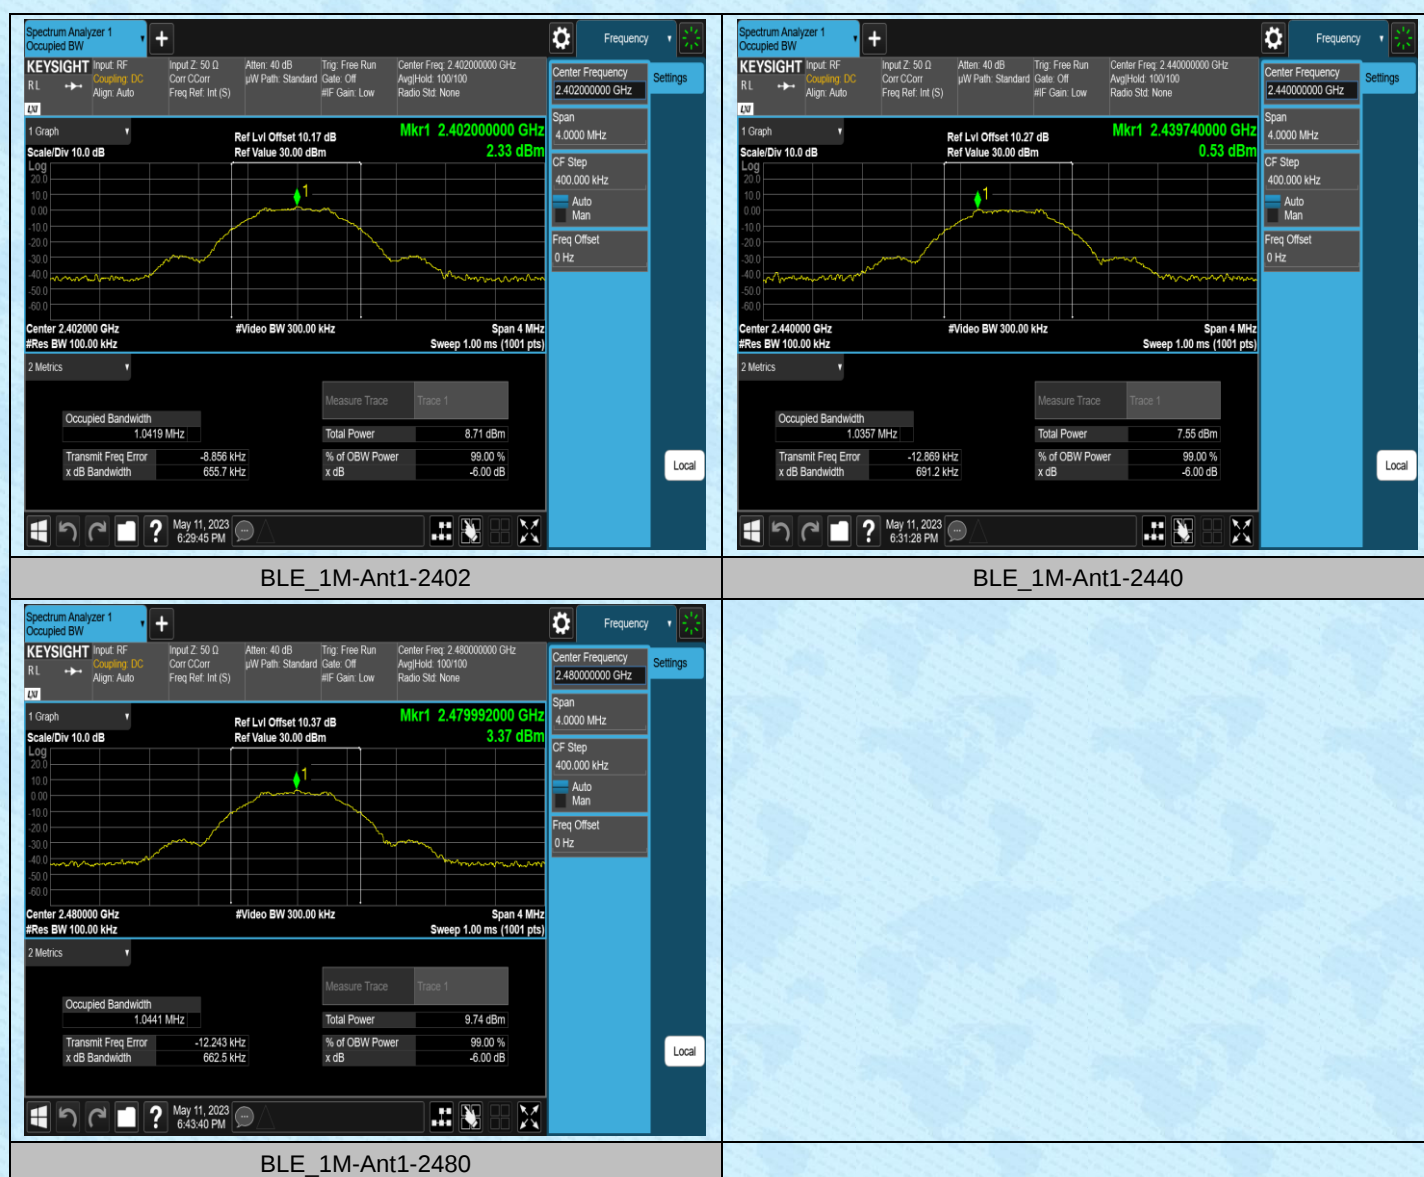


AppendixB: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0293	2401.4800	2402.5093	---	---
BLE_1M	Ant1	2440	1.0299	2439.4778	2440.5077	---	---
BLE_1M	Ant1	2480	1.0256	2479.4787	2480.5043	---	---

Test Graphs

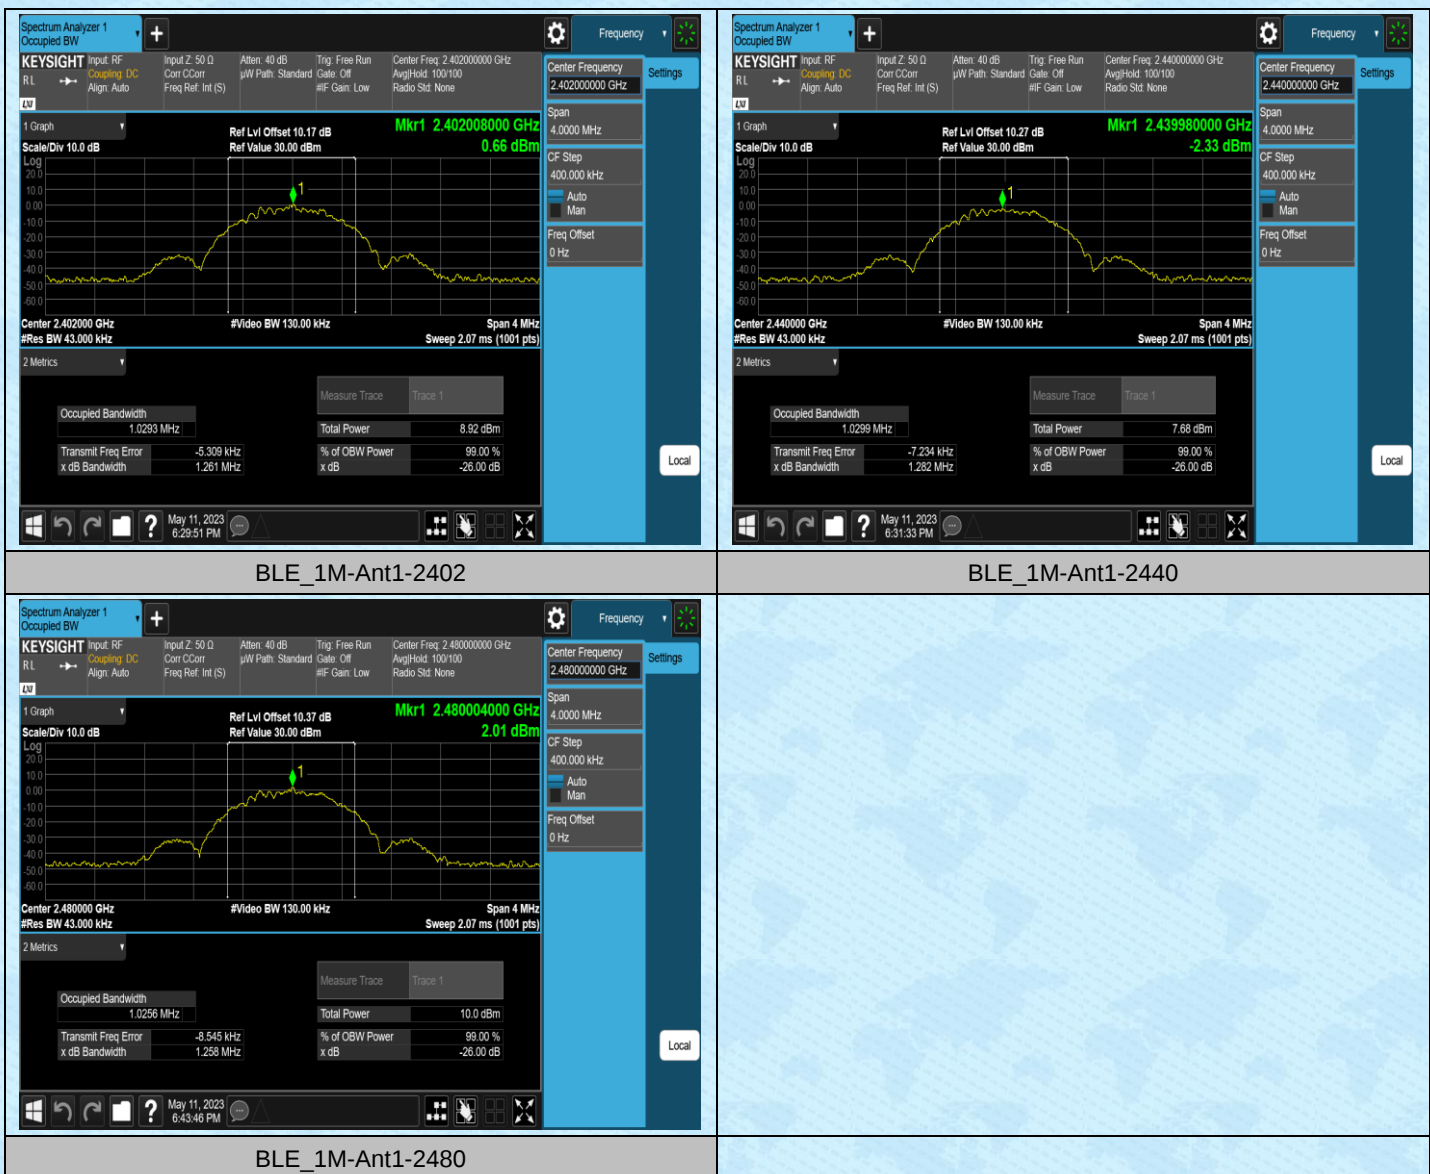


AppendixC: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	2.68	≤30	4.63	≤36	PASS
BLE_1M	Ant1	2440	2.31	≤30	4.26	≤36	PASS
BLE_1M	Ant1	2480	3.71	≤30	5.66	≤36	PASS

Test Graphs Peak

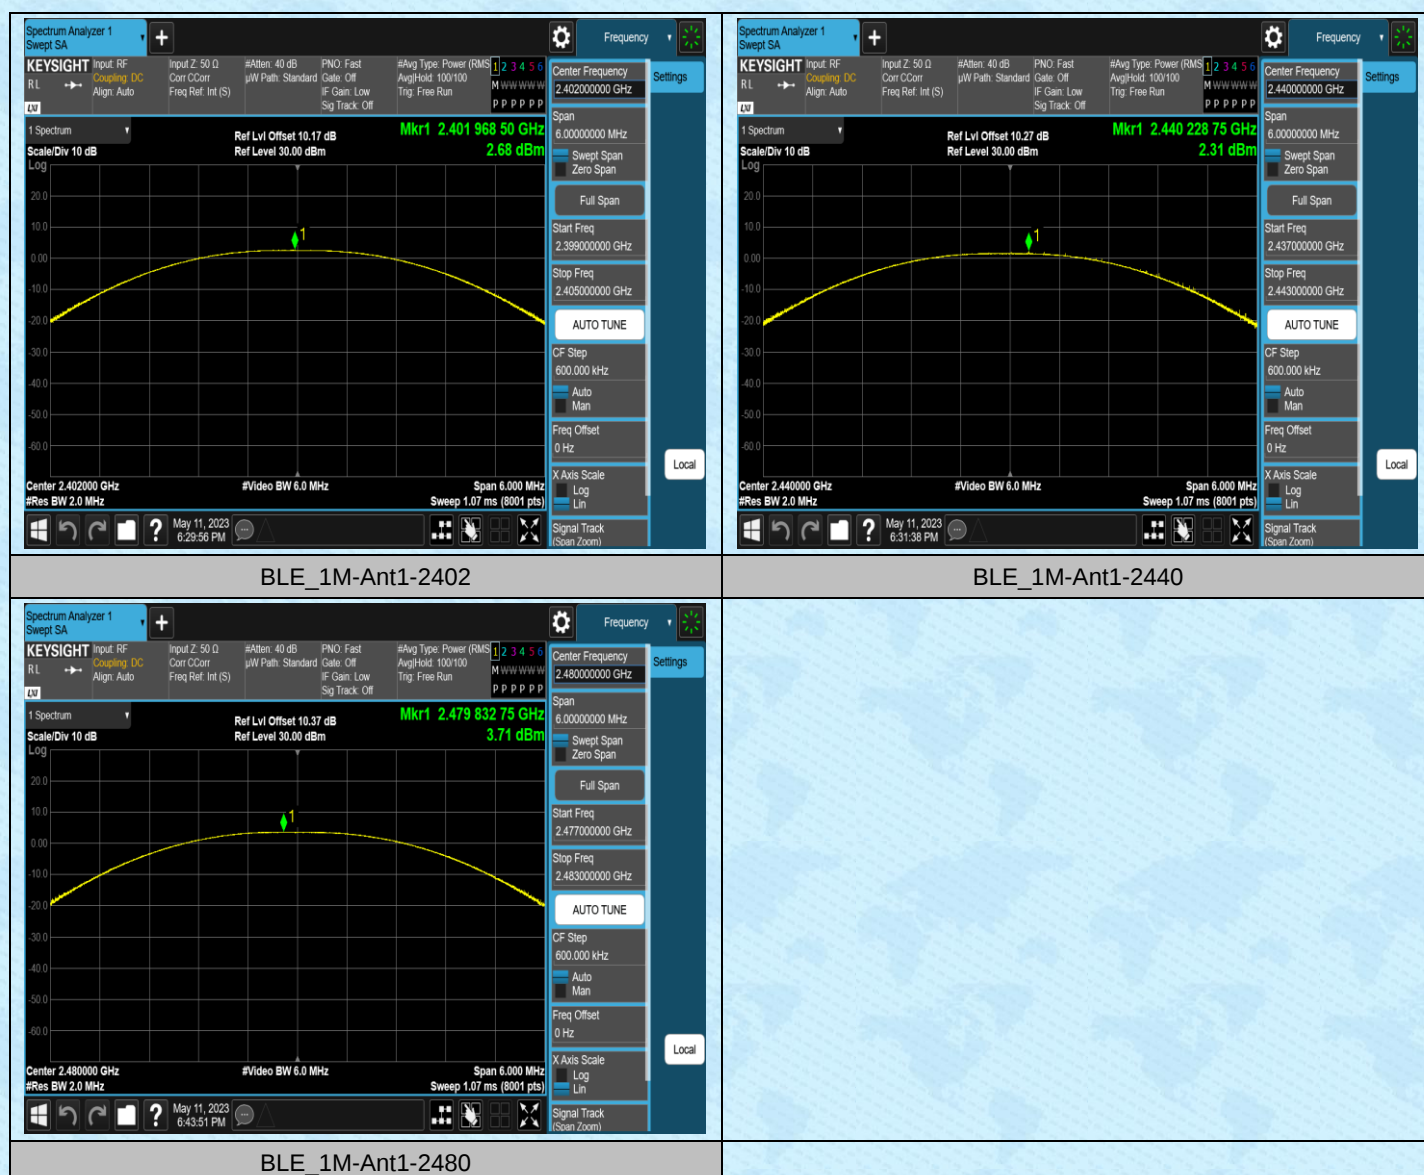


AppendixD: Maximum power spectral density

Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-13.62	≤8.00	PASS
BLE_1M	Ant1	2440	-14.3	≤8.00	PASS
BLE_1M	Ant1	2480	-12.9	≤8.00	PASS

Test Graphs

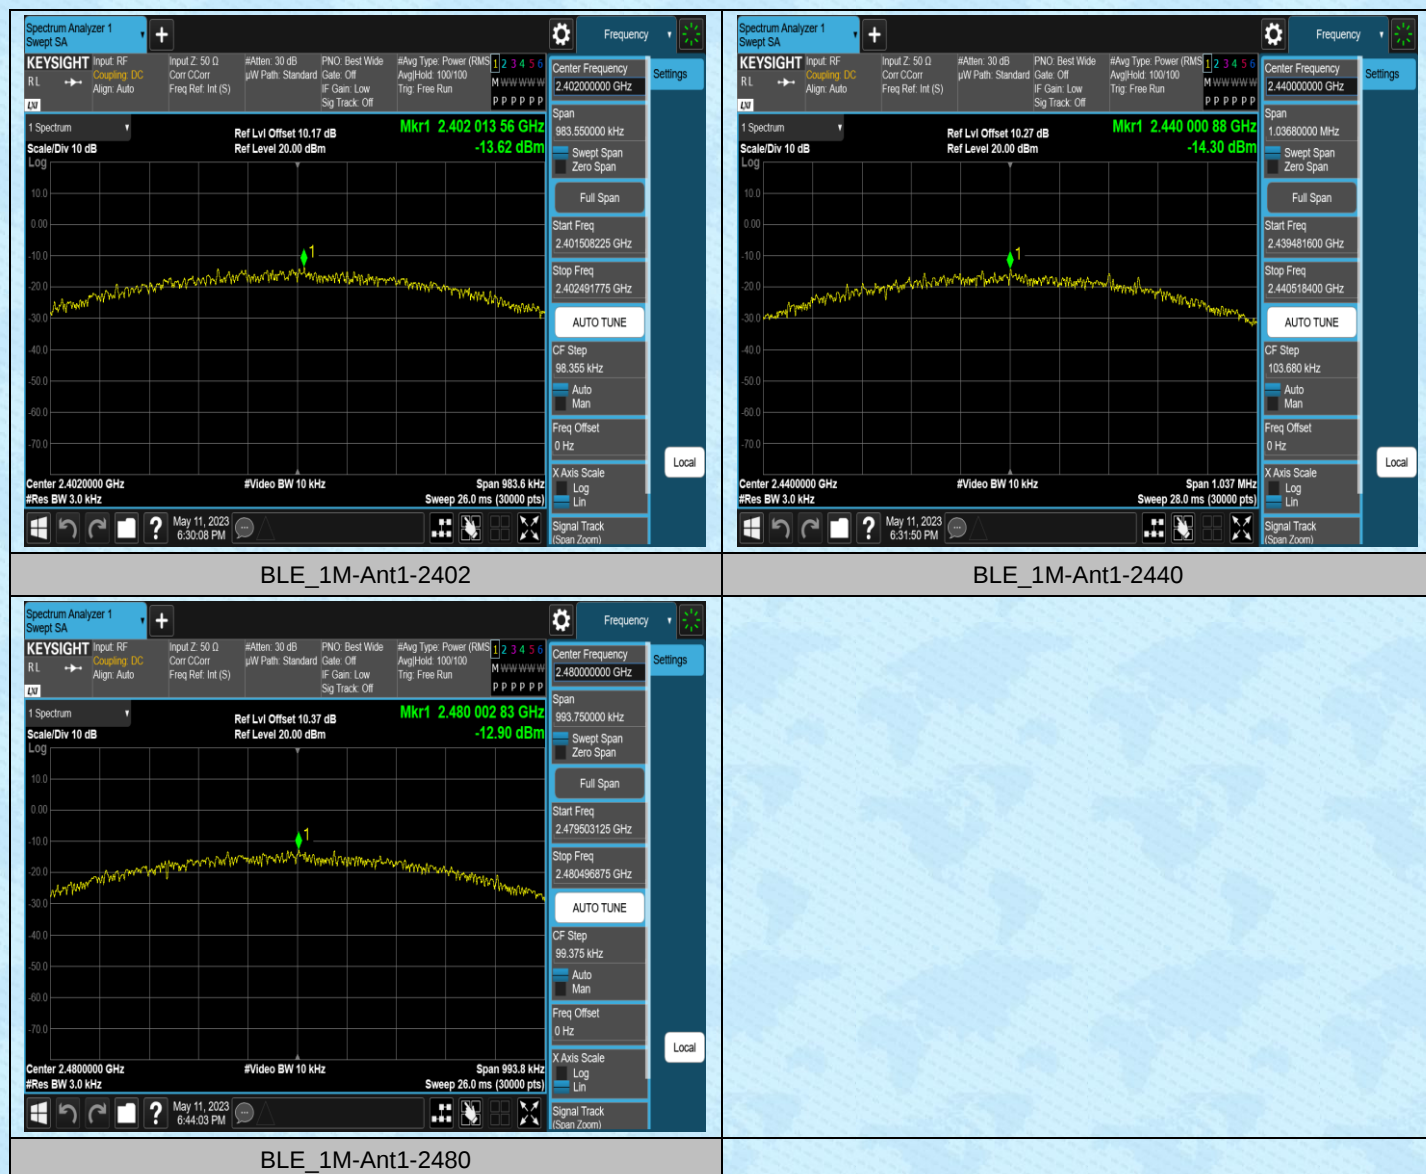


AppendixF:Band edge measurements

Test Result

Test Mode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	1.20	-50.34	≤-18.8	PASS
BLE_1M	Ant1	High	2480	2.51	-50.67	≤-17.49	PASS

Test Graphs

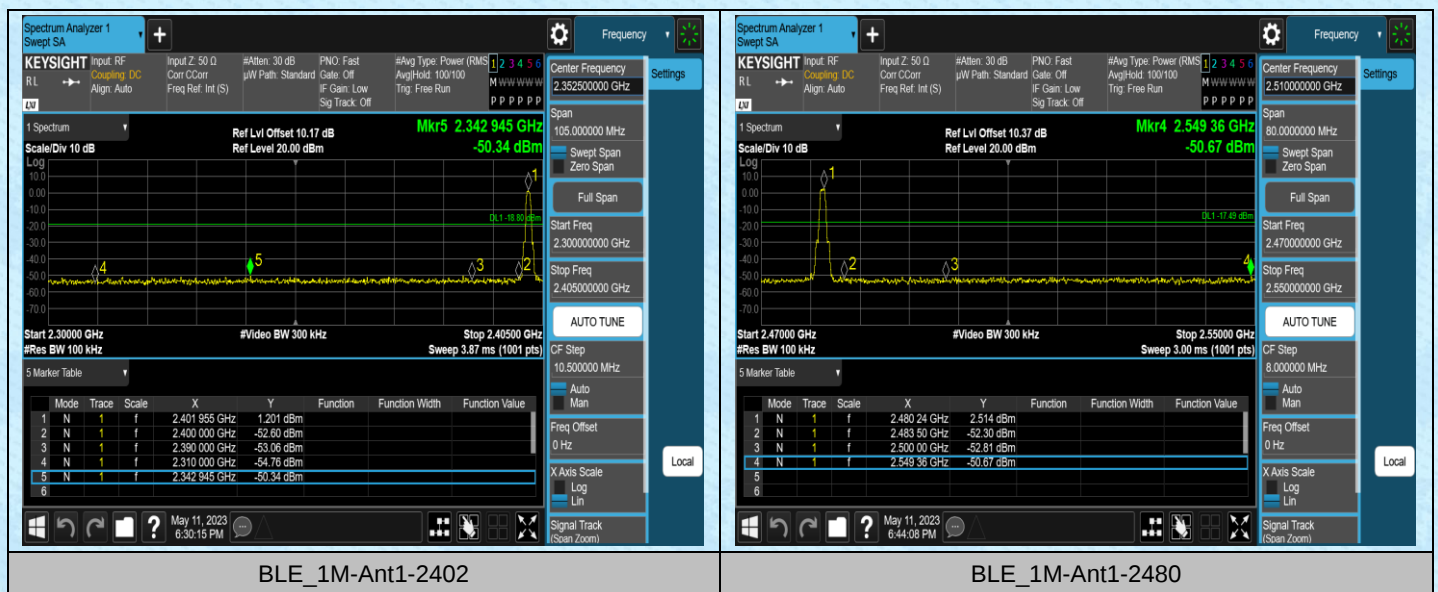


AppendixG:Conducted Spurious Emission**Test Result**

Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	0.69	0.69	---	PASS
BLE_1M	Ant1	2402	30~1000	0.69	-62.33	≤-19.31	PASS
BLE_1M	Ant1	2402	1000~26500	0.69	-50.45	≤-19.31	PASS
BLE_1M	Ant1	2440	0~Reference	0.64	0.64	---	PASS
BLE_1M	Ant1	2440	30~1000	0.64	-62.4	≤-19.36	PASS
BLE_1M	Ant1	2440	1000~26500	0.64	-49.75	≤-19.36	PASS
BLE_1M	Ant1	2480	0~Reference	1.41	1.41	---	PASS
BLE_1M	Ant1	2480	30~1000	1.41	-62.76	≤-18.59	PASS
BLE_1M	Ant1	2480	1000~26500	1.41	-50.63	≤-18.59	PASS

Test Graphs



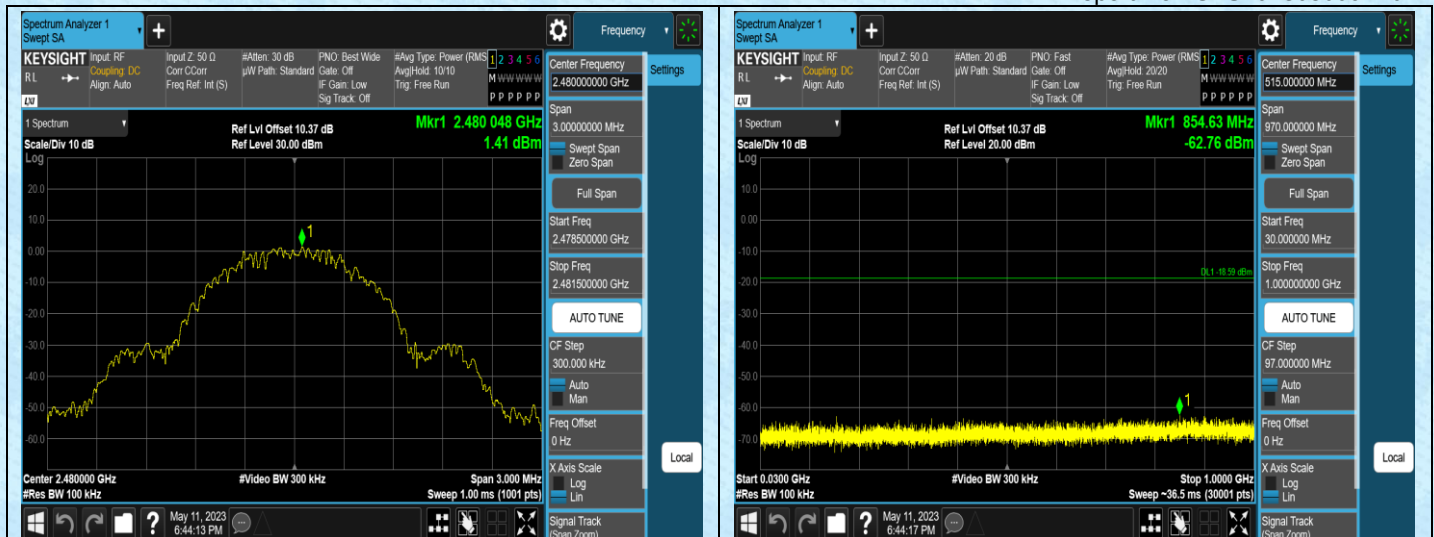

BLE_1M-Ant1-2480-0-Reference

BLE_1M-Ant1-2480-30~1000



BLE_1M-Ant1-2480-1000~26500

-----End-----