




INSTRUCTION MANUAL

Portable PA Karaoke & Livestream System



Model:LK2in1

DEAR CUSTOMER

In order to achieve the best performance of your product, please read this instruction manual carefully before using, and keep it for future reference.

IMPORTANT SAFETY INSTRUCTIONS

For all products:

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Do not block any ventilation openings. Install this apparatus in accordance with the manufacturer's instructions.
7. Do not install this apparatus near any heat sources such as radiators, heat registers, stoves or other apparatus (including amplifiers) that produce heat.
8. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
9. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles and the point where they exit from the apparatus.
10. Use only attachments/accessories specified by the manufacturer.
11. Unplug this apparatus during lightning storms or when unused for long periods of time.
12. To disconnect this apparatus from the AC mains completely, disconnect the power-supply cord plug from the AC receptacle.
13. Use only with the cart, stand, tripod, bracket or table specified by the manufacturer or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
14. The mains plug of the power-supply cord shall remain readily operable.
15. Do not expose batteries to excessive heat such as sunshine, fire or the like.
16. This apparatus is intended to be used only with the power supply and/or charging cable provided by the manufacturer.
17. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, has been dropped, or is missing battery doors.
18. CAUTION: Permanent hearing loss may occur if earphones or headphones are used at high volume for prolonged periods of time.

Note: To prevent possible hearing damage, do not listen to high volume levels for long periods.



The Lightning flash with arrowhead symbol, with an equilateral triangle is intended to alert the user of the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

CAUTION

**RISK OF ELECTRIC SHOCK
DO NOT OPEN**

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The exclamation point within an equilateral triangle is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Federal Communication Commission Interference Statement FCC AND IC INFORMATION FOR USERS

Caution FCC and IC statement for users (USA and Canada only)

This device complies with Part 15 of the FCC rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference; and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications not expressly approved by LK Australia could void the user's authority to operate the equipment.

This product must not be disposed of or dumped with your other household waste. You are liable to dispose of all your electronic or electrical waste equipment by relocating over to the specified collection point for recycling of such hazardous waste. Isolated collection and proper recovery of your electronic and electrical waste equipment at the time of disposal will allow us to help conserving natural resources. Moreover, proper recycling, and collection points, please contact your local city center, household waste disposal service, shop from where you purchased the equipment, or manufacturer of the equipment.

Instructions for Users on Removal, Recycling and Disposal of Batteries

The remove the batteries from your equipment or remote control, reverse the procedure described in the owner's manual for inserting batteries. For products with a built-in battery that lasts for the lifetime of the product, removal may not be possible for the user. In this case, recycling or recovery, it becomes necessary to replace such a battery; this procedure must be performed by authorized services centers. In the European Union and other locations, it is illegal to dispose of any battery with household trash. All batteries must be disposed of in an environmentally sound manner. Contact your local waste-management officials for information regarding the environmentally sound collection, recycling and disposal of used batteries.



INTRODUCTION

Congratulations on your purchase! We encourage you to take a few minutes to read this manual, which describes the product and includes step-by-step instructions to help you to set up and get started. Read and understand all the safety instructions before using your product.

If you have any questions about these products, their installation or their operation, please contact your retailer or customer service, or visit us at LKAUSTRALIA.COM.AU

WARNING:

Danger of explosion if battery is incorrectly replaced. To reduce risk of fire or burns, don't disassemble, crush, puncture, short external contact, expose to temperature above 60°C (140°F), or dispose of in fire or water. Replace only with specified batteries.

In case of batteries, accumulators and button cells containing more than 0.0005 mercury, more than 0.002% cadmium or more than 0.004% lead, shall be marked with the chemical symbol for the metal concerned: Hg, Cd or Pb respectively. Please Refer to the below symbol: Hg, Cd, Pb.

WARNING:

DO NOT INGEST BATTERIES, CHEMICAL BURN

HAZARD [the remote supplied with] this product contains a coin/ button cell battery. If the coin/button cell battery is swallowed, it can cause severe international burns in just 2 hours and can lead to death. Keep new and used batteries away from children. If you think batteries might have been swallowed or placed inside any part of body, seek immediate medical attention.

WHAT'S IN THE BOX



Australia Model



USA Model

Product code: LK2IN1

Peak Power: 600W

Battery capacity: Power lithium battery 7.4V/5Ah

Speaker unit: 6.5 inch bass*1

Neodymium horn tweeter*1


MIC frequency: 520.0MHz-546.0MHz

ACCESSORIES

1. Adaptor*1
2. Remote*1
3. Audio cables*2
4. Approved US/Australia AC Adapter and power plug*1

CONTROL PANEL


A

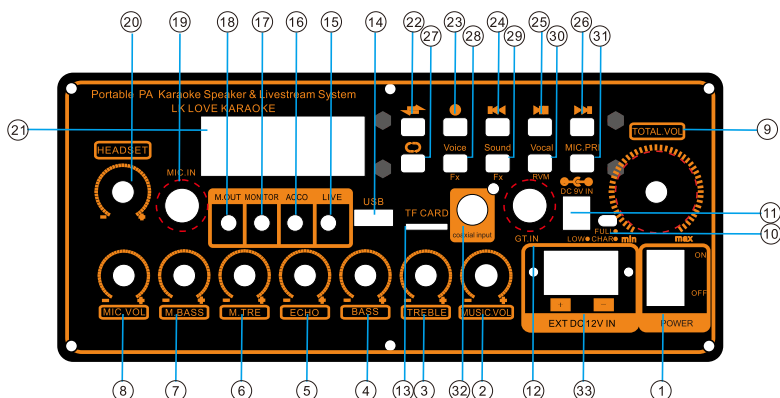

- | | |
|--|--|
| 1. Power on or off. | 17. MONITOR- Earphone connection |
| 2. Increase or decrease the volume level. | 18. MIC. OUT |
| 3. Treble: | 19. MIC IN - Connect to a microphone. |
| 4. Bass: | 20. HEADSET |
| 5. Echo: | 21. LED Display |
| 6. Treble (MIC) | 22. MODE: |
| 7. Bass (MIC) | 23. REC: Recording/ Play the recording |
| 8. Volume (MIC) | 24. Previous Song |
| 9. Total Volume: | 25. Play, pause or resume. |
| 10. Battery level indicator. | 26. Next song |
| 11. DC15V IN | 27. REPEAT |
| 12. GUITAR - Connect to the guitar. | 28. Voice Fx |
| 13. TF CARD: | 29. Sound Fx |
| 14. USB- Connect to a USB storage device. | 30. Vocal RVM |
| 15. Live – 3.5mm Audio Out (Livestream to fb live, youtube live, audio or video recording) | 31. MIC. PRI |
| 16. ACCO – Accompaniment Input (3.5mm Audio Input) | 32. Coaxial Input |
| | 33. EXT DC 12V IN |

REMOTE CONTROL

B

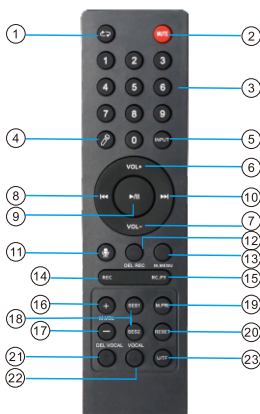

1. REPEAT

2. MUTE

3. 0~9 Choose the songs

4. Karaoke

5. INPUT

6. VOL+

7. VOL-

8. Previous Song

9. Play/Pause

10. Next song

11. Voice broadcast ON/OFF

12. Delete Recording

13. M.MENU : MIC MENU

14. Recording

15. RC.PY: Recording Play

16. M.VOL+

17. M.VOL-

18. SES: Special Effect sound: Applause

19. M.PRI: MIC Priority

20. RESET

21. DEL VOCAL: Delete Vocal

22. Vocal

23. U/TF: USB/TF

CHARGING

LK2IN1 is powered by a built-in rechargeable battery.


Always connect the system to an earthed outlet.

IMPORTANT:

- Fully charge the built-in battery before using for the first time, which will prolong the battery lifespan.
- Charge the battery before and after each use
- Similar to a car battery - Charge the built-in battery at least every 30 days.
- Always switch off the device if not in use
- Disconnect AC Power plug when it is fully charge.
- Deep discharging or over-charging of battery must be avoided to ensure sufficient life-time and sometimes also the operation safety of these batteries
- Built-in battery charging works on AC power only.

Charge your Speaker

Use the AC power to charge your LK2IN1.



1. Make sure that the speaker is turned off
2. Connect the AC Power adapter(supplier) to the speaker first before turn on the mains power at the wall socket
3. Indicator lights up in BLUE while charging
4. Indicator lights up in GREEN when the battery is fully charged

USING YOUR LK2IN1

Bluetooth Connection

You can use your LK2IN1 as an external speaker for your Bluetooth enabled smartphone or tablet.

1. Press Mode to enter Bluetooth pairing mode.
2. Choose "LKAustralia" or "LK2IN1" to connect.
3. Once successfully connected, audio will stream from your Bluetooth device to this speaker.

To terminate the Bluetooth-enabled device:

- Turn off this speaker;
 - Disable Bluetooth on your device; or
 - Move this speaker beyond the Bluetooth operational range.
- To reconnect the Bluetooth-enabled device:
- When you turn on this speaker next time, it tries to reconnect the last connected device automatically;
 - If not, manually select "LKAUSTRALIA" Or "LK2IN1" on your Bluetooth device to start a connection.

USB Connection / Recording

With your LK2IN1, you can enjoy music that is stored on a USB storage device such as an MP3 player.

Plug your USB storage device into the USB port of your LK2IN1. The music will play automatically. If not, please check if the USB device contains playable audio contents


AUX Connection

To play music on your portable audio device through this speaker, make sure that no Bluetooth connection or USB device is available.

1. Connect a 3.5mm audio cable to:
 - the headphone socket of your portable audio device;
 - the AUX connector of this speaker.


Turn on your portable audio device and it starts playing.

Recommended Karaoke Settings

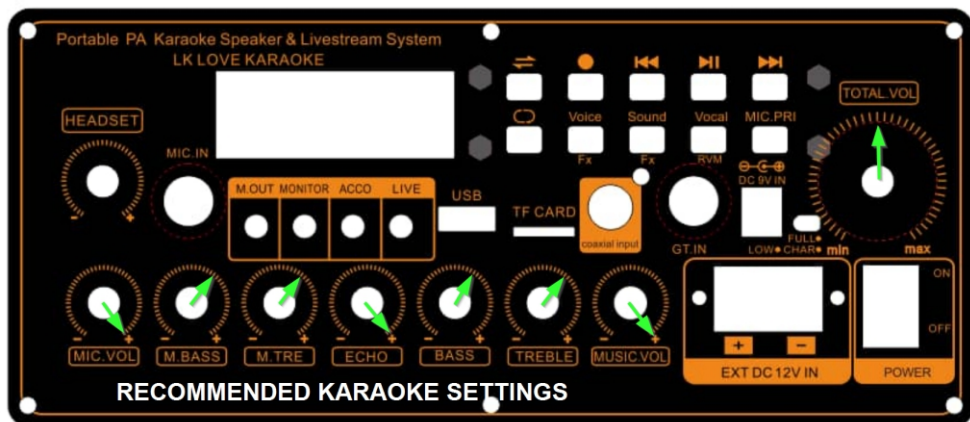

Livestream Connection

Livestream must be in Bluetooth mode or Line in Mode

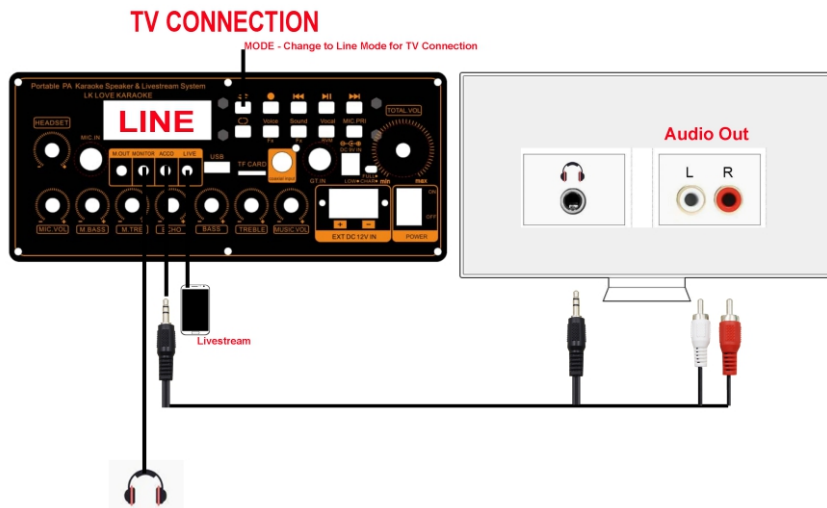

TROUBLESHOOTINGS

Caution:

–Never try to repair the product by yourself. If you have any problems while using this product, check the following points before you request service.

System

The unit will not turn on.

- Check if the power cord is plugged into the outlet and to the LK2IN1.
- For “LK2IN1” make sure the speaker is fully charged, if not use the power cord to turn on your speaker.

Sound

No sound from the LK2IN1.

- Make sure that the LK2IN1 is powered on.
- Make sure that volume level is turned to an audible level.
- Make sure that it is connected to a music source.

Bluetooth

A device cannot connect with the LK2IN1.

- Check if you enable the Bluetooth function of the device.
- The LK2IN1 is already connected to another Bluetooth device. Press and hold on Bluetooth to disconnect and pair with a new device.

Poor audio quality from a connected Bluetooth device.

- The Bluetooth reception is poor. Move the device closer to the LK2IN1, or remove any obstacle between the device and the LK2IN1.

Product name	LK2IN1
AC power input	 100-240V~50/60Hz 3.0A Max
Built-in battery	lithium battery 7.4V/5Ah
USB output	5V 2.1A
Speaker drivers	6.5 inch bass Neodymium horn tweeter*1
Speaker impedance	4 ohm
Peak output power	600 W
Microphone Frequency Complies with new FCC rules	520.0MHz-546.0MHz
Bluetooth version	V5.0
USB format	FAT16, FAT32
USB file format	.mp3, .wma, .wav
Dimension (W x H x D)	420mm*298mm*370mm
Net weight	7.5kgs



Scan For Support Videos



Brand:LK Love Karaoke

Purpose of Goods:Active Portable Speaker

Manufacturer:Love Karaoke Australia,29 Disraeli Street, St Albans,
Victoria 3021 Australia

Country of Origin:China

Warranty Period:1 year <https://lkaustralia.com.au/terms-conditions/>

USA Sales & Support:(650) 999-0420

Information about service center:<https://lkaustralia.com.au>
