


■ Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)


All antennas and modulation modes are tested, the data of the worst mode is described as below.

U-NII 5 Band (5925 ~ 6425MHz)		
Test mode:	802.11ax(20)	Frequency(MHz): 5955

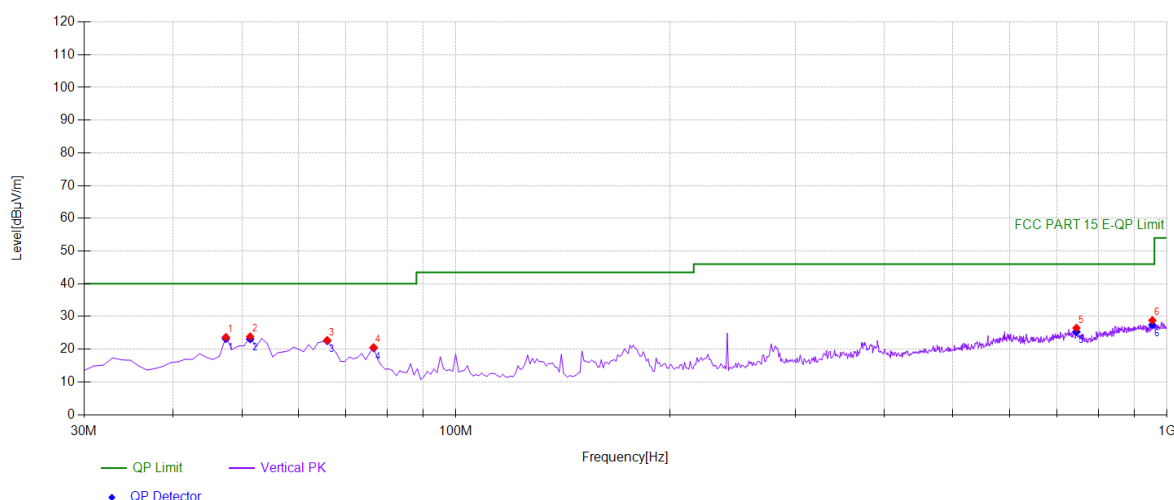

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	40.08	-16.39	23.69	PK	40.00	16.31	Vertical
2	51.3614	40.07	-16.21	23.86	PK	40.00	16.14	Vertical
3	65.9259	40.95	-18.21	22.74	PK	40.00	17.26	Vertical
4	76.6066	40.33	-19.77	20.56	PK	40.00	19.44	Vertical
5	745.605	32.07	-5.57	26.50	PK	46.00	19.50	Vertical
6	953.393	31.20	-2.37	28.83	PK	46.00	17.17	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	23.20	40.00	16.80
2	51.3614	-16.21	23.13	40.00	16.87
3	65.9259	-18.21	22.55	40.00	17.45
4	76.6066	-19.77	20.37	40.00	19.63
5	745.6056	-5.57	25.35	46.00	20.65
6	953.3934	-2.37	27.43	46.00	18.57

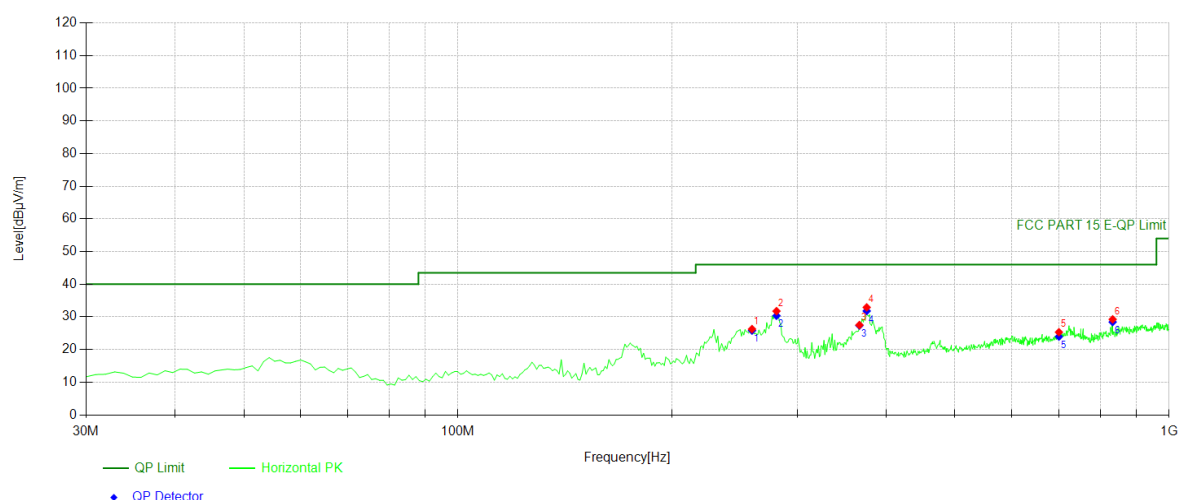

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	259.149	41.96	-15.69	26.27	PK	46.00	19.73	Horizontal
2	280.510	46.54	-14.78	31.76	PK	46.00	14.24	Horizontal
3	366.926	39.53	-12.03	27.50	PK	46.00	18.50	Horizontal
4	375.665	44.62	-11.70	32.92	PK	46.00	13.08	Horizontal
5	699.97	31.19	-5.87	25.32	PK	46.00	20.68	Horizontal
6	832.993	33.76	-4.52	29.24	PK	46.00	16.76	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	259.1491	-15.69	25.82	46.00	20.18
2	280.5105	-14.78	30.35	46.00	15.65
3	366.9269	-12.03	27.34	46.00	18.66
4	375.6657	-11.70	31.80	46.00	14.20
5	699.97	-5.87	23.96	46.00	22.04
6	832.993	-4.52	28.42	46.00	17.58

U-NII 5 Band (5925 ~ 6425MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 5955

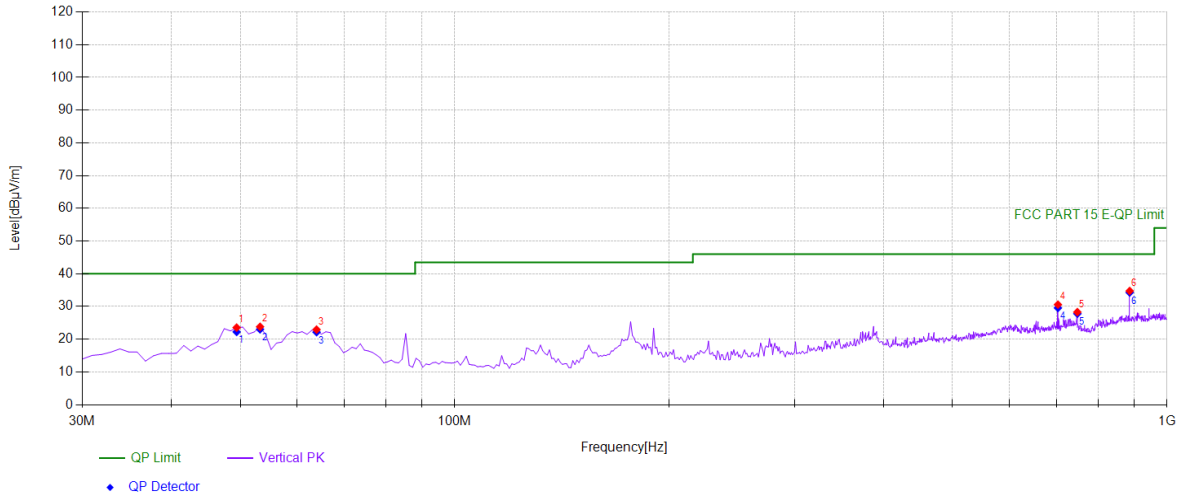


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	39.66	-16.10	23.56	PK	40.00	16.44	Vertical
2	53.3033	40.28	-16.47	23.81	PK	40.00	16.19	Vertical
3	63.984	40.89	-17.94	22.95	PK	40.00	17.05	Vertical
4	702.882	36.43	-5.84	30.59	PK	46.00	15.41	Vertical
5	748.518	34.03	-5.74	28.29	PK	46.00	17.71	Vertical
6	886.396	37.97	-3.21	34.76	PK	46.00	11.24	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	22.24	40.00	17.76
2	53.3033	-16.47	23.03	40.00	16.97
3	63.984	-17.94	22.17	40.00	17.83
4	702.8829	-5.84	29.56	46.00	16.44
5	748.5185	-5.74	27.80	46.00	18.20
6	886.3964	-3.21	34.27	46.00	11.73

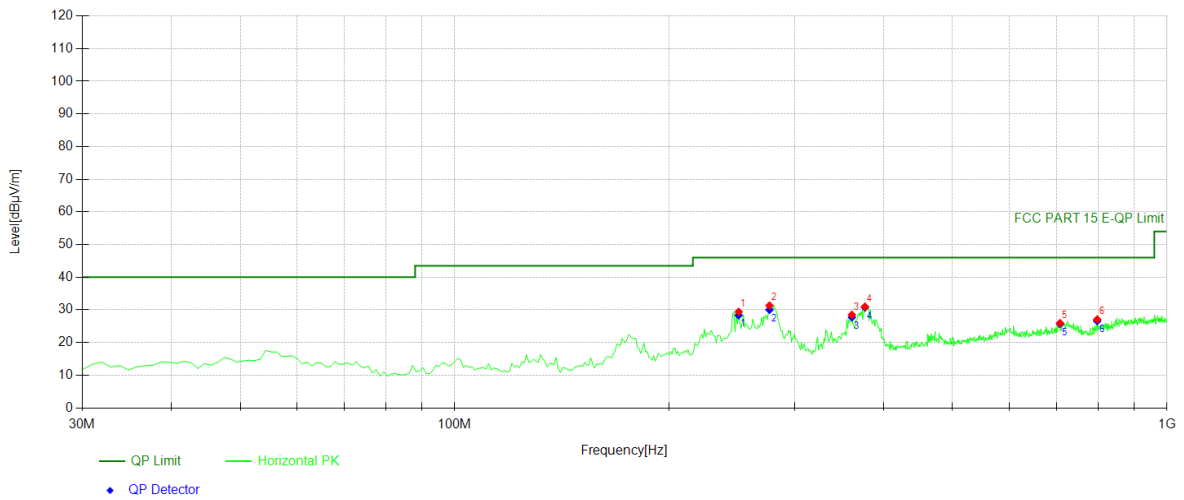

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	250.410	45.16	-15.75	29.41	PK	46.00	16.59	Horizontal
2	276.626	46.31	-14.97	31.34	PK	46.00	14.66	Horizontal
3	361.101	40.79	-12.29	28.50	PK	46.00	17.50	Horizontal
4	376.636	42.64	-11.66	30.98	PK	46.00	15.02	Horizontal
5	707.737	31.77	-5.81	25.96	PK	46.00	20.04	Horizontal
6	798.038	32.38	-5.30	27.08	PK	46.00	18.92	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	250.4104	-15.75	28.35	46.00	17.65
2	276.6266	-14.97	30.03	46.00	15.97
3	361.1011	-12.29	27.73	46.00	18.27
4	376.6366	-11.66	30.75	46.00	15.25
5	707.7377	-5.81	25.73	46.00	20.27
6	798.038	-5.30	26.60	46.00	19.40

U-NII 5 Band (5925 ~ 6425MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6175

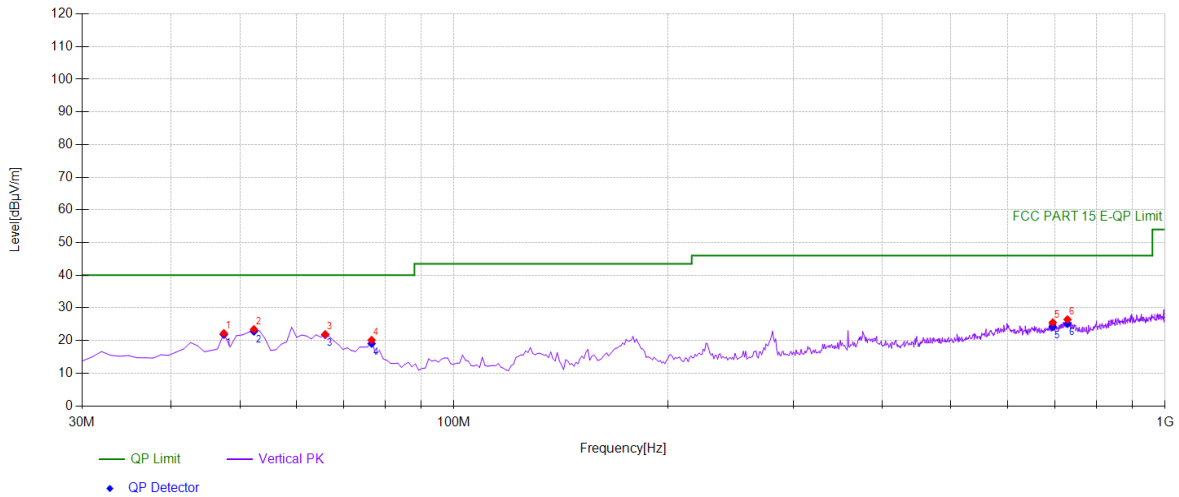


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	38.61	-16.39	22.22	PK	40.00	17.78	Vertical
2	52.3323	39.79	-16.34	23.45	PK	40.00	16.55	Vertical
3	65.9259	40.09	-18.21	21.88	PK	40.00	18.12	Vertical
4	76.6066	39.92	-19.77	20.15	PK	40.00	19.85	Vertical
5	695.115	31.63	-6.10	25.53	PK	46.00	20.47	Vertical
6	729.099	31.91	-5.46	26.45	PK	46.00	19.55	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	21.81	40.00	18.19
2	52.3323	-16.34	22.79	40.00	17.21
3	65.9259	-18.21	21.76	40.00	18.24
4	76.6066	-19.77	19.07	40.00	20.93
5	695.1151	-6.10	24.20	46.00	21.80
6	729.0991	-5.46	25.12	46.00	20.88

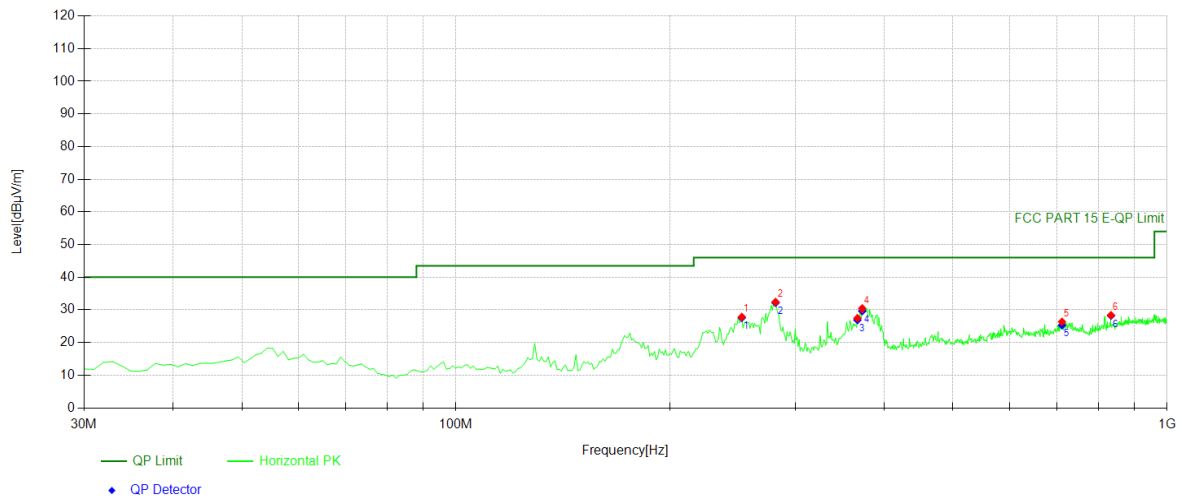

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	252.352	43.57	-15.74	27.83	PK	46.00	18.17	Horizontal
2	281.481	47.14	-14.73	32.41	PK	46.00	13.59	Horizontal
3	366.926	39.48	-12.03	27.45	PK	46.00	18.55	Horizontal
4	372.752	42.25	-11.80	30.45	PK	46.00	15.55	Horizontal
5	711.621	32.14	-5.78	26.36	PK	46.00	19.64	Horizontal
6	833.964	32.86	-4.50	28.36	PK	46.00	17.64	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	252.3524	-15.74	27.58	46.00	18.42
2	281.4815	-14.73	32.16	46.00	13.84
3	366.9269	-12.03	26.91	46.00	19.09
4	372.7528	-11.80	29.66	46.00	16.34
5	711.6216	-5.78	25.28	46.00	20.72
6	833.964	-4.50	28.24	46.00	17.76

U-NII 5 Band (5925 ~ 6425MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6175

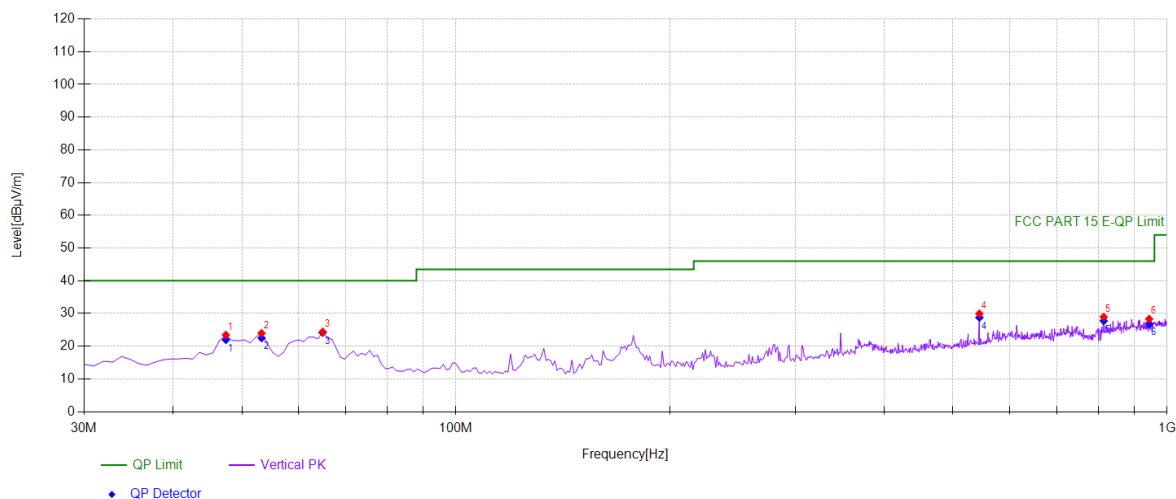


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	39.86	-16.39	23.47	PK	40.00	16.53	Vertical
2	53.3033	40.45	-16.47	23.98	PK	40.00	16.02	Vertical
3	64.955	42.45	-18.07	24.38	PK	40.00	15.62	Vertical
4	544.614	38.82	-8.87	29.95	PK	46.00	16.05	Vertical
5	814.544	33.73	-4.79	28.94	PK	46.00	17.06	Vertical
6	943.683	31.31	-2.99	28.32	PK	46.00	17.68	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	21.98	40.00	18.02
2	53.3033	-16.47	22.49	40.00	17.51
3	64.955	-18.07	24.15	40.00	15.85
4	544.6146	-8.87	28.76	46.00	17.24
5	814.5445	-4.79	27.75	46.00	18.25
6	943.6837	-2.99	26.88	46.00	19.12

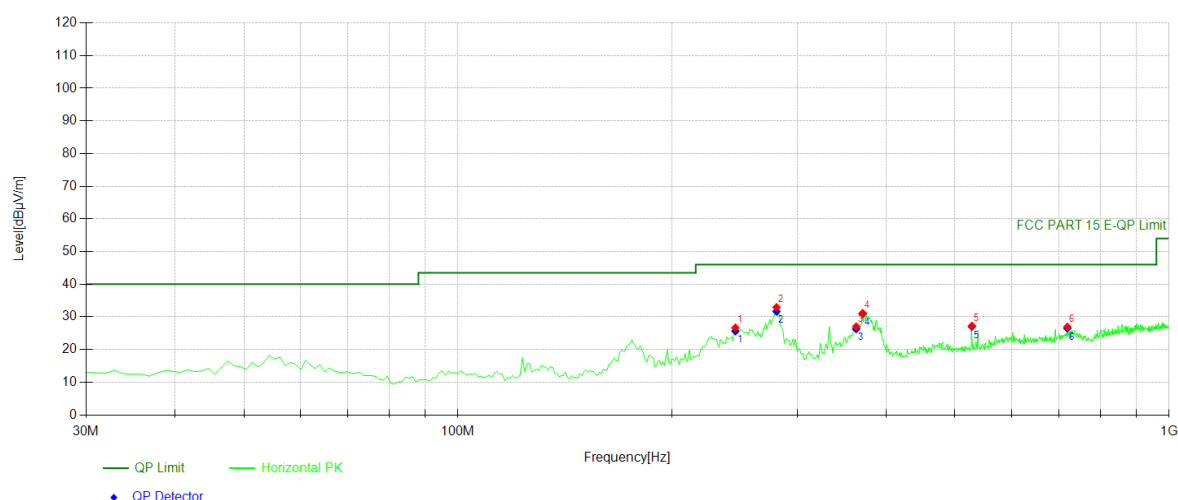

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	245.555	42.44	-15.76	26.68	PK	46.00	19.32	Horizontal
2	280.510	47.73	-14.78	32.95	PK	46.00	13.05	Horizontal
3	363.043	39.24	-12.20	27.04	PK	46.00	18.96	Horizontal
4	370.810	43.04	-11.88	31.16	PK	46.00	14.84	Horizontal
5	528.108	36.55	-9.31	27.24	PK	46.00	18.76	Horizontal
6	719.389	32.70	-5.75	26.95	PK	46.00	19.05	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	245.5556	-15.76	25.63	46.00	20.37
2	280.5105	-14.78	31.65	46.00	14.35
3	363.043	-12.20	26.28	46.00	19.72
4	370.8108	-11.88	30.94	46.00	15.06
5	528.1081	-9.31	27.02	46.00	18.98
6	719.3894	-5.75	26.48	46.00	19.52

U-NII 5 Band (5925 ~ 6425MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6415

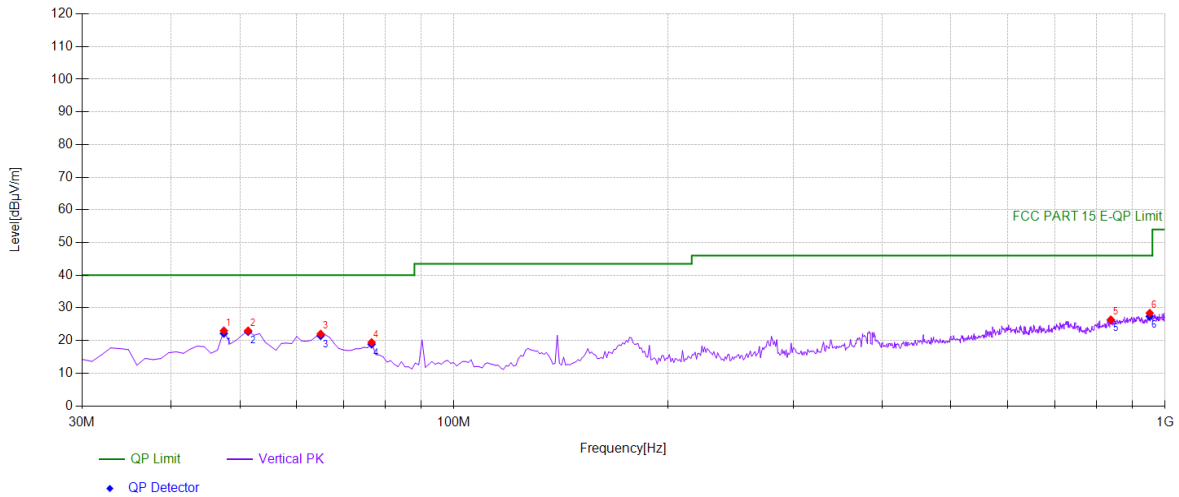


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	39.41	-16.39	23.02	PK	40.00	16.98	Vertical
2	51.3614	39.23	-16.21	23.02	PK	40.00	16.98	Vertical
3	64.955	40.11	-18.07	22.04	PK	40.00	17.96	Vertical
4	76.6066	39.22	-19.77	19.45	PK	40.00	20.55	Vertical
5	838.818	30.74	-4.39	26.35	PK	46.00	19.65	Vertical
6	951.451	30.90	-2.49	28.41	PK	46.00	17.59	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	22.16	40.00	17.84
2	51.3614	-16.21	22.70	40.00	17.30
3	64.955	-18.07	21.47	40.00	18.53
4	76.6066	-19.77	18.88	40.00	21.12
5	838.8188	-4.39	26.32	46.00	19.68
6	951.4515	-2.49	27.42	46.00	18.58

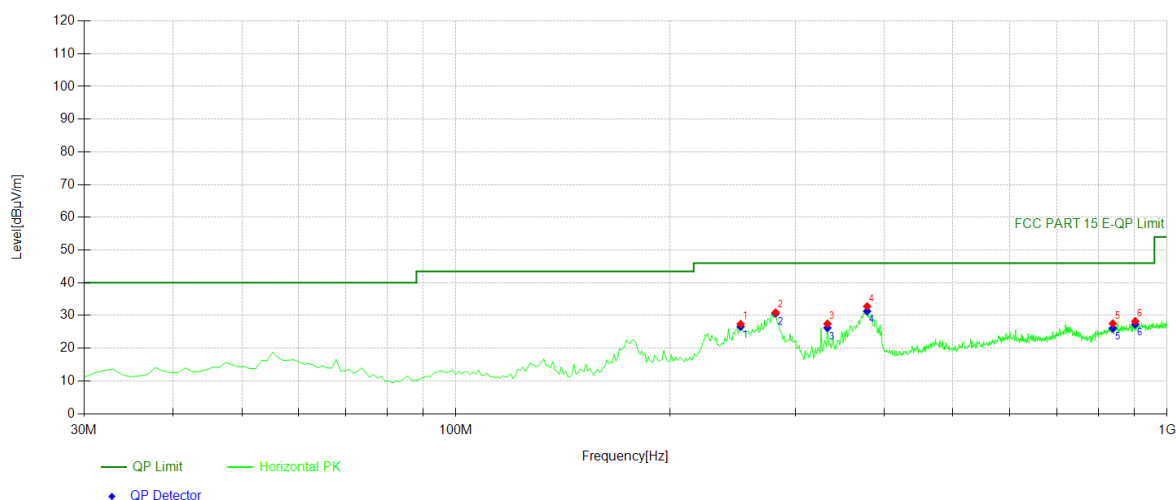

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	251.381	43.15	-15.75	27.40	PK	46.00	18.60	Horizontal
2	281.481	45.63	-14.73	30.90	PK	46.00	15.10	Horizontal
3	332.942	40.24	-12.75	27.49	PK	46.00	18.51	Horizontal
4	378.578	44.39	-11.59	32.80	PK	46.00	13.20	Horizontal
5	838.818	31.95	-4.39	27.56	PK	46.00	18.44	Horizontal
6	901.931	31.15	-2.91	28.24	PK	46.00	17.76	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	251.3814	-15.75	26.58	46.00	19.42
2	281.4815	-14.73	30.61	46.00	15.39
3	332.9429	-12.75	26.24	46.00	19.76
4	378.5786	-11.59	31.31	46.00	14.69
5	838.8188	-4.39	26.07	46.00	19.93
6	901.9319	-2.91	27.29	46.00	18.71

U-NII 5 Band (5925 ~ 6425MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6415

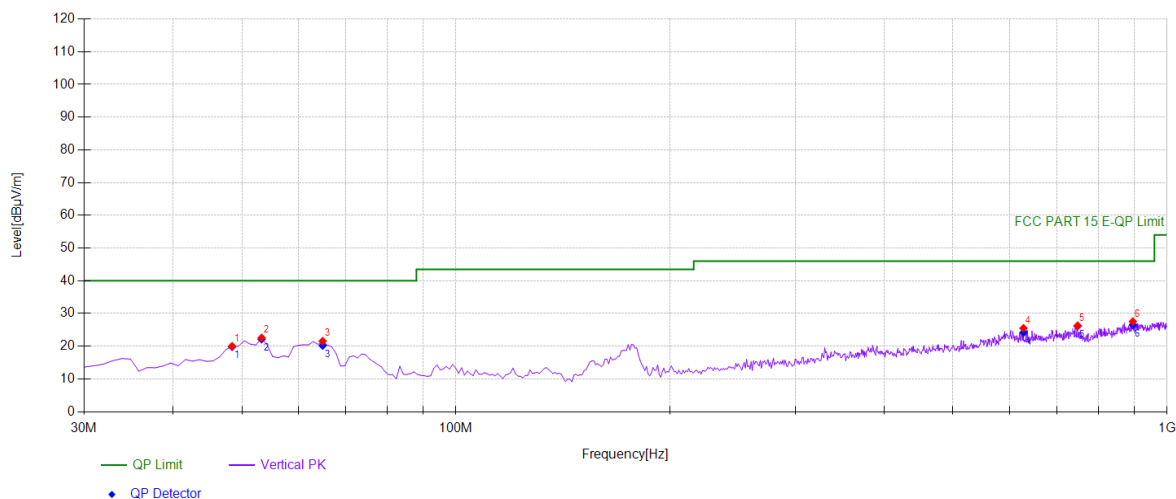


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.4484	36.23	-16.24	19.99	PK	40.00	20.01	Vertical
2	53.3033	39.02	-16.47	22.55	PK	40.00	17.45	Vertical
3	64.955	39.62	-18.07	21.55	PK	40.00	18.45	Vertical
4	628.118	32.73	-7.22	25.51	PK	46.00	20.49	Vertical
5	748.518	32.00	-5.74	26.26	PK	46.00	19.74	Vertical
6	895.135	30.58	-3.03	27.55	PK	46.00	18.45	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	48.4484	-16.24	19.83	40.00	20.17
2	53.3033	-16.47	22.15	40.00	17.85
3	64.955	-18.07	20.19	40.00	19.81
4	628.1181	-7.22	24.15	46.00	21.85
5	748.5185	-5.74	26.15	46.00	19.85
6	895.1351	-3.03	26.48	46.00	19.52

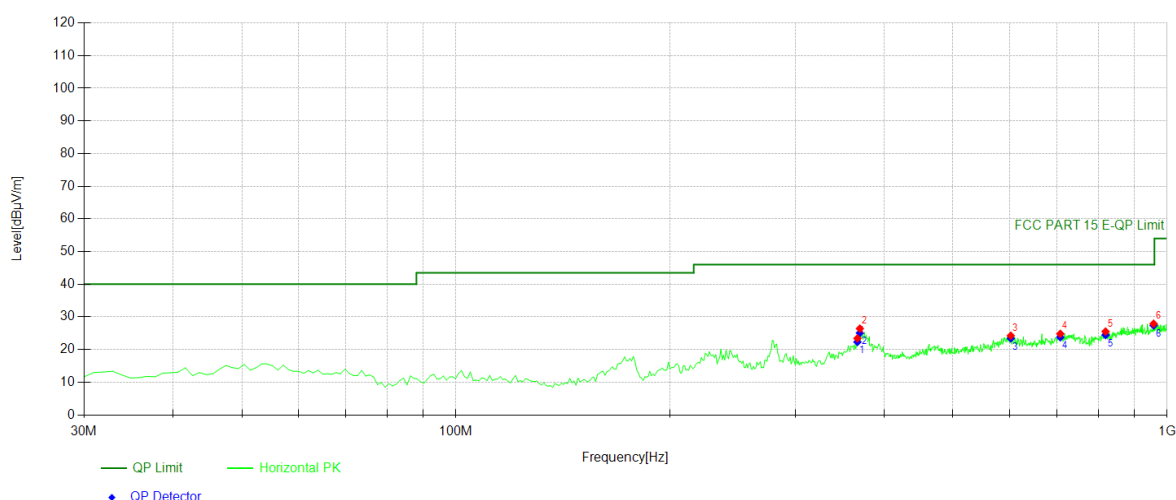

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	366.926	35.46	-12.03	23.43	PK	46.00	22.57	Horizontal
2	369.839	38.31	-11.90	26.41	PK	46.00	19.59	Horizontal
3	602.872	30.51	-6.26	24.25	PK	46.00	21.75	Horizontal
4	707.737	30.63	-5.81	24.82	PK	46.00	21.18	Horizontal
5	819.399	30.23	-4.72	25.51	PK	46.00	20.49	Horizontal
6	957.277	30.04	-2.13	27.91	PK	46.00	18.09	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	366.9269	-12.03	22.32	46.00	23.68
2	369.8398	-11.90	25.06	46.00	20.94
3	602.8729	-6.26	23.43	46.00	22.57
4	707.7377	-5.81	23.76	46.00	22.24
5	819.3994	-4.72	24.45	46.00	21.55
6	957.2773	-2.13	27.39	46.00	18.61

U-NII 6 Band (6425 ~ 6525MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6435

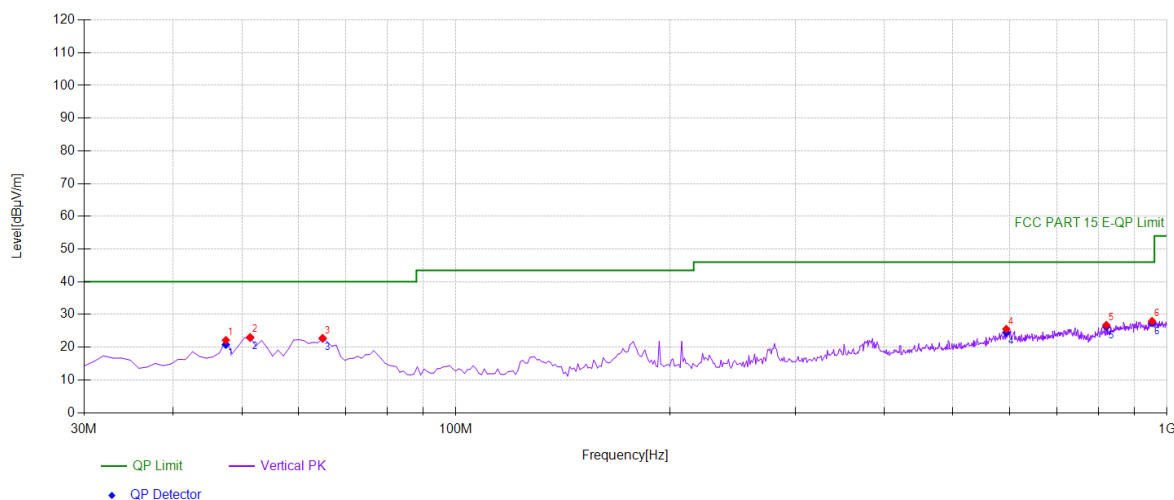


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	38.54	-16.39	22.15	PK	40.00	17.85	Vertical
2	51.3614	39.24	-16.21	23.03	PK	40.00	16.97	Vertical
3	64.955	40.84	-18.07	22.77	PK	40.00	17.23	Vertical
4	594.134	31.98	-6.44	25.54	PK	46.00	20.46	Vertical
5	821.341	31.45	-4.69	26.76	PK	46.00	19.24	Vertical
6	952.422	30.40	-2.43	27.97	PK	46.00	18.03	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	20.80	40.00	19.20
2	51.3614	-16.21	22.94	40.00	17.06
3	64.955	-18.07	22.68	40.00	17.32
4	594.1341	-6.44	24.49	46.00	21.51
5	821.3413	-4.69	26.25	46.00	19.75
6	952.4224	-2.43	27.46	46.00	18.54

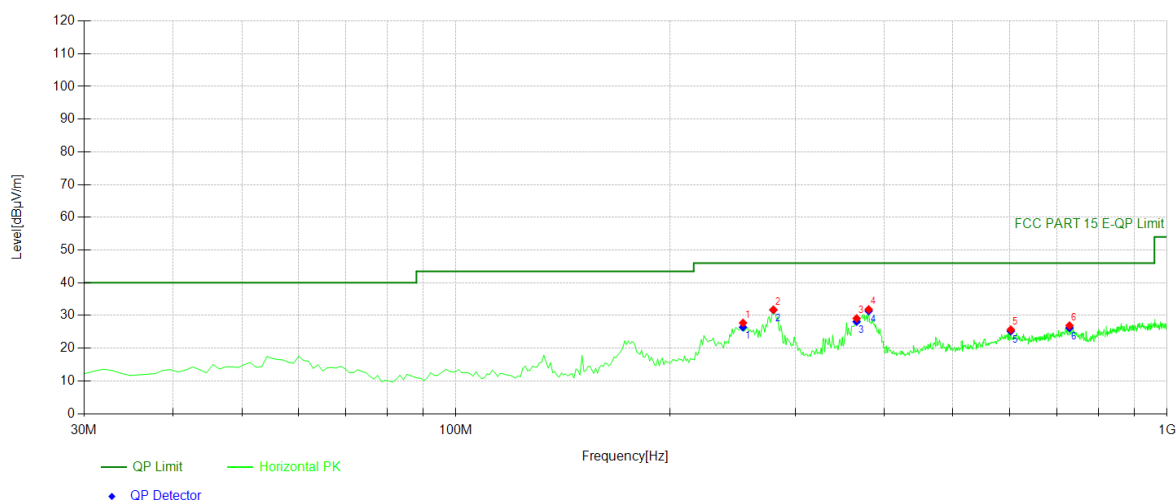

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	253.323	43.48	-15.74	27.74	PK	46.00	18.26	Horizontal
2	279.539	46.58	-14.82	31.76	PK	46.00	14.24	Horizontal
3	365.956	41.19	-12.07	29.12	PK	46.00	16.88	Horizontal
4	380.520	43.39	-11.53	31.86	PK	46.00	14.14	Horizontal
5	602.872	31.94	-6.26	25.68	PK	46.00	20.32	Horizontal
6	729.099	32.38	-5.46	26.92	PK	46.00	19.08	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	253.3233	-15.74	26.43	46.00	19.57
2	279.5395	-14.82	31.71	46.00	14.29
3	365.956	-12.07	28.11	46.00	17.89
4	380.5205	-11.53	31.38	46.00	14.62
5	602.8729	-6.26	25.20	46.00	20.80
6	729.0991	-5.46	26.20	46.00	19.80

U-NII 6 Band (6425 ~ 6525MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6435

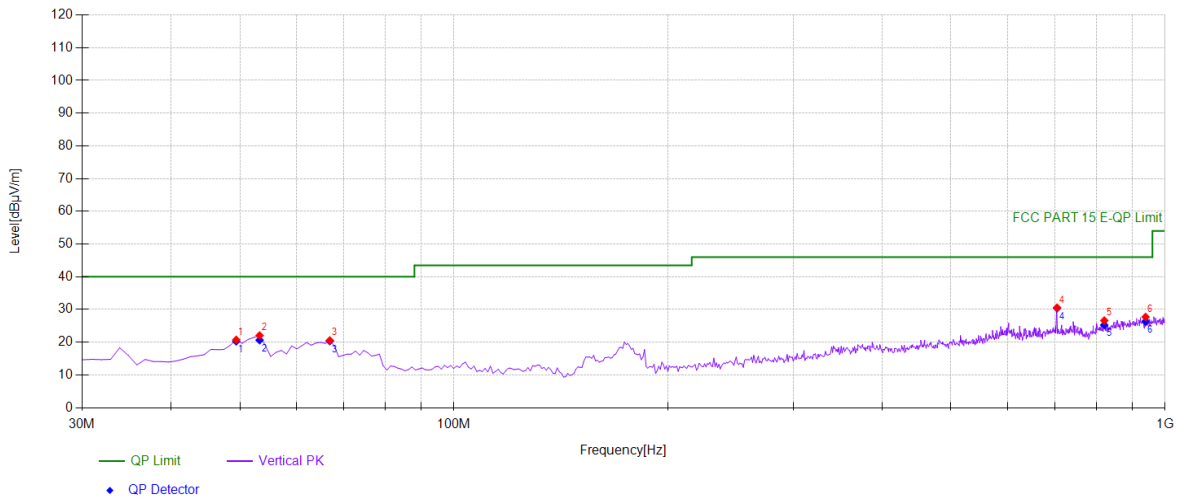


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	36.83	-16.10	20.73	PK	40.00	19.27	Vertical
2	53.3033	38.53	-16.47	22.06	PK	40.00	17.94	Vertical
3	66.8969	38.87	-18.34	20.53	PK	40.00	19.47	Vertical
4	704.824	36.39	-5.83	30.56	PK	46.00	15.44	Vertical
5	821.341	31.32	-4.69	26.63	PK	46.00	19.37	Vertical
6	938.828	30.90	-3.17	27.73	PK	46.00	18.27	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	20.27	40.00	19.73
2	53.3033	-16.47	20.64	40.00	19.36
3	66.8969	-18.34	20.36	40.00	19.64
4	704.8248	-5.83	30.39	46.00	15.61
5	821.3413	-4.69	25.26	46.00	20.74
6	938.8288	-3.17	26.36	46.00	19.64

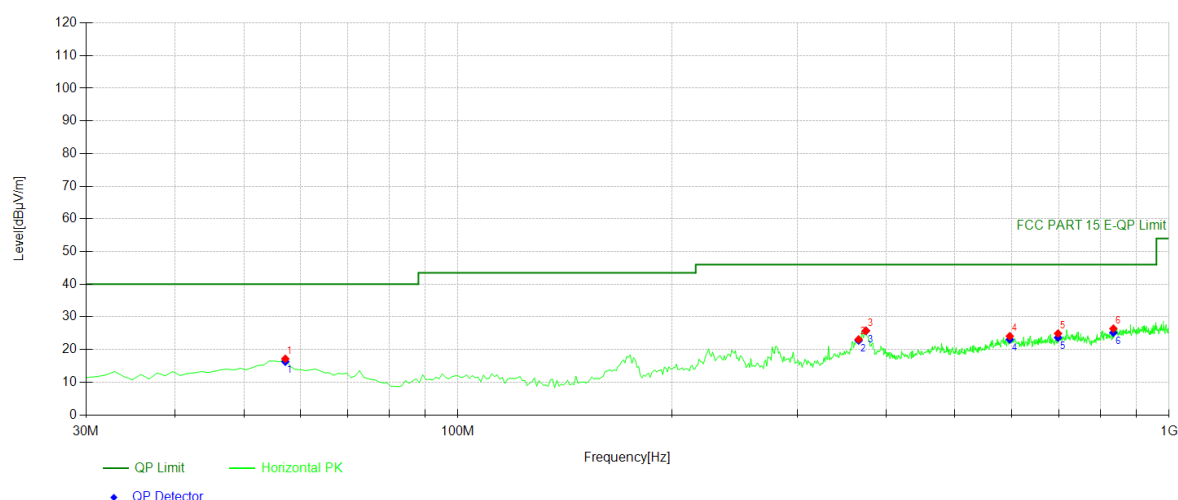

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	57.1872	34.16	-17.00	17.16	PK	40.00	22.84	Horizontal
2	365.956	35.18	-12.07	23.11	PK	46.00	22.89	Horizontal
3	374.694	37.49	-11.73	25.76	PK	46.00	20.24	Horizontal
4	597.047	30.37	-6.28	24.09	PK	46.00	21.91	Horizontal
5	698.028	30.86	-5.96	24.90	PK	46.00	21.10	Horizontal
6	834.934	30.89	-4.48	26.41	PK	46.00	19.59	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	57.1872	-17.00	16.28	40.00	23.72
2	365.956	-12.07	22.77	46.00	23.23
3	374.6947	-11.73	25.72	46.00	20.28
4	597.047	-6.28	23.08	46.00	22.92
5	698.028	-5.96	23.65	46.00	22.35
6	834.9349	-4.48	25.16	46.00	20.84

U-NII 6 Band (6425 ~ 6525MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6475

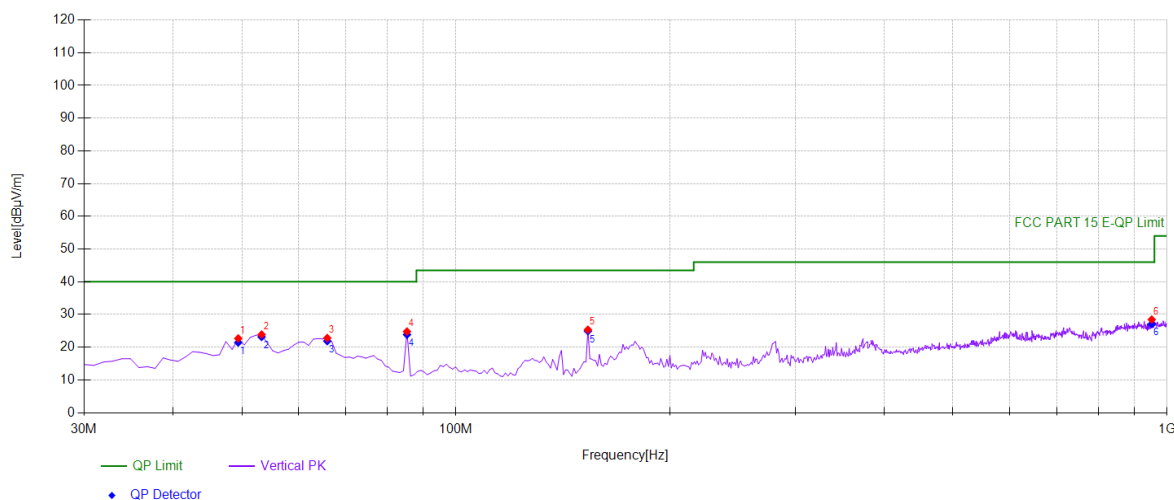


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	38.79	-16.10	22.69	PK	40.00	17.31	Vertical
2	53.3033	40.34	-16.47	23.87	PK	40.00	16.13	Vertical
3	65.9259	41.03	-18.21	22.82	PK	40.00	17.18	Vertical
4	85.3453	44.28	-19.47	24.81	PK	40.00	15.19	Vertical
5	153.313	44.88	-19.52	25.36	PK	43.50	18.14	Vertical
6	951.451	30.95	-2.49	28.46	PK	46.00	17.54	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	21.44	40.00	18.56
2	53.3033	-16.47	23.16	40.00	16.84
3	65.9259	-18.21	21.86	40.00	18.14
4	85.3453	-19.47	23.85	40.00	16.15
5	153.3133	-19.52	24.94	43.50	18.56
6	951.4515	-2.49	27.08	46.00	18.92

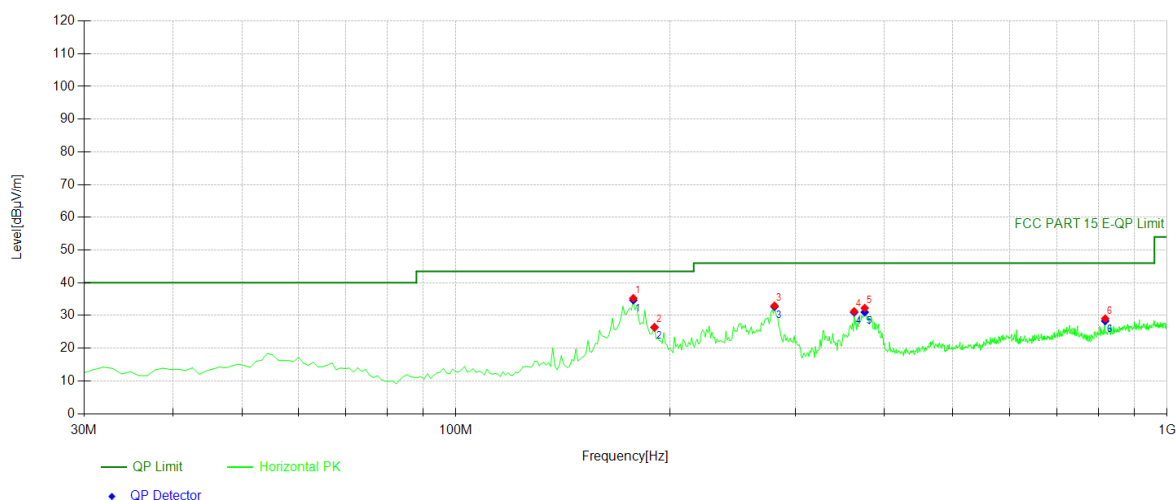

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	177.587	53.96	-18.68	35.28	PK	43.50	8.22	Horizontal
2	190.210	44.50	-18.08	26.42	PK	43.50	17.08	Horizontal
3	280.510	47.76	-14.78	32.98	PK	46.00	13.02	Horizontal
4	363.043	43.47	-12.20	31.27	PK	46.00	14.73	Horizontal
5	375.665	43.97	-11.70	32.27	PK	46.00	13.73	Horizontal
6	818.428	33.79	-4.74	29.05	PK	46.00	16.95	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	177.5876	-18.68	34.69	43.50	8.81
2	190.2102	-18.08	26.36	43.50	17.14
3	280.5105	-14.78	32.68	46.00	13.32
4	363.043	-12.20	30.97	46.00	15.03
5	375.6657	-11.70	31.01	46.00	14.99
6	818.4284	-4.74	28.32	46.00	17.68

U-NII 6 Band (6425 ~ 6525MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6475

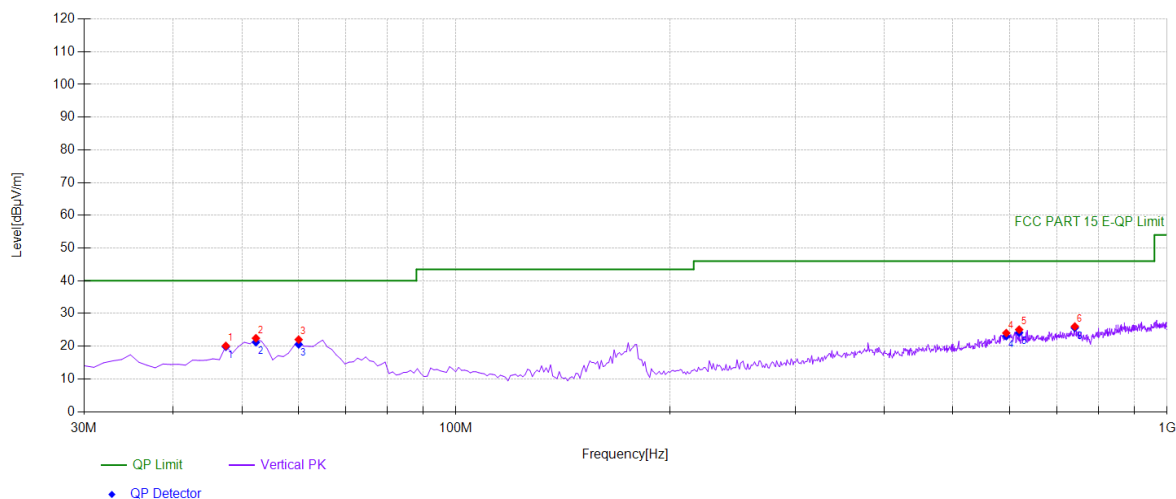


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	36.50	-16.39	20.11	PK	40.00	19.89	Vertical
2	52.3323	38.79	-16.34	22.45	PK	40.00	17.55	Vertical
3	60.1001	39.45	-17.41	22.04	PK	40.00	17.96	Vertical
4	594.134	30.47	-6.44	24.03	PK	46.00	21.97	Vertical
5	619.379	32.32	-7.24	25.08	PK	46.00	20.92	Vertical
6	741.721	31.37	-5.34	26.03	PK	46.00	19.97	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	19.83	40.00	20.17
2	52.3323	-16.34	21.21	40.00	18.79
3	60.1001	-17.41	20.55	40.00	19.45
4	594.1341	-6.44	23.08	46.00	22.92
5	619.3794	-7.24	24.13	46.00	21.87
6	741.7217	-5.34	25.62	46.00	20.38

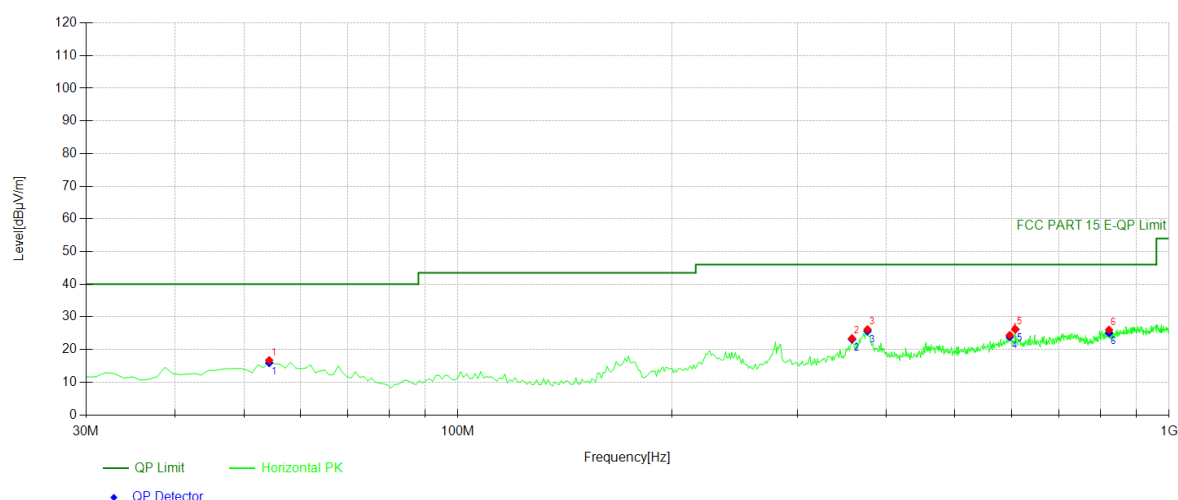

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	54.2743	33.33	-16.60	16.73	PK	40.00	23.27	Horizontal
2	358.188	35.73	-12.31	23.42	PK	46.00	22.58	Horizontal
3	376.636	37.83	-11.66	26.17	PK	46.00	19.83	Horizontal
4	597.047	30.68	-6.28	24.40	PK	46.00	21.60	Horizontal
5	607.727	32.73	-6.54	26.19	PK	46.00	19.81	Horizontal
6	823.283	30.70	-4.66	26.04	PK	46.00	19.96	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	54.2743	-16.60	15.90	40.00	24.10
2	358.1882	-12.31	23.13	46.00	22.87
3	376.6366	-11.66	25.63	46.00	20.37
4	597.047	-6.28	23.86	46.00	22.14
5	607.7277	-6.54	26.19	46.00	19.81
6	823.2833	-4.66	25.08	46.00	20.92

U-NII 6 Band (6425 ~ 6525MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6515

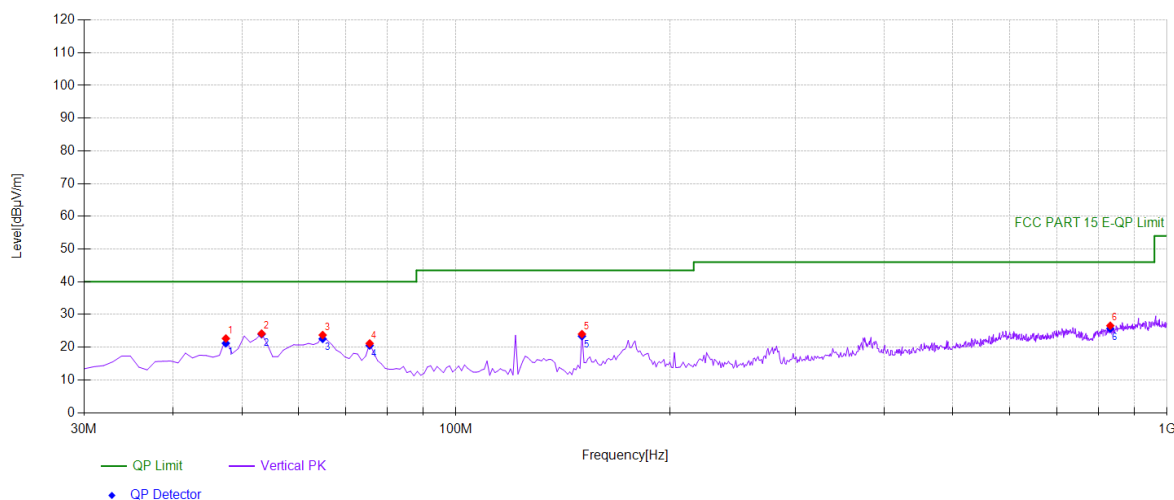


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	39.06	-16.39	22.67	PK	40.00	17.33	Vertical
2	53.3033	40.65	-16.47	24.18	PK	40.00	15.82	Vertical
3	64.955	41.79	-18.07	23.72	PK	40.00	16.28	Vertical
4	75.6356	40.78	-19.62	21.16	PK	40.00	18.84	Vertical
5	150.400	43.58	-19.57	24.01	PK	43.50	19.49	Vertical
6	832.022	31.12	-4.54	26.58	PK	46.00	19.42	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	21.21	40.00	18.79
2	53.3033	-16.47	23.97	40.00	16.03
3	64.955	-18.07	22.55	40.00	17.45
4	75.6356	-19.62	20.53	40.00	19.47
5	150.4004	-19.57	23.38	43.50	20.12
6	832.022	-4.54	25.70	46.00	20.30

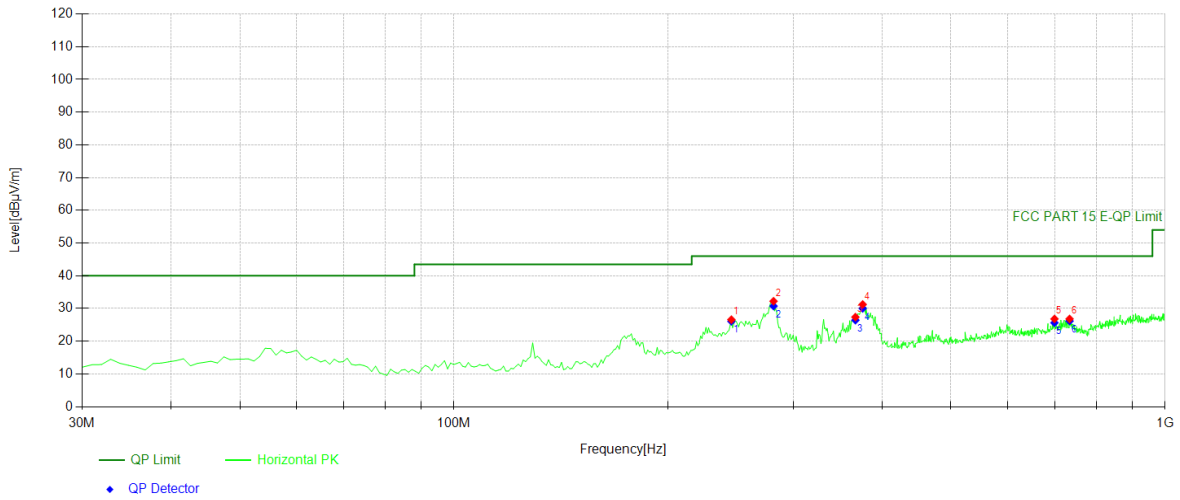

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	245.555	42.35	-15.76	26.59	PK	46.00	19.41	Horizontal
2	281.481	46.96	-14.73	32.23	PK	46.00	13.77	Horizontal
3	366.926	39.40	-12.03	27.37	PK	46.00	18.63	Horizontal
4	375.665	42.93	-11.70	31.23	PK	46.00	14.77	Horizontal
5	698.999	32.74	-5.92	26.82	PK	46.00	19.18	Horizontal
6	733.954	32.18	-5.36	26.82	PK	46.00	19.18	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	245.5556	-15.76	26.07	46.00	19.93
2	281.4815	-14.73	30.75	46.00	15.25
3	366.9269	-12.03	26.43	46.00	19.57
4	375.6657	-11.70	30.04	46.00	15.96
5	698.999	-5.92	25.63	46.00	20.37
6	733.954	-5.36	26.17	46.00	19.83

U-NII 6 Band (6425 ~ 6525MHz)

Test mode: 802.11BE (20)

Frequency(MHz): 6515

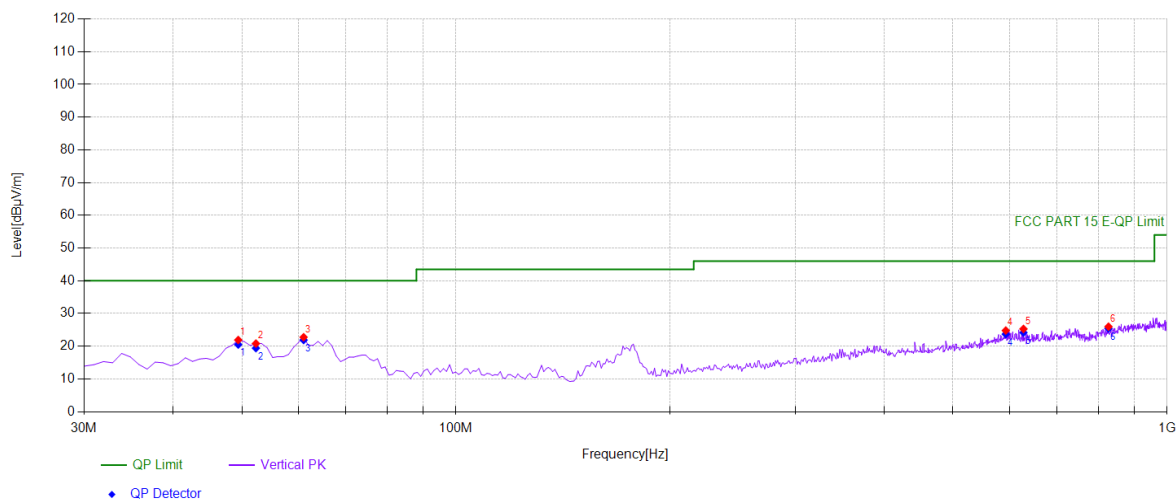


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	38.01	-16.10	21.91	PK	40.00	18.09	Vertical
2	52.3323	37.15	-16.34	20.81	PK	40.00	19.19	Vertical
3	61.0711	40.30	-17.54	22.76	PK	40.00	17.24	Vertical
4	593.163	31.31	-6.50	24.81	PK	46.00	21.19	Vertical
5	628.118	32.50	-7.22	25.28	PK	46.00	20.72	Vertical
6	827.167	30.59	-4.62	25.97	PK	46.00	20.03	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	20.51	40.00	19.49
2	52.3323	-16.34	19.41	40.00	20.59
3	61.0711	-17.54	21.89	40.00	18.11
4	593.1632	-6.50	23.70	46.00	22.30
5	628.1181	-7.22	24.17	46.00	21.83
6	827.1672	-4.62	25.40	46.00	20.60

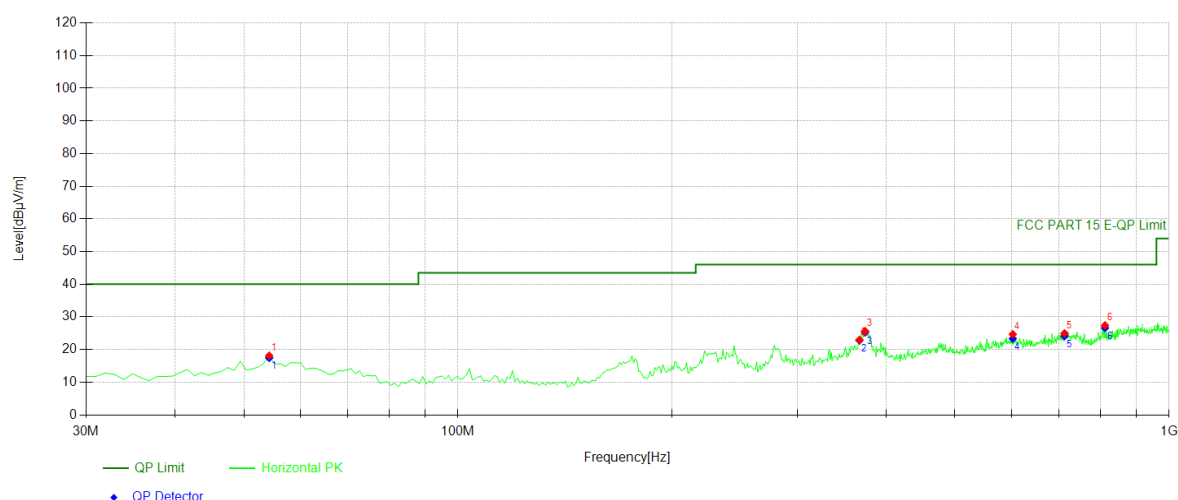

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	54.2743	34.74	-16.60	18.14	PK	40.00	21.86	Horizontal
2	366.926	34.98	-12.03	22.95	PK	46.00	23.05	Horizontal
3	373.723	37.40	-11.77	25.63	PK	46.00	20.37	Horizontal
4	602.872	30.93	-6.26	24.67	PK	46.00	21.33	Horizontal
5	712.592	30.72	-5.77	24.95	PK	46.00	21.05	Horizontal
6	812.602	32.21	-4.82	27.39	PK	46.00	18.61	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	54.2743	-16.60	17.47	40.00	22.53
2	366.9269	-12.03	22.82	46.00	23.18
3	373.7237	-11.77	25.25	46.00	20.75
4	602.8729	-6.26	23.33	46.00	22.67
5	712.5926	-5.77	24.15	46.00	21.85
6	812.6026	-4.82	26.59	46.00	19.41

U-NII 7 Band (6525 ~ 6875MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6535

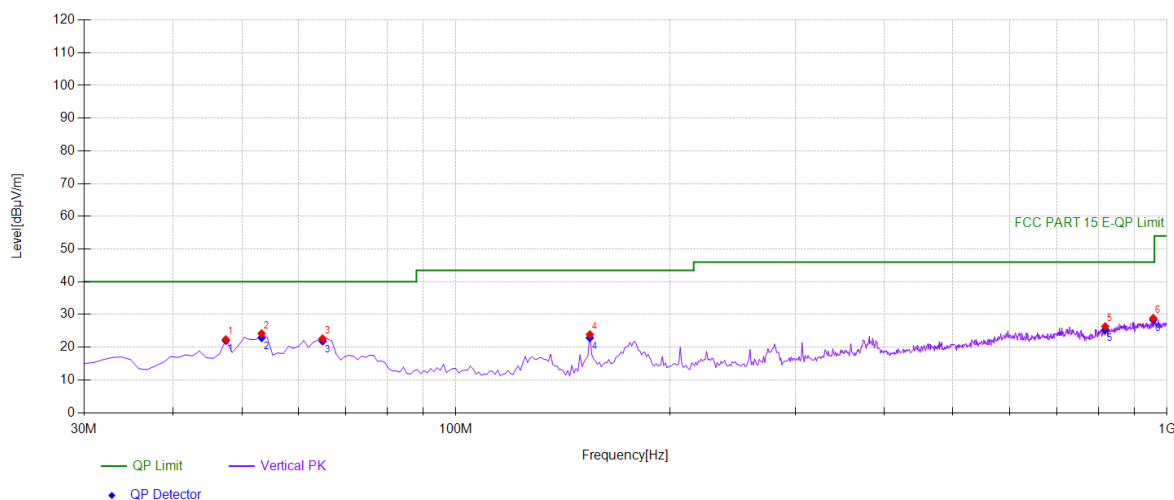


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	38.77	-16.39	22.38	PK	40.00	17.62	Vertical
2	53.3033	40.68	-16.47	24.21	PK	40.00	15.79	Vertical
3	64.955	40.71	-18.07	22.64	PK	40.00	17.36	Vertical
4	154.284	43.42	-19.51	23.91	PK	43.50	19.59	Vertical
5	818.428	31.11	-4.74	26.37	PK	46.00	19.63	Vertical
6	956.306	31.07	-2.18	28.89	PK	46.00	17.11	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	22.00	40.00	18.00
2	53.3033	-16.47	22.87	40.00	17.13
3	64.955	-18.07	21.84	40.00	18.16
4	154.2843	-19.51	22.86	43.50	20.64
5	818.4284	-4.74	25.32	46.00	20.68
6	956.3063	-2.18	28.38	46.00	17.62

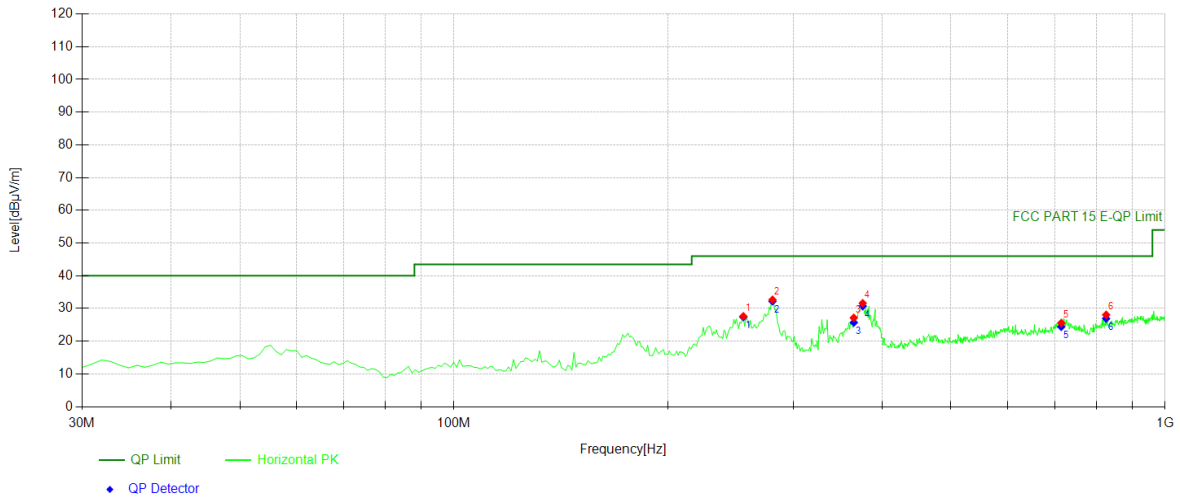

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	255.265	43.35	-15.72	27.63	PK	46.00	18.37	Horizontal
2	280.510	47.45	-14.78	32.67	PK	46.00	13.33	Horizontal
3	364.985	39.27	-12.12	27.15	PK	46.00	18.85	Horizontal
4	375.665	43.33	-11.70	31.63	PK	46.00	14.37	Horizontal
5	714.534	31.32	-5.76	25.56	PK	46.00	20.44	Horizontal
6	826.196	32.70	-4.63	28.07	PK	46.00	17.93	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	255.2653	-15.72	27.40	46.00	18.60
2	280.5105	-14.78	32.20	46.00	13.80
3	364.985	-12.12	25.71	46.00	20.29
4	375.6657	-11.70	30.73	46.00	15.27
5	714.5345	-5.76	24.42	46.00	21.58
6	826.1962	-4.63	26.93	46.00	19.07

U-NII 7 Band (6525 ~ 6875MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6535

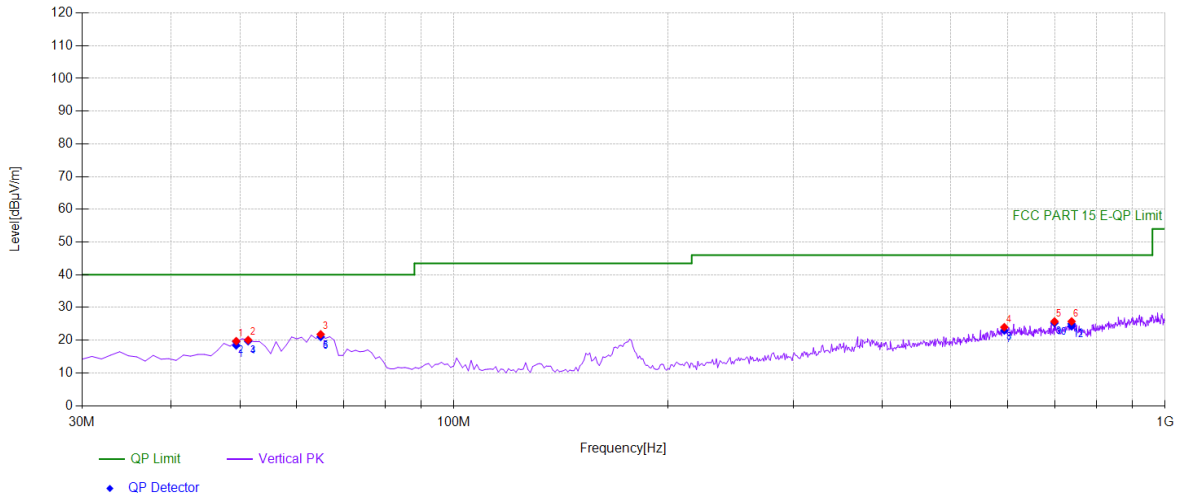


Suspected Data List

NO.	Freq.	Reading	Factor	Level	Detector	Limit	Margin	Polarity
1	49.4194	35.82	-16.10	19.72	PK	40.00	20.28	Vertical
2	51.3614	36.28	-16.21	20.07	PK	40.00	19.93	Vertical
3	64.955	39.87	-18.07	21.80	PK	40.00	18.20	Vertical
4	594.134	30.43	-6.44	23.99	PK	46.00	22.01	Vertical
5	698.999	31.66	-5.92	25.74	PK	46.00	20.26	Vertical
6	738.808	31.00	-5.26	25.74	PK	46.00	20.26	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBuV/m]	QP Limit [dBuV/m]	QP Margin [dB]
1	49.4194	-16.10	18.41	40.00	21.59
2	49.4194	-16.10	19.60	40.00	20.40
3	51.3614	-16.21	19.71	40.00	20.29
4	51.3614	-16.21	19.30	40.00	20.70
5	64.955	-18.07	21.02	40.00	18.98
6	64.955	-18.07	20.78	40.00	19.22
7	594.1341	-6.44	22.96	46.00	23.04
8	594.1341	-6.44	23.51	46.00	22.49
9	698.999	-5.92	25.26	46.00	20.74
10	698.999	-5.92	25.25	46.00	20.75
11	738.8088	-5.26	25.00	46.00	21.00
12	738.8088	-5.26	24.30	46.00	21.70

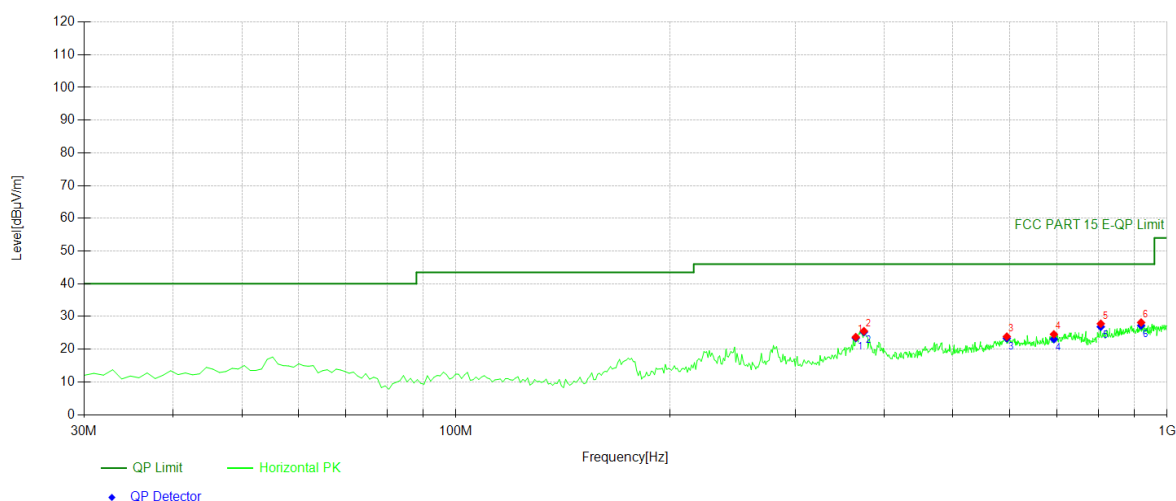

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	364.985	35.83	-12.12	23.71	PK	46.00	22.29	Horizontal
2	374.694	37.26	-11.73	25.53	PK	46.00	20.47	Horizontal
3	595.105	30.24	-6.38	23.86	PK	46.00	22.14	Horizontal
4	693.173	30.73	-6.18	24.55	PK	46.00	21.45	Horizontal
5	806.776	32.75	-4.95	27.80	PK	46.00	18.20	Horizontal
6	919.409	30.75	-2.58	28.17	PK	46.00	17.83	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	364.985	-12.12	23.44	46.00	22.56
2	374.6947	-11.73	25.26	46.00	20.74
3	595.1051	-6.38	23.34	46.00	22.66
4	693.1732	-6.18	23.07	46.00	22.93
5	806.7768	-4.95	26.86	46.00	19.14
6	919.4094	-2.58	27.23	46.00	18.77

U-NII 7 Band (6525 ~ 6875MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6695

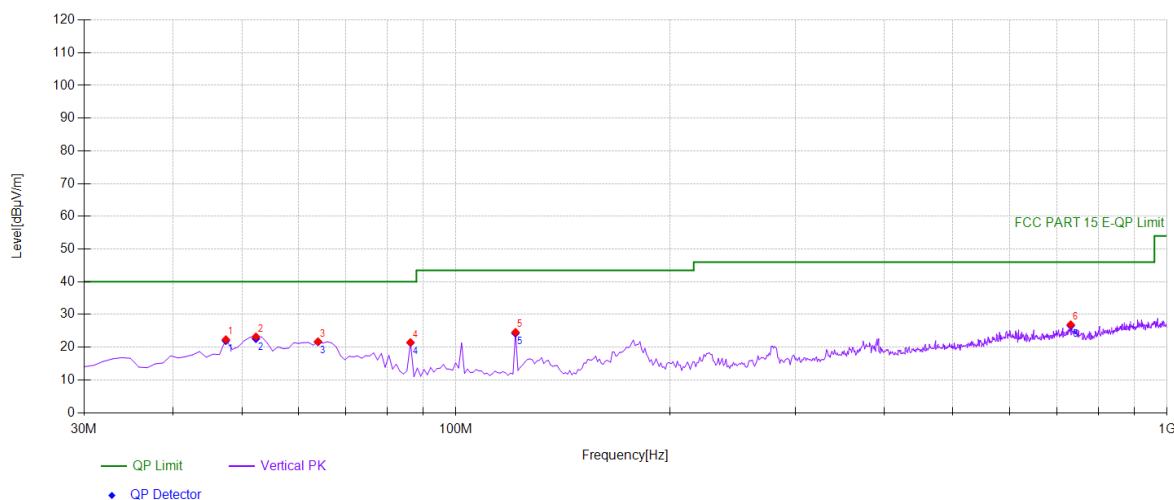


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	38.76	-16.39	22.37	PK	40.00	17.63	Vertical
2	52.3323	39.56	-16.34	23.22	PK	40.00	16.78	Vertical
3	63.984	39.65	-17.94	21.71	PK	40.00	18.29	Vertical
4	86.3163	40.79	-19.32	21.47	PK	40.00	18.53	Vertical
5	121.271	43.26	-18.67	24.59	PK	43.50	18.91	Vertical
6	732.012	32.32	-5.40	26.92	PK	46.00	19.08	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	21.99	40.00	18.01
2	52.3323	-16.34	22.59	40.00	17.41
3	63.984	-17.94	21.62	40.00	18.38
4	86.3163	-19.32	21.38	40.00	18.62
5	121.2713	-18.67	24.26	43.50	19.24
6	732.012	-5.40	26.59	46.00	19.41

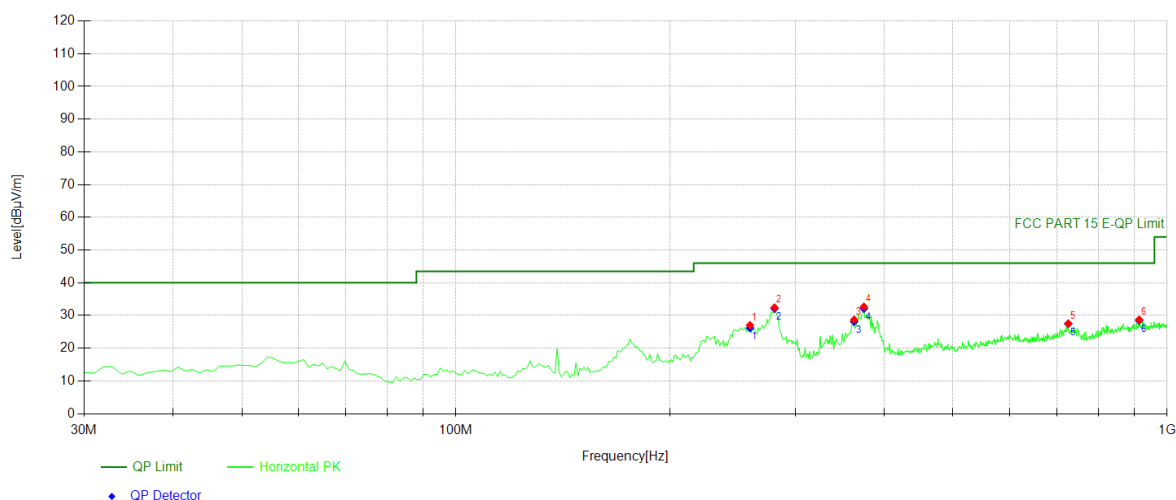

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	259.149	42.72	-15.69	27.03	PK	46.00	18.97	Horizontal
2	280.510	47.20	-14.78	32.42	PK	46.00	13.58	Horizontal
3	363.043	40.91	-12.20	28.71	PK	46.00	17.29	Horizontal
4	374.694	44.41	-11.73	32.68	PK	46.00	13.32	Horizontal
5	726.186	33.07	-5.56	27.51	PK	46.00	18.49	Horizontal
6	913.583	31.40	-2.67	28.73	PK	46.00	17.27	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	259.1491	-15.69	26.17	46.00	19.83
2	280.5105	-14.78	32.09	46.00	13.91
3	363.043	-12.20	28.14	46.00	17.86
4	374.6947	-11.73	32.11	46.00	13.89
5	726.1862	-5.56	27.48	46.00	18.52
6	913.5836	-2.67	28.45	46.00	17.55

U-NII 7 Band (6525 ~ 6875MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6695

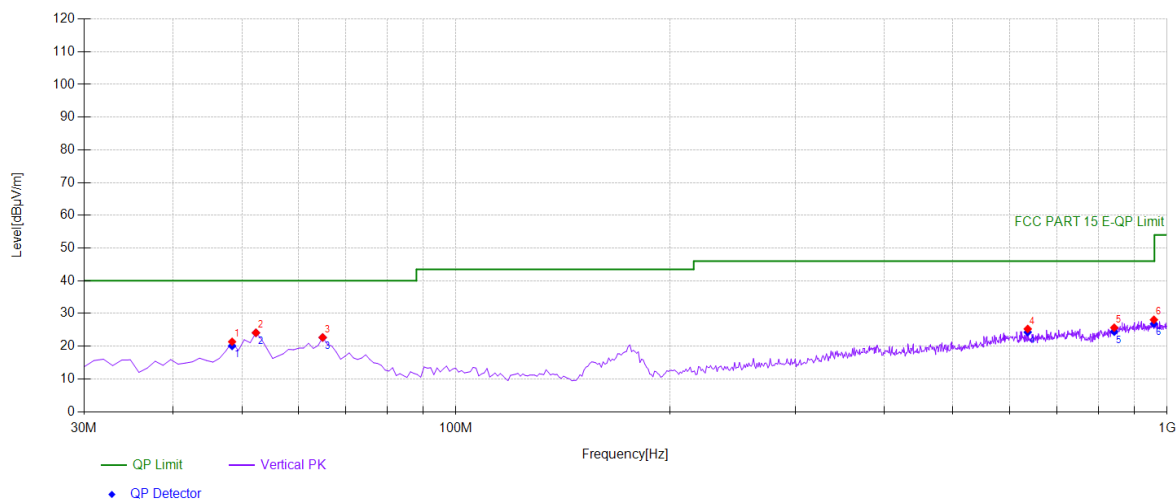


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.4484	37.61	-16.24	21.37	PK	40.00	18.63	Vertical
2	52.3323	40.46	-16.34	24.12	PK	40.00	15.88	Vertical
3	64.955	40.76	-18.07	22.69	PK	40.00	17.31	Vertical
4	636.856	32.44	-7.16	25.28	PK	46.00	20.72	Vertical
5	842.702	29.90	-4.23	25.67	PK	46.00	20.33	Vertical
6	958.248	30.15	-2.07	28.08	PK	46.00	17.92	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	48.4484	-16.24	20.09	40.00	19.91
2	52.3323	-16.34	24.09	40.00	15.91
3	64.955	-18.07	22.66	40.00	17.34
4	636.8569	-7.16	24.29	46.00	21.71
5	842.7027	-4.23	24.44	46.00	21.56
6	958.2482	-2.07	26.85	46.00	19.15

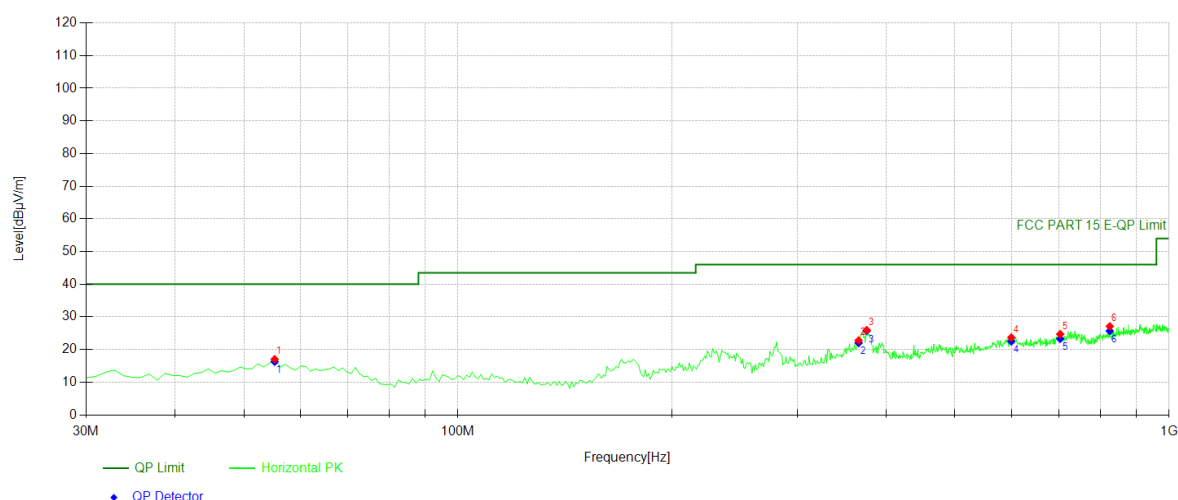

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	55.2452	33.78	-16.74	17.04	PK	40.00	22.96	Horizontal
2	365.956	34.85	-12.07	22.78	PK	46.00	23.22	Horizontal
3	375.665	37.64	-11.70	25.94	PK	46.00	20.06	Horizontal
4	599.96	29.78	-6.10	23.68	PK	46.00	22.32	Horizontal
5	702.882	30.55	-5.84	24.71	PK	46.00	21.29	Horizontal
6	825.225	31.76	-4.65	27.11	PK	46.00	18.89	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	55.2452	-16.74	16.28	40.00	23.72
2	365.956	-12.07	22.02	46.00	23.98
3	375.6657	-11.70	25.72	46.00	20.28
4	599.96	-6.10	22.49	46.00	23.51
5	702.8829	-5.84	23.28	46.00	22.72
6	825.2252	-4.65	25.68	46.00	20.32

U-NII 7 Band (6525 ~ 6875MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6855

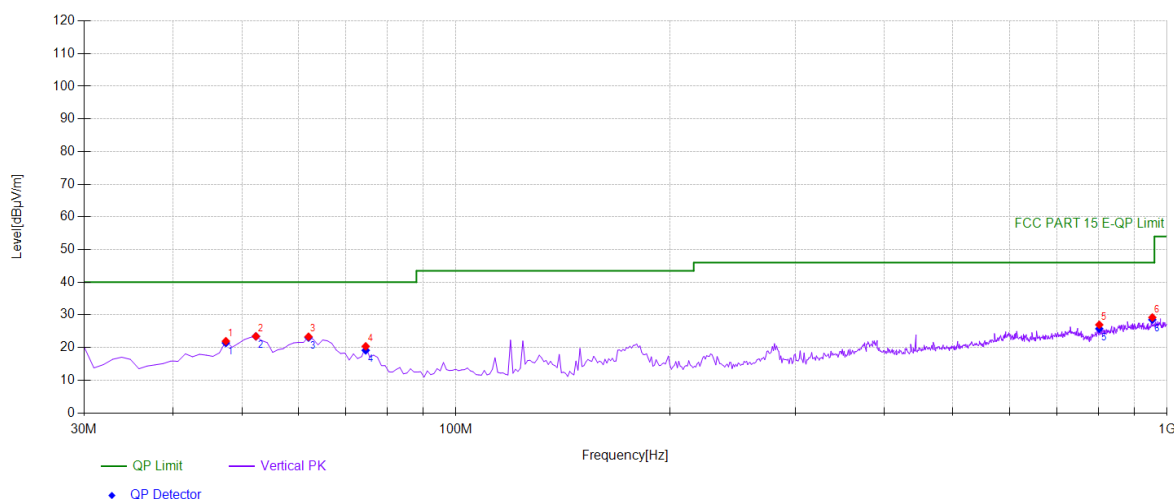


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	38.35	-16.39	21.96	PK	40.00	18.04	Vertical
2	52.3323	39.78	-16.34	23.44	PK	40.00	16.56	Vertical
3	62.042	41.00	-17.68	23.32	PK	40.00	16.68	Vertical
4	74.6647	39.85	-19.48	20.37	PK	40.00	19.63	Vertical
5	802.892	32.01	-5.04	26.97	PK	46.00	19.03	Vertical
6	953.393	31.59	-2.37	29.22	PK	46.00	16.78	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	21.41	40.00	18.59
2	52.3323	-16.34	23.42	40.00	16.58
3	62.042	-17.68	23.06	40.00	16.94
4	74.6647	-19.48	19.15	40.00	20.85
5	802.8929	-5.04	25.75	46.00	20.25
6	953.3934	-2.37	28.53	46.00	17.47

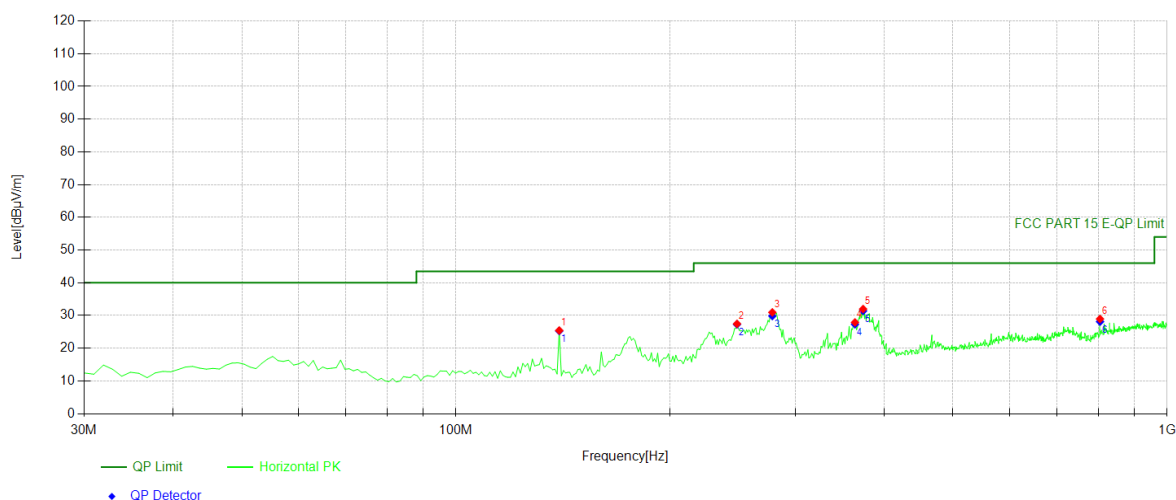

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	139.719	45.21	-19.78	25.43	PK	43.50	18.07	Horizontal
2	248.468	43.21	-15.76	27.45	PK	46.00	18.55	Horizontal
3	278.568	45.82	-14.87	30.95	PK	46.00	15.05	Horizontal
4	364.014	40.06	-12.16	27.90	PK	46.00	18.10	Horizontal
5	373.723	43.75	-11.77	31.98	PK	46.00	14.02	Horizontal
6	804.834	33.94	-4.99	28.95	PK	46.00	17.05	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	139.7197	-19.78	25.27	43.50	18.23
2	248.4685	-15.76	27.29	46.00	18.71
3	278.5686	-14.87	29.83	46.00	16.17
4	364.014	-12.16	27.32	46.00	18.68
5	373.7237	-11.77	31.40	46.00	14.60
6	804.8348	-4.99	28.12	46.00	17.88

U-NII 7 Band (6525 ~ 6875MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6855

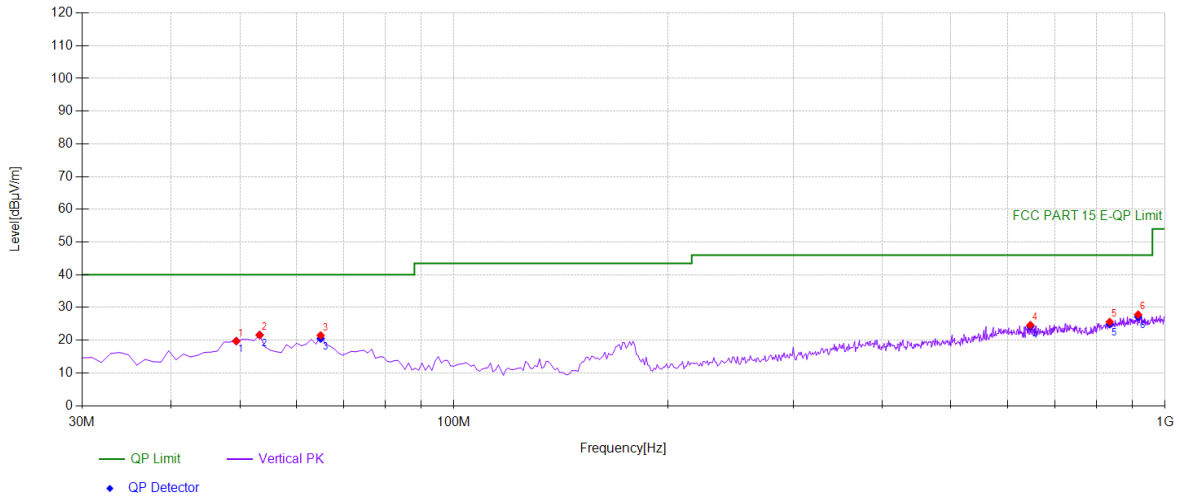


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	35.84	-16.10	19.74	PK	40.00	20.26	Vertical
2	53.3033	38.07	-16.47	21.60	PK	40.00	18.40	Vertical
3	64.955	39.55	-18.07	21.48	PK	40.00	18.52	Vertical
4	646.566	31.65	-7.02	24.63	PK	46.00	21.37	Vertical
5	835.905	30.04	-4.45	25.59	PK	46.00	20.41	Vertical
6	916.496	30.45	-2.62	27.83	PK	46.00	18.17	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	19.74	40.00	20.26
2	53.3033	-16.47	21.60	40.00	18.40
3	64.955	-18.07	20.52	40.00	19.48
4	646.5666	-7.02	24.21	46.00	21.79
5	835.9059	-4.45	24.92	46.00	21.08
6	916.4965	-2.62	27.16	46.00	18.84

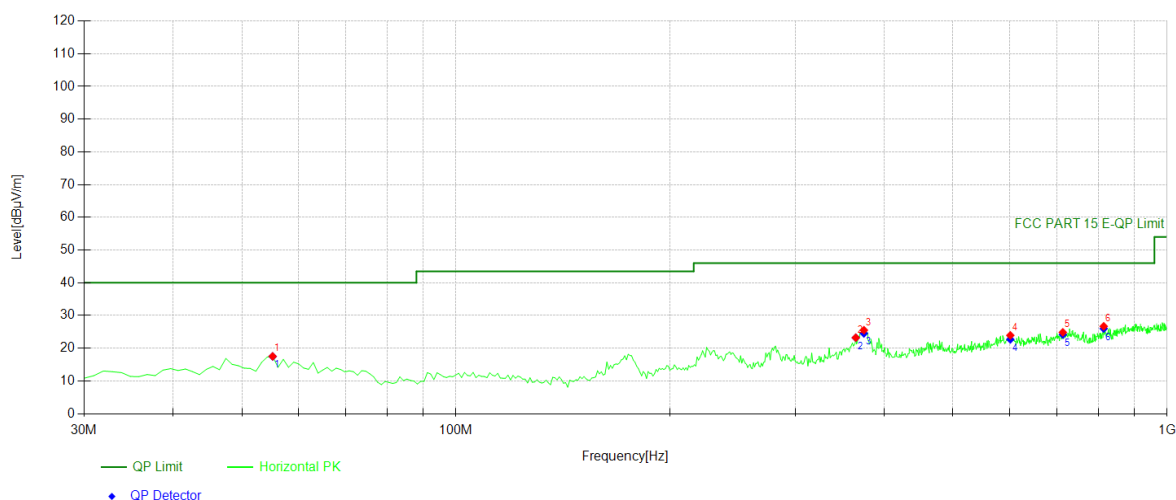

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	55.2452	34.26	-16.74	17.52	PK	40.00	22.48	Horizontal
2	364.985	35.35	-12.12	23.23	PK	46.00	22.77	Horizontal
3	374.694	37.25	-11.73	25.52	PK	46.00	20.48	Horizontal
4	601.901	30.13	-6.20	23.93	PK	46.00	22.07	Horizontal
5	713.563	30.63	-5.77	24.86	PK	46.00	21.14	Horizontal
6	814.544	31.49	-4.79	26.70	PK	46.00	19.30	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	55.2452	-16.74	17.49	40.00	22.51
2	364.985	-12.12	23.20	46.00	22.80
3	374.6947	-11.73	24.52	46.00	21.48
4	601.9019	-6.20	22.69	46.00	23.31
5	713.5636	-5.77	24.16	46.00	21.84
6	814.5445	-4.79	26.00	46.00	20.00

U-NII 8 Band (6875 ~ 7125MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6895

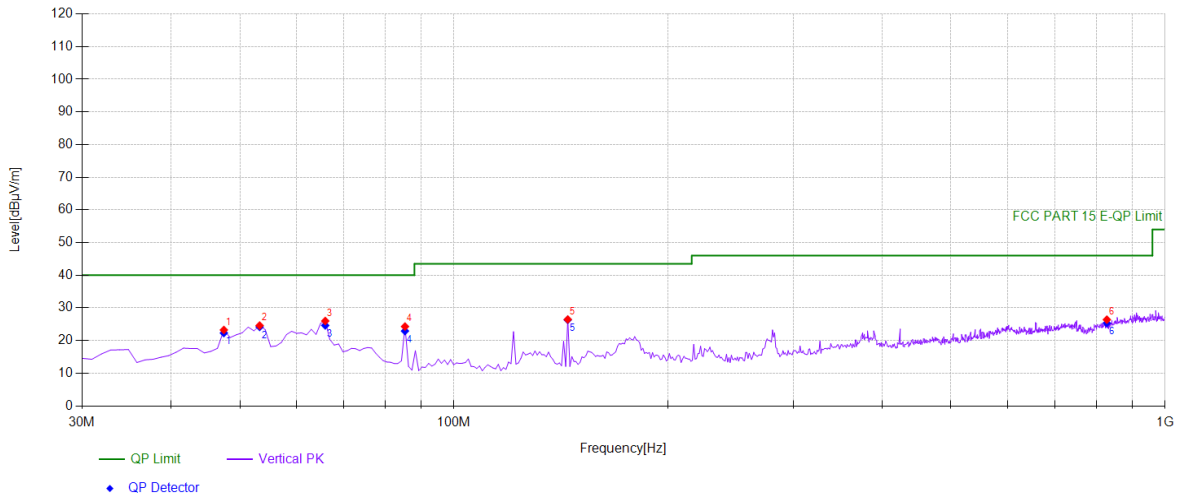


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	39.64	-16.39	23.25	PK	40.00	16.75	Vertical
2	53.3033	41.06	-16.47	24.59	PK	40.00	15.41	Vertical
3	65.9259	44.21	-18.21	26.00	PK	40.00	14.00	Vertical
4	85.3453	43.76	-19.47	24.29	PK	40.00	15.71	Vertical
5	144.574	46.15	-19.69	26.46	PK	43.50	17.04	Vertical
6	828.138	31.01	-4.61	26.40	PK	46.00	19.60	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	22.30	40.00	17.70
2	53.3033	-16.47	24.18	40.00	15.82
3	65.9259	-18.21	24.63	40.00	15.37
4	85.3453	-19.47	22.92	40.00	17.08
5	144.5746	-19.69	26.34	43.50	17.16
6	828.1381	-4.61	25.32	46.00	20.68

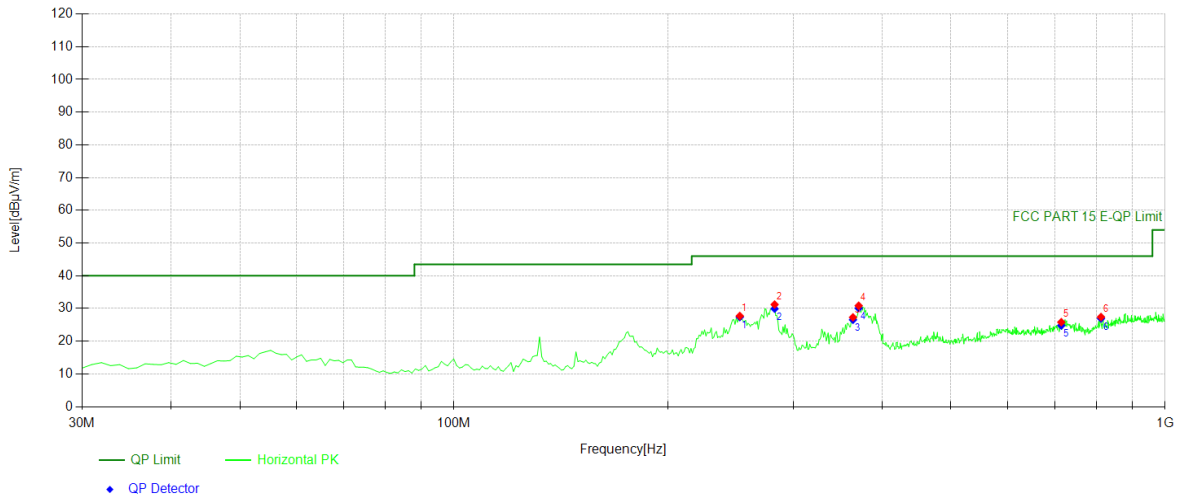

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	252.352	43.46	-15.74	27.72	PK	46.00	18.28	Horizontal
2	282.452	45.91	-14.69	31.22	PK	46.00	14.78	Horizontal
3	364.014	39.46	-12.16	27.30	PK	46.00	18.70	Horizontal
4	370.810	42.73	-11.88	30.85	PK	46.00	15.15	Horizontal
5	714.534	31.58	-5.76	25.82	PK	46.00	20.18	Horizontal
6	812.602	32.23	-4.82	27.41	PK	46.00	18.59	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	252.3524	-15.74	27.38	46.00	18.62
2	282.4525	-14.69	29.92	46.00	16.08
3	364.014	-12.16	26.54	46.00	19.46
4	370.8108	-11.88	30.09	46.00	15.91
5	714.5345	-5.76	24.81	46.00	21.19
6	812.6026	-4.82	26.94	46.00	19.06

U-NII 8 Band (6875 ~ 7125MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6895

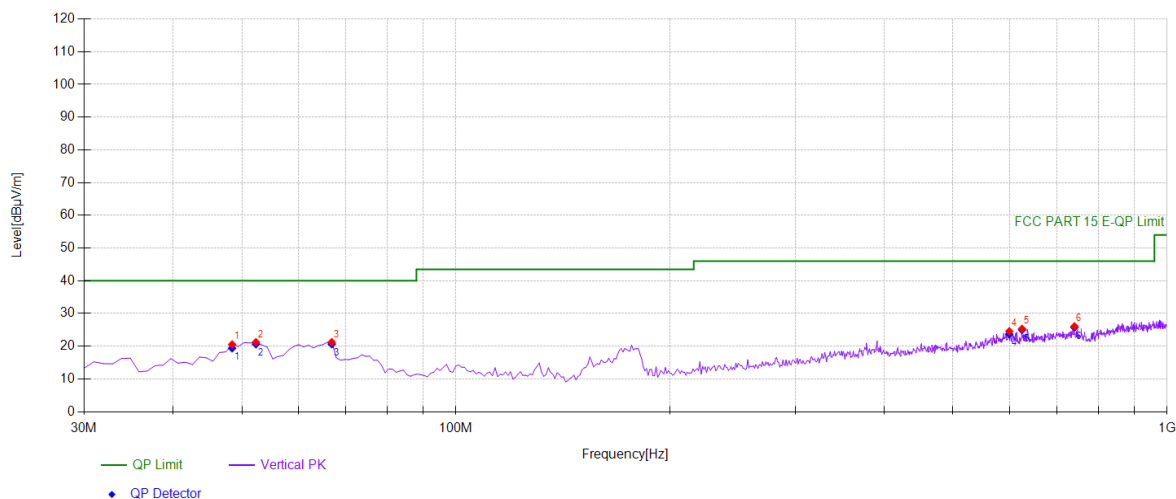


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	48.4484	36.79	-16.24	20.55	PK	40.00	19.45	Vertical
2	52.3323	37.58	-16.34	21.24	PK	40.00	18.76	Vertical
3	66.8969	39.59	-18.34	21.25	PK	40.00	18.75	Vertical
4	599.96	30.65	-6.10	24.55	PK	46.00	21.45	Vertical
5	625.205	32.54	-7.23	25.31	PK	46.00	20.69	Vertical
6	740.750	31.34	-5.28	26.06	PK	46.00	19.94	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	48.4484	-16.24	19.40	40.00	20.60
2	52.3323	-16.34	20.63	40.00	19.37
3	66.8969	-18.34	20.64	40.00	19.36
4	599.96	-6.10	23.70	46.00	22.30
5	625.2052	-7.23	24.99	46.00	21.01
6	740.7508	-5.28	25.74	46.00	20.26

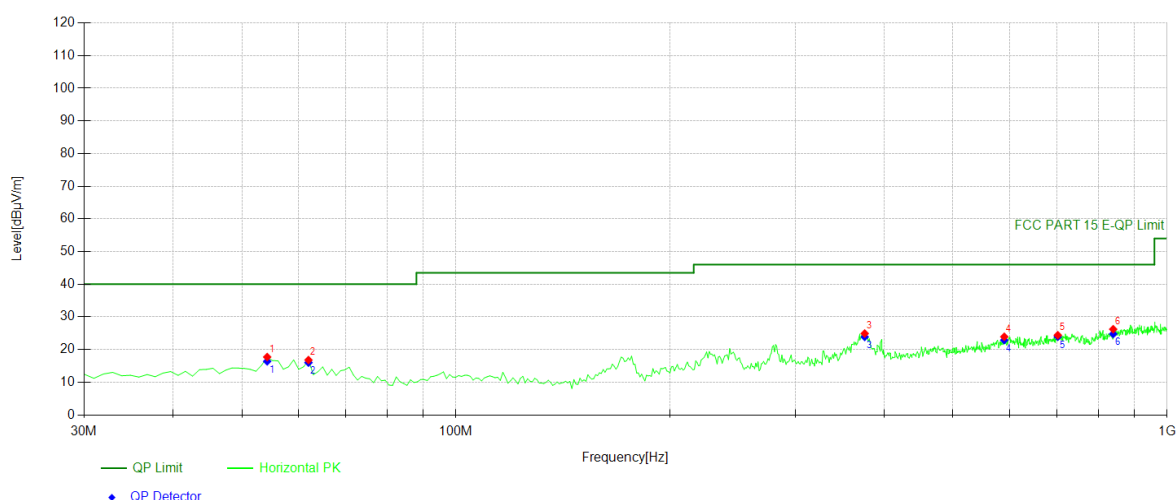

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	54.2743	34.32	-16.60	17.72	PK	40.00	22.28	Horizontal
2	62.042	34.47	-17.68	16.79	PK	40.00	23.21	Horizontal
3	375.665	36.60	-11.70	24.90	PK	46.00	21.10	Horizontal
4	590.250	30.60	-6.68	23.92	PK	46.00	22.08	Horizontal
5	701.911	30.27	-5.86	24.41	PK	46.00	21.59	Horizontal
6	839.789	30.60	-4.37	26.23	PK	46.00	19.77	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	54.2743	-16.60	16.40	40.00	23.60
2	62.042	-17.68	16.00	40.00	24.00
3	375.6657	-11.70	23.87	46.00	22.13
4	590.2503	-6.68	22.89	46.00	23.11
5	701.9119	-5.86	23.92	46.00	22.08
6	839.7898	-4.37	24.78	46.00	21.22

U-NII 8 Band (6875 ~ 7125MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 6995

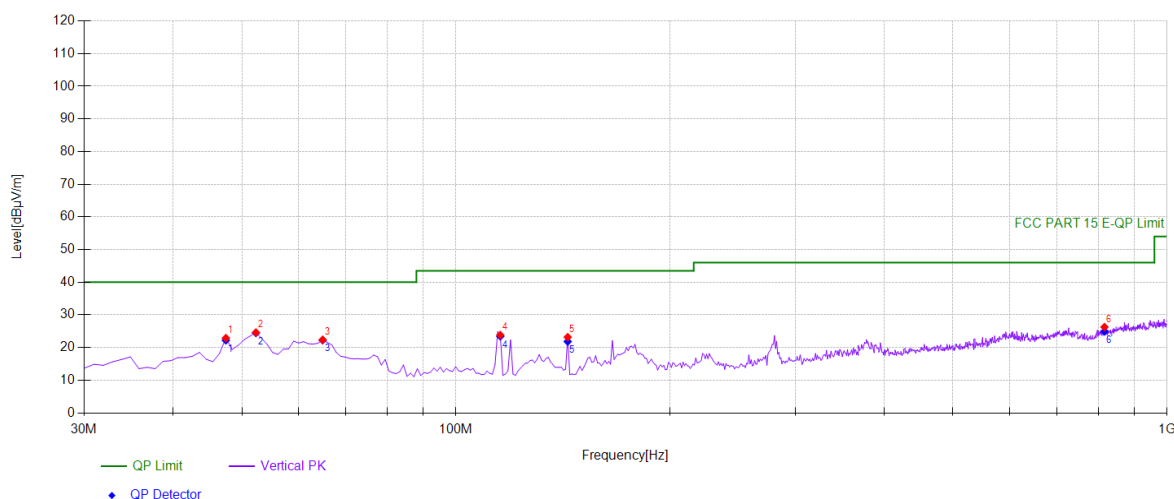


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	39.29	-16.39	22.90	PK	40.00	17.10	Vertical
2	52.3323	40.95	-16.34	24.61	PK	40.00	15.39	Vertical
3	64.955	40.45	-18.07	22.38	PK	40.00	17.62	Vertical
4	115.445	42.10	-18.26	23.84	PK	43.50	19.66	Vertical
5	143.603	42.90	-19.71	23.19	PK	43.50	20.31	Vertical
6	816.486	31.04	-4.77	26.27	PK	46.00	19.73	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	22.22	40.00	17.78
2	52.3323	-16.34	24.47	40.00	15.53
3	64.955	-18.07	22.24	40.00	17.76
4	115.4454	-18.26	23.45	43.50	20.05
5	143.6036	-19.71	21.84	43.50	21.66
6	816.4865	-4.77	24.92	46.00	21.08

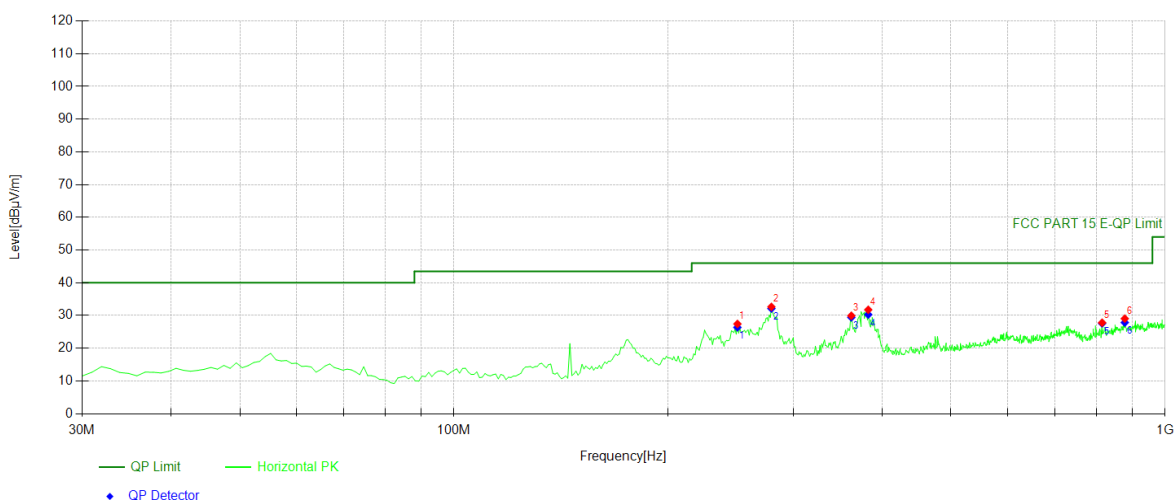

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	250.410	43.18	-15.75	27.43	PK	46.00	18.57	Horizontal
2	279.539	47.47	-14.82	32.65	PK	46.00	13.35	Horizontal
3	362.072	42.18	-12.24	29.94	PK	46.00	16.06	Horizontal
4	382.462	43.28	-11.52	31.76	PK	46.00	14.24	Horizontal
5	815.515	32.58	-4.78	27.80	PK	46.00	18.20	Horizontal
6	877.657	32.43	-3.39	29.04	PK	46.00	16.96	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	250.4104	-15.75	26.37	46.00	19.63
2	279.5395	-14.82	32.13	46.00	13.87
3	362.0721	-12.24	29.42	46.00	16.58
4	382.4625	-11.52	30.28	46.00	15.72
5	815.5155	-4.78	27.57	46.00	18.43
6	877.6577	-3.39	27.85	46.00	18.15

U-NII 8 Band (6875 ~ 7125MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 6995

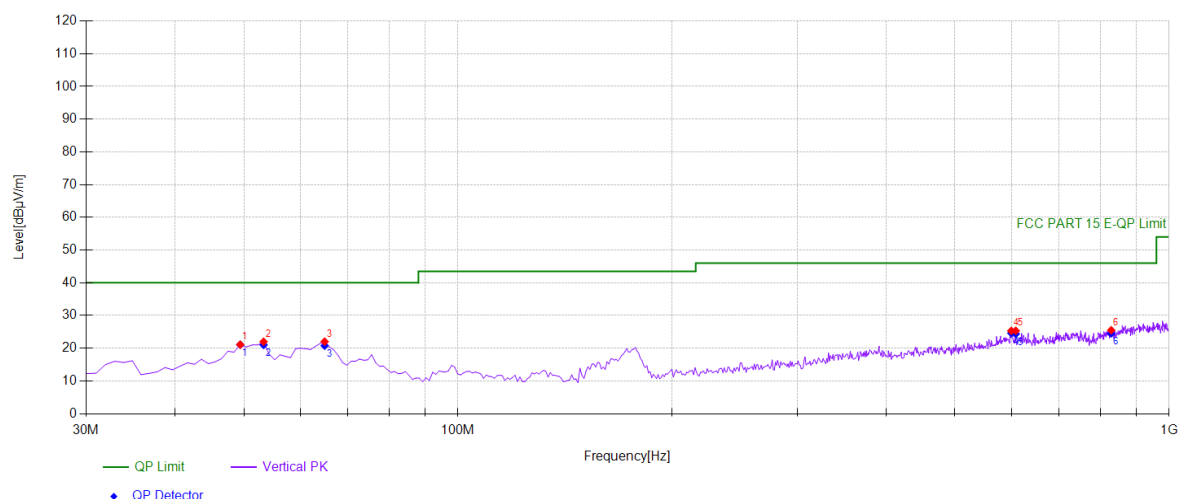


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	37.20	-16.10	21.10	PK	40.00	18.90	Vertical
2	53.3033	38.46	-16.47	21.99	PK	40.00	18.01	Vertical
3	64.955	40.08	-18.07	22.01	PK	40.00	17.99	Vertical
4	599.96	31.42	-6.10	25.32	PK	46.00	20.68	Vertical
5	608.698	31.93	-6.59	25.34	PK	46.00	20.66	Vertical
6	829.109	30.09	-4.59	25.50	PK	46.00	20.50	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	21.08	40.00	18.92
2	53.3033	-16.47	21.01	40.00	18.99
3	64.955	-18.07	20.78	40.00	19.22
4	599.96	-6.10	24.63	46.00	21.37
5	608.6987	-6.59	24.40	46.00	21.60
6	829.1091	-4.59	24.56	46.00	21.44

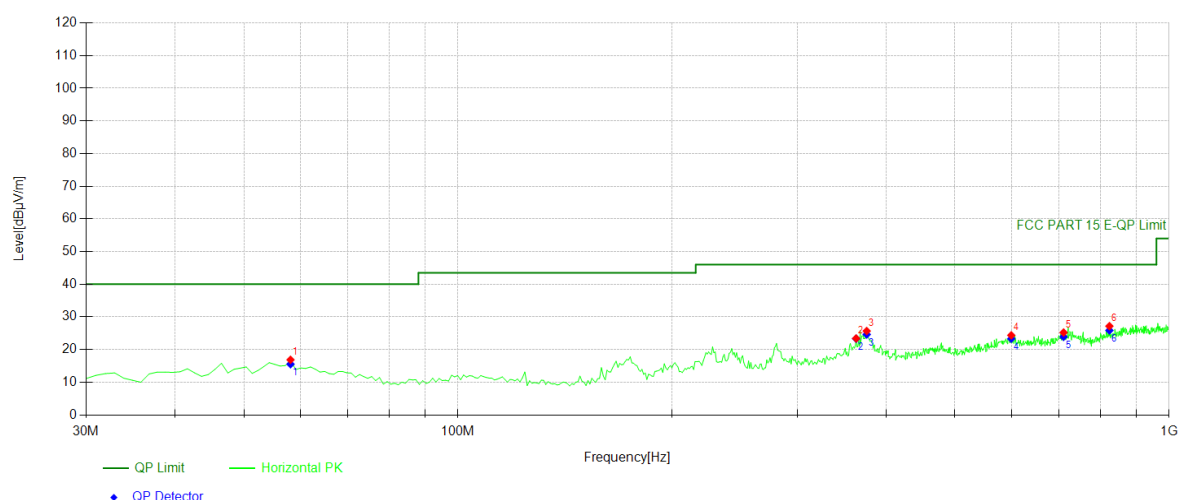

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	58.1582	34.01	-17.14	16.87	PK	40.00	23.13	Horizontal
2	363.043	35.60	-12.20	23.40	PK	46.00	22.60	Horizontal
3	375.665	37.37	-11.70	25.67	PK	46.00	20.33	Horizontal
4	599.96	30.46	-6.10	24.36	PK	46.00	21.64	Horizontal
5	710.650	30.98	-5.78	25.20	PK	46.00	20.80	Horizontal
6	824.254	31.81	-4.65	27.16	PK	46.00	18.84	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	58.1582	-17.14	15.53	40.00	24.47
2	363.043	-12.20	23.31	46.00	22.69
3	375.6657	-11.70	24.62	46.00	21.38
4	599.96	-6.10	23.31	46.00	22.69
5	710.6507	-5.78	23.90	46.00	22.10
6	824.2543	-4.65	25.86	46.00	20.14

U-NII 8 Band (6875 ~ 7125MHz)

Test mode: 802.11ax(20)

Frequency(MHz): 7115

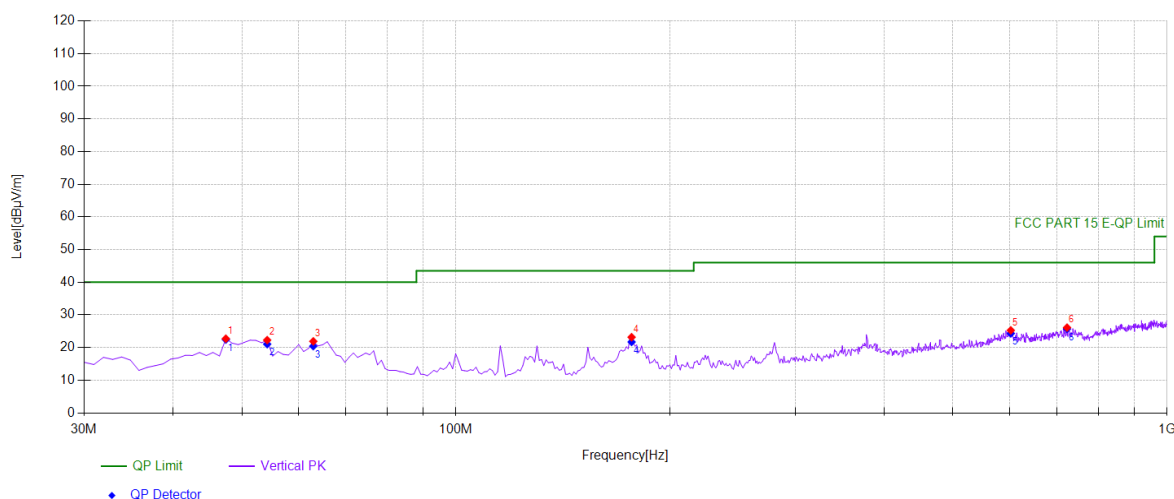


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	39.11	-16.39	22.72	PK	40.00	17.28	Vertical
2	54.2743	38.88	-16.60	22.28	PK	40.00	17.72	Vertical
3	63.013	39.70	-17.80	21.90	PK	40.00	18.10	Vertical
4	176.616	41.91	-18.73	23.18	PK	43.50	20.32	Vertical
5	602.872	31.53	-6.26	25.27	PK	46.00	20.73	Vertical
6	723.273	31.75	-5.64	26.11	PK	46.00	19.89	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.39	22.45	40.00	17.55
2	54.2743	-16.60	21.05	40.00	18.95
3	63.013	-17.80	20.43	40.00	19.57
4	176.6166	-18.73	21.71	43.50	21.79
5	602.8729	-6.26	24.33	46.00	21.67
6	723.2733	-5.64	25.71	46.00	20.29

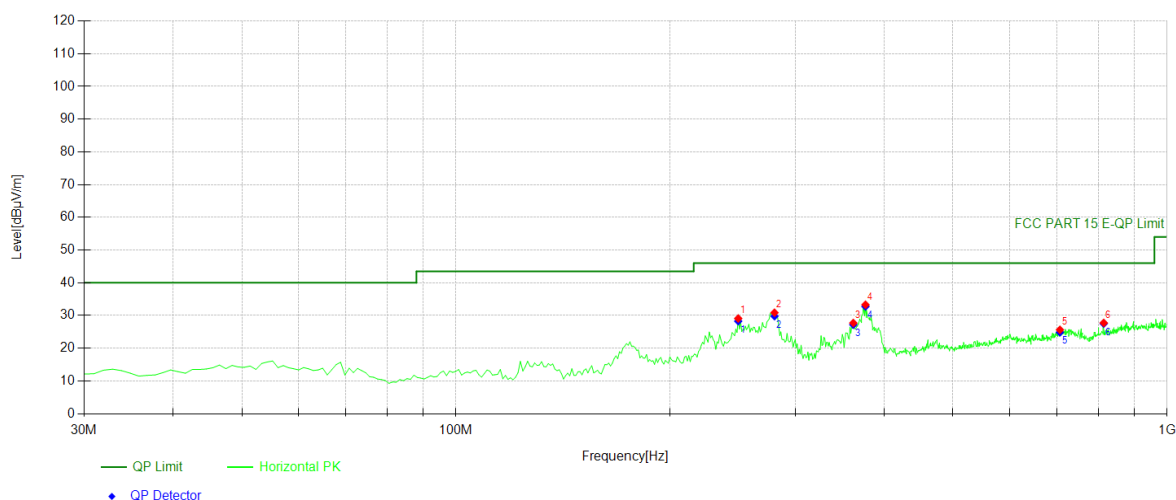

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	249.439	44.85	-15.76	29.09	PK	46.00	16.91	Horizontal
2	280.510	45.64	-14.78	30.86	PK	46.00	15.14	Horizontal
3	362.072	39.96	-12.24	27.72	PK	46.00	18.28	Horizontal
4	376.636	44.96	-11.66	33.30	PK	46.00	12.70	Horizontal
5	706.766	31.44	-5.81	25.63	PK	46.00	20.37	Horizontal
6	814.544	32.54	-4.79	27.75	PK	46.00	18.25	Horizontal


Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	249.4394	-15.76	28.26	46.00	17.74
2	280.5105	-14.78	29.79	46.00	16.21
3	362.0721	-12.24	27.18	46.00	18.82
4	376.6366	-11.66	32.76	46.00	13.24
5	706.7668	-5.81	24.85	46.00	21.15
6	814.5445	-4.79	27.51	46.00	18.49

U-NII 8 Band (6875 ~ 7125MHz)

Test mode: 802.11BE(20)

Frequency(MHz): 7115

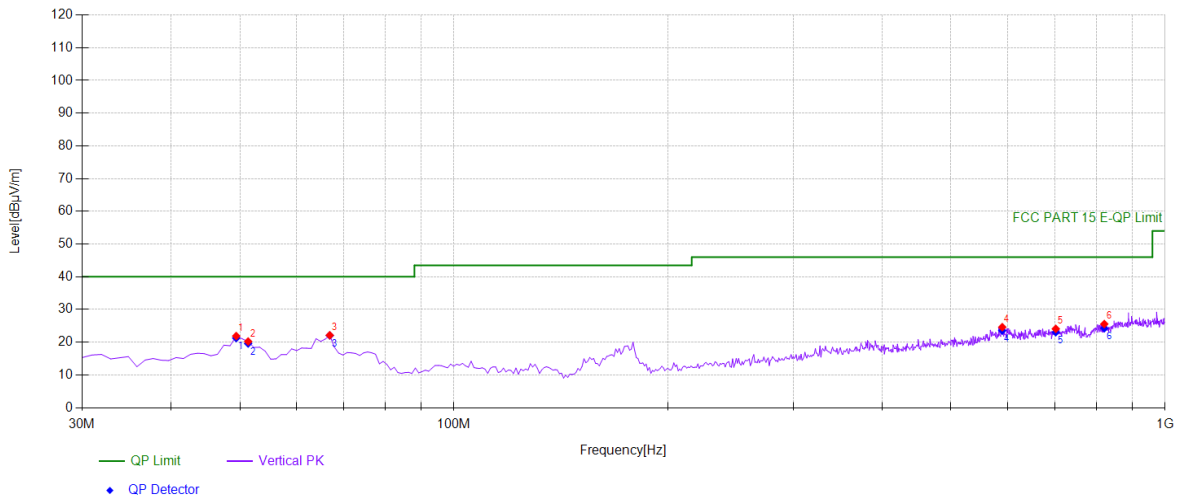


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	37.99	-16.10	21.89	PK	40.00	18.11	Vertical
2	51.3614	36.43	-16.21	20.22	PK	40.00	19.78	Vertical
3	66.8969	40.47	-18.34	22.13	PK	40.00	17.87	Vertical
4	590.250	31.28	-6.68	24.60	PK	46.00	21.40	Vertical
5	701.911	29.95	-5.86	24.09	PK	46.00	21.91	Vertical
6	821.341	30.25	-4.69	25.56	PK	46.00	20.44	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.10	21.28	40.00	18.72
2	51.3614	-16.21	19.61	40.00	20.39
3	66.8969	-18.34	22.06	40.00	17.94
4	590.2503	-6.68	23.57	46.00	22.43
5	701.9119	-5.86	23.06	46.00	22.94
6	821.3413	-4.69	24.28	46.00	21.72

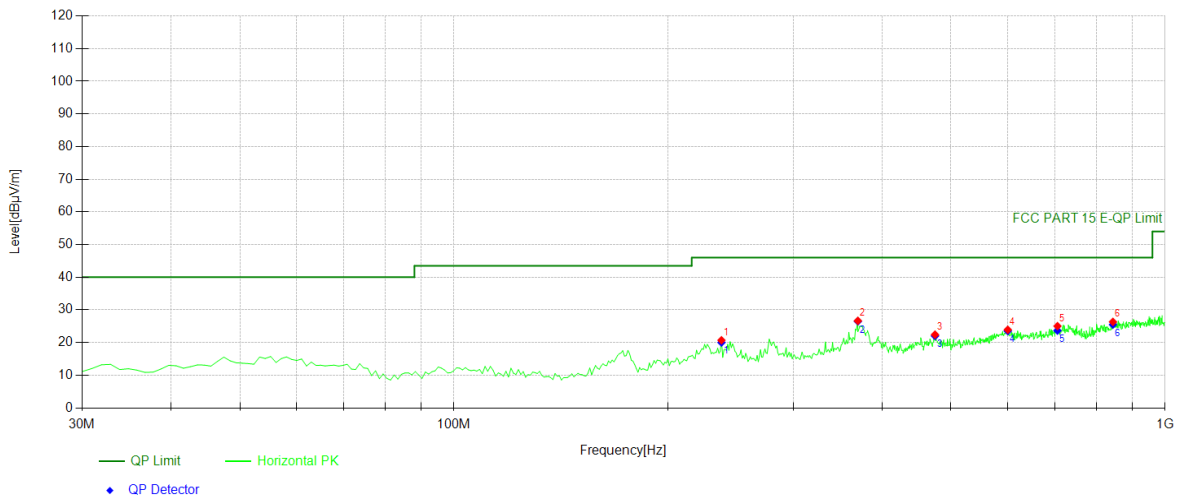

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	237.787	36.52	-15.81	20.71	PK	46.00	25.29	Horizontal
2	369.839	38.55	-11.90	26.65	PK	46.00	19.35	Horizontal
3	474.704	32.44	-10.02	22.42	PK	46.00	23.58	Horizontal
4	600.930	30.08	-6.16	23.92	PK	46.00	22.08	Horizontal
5	705.795	30.86	-5.82	25.04	PK	46.00	20.96	Horizontal
6	844.644	30.45	-4.12	26.33	PK	46.00	19.67	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	237.7878	-15.81	20.01	46.00	25.99
2	369.8398	-11.90	26.48	46.00	19.52
3	474.7047	-10.02	22.01	46.00	23.99
4	600.9309	-6.16	23.51	46.00	22.49
5	705.7958	-5.82	23.67	46.00	22.33
6	844.6446	-4.12	25.50	46.00	20.50

All antennas and modulation modes are tested, the data of the worst mode is described in the table.

8.7 POWER LINE CONDUCTED EMISSIONS

8.7.1 Applicable Standard

According to FCC Part 15.207(a)

According to IC RSS-Gen 8.8

8.7.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.7.3 Test Configuration

Test according to clause 7.3 conducted emission test setup.

8.7.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.7.5 Test Results

PASS

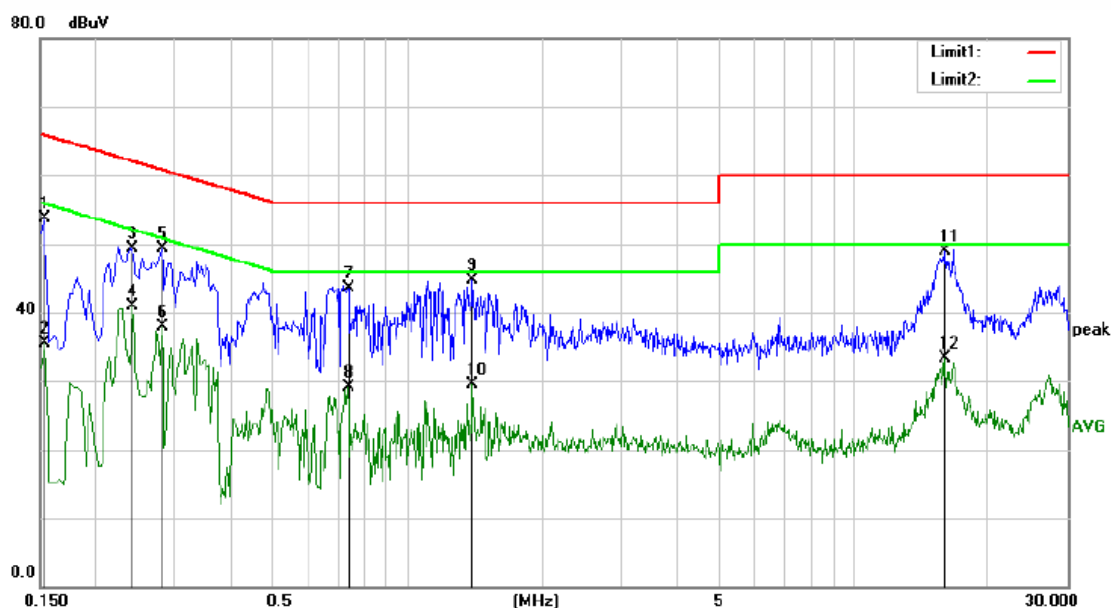


Site Conduction 2#

Phase: L1

Temperature: 25.5

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	43.07	10.69	53.76	65.78	-12.02	QP	
2		0.1540	24.75	10.69	35.44	55.78	-20.34	AVG	
3		0.2420	38.65	10.68	49.33	62.03	-12.70	QP	
4		0.2420	30.18	10.68	40.86	52.03	-11.17	AVG	
5		0.2820	38.52	10.69	49.21	60.76	-11.55	QP	
6		0.2820	27.23	10.69	37.92	50.76	-12.84	AVG	
7		0.7380	32.85	10.75	43.60	56.00	-12.40	QP	
8		0.7380	18.29	10.75	29.04	46.00	-16.96	AVG	
9		1.4020	33.88	10.76	44.64	56.00	-11.36	QP	
10		1.4020	18.66	10.76	29.42	46.00	-16.58	AVG	
11	*	16.0120	38.16	10.82	48.98	60.00	-11.02	QP	
12		16.0120	22.55	10.82	33.37	50.00	-16.63	AVG	

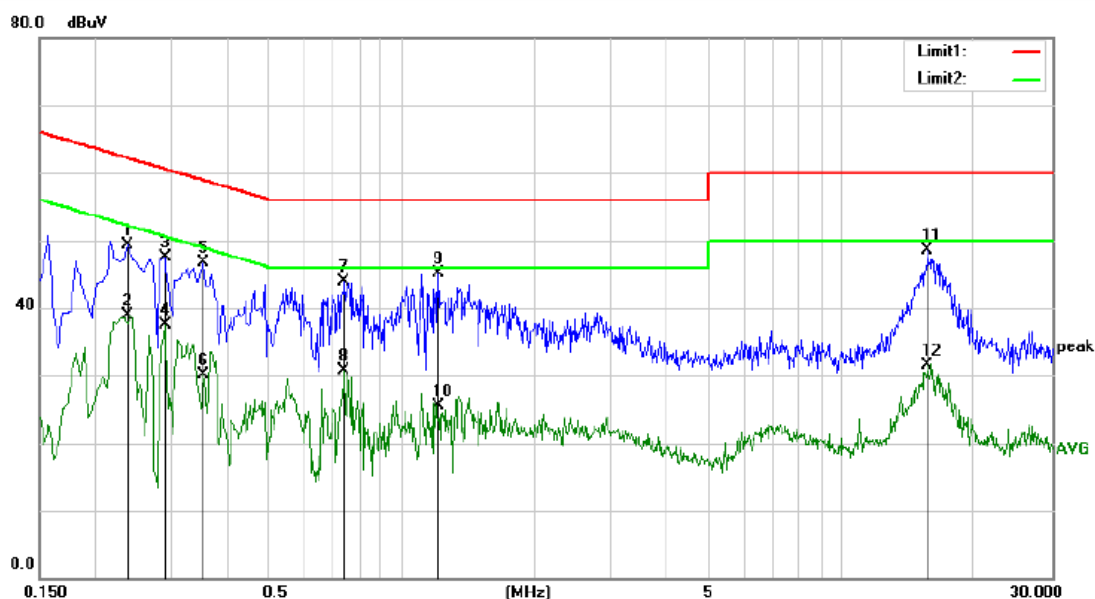

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2380	38.57	10.68	49.25	62.17	-12.92	QP	
2		0.2380	28.16	10.68	38.84	52.17	-13.33	AVG	
3		0.2900	36.79	10.69	47.48	60.52	-13.04	QP	
4		0.2900	26.84	10.69	37.53	50.52	-12.99	AVG	
5		0.3540	36.03	10.71	46.74	58.87	-12.13	QP	
6		0.3540	19.38	10.71	30.09	48.87	-18.78	AVG	
7		0.7420	33.15	10.75	43.90	56.00	-12.10	QP	
8		0.7420	19.93	10.75	30.68	46.00	-15.32	AVG	
9	*	1.2100	34.37	10.77	45.14	56.00	-10.86	QP	
10		1.2100	14.70	10.77	25.47	46.00	-20.53	AVG	
11		15.6920	37.78	10.80	48.58	60.00	-11.42	QP	
12		15.6920	20.69	10.80	31.49	50.00	-18.51	AVG	

8.8 ANTENNA REQUIREMENT

8.8.1 Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

8.8.2 Result

PASS

Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	45 %	Test Engineer:	XXH

The EUT is Integrated Antenna, antenna gain is Ant1: 3.02dBi, Ant2: 3.37dBi.

- ☒ Antenna use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---

声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。
6. Objections shall be raised within 20 days from the date receiving the report.