

No.	Frequency (MHz)	Reading (dB <sub>uV</sub> )	Factor (dB/m)	Level (dB <sub>uV/m</sub> )	Limit (dB <sub>uV/m</sub> )	Margin (dB)	Detector
1	36.8953	49.50	-17.69	31.81	40.00	-8.19	QP
2	77.3210	49.51	-19.77	29.74	40.00	-10.26	QP
3	122.4040	45.19	-20.08	25.11	43.50	-18.39	QP
4	184.4898	54.56	-18.54	36.02	43.50	-7.48	QP
5	501.1790	45.83	-13.14	32.69	46.00	-13.31	QP
6	701.7610	42.12	-10.89	31.23	46.00	-14.77	QP

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (3Mbps-High Channel).
- 2). Emission level (dB<sub>uV/m</sub>) = 20 log Emission level (uV/m).
- 3). Level = Reading + Factor, Margin = Level-Limit, Factor = Antenna Factor + Cable Loss - Preamp Factor.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

## 6.6.8. Results of Radiated Emissions (1 GHz~26 GHz)

Note: All the modes have been tested and recorded worst mode in the report.

The worst test result for GFSK, Channel 0 / 2402 MHz

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4804.00	54.91	33.06	35.04	3.94	56.87	74.00	-17.13	Peak	Horizontal
4804.00	42.69	33.06	35.04	3.94	44.65	54.00	-9.35	Average	Horizontal
4804.00	54.71	33.06	35.04	3.94	56.67	74.00	-17.33	Peak	Vertical
4804.00	42.41	33.06	35.04	3.94	44.37	54.00	-9.63	Average	Vertical

The worst test result for GFSK, Channel 39 / 2441 MHz

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4882.00	56.03	33.16	35.15	3.96	58.00	74.00	-16.00	Peak	Horizontal
4882.00	44.07	33.16	35.15	3.96	46.04	54.00	-7.96	Average	Horizontal
4882.00	57.04	33.16	35.15	3.96	59.01	74.00	-14.99	Peak	Vertical
4882.00	40.08	33.16	35.15	3.96	42.05	54.00	-11.95	Average	Vertical

The worst test result for GFSK, Channel 78 / 2480 MHz

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4960.00	59.33	33.26	35.14	3.98	61.43	74.00	-12.57	Peak	Horizontal
4960.00	41.70	33.26	35.14	3.98	43.80	54.00	-10.20	Average	Horizontal
4960.00	58.54	33.26	35.14	3.98	60.64	74.00	-13.36	Peak	Vertical
4960.00	45.86	33.26	35.14	3.98	47.96	54.00	-6.04	Average	Vertical

The worst test result for  $\pi/4$ -DQPSK, Channel 0 / 2402 MHz

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4804.00	55.39	33.06	35.04	3.94	57.35	74.00	-16.65	Peak	Horizontal
4804.00	43.59	33.06	35.04	3.94	45.55	54.00	-8.45	Average	Horizontal
4804.00	56.66	33.06	35.04	3.94	58.62	74.00	-15.38	Peak	Vertical
4804.00	40.92	33.06	35.04	3.94	42.88	54.00	-11.12	Average	Vertical

The worst test result for  $\pi/4$ -DQPSK, Channel 39 / 2441 MHz

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4882.00	57.88	33.16	35.15	3.96	59.85	74.00	-14.15	Peak	Horizontal
4882.00	45.52	33.16	35.15	3.96	47.49	54.00	-6.51	Average	Horizontal
4882.00	58.15	33.16	35.15	3.96	60.12	74.00	-13.88	Peak	Vertical
4882.00	40.16	33.16	35.15	3.96	42.13	54.00	-11.87	Average	Vertical

The worst test result for  $\pi/4$ -DQPSK, Channel 78 / 2480 MHz

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4960.00	60.80	33.26	35.14	3.98	62.90	74.00	-11.10	Peak	Horizontal
4960.00	44.18	33.26	35.14	3.98	46.28	54.00	-7.72	Average	Horizontal
4960.00	56.93	33.26	35.14	3.98	59.03	74.00	-14.97	Peak	Vertical
4960.00	41.77	33.26	35.14	3.98	43.87	54.00	-10.13	Average	Vertical

The worst test result for 8-DPSK, Channel 0 / 2402 MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4804.00	60.42	33.06	35.04	3.94	62.38	74.00	-11.62	Peak	Horizontal
4804.00	42.85	33.06	35.04	3.94	44.81	54.00	-9.19	Average	Horizontal
4804.00	54.55	33.06	35.04	3.94	56.51	74.00	-17.49	Peak	Vertical
4804.00	40.93	33.06	35.04	3.94	42.89	54.00	-11.11	Average	Vertical

*The worst test result for 8-DPSK, Channel 39 / 2441 MHz*

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4882.00	58.62	33.16	35.15	3.96	60.59	74.00	-13.41	Peak	Horizontal
4882.00	43.07	33.16	35.15	3.96	45.04	54.00	-8.96	Average	Horizontal
4882.00	56.85	33.16	35.15	3.96	58.82	74.00	-15.18	Peak	Vertical
4882.00	43.15	33.16	35.15	3.96	45.12	54.00	-8.88	Average	Vertical

*The worst test result for 8-DPSK, Channel 78 / 2480 MHz*

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4960.00	53.59	33.26	35.14	3.98	55.69	74.00	-18.31	Peak	Horizontal
4960.00	41.21	33.26	35.14	3.98	43.31	54.00	-10.69	Average	Horizontal
4960.00	59.71	33.26	35.14	3.98	61.81	74.00	-12.19	Peak	Vertical
4960.00	43.65	33.26	35.14	3.98	45.75	54.00	-8.25	Average	Vertical

Notes:

- 1). Measuring frequencies from 9 KHz~10th harmonic or 26.5GHz (which is less), at least have 20dB margin found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit,  
Factor = Antenna Factor + Cable Loss - Preamp Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

## 6.7. AC Power Line Conducted Emissions


### 6.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.7.2 Block Diagram of Test Setup

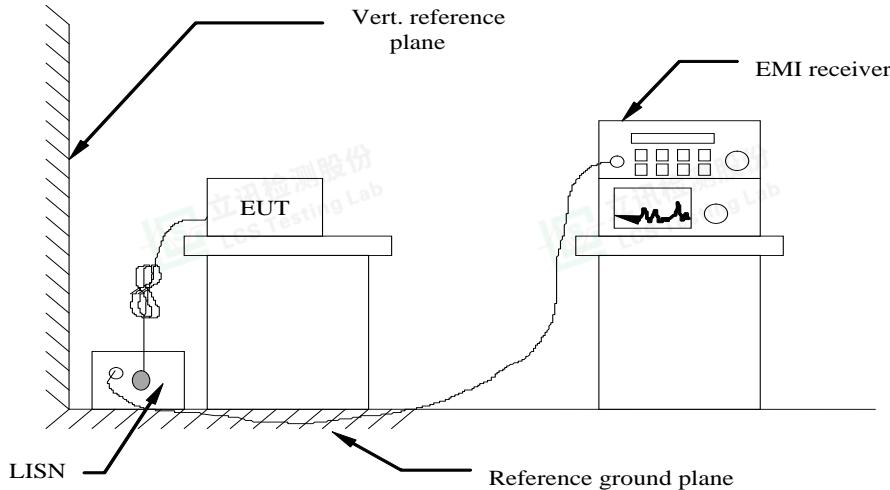

### 6.7.3 Test Results

Temperature	24.2°C	Humidity	53.2%
Test Engineer	Nick Peng	Configurations	BT

**PASS.**

The test data please refer to following page.




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

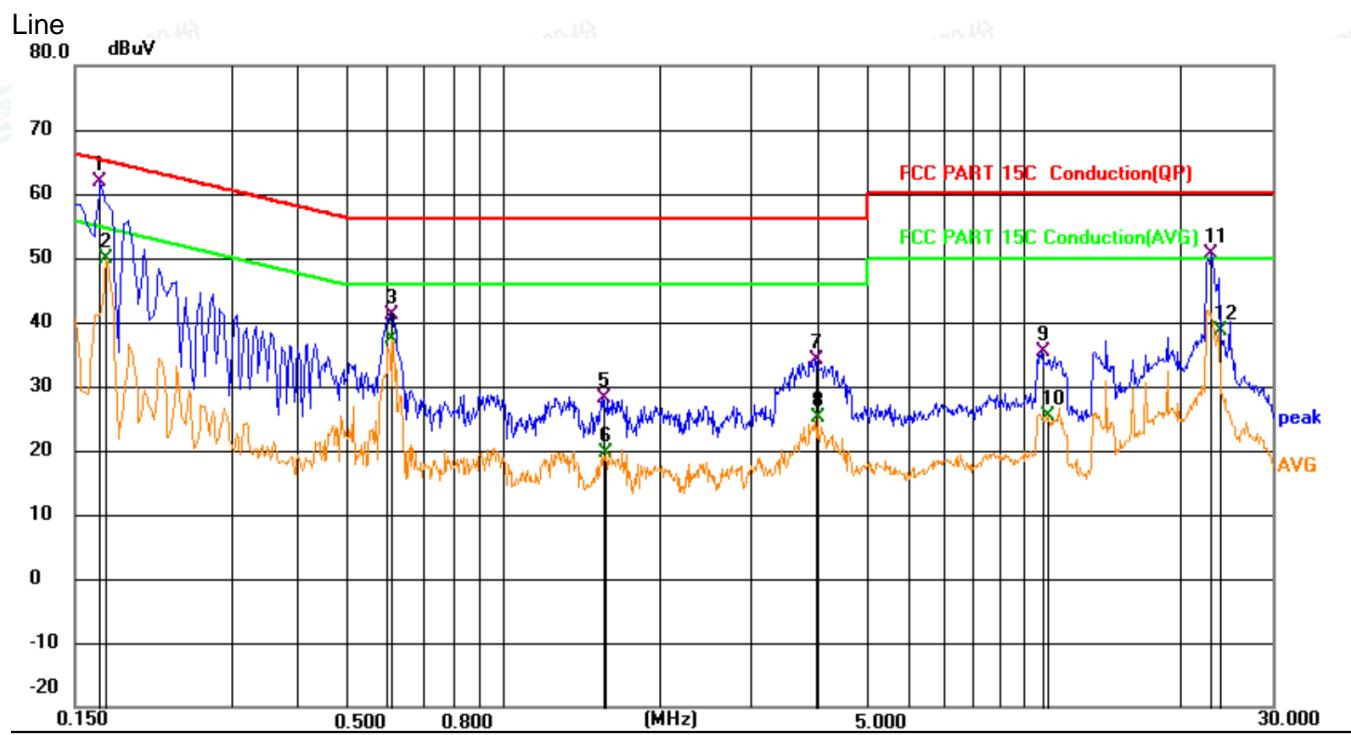

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1680	42.14	19.63	61.77	65.06	-3.29	QP	
2		0.1726	30.19	19.63	49.82	54.83	-5.01	AVG	
3		0.6134	21.39	19.66	41.05	56.00	-14.95	QP	
4		0.6134	17.80	19.66	37.46	46.00	-8.54	AVG	
5		1.5585	8.55	19.67	28.22	56.00	-27.78	QP	
6		1.5720	0.06	19.67	19.73	46.00	-26.27	AVG	
7		3.9661	14.37	19.70	34.07	56.00	-21.93	QP	
8		4.0246	5.38	19.70	25.08	46.00	-20.92	AVG	
9		10.8151	15.59	19.84	35.43	60.00	-24.57	QP	
10		11.1166	5.60	19.85	25.45	50.00	-24.55	AVG	
11		23.0011	30.57	20.07	50.64	60.00	-9.36	QP	
12		23.6941	18.48	20.05	38.53	50.00	-11.47	AVG	




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

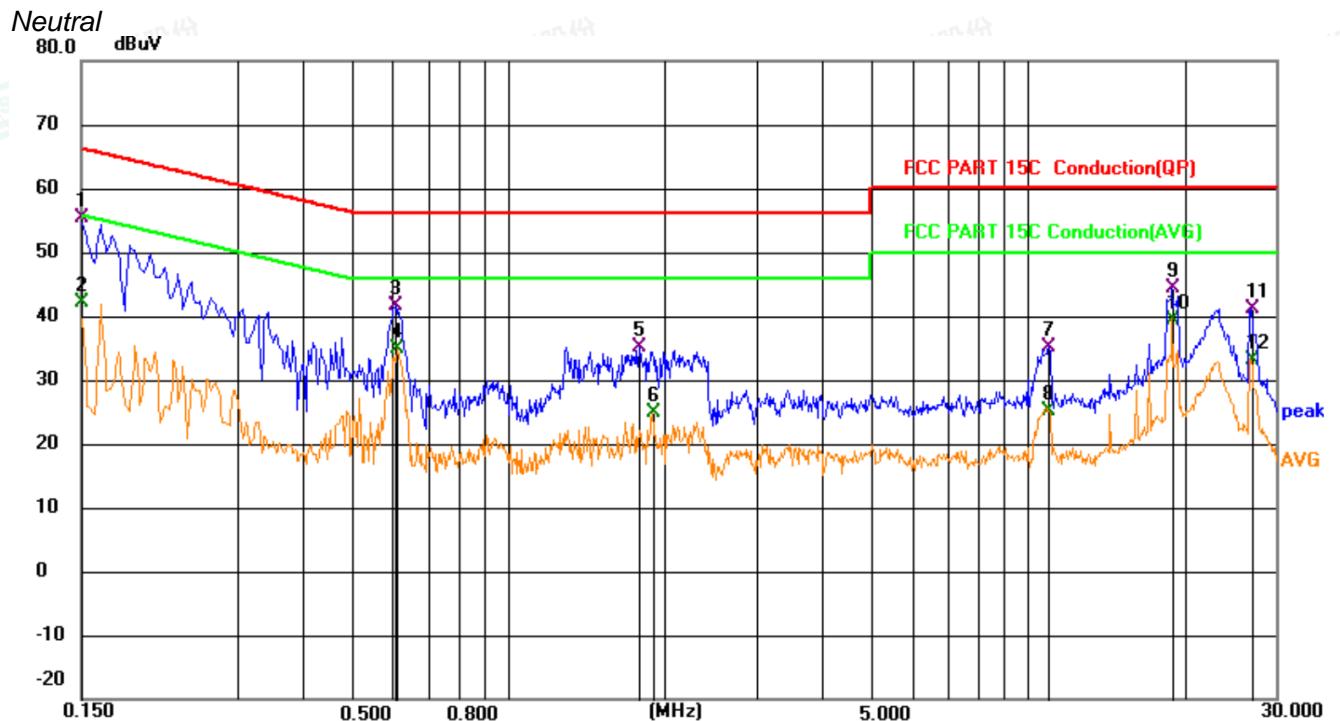

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1		0.1500	35.72	19.63	55.35	66.00	-10.65	QP
2		0.1500	22.60	19.63	42.23	56.00	-13.77	AVG
3		0.6045	21.87	19.66	41.53	56.00	-14.47	QP
4		0.6090	15.14	19.66	34.80	46.00	-11.20	AVG
5		1.7880	15.53	19.67	35.20	56.00	-20.80	QP
6		1.8960	5.09	19.68	24.77	46.00	-21.23	AVG
7		10.9680	15.32	19.85	35.17	60.00	-24.83	QP
8		10.9680	5.34	19.85	25.19	50.00	-24.81	AVG
9		18.9286	24.12	20.18	44.30	60.00	-15.70	QP
10	*	18.9286	19.32	20.18	39.50	50.00	-10.50	AVG
11		26.9701	21.00	20.05	41.05	60.00	-18.95	QP
12		26.9701	12.96	20.05	33.01	50.00	-16.99	AVG

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report (3Mbps-High Channel).

Measurement = Reading + Correct, Margin = Measurement – Limit.

Correct Factor=Lisn Factor+Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

## 6.8. Emissions in Restricted Bands

### 6.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.8.2. Test Setup Layout

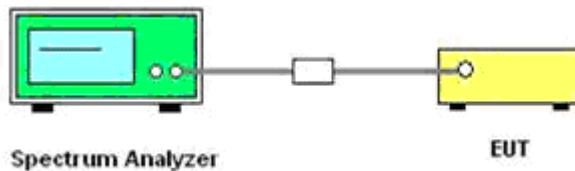

### 6.8.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 6.8.4. Test Procedures

According to KDB 412172 section 1.1 Field Strength Approach (linear terms):

$$\text{eirp} = p_t \times g_t = (E \times d)^2/30$$

Where:

$p_t$  = transmitter output power in watts,

$g_t$  = numeric gain of the transmitting antenna (unitless),

$E$  = electric field strength in V/m,

$d$  = measurement distance in meters (m).

$$\text{erp} = \text{eirp}/1.64 = (E \times d)^2/(30 \times 1.64)$$

Where all terms are as previously defined.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Middle Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/T for AV detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq$  30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $>$  1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Compare the resultant electric field strength level to the applicable regulatory limit.
11. Perform radiated spurious emission test duress until all measured frequencies were complete.

#### 6.8.5. Test Results

PASS

*Please refer to Appendix A.8*

##### Remark:

1. Measured at difference Packet Type for each mode and recorded worst case for each mode.
2. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ -DQPSK, 3DH5 for 8-DPSK modulation type;
3. Measured at Hopping and Non-Hopping mode, recorded worst at Non-Hopping mode.
4. The other emission levels were very low against the limit.
5. The average measurement was not performed when the peak measured data under the limit of average detection.
6. Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=1/T/Sweep time=Auto/Detector=Peak;
7. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

## 6.9. Pseudorandom Frequency Hopping Sequence

### 6.9.1 Standard Applicable


For 47 CFR Part 15C sections 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 6.9.2 EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5th first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

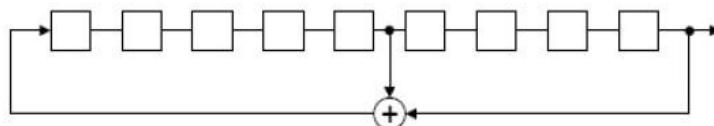

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

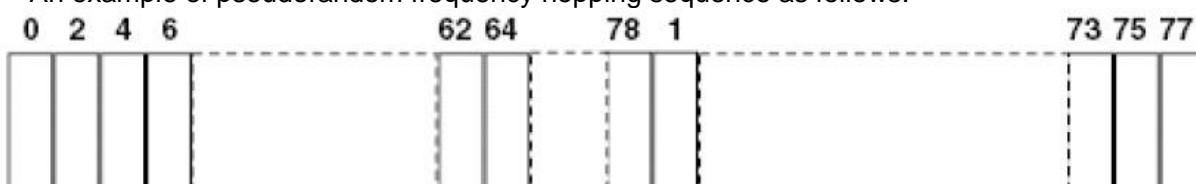

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 6.10. Antenna Requirement

### 6.10.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 6.10.2 Antenna Connected Construction

#### 6.10.2.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 6.10.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 2.0dBi(Max), and the antenna is an FPC Antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 6.10.2.3. Results: Compliance.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

## 9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF TEST REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity