


Appendix Test Data

Report No.:	1812C50292612501	Test Sample No.:	1-2-2
Start Test Date:	2025.6.17	Finish Test Date:	2025.6.27
Test Engineer:	<i>Qiangfei Yang</i>	Auditor:	<i>Justin Feng</i>
Temperature:	22.5°C	Relative Humidity:	45%
Pressure:	101kPa		


Appendix A: Duty Cycle

Condition	Antenna	Rate	Frequency (MHz)	Dutycycle(%)	Duty_factor
NVNT	ANT1	1-DH5	2402.00	77.54	1.10
NVNT	ANT1	1-DH5	2441.00	77.01	1.13
NVNT	ANT1	1-DH5	2480.00	77.66	1.10


Duty_Cycle_NVNT_ANT1_1-DH5_2402

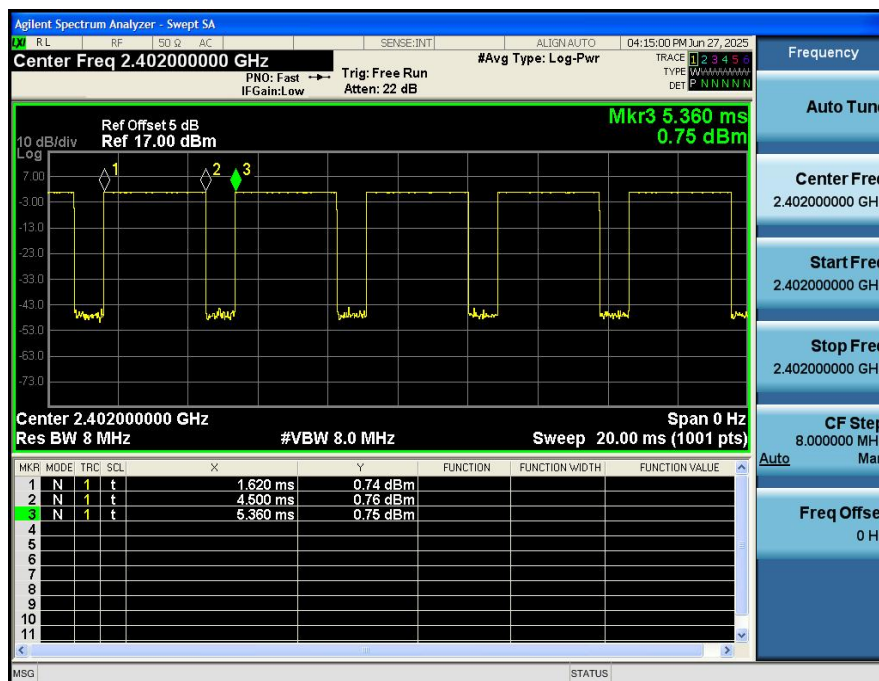

Duty_Cycle_NVNT_ANT1_1-DH5_2441

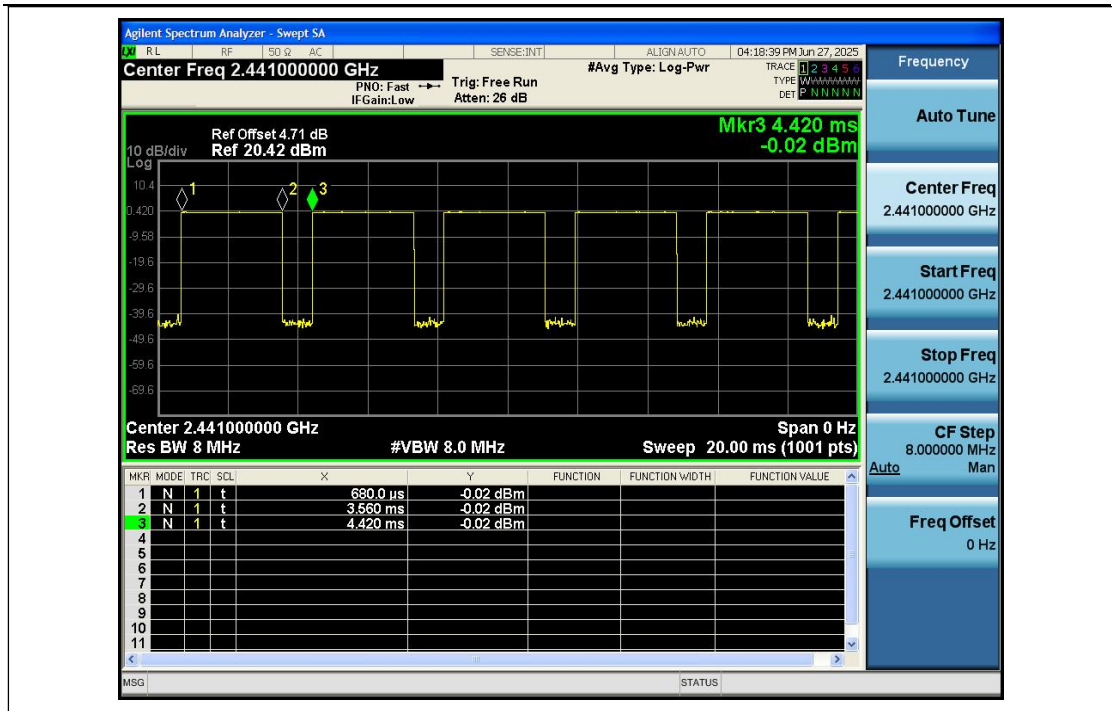


Duty_Cycle_NVNT_ANT1_1-DH5_2480

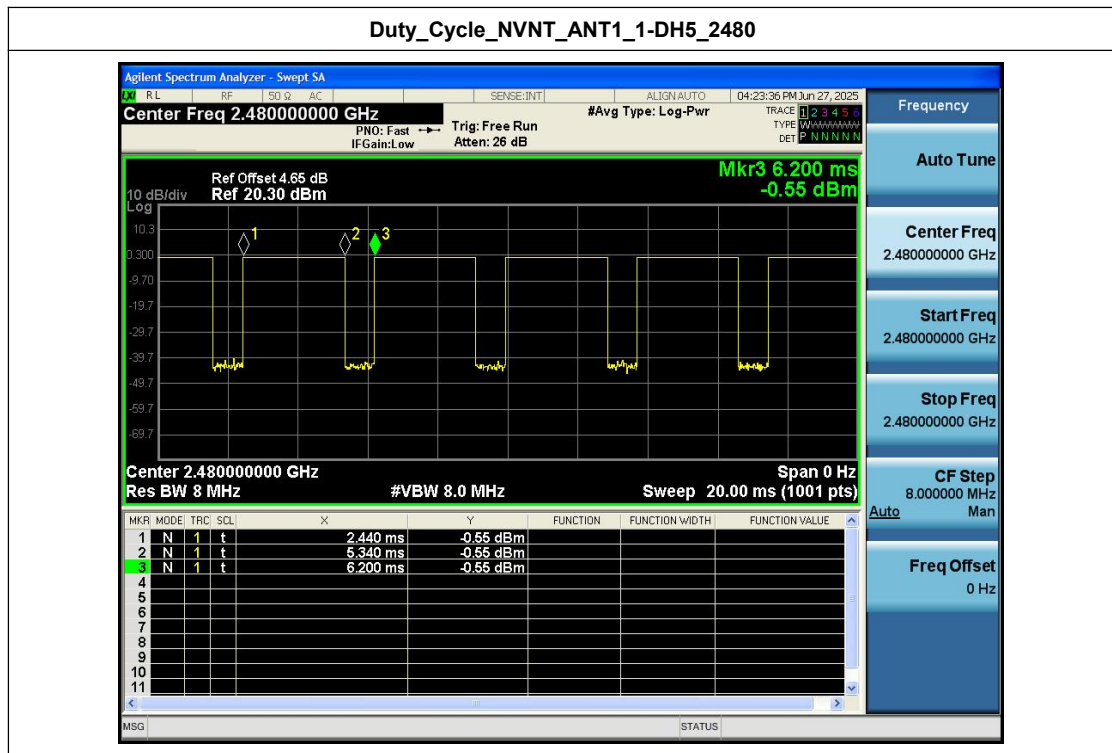


Appendix B: -20dB Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH5	2402.00	1.024	Yes
NVNT	ANT1	1-DH5	2441.00	1.012	Yes
NVNT	ANT1	1-DH5	2480.00	1.002	Yes


-20dB_Bandwidth_NVNT_ANT1_1-DH5_2402_00

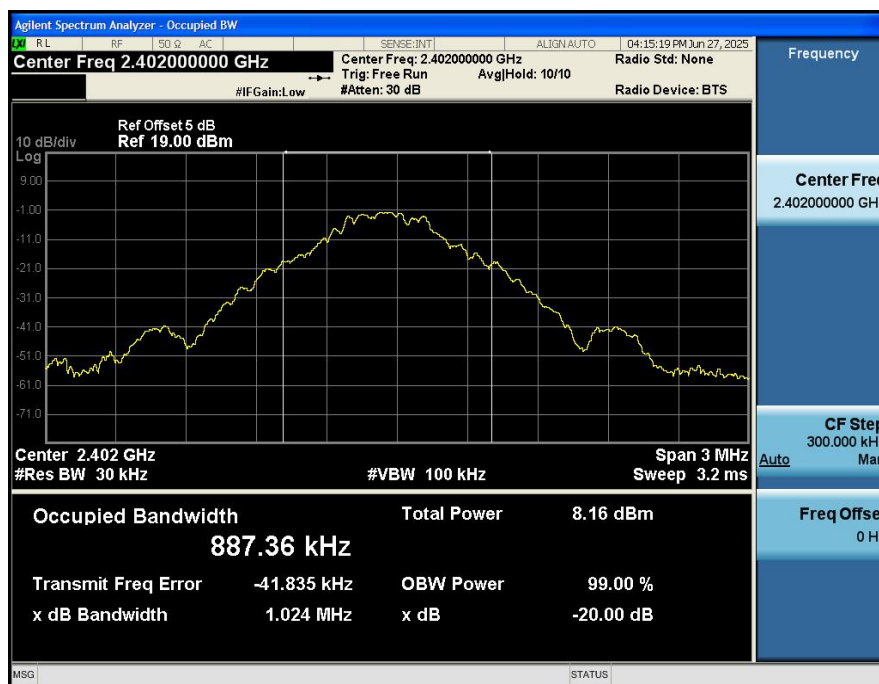

-20dB_Bandwidth_NVNT_ANT1_1-DH5_2441_00

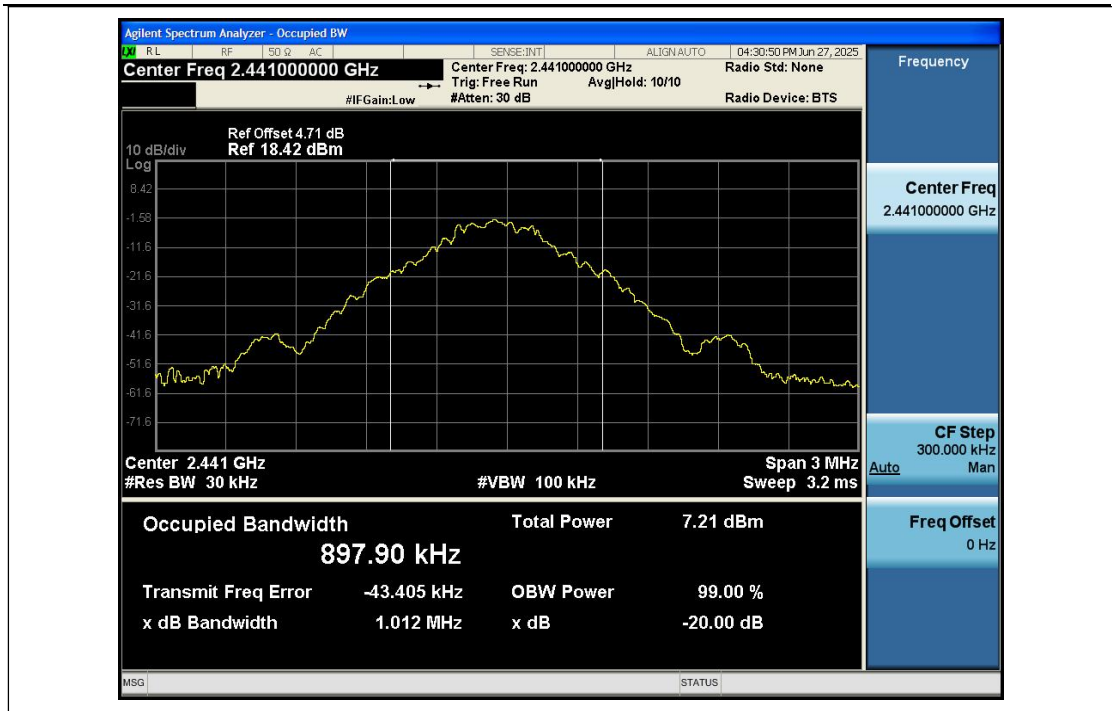

-20dB_Bandwidth_NVNT_ANT1_1-DH5_2480_00

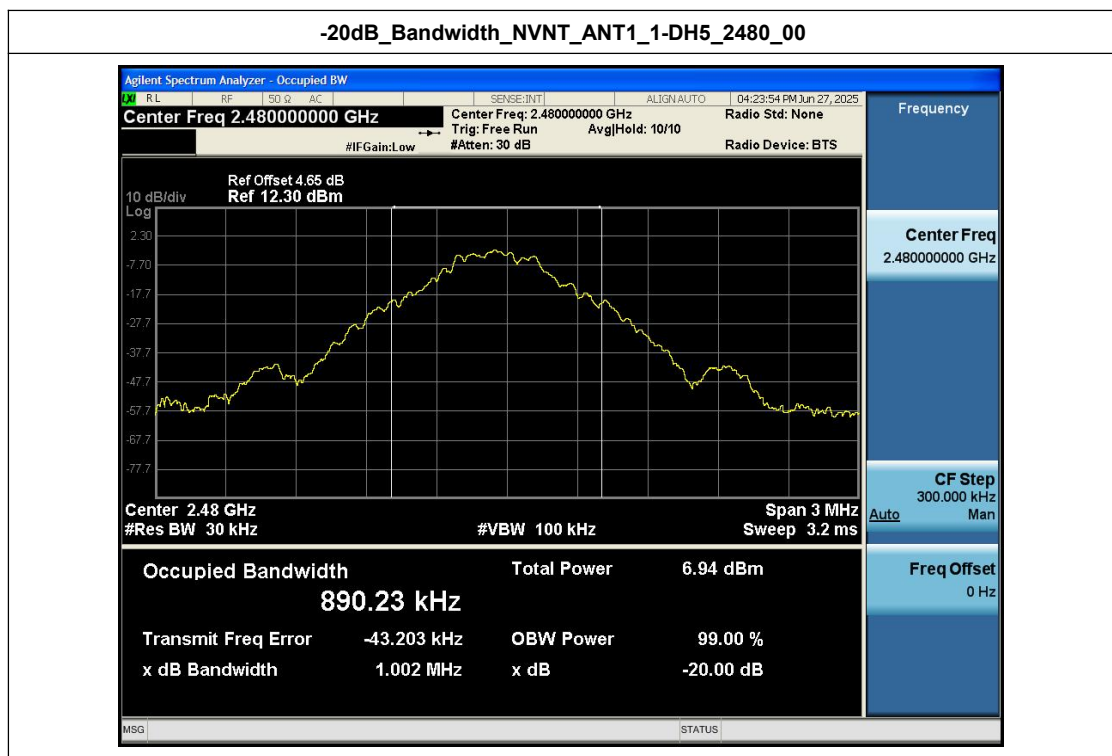

Shenzhen Anbotech Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
 Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
 Tel: (86) 0755-26066440 | Email: service@anbotech.com




Hotline
 400-003-0500
www.anbotech.com


Appendix C: 99% Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99%BW(MHz)
NVNT	ANT1	1-DH5	2402.00	0.887
NVNT	ANT1	1-DH5	2441.00	0.894
NVNT	ANT1	1-DH5	2480.00	0.894

99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2402_00

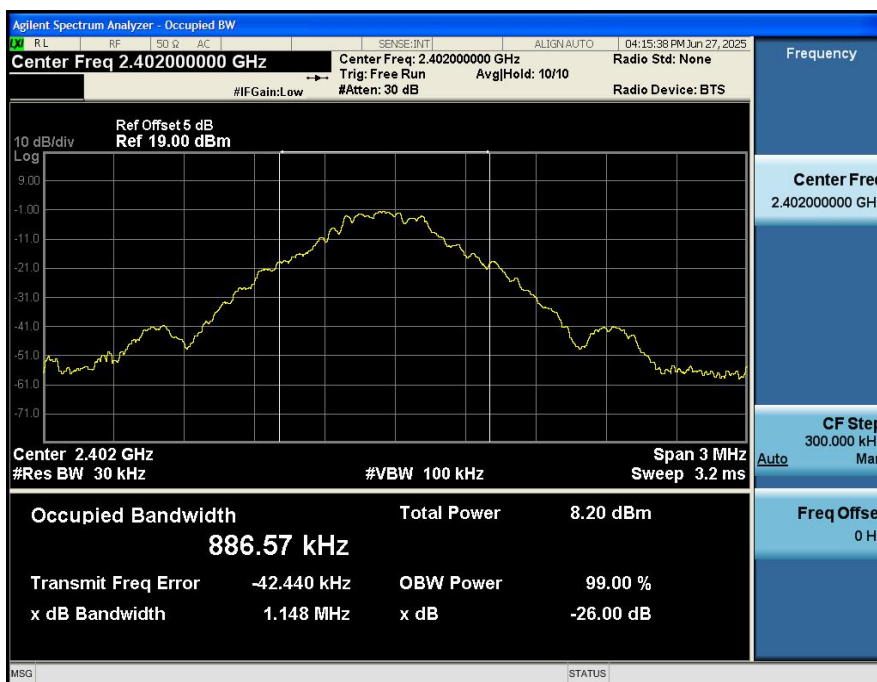


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH5_2441_00

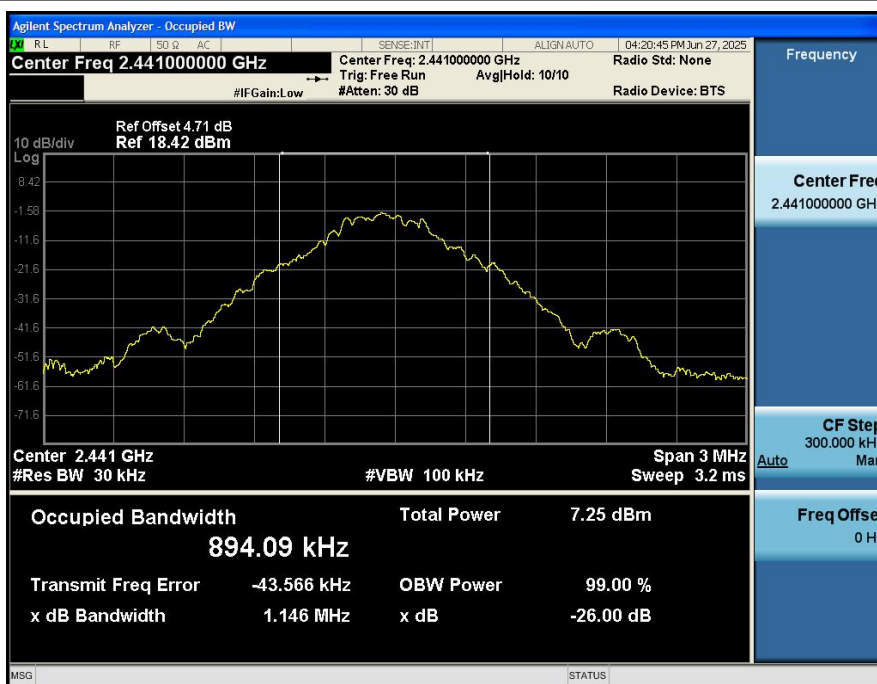

Shenzhen Anbotech Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066440 Email: service@anbotech.com

Hotline
400-003-0500
www.anbotech.com

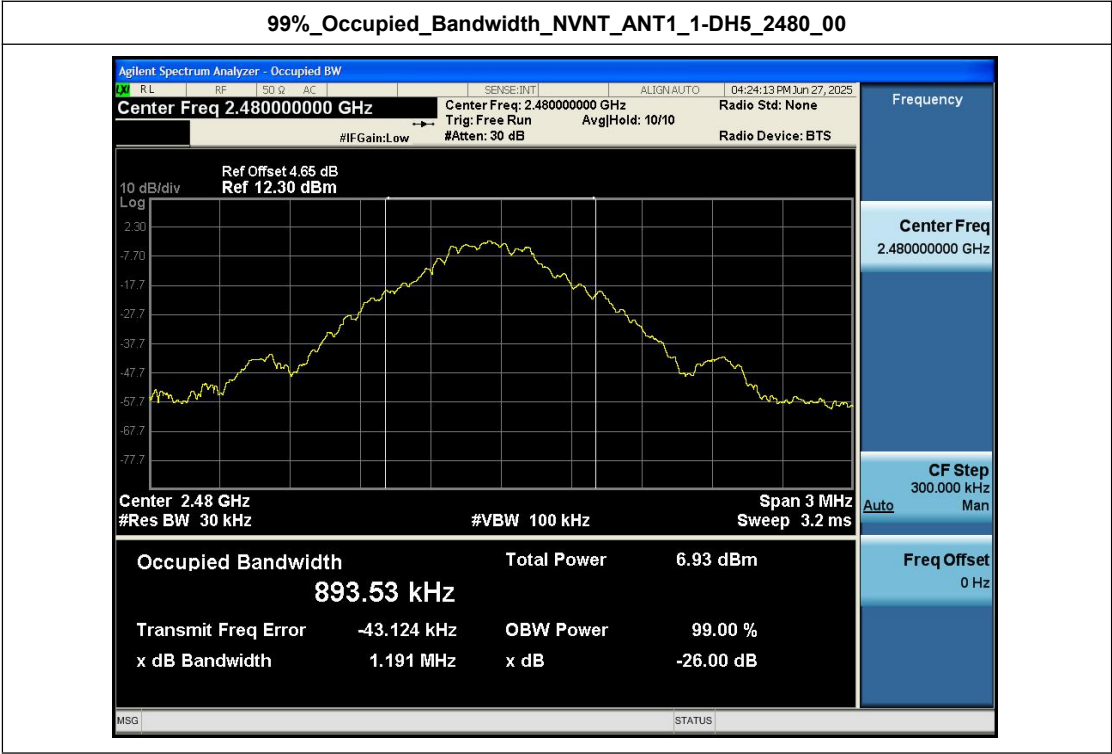

Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066440 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

Appendix D: Peak Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH5	2402.00	0.83	1.21	125	Pass
NVNT	ANT1	1-DH5	2441.00	0.09	1.02	125	Pass
NVNT	ANT1	1-DH5	2480.00	-0.53	0.89	125	Pass


Peak_Output_Power_NVNT_ANT1_1-DH5_2402_00



Peak_Output_Power_NVNT_ANT1_1-DH5_2441_00



Peak_Output_Power_NVNT_ANT1_1-DH5_2480_00

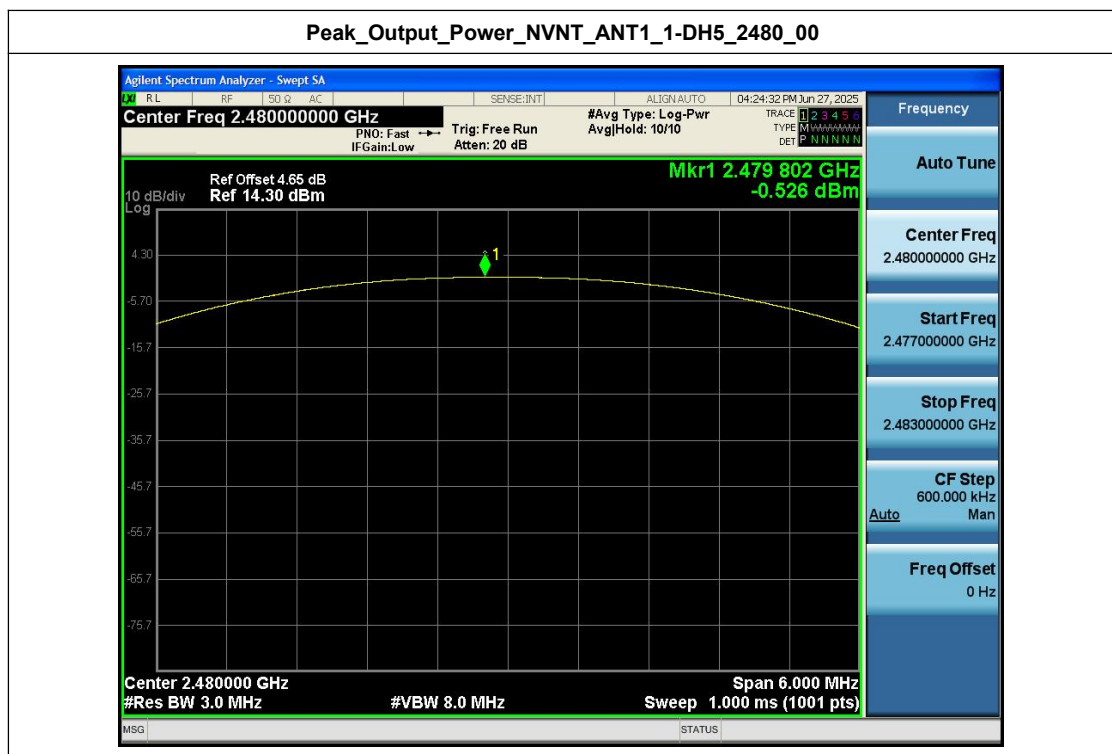

Appendix E: Spurious Emissions

Condition	Antenna	Modulation	TX Mode	Ref_level(dBm)	Spurious MAX.Value(dBm)	Limit	Result
NVNT	ANT1	1-DH5	2402.00	-0.267	-47.071	-20.267	Pass
NVNT	ANT1	1-DH5	2441.00	-0.712	-45.130	-20.712	Pass
NVNT	ANT1	1-DH5	2480.00	-1.122	-45.114	-21.122	Pass


Note: Regarding the spurious emissions from 30MHz to 26.5GHz, the cable lose have been set in the 'Input Correction' of the Spectrum Analyzer during the test.

1_Reference_Level_NVNT_ANT1_1-DH5_2402_00




2_Spurious_Emissions_NVNT_ANT1_1-DH5_2402_00




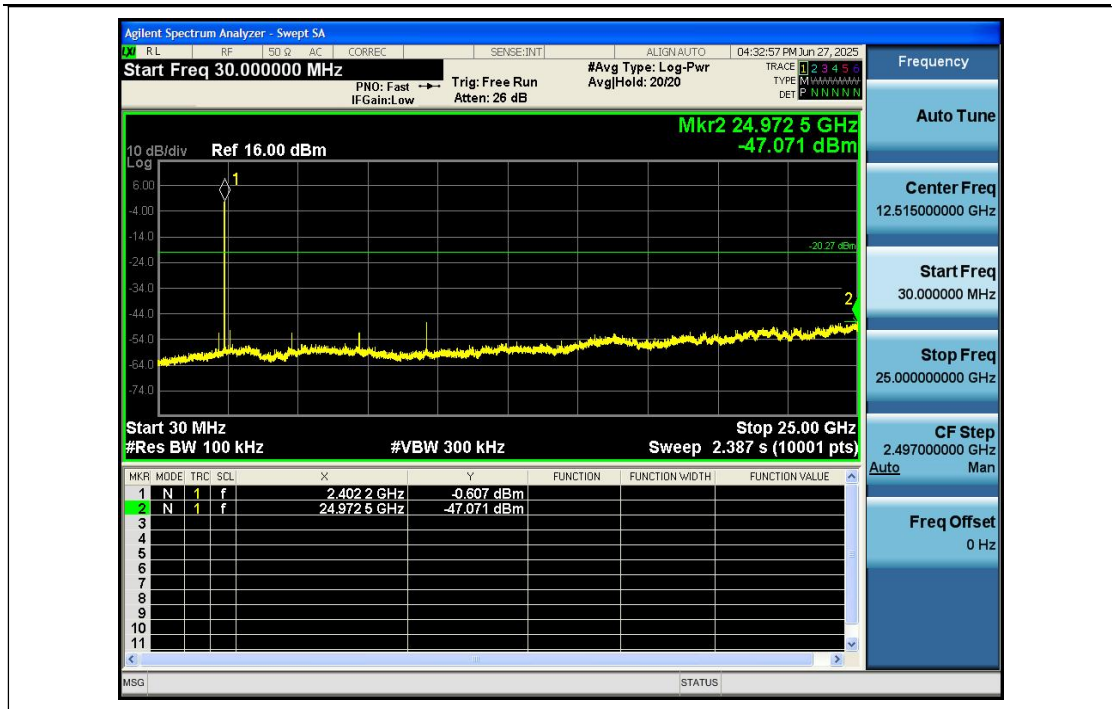


1_Reference_Level_NVNT_ANT1_1-DH5_2441_00

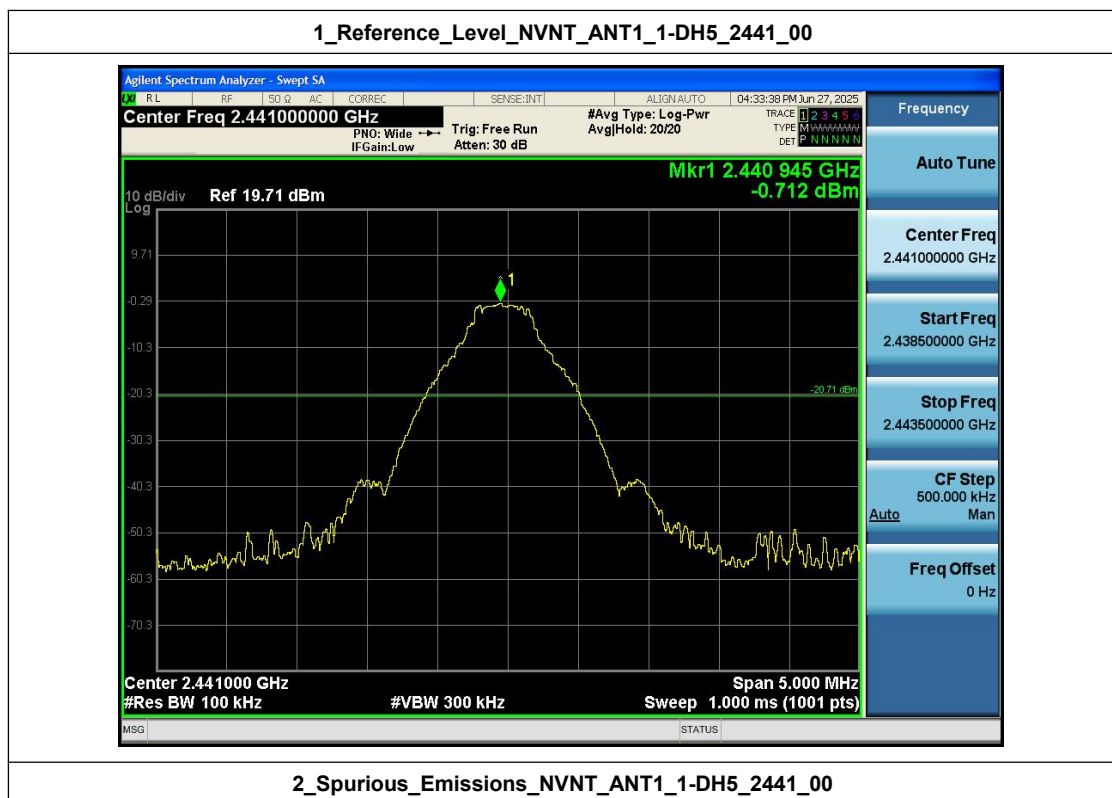


2_Spurious_Emissions_NVNT_ANT1_1-DH5_2441_00

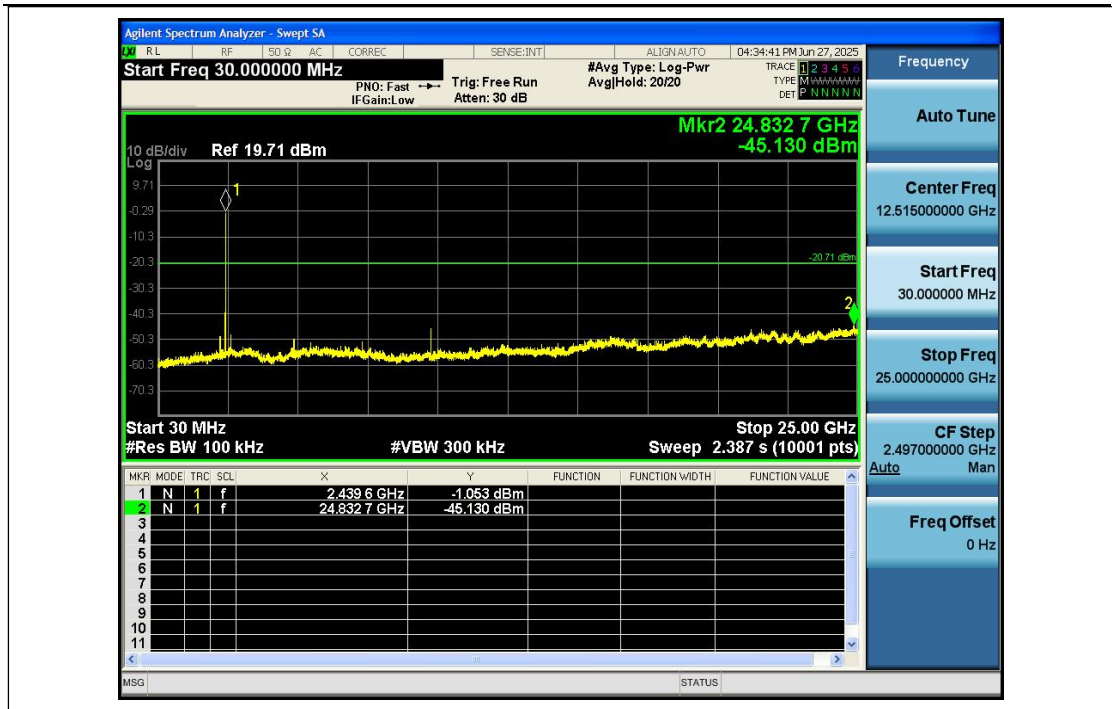

1_Reference_Level_NVNT_ANT1_1-DH5_2480_00

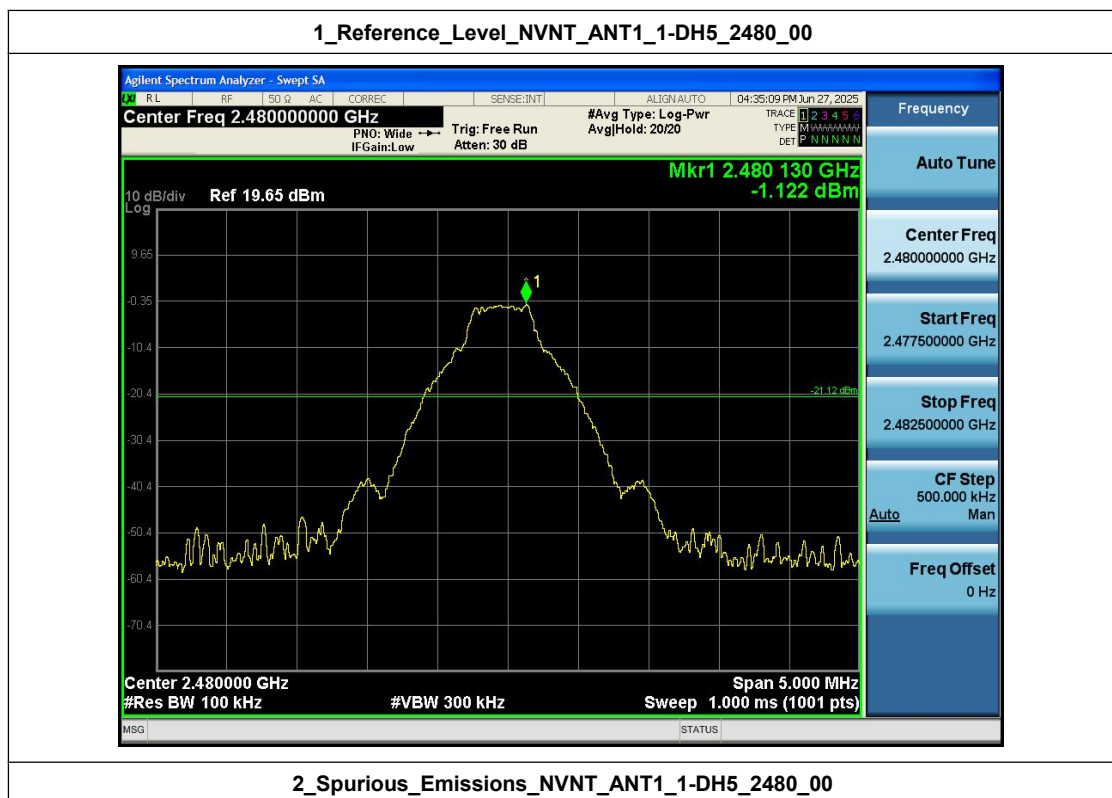

2_Spurious_Emissions_NVNT_ANT1_1-DH5_2480_00

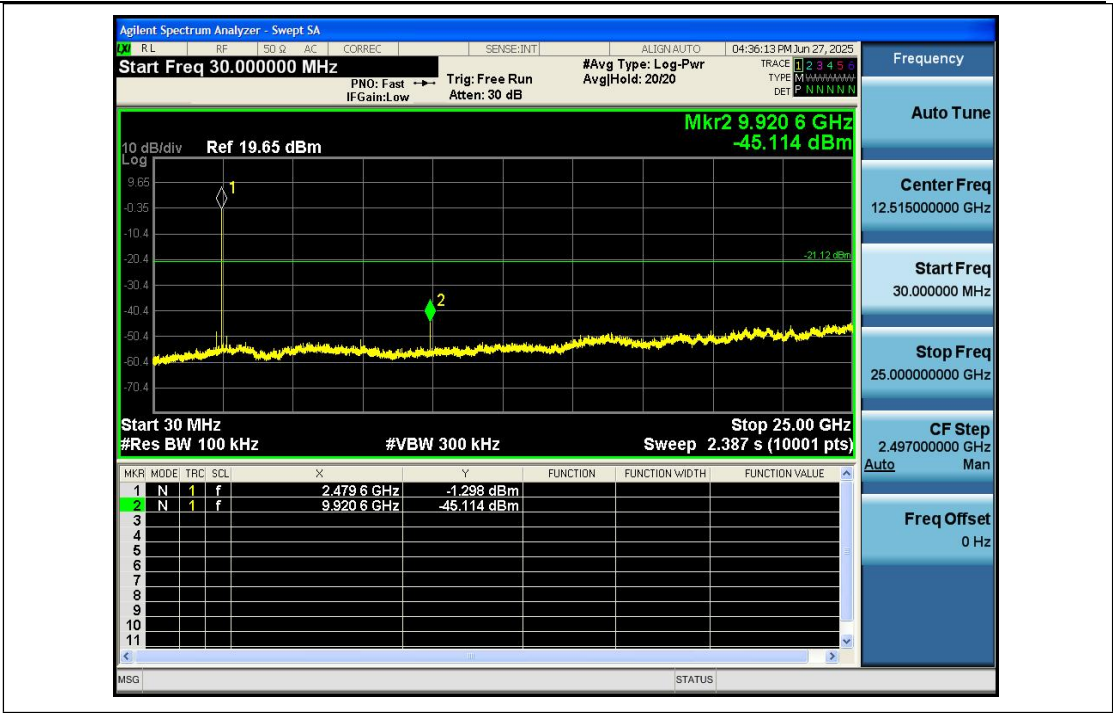

Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel:(86)0755-26066440 Email:service@anbotek.com

Hotline 400-003-0500
www.anbotek.com

Appendix F: Bandedge


Condition	Antenna	Modulation	TX Mode	Ref_level(dBm)	Bandedge MAX.Value	Limit	Result
NVNT	ANT1	1-DH5	2402.00	0.593	-49.331	-19.407	Pass
NVNT	ANT1	1-DH5	Hopping_LCH	0.518	-55.882	-19.482	Pass
NVNT	ANT1	1-DH5	2480.00	-0.753	-58.670	-20.753	Pass
NVNT	ANT1	1-DH5	Hopping_HCH	-0.015	-54.807	-20.015	Pass

Remark:1. Regarding the spurious emissions from 30MHz to 26.5GHz, the cable lose have been set in the 'offset' of the Spectrum Analyzer during the test.


1_Reference_Level_NVNT_ANT1_1-DH5_2402_00




2_Bandedge_NVNT_ANT1_1-DH5_2402_00

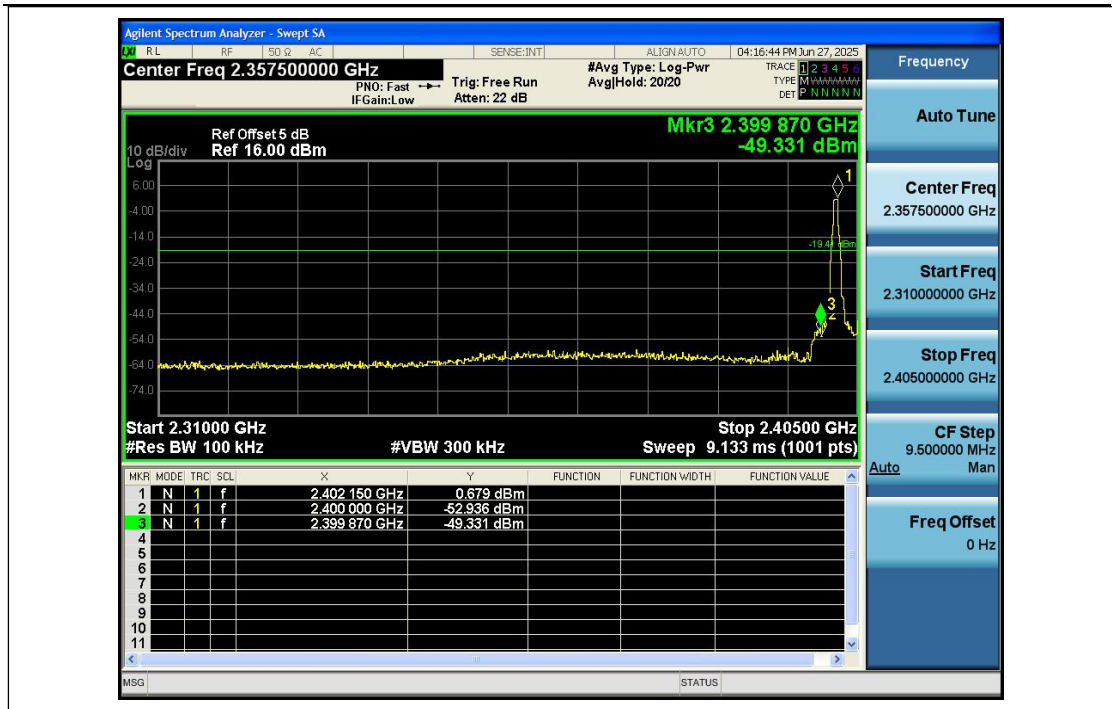


1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping

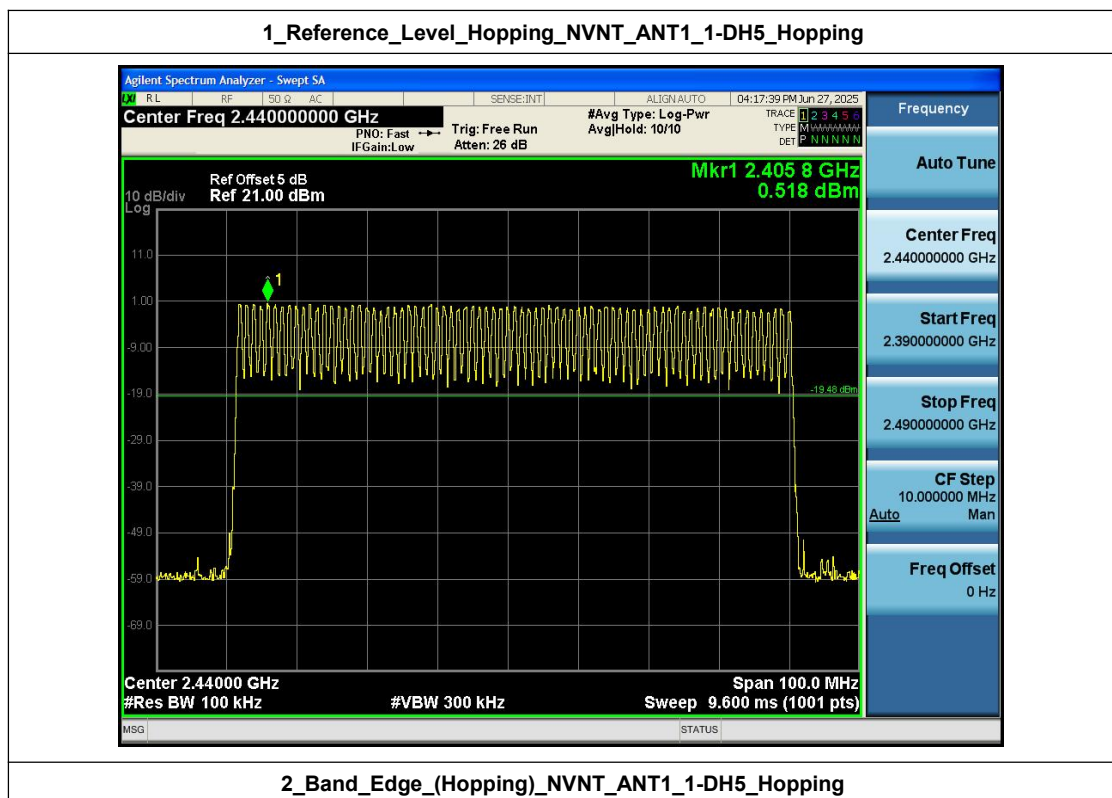

2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

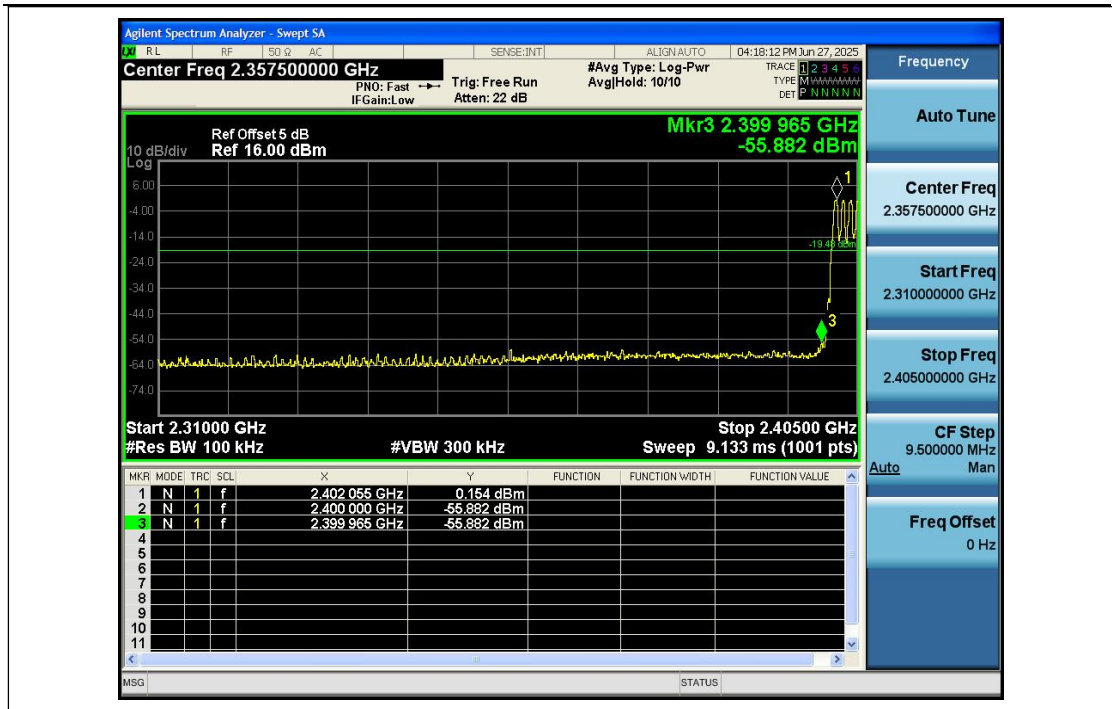


1_Reference_Level_NVNT_ANT1_1-DH5_2480_00

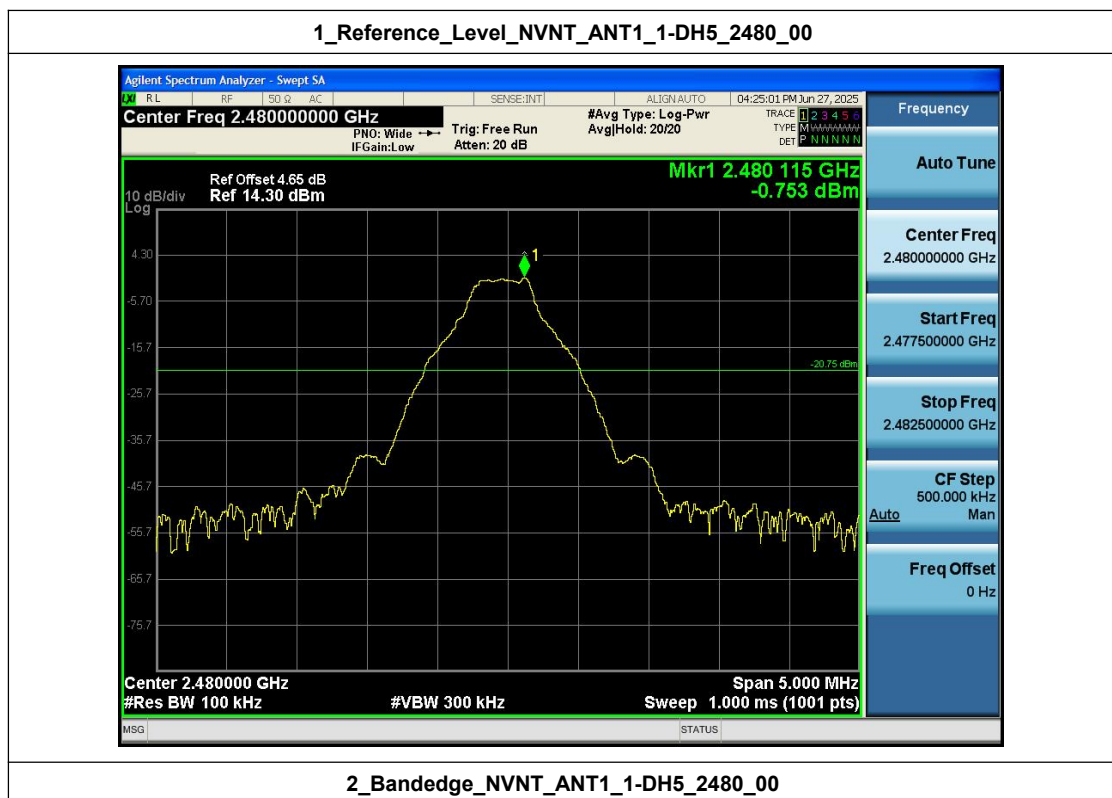


2_Bandedge_NVNT_ANT1_1-DH5_2480_00



1_Reference_Level_Hopping_NVNT_ANT1_1-DH5_Hopping

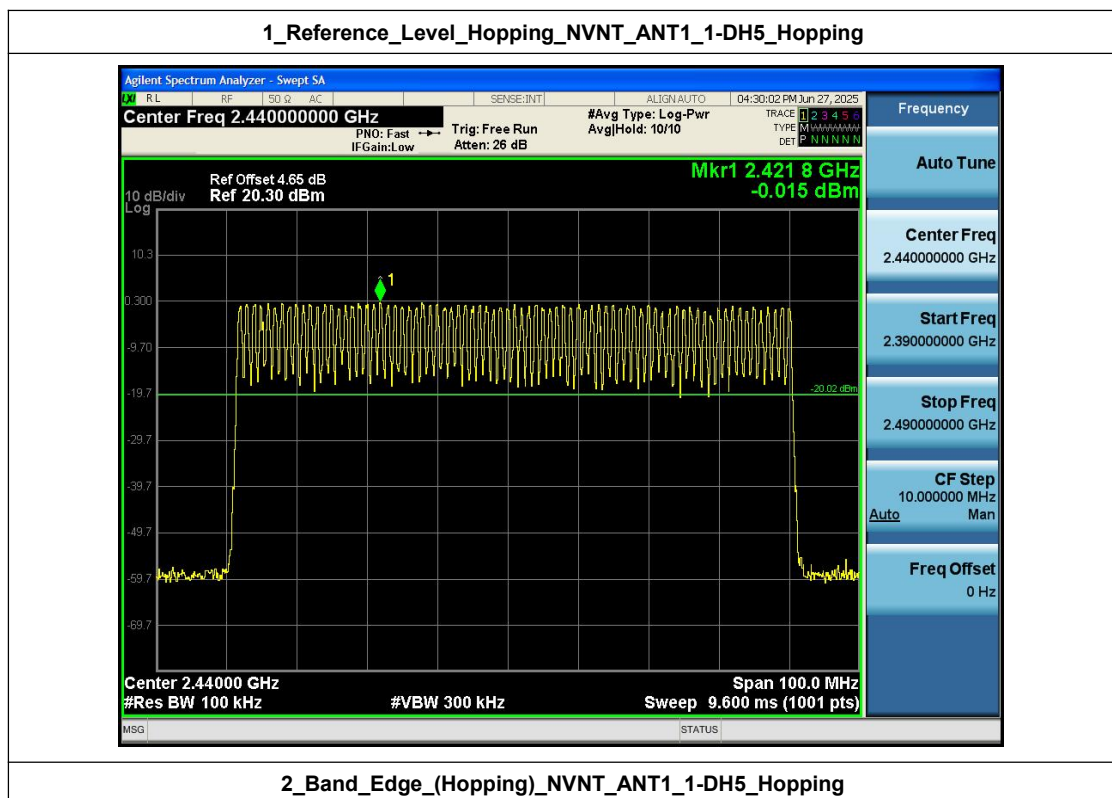

2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH5_Hopping

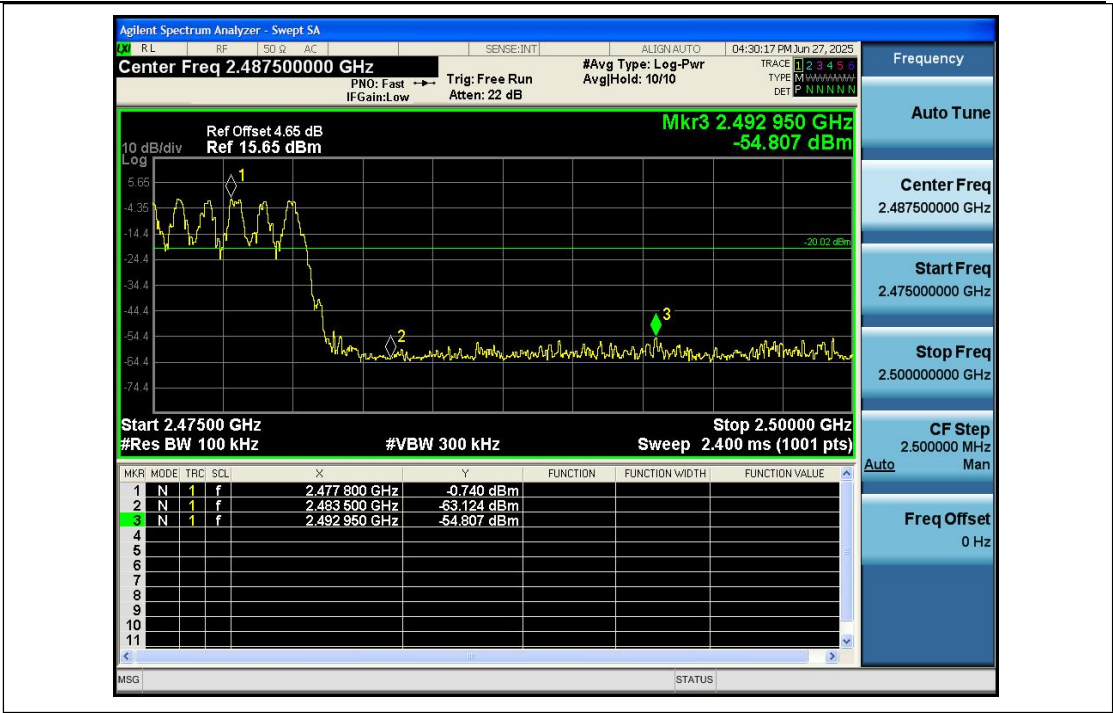


Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel:(86)0755-26066440 Email:service@anbotek.com

Hotline 400-003-0500
www.anbotek.com

Appendix G: Carrier Frequencies Separation (Hopping)

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH5	2441.00	2441.122	2441.947	0.82	0.683	Pass

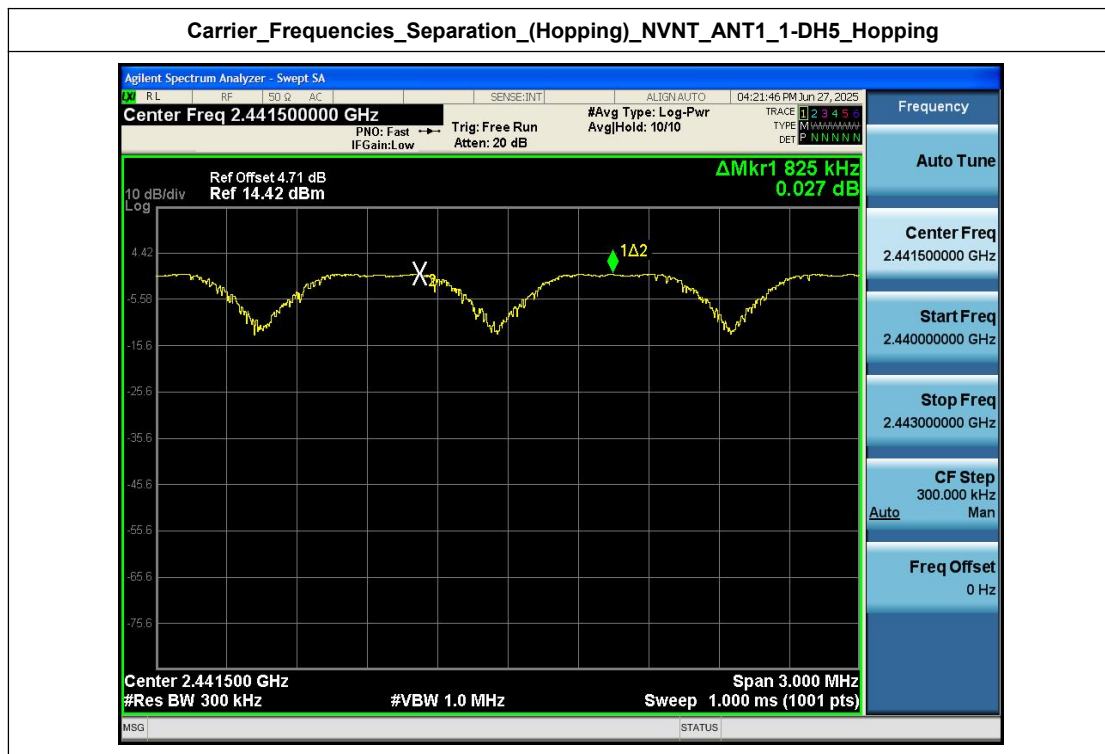

Shenzhen Anbotek Compliance Laboratory Limited

Address: Sogood Industrial Zone Laboratory & 1/F. of Building D, Sogood Science and Technology Park,
Sanwei Community, Hangcheng Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Tel: (86) 0755-26066440 Email: service@anbotek.com

Hotline
400-003-0500
www.anbotek.com

Appendix H: Number of Hopping Channel (Hopping)

Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH5	79	15	Pass


Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_1-DH5_Hopping




Appendix I: Dwell Time (Hopping)

Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH5	2.890	104.00	300.560	0.40	Pass

Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_One_Burst_Time

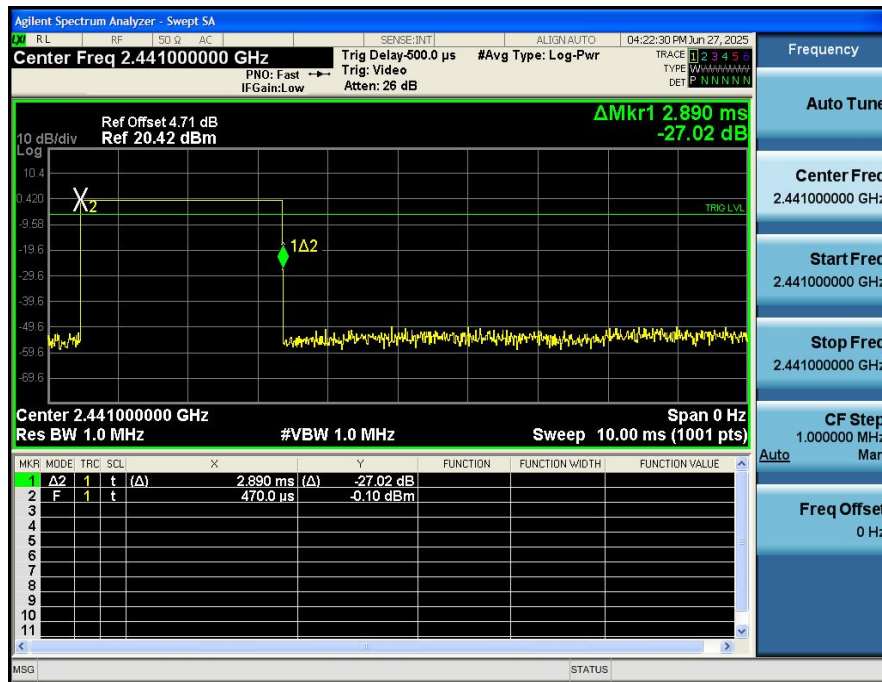

Dwell_Time_(Hopping)_NVNT_ANT1_1-DH5_2441_00_Accumulated

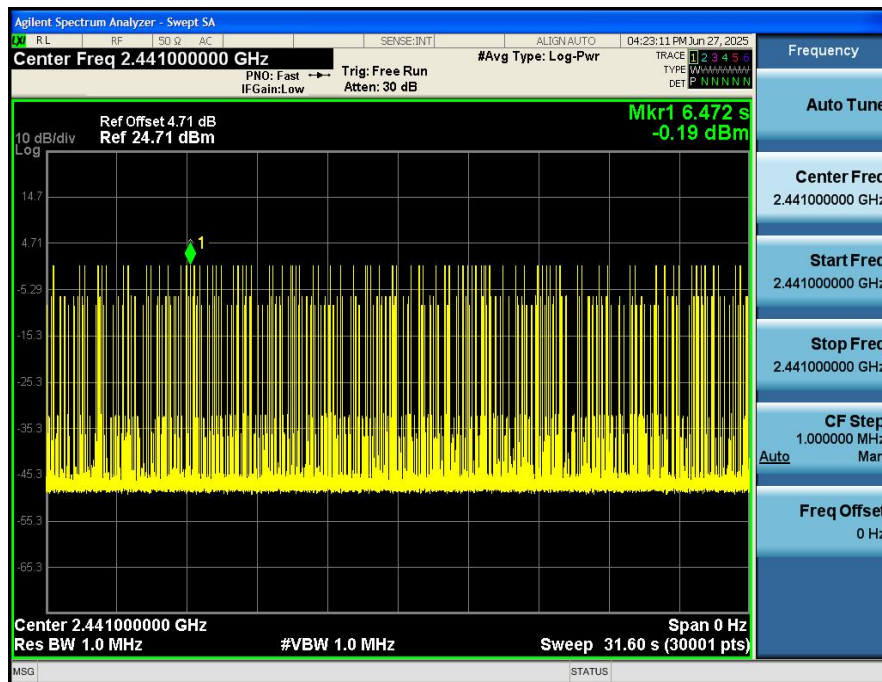

---END---