

TEST REPORT

Report No.: BCTC2502942775-6E

Applicant: MICRO COMPUTER (HK) TECH LIMITED

Product Name: MINI PC

Test Model: MS-A2-9955

Tested Date: 2025-02-26 to 2025-04-16

Issued Date: 2025-04-17

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2A49R-MS-A2

Product Name: MINI PC

Trademark: N/A

Model/Type reference: MS-A2-9955
MS-A2-7945, MS-A2-9955D, MS-A2-P9955, MS-A2-P9955D, MS-A2-7945,
MS-A2-7945D, MS-A2SE-7745, MS-A2SE-7845, MS-A2SE-7945,
MS-A2SE-9855, MS-A2*****("*" = "0-9", "A-Z", "-", "Space")

Prepared For: MICRO COMPUTER (HK) TECH LIMITED

Address: RM 18, 28/F, Shui On Centre, 6-8 Harbour Road, Waterfront, Wan Chai, HK

Manufacturer: MICRO COMPUTER (HK) TECH LIMITED

Address: RM 18, 28/F, Shui On Centre, 6-8 Harbour Road, Waterfront, Wan Chai, HK

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2025-02-26

Sample tested Date: 2025-02-26 to 2025-04-16


Issue Date: 2025-04-17

Report No.: BCTC2502942775-6E

Test Standards: FCC Part15 15.407
ANSI C63.10-2013
KDB 789033 D02 v02r01
KDB 987594 D02 v02r01

Test Results: PASS

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	12
4.6 Test Environment	13
4.7 Table Of Parameters Of Text Software Setting	13
5. Test Facility And Test Instrument Used	14
5.1 Test Facility	14
5.2 Test Instrument Used	14
6. Conducted Emissions	16
6.1 Block Diagram Of Test Setup	16
6.2 Limit	16
6.3 Test Procedure	16
6.4 EUT Operating Conditions	16
6.5 Test Result	17
7. Radiated Emissions	19
7.1 Block Diagram Of Test Setup	19
7.2 Limit	20
7.3 Test Procedure	22
7.4 EUT Operating Conditions	23
7.5 Test Result	23
8. Power Spectral Density Test	61
8.1 Block Diagram Of Test Setup	61
8.2 Limit	61
8.3 Test Procedure	62
8.4 EUT Operating Conditions	62
8.5 Test Result	62
9. 26dB & 99% Emission Bandwidth	63
9.1 Block Diagram Of Test Setup	63
9.2 Limit	63
9.3 Test Procedure	63
9.4 EUT Operating Conditions	64
9.5 Test Result	64
10. Maximum Conducted Output Power and Maximum EIRP	65
10.1 Block Diagram Of Test Setup	65
10.2 Limit	65
10.3 Test Procedure	65
10.4 EUT Operating Conditions	66

10.5	Test Result.....	66
11.	In-Band Emission (Emission Mask).....	67
11.1	Block Diagram Of Test Setup.....	67
11.2	Limit	67
11.3	Test Procedure	67
11.4	EUT Operating Conditions	69
11.5	Test Result.....	69
12.	Spurious RF Conducted Emissions.....	70
12.1	Block Diagram Of Test Setup.....	70
12.2	Limit	70
12.3	Test Procedure	70
12.4	Test Result.....	70
13.	Frequency Stability Measurement	71
13.1	Block Diagram Of Test Setup.....	71
13.2	Limit	71
13.3	Test Procedure	71
13.4	Test Result.....	71
14.	Contention Based Protocol.....	72
14.1	Block Diagram Of Test Setup.....	72
14.2	Limit	72
14.3	Test Procedure	74
14.4	Test Result.....	74
15.	Duty Cycle Of Test Signal	75
15.1	Standard Requirement	75
15.2	Formula.....	75
15.3	Test Procedure	75
15.4	Test Result.....	75
16.	Antenna Requirement	76
16.1	Limit	76
16.2	Test Result.....	76
17.	EUT Photographs.....	77
18.	EUT Test Setup Photographs.....	79

(Note: N/A Means Not Applicable)

1. Version

Report No.	Issue Date	Description	Approved
BCTC2502942775-6E	2025-04-17	Original	Valid

2. Test Summary


The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)	PASS
4	Maximum Conducted Output Power	15.407 (a)	PASS
5	In-band Emission	15.407(b)	PASS
6	Power Spectral Density	15.407 (a)	PASS
7	Spurious Emissions at Antenna Terminals	15.407(b)	PASS
8	Frequency Stability	15.407(g)	PASS
9	Contention Based Protocol	15.407(d)	PASS
10	Antenna Requirement	15.203	PASS
NOTE: N/A (Not Applicable)			

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

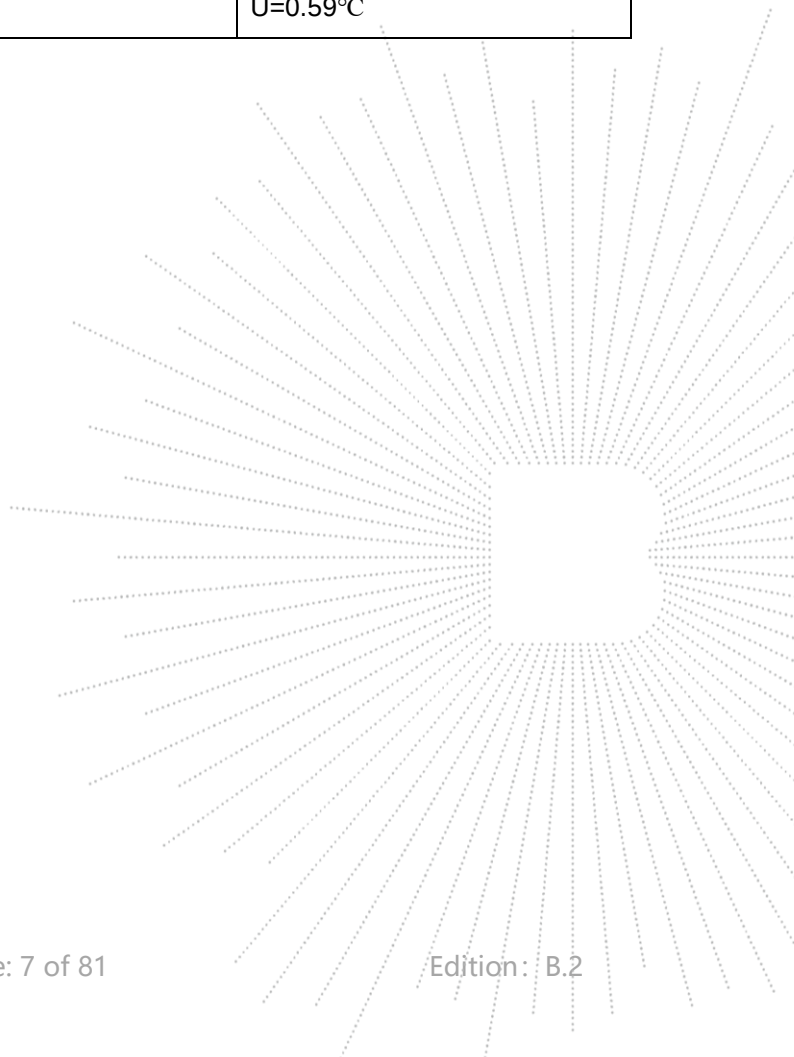

4. Product Information and Test Setup


4.1 Product Information

Model/Type reference:	MS-A2-9955 MS-A2-7945, MS-A2-9955D, MS-A2-P9955, MS-A2-P9955D, MS-A2-7945, MS-A2-7945D, MS-A2SE-7745, MS-A2SE-7845, MS-A2SE-7945, MS-A2SE-9855, MS-A2*****("*" = "0-9", "A-Z", "-", "Space")
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11ax20: 20MHz 802.11ax40: 40MHz 802.11ax80: 80MHz 802.11ax160: 160MHz
Operation Frequency:	U-NII-5: 5955-6415MHz U-NII-6: 6435-6515MHz U-NII-7: 6535-6855MHz U-NII-8: 6875-7115MHz
Type of Modulation:	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Transmit Power:	U-NII-5: ANT A: 15.46 dBm, ANT B: 15.31 dBm, MIMO: 18.4 dBm U-NII-6: ANT A: 15.19 dBm, ANT B: 14.18 dBm, MIMO: 17.45 dBm U-NII-7: ANT A: 14.03 dBm, ANT B: 13.48 dBm, MIMO: 16.4 dBm U-NII-8: ANT A: 14.41 dBm, ANT B: 13.76 dBm, MIMO: 17.05 dBm
Antenna installation:	Internal antenna
Antenna Gain:	Antenna A: 3.55 dBi, Antenna B: 3.58 dBi Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.
Ratings:	AC 120V/60Hz
Adapter Information:	MODEL: SOY-1901263-244-B INPUT: 100-240V~50/60Hz, 3.0A Max. OUTPUT: DC 19.0V 12.63A 239.97W

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission and Radiated Spurious Emission:

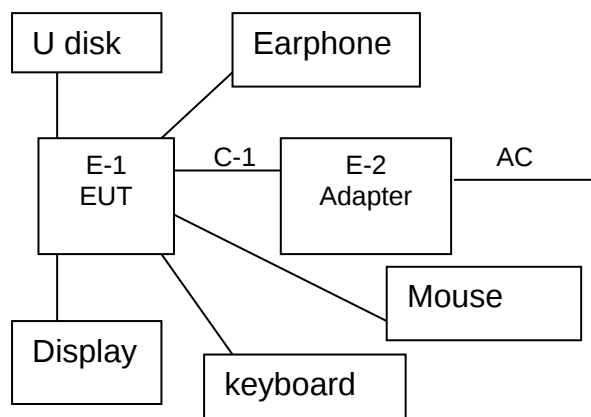

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Display	AOC	U27V5C	---	EUT
E-2	Router	ASUS	GT-AX11000	---	auxiliary
E-3	Keyboard	Logitech	M-U0026	---	auxiliary
E-4	Mouse	Logitech	YU0036	---	auxiliary
E-5	U disk	SanDisk	32G	---	auxiliary
E-6	Earphone	IHIP	SBGE1	---	auxiliary
E-7	Ethernet Swich	HUAWEI	S1730S-S8T4S-A1	---	auxiliary

FCC ID: MSQ-RTAXJF00

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

U-NII-5: 5955-6415MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	25	6075	49	6195	73	6315
5	5975	29	6095	53	6215	77	6335
9	5995	33	6115	57	6235	81	6355
13	6015	37	6135	61	6255	85	6375
17	6035	41	6155	65	6275	89	6395
21	6055	45	6175	69	6295	93	6415

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	27	6085	51	6205	75	6325
11	6005	35	6125	59	6245	83	6365
19	6045	43	6165	67	6285	91	6405

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	39	6145	71	6305
23	6065	55	6225	87	6385

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	47	6185	79	6345

U-NII-6: 6435-6515MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	105	6475	113	6515		
101	6455	109	6495				

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
99	6445	107	6485	115	6525(Straddle)		

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
103	6465	119	6545(Straddle)		

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
111	6505(Straddle)				

U-NII-7: 6535-6855MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	137	6635	157	6735	177	6835
121	6555	141	6655	161	6755	181	6855
125	6575	145	6675	165	6775	185	
129	6595	149	6695	169	6795		
133	6615	153	6715	173	6815		

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
123	6565	147	6685	171	6805		
131	6605	155	6725	179	6845		
139	6645	163	6765	187			

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
135	6625	167	6785		
151	6705	183			

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
143	6665	175	6825(Straddle)		

U-NII-8: 6875-7115MHz

802.11ax20 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
189	6895	201	6955	213	7015	225	7075
193	6915	205	6975	217	7035	229	7095
197	6935	209	6995	221	7055	233	7115

802.11ax40 Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
195	6925	211	7005	227	7085		
203	6965	219	7045				

802.11ax80 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
199	6945	215	7025		

802.11ax160 Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
207	6985				

4.5 Test Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11ax20 CH1/ CH45/ CH 93 802.11ax20 CH97/ CH105/ CH113 802.11ax20 CH117/ CH149/ CH181 802.11ax20 CH189/ CH209/ CH233
Mode 2	802.11ax40 CH3/ CH 43/ CH 91 802.11ax40 CH99/ CH 107/ CH115 (Straddle) 802.11ax40 CH123/ CH 147/ CH 179 802.11ax40 CH195/ CH 203/ CH 227
Mode 3	802.11ax80 CH 7/CH 39/ CH 87 802.11ax80 CH 103/CH 119 (Straddle) 802.11ax80 CH 135/CH 151/ CH 167 802.11ax80 CH 199/CH 215
Mode 4	802.11ax160 CH 15/CH 47/ CH 79 802.11ax160 CH 111 802.11ax160 CH 143 802.11ax160 CH 207
Mode 5	Transmitting (Conducted emission & Radiated emission)

4.6 Test Environment

1. Normal Test Conditions:

Humidity (%):	54
Atmospheric Pressure(kPa):	101
Temperature(°C):	26
Test Voltage(AC):	120V

2. Extreme Test Conditions:

For tests at extreme voltages, measurements shall be made over the extremes of the power source voltage range as declared by the manufacturer.

Test Conditions	LV	NV	HV
Test Voltage (AC)	108	120	132

4.7 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

5955MHz-7115MHz							
Test Software Version	QRCT						
Frequency (MHz)	5955	6175	6415	6435	6475	6515	6535
802.11ax20 Mode	8	8	7	7	7	7	7
Frequency (MHz)	6695	6855	6875	6895	6695	7115	
802.11ax20 Mode	8	7	7	7	8	8	
Frequency (MHz)	5965	6165	6405	6445	6485	6525	6565
802.11ax40 Mode	8	8	8	8	8	8	8
Frequency (MHz)	6685	6845	6885	6925	6965	7085	
802.11ax40 Mode	8	7	8	8	8	8	
Frequency (MHz)	5985	6145	6385	6465	6545	6625	6705
802.11ax80 Mode	10	10	10	10	10	10	10
Frequency (MHz)	6785	6865	6945	7025			
802.11ax80 Mode	10	10	10	10			
Frequency (MHz)	6025	6185	6345	6505	6665	6825	6985
802.11ax160 Mode	12	12	12	12	12	10	12

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd.
Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdi strict, Bao'an District, Shenzhen, Guangdong, China.
The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD9561-F	01323	May 16, 2024	May 15, 2025

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power meter	Keysight	E4419	\	May 16, 2024	May 15, 2025
Power Sensor (AV)	Keysight	E9300A	\	May 16, 2024	May 15, 2025
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 16, 2024	May 15, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\
Router	ASUS	GT-AXE1100 0	/	/	/
Signal Generator	Keysight	N5182B	MY56200519	May 16, 2024	May 15, 2025
Signal Generator	Keysight	83711B	US37100131	May 16, 2024	May 15, 2025


FCC ID: MSQ-RTAXJF00

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18 G-45dB	SK2021040901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

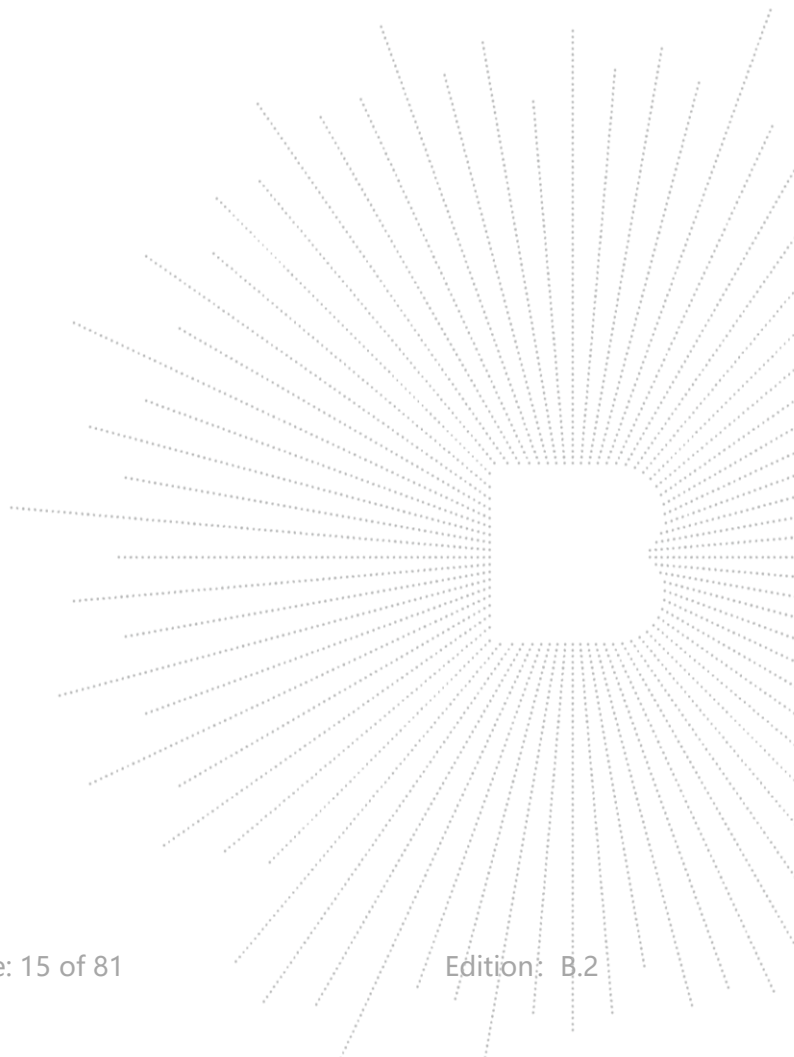

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

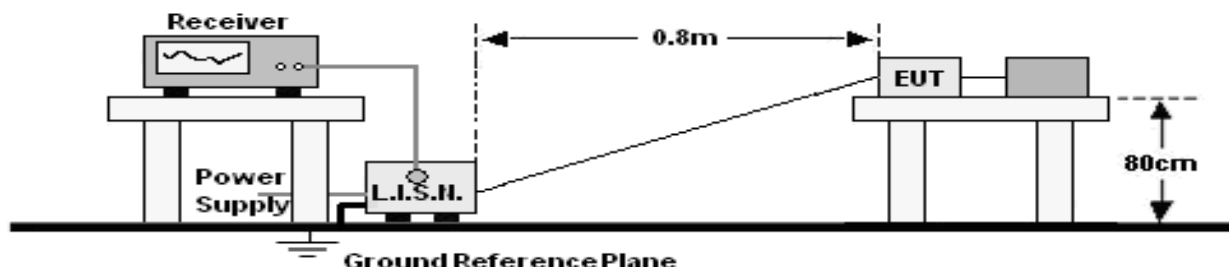

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 5	Test Voltage :	AC120V/60Hz

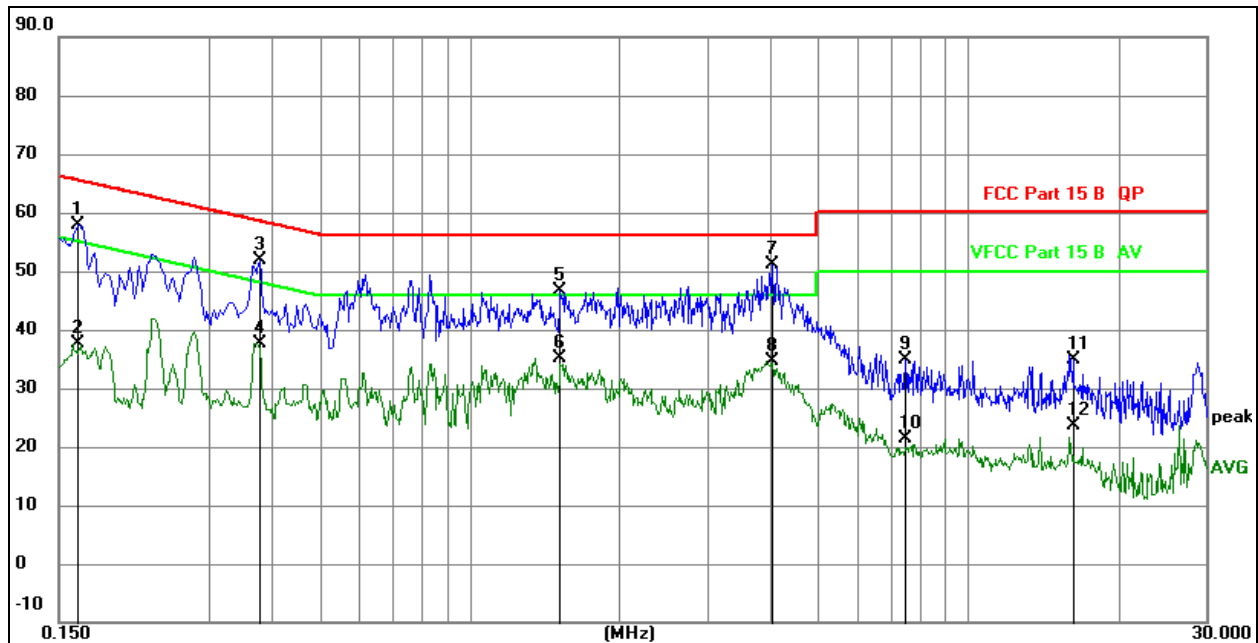


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1632	37.76	20.07	57.83	65.30	-7.47	QP
2		0.1632	17.44	20.07	37.51	55.30	-17.79	AVG
3		0.3790	31.74	20.08	51.82	58.30	-6.48	QP
4		0.3790	17.60	20.08	37.68	48.30	-10.62	AVG
5		1.5192	26.54	20.10	46.64	56.00	-9.36	QP
6		1.5192	15.01	20.10	35.11	46.00	-10.89	AVG
7	*	4.0486	30.98	20.14	51.12	56.00	-4.88	QP
8		4.0486	14.42	20.14	34.56	46.00	-11.44	AVG
9		7.4859	14.75	20.16	34.91	60.00	-25.09	QP
10		7.4859	1.27	20.16	21.43	50.00	-28.57	AVG
11		16.2256	14.57	20.31	34.88	60.00	-25.12	QP
12		16.2256	3.42	20.31	23.73	50.00	-26.27	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 5	Test Voltage :	AC120V/60Hz

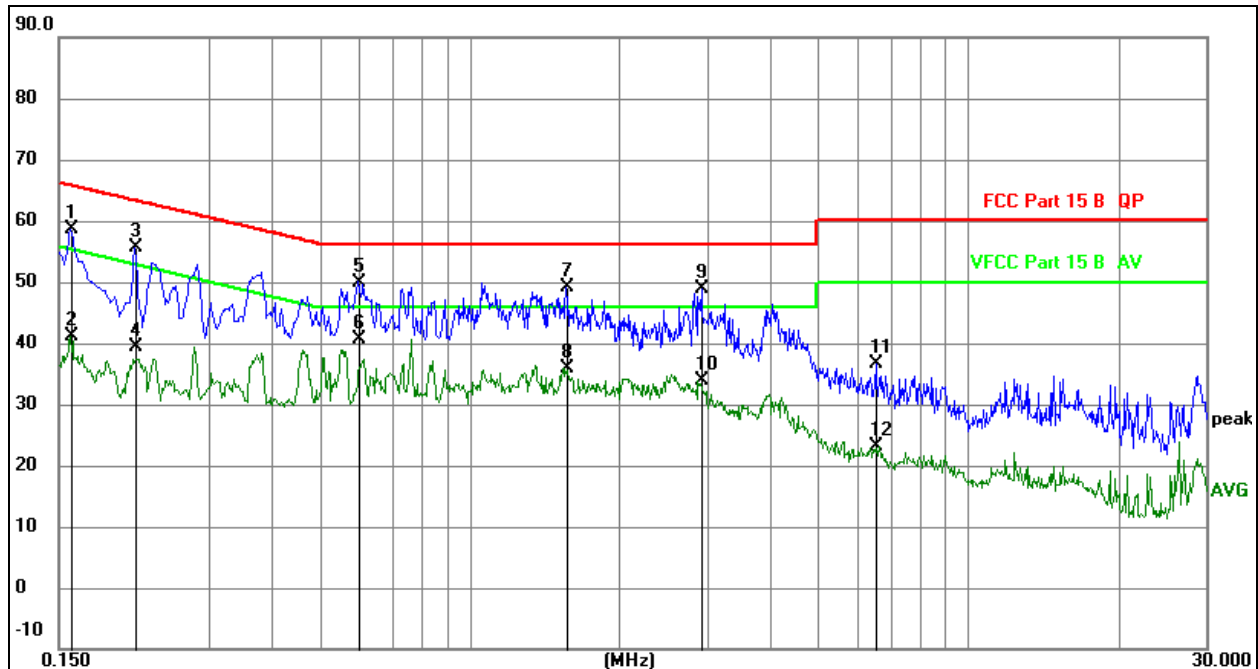

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1590	38.63	20.07	58.70	65.52	-6.82	QP
2		0.1590	20.99	20.07	41.06	55.52	-14.46	AVG
3		0.2130	35.67	20.07	55.74	63.09	-7.35	QP
4		0.2130	19.36	20.07	39.43	53.09	-13.66	AVG
5		0.6000	29.92	20.08	50.00	56.00	-6.00	QP
6	*	0.6000	20.50	20.08	40.58	46.00	-5.42	AVG
7		1.5629	28.96	20.10	49.06	56.00	-6.94	QP
8		1.5629	15.90	20.10	36.00	46.00	-10.00	AVG
9		2.9175	28.68	20.12	48.80	56.00	-7.20	QP
10		2.9175	13.66	20.12	33.78	46.00	-12.22	AVG
11		6.5445	16.50	20.16	36.66	60.00	-23.34	QP
12		6.5445	3.07	20.16	23.23	50.00	-26.77	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

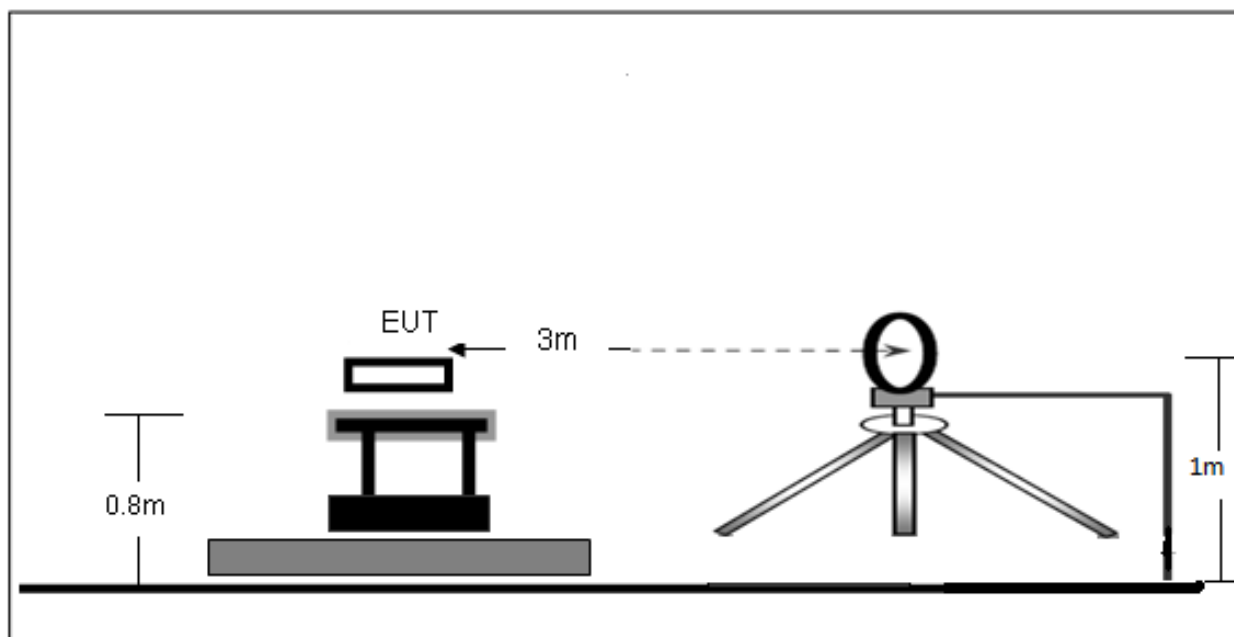

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

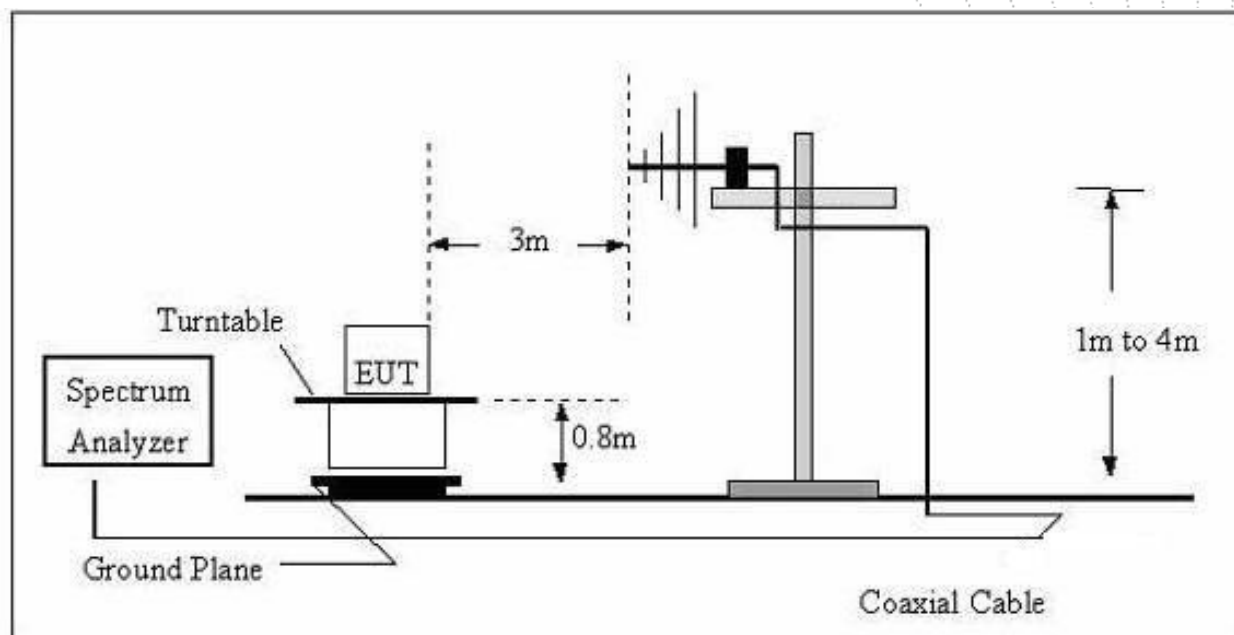

(C) Radiated Emission Test-Up Frequency Above 1GHz

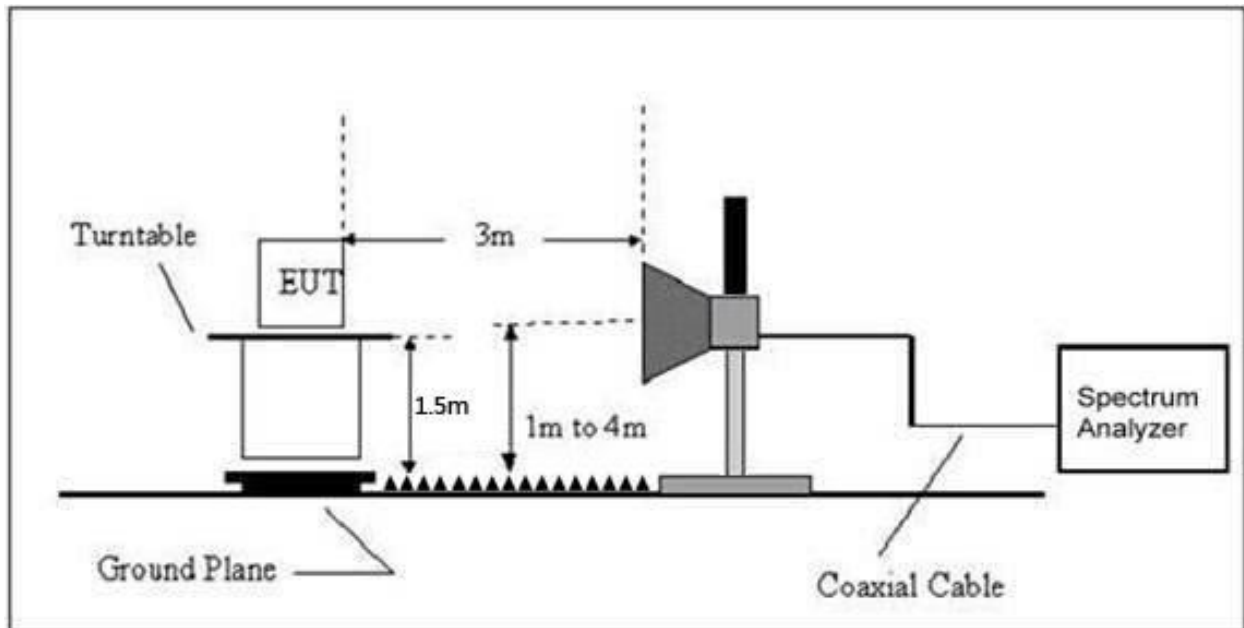

7.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(kHz)$	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(kHz)$	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of –27 dBm/MHz.

According 987594 D02 U-NII 6GHz EMC Measurement section G:
Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC 120V/60Hz
Test Mode:	Mode 5	Polarization:	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 5	Test Voltage:	AC120V/60Hz

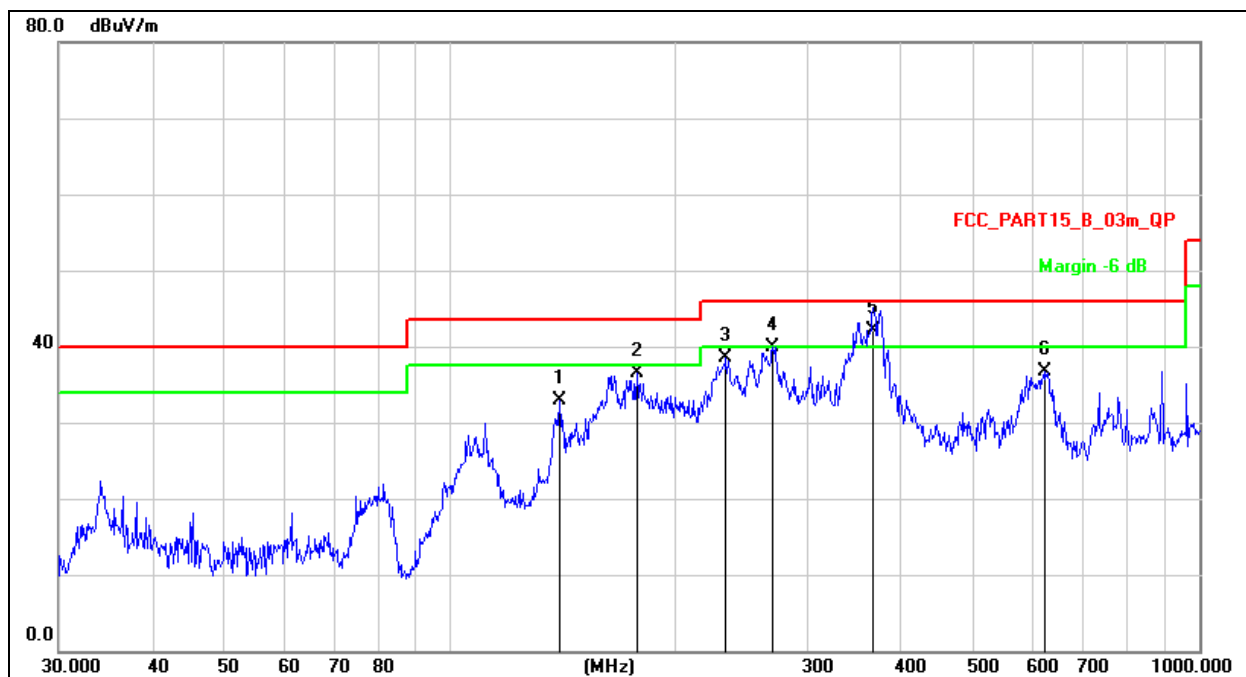


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		139.8508	51.64	-18.72	32.92	43.50	-10.58	QP
2		177.5092	53.90	-17.39	36.51	43.50	-6.99	QP
3		233.3487	53.29	-14.77	38.52	46.00	-7.48	QP
4		269.4284	53.83	-13.88	39.95	46.00	-6.05	QP
5	*	366.8231	53.35	-11.26	42.09	46.00	-3.91	QP
6		620.7096	43.32	-6.66	36.66	46.00	-9.34	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 5	Test Voltage:	AC120V/60Hz

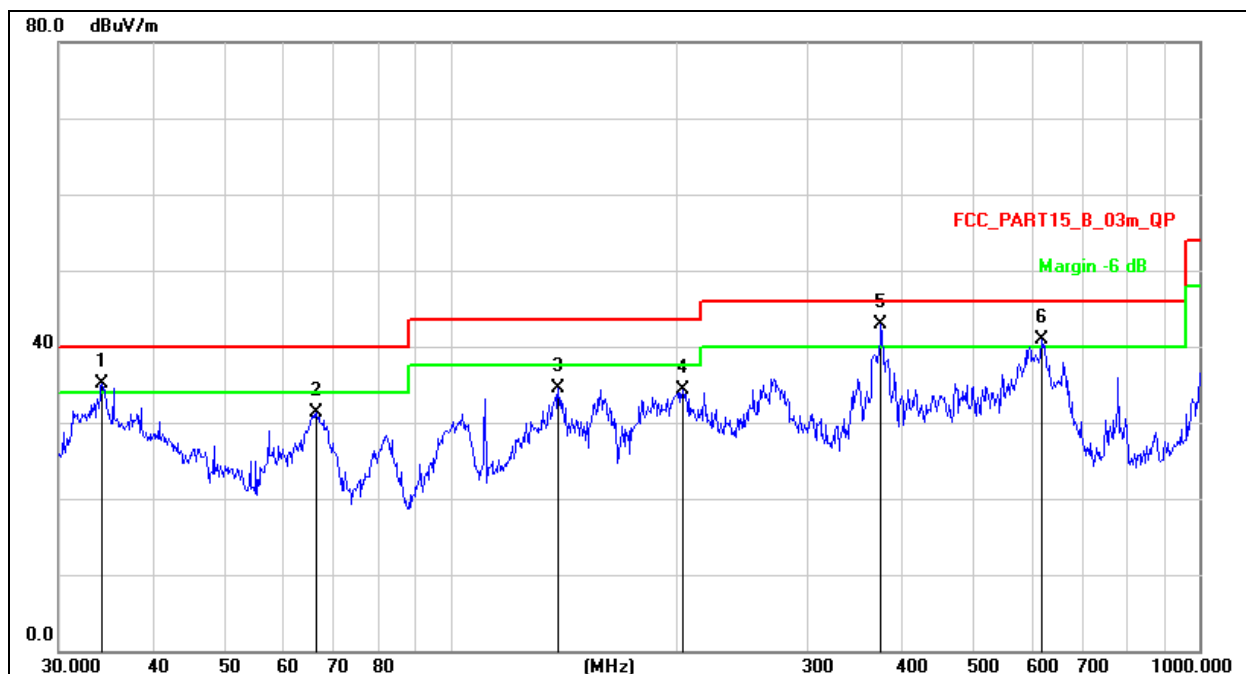

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over=Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	34.2760	50.93	-15.82	35.11	40.00	-4.89	QP
2		66.2662	48.37	-16.97	31.40	40.00	-8.60	QP
3		139.3613	53.13	-18.69	34.44	43.50	-9.06	QP
4		204.2377	49.81	-15.60	34.21	43.50	-9.29	QP
5	*	375.9385	54.08	-11.15	42.93	46.00	-3.07	QP
6	!	616.3718	47.55	-6.74	40.81	46.00	-5.19	QP

Between 1GHz – 40GHz

U-NII-5: 5955-6415MHz

Test Mode :	TX(U-NII-5: 5955-6415MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5955 MHz)-Above 1G							
Vertical	4683.507	74.96	-20.23	54.73	74	-19.27	PK
Vertical	4683.507	59.96	-20.23	39.73	54	-14.27	AV
Vertical	11910.077	60.09	-8.63	51.46	68.2	-16.74	PK
Vertical	11910.077	49.09	-8.63	40.46	54	-13.54	AV
Vertical	17865.127	55.20	-1.57	53.63	68.2	-14.57	PK
Vertical	17865.127	44.12	-1.57	42.55	54	-11.45	AV
Horizontal	4679.193	70.41	-20.73	49.68	74	-24.32	PK
Horizontal	4679.193	59.04	-20.73	38.31	54	-15.69	AV
Horizontal	11910.187	62.10	-8.63	53.47	68.2	-14.73	PK
Horizontal	11910.187	49.19	-8.63	40.56	54	-13.44	AV
Horizontal	17865.076	58.70	-1.57	57.13	68.2	-11.07	PK
Horizontal	17865.076	44.50	-1.57	42.93	54	-11.07	AV
middle Channel (6175 MHz)-Above 1G							
Vertical	4592.169	70.24	-20.42	49.82	74	-24.18	PK
Vertical	4592.169	59.75	-20.42	39.33	54	-14.67	AV
Vertical	12350.167	64.14	-9.16	54.98	68.2	-13.22	PK
Vertical	12350.167	49.87	-9.16	40.71	54	-13.29	AV
Vertical	18525.113	47.03	6.65	53.68	68.2	-14.52	PK
Vertical	18525.113	34.43	6.65	41.08	54	-12.92	AV
Horizontal	4592.015	71.81	-20.42	51.40	74	-22.60	PK
Horizontal	4592.015	59.34	-20.42	38.93	54	-15.07	AV
Horizontal	12350.081	63.32	-9.16	54.16	68.2	-14.04	PK
Horizontal	12350.081	49.69	-9.16	40.53	54	-13.47	AV
Horizontal	18525.167	49.23	6.65	55.88	68.2	-12.32	PK
Horizontal	18525.167	34.09	6.65	40.74	54	-13.26	AV
High Channel (6415 MHz)-Above 1G							
Vertical	6039.045	73.30	-18.93	54.37	68.2	-13.83	PK
Vertical	6039.045	59.19	-18.93	40.26	54	-13.74	AV
Vertical	12830.029	64.86	-8.92	55.94	74	-18.06	PK
Vertical	12830.029	49.89	-8.92	40.97	54	-13.03	AV
Vertical	19245.035	49.66	7.78	57.44	68.2	-10.76	PK
Vertical	19245.035	34.72	7.78	42.50	54	-11.50	AV
Horizontal	6039.088	71.42	-18.93	52.49	68.2	-15.71	PK
Horizontal	6039.088	59.20	-18.93	40.27	54	-13.73	AV
Horizontal	12830.075	60.92	-8.92	52.00	74	-22.00	PK
Horizontal	12830.075	49.18	-8.92	40.26	54	-13.74	AV
Horizontal	19245.199	47.25	7.78	55.03	68.2	-13.17	PK
Horizontal	19245.199	34.68	7.78	42.46	54	-11.54	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(U-NII-5: 5955-6415MHz) - 802.11ax40
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5965 MHz)-Above 1G							
Vertical	4679.094	73.70	-20.24	53.46	74	-20.54	PK
Vertical	4679.094	59.11	-20.24	38.87	54	-15.13	AV
Vertical	11930.017	64.65	-8.51	56.14	74	-17.86	PK
Vertical	11930.017	49.04	-8.51	40.53	54	-13.47	AV
Vertical	17895.072	55.84	-1.43	54.41	68.2	-13.79	PK
Vertical	17895.072	44.04	-1.43	42.61	54	-11.39	AV
Horizontal	4679.005	72.20	-20.24	51.96	74	-22.04	PK
Horizontal	4679.005	59.81	-20.24	39.57	54	-14.43	AV
Horizontal	11930.076	61.04	-8.51	52.53	74	-21.47	PK
Horizontal	11930.076	49.41	-8.51	40.90	54	-13.10	AV
Horizontal	17895.119	59.62	-1.43	58.19	68.2	-10.01	PK
Horizontal	17895.119	44.59	-1.43	43.16	54	-10.84	AV
middle Channel (6165 MHz)-Above 1G							
Vertical	6039.040	71.36	-18.93	52.43	68.2	-15.77	PK
Vertical	6039.040	59.84	-18.93	40.91	54	-13.09	AV
Vertical	12330.030	63.82	-9.16	54.66	74	-19.34	PK
Vertical	12330.030	49.75	-9.16	40.59	54	-13.41	AV
Vertical	18495.080	45.90	6.65	52.55	68.2	-15.65	PK
Vertical	18495.080	34.25	6.65	40.90	54	-13.10	AV
Horizontal	6039.044	73.05	-18.93	54.12	68.2	-14.08	PK
Horizontal	6039.044	59.95	-18.93	41.01	54	-12.99	AV
Horizontal	12330.065	62.44	-9.16	53.28	74	-20.72	PK
Horizontal	12330.065	49.30	-9.16	40.14	54	-13.86	AV
Horizontal	18495.098	45.06	6.65	51.71	68.2	-16.49	PK
Horizontal	18495.098	34.16	6.65	40.81	54	-13.19	AV
High Channel (6405 MHz)-Above 1G							
Vertical	6039.031	71.76	-18.93	52.82	68.2	-15.38	PK
Vertical	6039.031	59.92	-18.93	40.99	54	-13.01	AV
Vertical	12810.049	63.54	-8.92	54.62	74	-19.38	PK
Vertical	12810.049	49.63	-8.92	40.71	54	-13.29	AV
Vertical	19215.183	48.53	7.78	56.31	68.2	-11.89	PK
Vertical	19215.183	34.44	7.78	42.22	54	-11.78	AV
Horizontal	6039.110	71.35	-18.93	52.42	68.2	-15.78	PK
Horizontal	6039.110	59.81	-18.93	40.87	54	-13.13	AV
Horizontal	12810.154	60.52	-8.92	51.60	74	-22.40	PK
Horizontal	12810.154	49.02	-8.92	40.10	54	-13.90	AV
Horizontal	19215.109	45.02	7.78	52.80	68.2	-15.40	PK
Horizontal	19215.109	34.56	7.78	42.34	54	-11.66	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(U-NII-5: 5955-6415MHz)- 802.11ax80
-------------	---------------------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5985 MHz)-Above 1G							
Vertical	4679.006	71.14	-20.24	50.89	74	-23.11	PK
Vertical	4679.006	59.65	-20.24	39.41	54	-14.59	AV
Vertical	11970.045	60.03	-8.51	51.52	74	-22.48	PK
Vertical	11970.045	49.71	-8.51	41.20	54	-12.80	AV
Vertical	17955.096	58.71	-1.41	57.30	68.2	-10.90	PK
Vertical	17955.096	44.43	-1.41	43.02	54	-10.98	AV
Horizontal	4679.082	70.27	-20.24	50.03	74	-23.97	PK
Horizontal	4679.082	59.11	-20.24	38.87	54	-15.13	AV
Horizontal	11970.169	62.83	-8.51	54.32	74	-19.68	PK
Horizontal	11970.169	49.22	-8.51	40.71	54	-13.29	AV
Horizontal	17955.083	57.75	-1.41	56.34	68.2	-11.86	PK
Horizontal	17955.083	44.67	-1.41	43.26	54	-10.74	AV
Middle Channel (6145 MHz)-Above 1G							
Vertical	6039.151	74.70	-18.93	55.77	68.2	-12.43	PK
Vertical	6039.151	59.19	-18.93	40.26	54	-13.74	AV
Vertical	12290.172	60.38	-9.21	51.17	74	-22.83	PK
Vertical	12290.172	49.62	-9.21	40.41	54	-13.59	AV
Vertical	18435.176	48.75	6.57	55.32	68.2	-12.88	PK
Vertical	18435.176	34.63	6.57	41.20	54	-12.80	AV
Horizontal	6039.174	74.30	-18.93	55.37	68.2	-12.83	PK
Horizontal	6039.174	59.90	-18.93	40.97	54	-13.03	AV
Horizontal	12290.003	62.27	-9.21	53.06	74	-20.94	PK
Horizontal	12290.003	49.45	-9.21	40.24	54	-13.76	AV
Horizontal	18435.192	45.88	6.57	52.45	68.2	-15.75	PK
Horizontal	18435.192	34.94	6.57	41.51	54	-12.49	AV
High Channel (6385 MHz)-Above 1G							
Vertical	6039.091	70.58	-18.93	51.65	68.2	-16.55	PK
Vertical	6039.091	59.51	-18.93	40.58	54	-13.42	AV
Vertical	12770.099	63.57	-8.97	54.60	74	-19.40	PK
Vertical	12770.099	49.18	-8.97	40.21	54	-13.79	AV
Vertical	19155.046	45.52	7.83	53.35	68.2	-14.85	PK
Vertical	19155.046	34.77	7.83	42.60	54	-11.40	AV
Horizontal	6039.132	70.88	-18.93	51.95	68.2	-16.25	PK
Horizontal	6039.132	59.59	-18.93	40.65	54	-13.35	AV
Horizontal	12770.127	62.50	-8.97	53.53	74	-20.47	PK
Horizontal	12770.127	49.73	-8.97	40.76	54	-13.24	AV
Horizontal	19155.074	46.45	7.83	54.28	68.2	-13.92	PK
Horizontal	19155.074	34.65	7.83	42.48	54	-11.52	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(U-NII-5: 5955-6415MHz) - 802.11ax160
------------	---

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6025 MHz)-Above 1G							
Vertical	4679.083	74.28	-20.24	54.04	74	-19.96	PK
Vertical	4679.083	59.53	-20.24	39.28	54	-14.72	AV
Vertical	12050.110	60.25	-8.45	51.80	74	-22.20	PK
Vertical	12050.110	49.58	-8.45	41.13	54	-12.87	AV
Vertical	18075.090	56.13	-1.31	54.82	68.2	-13.38	PK
Vertical	18075.090	44.49	-1.31	43.18	54	-10.82	AV
Horizontal	4679.172	73.51	-20.24	53.27	74	-20.73	PK
Horizontal	4679.172	59.10	-20.24	38.86	54	-15.14	AV
Horizontal	12050.020	62.24	-8.45	53.79	74	-20.21	PK
Horizontal	12050.020	49.49	-8.45	41.04	54	-12.96	AV
Horizontal	18075.001	55.73	-1.31	54.42	68.2	-13.78	PK
Horizontal	18075.001	44.59	-1.31	43.28	54	-10.72	AV
middle Channel (6185 MHz)-Above 1G							
Vertical	6039.100	73.47	-18.93	54.53	68.2	-13.67	PK
Vertical	6039.100	59.61	-18.93	40.68	54	-13.32	AV
Vertical	12370.088	61.81	-9.03	52.78	74	-21.22	PK
Vertical	12370.088	49.60	-9.03	40.57	54	-13.43	AV
Vertical	18555.025	47.08	6.68	53.76	68.2	-14.44	PK
Vertical	18555.025	34.79	6.68	41.47	54	-12.53	AV
Horizontal	6039.178	70.11	-18.93	51.18	68.2	-17.02	PK
Horizontal	6039.178	59.63	-18.93	40.70	54	-13.30	AV
Horizontal	12370.049	62.26	-9.03	53.23	74	-20.77	PK
Horizontal	12370.049	49.26	-9.03	40.23	54	-13.77	AV
Horizontal	18555.175	49.59	6.68	56.27	68.2	-11.93	PK
Horizontal	18555.175	34.78	6.68	41.46	54	-12.54	AV
High Channel (6345 MHz)-Above 1G							
Vertical	6039.145	73.55	-18.93	54.61	68.2	-13.59	PK
Vertical	6039.145	59.35	-18.93	40.42	54	-13.58	AV
Vertical	12690.046	61.97	-8.97	53.00	74	-21.00	PK
Vertical	12690.046	49.90	-8.97	40.93	54	-13.07	AV
Vertical	19035.158	48.12	7.68	55.80	68.2	-12.40	PK
Vertical	19035.158	34.50	7.68	42.18	54	-11.82	AV
Horizontal	6039.199	73.61	-18.93	54.68	68.2	-13.52	PK
Horizontal	6039.199	59.07	-18.93	40.14	54	-13.86	AV
Horizontal	12690.165	60.57	-8.97	51.60	74	-22.40	PK
Horizontal	12690.165	49.24	-8.97	40.27	54	-13.73	AV
Horizontal	19035.171	45.02	7.68	52.70	68.2	-15.50	PK
Horizontal	19035.171	34.24	7.68	41.92	54	-12.08	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

U-NII-6: 6435-6515MHz

Test Mode :	TX(U-NII-6: 6435-6515MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6435 MHz)-Above 1G							
Vertical	4679.297	71.03	-20.24	50.79	74	-23.21	PK
Vertical	4679.297	59.19	-20.24	38.95	54	-15.05	AV
Vertical	12870.158	60.54	-7.95	52.59	68.2	-15.61	PK
Vertical	12870.158	49.40	-7.95	41.45	54	-12.55	AV
Vertical	19305.064	47.23	7.76	54.99	68.2	-13.21	PK
Vertical	19305.064	34.10	7.76	41.86	54	-12.14	AV
Horizontal	4679.082	73.40	-20.73	52.67	74	-21.33	PK
Horizontal	4679.082	59.95	-20.73	39.22	54	-14.78	AV
Horizontal	12870.138	61.14	-7.95	53.19	68.2	-15.01	PK
Horizontal	12870.138	49.48	-7.95	41.53	54	-12.47	AV
Horizontal	19305.094	46.16	7.76	53.92	68.2	-14.28	PK
Horizontal	19305.094	34.35	7.76	42.11	54	-11.89	AV
middle Channel (6475 MHz)-Above 1G							
Vertical	4592.050	74.25	-20.42	53.83	74	-20.17	PK
Vertical	4592.050	59.63	-20.42	39.22	54	-14.78	AV
Vertical	12950.140	60.51	-7.89	52.62	68.2	-15.58	PK
Vertical	12950.140	49.47	-7.89	41.58	54	-12.42	AV
Vertical	19425.149	46.35	7.78	54.13	68.2	-14.07	PK
Vertical	19425.149	34.05	7.78	41.83	54	-12.17	AV
Horizontal	4592.191	72.93	-20.42	52.51	74	-21.49	PK
Horizontal	4592.191	59.07	-20.42	38.65	54	-15.35	AV
Horizontal	12950.051	64.61	-7.89	56.72	68.2	-11.48	PK
Horizontal	12950.051	49.86	-7.89	41.97	54	-12.03	AV
Horizontal	19425.117	49.72	7.78	57.50	68.2	-10.70	PK
Horizontal	19425.117	34.41	7.78	42.19	54	-11.81	AV
High Channel (6515 MHz)-Above 1G							
Vertical	6039.084	70.32	-18.93	51.39	68.2	-16.81	PK
Vertical	6039.084	59.66	-18.93	40.72	54	-13.28	AV
Vertical	13030.072	61.99	-7.80	54.19	74	-19.81	PK
Vertical	13030.072	49.57	-7.80	41.77	54	-12.23	AV
Vertical	19545.113	45.38	7.78	53.16	68.2	-15.04	PK
Vertical	19545.113	34.58	7.78	42.36	54	-11.64	AV
Horizontal	6039.035	74.74	-18.93	55.81	68.2	-12.39	PK
Horizontal	6039.035	59.99	-18.93	41.05	54	-12.95	AV
Horizontal	13030.052	60.81	-7.80	53.01	74	-20.99	PK
Horizontal	13030.052	49.05	-7.80	41.25	54	-12.75	AV
Horizontal	19545.188	47.24	7.78	55.02	68.2	-13.18	PK
Horizontal	19545.188	34.72	7.78	42.50	54	-11.50	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(U-NII-6: 6435-6515MHz) - 802.11ax40
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6445 MHz)-Above 1G							
Vertical	4679.085	71.08	-20.24	50.84	74	-23.16	PK
Vertical	4679.085	59.32	-20.24	39.07	54	-14.93	AV
Vertical	12890.088	64.27	-7.95	56.32	74	-17.68	PK
Vertical	12890.088	49.25	-7.95	41.30	54	-12.70	AV
Vertical	19335.084	46.26	7.76	54.02	68.2	-14.18	PK
Vertical	19335.084	34.01	7.76	41.77	54	-12.23	AV
Horizontal	4679.041	73.34	-20.24	53.10	74	-20.90	PK
Horizontal	4679.041	59.23	-20.24	38.99	54	-15.01	AV
Horizontal	12890.198	62.03	-7.95	54.08	74	-19.92	PK
Horizontal	12890.198	49.20	-7.95	41.25	54	-12.75	AV
Horizontal	19335.103	48.55	7.76	56.31	68.2	-11.89	PK
Horizontal	19335.103	34.62	7.76	42.38	54	-11.62	AV
middle Channel (6485 MHz)-Above 1G							
Vertical	6039.136	73.56	-18.93	54.63	68.2	-13.57	PK
Vertical	6039.136	59.07	-18.93	40.14	54	-13.86	AV
Vertical	12970.017	62.08	-7.85	54.23	74	-19.77	PK
Vertical	12970.017	49.82	-7.85	41.97	54	-12.03	AV
Vertical	19455.146	48.87	7.78	56.65	68.2	-11.55	PK
Vertical	19455.146	34.85	7.78	42.63	54	-11.37	AV
Horizontal	6039.154	70.80	-18.93	51.87	68.2	-16.33	PK
Horizontal	6039.154	59.69	-18.93	40.76	54	-13.24	AV
Horizontal	12970.160	60.11	-7.85	52.26	74	-21.74	PK
Horizontal	12970.160	49.57	-7.85	41.72	54	-12.28	AV
Horizontal	19455.024	45.30	7.78	53.08	68.2	-15.12	PK
Horizontal	19455.024	34.13	7.78	41.91	54	-12.09	AV
High Channel (6525 MHz)-Above 1G							
Vertical	6039.107	73.54	-18.93	54.60	68.2	-13.60	PK
Vertical	6039.107	59.20	-18.93	40.27	54	-13.73	AV
Vertical	13050.033	60.25	-7.8	52.45	74	-21.55	PK
Vertical	13050.033	49.48	-7.8	41.68	54	-12.32	AV
Vertical	19575.106	45.13	7.78	52.91	68.2	-15.29	PK
Vertical	19575.106	34.38	7.78	42.16	54	-11.84	AV
Horizontal	6039.156	71.10	-18.93	52.17	68.2	-16.03	PK
Horizontal	6039.156	59.53	-18.93	40.59	54	-13.41	AV
Horizontal	13050.159	60.39	-7.8	52.59	74	-21.41	PK
Horizontal	13050.159	49.67	-7.8	41.87	54	-12.13	AV
Horizontal	19575.165	47.39	7.78	55.17	68.2	-13.03	PK
Horizontal	19575.165	34.99	7.78	42.77	54	-11.23	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(U-NII-6: 6435-6515MHz)- 802.11ax80
-------------	---------------------------------------

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6465 MHz)-Above 1G							
Vertical	4679.171	74.48	-20.24	54.23	74	-19.77	PK
Vertical	4679.171	59.82	-20.24	39.58	54	-14.42	AV
Vertical	12930.169	63.60	-7.85	55.75	74	-18.25	PK
Vertical	12930.169	49.43	-7.85	41.58	54	-12.42	AV
Vertical	19395.047	45.50	7.76	53.26	68.2	-14.94	PK
Vertical	19395.047	34.40	7.76	42.16	54	-11.84	AV
Horizontal	4679.059	74.91	-20.24	54.67	74	-19.33	PK
Horizontal	4679.059	59.83	-20.24	39.58	54	-14.42	AV
Horizontal	12930.043	62.29	-7.85	54.44	74	-19.56	PK
Horizontal	12930.043	49.74	-7.85	41.89	54	-12.11	AV
Horizontal	19395.101	49.58	7.76	57.34	68.2	-10.86	PK
Horizontal	19395.101	34.12	7.76	41.88	54	-12.12	AV
High Channel (6545 MHz)-Above 1G							
Vertical	6039.006	71.05	-18.93	52.12	68.2	-16.08	PK
Vertical	6039.006	59.65	-18.93	40.72	54	-13.28	AV
Vertical	13090.038	60.26	-7.8	52.46	74	-21.54	PK
Vertical	13090.038	49.81	-7.8	42.01	54	-11.99	AV
Vertical	19635.012	45.33	7.78	53.11	68.2	-15.09	PK
Vertical	19635.012	34.15	7.78	41.93	54	-12.07	AV
Horizontal	6039.078	73.36	-18.93	54.43	68.2	-13.77	PK
Horizontal	6039.078	59.98	-18.93	41.04	54	-12.96	AV
Horizontal	13090.193	64.85	-7.8	57.05	74	-16.95	PK
Horizontal	13090.193	49.20	-7.8	41.40	54	-12.60	AV
Horizontal	19635.099	49.94	7.78	57.72	68.2	-10.48	PK
Horizontal	19635.099	34.40	7.78	42.18	54	-11.82	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(U-NII-6: 6435-6515MHz)- 802.11ax160
------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6505 MHz)-Above 1G							
Vertical	4679.054	72.61	-20.24	52.37	74	-21.63	PK
Vertical	4679.054	59.59	-20.24	39.35	54	-14.65	AV
Vertical	13010.036	63.19	-7.8	55.39	74	-18.61	PK
Vertical	13010.036	49.41	-7.8	41.61	54	-12.39	AV
Vertical	19515.173	49.77	7.78	57.55	68.2	-10.65	PK
Vertical	19515.173	34.42	7.78	42.20	54	-11.80	AV
Horizontal	4679.036	72.90	-20.24	52.65	74	-21.35	PK
Horizontal	4679.036	59.04	-20.24	38.79	54	-15.21	AV
Horizontal	13010.184	62.03	-7.8	54.23	74	-19.77	PK
Horizontal	13010.184	49.47	-7.8	41.67	54	-12.33	AV
Horizontal	19515.098	48.02	7.78	55.80	68.2	-12.40	PK
Horizontal	19515.098	34.62	7.78	42.40	54	-11.60	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

U-NII-7: 6535-6865MHz

Test Mode :	TX(U-NII-7: 6535-6865MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6535 MHz)-Above 1G							
Vertical	4680.782	73.38	-20.24	53.14	74	-20.86	PK
Vertical	4680.782	59.72	-20.24	39.48	54	-14.52	AV
Vertical	13070.150	63.34	-7.8	55.54	68.2	-12.66	PK
Vertical	13070.150	49.37	-7.8	41.57	54	-12.43	AV
Vertical	19605.188	48.96	7.78	56.74	68.2	-11.46	PK
Vertical	19605.188	34.90	7.78	42.68	54	-11.32	AV
Horizontal	4679.187	73.44	-20.73	52.71	74	-21.29	PK
Horizontal	4679.187	59.93	-20.73	39.20	54	-14.80	AV
Horizontal	13070.187	64.22	-7.8	56.42	68.2	-11.78	PK
Horizontal	13070.187	49.20	-7.8	41.40	54	-12.60	AV
Horizontal	19605.106	45.60	7.78	53.38	68.2	-14.82	PK
Horizontal	19605.106	34.72	7.78	42.50	54	-11.50	AV
Middle Channel (6695 MHz)-Above 1G							
Vertical	4592.033	70.86	-20.42	50.45	74	-23.55	PK
Vertical	4592.033	59.15	-20.42	38.74	54	-15.26	AV
Vertical	13390.050	61.94	-7.53	54.41	68.2	-13.79	PK
Vertical	13390.050	49.57	-7.53	42.04	54	-11.96	AV
Vertical	20085.015	49.01	8.00	57.01	68.2	-11.19	PK
Vertical	20085.015	34.97	8.00	42.97	54	-11.03	AV
Horizontal	4592.061	70.26	-20.42	49.84	74	-24.16	PK
Horizontal	4592.061	59.79	-20.42	39.37	54	-14.63	AV
Horizontal	13390.013	60.55	-7.53	53.02	68.2	-15.18	PK
Horizontal	13390.013	49.70	-7.53	42.17	54	-11.83	AV
Horizontal	20085.070	46.25	8.00	54.25	68.2	-13.95	PK
Horizontal	20085.070	34.51	8.00	42.51	54	-11.49	AV
High Channel (6855 MHz)-Above 1G							
Vertical	6039.007	71.28	-18.93	52.34	68.2	-15.86	PK
Vertical	6039.007	59.74	-18.93	40.80	54	-13.20	AV
Vertical	13710.048	62.03	-7.31	54.72	74	-19.28	PK
Vertical	13710.048	49.34	-7.31	42.03	54	-11.97	AV
Vertical	20565.096	47.48	3.72	51.20	68.2	-17.00	PK
Vertical	20565.096	34.14	3.72	37.86	54	-16.14	AV
Horizontal	6039.157	74.50	-18.93	55.57	68.2	-12.63	PK
Horizontal	6039.157	59.54	-18.93	40.61	54	-13.39	AV
Horizontal	13710.086	60.74	-7.31	53.43	74	-20.57	PK
Horizontal	13710.086	49.38	-7.31	42.07	54	-11.93	AV
Horizontal	20565.047	48.52	3.72	52.24	68.2	-15.96	PK
Horizontal	20565.047	34.24	3.72	37.96	54	-16.04	AV
High Channel (6875 MHz)-Above 1G							
Vertical	6039.154	73.58	-18.93	54.65	68.2	-13.55	PK
Vertical	6039.154	59.37	-18.93	40.44	54	-13.56	AV
Vertical	13750.091	62.27	-7.31	54.96	74	-19.04	PK
Vertical	13750.091	49.65	-7.31	42.34	54	-11.66	AV
Vertical	20625.165	48.73	3.71	52.44	68.2	-15.76	PK
Vertical	20625.165	34.67	3.71	38.38	54	-15.62	AV
Horizontal	6039.085	70.60	-18.93	51.66	68.2	-16.54	PK


Horizontal	6039.085	59.13	-18.93	40.20	54	-13.80	AV
Horizontal	13750.110	63.02	-7.31	55.71	74	-18.29	PK
Horizontal	13750.110	49.29	-7.31	41.98	54	-12.02	AV
Horizontal	20625.187	49.33	3.71	53.04	68.2	-15.16	PK
Horizontal	20625.187	34.81	3.71	38.52	54	-15.48	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

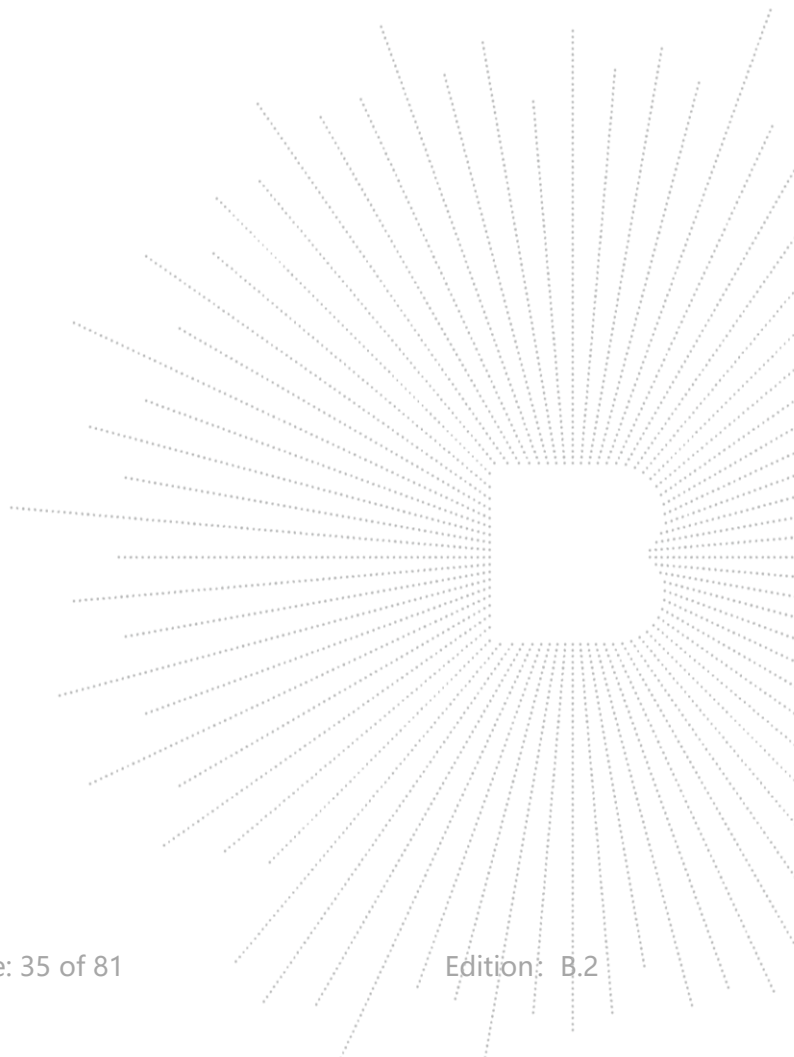

Test Mode :	TX(U-NII-7: 6535-6865MHz) - 802.11ax40
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6565 MHz)-Above 1G							
Vertical	4679.025	72.98	-20.24	52.74	74	-21.26	PK
Vertical	4679.025	59.45	-20.24	39.20	54	-14.80	AV
Vertical	13130.198	62.10	-7.65	54.45	74	-19.55	PK
Vertical	13130.198	49.09	-7.65	41.44	54	-12.56	AV
Vertical	19695.021	46.98	7.78	54.76	68.2	-13.44	PK
Vertical	19695.021	34.25	7.78	42.03	54	-11.97	AV
Horizontal	4679.172	73.83	-20.24	53.59	74	-20.41	PK
Horizontal	4679.172	59.43	-20.24	39.19	54	-14.81	AV
Horizontal	13130.022	61.94	-7.65	54.29	74	-19.71	PK
Horizontal	13130.022	49.31	-7.65	41.66	54	-12.34	AV
Horizontal	19695.046	45.10	7.78	52.88	68.2	-15.32	PK
Horizontal	19695.046	34.44	7.78	42.22	54	-11.78	AV
middle Channel (6685 MHz)-Above 1G							
Vertical	6039.190	70.89	-18.93	51.96	68.2	-16.24	PK
Vertical	6039.190	59.14	-18.93	40.21	54	-13.79	AV
Vertical	13370.009	63.81	-7.53	56.28	74	-17.72	PK
Vertical	13370.009	49.66	-7.53	42.13	54	-11.87	AV
Vertical	20055.175	48.14	8	56.14	68.2	-12.06	PK
Vertical	20055.175	34.93	8	42.93	54	-11.07	AV
Horizontal	6039.019	71.17	-18.93	52.24	68.2	-15.96	PK
Horizontal	6039.019	59.95	-18.93	41.02	54	-12.98	AV
Horizontal	13370.122	64.77	-7.53	57.24	74	-16.76	PK
Horizontal	13370.122	49.79	-7.53	42.26	54	-11.74	AV
Horizontal	20055.132	47.83	8	55.83	68.2	-12.37	PK
Horizontal	20055.132	34.18	8	42.18	54	-11.82	AV
High Channel (6845 MHz)-Above 1G							
Vertical	6039.030	71.57	-18.93	52.64	68.2	-15.56	PK
Vertical	6039.030	59.80	-18.93	40.87	54	-13.13	AV
Vertical	13690.142	61.47	-7.31	54.16	74	-19.84	PK
Vertical	13690.142	49.49	-7.31	42.18	54	-11.82	AV
Vertical	20535.110	46.22	3.72	49.94	68.2	-18.26	PK
Vertical	20535.110	34.78	3.72	38.50	54	-15.50	AV
Horizontal	6039.198	70.32	-18.93	51.39	68.2	-16.81	PK
Horizontal	6039.198	59.42	-18.93	40.49	54	-13.51	AV
Horizontal	13690.193	61.97	-7.31	54.66	74	-19.34	PK
Horizontal	13690.193	49.17	-7.31	41.86	54	-12.14	AV
Horizontal	20535.083	46.71	3.72	50.43	68.2	-17.77	PK
Horizontal	20535.083	34.10	3.72	37.82	54	-16.18	AV
High Channel (6885 MHz)-Above 1G							
Vertical	6039.195	71.73	-18.93	52.80	68.2	-15.40	PK
Vertical	6039.195	59.39	-18.93	40.46	54	-13.54	AV
Vertical	13770.035	64.41	-7.31	57.10	74	-16.90	PK
Vertical	13770.035	49.71	-7.31	42.40	54	-11.60	AV
Vertical	20655.190	49.12	3.71	52.83	68.2	-15.37	PK
Vertical	20655.190	34.44	3.71	38.15	54	-15.85	AV
Horizontal	6039.039	71.53	-18.93	52.59	68.2	-15.61	PK
Horizontal	6039.039	59.54	-18.93	40.60	54	-13.40	AV


Horizontal	13770.112	63.81	-7.31	56.50	74	-17.50	PK
Horizontal	13770.112	49.43	-7.31	42.12	54	-11.88	AV
Horizontal	20655.153	48.55	3.71	52.26	68.2	-15.94	PK
Horizontal	20655.153	34.93	3.71	38.64	54	-15.36	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

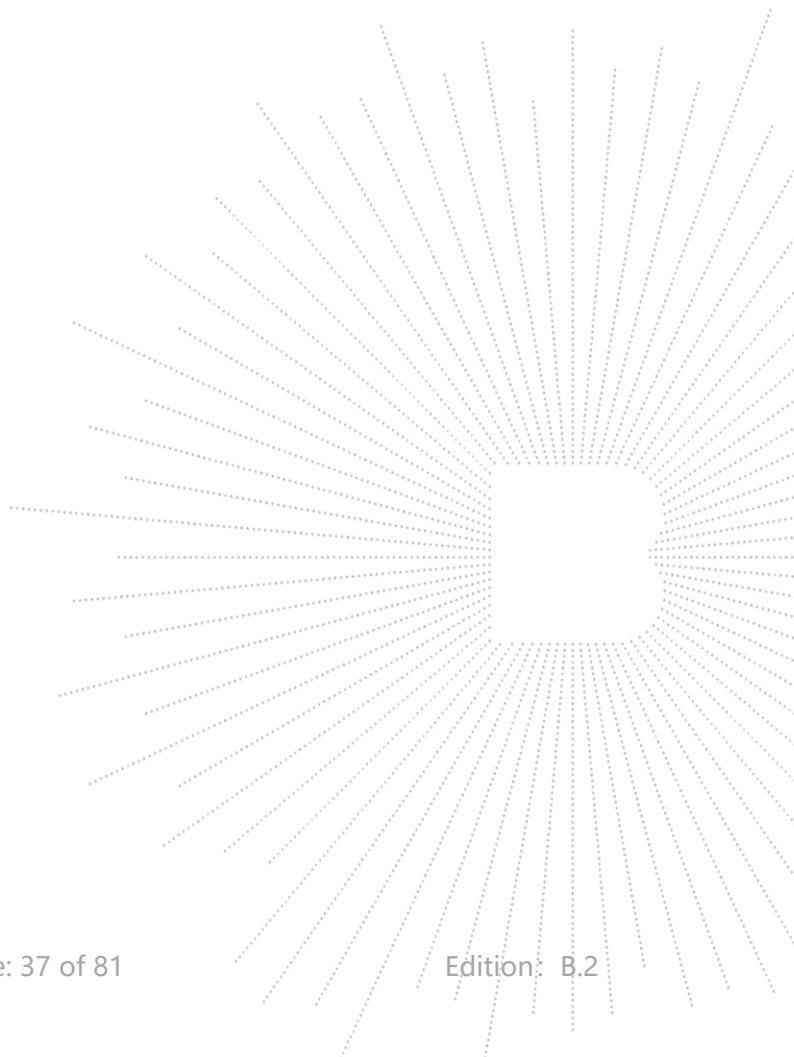

Test Mode :	TX(U-NII-7: 6535-6865MHz)- 802.11ax80
-------------	---------------------------------------

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6625 MHz)-Above 1G							
Vertical	4679.183	72.11	-20.24	51.87	74	-22.13	PK
Vertical	4679.183	59.55	-20.24	39.31	54	-14.69	AV
Vertical	13250.024	63.04	-7.61	55.43	74	-18.57	PK
Vertical	13250.024	49.56	-7.61	41.95	54	-12.05	AV
Vertical	19875.159	45.41	7.78	53.19	68.2	-15.01	PK
Vertical	19875.159	34.85	7.78	42.63	54	-11.37	AV
Horizontal	4679.161	71.89	-20.24	51.65	74	-22.35	PK
Horizontal	4679.161	59.52	-20.24	39.27	54	-14.73	AV
Horizontal	13250.063	61.23	-7.61	53.62	74	-20.38	PK
Horizontal	13250.063	49.54	-7.61	41.93	54	-12.07	AV
Horizontal	19875.054	45.03	7.78	52.81	68.2	-15.39	PK
Horizontal	19875.054	34.18	7.78	41.96	54	-12.04	AV
Middle Channel (6705 MHz)-Above 1G							
Vertical	6039.075	71.99	-18.93	53.06	68.2	-15.14	PK
Vertical	6039.075	59.22	-18.93	40.29	54	-13.71	AV
Vertical	13410.036	61.96	-7.4	54.56	74	-19.44	PK
Vertical	13410.036	49.80	-7.4	42.40	54	-11.60	AV
Vertical	20115.007	46.86	6.35	53.21	68.2	-14.99	PK
Vertical	20115.007	34.00	6.35	40.35	54	-13.65	AV
Horizontal	6039.006	70.25	-18.93	51.31	68.2	-16.89	PK
Horizontal	6039.006	59.14	-18.93	40.21	54	-13.79	AV
Horizontal	13410.024	61.12	-7.4	53.72	74	-20.28	PK
Horizontal	13410.024	49.16	-7.4	41.76	54	-12.24	AV
Horizontal	20115.088	45.41	6.35	51.76	68.2	-16.44	PK
Horizontal	20115.088	34.83	6.35	41.18	54	-12.82	AV
High Channel (6785 MHz)-Above 1G							
Vertical	6039.171	70.83	-18.93	51.90	68.2	-16.30	PK
Vertical	6039.171	59.23	-18.93	40.29	54	-13.71	AV
Vertical	13570.093	62.29	-7.39	54.90	74	-19.10	PK
Vertical	13570.093	49.49	-7.39	42.10	54	-11.90	AV
Vertical	20355.043	47.40	5.82	53.22	68.2	-14.98	PK
Vertical	20355.043	34.16	5.82	39.98	54	-14.02	AV
Horizontal	6039.053	72.22	-18.93	53.29	68.2	-14.91	PK
Horizontal	6039.053	59.82	-18.93	40.88	54	-13.12	AV
Horizontal	13570.136	64.89	-7.39	57.50	74	-16.50	PK
Horizontal	13570.136	49.91	-7.39	42.52	54	-11.48	AV
Horizontal	20355.030	47.68	5.82	53.50	68.2	-14.70	PK
Horizontal	20355.030	34.52	5.82	40.34	54	-13.66	AV
High Channel (6865 MHz)-Above 1G							
Vertical	6039.153	74.57	-18.93	55.63	68.2	-12.57	PK
Vertical	6039.153	59.02	-18.93	40.09	54	-13.91	AV
Vertical	13730.005	64.15	-7.23	56.92	74	-17.08	PK
Vertical	13730.005	49.17	-7.23	41.94	54	-12.06	AV
Vertical	20595.030	45.47	3.51	48.98	68.2	-19.22	PK
Vertical	20595.030	34.11	3.51	37.62	54	-16.38	AV
Horizontal	6039.185	75.00	-18.93	56.07	68.2	-12.13	PK
Horizontal	6039.185	59.85	-18.93	40.92	54	-13.08	AV
Horizontal	13730.118	62.90	-7.23	55.67	74	-18.33	PK


Horizontal	13730.118	49.14	-7.23	41.91	54	-12.09	AV
Horizontal	20595.081	47.05	3.51	50.56	68.2	-17.64	PK
Horizontal	20595.081	34.08	3.51	37.59	54	-16.41	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

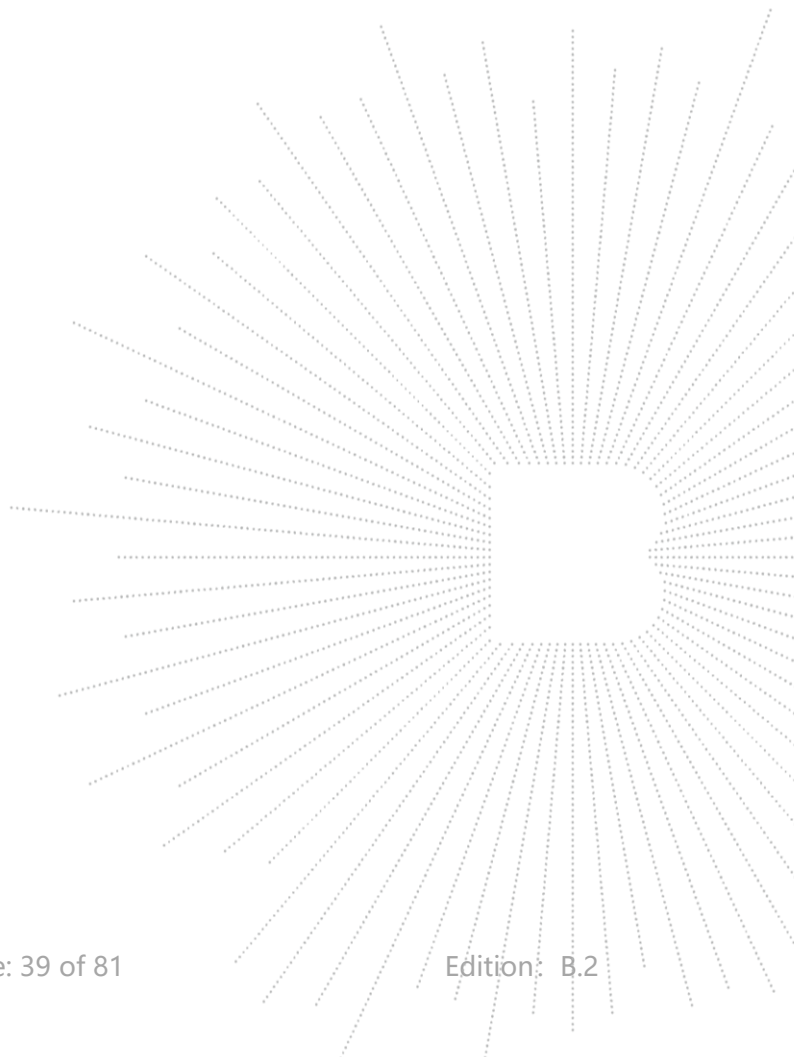

Test Mode:	TX(U-NII-7: 6535-6865MHz)- 802.11ax160
------------	--

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6665 MHz)-Above 1G							
Vertical	4679.057	74.42	-20.24	54.18	74	-19.82	PK
Vertical	4679.057	59.14	-20.24	38.90	54	-15.10	AV
Vertical	13330.128	63.69	-7.5	56.19	74	-17.81	PK
Vertical	13330.128	49.86	-7.5	42.36	54	-11.64	AV
Vertical	19995.188	49.51	8	57.51	68.2	-10.69	PK
Vertical	19995.188	34.53	8	42.53	54	-11.47	AV
Horizontal	4679.029	73.43	-20.24	53.19	74	-20.81	PK
Horizontal	4679.029	59.41	-20.24	39.17	54	-14.83	AV
Horizontal	13330.022	62.28	-7.5	54.78	74	-19.22	PK
Horizontal	13330.022	49.18	-7.5	41.68	54	-12.32	AV
Horizontal	19995.183	49.36	8	57.36	68.2	-10.84	PK
Horizontal	19995.183	34.61	8	42.61	54	-11.39	AV
High Channel (6825 MHz)-Above 1G							
Vertical	6039.008	74.15	-18.93	55.21	68.2	-12.99	PK
Vertical	6039.008	59.62	-18.93	40.68	54	-13.32	AV
Vertical	13650.063	61.85	-7.3	54.55	74	-19.45	PK
Vertical	13650.063	49.39	-7.3	42.09	54	-11.91	AV
Vertical	20475.192	47.74	4.27	52.01	68.2	-16.19	PK
Vertical	20475.192	34.95	4.27	39.22	54	-14.78	AV
Horizontal	6039.129	70.45	-18.93	51.52	68.2	-16.68	PK
Horizontal	6039.129	59.23	-18.93	40.30	54	-13.70	AV
Horizontal	13650.182	60.52	-7.3	53.22	74	-20.78	PK
Horizontal	13650.182	49.80	-7.3	42.50	54	-11.50	AV
Horizontal	20475.108	47.51	4.27	51.78	68.2	-16.42	PK
Horizontal	20475.108	34.76	4.27	39.03	54	-14.97	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

U-NII-8: 6885-7115MHz

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax20
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6895 MHz)-Above 1G							
Vertical	4679.153	73.96	-20.24	53.72	74	-20.28	PK
Vertical	4679.153	59.58	-20.24	39.34	54	-14.66	AV
Vertical	13790.080	62.63	-7.23	55.40	68.2	-12.80	PK
Vertical	13790.080	49.70	-7.23	42.47	54	-11.53	AV
Vertical	20685.162	46.38	3.51	49.89	68.2	-18.31	PK
Vertical	20685.162	34.24	3.51	37.75	54	-16.25	AV
Horizontal	4679.012	70.71	-20.73	49.98	74	-24.02	PK
Horizontal	4679.012	59.47	-20.73	38.74	54	-15.26	AV
Horizontal	13790.084	60.56	-7.23	53.33	68.2	-14.87	PK
Horizontal	13790.084	49.58	-7.23	42.35	54	-11.65	AV
Horizontal	20685.140	48.34	3.51	51.85	68.2	-16.35	PK
Horizontal	20685.140	34.69	3.51	38.20	54	-15.80	AV
middle Channel (6995 MHz)-Above 1G							
Vertical	4592.118	73.42	-20.42	53.00	74	-21.00	PK
Vertical	4592.118	59.72	-20.42	39.30	54	-14.70	AV
Vertical	13990.117	60.65	-6.83	53.82	68.2	-14.38	PK
Vertical	13990.117	49.00	-6.83	42.17	54	-11.83	AV
Vertical	20985.084	56.37	-1.95	54.42	68.2	-13.78	PK
Vertical	20985.084	44.49	-1.95	42.54	54	-11.46	AV
Horizontal	4592.074	72.02	-20.42	51.60	74	-22.40	PK
Horizontal	4592.074	59.62	-20.42	39.20	54	-14.80	AV
Horizontal	13990.112	61.90	-6.83	55.07	68.2	-13.13	PK
Horizontal	13990.112	49.10	-6.83	42.27	54	-11.73	AV
Horizontal	20985.103	56.94	-1.95	54.99	68.2	-13.21	PK
Horizontal	20985.103	44.63	-1.95	42.68	54	-11.32	AV
High Channel (7115 MHz)-Above 1G							
Vertical	4592.034	72.59	-20.42	52.17	68.2	-16.03	PK
Vertical	4592.034	59.24	-20.42	38.82	54	-15.18	AV
Vertical	14230.127	63.46	-7.12	56.34	74	-17.66	PK
Vertical	14230.127	49.34	-7.12	42.22	54	-11.78	AV
Vertical	21345.099	56.45	-1.91	54.54	68.2	-13.66	PK
Vertical	21345.099	44.26	-1.91	42.35	54	-11.65	AV
Horizontal	6039.007	71.65	-18.93	52.72	68.2	-15.48	PK
Horizontal	6039.007	59.94	-18.93	41.01	54	-12.99	AV
Horizontal	14230.121	60.76	-7.12	53.64	74	-20.36	PK
Horizontal	14230.121	49.64	-7.12	42.52	54	-11.48	AV
Horizontal	21345.086	58.83	-1.91	56.92	68.2	-11.28	PK
Horizontal	21345.086	44.85	-1.91	42.94	54	-11.06	AV

Note: The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax40
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6925 MHz)-Above 1G							
Vertical	4679.083	73.26	-20.24	53.02	74	-20.98	PK
Vertical	4679.083	59.51	-20.24	39.27	54	-14.73	AV
Vertical	13850.042	60.22	-7.23	52.99	74	-21.01	PK
Vertical	13850.042	49.87	-7.23	42.64	54	-11.36	AV
Vertical	20775.179	48.01	3.51	51.52	68.2	-16.68	PK
Vertical	20775.179	34.30	3.51	37.81	54	-16.19	AV
Horizontal	4679.032	70.15	-20.24	49.91	74	-24.09	PK
Horizontal	4679.032	59.55	-20.24	39.31	54	-14.69	AV
Horizontal	13850.073	64.84	-7.23	57.61	74	-16.39	PK
Horizontal	13850.073	49.13	-7.23	41.90	54	-12.10	AV
Horizontal	20775.140	49.57	3.51	53.08	68.2	-15.12	PK
Horizontal	20775.140	34.68	3.51	38.19	54	-15.81	AV
middle Channel (6965 MHz)-Above 1G							
Vertical	6039.164	72.51	-18.93	53.58	68.2	-14.62	PK
Vertical	6039.164	59.10	-18.93	40.17	54	-13.83	AV
Vertical	13930.165	62.31	-6.83	55.48	74	-18.52	PK
Vertical	13930.165	49.23	-6.83	42.40	54	-11.60	AV
Vertical	20895.082	57.30	-1.95	55.35	68.2	-12.85	PK
Vertical	20895.082	44.04	-1.95	42.09	54	-11.91	AV
Horizontal	6039.180	74.82	-18.93	55.89	68.2	-12.31	PK
Horizontal	6039.180	59.87	-18.93	40.94	54	-13.06	AV
Horizontal	13930.013	60.09	-6.83	53.26	74	-20.74	PK
Horizontal	13930.013	49.02	-6.83	42.19	54	-11.81	AV
Horizontal	20895.168	59.63	-1.95	57.68	68.2	-10.52	PK
Horizontal	20895.168	44.82	-1.95	42.87	54	-11.13	AV
High Channel (7085 MHz)-Above 1G							
Vertical	6039.000	72.54	-18.93	53.61	68.2	-14.59	PK
Vertical	6039.000	59.87	-18.93	40.93	54	-13.07	AV
Vertical	14170.059	62.32	-7.12	55.20	74	-18.80	PK
Vertical	14170.059	49.29	-7.12	42.17	54	-11.83	AV
Vertical	21255.140	58.10	-1.91	56.19	68.2	-12.01	PK
Vertical	21255.140	44.81	-1.91	42.90	54	-11.10	AV
Horizontal	6039.113	70.52	-18.93	51.58	68.2	-16.62	PK
Horizontal	6039.113	59.15	-18.93	40.22	54	-13.78	AV
Horizontal	14170.017	62.28	-7.12	55.16	74	-18.84	PK
Horizontal	14170.017	49.47	-7.12	42.35	54	-11.65	AV
Horizontal	21255.018	56.57	-1.91	54.66	68.2	-13.54	PK
Horizontal	21255.018	44.86	-1.91	42.95	54	-11.05	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(U-NII-8: 6885-7115MHz) - 802.11ax80
-------------	--

Polar	Frequency	Reading Level	Correct Factor	Measurement	Limits	Over	Detector Type
(H/V)	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (6945 MHz)-Above 1G							
Vertical	4679.136	74.40	-20.24	54.16	74	-19.84	PK
Vertical	4679.136	59.52	-20.24	39.28	54	-14.72	AV
Vertical	13890.150	64.10	-7.23	56.87	74	-17.13	PK
Vertical	13890.150	49.66	-7.23	42.43	54	-11.57	AV
Vertical	20835.177	46.78	3.51	50.29	68.2	-17.91	PK
Vertical	20835.177	34.41	3.51	37.92	54	-16.08	AV
Horizontal	4679.139	74.00	-20.24	53.76	74	-20.24	PK
Horizontal	4679.139	59.45	-20.24	39.21	54	-14.79	AV
Horizontal	13890.034	63.77	-7.23	56.54	74	-17.46	PK
Horizontal	13890.034	49.58	-7.23	42.35	54	-11.65	AV
Horizontal	20835.129	48.88	3.51	52.39	68.2	-15.81	PK
Horizontal	20835.129	34.47	3.51	37.98	54	-16.02	AV
High Channel (7025 MHz)-Above 1G							
Vertical	6039.124	74.13	-18.93	55.20	68.2	-13.00	PK
Vertical	6039.124	59.02	-18.93	40.09	54	-13.91	AV
Vertical	14050.090	63.72	-6.83	56.89	74	-17.11	PK
Vertical	14050.090	49.65	-6.83	42.82	54	-11.18	AV
Vertical	21075.164	59.06	-1.95	57.11	68.2	-11.09	PK
Vertical	21075.164	44.99	-1.95	43.04	54	-10.96	AV
Horizontal	6039.020	74.86	-18.93	55.93	68.2	-12.27	PK
Horizontal	6039.020	59.11	-18.93	40.17	54	-13.83	AV
Horizontal	14050.174	62.76	-6.83	55.93	74	-18.07	PK
Horizontal	14050.174	49.45	-6.83	42.62	54	-11.38	AV
Horizontal	21075.157	56.81	-1.95	54.86	68.2	-13.34	PK
Horizontal	21075.157	44.20	-1.95	42.25	54	-11.75	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(U-NII-8: 6885-7115MHz) - 802.11ax160
------------	---

Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)	Over (dB)	Detector Type
Low Channel (6985 MHz)-Above 1G							
Vertical	4679.194	71.79	-20.24	51.55	74	-22.45	PK
Vertical	4679.194	59.81	-20.24	39.57	54	-14.43	AV
Vertical	13970.053	64.54	-6.83	57.71	74	-16.29	PK
Vertical	13970.053	49.41	-6.83	42.58	54	-11.42	AV
Vertical	20955.051	58.50	-1.95	56.55	68.2	-11.65	PK
Vertical	20955.051	44.25	-1.95	42.30	54	-11.70	AV
Horizontal	4679.071	70.03	-20.24	49.79	74	-24.21	PK
Horizontal	4679.071	59.69	-20.24	39.45	54	-14.55	AV
Horizontal	13970.017	63.48	-6.83	56.65	74	-17.35	PK
Horizontal	13970.017	49.55	-6.83	42.72	54	-11.28	AV
Horizontal	20955.106	57.77	-1.95	55.82	68.2	-12.38	PK
Horizontal	20955.106	44.96	-1.95	43.01	54	-10.99	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge


Test mode: 802.11AX 20-MIMO Frequency(MHz): 5955

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5884.375	V	44.73	68.20
5911.500	V	45.58	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5787.000	H	44.98	68.20
5922.750	H	46.72	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L – Preamp

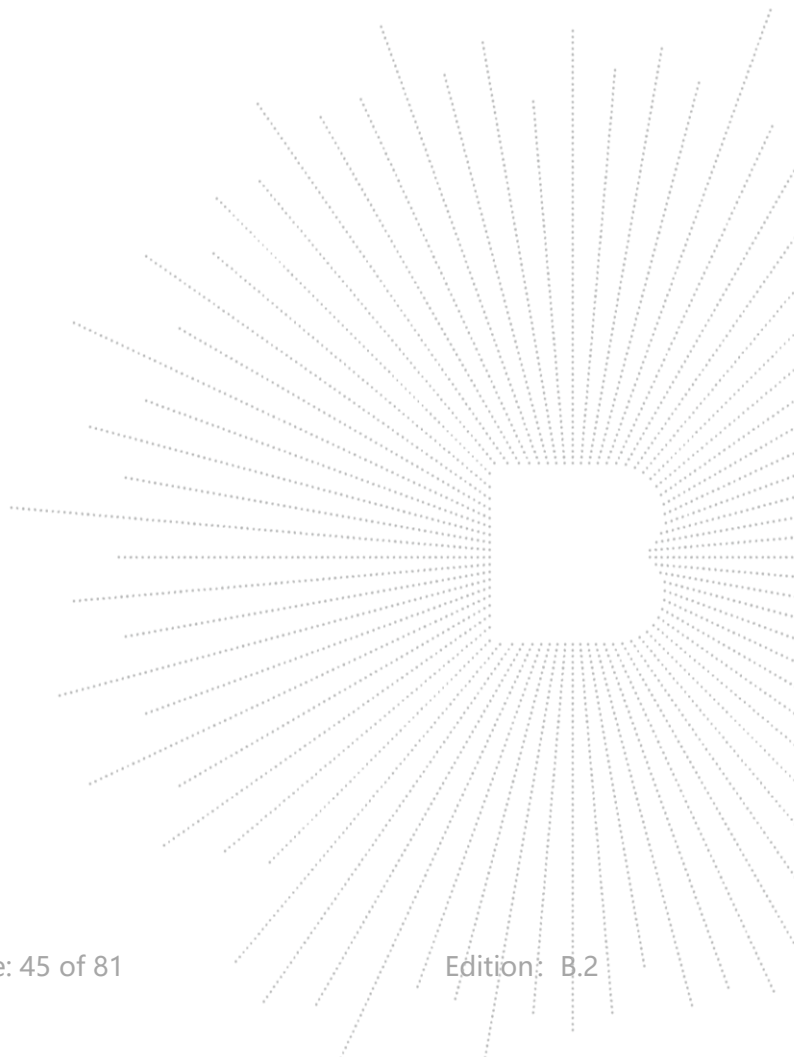

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 20

☒ 5955

Ant.Pol

H

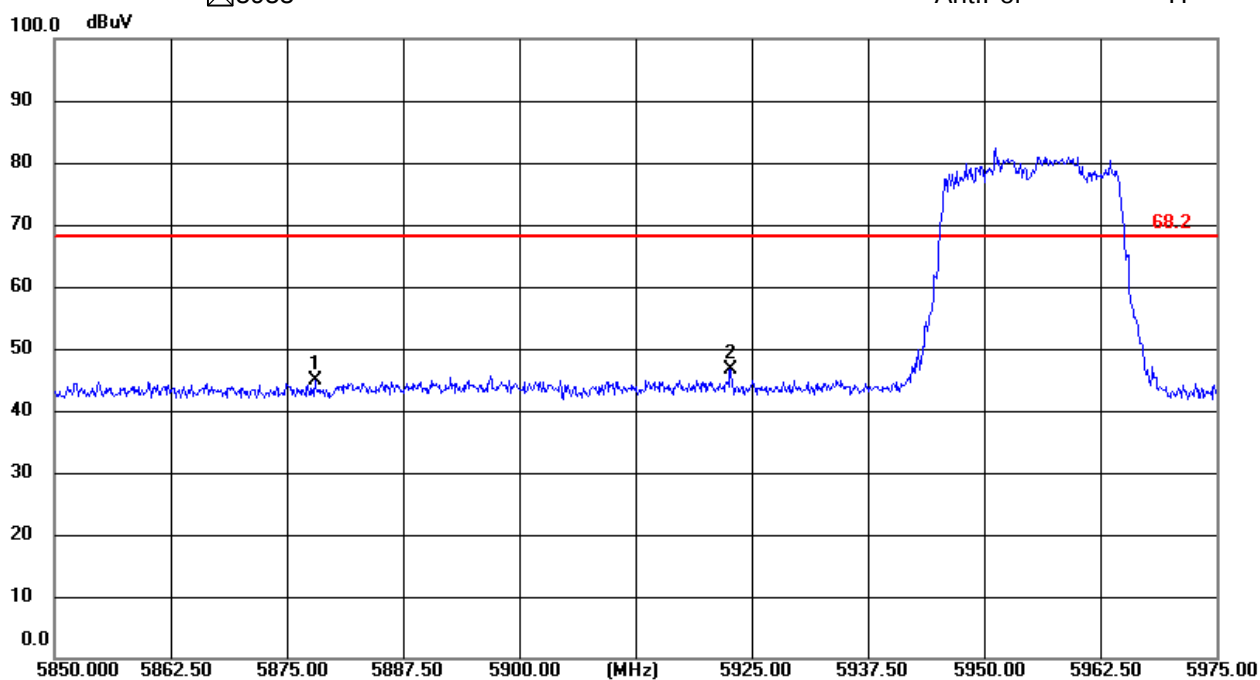

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 20

☒ 5955

Ant.Pol

V

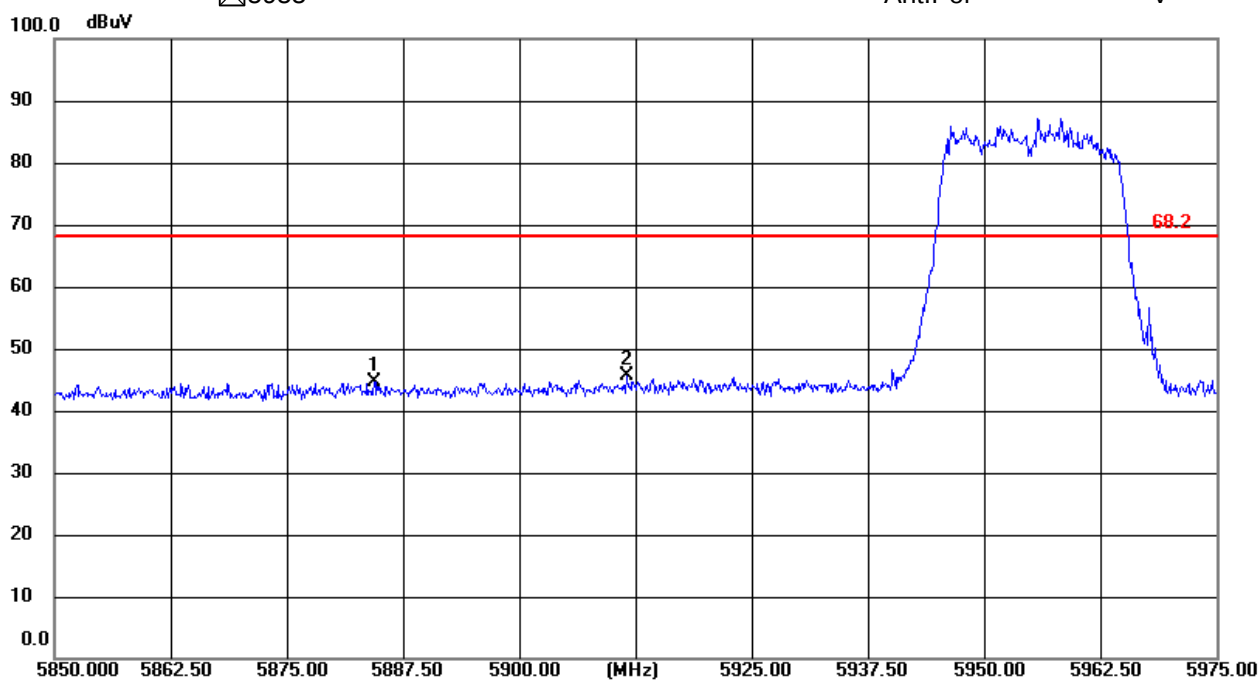

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge


Test mode: 802.11AX 40-MIMO Frequency(MHz): 5965

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7167.500	V	45.93	68.20
7231.100	V	47.62	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7166.150	H	46.85	68.20
7210.250	H	48.08	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

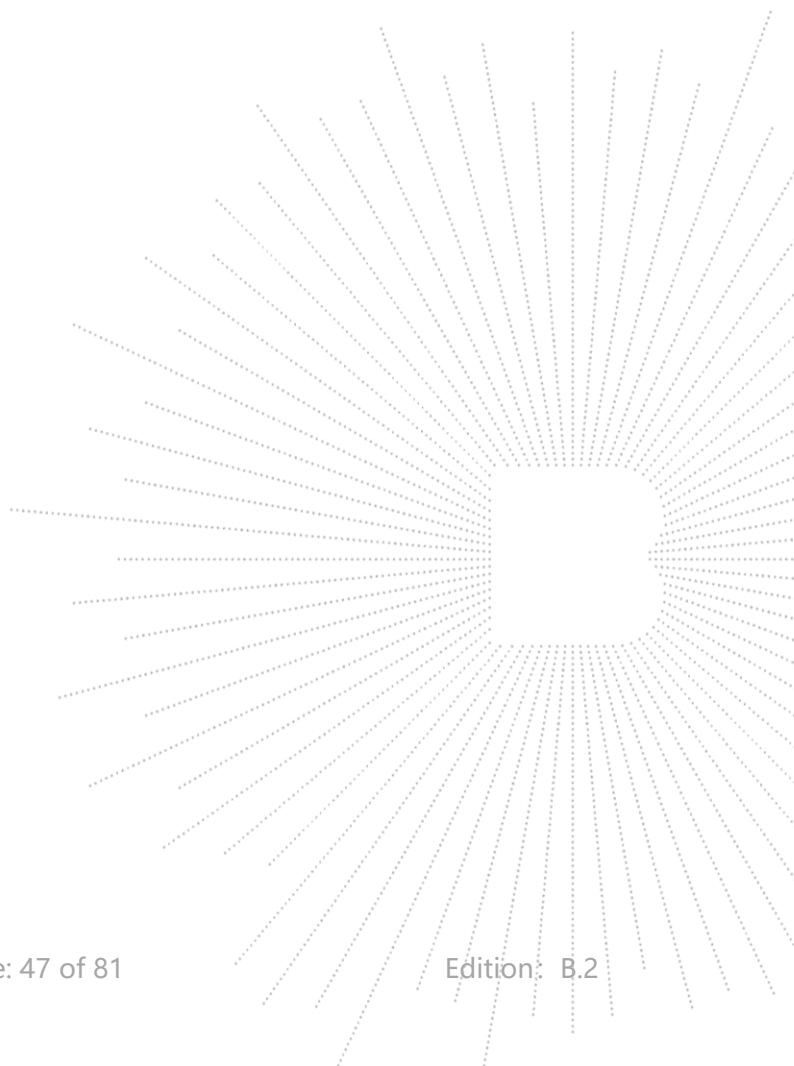

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 40

☒ 5965

Ant.Pol

H

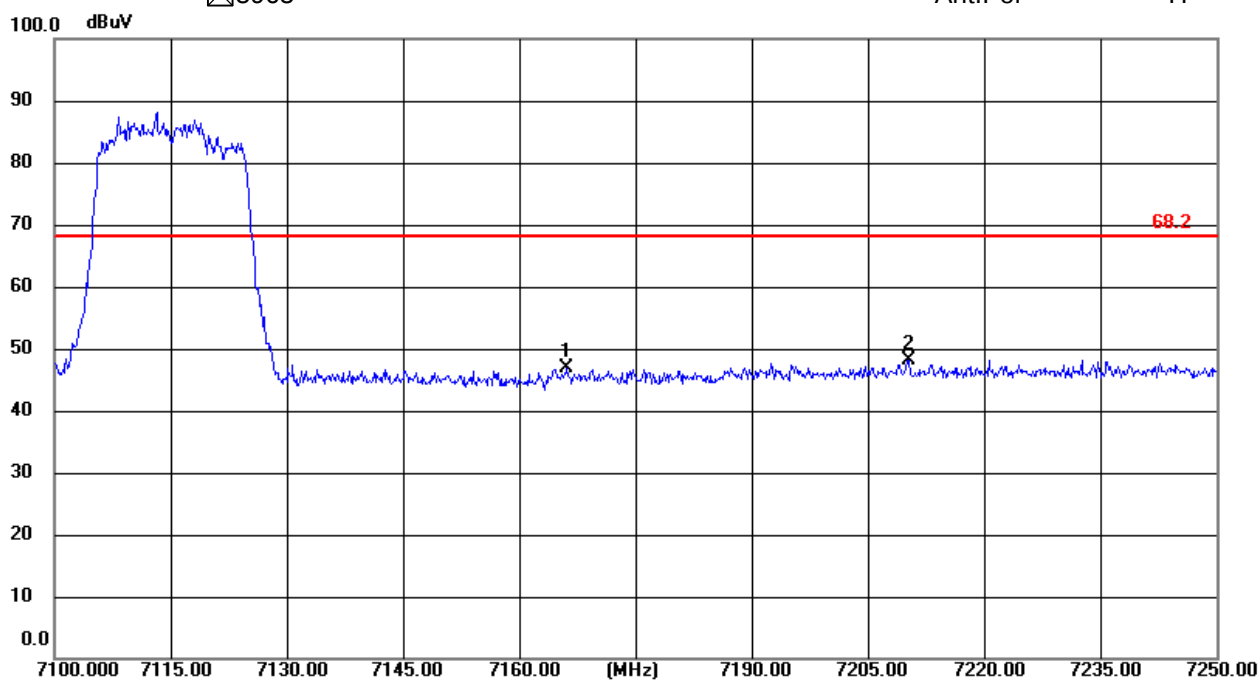

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 40

☒ 5965

Ant.Pol

V

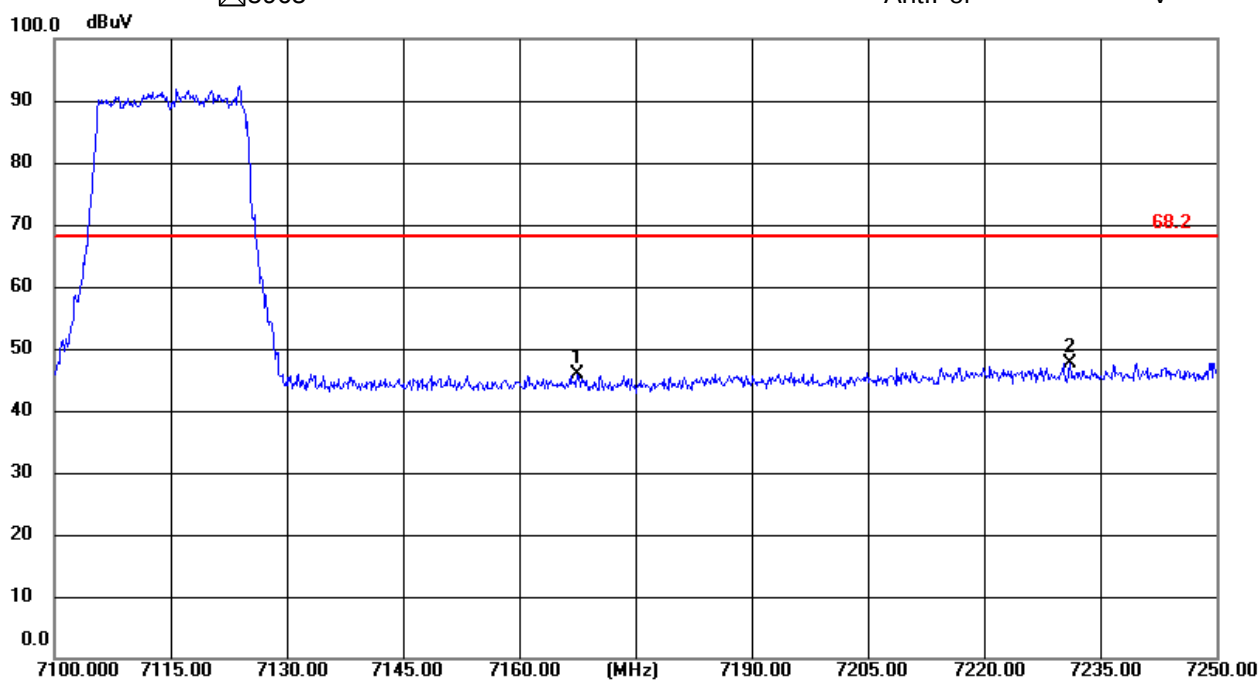

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge


Test mode: 802.11AX 80-MIMO Frequency(MHz): 5985

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5894.700	V	45.57	68.20
5924.850	V	46.29	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5893.200	H	44.97	68.20
5926.200	H	45.41	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

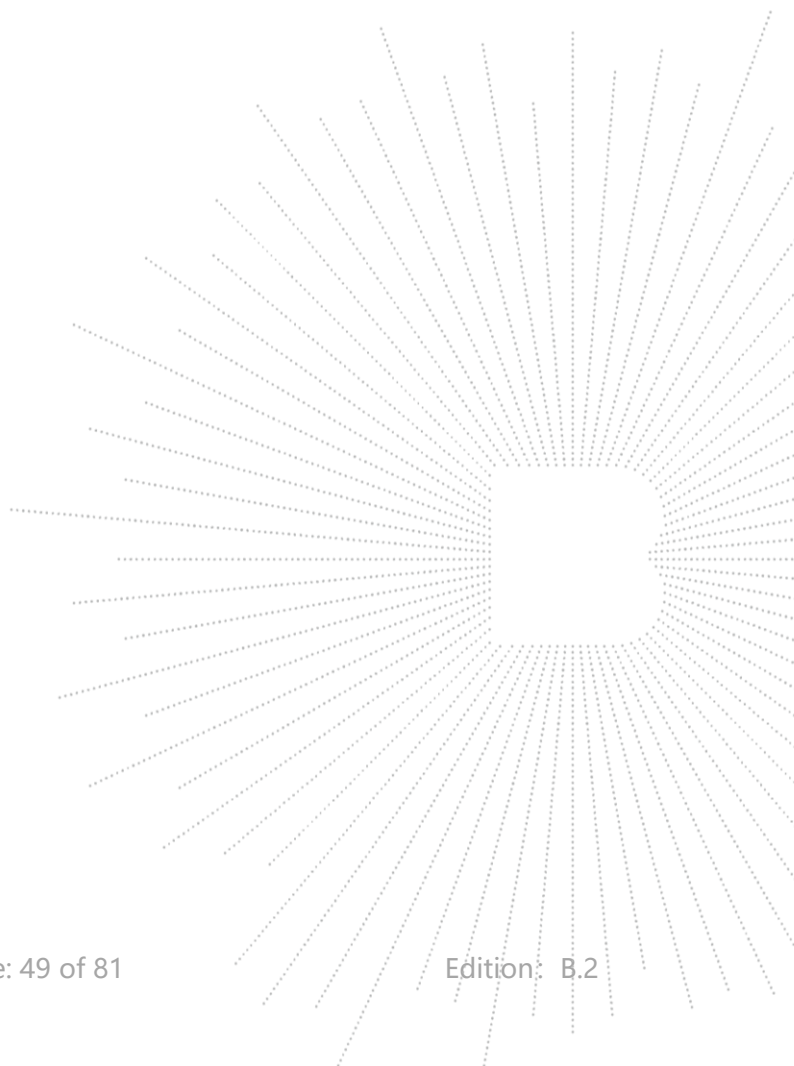

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 80

☒ 5985

Ant.Pol

H

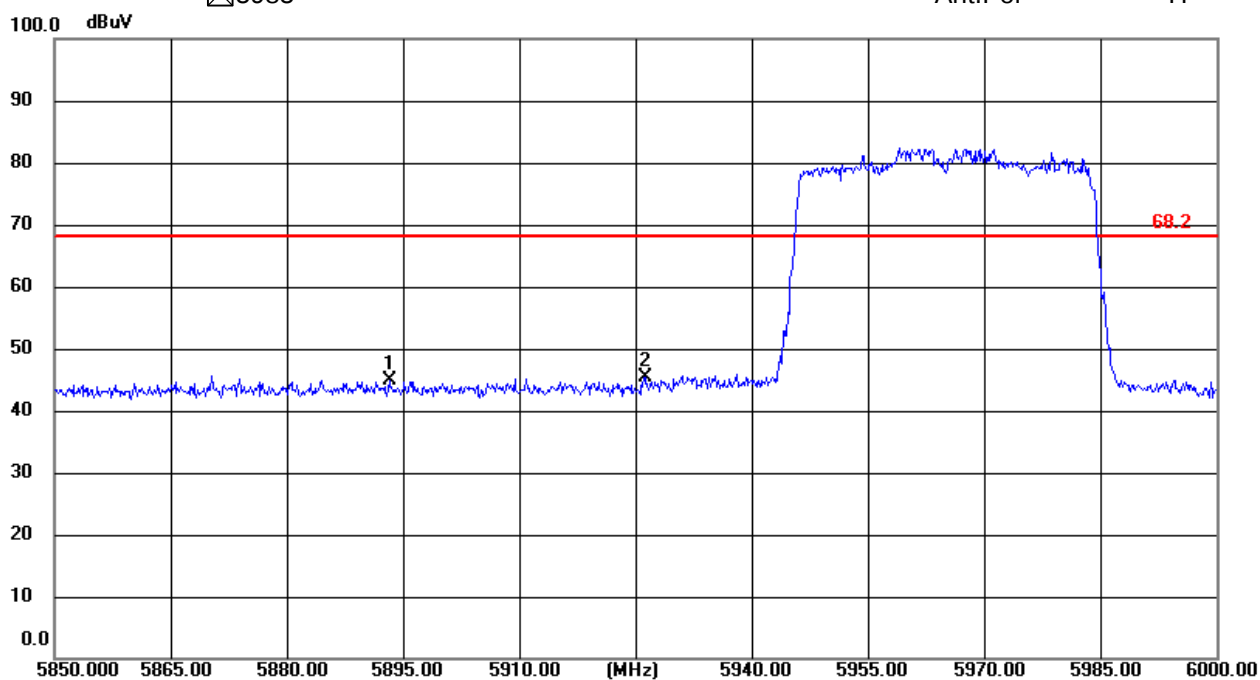

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 80

☒ 5985

Ant.Pol

V

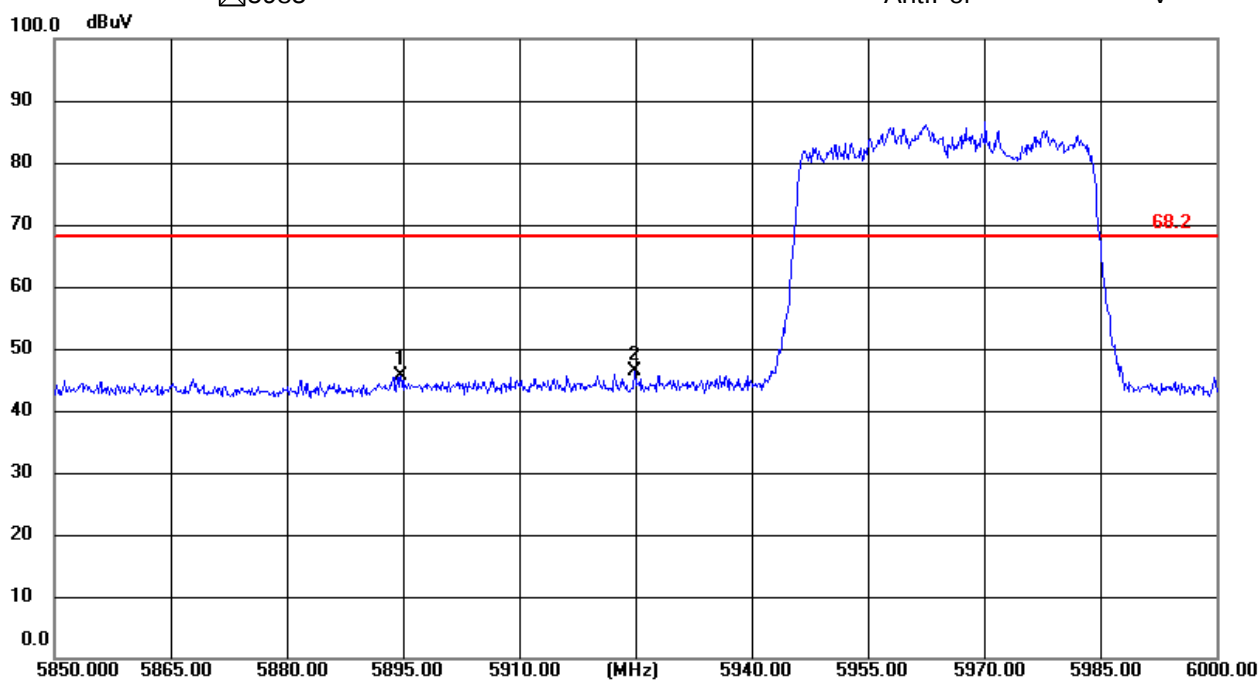

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge


Test mode: 802.11AX 160-MIMO Frequency(MHz): 6025

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7141.600	V	46.51	68.20
7207.800	V	46.70	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7155.400	H	47.40	68.20
7203.400	H	47.88	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

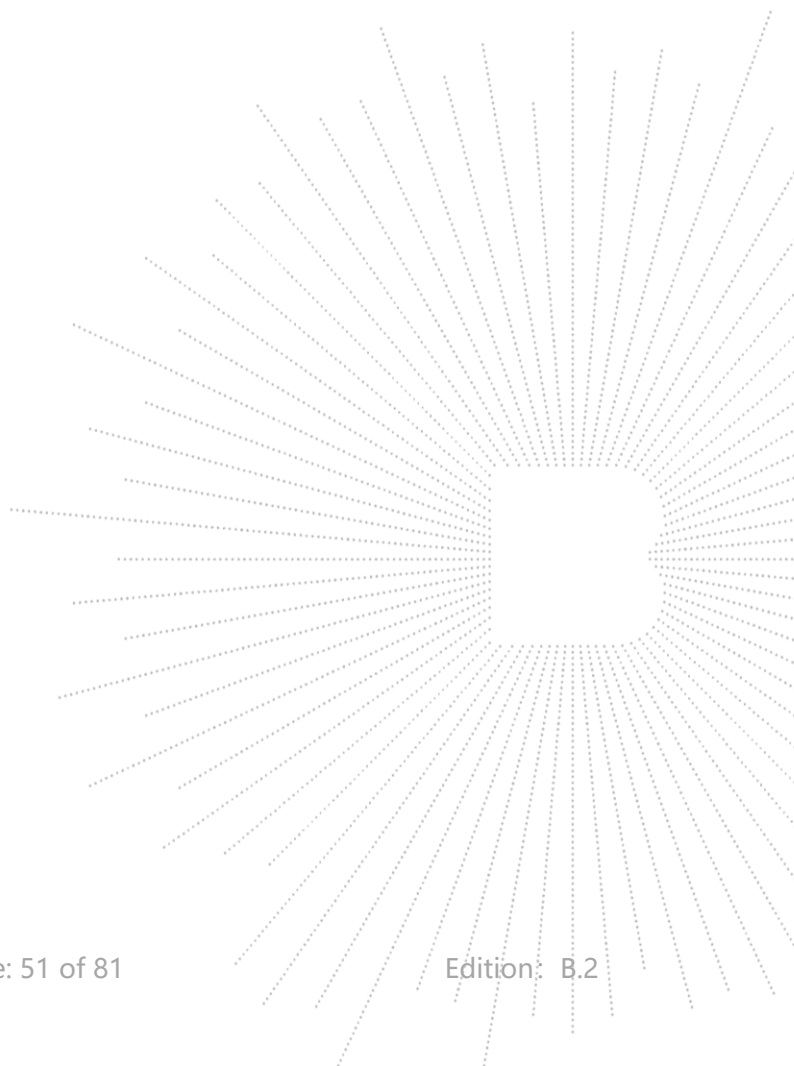

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 160

☒ 6025

Ant.Pol

H

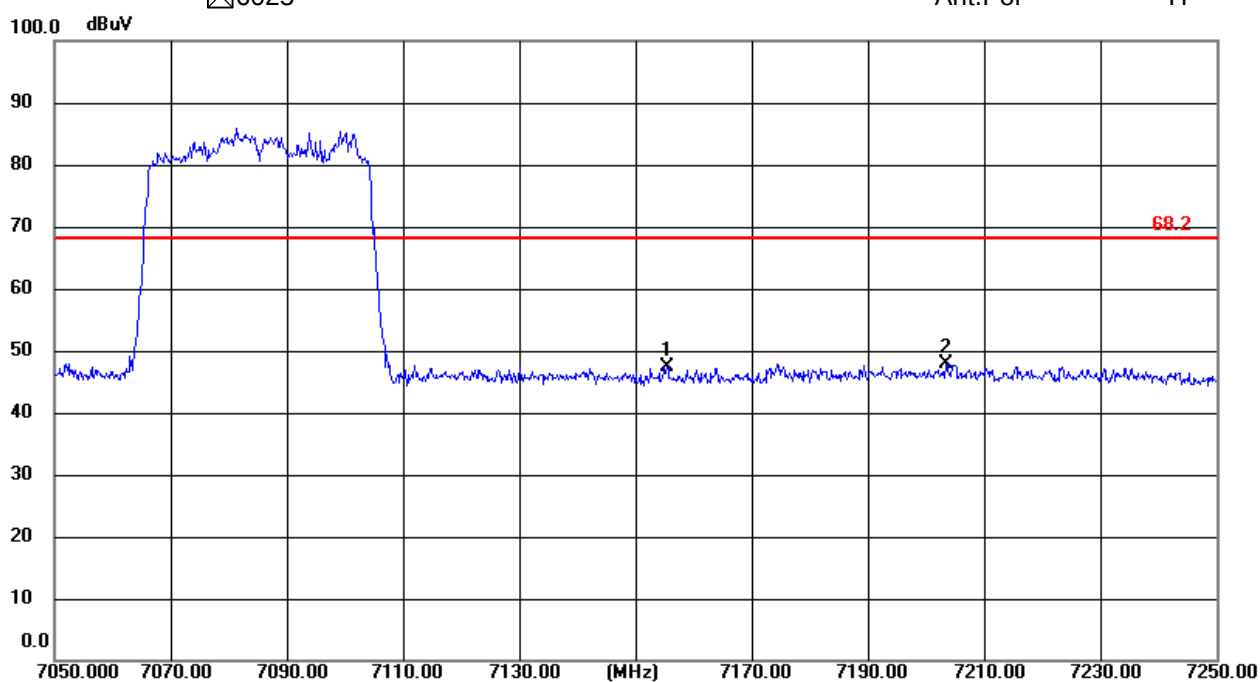

U-NII - 5


Test Model Undesirable radiated Spurious Emission in Restricted Band (5925-6425MHz)

☒ 802.11AX 160

☒ 6025

Ant.Pol

V

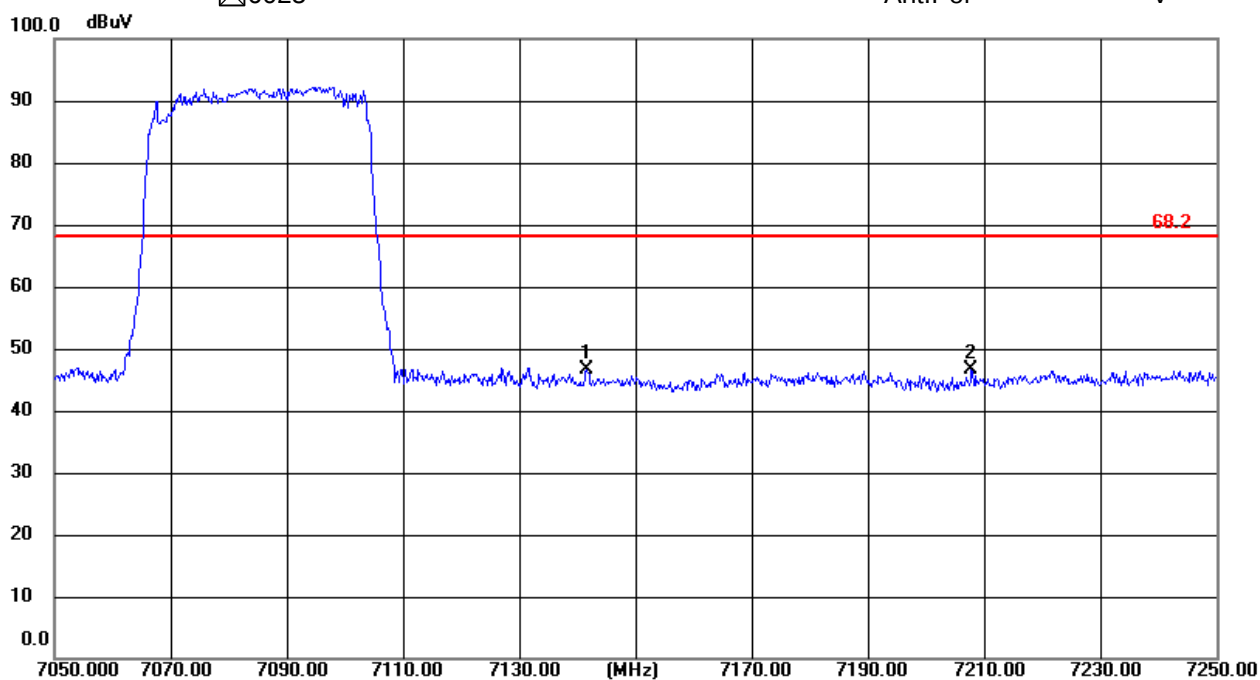

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge


Test mode: 802.11AX 20-MIMO Frequency(MHz): 7115

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5908.000	V	45.20	68.20
5924.000	V	45.25	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5865.600	H	45.29	68.20
5922.800	H	45.69	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

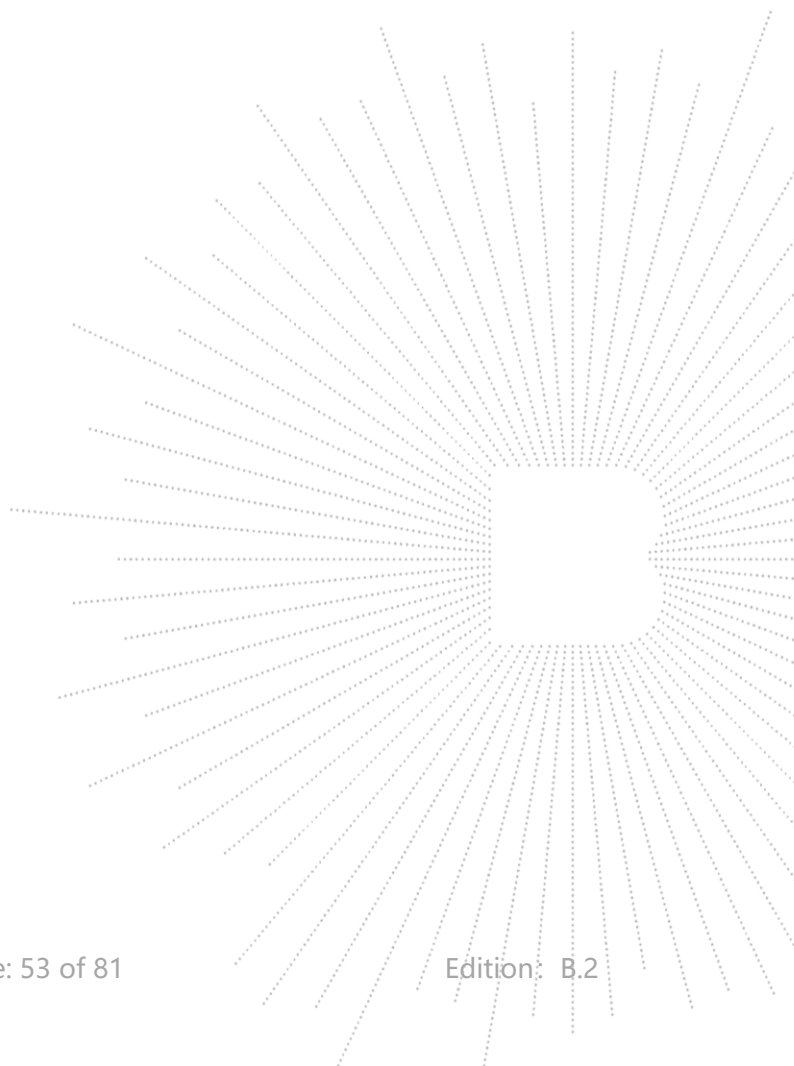

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 20

☒ 7115

Ant.Pol

H

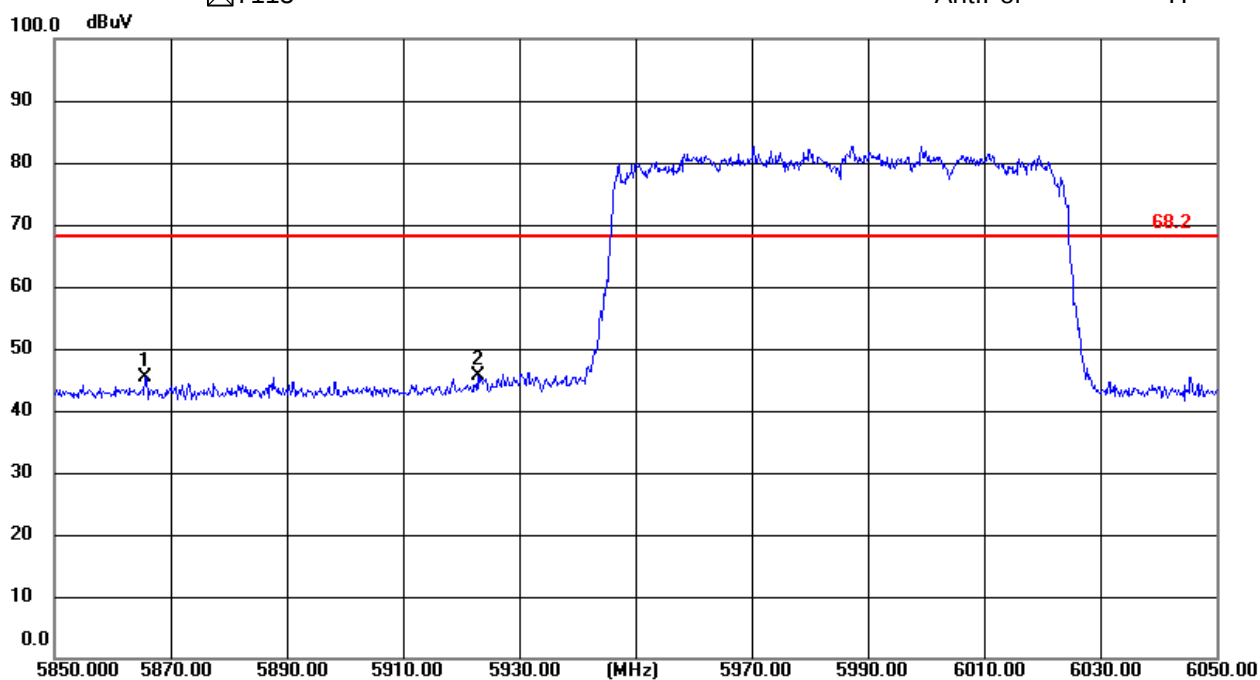

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 20

☒ 7115

Ant.Pol

V

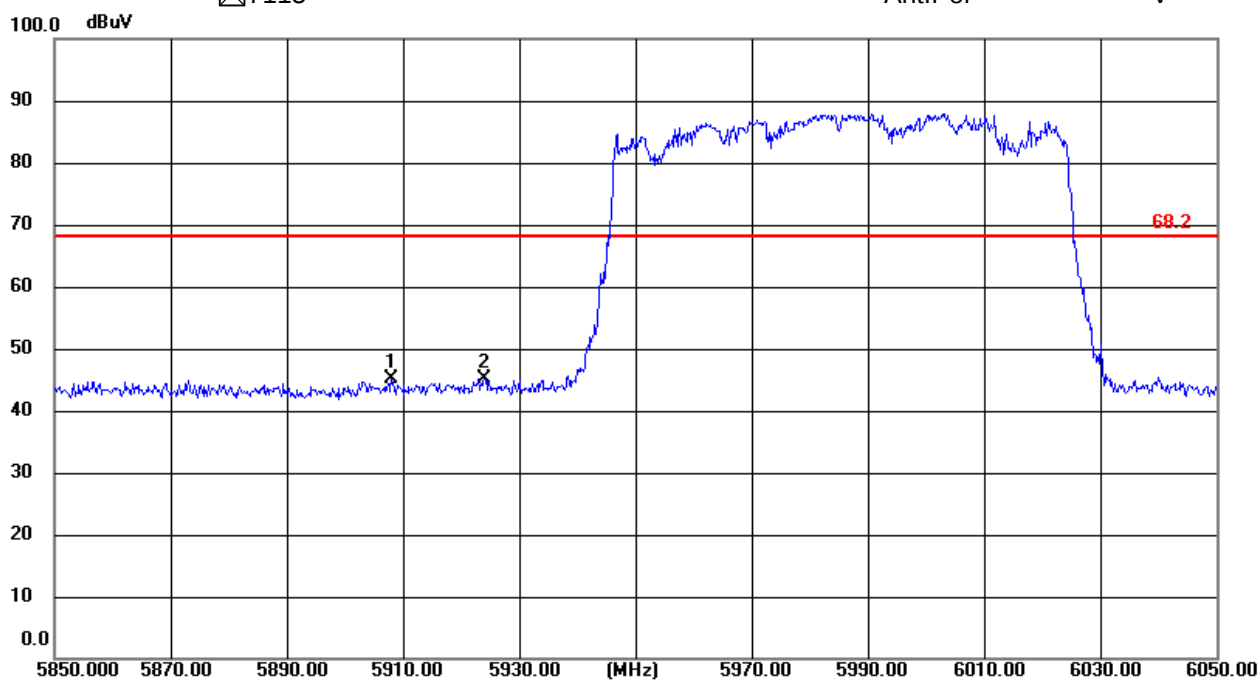

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge


Test mode: 802.11AX 40-MIMO Frequency(MHz): 7085

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7082.400	V	49.34	68.20
7119.000	V	47.43	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
7073.400	H	48.73	68.20
7125.000	H	47.04	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

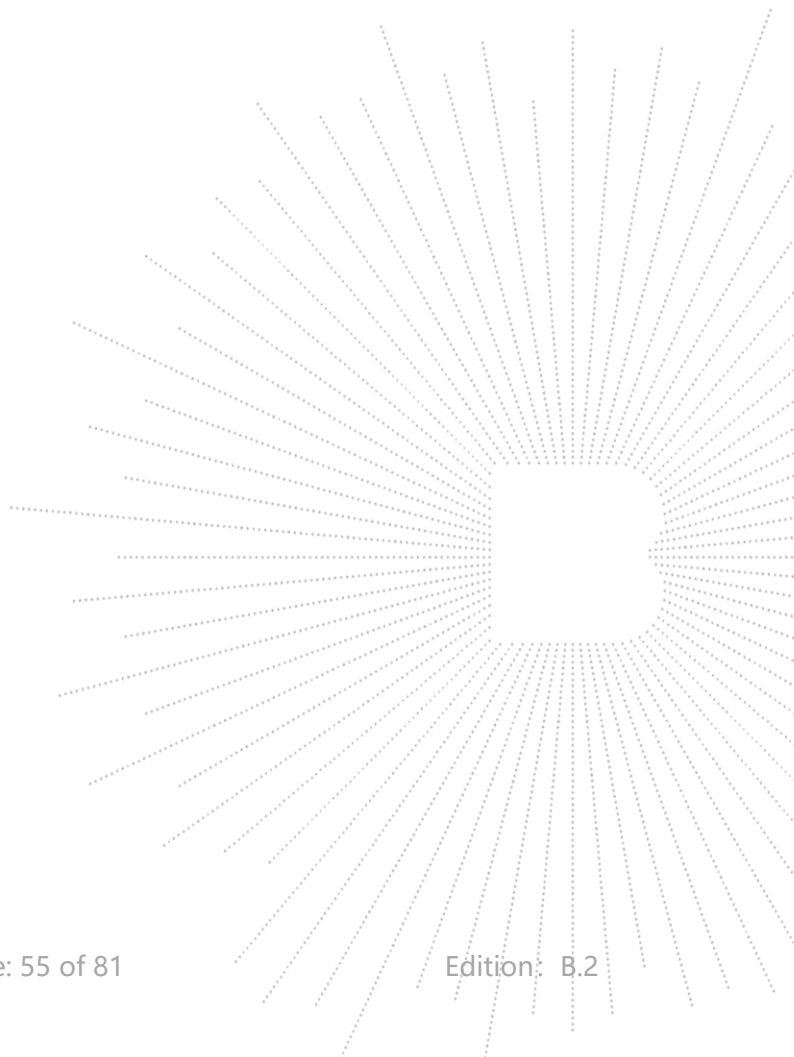

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 40

☒ 7085

Ant.Pol

H

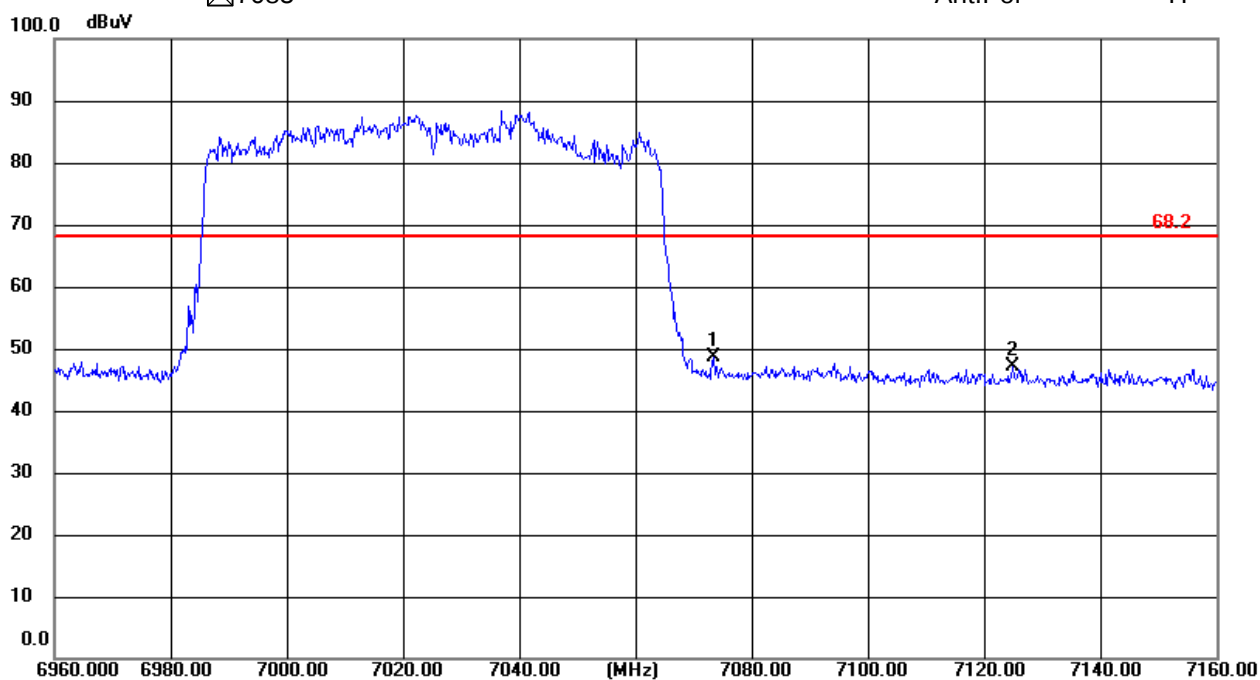

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 40

☒ 7085

Ant.Pol

V

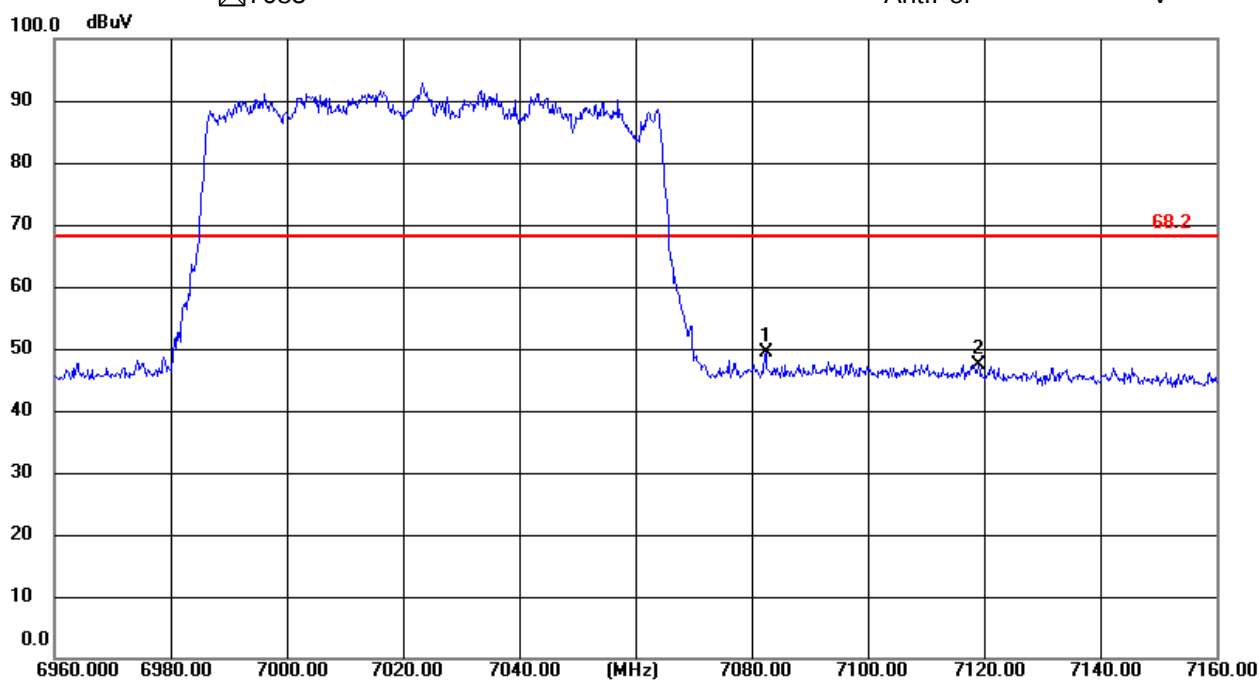

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 80-MIMO

Frequency(MHz):


7025

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5751.000	V	45.44	68.20
5844.000	V	48.63	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
5770.500	H	45.35	68.20
5890.500	H	47.30	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

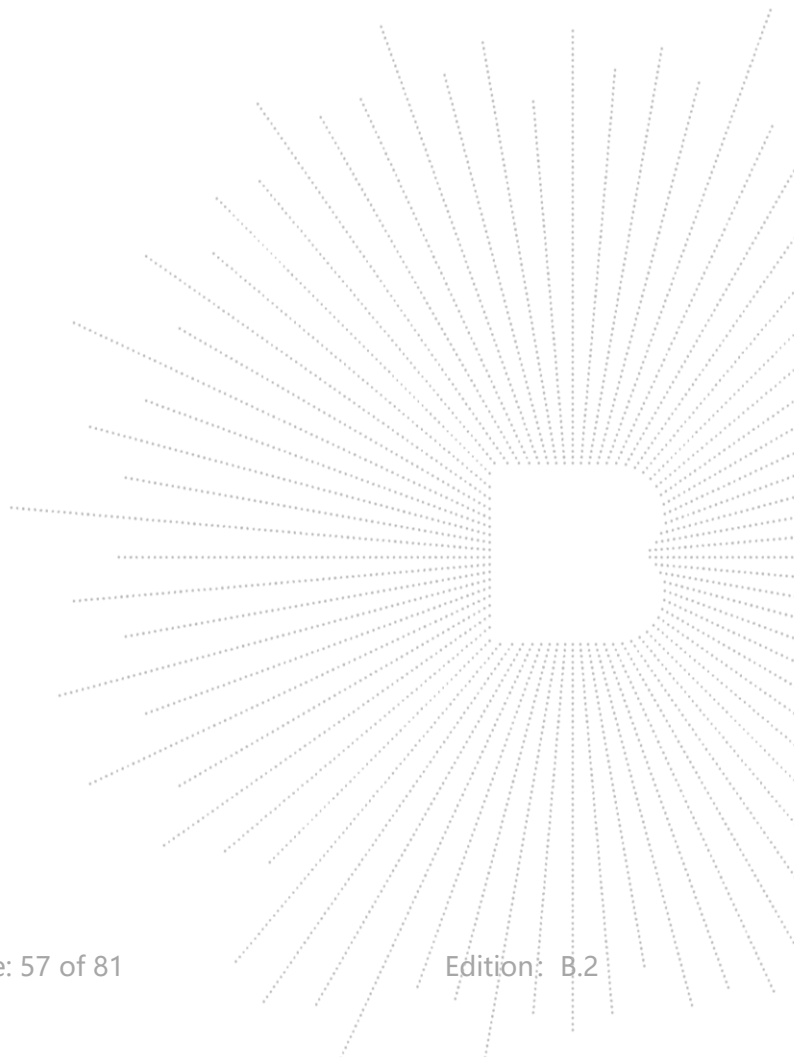

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 80

☒ 7025

Ant.Pol

H

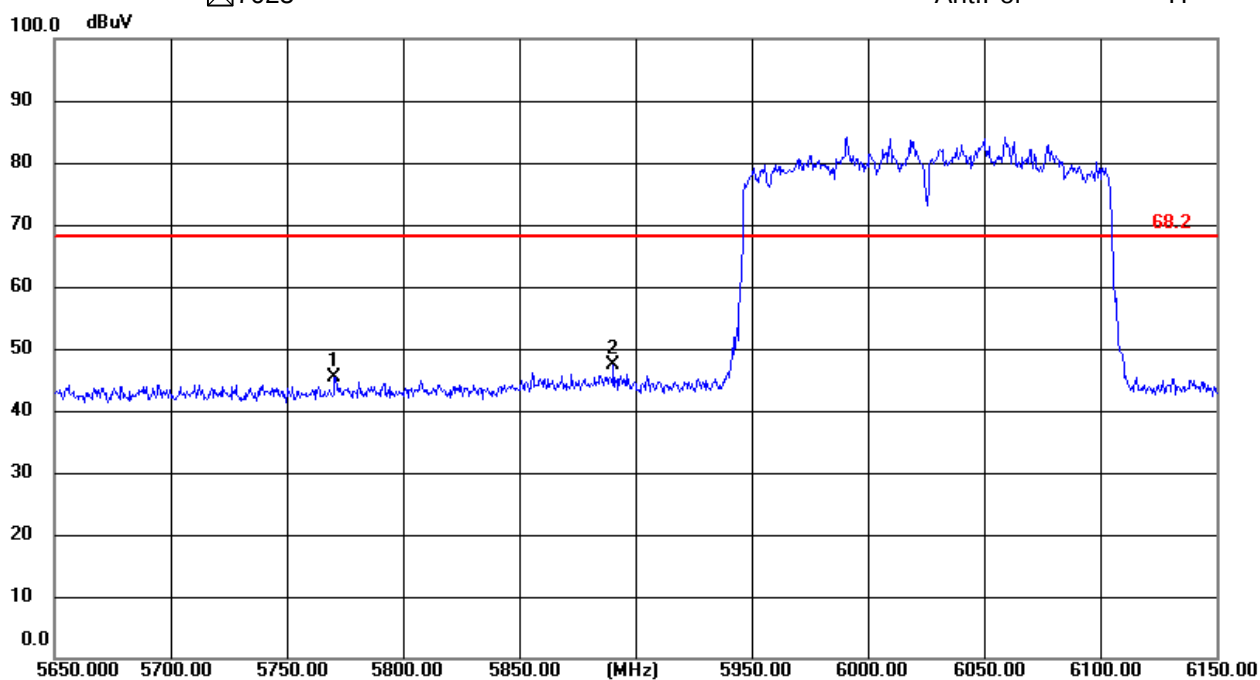

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 80

☒ 7025

Ant.Pol

V

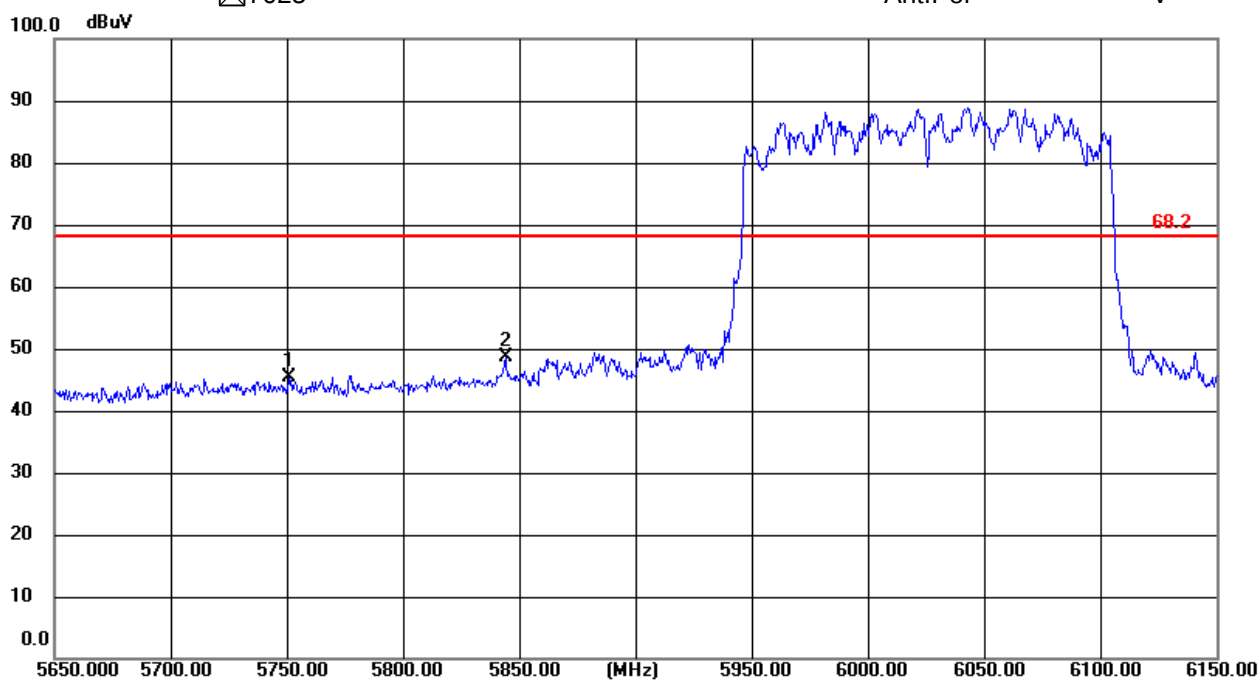

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11AX 160-MIMO Frequency(MHz): 6985

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
6812.680	V	51.73	68.20
7145.020	V	50.27	68.20

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)
6853.860	H	50.43	68.20
7163.000	H	48.89	68.20

Note:

- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
- (2) Emission Level= Reading Level+Correct Factor.
- (3) Correct Factor= Ant_F + Cab_L - Preamp

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 160

☒ 6985

Ant.Pol

H

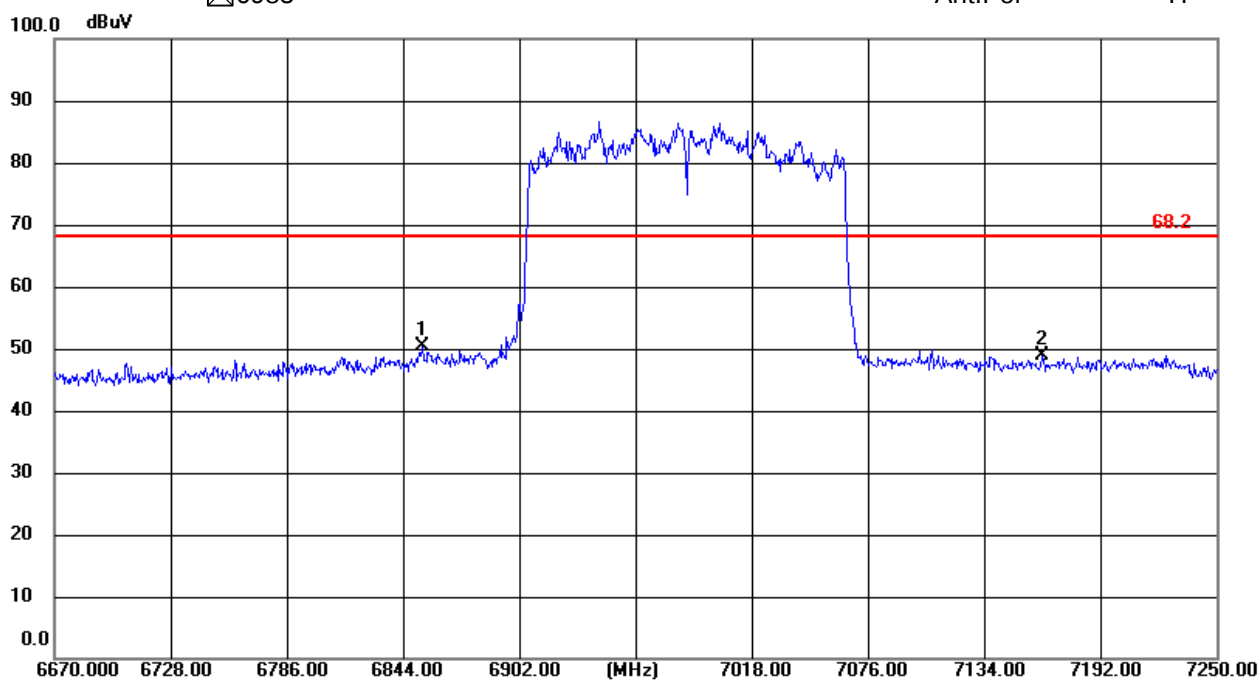

U-NII - 8


Test Model Undesirable radiated Spurious Emission in Restricted Band (6885-7115MHz)

☒ 802.11AX 160

☒ 6985


Ant.Pol

V

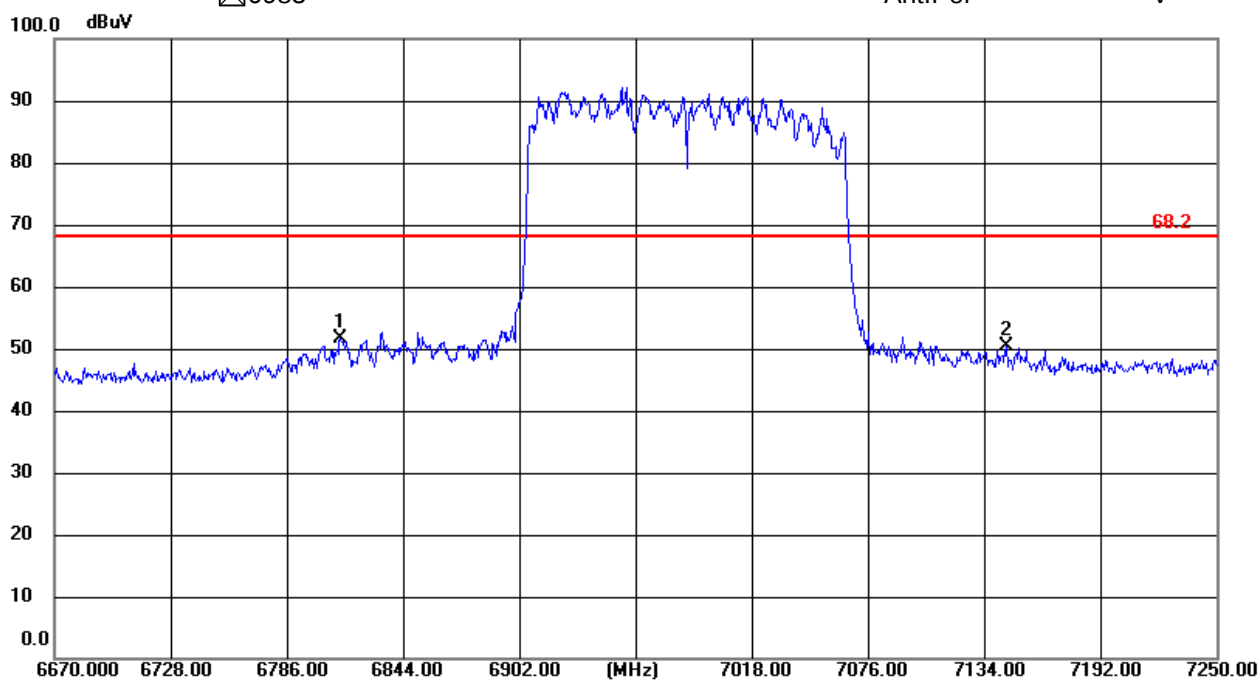

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup

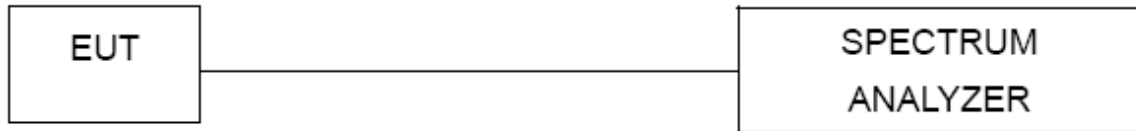

8.2 Limit

For a standard power access point (6SD) and fixed client (6FC) device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point (6ID) operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device (6PP) operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For client devices(6FX), except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

For client devices(6XD) operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

8.3 Test Procedure

For devices operating in the bands 5.925–7.125 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.


Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


8.5 Test Result

Please refer to Appendix G
Test Result: Pass

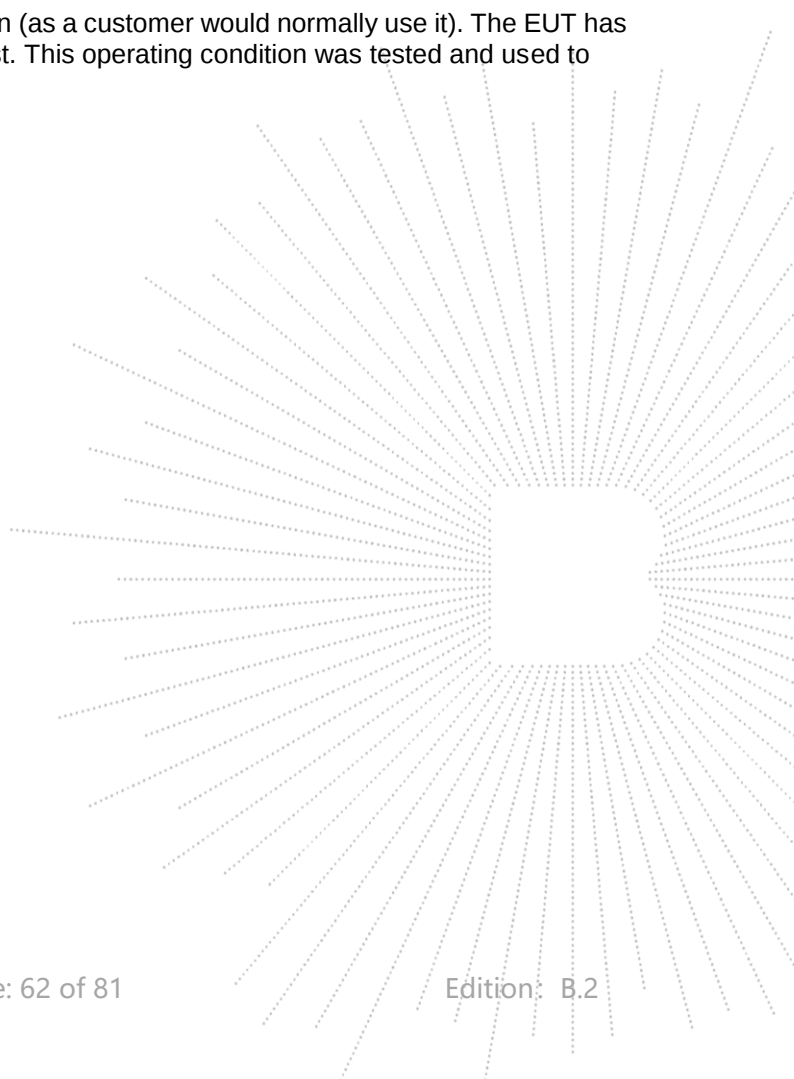

9. 26dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

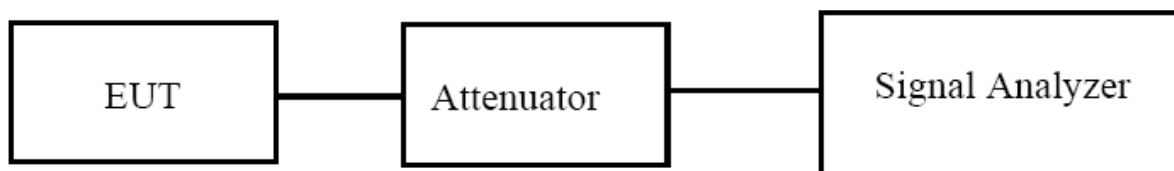

9.2 Limit

The maximum transmitter channel bandwidth for U–NII devices in the 5.925–7.125 GHz band is 320 megahertz.

9.3 Test Procedure


- a) Set RBW = approximately 1% of the emission bandwidth.
 - b) Set the VBW > RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- The following procedure shall be used for measuring (99 %) power bandwidth:
1. Set center frequency to the nominal EUT channel center frequency.
 2. Set span = 1.5 times to 5.0 times the OBW.
 3. Set RBW = 1 % to 5 % of the OBW
 4. Set VBW $\geq 3 \cdot$ RBW
 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
 6. Use the 99 % power bandwidth function of the instrument (if available).
 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

9.5 Test Result

Please refer to Appendix E and Appendix F
Test Result: Pass

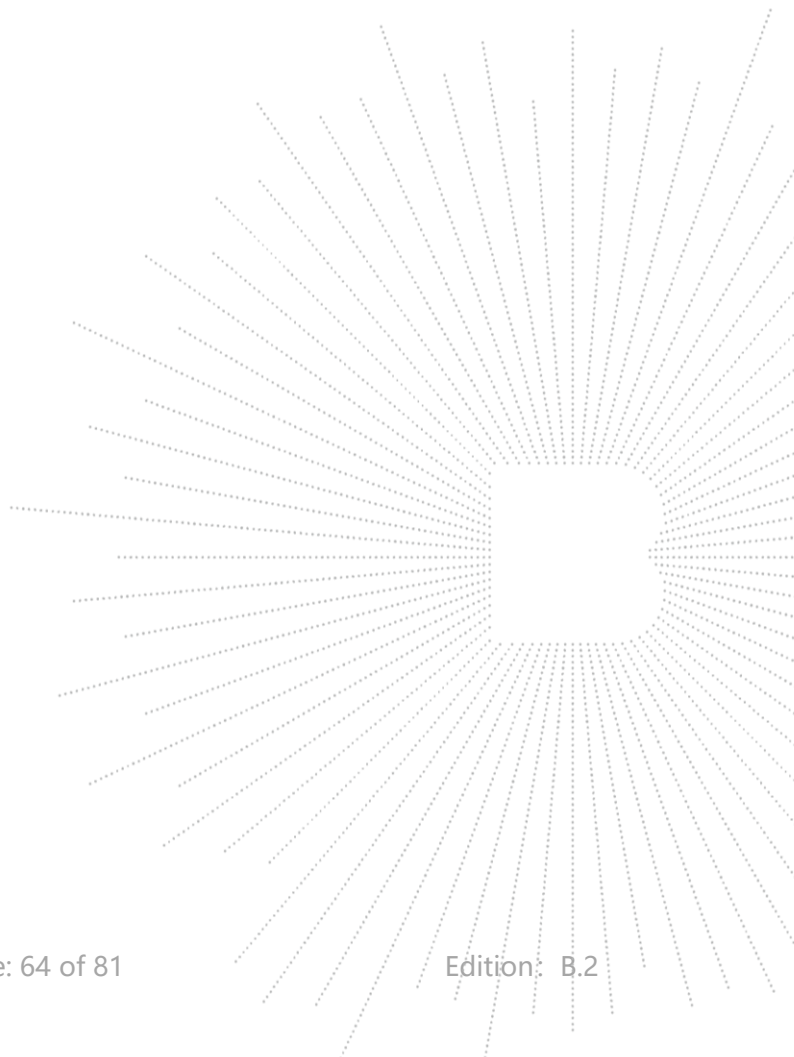

10. Maximum Conducted Output Power and Maximum EIRP

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

For a standard power access point (6SD) and fixed client (6FC) device operating in the 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

For an indoor access point (6ID) operating in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For a subordinate device (6PP) operating under the control of an indoor access point in the 5.925–7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

For client devices(6FX), except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925–6.425 GHz and 6.525–6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

For client devices(6XD) operating under the control of an indoor access point in the 5.925–7.125 GHz bands, the maximum power spectral density must not exceed –1 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

10.5 Test Result

Please refer to Appendix D:
Test Result: Pass

11. In-Band Emission (Emission Mask)

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of –27 dBm/MHz.

(7) For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

11.3 Test Procedure

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW or 99% of the occupied bandwidth.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:

- a) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
- b) Suppressed by 28 dB at one channel bandwidth from the channel center.
- c) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

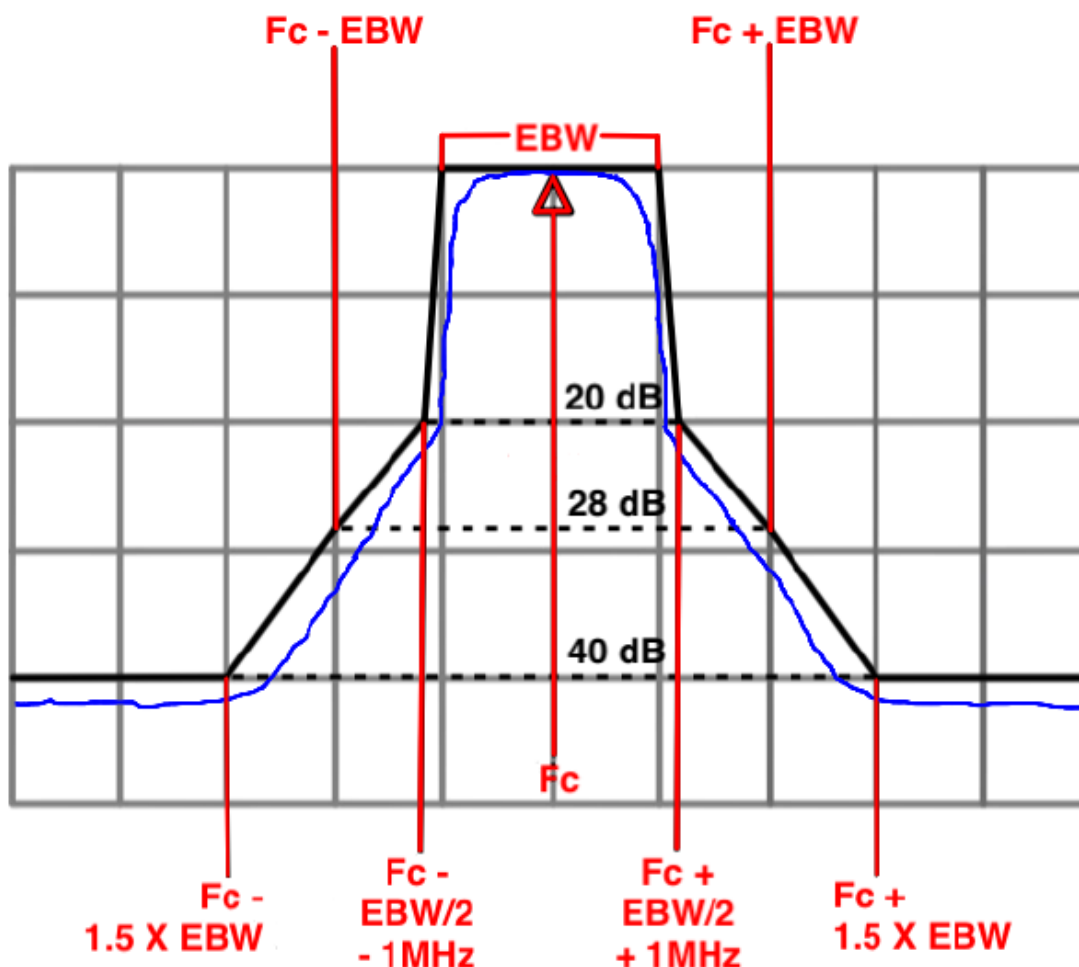


Figure 5. Generic Emission Mask

If a device utilizes channel puncturing the following additional requirements shall be met.

1. Standard Power Devices:

- a. The device shall meet the FCC mask for the full nominal bandwidth regardless of whether the punctured channel portion is at the channel edge or internal to the channel. As an example, if a 40 megahertz sub-channel is punctured from a 160 megahertz channel, this new configuration shall still meet the FCC mask based on a 160 megahertz nominal bandwidth; i.e., at the edges of the nominal channel. Nominal bandwidth as defined here refers to 20, 40, 80, 160 & 320 megahertz bandwidths. Test data shall be provided for each nominal bandwidth capable of puncturing with at least one configuration where the puncturing is at the outer edge of the nominal bandwidth and several configurations where the puncturing is internal to the nominal bandwidth (puncturing using $20 \times N$ subchannels, where N is an integer). The mask is constructed based on 26 dB bandwidth; and

b. The device, when deployed must comply with all the AFC requirements; i.e., the power transmitted within the punctured region must be at or below the power that an AFC would permit for transmitting across the punctured channels' bandwidth.


2. Low Power Indoor Devices: Channel puncturing is not permitted because, unlike standard power devices which receive channel/power information from the AFC, LPI devices have no such mechanism for ascertaining the level of suppression needed in the punctured region to protect incumbent operations

11.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data

11.5 Test Result

Please refer to Appendix I
Test Result: Pass

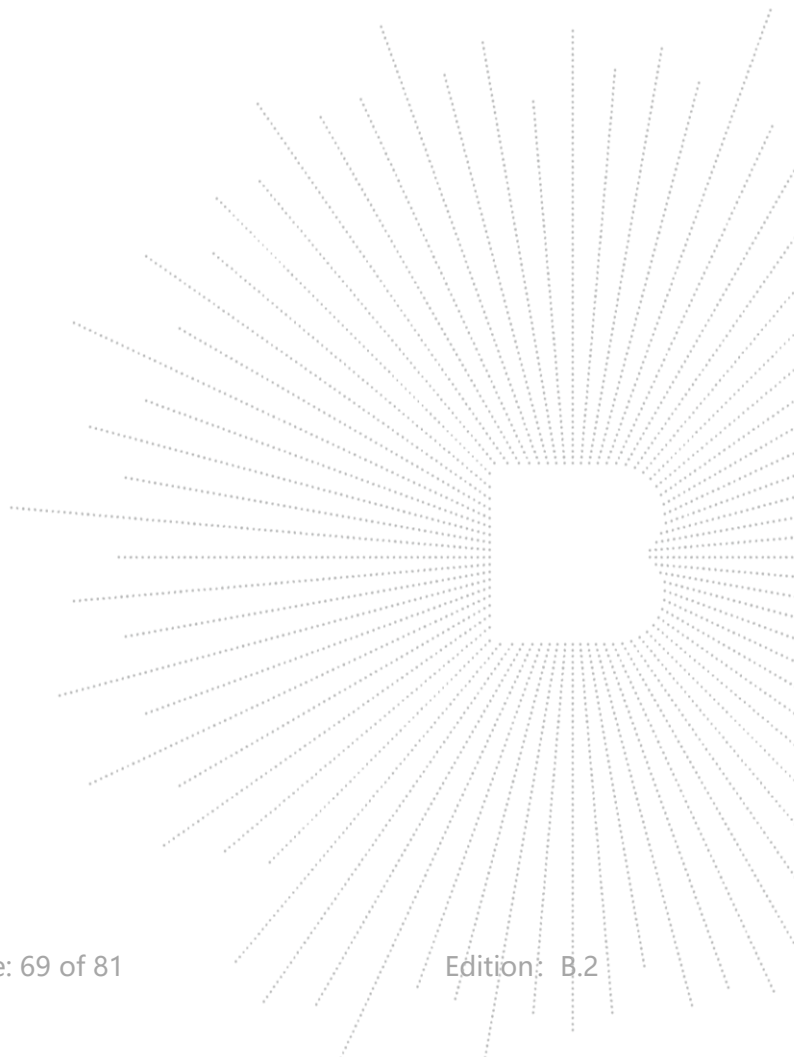

12. Spurious RF Conducted Emissions

12.1 Block Diagram Of Test Setup



12.2 Limit

For transmitters operating within the 5.925–7.125 GHz band: Any emissions outside of the 5.925–7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating within the 5.925–7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

12.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

12.4 Test Result

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

About:26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Please refer to Appendix H
Test Result: Pass

13. Frequency Stability Measurement

13.1 Block Diagram Of Test Setup



13.2 Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification)..

13.3 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and he limit is less than ± 20 ppm (IEEE 802.11nspecification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is -20°C ~ 70°C .

13.4 Test Result

Please refer to Appendix J
Test Result: Pass

14. Contention Based Protocol

14.1 Block Diagram Of Test Setup

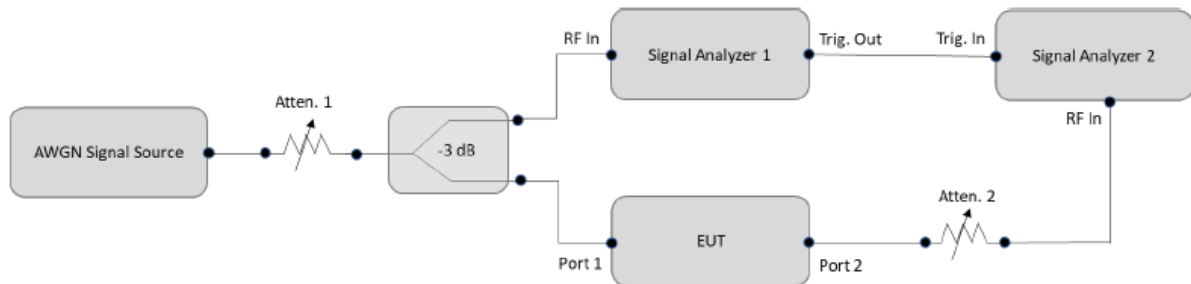


Figure 2. Contention-based protocol test setup, conducted method

14.2 Limit

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel (in which incumbent signal is transmitted) and stay off the incumbent channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm)¹. The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF

energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Required number of tests

Incumbent and EUT (access point, subordinate or client) signals may occupy different portions of the channel. Depending on the EUT transmission bandwidth and incumbent signal center frequency (simulated by a 10 MHz wide AWGN signal), the center frequency of the EUT signal F_{C1} may fall within the incumbent's occupied bandwidth (Figure 1.a), or outside of it (Figure 1.b).

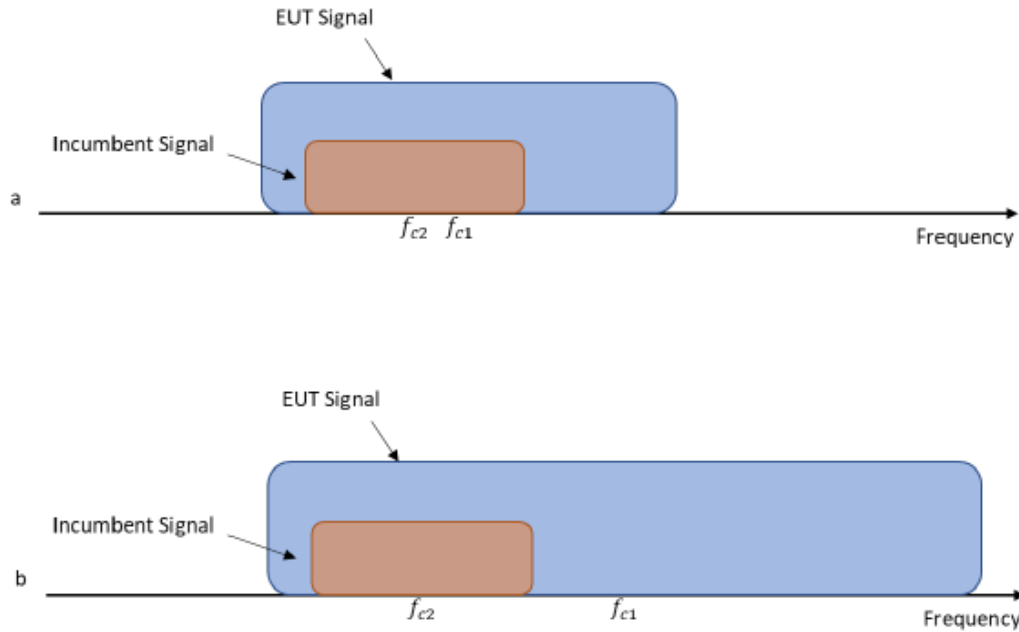


Figure 1. Two possible scenarios where a) center frequency of EUT transmission falls within incumbent's bandwidth, or b) outside of it

To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency F_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed;

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

F_{c1} : Center frequency of EUT transmission

F_{c2} : Center frequency of simulated incumbent signal

14.3 Test Procedure

To ensure the EUT is capable of detecting co-channel energy, the first step is to configure the EUT to transmit with a constant duty cycle.² To simulate an incumbent signal, a signal generator (or similar source) that is capable of generating band-limited additive white Gaussian noise (AWGN) is required. Depending on the EUT antenna configuration, the AWGN signal can be provided to the EUT receiver via a conducted method (Figure 2) or a radiated method (Figure 3). Figure 2 shows the conducted test setup where a band-limited AWGN signal is generated at a very low power level and injected into the EUT's antenna port. The AWGN signal power level is then incrementally increased while the EUT transmission is monitored on a signal analyzer ² to verify if the EUT can sense the AWGN signal and can subsequently cease its transmission. A triggered measurement, as shown in Figure 2, is optional, and assists with determining the time it takes the EUT to cease transmission (or vacate the channel) upon detecting RF energy. If the EUT has only one antenna port, then an AWGN signal source can be connected to the same antenna port.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer ², as shown in Figure 2. Ensure that the attenuator ² provides enough attenuation to not overload the signal analyzer ² receiver.
4. Monitoring the signal analyzer ², verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal.
Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer ¹ and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer ¹.
8. Monitor the signal analyzer ² to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

14.4 Test Result

Please refer to Appendix A & Appendix B
Test Result: Pass

15. Duty Cycle Of Test Signal

15.1 Standard Requirement

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

15.2 Formula


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

15.3 Test Procedure

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

15.4 Test Result

Please refer to Appendix C: Duty Cycle
Test Result: Pass

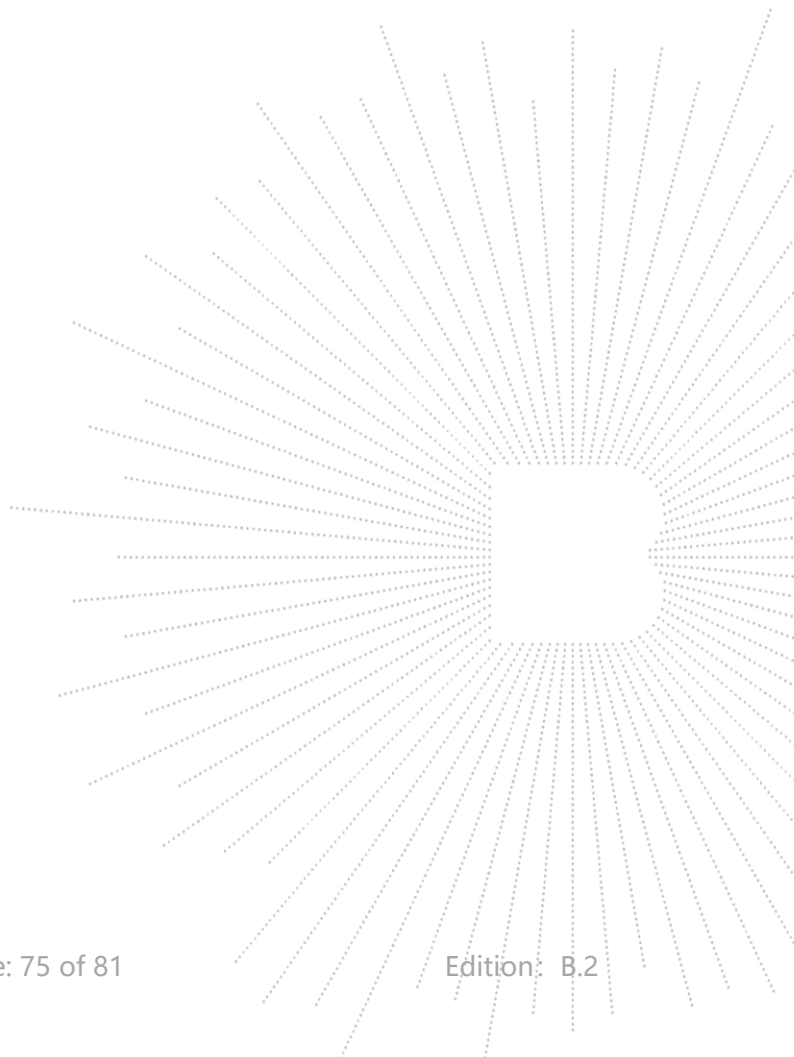


16. Antenna Requirement

16.1 Limit

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

16.2 Test Result

The EUT antenna is internal antenna, fulfill the requirement of this section.

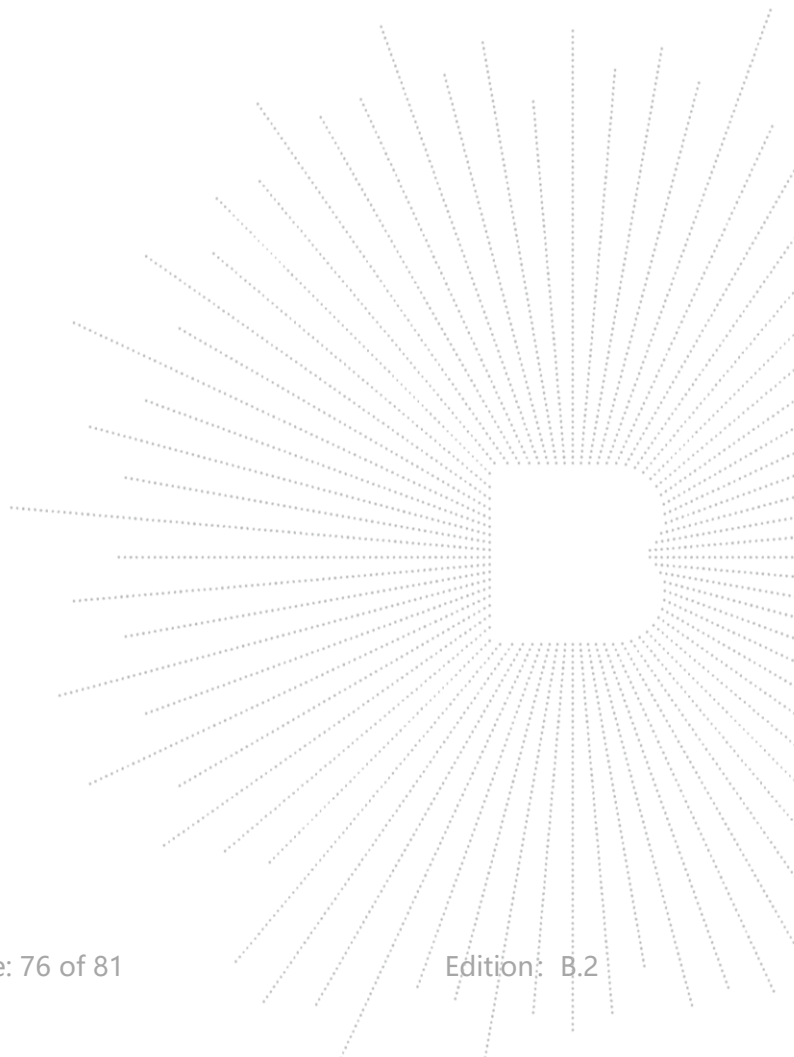

17. EUT Photographs

EUT Photo 1



EUT Photo 2



EUT Photo 3



EUT Photo 4



NOTE: Appendix-Photographs Of EUT Constructional Details.


18. EUT Test Setup Photographs

Conducted emissions Photo



Radiated Measurement Photos



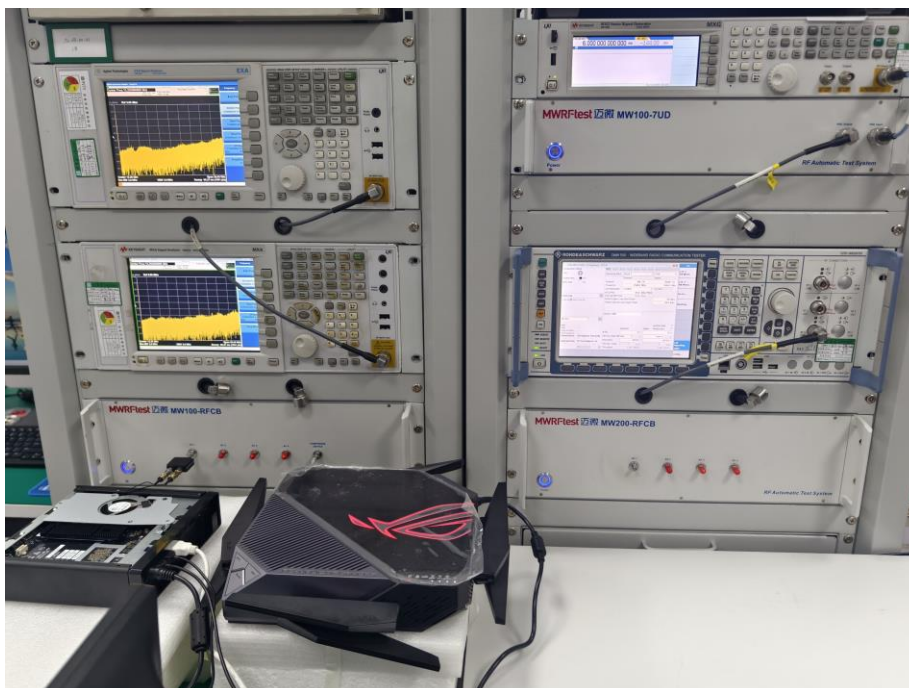

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****