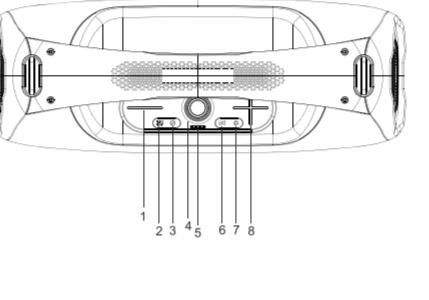


1	2	3	4	5	6
			修改区域	描述	日期 担当

COMPAQ CMQ 100W	Wireless speaker - CMQ100W	Wireless speaker - CMQ100W	Wireless speaker - CMQ100W	Wireless speaker - CMQ100W
<p><b>Wireless Speaker Instructions</b> Portable Wireless Speaker</p>  <p><b>Technical Specifications:</b></p> <p>Wireless standard: 5.1 Transmission distance: 10 meters Output power: 50W+15W*2+10W*2 Playing time: 3 - 6 Hours Frequency effect: 80Hz-15KHz Speaker: 5" woofer+3"2 median +2.5"2 tweeter Input power: 5V === 2A Maximum current consumption: 2A Battery type: 18650 lithium ion battery 15600mAh Audio signal input interface: standard Φ3.5mm headphone jack (stereo)</p> <p><b>Features:</b></p> <ol style="list-style-type: none"> <li>1. Wireless connection</li> <li>2. Memory function, breakpoint resuming</li> <li>3. Support U disk / TF card / AUX playback mode</li> <li>4. Built-in lithium ion battery</li> <li>5. Support MP3/WAV/WMA/FLAC/APE music format decoding</li> <li>6. Using high-fidelity speakers, the sound is more natural and delicate</li> <li>7. Level 6 waterproof</li> <li>8. 1+1 device serial connection function</li> <li>9. Wear a wireless microphone</li> </ol> <p><b>WIRELESS SPEAKER INSTRUCTIONS</b></p>	 <p>Wireless speaker - CMQ100W</p> <p><b>CMQ100W button indication section view</b></p>	<p><b>Button instruction:</b></p> <ol style="list-style-type: none"> <li>1. Key- Click: Previous</li> <li>2. EQ key</li> <li>3. On button</li> <li>4. Knob</li> <li>5. Power indicator</li> <li>6. Serial key</li> <li>7. Lamp button</li> <li>8. Key+ Click: toggle light mode</li> <li>9. AUX jack</li> <li>10. USB connector</li> <li>11. TF jack</li> <li>12. Type-C jack</li> </ol> <p><b>Directions for use:</b></p> <ol style="list-style-type: none"> <li>1. Wireless pairing 1.1. Before using wireless pairing, first turn on the audio power, it is already the default wireless model.</li> <li>1.2. Turn on the wireless device, search for CMQ100W, connect and pair, connect after success, start playing music experience.</li> <li>2. Suitable for various mobile phone accessories wireless technology, wireless adapter, wireless player.</li> <li>3. Voice prompt 3.1. There is a voice prompt when turning on/off; 3.2. When the volume is increased to the maximum volume, there will be a voice prompt, and the minimum volume will not have a voice prompt.</li> <li>3.3. Automatically shut down after detecting the low power prompt for 3 times;</li> <li>4. Mode switching 4.1. It enters the wireless mode by default when it is turned on. The sequence of mode switching is as follows: Wireless mode-TF card mode-USB mode-AUX mode. 4.2. Mode: Post-insertion priority.</li> <li>5. TWS Operating Instructions Open any two speakers at the same time, click one TWS serial key. When you hear the "beep" to enter the TWS search, when the TWS connection is successful, When the connection prompt tone sounds, the host indicator flashes and the copilot lights up.</li> <li>6. Play indicator Wireless search status: white light flashing, about 0.5 seconds/time; Wireless pairing status: white light is always on Play status: the white light flashes slowly for about 1 second/time;</li> </ol>	<p>7. Charging indicator When charging, 3 water lamps flash from left to right. Battery 35%, the first one is normally on, and 2,3 flashes 7.0% of the power, the 1-2 are normally on, and the 3 are flashing. The 1-2-3 are always on when the power is 100% 7. Volume Turn on the default speaker volume at 70%.</p> <p>8. Charging and using: This machine has a built-in overcharge protection circuit, which can be connected to a computer or charger for a long time, about four hours. Charging is complete. The play time of each battery will vary depending on the volume used rather different.</p> <p>9. If there is no working state, it will automatically shut down after 15 minutes.</p> <p><b>Troubleshooting:</b></p> <ol style="list-style-type: none"> <li>1. Automatic shutdown: When the battery power is low, the battery protection will be turned on automatically, please charge it for 4 hours before use.</li> <li>2. Unable to play music: The music file storage path cannot be recognized by the player. Please store the music file in the root directory of the removable device.</li> <li>3. There is no sound when connected to the computer: the computer interface is connected incorrectly, please select the correct audio output port</li> <li>4. There is no response to the keys or the function is disordered: try again after shutting down.</li> <li>5. When the machine is abnormal, use a slender round bar to press the RESET hole behind the AUX to reset</li> </ol>	<p><b>Product warranty</b></p> <p>Username: _____</p> <p>Contact number: _____</p> <p>Date of purchase: _____</p> <p>Product number: _____</p> <p>Maintenance failure: _____</p> <p>Note: The warranty period is one year</p>

成品尺寸:70.2x122.7mm

材质工艺:128g双铜, 单张双面四色印刷, 风琴折

注:做大货前先打样给业务确认!才可生产

深圳品质人生科技有限公司		订单编号:			
		料号:	09-A60-06-0201		
设计:	Zep	2023-09-11	文件编号:	001	
业务:	Alisa		名称:	A60-美国COMPAQ-说明书	
电子:			审核:		页次: 1/1
结构:			核准:		版次: 1.0

1	2	3	4	5	6
---	---	---	---	---	---

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.