

TEST REPORT

Report No.: 8132EU011202W3

Applicant: Shenzhen Ruiben Technology Co., LTD

Address: 1502 Yingfei Tuo Building,Guansheng Fifth Road, Luhuhu Community,Guanhu Street,Longhua District,Shenzhen, Guangdong, China

Product Name: 2 in 1 Laptop

Model No.: RB130A

Trademark: OX9

FCC ID: 2BC4S-OX9RB130A

Test Standard(s): 47 CFR Part 15 Subpart C, Section 15.247

Date of Receipt: Sep. 12, 2023

Test Date: Sep. 12, 2023 – Oct. 19, 2023

Date of Issue: Nov. 20, 2023

ISSUED BY:

SHENZHEN EU TESTING LABORATORY LIMITED



Prepared by:

Mikey Zhu/ Engineer

Reviewed and Approved by:

Sally Zhang/ Manager

Revision Record

Report Version	Issued Date	Description	Status
V0	Nov. 20, 2023	Original	Valid



Table of Contents

1	COVER PAGE.....	1
2	GENERAL INFORMATION	5
2.1	APPLICANT INFORMATION.....	5
2.2	MANUFACTURER INFORMATION.....	5
2.3	FACTORY INFORMATION.....	5
2.4	GENERAL DESCRIPTION OF E.U.T.....	5
2.5	TECHNICAL INFORMATION OF E.U.T.....	6
3	TEST SUMMARY.....	9
3.1	TEST STANDARD	9
3.2	TEST VERDICT.....	9
3.3	TEST LABORATORY	9
4	TEST CONFIGURATION.....	10
4.1	TEST ENVIRONMENT	10
4.2	TEST EQUIPMENT	10
4.3	DESCRIPTION OF SUPPORT UNIT	11
4.4	TEST MODE	11
4.5	MEASUREMENT UNCERTAINTY	11
4.6	DEVIATION FROM STANDARDS	11
4.7	ABNORMALITIES FROM STANDARD CONDITION	11
5	TEST ITEMS	12
5.1	ANTENNA REQUIREMENT.....	12
5.1.1	Test Requirement	12
5.1.2	Antenna Anti-Replacement Construction.....	12
5.1.3	Antenna Gain	12
5.2	CONDUCTED EMISSION AT AC POWER LINE	13
5.2.1	Test Requirement	13
5.2.2	Test Setup Diagram	13
5.2.3	Test Procedure	13
5.2.4	Test Data.....	13
5.3	OCCUPIED BANDWIDTH	16
5.3.1	Test Requirement	16
5.3.2	Test Setup Diagram	16
5.3.3	Test Procedure	16
5.3.4	Test Data.....	16
5.4	MAXIMUM CONDUCTED OUTPUT POWER	17
5.4.1	Test Requirement	17
5.4.2	Test Setup Diagram	17
5.4.3	Test Procedure	18
5.4.4	Test Data.....	18
5.5	POWER SPECTRAL DENSITY	19
5.5.1	Test Requirement	19
5.5.2	Test Setup Diagram	19
5.5.3	Test Procedure	19
5.5.4	Test Data.....	19
5.6	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS (CONDUCTED)	20
5.6.1	Test Requirement	20
5.6.2	Test Setup Diagram	20
5.6.3	Test Procedure	21
5.6.4	Test Data:	21
5.7	BAND EDGE EMISSIONS (RESTRICTED FREQUENCY BANDS)	22

5.7.1	Test Requirement	22
5.7.2	Test Setup Diagram	22
5.7.3	Test Procedure	23
5.7.4	Test Data.....	23
5.8	RADIATED SPURIOUS EMISSIONS	48
5.8.1	Test Requirement	48
5.8.2	Test Setup Diagram	49
5.8.3	Test Procedure	50
5.8.4	Test Data.....	50
ANNEX A	TEST SETUP PHOTOS	62
ANNEX B	EXTERNAL PHOTOS	62
ANNEX C	INTERNAL PHOTOS	62
ANNEX A	TEST RESULTS.....	63



2 General Information

2.1 Applicant Information

Applicant	Shenzhen Ruiben Technology Co., LTD
Address	1502 Yingfei Tuo Building,Guansheng Fifth Road, Luhui Community,Guanhu Street,Longhua District,Shenzhen, Guangdong, China

2.2 Manufacturer Information

Manufacturer	Shenzhen COI Technology Co., LTD
Address	Room 406,B Building, SIBIONO BUILDING,19,1st Science & Technology Middle Road, Nanshan district, Shenzhen

2.3 Factory Information

Factory	Shenzhen COI Technology Co., LTD
Address	Room 406,B Building, SIBIONO BUILDING,19,1st Science & Technology Middle Road, Nanshan district, Shenzhen

2.4 General Description of E.U.T.

Product Name	2 in 1 Laptop
Model No. Under Test	RB130A
List Model No.	N/A
Description of Model differentiation	N/A
Trade Mark	OX9
Rating(s)	Input: 100-240V~50/60Hz 1.5A Output: 5V--- 3A, 9V--- 3A, 12V--- 3A, 15V--- 3A, 20V--- 3.25A 65W Max. Battery: Rated Voltage: 11.55V---, 3900mAh; Limited Voltage: 13.2V---, 3900mAh
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Test Sample No.	-1/2(Normal Sample), -2/2(Engineering Sample)
Hardware Version	03
Software Version	Windows11 Pro 22H2
Remark	N/A

2.5 Technical Information of E.U.T.

Technology Used	WiFi 2.4GHz: 802.11b, 802.11g, 802.11n, 802.11ac, 802.11ax
-----------------	--

The requirement for the following technical information of the EUT was tested in this report:

Technology	2.4G WIFI			
Operation Mode	☒ b	☒ g	☒ n(HT20)	☒ n(HT40)
	☒ ac(VHT20)	☒ ac(VHT40)	☒ ax(HEW20)	☒ ax(HEW40)
Operating Frequency	802.11b/g/n(HT20)/ac(VHT20)/ax(HEW20): 2412MHz to 2462MHz 802.11n(HT40)/ac(VHT40)/ax(HEW40): 2422MHz to 2452MHz			
Number of Channels:	802.11b/g/n(HT20)/ac(VHT20)/ax(HEW20): 11 Channels 802.11n(HT40)/ac(VHT40)/ax(HEW40): 7 Channels			
Modulation Type:	DSSS, OFDM, OFDMA			
Antenna Type	Antenna 1	PIFA Antenna		
	Antenna 2			
Antenna Gain	Antenna 1	0.78 dBi		
	Antenna 2	0.98 dBi		
Total directional gain	ANT1+ANT2	Correlated: 3.89 dBi Formulas: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / NANT]$ dBi Uncorrelated: 0.88 dBi Formulas: Directional gain = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10}) / NANT]$ dBi		

All channel was listed on the following table:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Modulation technology	Modulation Type	Transfer Rate (Mbps)(Single RF path)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/11
OFDM (802.11g)	BPSK	6/9
	QPSK	12/18
	16QAM	24/36
	64QAM	48/54
OFDM (802.11n/ac-20 MHz)	BPSK	6.5/7.2
	QPSK	13/19.5/14.4/21.7
	16QAM	26/39/28.9/43.3
	64QAM	52/58.5/65/57.8/65/72.2
OFDM (802.11n/ac-40 MHz)	BPSK	13.5/15
	QPSK	27/40.5/30/45
	16QAM	54/81/60/90
	64QAM	108/121.5/135/120/150
OFDMA (802.11ax-20 MHz)	BPSK	4
	QPSK	16/24/17/26
	16QAM	33/49/34/52
	64QAM	65/73/81/69/77/86
	256QAM	98/108/103/115
	1024QAM	122/135/129/143
OFDMA (802.11ax-40 MHz)	BPSK	8/9
	QPSK	33/49/34/52
	16QAM	65/98/69/103
	64QAM	130/146/163/138/155/172
	256QAM	195/217/207/229
	1024QAM	244/271/258/287

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	
Output Power	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9
Occupied Bandwidth	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9
Conducted Spurious Emission	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9
Conducted Emission	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9
Radiated Spurious Emission	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9
Band Edge	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9
Power spectral density (PSD)	11b/11g/11n20/11n40/ac20/ac40/ax20/ax40	1/6/6.5/13.5/6.5/13.5/4/8 Mbps	1/6/11	3/6/9

Note: The above EUT information in section 2.4 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 Test Summary

3.1 Test Standard

The tests were performed according to following standards:

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices
3	KDB Publication 558074 D01v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

Remark:

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product maybe which result in lowering the emission/immunity should be checked to ensure compliance has been maintained.

3.2 Test Verdict

No.	Description	FCC Part No.	Verdict	Remark
1	Antenna Requirement	15.203	Pass	Note ¹
2	Conducted Emission at AC Power Line	15.207	Pass	--
3	Occupied Bandwidth	15.247(a)(2)	Pass	--
4	Maximum Conducted Output Power	15.247(b)(3)	Pass	--
5	Power spectral density (PSD)	15.247(e)	Pass	--
6	Emission in non-restricted frequency bands (Conducted)	15.247(d)	Pass	--
7	Band Edge Emissions (Restricted frequency bands)	15.247(d)	Pass	--
8	Radiated Spurious Emission	15.247(d)	Pass	--

3.3 Test Laboratory

Test Laboratory	Shenzhen EU Testing Laboratory Limited
Address	1/F, Bldg. B1, Fuqiao Fourth Industrial Area, Fuhai Street, Baoan District, Shenzhen, Guangdong, China
Designation Number	CN1368
Test Firm Registration Number	952583

4 Test Configuration

4.1 Test Environment

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	40% to 60%	
Atmospheric Pressure	90 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+15°C to +35°C
Working Voltage of the EUT	NV (Normal Voltage)	11.55V

4.2 Test Equipment

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	EE-004	2023/01/10	2024/01/09
EMI Test Receiver	Rohde & Schwarz	ESCI	EE-005	2023/01/10	2024/01/09
Test Software	Farad	EZ-EMC	EE-014	N.C.R	N.C.R

Radiated Emission and RF Test					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESPI	EE-006	2023/01/10	2024/01/09
Bilog Broadband Antenna	SCHWARZBECK	VULB 9163	EE-007	2023/01/14	2026/01/09
Double Ridged Horn Antenna	A-INFOMW	LB-10180-NF	EE-008	2023/01/12	2026/01/09
Pre-amplifier	Agilent	8447D	EE-009	2023/01/10	2024/01/09
Pre-amplifier	Agilent	8449B	EE-010	2023/01/10	2024/01/09
MXA Signal Analyzer	Agilent	N9020A	EE-011	2023/01/10	2024/01/09
MXG RF Vector Signal Generator	Agilent	N5182A	EE-012	2023/01/10	1 Year
Test Software	Farad	EZ-EMC	EE-015	N.C.R	N.C.R
MIMO Power Measurement Module	TSTPASS	TSPS 2023R	EE-016	2023/05/17	2024/05/16
RF Test Software	TSTPASS	TS32893 V2.0	EE-017	N.C.R	N.C.R
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	EE-402	2023/02/16	2024/02/15
Loop Antenna	TESEQ	HLA6121	EE-403	2023/02/16	2024/02/15
MXG RF Analog Signal Generator	Agilent	N5181A	EE-406	2023/02/16	2024/02/15
Constant Temperature Humidity Chamber	Guangxin	GXP-401	ES-002	2023/07/31	2024/07/30

4.3 Description of Support Unit

No.	Title	Manufacturer	Model No.	Serial No.
1	Adapter	IDEA POWER ELECTRONIC TECHNOLOGY(DONGGUAN)CO., LTD	YB-PO65WCAU	--

4.4 Test Mode

No.	Test Modes	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode.
TM5	802.11ac(VHT20) mode	Keep the EUT in 802.11ac(VHT20) transmitting mode.
TM6	802.11ac(VHT40) mode	Keep the EUT in 802.11ac(VHT40) transmitting mode.
TM7	802.11ax(HEW20) mode	Keep the EUT in 802.11ax(HEW20) transmitting mode.
TM8	802.11ax(HEW40) mode	Keep the EUT in 802.11ax(HEW40) transmitting mode.

4.5 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test Item	Measurement Uncertainty
Conducted Emission	2.64 dB
Occupied Channel Bandwidth	2.8 %
RF output power, conducted	0.68 dB
Power Spectral Density, conducted	1.37 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.11 dB
Temperature	0.8°C
Humidity	4%

4.6 Deviation from Standards

None.

4.7 Abnormalities from Standard Condition

None.

5 Test Items

5.1 Antenna requirement

5.1.1 Test Requirement

Test Requirement	According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.
------------------	---

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain


The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Conducted Emission at AC Power Line

5.2.1 Test Requirement

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices.		

5.2.2 Test Setup Diagram

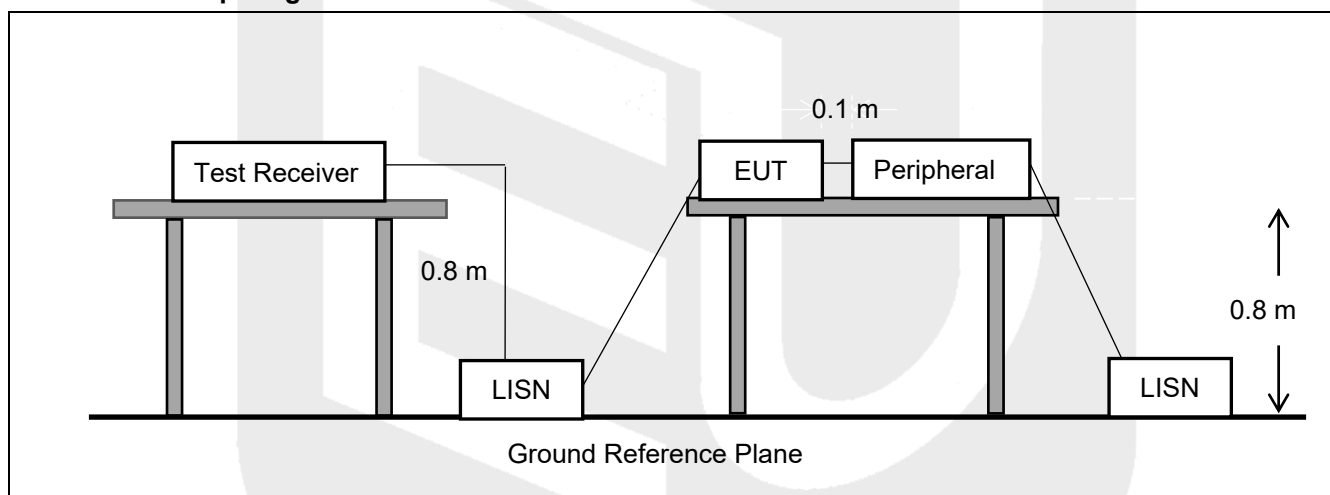

5.2.3 Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipment. Both sides of AC line are investigated to find out the maximum conducted emission according to the test standard regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 9kHz in 150kHz~30MHz.

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.


5.2.4 Test Data

PASS.

All modes have been tested and PASS. Only the worst case data was showed in the report, please to see the following pages.

Conducted Emission Test Data

Test Site: Shielded Room #1
Test Mode: TM1/ CH Middle
Comments: Live Line

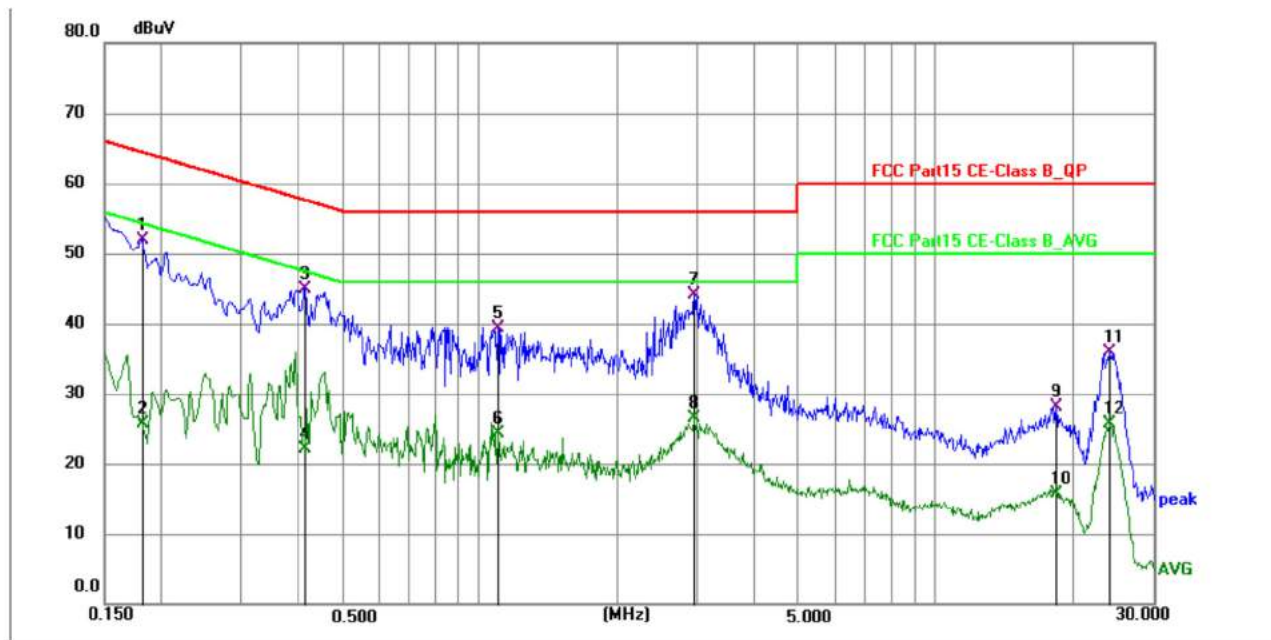


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1815	42.09	9.91	52.00	64.42	-12.42	QP	P	
2	0.1815	15.81	9.91	25.72	54.42	-28.70	AVG	P	
3	0.4110	35.04	9.96	45.00	57.63	-12.63	QP	P	
4	0.4110	12.23	9.96	22.19	47.63	-25.44	AVG	P	
5	1.0995	29.36	10.01	39.37	56.00	-16.63	QP	P	
6	1.0995	14.27	10.01	24.28	46.00	-21.72	AVG	P	
7 *	2.9490	33.99	10.02	44.01	56.00	-11.99	QP	P	
8	2.9490	16.44	10.02	26.46	46.00	-19.54	AVG	P	
9	18.3570	17.99	10.09	28.08	60.00	-31.92	QP	P	
10	18.3570	5.59	10.09	15.68	50.00	-34.32	AVG	P	
11	24.1305	25.74	10.21	35.95	60.00	-24.05	QP	P	
12	24.1305	15.48	10.21	25.69	50.00	-24.31	AVG	P	

Note: Level = Reading + Factor

Margin = Level - Limit

Conducted Emission Test Data

Test Site: Shielded Room #1
Test Mode: TM1/ CH Middle
Comments: Neutral Line

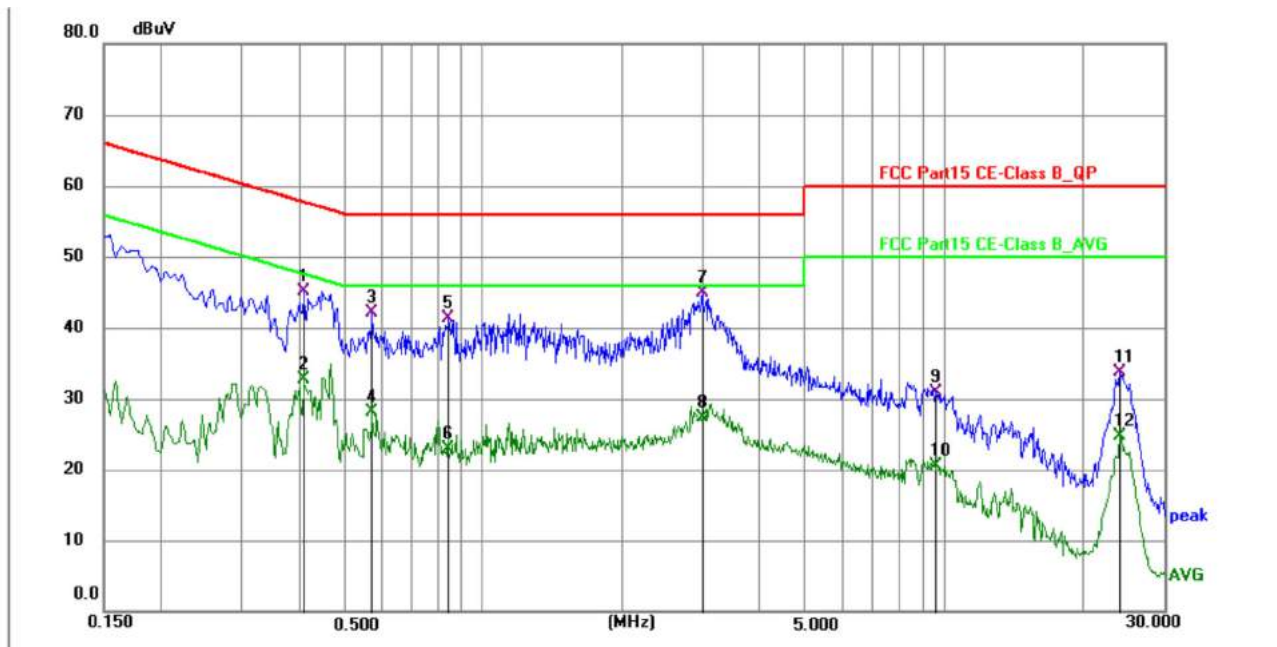

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4065	35.04	9.98	45.02	57.72	-12.70	QP	P	
2	0.4065	22.72	9.98	32.70	47.72	-15.02	AVG	P	
3	0.5730	32.17	10.00	42.17	56.00	-13.83	QP	P	
4	0.5730	18.12	10.00	28.12	46.00	-17.88	AVG	P	
5	0.8430	31.21	10.02	41.23	56.00	-14.77	QP	P	
6	0.8430	12.96	10.02	22.98	46.00	-23.02	AVG	P	
7 *	2.9805	34.85	10.01	44.86	56.00	-11.14	QP	P	
8	2.9805	17.23	10.01	27.24	46.00	-18.76	AVG	P	
9	9.6045	20.78	10.06	30.84	60.00	-29.16	QP	P	
10	9.6045	10.41	10.06	20.47	50.00	-29.53	AVG	P	
11	24.0495	23.59	10.19	33.78	60.00	-26.22	QP	P	
12	24.0495	14.43	10.19	24.62	50.00	-25.38	AVG	P	

Note: Level = Reading + Factor


Margin = Level - Limit

5.3 Occupied Bandwidth

5.3.1 Test Requirement

Test Requirement	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2 Test Setup Diagram

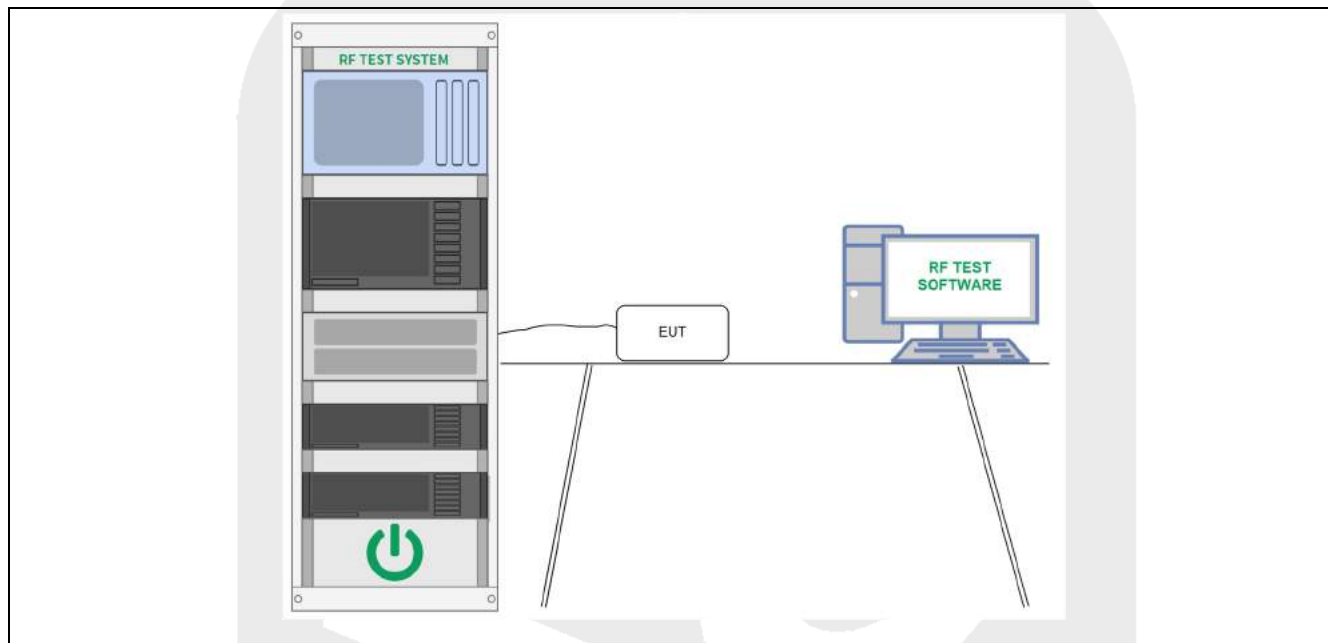

5.3.3 Test Procedure

- Set RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Data


Please refer to Annex D for details.

5.4 Maximum Conducted Output Power

5.4.1 Test Requirement

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum peak conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

5.4.2 Test Setup Diagram

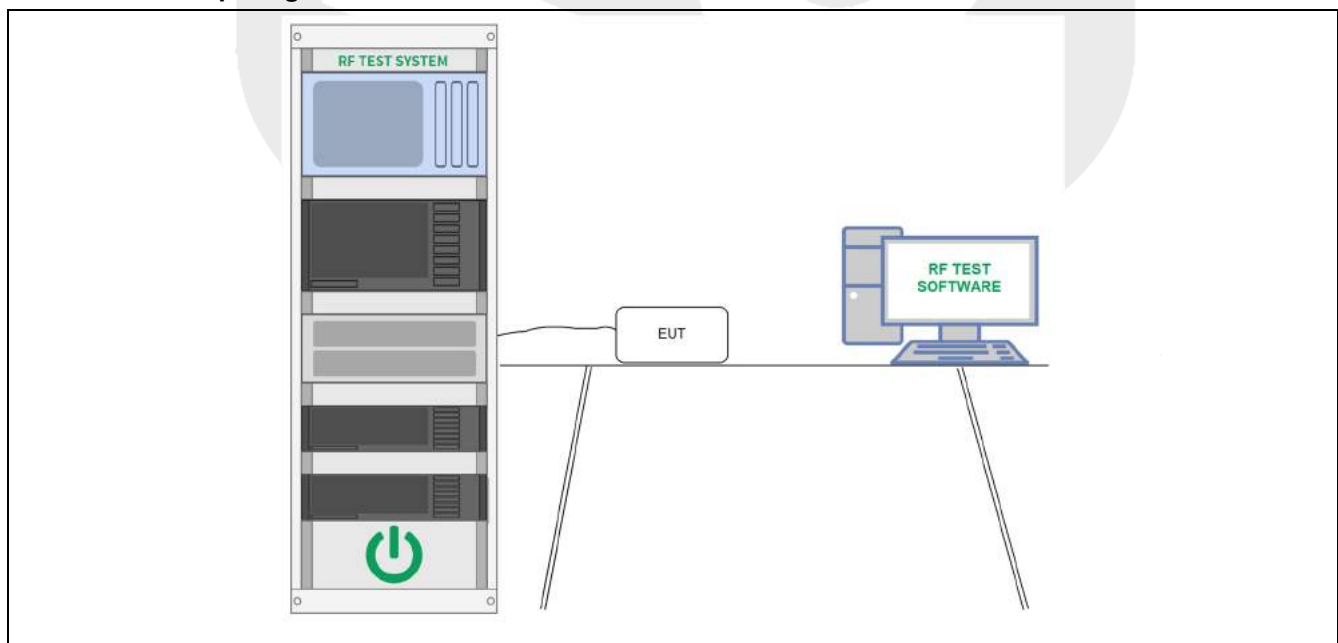

5.4.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.4.4 Test Data


Please refer to Annex D for details.

5.5 Power Spectral Density

5.5.1 Test Requirement

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.5.2 Test Setup Diagram

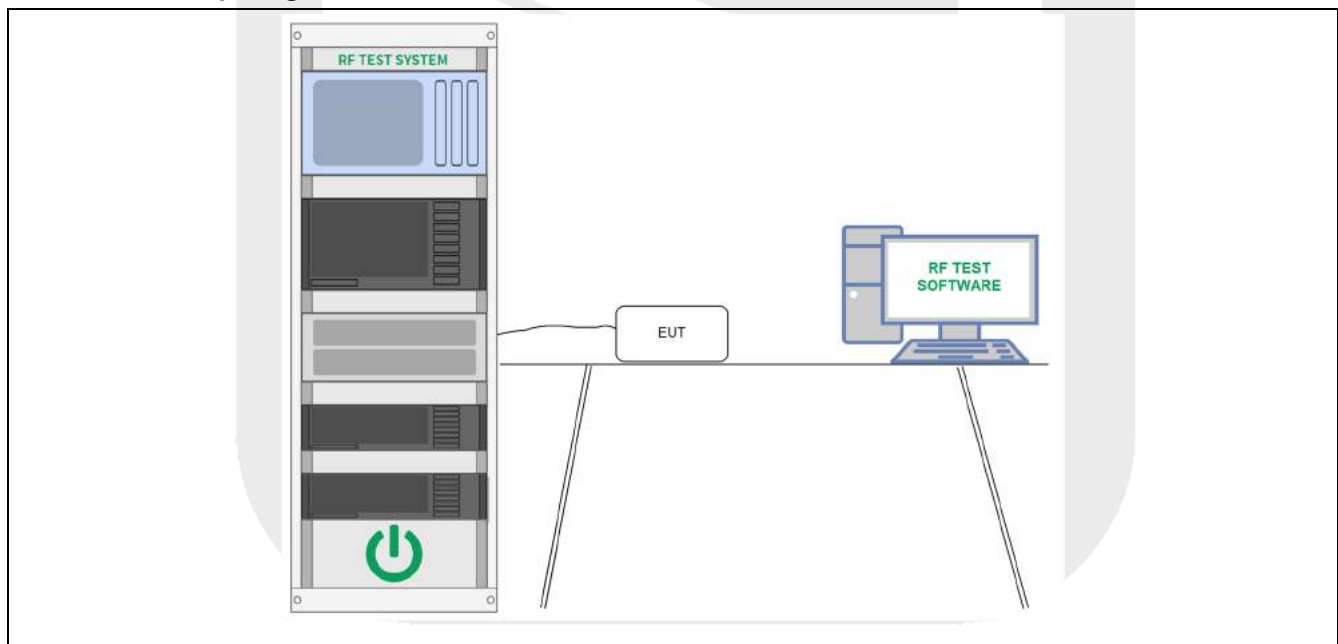

5.5.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.
Set the span to 1.5 times the DTS bandwidth.
Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
Set the VBW $\geq 3 \text{ RBW}$.
Detector = peak.
Sweep time = auto couple.
Trace mode = max hold.
Allow trace to fully stabilize.
Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.5.4 Test Data


Please refer to Annex D for details.

5.6 Emissions in Non-restricted Frequency Bands (Conducted)

5.6.1 Test Requirement

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.

5.6.2 Test Setup Diagram

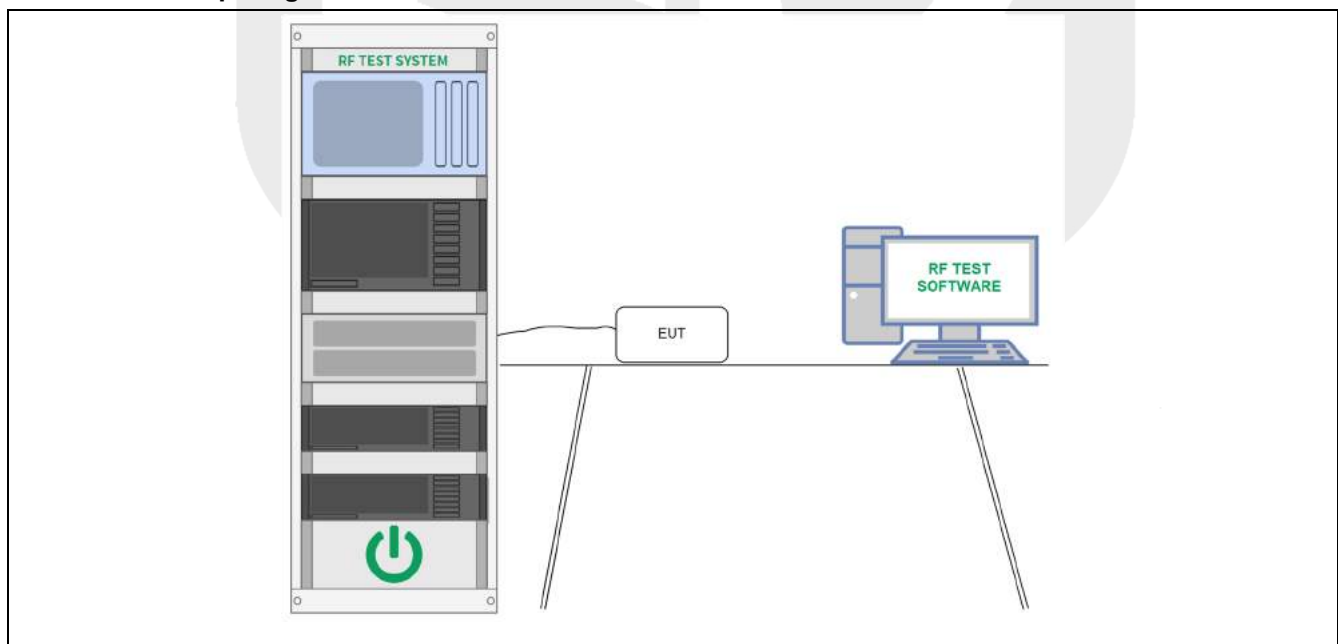

5.6.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.6.4 Test Data:


Please refer to Annex D for details.

5.7 Band Edge Emissions (Restricted frequency bands)

5.7.1 Test Requirement

Test Requirement	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. Note: 1) Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)]. 2) In the emission tables above, the tighter limit applies at the band edges. 3) For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. 4) For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).			
Test Method	ANSI C63.10-2020 section 11.12		

5.7.2 Test Setup Diagram

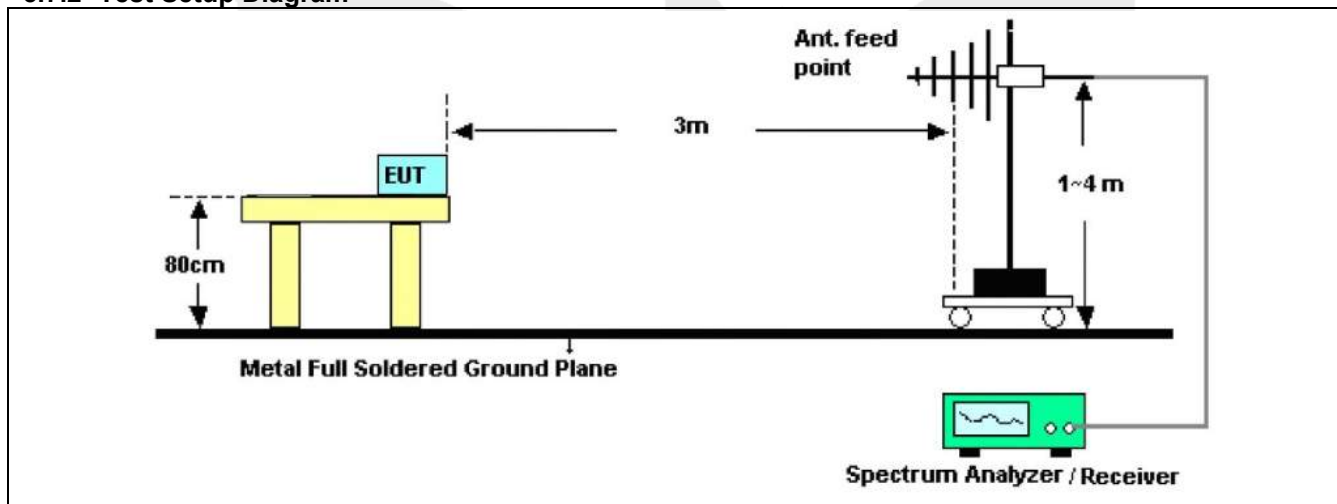

5.7.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold.

5.7.4 Test Data

PASS.

Please refer to the following pages.

Radiated Band Edge:
ANT 1:

ANT 1

Test Mode: 802.11b Mode				Test channel: Lowest				
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.55	29.15	3.41	34.01	51.10	74.00	-22.90	H
2400.00	61.87	29.16	3.43	34.01	60.45	74.00	-13.55	H
2390.00	54.30	29.15	3.41	34.01	52.85	74.00	-21.15	V
2400.00	63.91	29.16	3.43	34.01	62.49	74.00	-11.51	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.05	29.15	3.41	34.01	37.60	54.00	-16.40	H
2400.00	47.45	29.16	3.43	34.01	46.03	54.00	-7.97	H
2390.00	40.95	29.15	3.41	34.01	39.50	54.00	-14.50	V
2400.00	48.64	29.16	3.43	34.01	47.22	54.00	-6.78	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	53.60	29.28	3.53	34.03	52.38	74.00	-21.62	H
2500.00	49.14	29.30	3.56	34.03	47.97	74.00	-26.03	H
2483.50	56.04	29.28	3.53	34.03	54.82	74.00	-19.18	V
2500.00	51.82	29.30	3.56	34.03	50.65	74.00	-23.35	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.56	29.28	3.53	34.03	38.34	54.00	-15.66	H
2500.00	35.49	29.30	3.56	34.03	34.32	54.00	-19.68	H
2483.50	41.58	29.28	3.53	34.03	40.36	54.00	-13.64	V
2500.00	37.40	29.30	3.56	34.03	36.23	54.00	-17.77	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.59	27.53	5.47	33.92	50.67	74.00	-23.33	H
2400.00	60.59	27.55	5.49	29.93	63.70	74.00	-10.30	H
2390.00	53.27	27.53	5.47	33.92	52.35	74.00	-21.65	V
2400.00	62.37	27.55	5.49	29.93	65.48	74.00	-8.52	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.37	27.53	5.47	33.92	37.45	54.00	-16.55	H
2400.00	46.66	27.55	5.49	29.93	49.77	54.00	-4.23	H
2390.00	40.19	27.53	5.47	33.92	39.27	54.00	-14.73	V
2400.00	47.78	27.55	5.49	29.93	50.89	54.00	-3.11	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.23	29.28	3.53	34.03	51.01	74.00	-22.99	H
2500.00	48.07	29.30	3.56	34.03	46.90	74.00	-27.10	H
2483.50	54.47	29.28	3.53	34.03	53.25	74.00	-20.75	V
2500.00	50.57	29.30	3.56	34.03	49.40	74.00	-24.60	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.73	29.28	3.53	34.03	37.51	54.00	-16.49	H
2500.00	34.84	29.30	3.56	34.03	33.67	54.00	-20.33	H
2483.50	40.67	29.28	3.53	34.03	39.45	54.00	-14.55	V
2500.00	36.72	29.30	3.56	34.03	35.55	54.00	-18.45	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.17	27.53	5.47	33.92	50.25	74.00	-23.75	H
2400.00	60.02	27.55	5.49	29.93	63.13	74.00	-10.87	H
2390.00	52.82	27.53	5.47	33.92	51.90	74.00	-22.10	V
2400.00	61.69	27.55	5.49	29.93	64.80	74.00	-9.20	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.07	27.53	5.47	33.92	37.15	54.00	-16.85	H
2400.00	46.31	27.55	5.49	29.93	49.42	54.00	-4.58	H
2390.00	39.85	27.53	5.47	33.92	38.93	54.00	-15.07	V
2400.00	47.40	27.55	5.49	29.93	50.51	54.00	-3.49	V

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.62	29.28	3.53	34.03	50.40	74.00	-23.60	H
2500.00	47.60	29.30	3.56	34.03	46.43	74.00	-27.57	H
2483.50	53.78	29.28	3.53	34.03	52.56	74.00	-21.44	V
2500.00	50.02	29.30	3.56	34.03	48.85	74.00	-25.15	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.36	29.28	3.53	34.03	37.14	54.00	-16.86	H
2500.00	34.55	29.30	3.56	34.03	33.38	54.00	-20.62	H
2483.50	40.26	29.28	3.53	34.03	39.04	54.00	-14.96	V
2500.00	36.42	29.30	3.56	34.03	35.25	54.00	-18.75	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.22	27.53	5.47	33.92	49.30	74.00	-24.70	H
2400.00	58.75	27.55	5.49	29.93	61.86	74.00	-12.14	H
2390.00	51.80	27.53	5.47	33.92	50.88	74.00	-23.12	V
2400.00	60.17	27.55	5.49	29.93	63.28	74.00	-10.72	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.39	27.53	5.47	33.92	36.47	54.00	-17.53	H
2400.00	45.53	27.55	5.49	29.93	48.64	54.00	-5.36	H
2390.00	39.10	27.53	5.47	33.92	38.18	54.00	-15.82	V
2400.00	46.55	27.55	5.49	29.93	49.66	54.00	-4.34	V

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.26	29.28	3.53	34.03	49.04	74.00	-24.96	H
2500.00	46.55	29.30	3.56	34.03	45.38	74.00	-28.62	H
2483.50	52.23	29.28	3.53	34.03	51.01	74.00	-22.99	V
2500.00	48.79	29.30	3.56	34.03	47.62	74.00	-26.38	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.54	29.28	3.53	34.03	36.32	54.00	-17.68	H
2500.00	33.92	29.30	3.56	34.03	32.75	54.00	-21.25	H
2483.50	39.36	29.28	3.53	34.03	38.14	54.00	-15.86	V
2500.00	35.74	29.30	3.56	34.03	34.57	54.00	-19.43	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ax(HEW20) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.74	29.15	3.41	34.01	51.29	74.00	-22.71	H
2400.00	62.12	29.16	3.43	34.01	60.70	74.00	-13.30	H
2390.00	54.50	29.15	3.41	34.01	53.05	74.00	-20.95	V
2400.00	64.21	29.16	3.43	34.01	62.79	74.00	-11.21	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.19	29.15	3.41	34.01	37.74	54.00	-16.26	H
2400.00	47.60	29.16	3.43	34.01	46.18	54.00	-7.82	H
2390.00	41.10	29.15	3.41	34.01	39.65	54.00	-14.35	V
2400.00	48.81	29.16	3.43	34.01	47.39	54.00	-6.61	V

Test Mode: 802.11ax(HEW20) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	53.87	29.28	3.53	34.03	52.65	74.00	-21.35	H
2500.00	49.34	29.30	3.56	34.03	48.17	74.00	-25.83	H
2483.50	56.35	29.28	3.53	34.03	55.13	74.00	-18.87	V
2500.00	52.06	29.30	3.56	34.03	50.89	74.00	-23.11	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.72	29.28	3.53	34.03	38.50	54.00	-15.50	H
2500.00	35.61	29.30	3.56	34.03	34.44	54.00	-19.56	H
2483.50	41.76	29.28	3.53	34.03	40.54	54.00	-13.46	V
2500.00	37.54	29.30	3.56	34.03	36.37	54.00	-17.63	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ax(HEW40) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.35	27.53	5.47	33.92	50.43	74.00	-23.57	H
2400.00	60.27	27.55	5.49	29.93	63.38	74.00	-10.62	H
2390.00	53.02	27.53	5.47	33.92	52.10	74.00	-21.90	V
2400.00	61.99	27.55	5.49	29.93	65.10	74.00	-8.90	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.20	27.53	5.47	33.92	37.28	54.00	-16.72	H
2400.00	46.46	27.55	5.49	29.93	49.57	54.00	-4.43	H
2390.00	40.00	27.53	5.47	33.92	39.08	54.00	-14.92	V
2400.00	47.56	27.55	5.49	29.93	50.67	54.00	-3.33	V

Test Mode: 802.11ax(HEW40) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.88	29.28	3.53	34.03	50.66	74.00	-23.34	H
2500.00	47.81	29.30	3.56	34.03	46.64	74.00	-27.36	H
2483.50	54.08	29.28	3.53	34.03	52.86	74.00	-21.14	V
2500.00	50.26	29.30	3.56	34.03	49.09	74.00	-24.91	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.52	29.28	3.53	34.03	37.30	54.00	-16.70	H
2500.00	34.68	29.30	3.56	34.03	33.51	54.00	-20.49	H
2483.50	40.44	29.28	3.53	34.03	39.22	54.00	-14.78	V
2500.00	36.55	29.30	3.56	34.03	35.38	54.00	-18.62	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ac(VHT20) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.99	27.53	5.47	33.92	50.07	74.00	-23.93	H
2400.00	59.78	27.55	5.49	29.93	62.89	74.00	-11.11	H
2390.00	52.62	27.53	5.47	33.92	51.70	74.00	-22.30	V
2400.00	61.40	27.55	5.49	29.93	64.51	74.00	-9.49	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.94	27.53	5.47	33.92	37.02	54.00	-16.98	H
2400.00	46.16	27.55	5.49	29.93	49.27	54.00	-4.73	H
2390.00	39.71	27.53	5.47	33.92	38.79	54.00	-15.21	V
2400.00	47.24	27.55	5.49	29.93	50.35	54.00	-3.65	V

Test Mode: 802.11ac(VHT20) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.36	29.28	3.53	34.03	50.14	74.00	-23.86	H
2500.00	47.40	29.30	3.56	34.03	46.23	74.00	-27.77	H
2483.50	53.48	29.28	3.53	34.03	52.26	74.00	-21.74	V
2500.00	49.78	29.30	3.56	34.03	48.61	74.00	-25.39	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.20	29.28	3.53	34.03	36.98	54.00	-17.02	H
2500.00	34.43	29.30	3.56	34.03	33.26	54.00	-20.74	H
2483.50	40.09	29.28	3.53	34.03	38.87	54.00	-15.13	V
2500.00	36.29	29.30	3.56	34.03	35.12	54.00	-18.88	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ac(VHT40) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.27	27.53	5.47	33.92	49.35	74.00	-24.65	H
2400.00	58.82	27.55	5.49	29.93	61.93	74.00	-12.07	H
2390.00	51.86	27.53	5.47	33.92	50.94	74.00	-23.06	V
2400.00	60.25	27.55	5.49	29.93	63.36	74.00	-10.64	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.43	27.53	5.47	33.92	36.51	54.00	-17.49	H
2400.00	45.58	27.55	5.49	29.93	48.69	54.00	-5.31	H
2390.00	39.14	27.53	5.47	33.92	38.22	54.00	-15.78	V
2400.00	46.60	27.55	5.49	29.93	49.71	54.00	-4.29	V

Test Mode: 802.11ac(VHT40) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.34	29.28	3.53	34.03	49.12	74.00	-24.88	H
2500.00	46.61	29.30	3.56	34.03	45.44	74.00	-28.56	H
2483.50	52.32	29.28	3.53	34.03	51.10	74.00	-22.90	V
2500.00	48.86	29.30	3.56	34.03	47.69	74.00	-26.31	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.59	29.28	3.53	34.03	36.37	54.00	-17.63	H
2500.00	33.95	29.30	3.56	34.03	32.78	54.00	-21.22	H
2483.50	39.41	29.28	3.53	34.03	38.19	54.00	-15.81	V
2500.00	35.78	29.30	3.56	34.03	34.61	54.00	-19.39	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

ANT 2:

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.52	29.15	3.41	34.01	51.07	74.00	-22.93	H
2400.00	61.82	29.16	3.43	34.01	60.40	74.00	-13.60	H
2390.00	54.26	29.15	3.41	34.01	52.81	74.00	-21.19	V
2400.00	63.86	29.16	3.43	34.01	62.44	74.00	-11.56	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.03	29.15	3.41	34.01	37.58	54.00	-16.42	H
2400.00	47.42	29.16	3.43	34.01	46.00	54.00	-8.00	H
2390.00	40.92	29.15	3.41	34.01	39.47	54.00	-14.53	V
2400.00	48.61	29.16	3.43	34.01	47.19	54.00	-6.81	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	53.55	29.28	3.53	34.03	52.33	74.00	-21.67	H
2500.00	49.10	29.30	3.56	34.03	47.93	74.00	-26.07	H
2483.50	55.99	29.28	3.53	34.03	54.77	74.00	-19.23	V
2500.00	51.77	29.30	3.56	34.03	50.60	74.00	-23.40	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.53	29.28	3.53	34.03	38.31	54.00	-15.69	H
2500.00	35.46	29.30	3.56	34.03	34.29	54.00	-19.71	H
2483.50	41.55	29.28	3.53	34.03	40.33	54.00	-13.67	V
2500.00	37.38	29.30	3.56	34.03	36.21	54.00	-17.79	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.56	27.53	5.47	33.92	50.64	74.00	-23.36	H
2400.00	60.55	27.55	5.49	29.93	63.66	74.00	-10.34	H
2390.00	53.24	27.53	5.47	33.92	52.32	74.00	-21.68	V
2400.00	62.32	27.55	5.49	29.93	65.43	74.00	-8.57	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.35	27.53	5.47	33.92	37.43	54.00	-16.57	H
2400.00	46.64	27.55	5.49	29.93	49.75	54.00	-4.25	H
2390.00	40.16	27.53	5.47	33.92	39.24	54.00	-14.76	V
2400.00	47.75	27.55	5.49	29.93	50.86	54.00	-3.14	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.19	29.28	3.53	34.03	50.97	74.00	-23.03	H
2500.00	48.04	29.30	3.56	34.03	46.87	74.00	-27.13	H
2483.50	54.43	29.28	3.53	34.03	53.21	74.00	-20.79	V
2500.00	50.53	29.30	3.56	34.03	49.36	74.00	-24.64	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.70	29.28	3.53	34.03	37.48	54.00	-16.52	H
2500.00	34.82	29.30	3.56	34.03	33.65	54.00	-20.35	H
2483.50	40.64	29.28	3.53	34.03	39.42	54.00	-14.58	V
2500.00	36.70	29.30	3.56	34.03	35.53	54.00	-18.47	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.12	27.53	5.47	33.92	50.20	74.00	-23.80	H
2400.00	59.96	27.55	5.49	29.93	63.07	74.00	-10.93	H
2390.00	52.77	27.53	5.47	33.92	51.85	74.00	-22.15	V
2400.00	61.61	27.55	5.49	29.93	64.72	74.00	-9.28	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.03	27.53	5.47	33.92	37.11	54.00	-16.89	H
2400.00	46.27	27.55	5.49	29.93	49.38	54.00	-4.62	H
2390.00	39.81	27.53	5.47	33.92	38.89	54.00	-15.11	V
2400.00	47.36	27.55	5.49	29.93	50.47	54.00	-3.53	V

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.55	29.28	3.53	34.03	50.33	74.00	-23.67	H
2500.00	47.55	29.30	3.56	34.03	46.38	74.00	-27.62	H
2483.50	53.70	29.28	3.53	34.03	52.48	74.00	-21.52	V
2500.00	49.96	29.30	3.56	34.03	48.79	74.00	-25.21	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.32	29.28	3.53	34.03	37.10	54.00	-16.90	H
2500.00	34.52	29.30	3.56	34.03	33.35	54.00	-20.65	H
2483.50	40.22	29.28	3.53	34.03	39.00	54.00	-15.00	V
2500.00	36.38	29.30	3.56	34.03	35.21	54.00	-18.79	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.24	27.53	5.47	33.92	49.32	74.00	-24.68	H
2400.00	58.78	27.55	5.49	29.93	61.89	74.00	-12.11	H
2390.00	51.83	27.53	5.47	33.92	50.91	74.00	-23.09	V
2400.00	60.20	27.55	5.49	29.93	63.31	74.00	-10.69	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.41	27.53	5.47	33.92	36.49	54.00	-17.51	H
2400.00	45.55	27.55	5.49	29.93	48.66	54.00	-5.34	H
2390.00	39.12	27.53	5.47	33.92	38.20	54.00	-15.80	V
2400.00	46.57	27.55	5.49	29.93	49.68	54.00	-4.32	V

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.30	29.28	3.53	34.03	49.08	74.00	-24.92	H
2500.00	46.57	29.30	3.56	34.03	45.40	74.00	-28.60	H
2483.50	52.27	29.28	3.53	34.03	51.05	74.00	-22.95	V
2500.00	48.82	29.30	3.56	34.03	47.65	74.00	-26.35	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.56	29.28	3.53	34.03	36.34	54.00	-17.66	H
2500.00	33.93	29.30	3.56	34.03	32.76	54.00	-21.24	H
2483.50	39.38	29.28	3.53	34.03	38.16	54.00	-15.84	V
2500.00	35.76	29.30	3.56	34.03	34.59	54.00	-19.41	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ax(HEW20) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.97	27.53	5.47	33.92	50.05	74.00	-23.95	H
2400.00	59.76	27.55	5.49	29.93	62.87	74.00	-11.13	H
2390.00	52.60	27.53	5.47	33.92	51.68	74.00	-22.32	V
2400.00	61.37	27.55	5.49	29.93	64.48	74.00	-9.52	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.93	27.53	5.47	33.92	37.01	54.00	-16.99	H
2400.00	46.15	27.55	5.49	29.93	49.26	54.00	-4.74	H
2390.00	39.69	27.53	5.47	33.92	38.77	54.00	-15.23	V
2400.00	47.22	27.55	5.49	29.93	50.33	54.00	-3.67	V

Test Mode: 802.11ax(HEW20) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.34	29.28	3.53	34.03	50.12	74.00	-23.88	H
2500.00	47.38	29.30	3.56	34.03	46.21	74.00	-27.79	H
2483.50	53.46	29.28	3.53	34.03	52.24	74.00	-21.76	V
2500.00	49.76	29.30	3.56	34.03	48.59	74.00	-25.41	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.19	29.28	3.53	34.03	36.97	54.00	-17.03	H
2500.00	34.42	29.30	3.56	34.03	33.25	54.00	-20.75	H
2483.50	40.08	29.28	3.53	34.03	38.86	54.00	-15.14	V
2500.00	36.27	29.30	3.56	34.03	35.10	54.00	-18.90	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ax(HEW40) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.26	27.53	5.47	33.92	49.34	74.00	-24.66	H
2400.00	58.81	27.55	5.49	29.93	61.92	74.00	-12.08	H
2390.00	51.85	27.53	5.47	33.92	50.93	74.00	-23.07	V
2400.00	60.23	27.55	5.49	29.93	63.34	74.00	-10.66	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.42	27.53	5.47	33.92	36.50	54.00	-17.50	H
2400.00	45.57	27.55	5.49	29.93	48.68	54.00	-5.32	H
2390.00	39.13	27.53	5.47	33.92	38.21	54.00	-15.79	V
2400.00	46.58	27.55	5.49	29.93	49.69	54.00	-4.31	V

Test Mode: 802.11ax(HEW40) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.32	29.28	3.53	34.03	49.10	74.00	-24.90	H
2500.00	46.59	29.30	3.56	34.03	45.42	74.00	-28.58	H
2483.50	52.30	29.28	3.53	34.03	51.08	74.00	-22.92	V
2500.00	48.84	29.30	3.56	34.03	47.67	74.00	-26.33	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.58	29.28	3.53	34.03	36.36	54.00	-17.64	H
2500.00	33.94	29.30	3.56	34.03	32.77	54.00	-21.23	H
2483.50	39.40	29.28	3.53	34.03	38.18	54.00	-15.82	V
2500.00	35.77	29.30	3.56	34.03	34.60	54.00	-19.40	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ac(VHT20) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.77	29.15	3.41	34.01	51.32	74.00	-22.68	H
2400.00	62.16	29.16	3.43	34.01	60.74	74.00	-13.26	H
2390.00	54.53	29.15	3.41	34.01	53.08	74.00	-20.92	V
2400.00	64.26	29.16	3.43	34.01	62.84	74.00	-11.16	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.21	29.15	3.41	34.01	37.76	54.00	-16.24	H
2400.00	47.63	29.16	3.43	34.01	46.21	54.00	-7.79	H
2390.00	41.12	29.15	3.41	34.01	39.67	54.00	-14.33	V
2400.00	48.84	29.16	3.43	34.01	47.42	54.00	-6.58	V

Test Mode: 802.11ac(VHT20) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	53.91	29.28	3.53	34.03	52.69	74.00	-21.31	H
2500.00	49.38	29.30	3.56	34.03	48.21	74.00	-25.79	H
2483.50	56.40	29.28	3.53	34.03	55.18	74.00	-18.82	V
2500.00	52.10	29.30	3.56	34.03	50.93	74.00	-23.07	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.74	29.28	3.53	34.03	38.52	54.00	-15.48	H
2500.00	35.63	29.30	3.56	34.03	34.46	54.00	-19.54	H
2483.50	41.79	29.28	3.53	34.03	40.57	54.00	-13.43	V
2500.00	37.56	29.30	3.56	34.03	36.39	54.00	-17.61	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ac(VHT40) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.38	27.53	5.47	33.92	50.46	74.00	-23.54	H
2400.00	60.31	27.55	5.49	29.93	63.42	74.00	-10.58	H
2390.00	53.05	27.53	5.47	33.92	52.13	74.00	-21.87	V
2400.00	62.03	27.55	5.49	29.93	65.14	74.00	-8.86	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.22	27.53	5.47	33.92	37.30	54.00	-16.70	H
2400.00	46.49	27.55	5.49	29.93	49.60	54.00	-4.40	H
2390.00	40.02	27.53	5.47	33.92	39.10	54.00	-14.90	V
2400.00	47.59	27.55	5.49	29.93	50.70	54.00	-3.30	V

Test Mode: 802.11ac(VHT40) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.93	29.28	3.53	34.03	50.71	74.00	-23.29	H
2500.00	47.84	29.30	3.56	34.03	46.67	74.00	-27.33	H
2483.50	54.13	29.28	3.53	34.03	52.91	74.00	-21.09	V
2500.00	50.30	29.30	3.56	34.03	49.13	74.00	-24.87	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.55	29.28	3.53	34.03	37.33	54.00	-16.67	H
2500.00	34.70	29.30	3.56	34.03	33.53	54.00	-20.47	H
2483.50	40.47	29.28	3.53	34.03	39.25	54.00	-14.75	V
2500.00	36.57	29.30	3.56	34.03	35.40	54.00	-18.60	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

ANT 1+ANT 2:

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	53.05	29.15	3.41	34.01	51.60	74.00	-22.40	H
2400.00	62.53	29.16	3.43	34.01	61.11	74.00	-12.89	H
2390.00	54.83	29.15	3.41	34.01	53.38	74.00	-20.62	V
2400.00	64.70	29.16	3.43	34.01	63.28	74.00	-10.72	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	39.41	29.15	3.41	34.01	37.96	54.00	-16.04	H
2400.00	47.85	29.16	3.43	34.01	46.43	54.00	-7.57	H
2390.00	41.34	29.15	3.41	34.01	39.89	54.00	-14.11	V
2400.00	49.08	29.16	3.43	34.01	47.66	54.00	-6.34	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	54.30	29.28	3.53	34.03	53.08	74.00	-20.92	H
2500.00	49.68	29.30	3.56	34.03	48.51	74.00	-25.49	H
2483.50	56.85	29.28	3.53	34.03	55.63	74.00	-18.37	V
2500.00	52.46	29.30	3.56	34.03	51.29	74.00	-22.71	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.98	29.28	3.53	34.03	38.76	54.00	-15.24	H
2500.00	35.82	29.30	3.56	34.03	34.65	54.00	-19.35	H
2483.50	42.05	29.28	3.53	34.03	40.83	54.00	-13.17	V
2500.00	37.75	29.30	3.56	34.03	36.58	54.00	-17.42	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.79	27.53	5.47	33.92	50.87	74.00	-23.13	H
2400.00	60.85	27.55	5.49	29.93	63.96	74.00	-10.04	H
2390.00	53.48	27.53	5.47	33.92	52.56	74.00	-21.44	V
2400.00	62.68	27.55	5.49	29.93	65.79	74.00	-8.21	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.51	27.53	5.47	33.92	37.59	54.00	-16.41	H
2400.00	46.82	27.55	5.49	29.93	49.93	54.00	-4.07	H
2390.00	40.34	27.53	5.47	33.92	39.42	54.00	-14.58	V
2400.00	47.95	27.55	5.49	29.93	51.06	54.00	-2.94	V

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	52.50	29.28	3.53	34.03	51.28	74.00	-22.72	H
2500.00	48.29	29.30	3.56	34.03	47.12	74.00	-26.88	H
2483.50	54.79	29.28	3.53	34.03	53.57	74.00	-20.43	V
2500.00	50.82	29.30	3.56	34.03	49.65	74.00	-24.35	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.89	29.28	3.53	34.03	37.67	54.00	-16.33	H
2500.00	34.97	29.30	3.56	34.03	33.80	54.00	-20.20	H
2483.50	40.85	29.28	3.53	34.03	39.63	54.00	-14.37	V
2500.00	36.86	29.30	3.56	34.03	35.69	54.00	-18.31	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n20 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.42	27.53	5.47	33.92	50.50	74.00	-23.50	H
2400.00	60.36	27.55	5.49	29.93	63.47	74.00	-10.53	H
2390.00	53.09	27.53	5.47	33.92	52.17	74.00	-21.83	V
2400.00	62.10	27.55	5.49	29.93	65.21	74.00	-8.79	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.25	27.53	5.47	33.92	37.33	54.00	-16.67	H
2400.00	46.52	27.55	5.49	29.93	49.63	54.00	-4.37	H
2390.00	40.05	27.53	5.47	33.92	39.13	54.00	-14.87	V
2400.00	47.63	27.55	5.49	29.93	50.74	54.00	-3.26	V

Test Mode: 802.11n20 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.98	29.28	3.53	34.03	50.76	74.00	-23.24	H
2500.00	47.88	29.30	3.56	34.03	46.71	74.00	-27.29	H
2483.50	54.20	29.28	3.53	34.03	52.98	74.00	-21.02	V
2500.00	50.35	29.30	3.56	34.03	49.18	74.00	-24.82	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.58	29.28	3.53	34.03	37.36	54.00	-16.64	H
2500.00	34.73	29.30	3.56	34.03	33.56	54.00	-20.44	H
2483.50	40.51	29.28	3.53	34.03	39.29	54.00	-14.71	V
2500.00	36.60	29.30	3.56	34.03	35.43	54.00	-18.57	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11n40 Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.37	27.53	5.47	33.92	49.45	74.00	-24.55	H
2400.00	58.95	27.55	5.49	29.93	62.06	74.00	-11.94	H
2390.00	51.96	27.53	5.47	33.92	51.04	74.00	-22.96	V
2400.00	60.41	27.55	5.49	29.93	63.52	74.00	-10.48	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.50	27.53	5.47	33.92	36.58	54.00	-17.42	H
2400.00	45.66	27.55	5.49	29.93	48.77	54.00	-5.23	H
2390.00	39.22	27.53	5.47	33.92	38.30	54.00	-15.70	V
2400.00	46.68	27.55	5.49	29.93	49.79	54.00	-4.21	V

Test Mode: 802.11n40 Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.48	29.28	3.53	34.03	49.26	74.00	-24.74	H
2500.00	46.72	29.30	3.56	34.03	45.55	74.00	-28.45	H
2483.50	52.48	29.28	3.53	34.03	51.26	74.00	-22.74	V
2500.00	48.98	29.30	3.56	34.03	47.81	74.00	-26.19	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.67	29.28	3.53	34.03	36.45	54.00	-17.55	H
2500.00	34.02	29.30	3.56	34.03	32.85	54.00	-21.15	H
2483.50	39.50	29.28	3.53	34.03	38.28	54.00	-15.72	V
2500.00	35.85	29.30	3.56	34.03	34.68	54.00	-19.32	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ax(HEW20) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.03	27.53	5.47	33.92	50.11	74.00	-23.89	H
2400.00	59.83	27.55	5.49	29.93	62.94	74.00	-11.06	H
2390.00	52.66	27.53	5.47	33.92	51.74	74.00	-22.26	V
2400.00	61.46	27.55	5.49	29.93	64.57	74.00	-9.43	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.97	27.53	5.47	33.92	37.05	54.00	-16.95	H
2400.00	46.19	27.55	5.49	29.93	49.30	54.00	-4.70	H
2390.00	39.74	27.53	5.47	33.92	38.82	54.00	-15.18	V
2400.00	47.27	27.55	5.49	29.93	50.38	54.00	-3.62	V

Test Mode: 802.11ax(HEW20) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.42	29.28	3.53	34.03	50.20	74.00	-23.80	H
2500.00	47.44	29.30	3.56	34.03	46.27	74.00	-27.73	H
2483.50	53.55	29.28	3.53	34.03	52.33	74.00	-21.67	V
2500.00	49.83	29.30	3.56	34.03	48.66	74.00	-25.34	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.24	29.28	3.53	34.03	37.02	54.00	-16.98	H
2500.00	34.46	29.30	3.56	34.03	33.29	54.00	-20.71	H
2483.50	40.13	29.28	3.53	34.03	38.91	54.00	-15.09	V
2500.00	36.31	29.30	3.56	34.03	35.14	54.00	-18.86	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ax(HEW40) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.23	27.53	5.47	33.92	49.31	74.00	-24.69	H
2400.00	58.77	27.55	5.49	29.93	61.88	74.00	-12.12	H
2390.00	51.82	27.53	5.47	33.92	50.90	74.00	-23.10	V
2400.00	60.19	27.55	5.49	29.93	63.30	74.00	-10.70	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.40	27.53	5.47	33.92	36.48	54.00	-17.52	H
2400.00	45.54	27.55	5.49	29.93	48.65	54.00	-5.35	H
2390.00	39.11	27.53	5.47	33.92	38.19	54.00	-15.81	V
2400.00	46.56	27.55	5.49	29.93	49.67	54.00	-4.33	V

Test Mode: 802.11ax(HEW40) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.28	29.28	3.53	34.03	49.06	74.00	-24.94	H
2500.00	46.56	29.30	3.56	34.03	45.39	74.00	-28.61	H
2483.50	52.25	29.28	3.53	34.03	51.03	74.00	-22.97	V
2500.00	48.81	29.30	3.56	34.03	47.64	74.00	-26.36	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.55	29.28	3.53	34.03	36.33	54.00	-17.67	H
2500.00	33.92	29.30	3.56	34.03	32.75	54.00	-21.25	H
2483.50	39.37	29.28	3.53	34.03	38.15	54.00	-15.85	V
2500.00	35.75	29.30	3.56	34.03	34.58	54.00	-19.42	V

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ac(VHT20) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	51.12	27.53	5.47	33.92	50.20	74.00	-23.80	H
2400.00	59.96	27.55	5.49	29.93	63.07	74.00	-10.93	H
2390.00	52.77	27.53	5.47	33.92	51.85	74.00	-22.15	V
2400.00	61.61	27.55	5.49	29.93	64.72	74.00	-9.28	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.03	27.53	5.47	33.92	37.11	54.00	-16.89	H
2400.00	46.27	27.55	5.49	29.93	49.38	54.00	-4.62	H
2390.00	39.81	27.53	5.47	33.92	38.89	54.00	-15.11	V
2400.00	47.36	27.55	5.49	29.93	50.47	54.00	-3.53	V

Test Mode: 802.11ac(VHT20) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	51.55	29.28	3.53	34.03	50.33	74.00	-23.67	H
2500.00	47.55	29.30	3.56	34.03	46.38	74.00	-27.62	H
2483.50	53.70	29.28	3.53	34.03	52.48	74.00	-21.52	V
2500.00	49.96	29.30	3.56	34.03	48.79	74.00	-25.21	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	38.32	29.28	3.53	34.03	37.10	54.00	-16.90	H
2500.00	34.52	29.30	3.56	34.03	33.35	54.00	-20.65	H
2483.50	40.22	29.28	3.53	34.03	39.00	54.00	-15.00	V
2500.00	36.38	29.30	3.56	34.03	35.21	54.00	-18.79	V

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

Radiated Band Edge:

Test Mode: 802.11ac(VHT40) Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	50.29	27.53	5.47	33.92	49.37	74.00	-24.63	H
2400.00	58.84	27.55	5.49	29.93	61.95	74.00	-12.05	H
2390.00	51.87	27.53	5.47	33.92	50.95	74.00	-23.05	V
2400.00	60.27	27.55	5.49	29.93	63.38	74.00	-10.62	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	37.44	27.53	5.47	33.92	36.52	54.00	-17.48	H
2400.00	45.59	27.55	5.49	29.93	48.70	54.00	-5.30	H
2390.00	39.15	27.53	5.47	33.92	38.23	54.00	-15.77	V
2400.00	46.61	27.55	5.49	29.93	49.72	54.00	-4.28	V

Test Mode: 802.11ac(VHT40) Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	50.36	29.28	3.53	34.03	49.14	74.00	-24.86	H
2500.00	46.62	29.30	3.56	34.03	45.45	74.00	-28.55	H
2483.50	52.34	29.28	3.53	34.03	51.12	74.00	-22.88	V
2500.00	48.88	29.30	3.56	34.03	47.71	74.00	-26.29	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	37.60	29.28	3.53	34.03	36.38	54.00	-17.62	H
2500.00	33.96	29.30	3.56	34.03	32.79	54.00	-21.21	H
2483.50	39.43	29.28	3.53	34.03	38.21	54.00	-15.79	V
2500.00	35.79	29.30	3.56	34.03	34.62	54.00	-19.38	V

Remark:




1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5.8 Radiated Spurious Emissions

5.8.1 Test Requirement

Test Requirement	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. Note: 1) Field Strength (dBμV/m) = 20*log[Field Strength (μV/m)]. 2) In the emission tables above, the tighter limit applies at the band edges. 3) For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. 4) For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).		
Test Method	ANSI C63.10-2020 section 6.6.4		

5.8.2 Test Setup Diagram

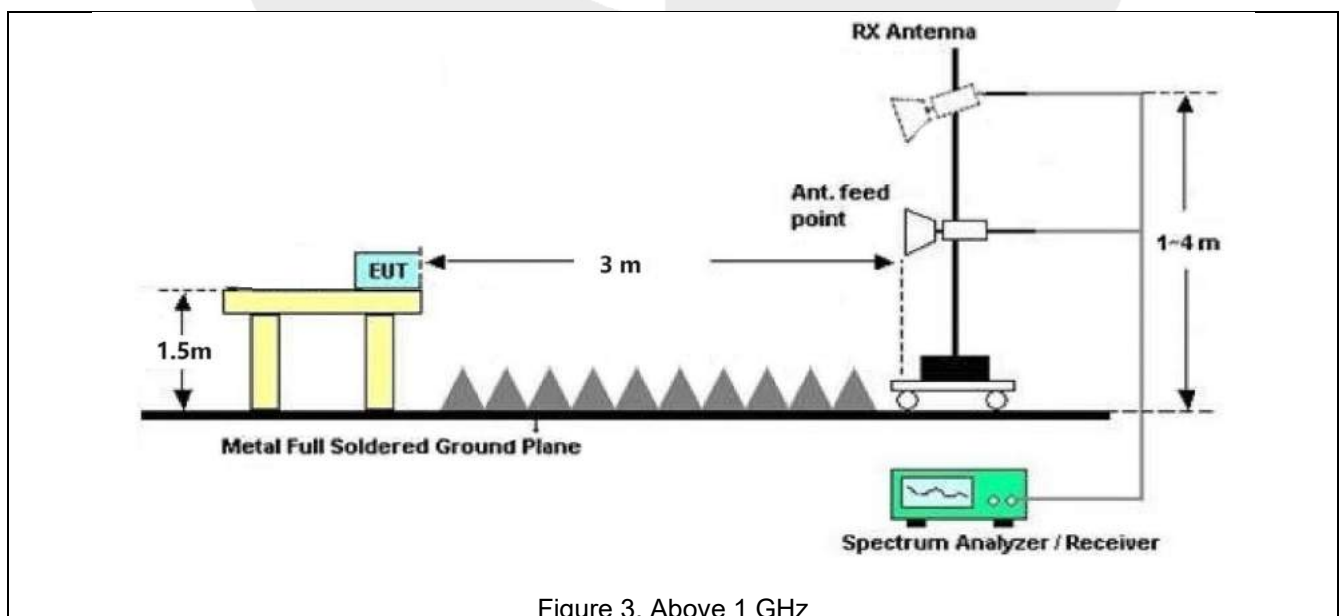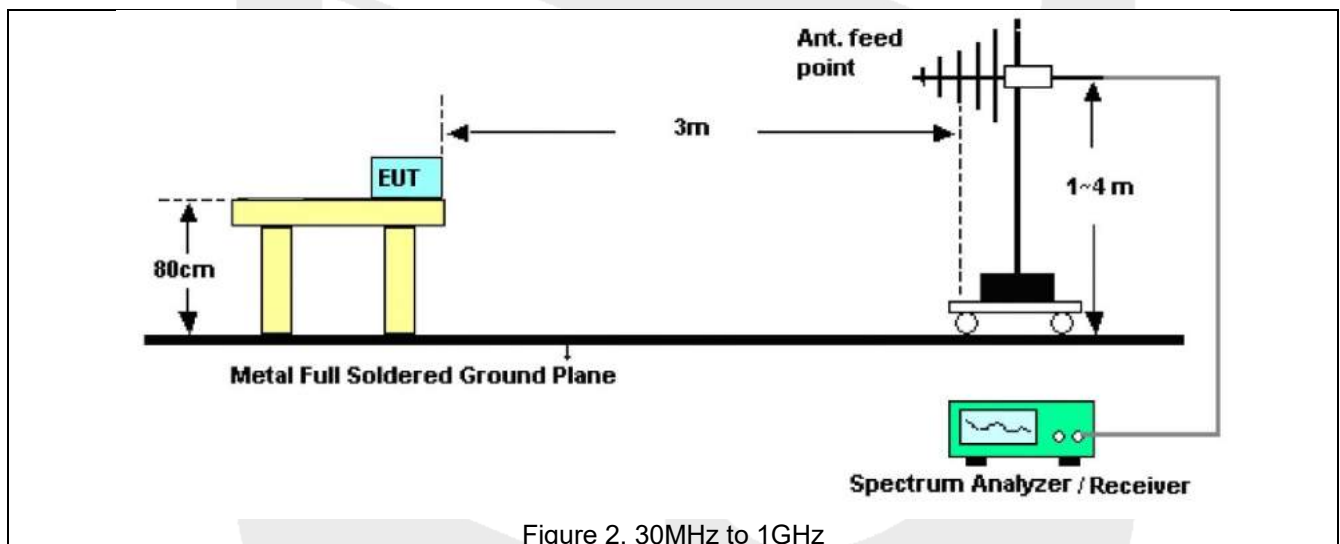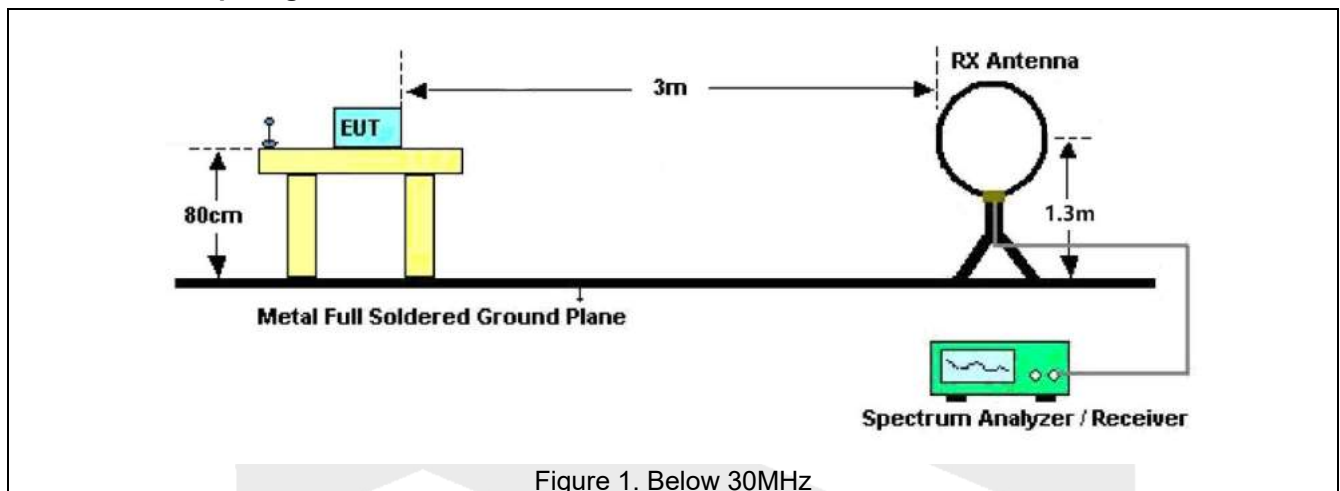

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power.

Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.8.4 Test Data

PASS.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found the for ANT 1 TM2/ CH Middle which is the worst case, only the worst case is recorded in the report.

Radiated Emission Test Data (30-1000MHz)
Test item: 966 Chamber #1

Polarization: Horizontal

Distance: 3m

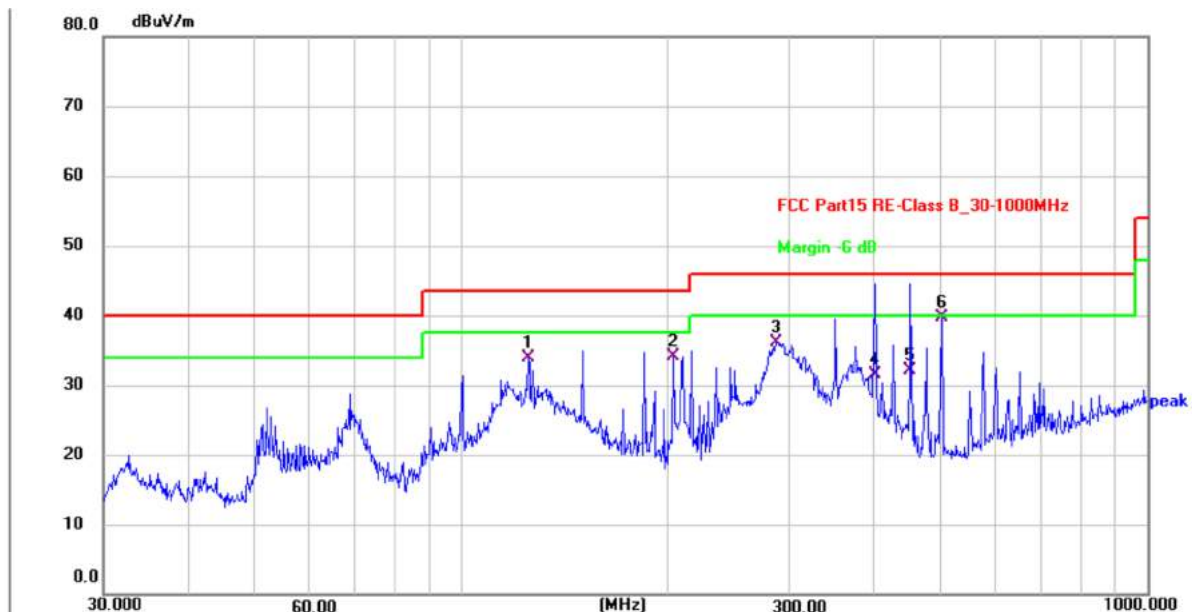Test Mode: TM2/ CH Middle


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	125.0066	50.63	-16.74	33.89	43.50	-9.61	QP	P	
2	203.5228	48.70	-14.55	34.15	43.50	-9.35	QP	P	
3	286.9823	48.06	-12.02	36.04	46.00	-9.96	QP	P	
4	400.4319	41.22	-9.72	31.50	46.00	-14.50	QP	P	
5	451.1350	41.08	-8.98	32.10	46.00	-13.90	QP	P	
6 *	501.1790	48.02	-8.33	39.69	46.00	-6.31	QP	P	


Note: Level = Reading + Factor

Margin = Level - Limit

Radiated Emission Test Data (30-1000MHz)
Test item: 966 Chamber #1

Polarization: Vertical

Distance: 3m

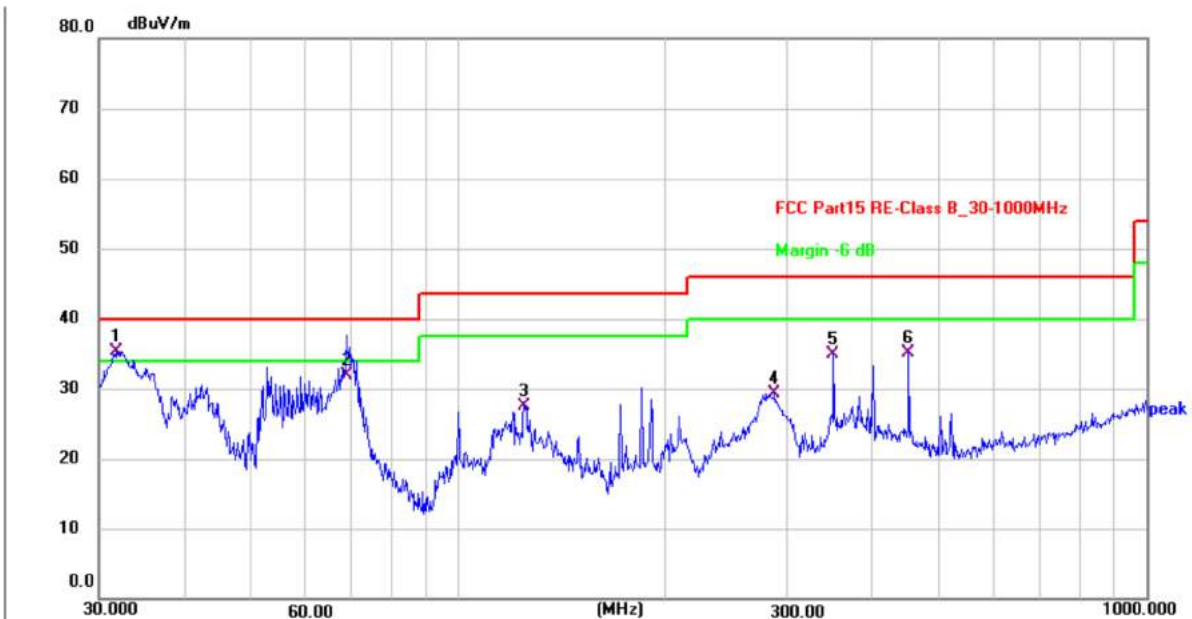Test Mode: TM2/ CH Middle


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	31.7313	51.80	-16.44	35.36	40.00	-4.64	QP	P	
2	68.6310	49.11	-17.11	32.00	40.00	-8.00	QP	P	
3	124.5690	44.20	-16.71	27.49	43.50	-16.01	QP	P	
4	287.9904	41.39	-12.01	29.38	46.00	-16.62	QP	P	
5	350.4768	45.51	-10.67	34.84	46.00	-11.16	QP	P	
6	451.1350	44.10	-8.98	35.12	46.00	-10.88	QP	P	

Note: Level = Reading + Factor
Margin = Level - Limit

Test Results (Above 1000MHz)
ANT 1:

ANT 1

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	40.44	34.13	6.61	34.09	47.09	74.00	-26.91	V
7236.00	34.31	37.14	7.74	34.51	44.68	74.00	-29.32	V
9648.00	32.78	39.35	9.26	34.80	46.59	74.00	-27.41	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	39.08	34.13	6.61	34.09	45.73	74.00	-28.27	H
7236.00	34.05	37.14	7.74	34.51	44.42	74.00	-29.58	H
9648.00	32.35	39.35	9.26	34.80	46.16	74.00	-27.84	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	29.51	34.13	6.61	34.09	36.16	54.00	-17.84	V
7236.00	23.17	37.14	7.74	34.51	33.54	54.00	-20.46	V
9648.00	23.12	39.35	9.26	34.80	36.93	54.00	-17.07	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	28.61	34.13	6.61	34.09	35.26	54.00	-18.74	H
7236.00	22.63	37.14	7.74	34.51	33.00	54.00	-21.00	H
9648.00	22.10	39.35	9.26	34.80	35.91	54.00	-18.09	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11g Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.47	34.35	6.67	34.09	46.40	74.00	-27.60	V
7311.00	34.36	37.21	7.77	34.53	44.81	74.00	-29.19	V
9748.00	33.79	39.45	9.33	34.80	47.77	74.00	-26.23	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	39.93	34.35	6.67	34.09	46.86	74.00	-27.14	H
7311.00	33.00	37.21	7.77	34.53	43.45	74.00	-30.55	H
9748.00	33.67	39.45	9.33	34.80	47.65	74.00	-26.35	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.31	34.35	6.67	34.09	37.24	54.00	-16.76	V
7311.00	22.68	37.21	7.77	34.53	33.13	54.00	-20.87	V
9748.00	23.04	39.45	9.33	34.80	37.02	54.00	-16.98	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	30.03	34.35	6.67	34.09	36.96	54.00	-17.04	H
7311.00	22.08	37.21	7.77	34.53	32.53	54.00	-21.47	H
9748.00	23.38	39.45	9.33	34.80	37.36	54.00	-16.64	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	45.08	34.57	6.74	34.09	52.30	74.00	-21.70	V
7386.00	35.09	37.29	7.80	34.55	45.63	74.00	-28.37	V
9848.00	37.12	39.55	9.41	34.81	51.27	74.00	-22.73	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	44.36	34.57	6.74	34.09	51.58	74.00	-22.42	H
7386.00	33.98	37.29	7.80	34.55	44.52	74.00	-29.48	H
9848.00	33.28	39.55	9.41	34.81	47.43	74.00	-26.57	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	35.98	34.57	6.74	34.09	43.20	54.00	-10.80	V
7386.00	25.00	37.29	7.80	34.55	35.54	54.00	-18.46	V
9848.00	25.62	39.55	9.41	34.81	39.77	54.00	-14.23	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	34.71	34.57	6.74	34.09	41.93	54.00	-12.07	H
7386.00	23.36	37.29	7.80	34.55	33.90	54.00	-20.10	H
9848.00	22.54	39.55	9.41	34.81	36.69	54.00	-17.31	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20n/HT40n), 802.11ax(HEW20/HEW40), 802.11ac(VHT20/VHT20) mode, and found the 802.11g mode is worse case , the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

ANT 2:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	42.73	34.13	6.61	34.09	49.38	74.00	-24.62	V
7236.00	35.76	37.14	7.74	34.51	46.13	74.00	-27.87	V
9648.00	33.82	39.35	9.26	34.80	47.63	74.00	-26.37	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	41.02	34.13	6.61	34.09	47.67	74.00	-26.33	H
7236.00	35.32	37.14	7.74	34.51	45.69	74.00	-28.31	H
9648.00	33.31	39.35	9.26	34.80	47.12	74.00	-26.88	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	31.63	34.13	6.61	34.09	38.28	54.00	-15.72	V
7236.00	24.58	37.14	7.74	34.51	34.95	54.00	-19.05	V
9648.00	24.12	39.35	9.26	34.80	37.93	54.00	-16.07	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	30.43	34.13	6.61	34.09	37.08	54.00	-16.92	H
7236.00	23.86	37.14	7.74	34.51	34.23	54.00	-19.77	H
9648.00	23.02	39.35	9.26	34.80	36.83	54.00	-17.17	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11g Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	41.37	34.35	6.67	34.09	48.30	74.00	-25.70	V
7311.00	35.57	37.21	7.77	34.53	46.02	74.00	-27.98	V
9748.00	34.65	39.45	9.33	34.80	48.63	74.00	-25.37	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	41.53	34.35	6.67	34.09	48.46	74.00	-25.54	H
7311.00	34.05	37.21	7.77	34.53	44.50	74.00	-29.50	H
9748.00	34.46	39.45	9.33	34.80	48.44	74.00	-25.56	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	32.06	34.35	6.67	34.09	38.99	54.00	-15.01	V
7311.00	23.84	37.21	7.77	34.53	34.29	54.00	-19.71	V
9748.00	23.86	39.45	9.33	34.80	37.84	54.00	-16.16	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	31.54	34.35	6.67	34.09	38.47	54.00	-15.53	H
7311.00	23.10	37.21	7.77	34.53	33.55	54.00	-20.45	H
9748.00	24.15	39.45	9.33	34.80	38.13	54.00	-15.87	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	48.36	34.57	6.74	34.09	55.58	74.00	-18.42	V
7386.00	37.17	37.29	7.80	34.55	47.71	74.00	-26.29	V
9848.00	38.60	39.55	9.41	34.81	52.75	74.00	-21.25	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	47.12	34.57	6.74	34.09	54.34	74.00	-19.66	H
7386.00	35.79	37.29	7.80	34.55	46.33	74.00	-27.67	H
9848.00	34.65	39.55	9.41	34.81	48.80	74.00	-25.20	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	39.00	34.57	6.74	34.09	46.22	54.00	-7.78	V
7386.00	27.01	37.29	7.80	34.55	37.55	54.00	-16.45	V
9848.00	27.04	39.55	9.41	34.81	41.19	54.00	-12.81	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	37.31	34.57	6.74	34.09	44.53	54.00	-9.47	H
7386.00	25.12	37.29	7.80	34.55	35.66	54.00	-18.34	H
9848.00	23.86	39.55	9.41	34.81	38.01	54.00	-15.99	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20n/HT40n), 802.11ax(HEW20/HEW40), 802.11ac(VHT20/VHT20) mode, and found the 802.11g mode is worse case , the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

ANT 1+ANT 2:

Test Mode: 802.11g Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	40.18	34.13	6.61	34.09	46.83	74.00	-27.17	V
7236.00	34.15	37.14	7.74	34.51	44.52	74.00	-29.48	V
9648.00	32.66	39.35	9.26	34.80	46.47	74.00	-27.53	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		V
4824.00	38.87	34.13	6.61	34.09	45.52	74.00	-28.48	H
7236.00	33.90	37.14	7.74	34.51	44.27	74.00	-29.73	H
9648.00	32.24	39.35	9.26	34.80	46.05	74.00	-27.95	H
12060.00	*					74.00		H
14472.00	*					74.00		H
16884.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	29.27	34.13	6.61	34.09	35.92	54.00	-18.08	V
7236.00	23.02	37.14	7.74	34.51	33.39	54.00	-20.61	V
9648.00	23.01	39.35	9.26	34.80	36.82	54.00	-17.18	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		V
4824.00	28.41	34.13	6.61	34.09	35.06	54.00	-18.94	H
7236.00	22.49	37.14	7.74	34.51	32.86	54.00	-21.14	H
9648.00	21.99	39.35	9.26	34.80	35.80	54.00	-18.20	H
12060.00	*					54.00		H
14472.00	*					54.00		H
16884.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11g Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	39.26	34.13	6.61	34.09	45.91	74.00	-28.09	V
7311.00	34.23	37.14	7.74	34.51	44.60	74.00	-29.40	V
9748.00	33.69	39.35	9.26	34.80	47.50	74.00	-26.50	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		V
4874.00	39.75	34.13	6.61	34.09	46.40	74.00	-27.60	H
7311.00	32.88	37.14	7.74	34.51	43.25	74.00	-30.75	H
9748.00	33.58	39.35	9.26	34.80	47.39	74.00	-26.61	H
12185.00	*					74.00		H
14622.00	*					74.00		H
17059.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	30.12	34.13	6.61	34.09	36.77	54.00	-17.23	V
7311.00	22.55	37.14	7.74	34.51	32.92	54.00	-21.08	V
9748.00	22.94	39.35	9.26	34.80	36.75	54.00	-17.25	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		V
4874.00	29.87	34.13	6.61	34.09	36.52	54.00	-17.48	H
7311.00	21.97	37.14	7.74	34.51	32.34	54.00	-21.66	H
9748.00	23.30	39.35	9.26	34.80	37.11	54.00	-16.89	H
12185.00	*					54.00		H
14622.00	*					54.00		H
17059.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11g Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	44.72	34.57	6.74	34.09	51.94	74.00	-22.06	V
7386.00	34.86	37.29	7.80	34.55	45.40	74.00	-28.60	V
9848.00	36.95	39.55	9.41	34.81	51.10	74.00	-22.90	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		V
4924.00	44.05	34.57	6.74	34.09	51.27	74.00	-22.73	H
7386.00	33.78	37.29	7.80	34.55	44.32	74.00	-29.68	H
9848.00	33.13	39.55	9.41	34.81	47.28	74.00	-26.72	H
12310.00	*					74.00		H
14772.00	*					74.00		H
17234.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	35.64	34.57	6.74	34.09	42.86	54.00	-11.14	V
7386.00	24.78	37.29	7.80	34.55	35.32	54.00	-18.68	V
9848.00	25.46	39.55	9.41	34.81	39.61	54.00	-14.39	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		V
4924.00	34.42	34.57	6.74	34.09	41.64	54.00	-12.36	H
7386.00	23.17	37.29	7.80	34.55	33.71	54.00	-20.29	H
9848.00	22.39	39.55	9.41	34.81	36.54	54.00	-17.46	H
12310.00	*					54.00		H
14772.00	*					54.00		H
17234.00	*					54.00		H

Remark:

1. During the test, pre-scan the 802.11b,g,n(HT20n/HT40n), 802.11ax(HEW20/HEW40), 802.11ac(VHT20/VHT20) mode, and found the 802.11g mode is worse case , the report only record this mode.
2. Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.

ANNEX A TEST SETUP PHOTOS

Please refer to the document "8132EU011202W-AA.PDF"

ANNEX B EXTERNAL PHOTOS

Please refer to the document "8132EU011202W-AB.PDF"

ANNEX C INTERNAL PHOTOS

Please refer to the document "8132EU011202W-AC.PDF"



Annex D Test Results



1. Duty Cycle


1.1 Ant1

1.1.1 Test Result


Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	8.606	8.736	98.51	0.07	0.23
		2437	/	/	8.610	9.276	92.82	0.32	6.65
		2462	/	/	17.300	18.003	96.10	0.17	0.00
802.11g	SISO	2412	/	/	1.429	1.544	92.55	0.34	1.10
		2437	/	/	1.429	1.486	96.16	0.17	0.16
		2462	/	/	1.429	1.854	77.08	1.13	19.21
802.11n (HT20)	SISO	2412	/	/	1.206	1.323	91.16	0.40	1.43
		2437	/	/	1.207	1.545	78.12	1.07	17.54
		2462	/	/	1.207	1.767	68.31	1.66	27.36
802.11n (HT40)	SISO	2422	/	/	0.601	0.716	83.94	0.76	2.42
		2437	/	/	0.602	0.717	83.96	0.76	2.42
		2452	/	/	0.602	0.717	83.96	0.76	2.45
802.11ax (HEW20)	SISO	2412	RU242	Left	1.033	1.148	89.98	0.46	1.61
		2437	RU242	Left	1.033	1.149	89.90	0.46	1.46
		2462	RU242	Left	1.034	1.416	73.02	1.37	21.96
802.11ax (HEW40)	SISO	2422	RU484	Left	0.544	0.659	82.55	0.83	2.63
		2437	RU484	Left	0.544	0.661	82.30	0.85	2.89
		2452	RU484	Left	0.544	0.661	82.30	0.85	5.58
802.11ac (VHT20)	SISO	2412	/	/	1.215	1.378	88.17	0.55	7.52
		2437	/	/	1.214	1.329	91.35	0.39	1.43
		2462	/	/	1.214	1.321	91.90	0.37	3.78
802.11ac (VHT40)	SISO	2422	/	/	0.606	0.866	69.98	1.55	21.43
		2437	/	/	0.606	0.721	84.05	0.75	7.37
		2452	/	/	0.606	0.721	84.05	0.75	2.44

Ant2									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	8.607	8.737	98.51	0.07	0.23
		2437	/	/	63.270	66.340	95.37	0.21	0.00
		2462	/	/	8.607	8.780	98.03	0.09	1.40
802.11g	SISO	2412	/	/	1.429	1.544	92.55	0.34	1.10
		2437	/	/	1.429	1.808	79.04	1.02	17.28
		2462	/	/	1.428	1.543	92.55	0.34	1.20
802.11n (HT20)	SISO	2412	/	/	1.206	1.321	91.29	0.40	1.28
		2437	/	/	1.206	1.322	91.23	0.40	1.28
		2462	/	/	1.207	1.360	88.75	0.52	6.93
802.11n (HT40)	SISO	2422	/	/	0.602	0.717	83.96	0.76	2.39
		2437	/	/	0.601	0.717	83.82	0.77	2.45
		2452	/	/	0.602	0.719	83.73	0.77	2.66
802.11ax (HEW20)	SISO	2412	RU242	Left	1.033	1.149	89.90	0.46	1.64
		2437	RU242	Left	1.033	4.965	20.81	6.82	74.16
		2462	RU242	Left	1.033	1.150	89.83	0.47	3.27
802.11ax (HEW40)	SISO	2422	RU484	Left	0.543	0.819	66.30	1.78	24.47
		2437	RU484	Left	0.544	0.659	82.55	0.83	2.59
		2452	RU484	Left	0.544	0.659	82.55	0.83	2.62
802.11ac (VHT20)	SISO	2412	/	/	1.215	1.330	91.35	0.39	1.42
		2437	/	/	1.214	1.331	91.21	0.40	1.54
		2462	/	/	1.214	1.720	70.58	1.51	22.13
802.11ac (VHT40)	SISO	2422	/	/	0.605	0.721	83.91	0.76	2.43
		2437	/	/	0.606	0.723	83.82	0.77	2.68
		2452	/	/	0.606	0.721	84.05	0.75	2.41


1.1.2 Test Graph

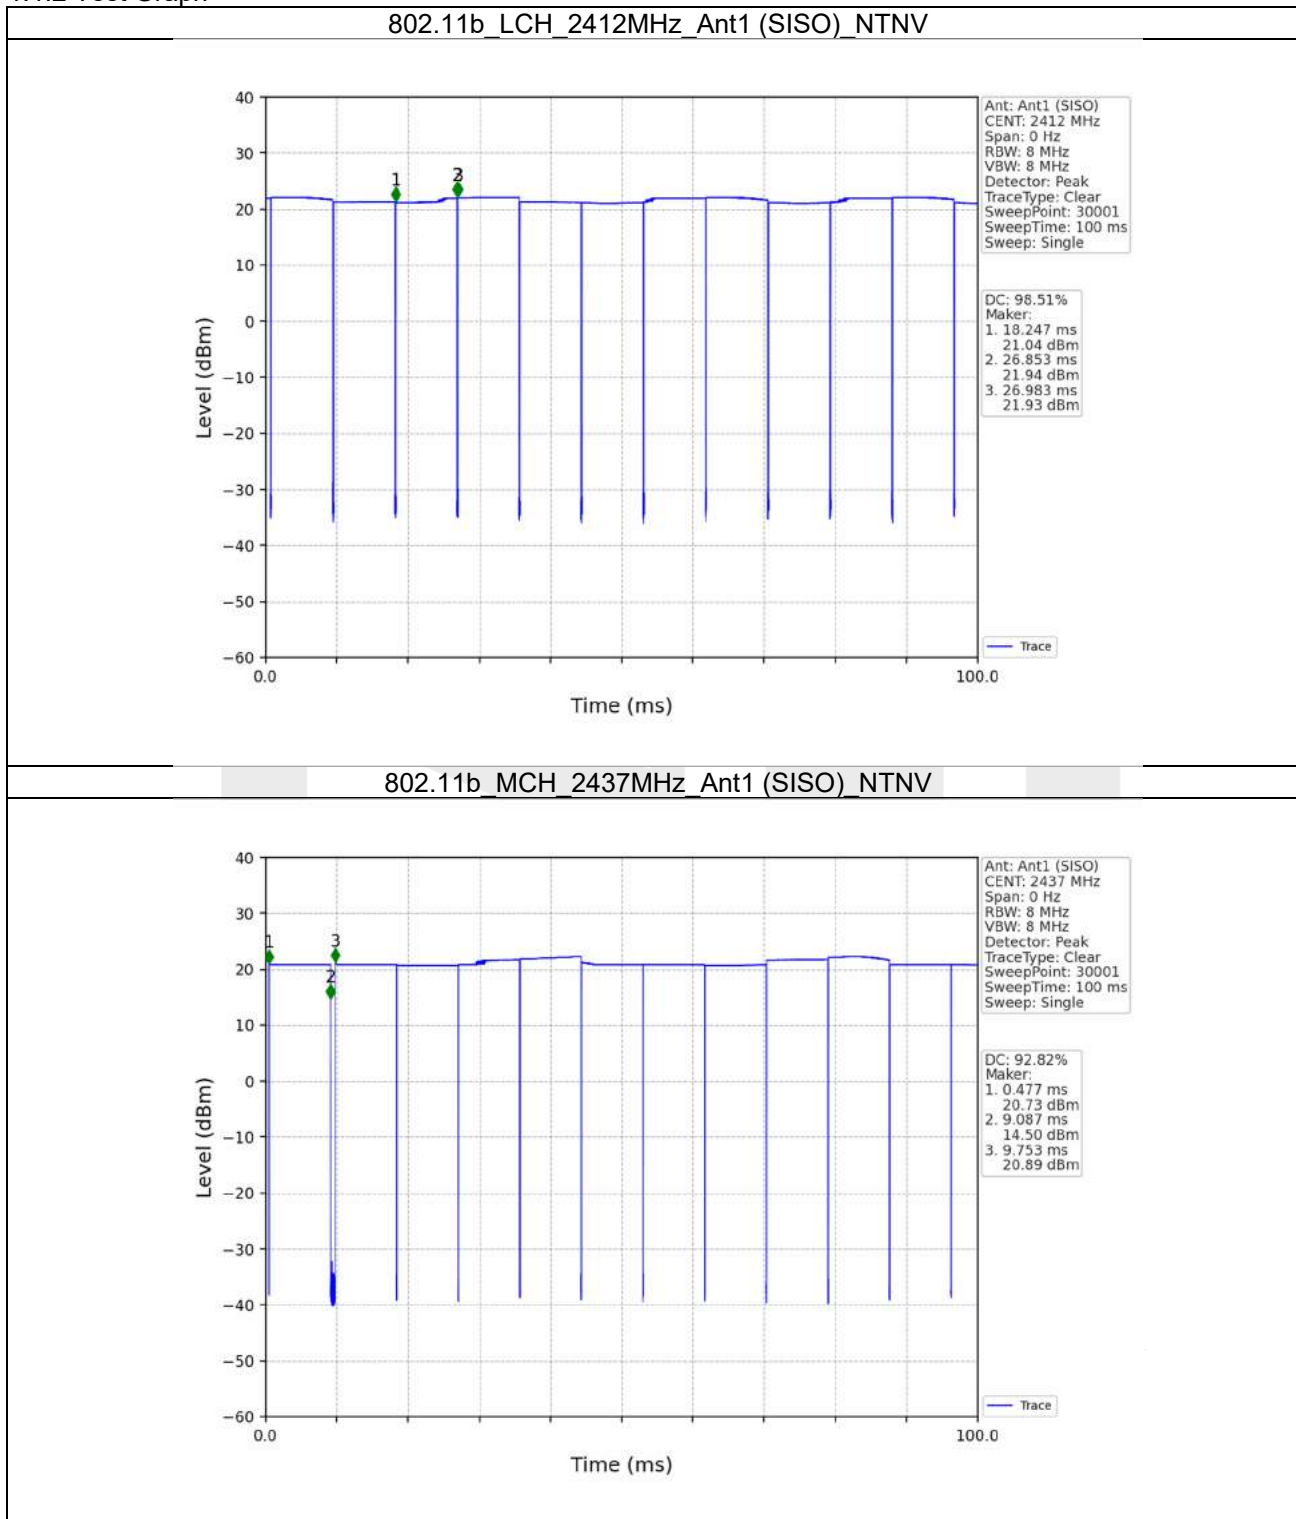


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

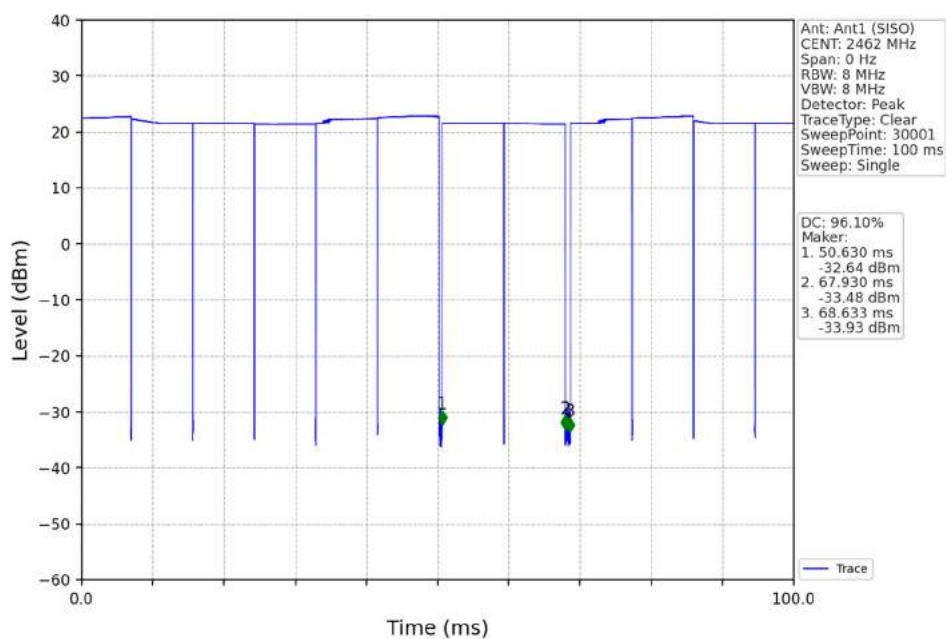


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

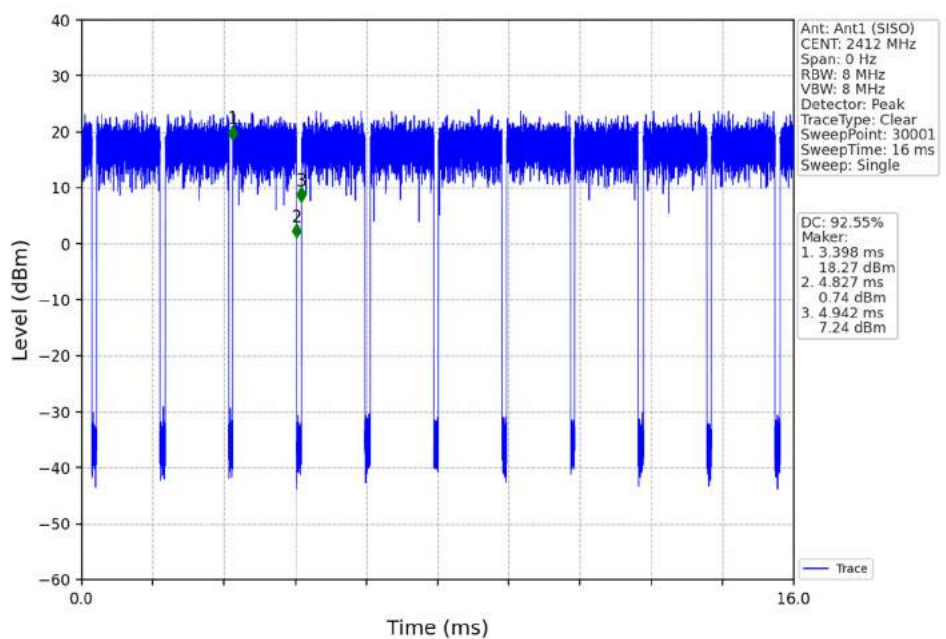


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

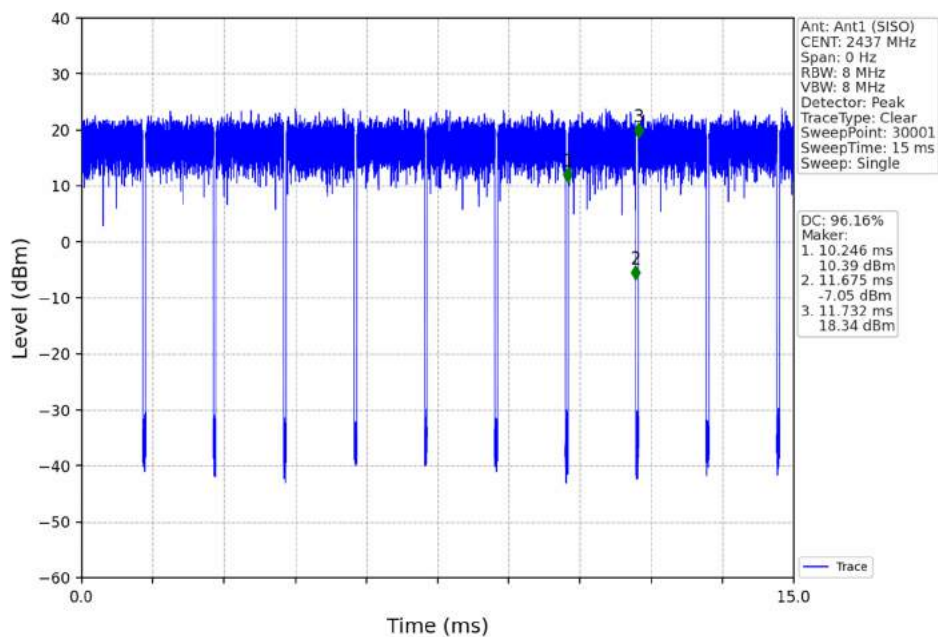


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

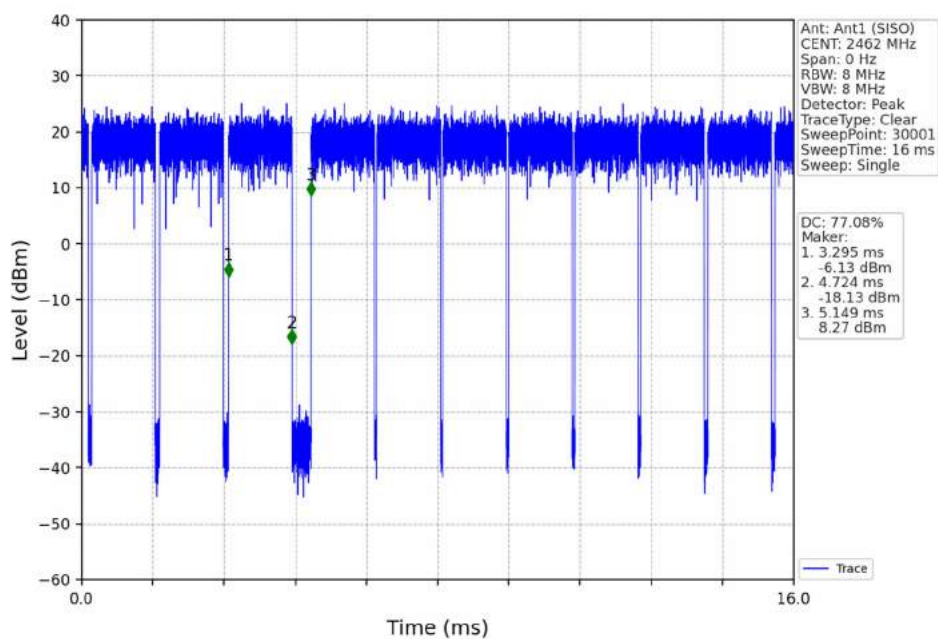


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

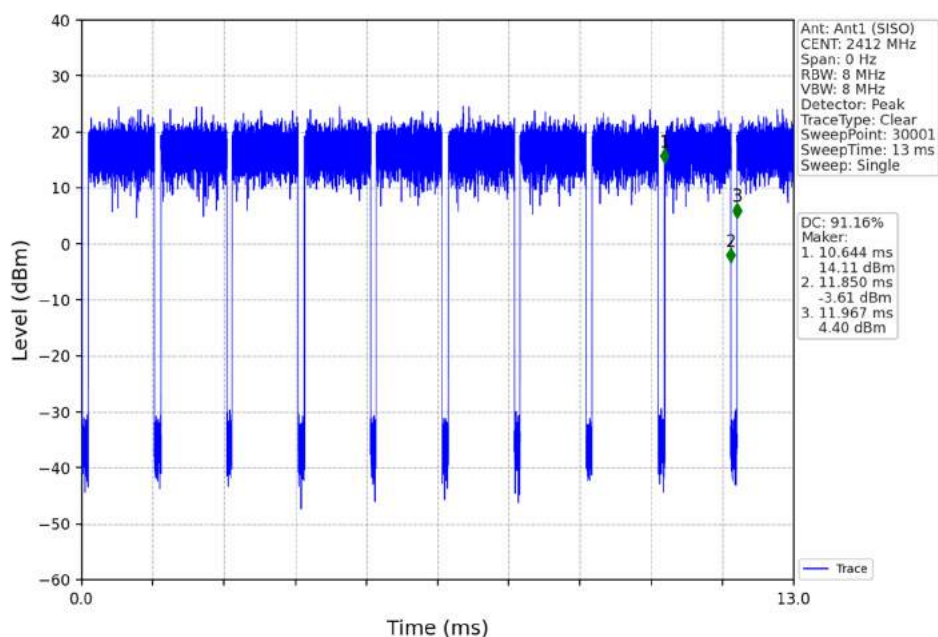


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

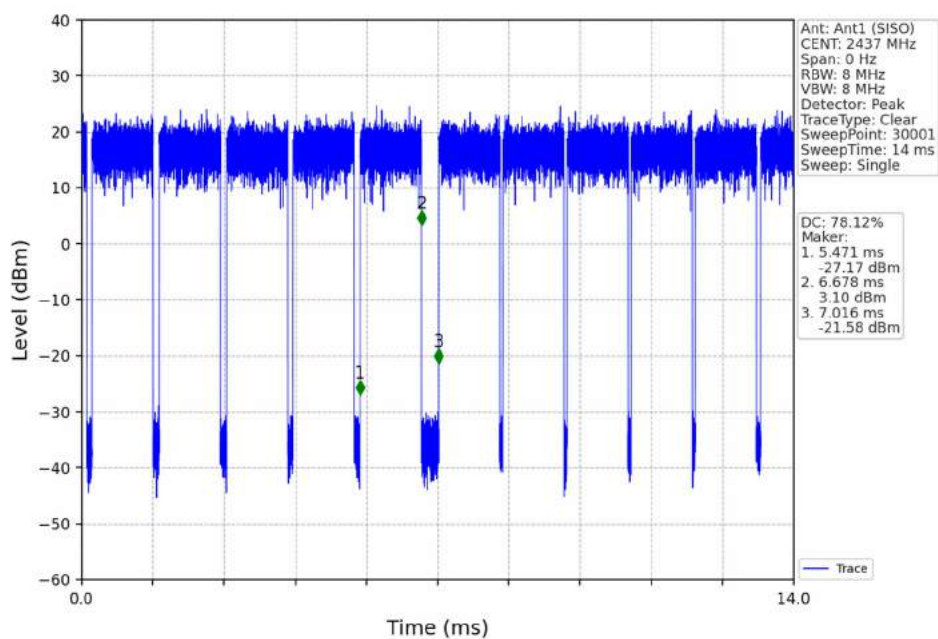


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

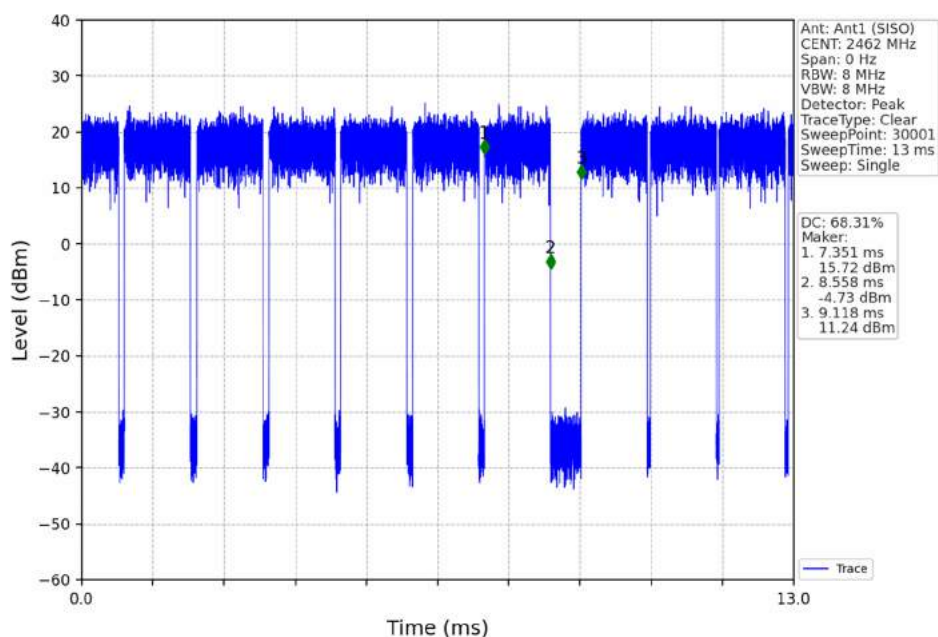


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

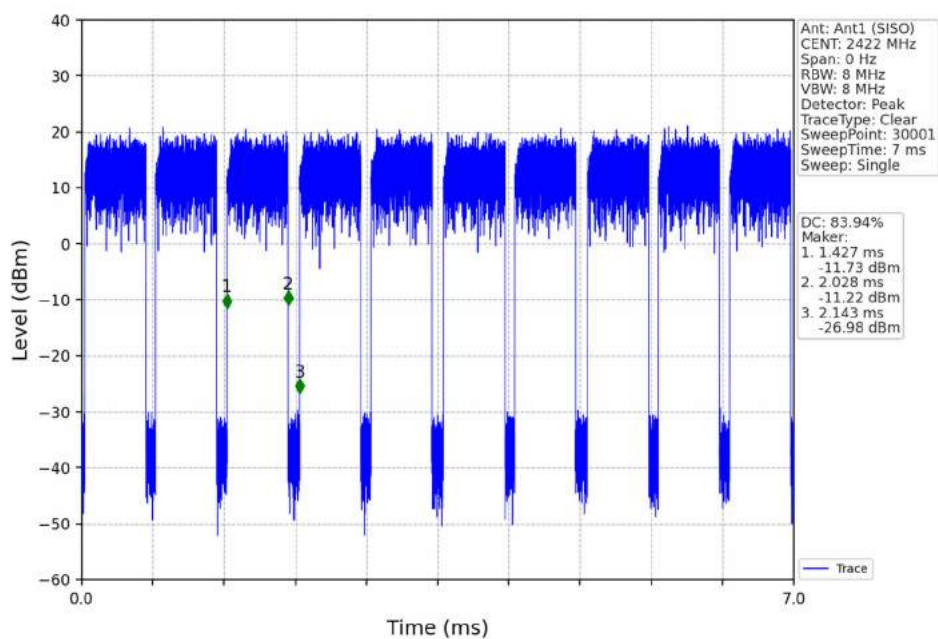


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

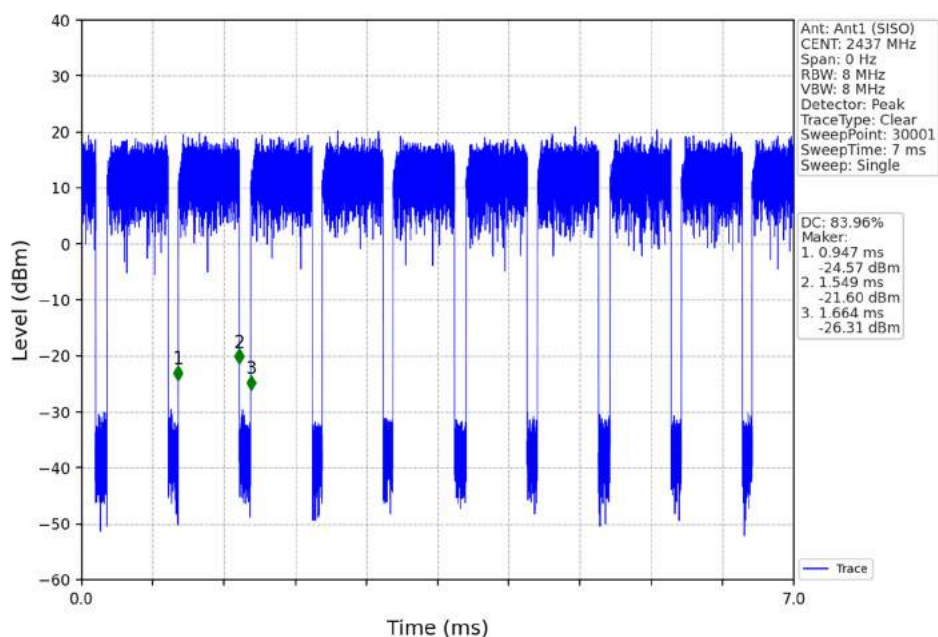


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

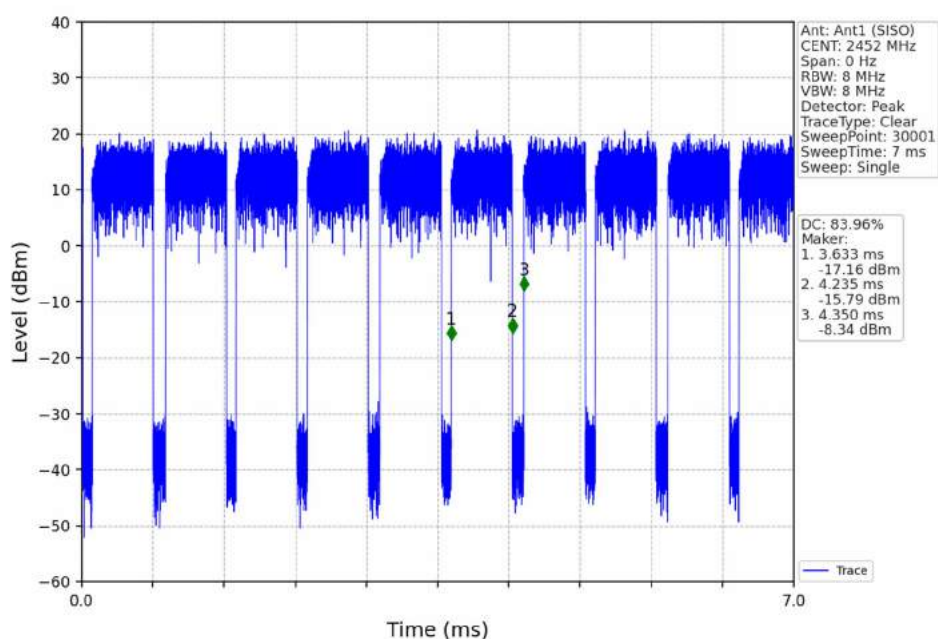


802.11ax(HEW20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

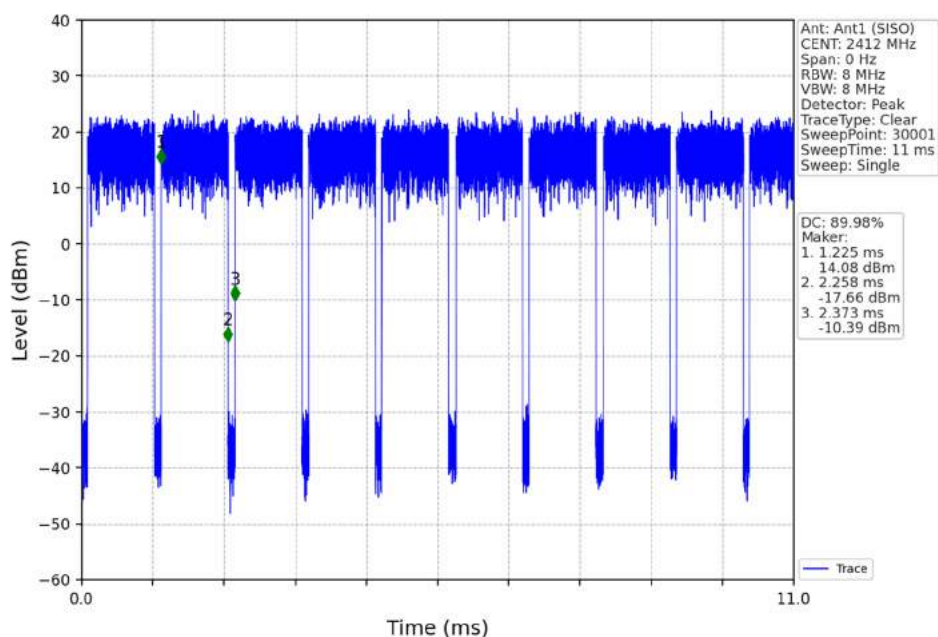


802.11ax(HEW20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

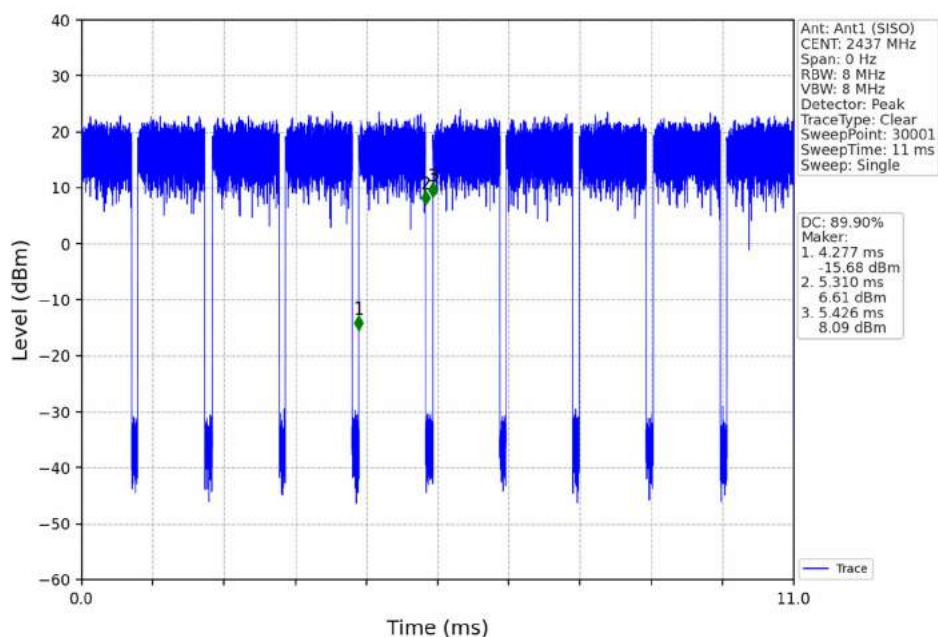


802.11ax(HEW20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

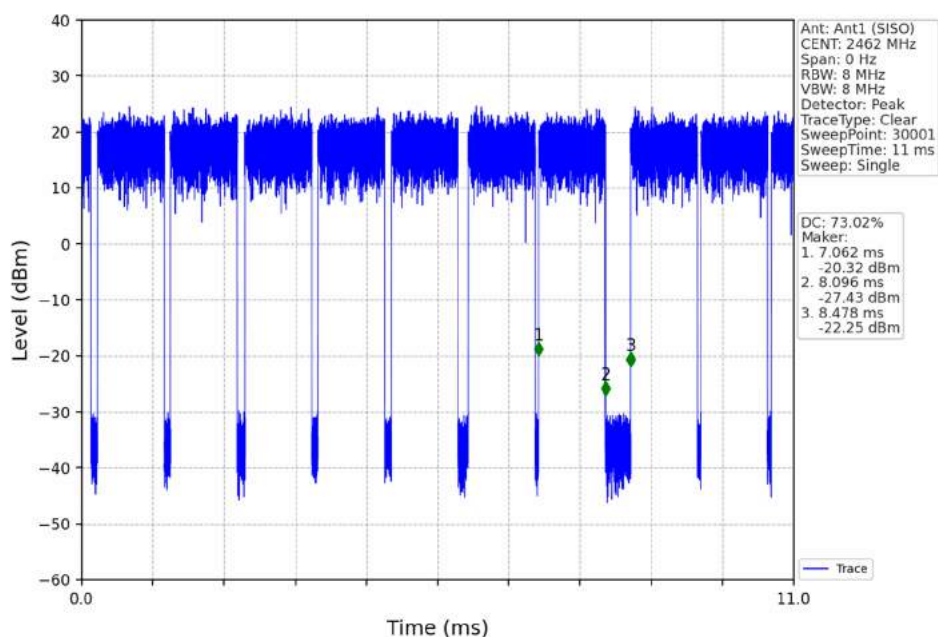


802.11ax(HEW40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

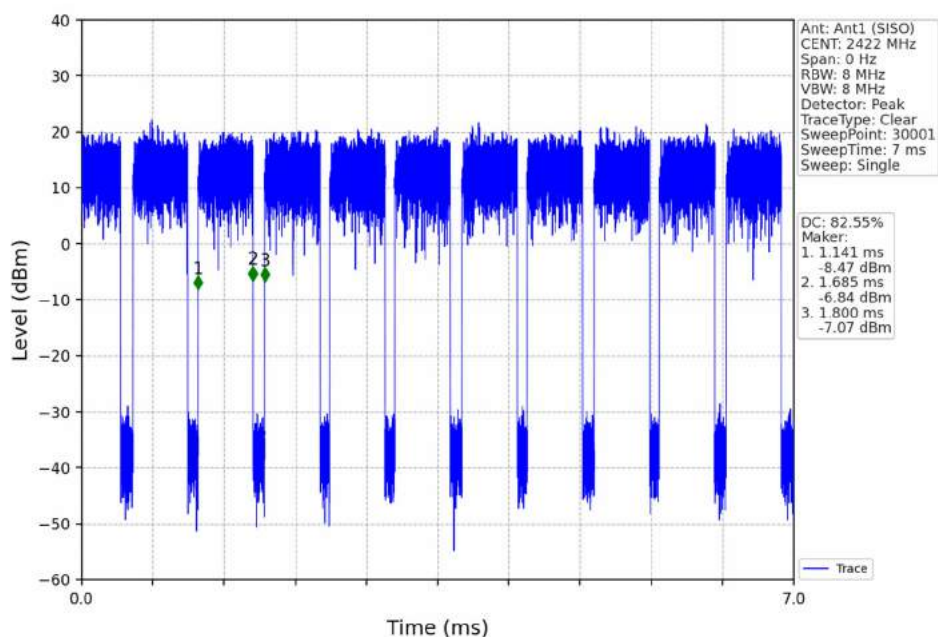


802.11ax(HEW40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

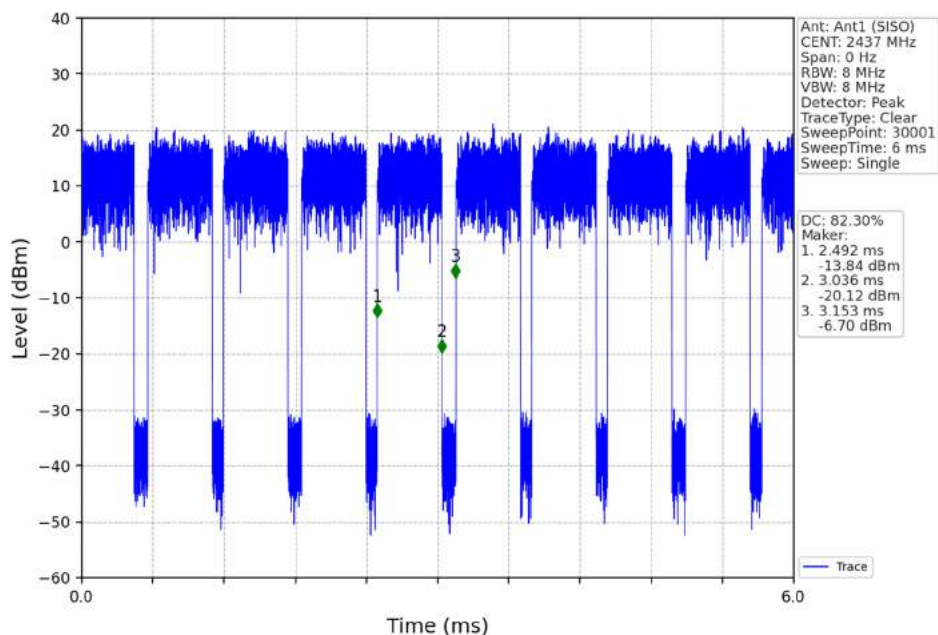


802.11ax(HEW40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

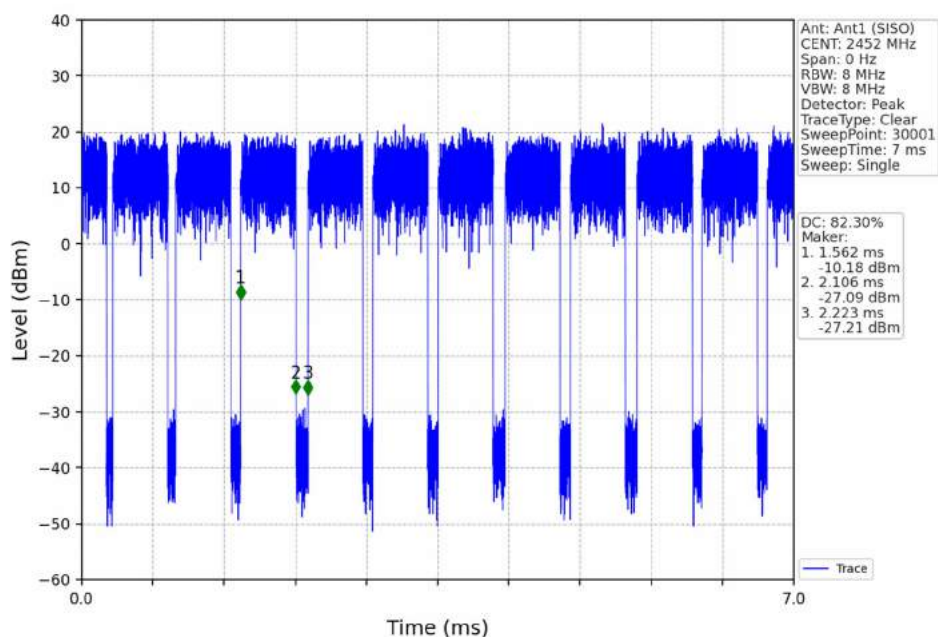


802.11ac(VHT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

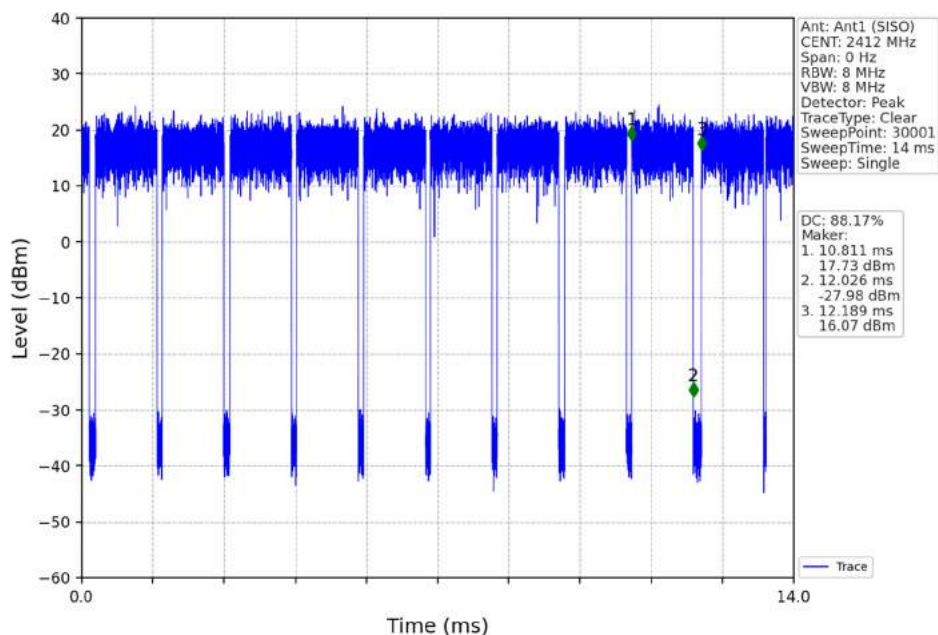


802.11ac(VHT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

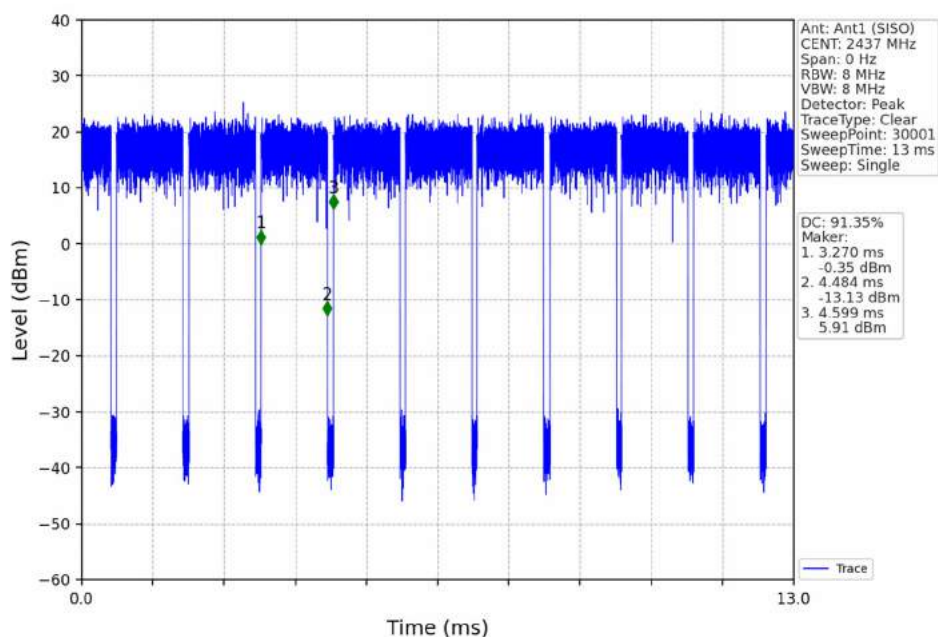


802.11ac(VHT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

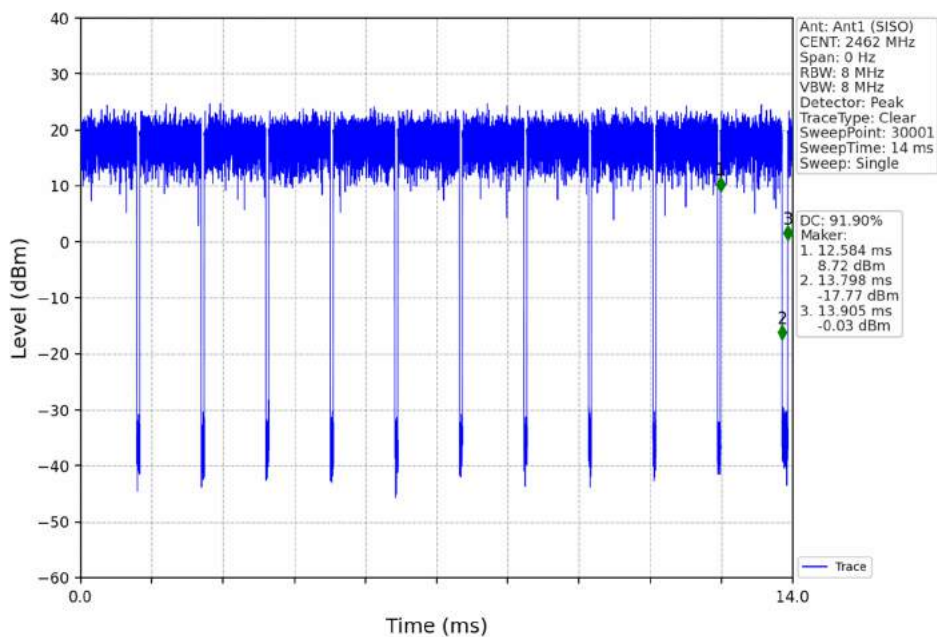


802.11ac(VHT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

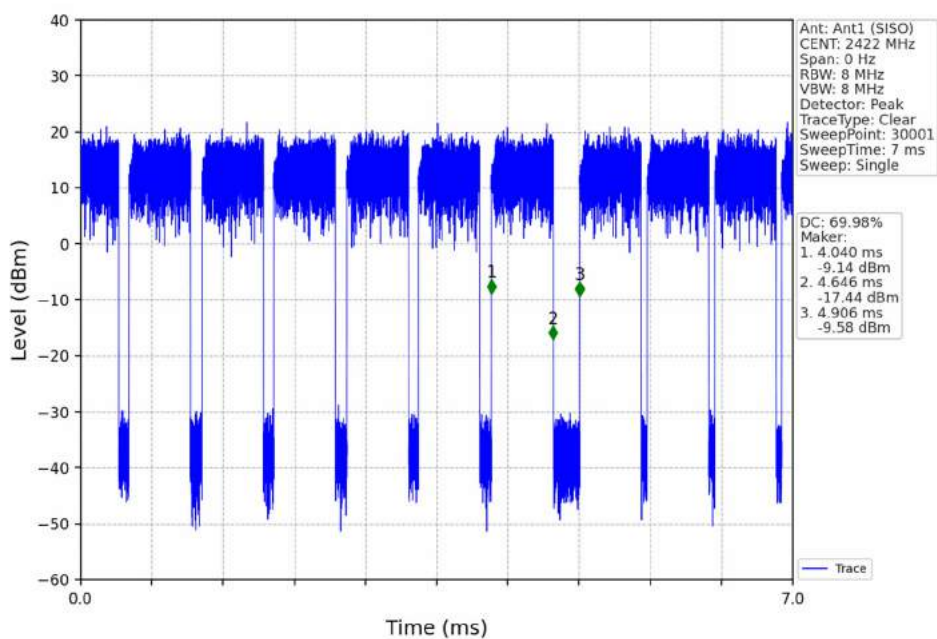


802.11ac(VHT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

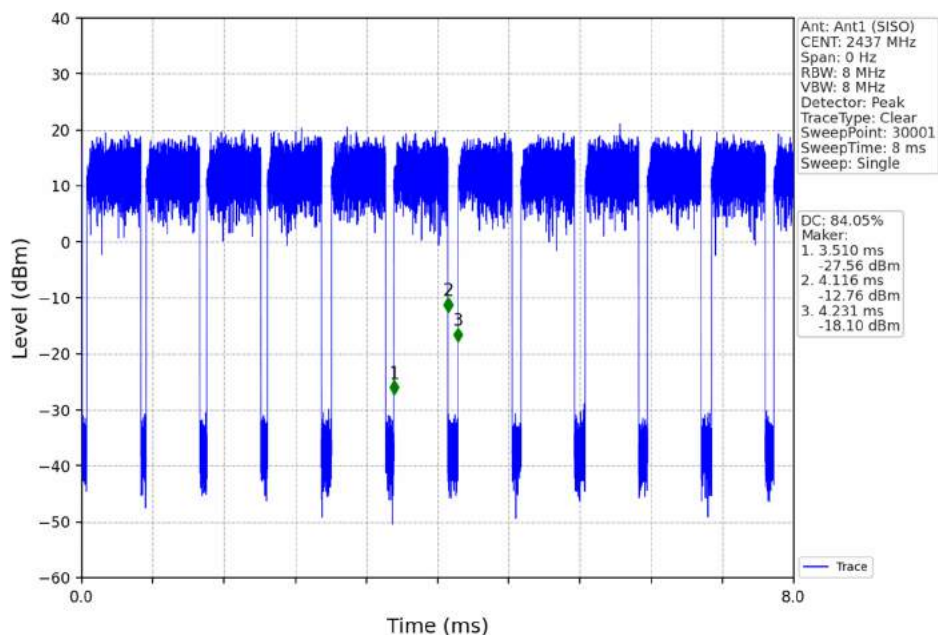


802.11ac(VHT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

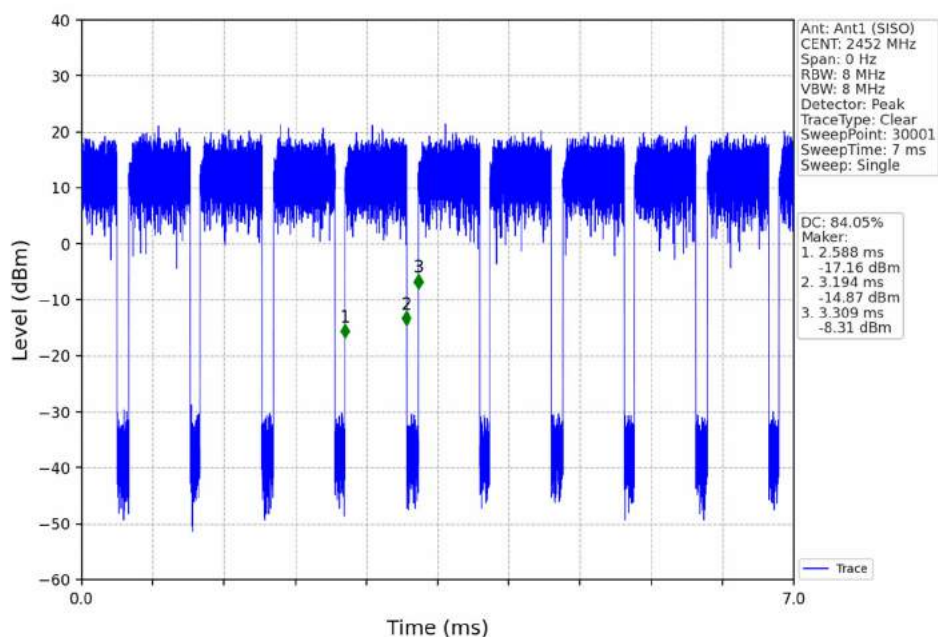


802.11b_LCH_2412MHz_Ant2 (SISO)_NTNV

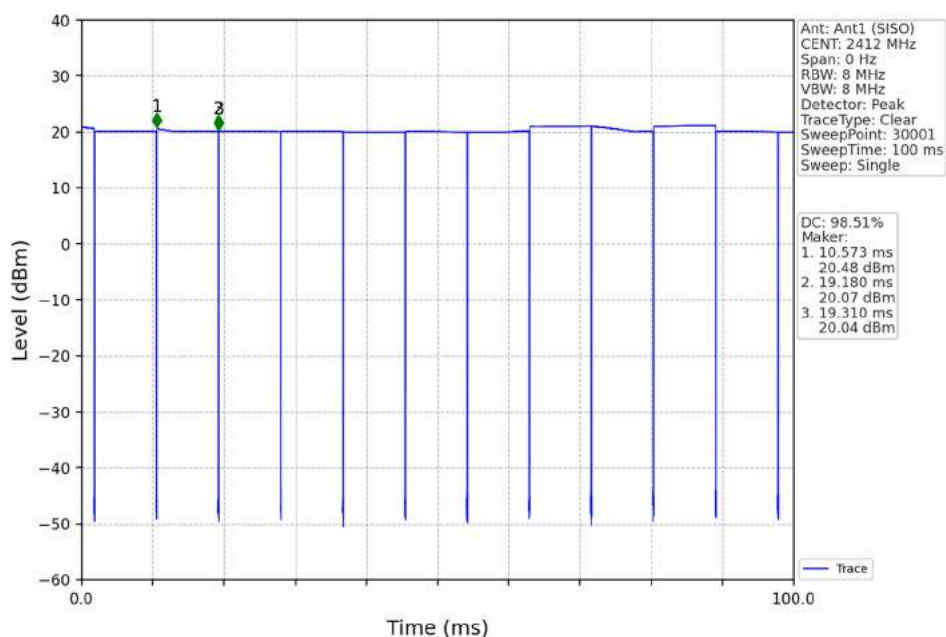


802.11b_MCH_2437MHz_Ant2 (SISO)_NTNV

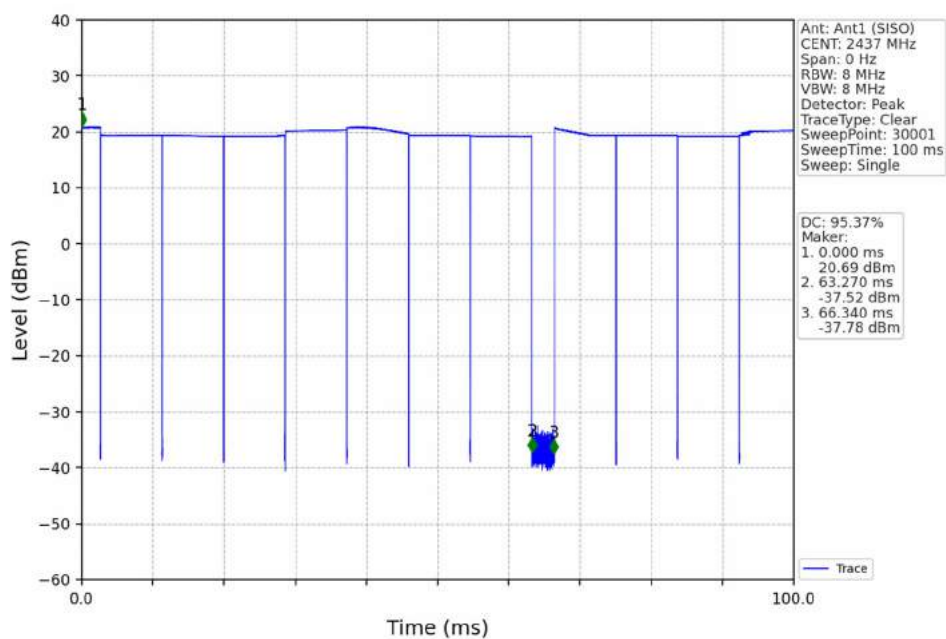


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

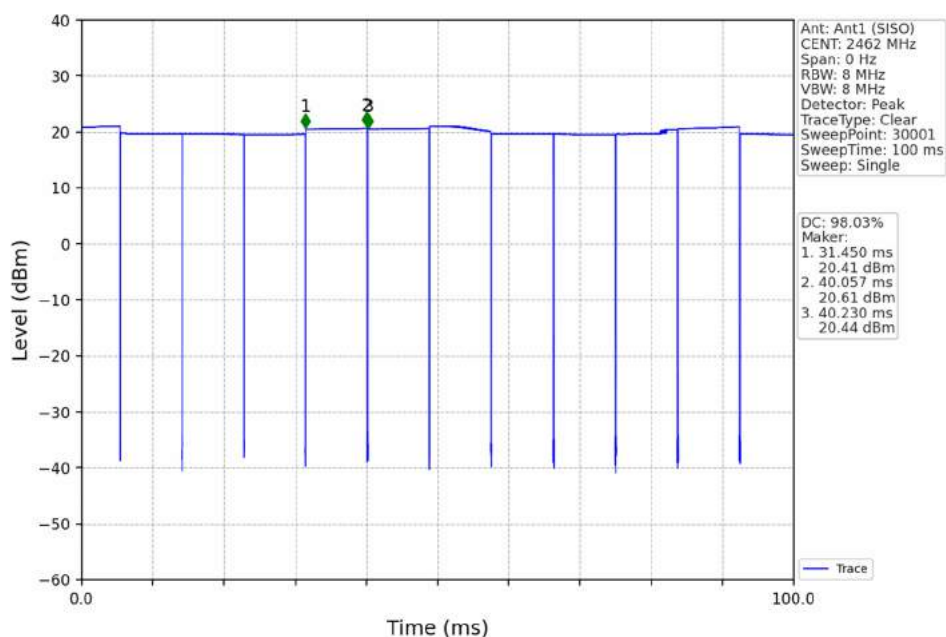


802.11g_LCH_2412MHz_Ant2 (SISO)_NTNV

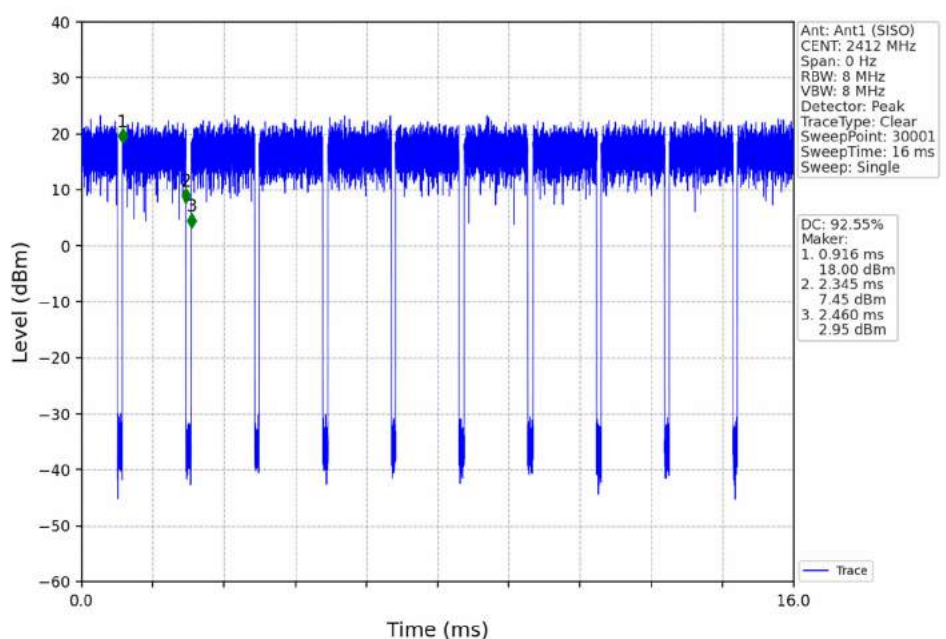


802.11g_MCH_2437MHz_Ant2 (SISO)_NTNV

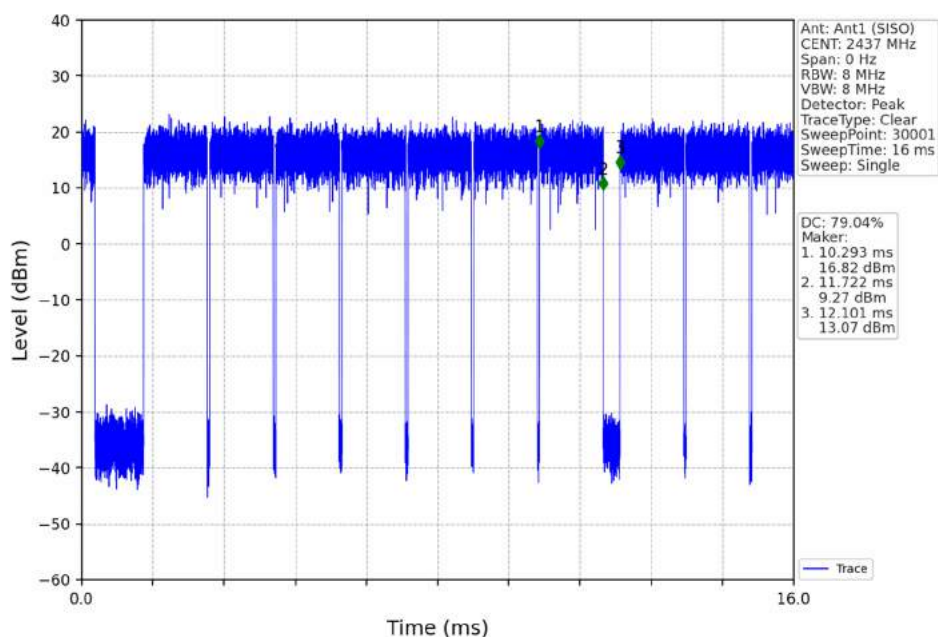


802.11g_HCH_2462MHz_Ant2 (SISO)_NTNV

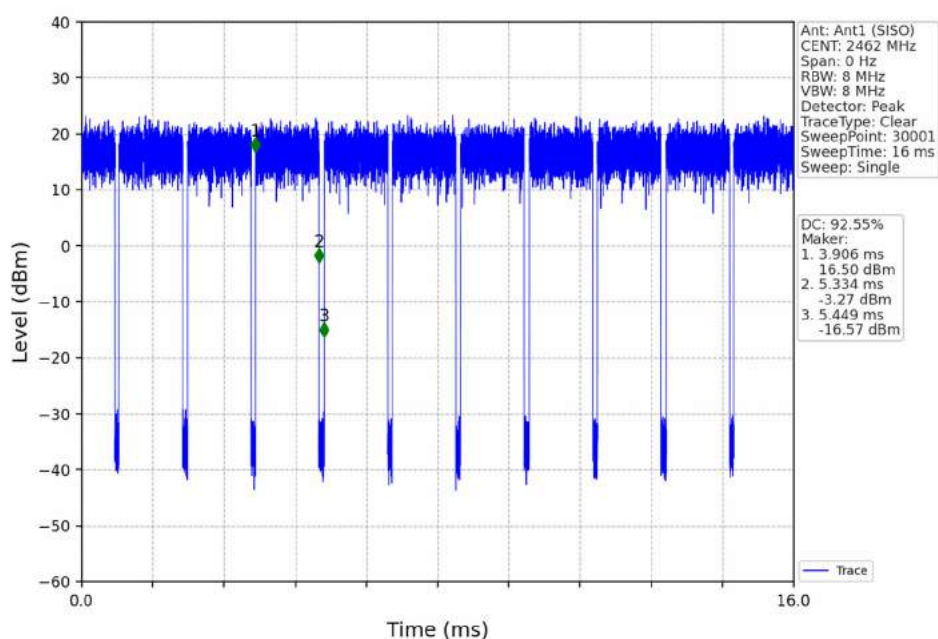


802.11n(HT20)_LCH_2412MHz_Ant2 (SISO)_NTNV

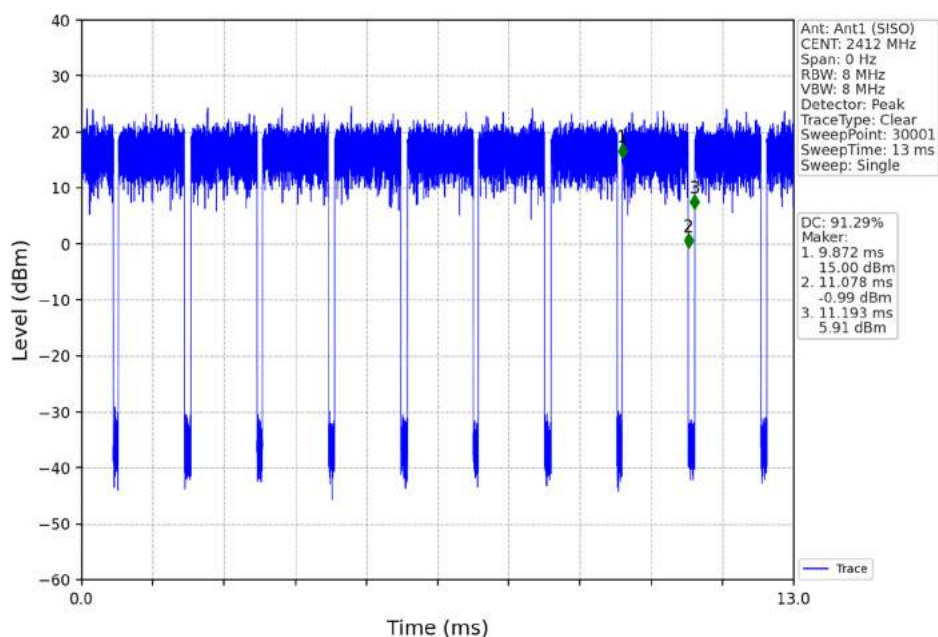


802.11n(HT20)_MCH_2437MHz_Ant2 (SISO)_NTNV

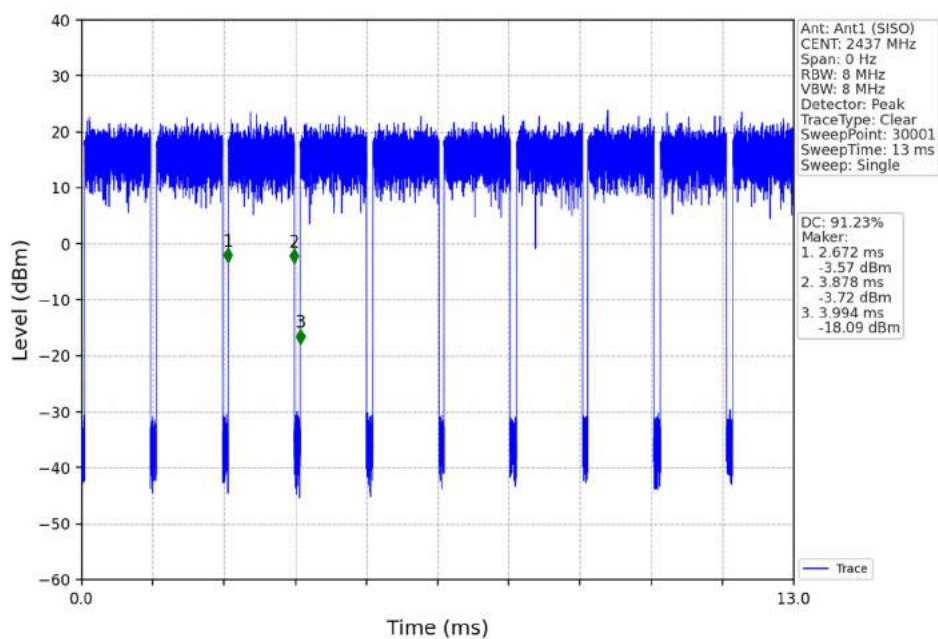


802.11n(HT20)_HCH_2462MHz_Ant2 (SISO)_NTNV

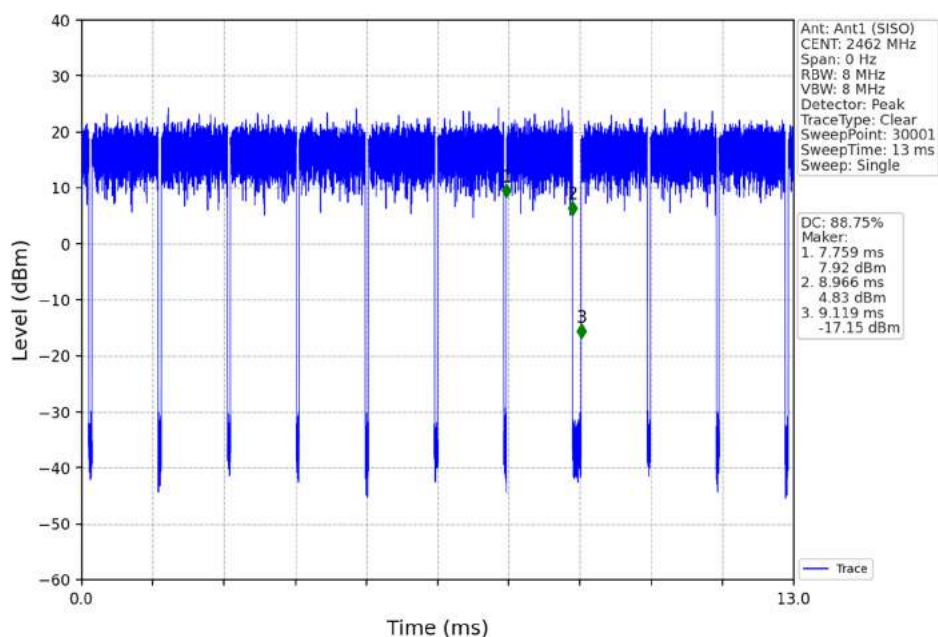


802.11n(HT40)_LCH_2422MHz_Ant2 (SISO)_NTNV

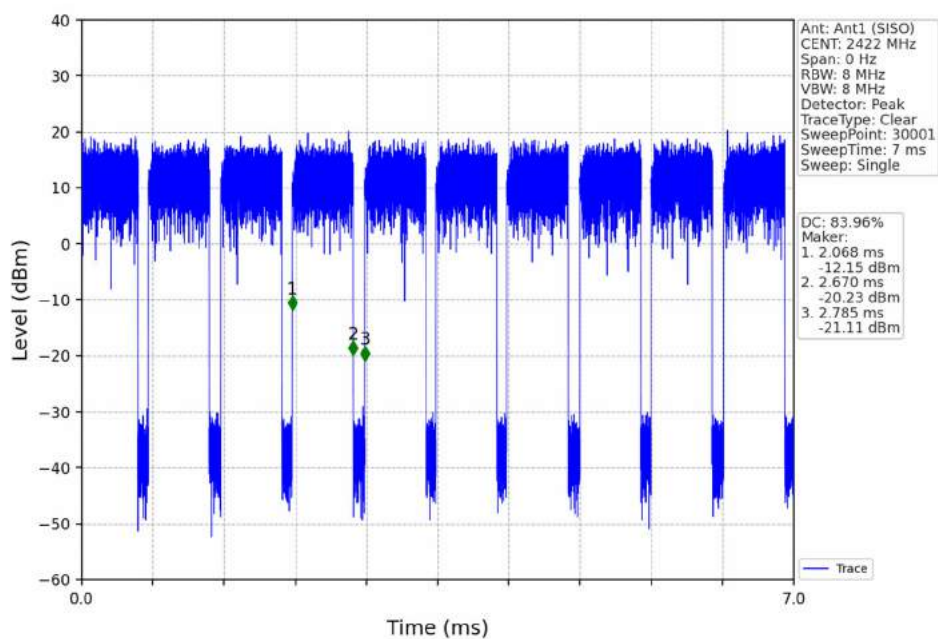


802.11n(HT40)_MCH_2437MHz_Ant2 (SISO)_NTNV

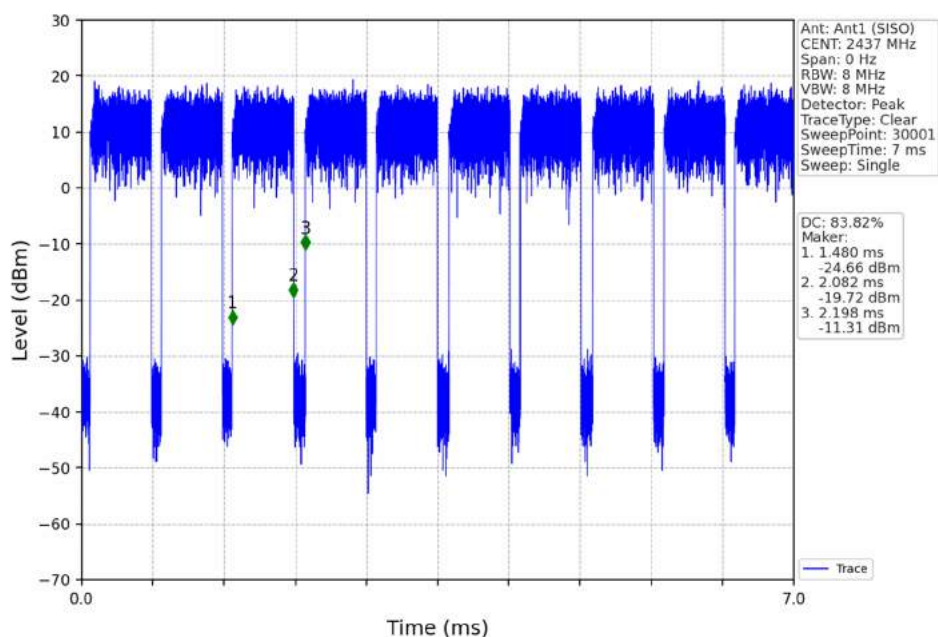


802.11n(HT40)_HCH_2452MHz_Ant2 (SISO)_NTNV

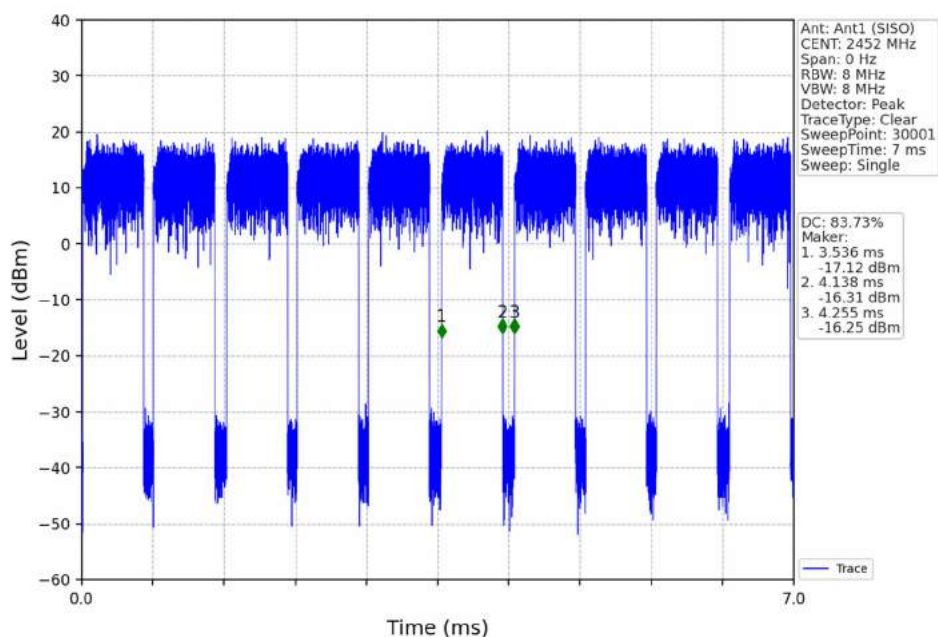


802.11ax(HEW20)_LCH_2412MHz_RU242_Left_Ant2 (SISO)_NTNV

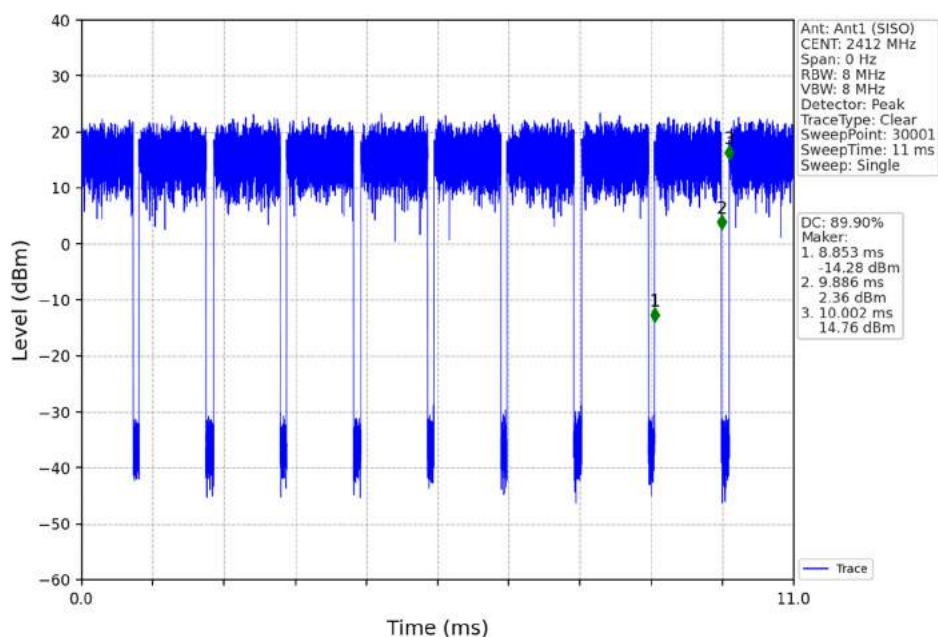


802.11ax(HEW20)_MCH_2437MHz_RU242_Left_Ant2 (SISO)_NTNV

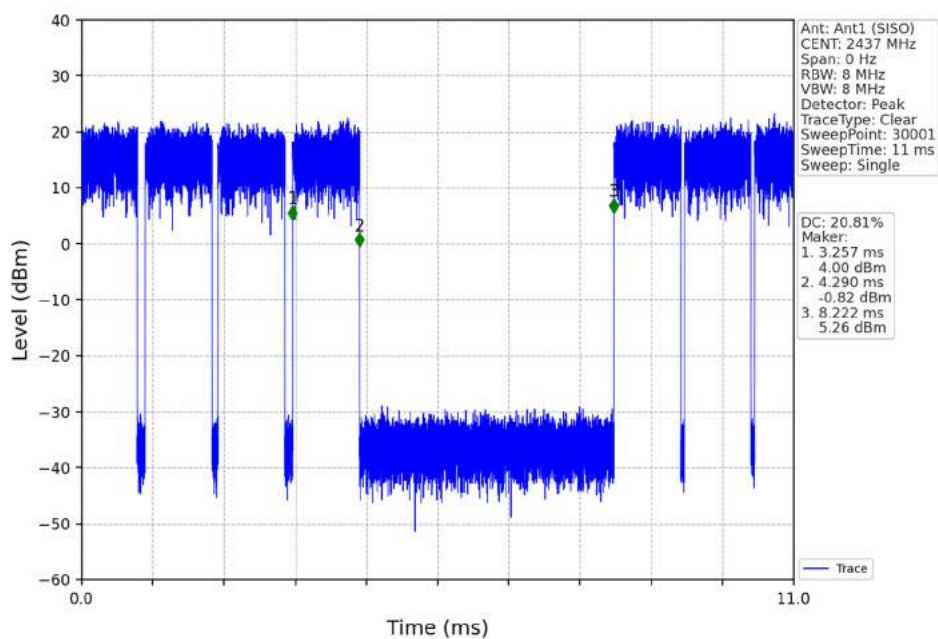


802.11ax(HEW20)_HCH_2462MHz_RU242_Left_Ant2 (SISO)_NTNV

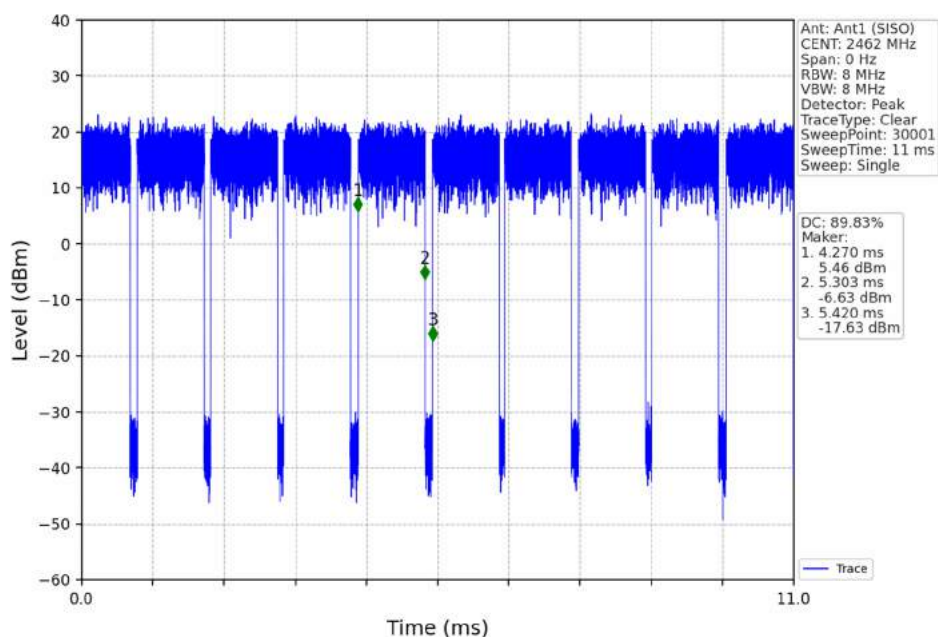


802.11ax(HEW40)_LCH_2422MHz_RU484_Left_Ant2 (SISO)_NTNV

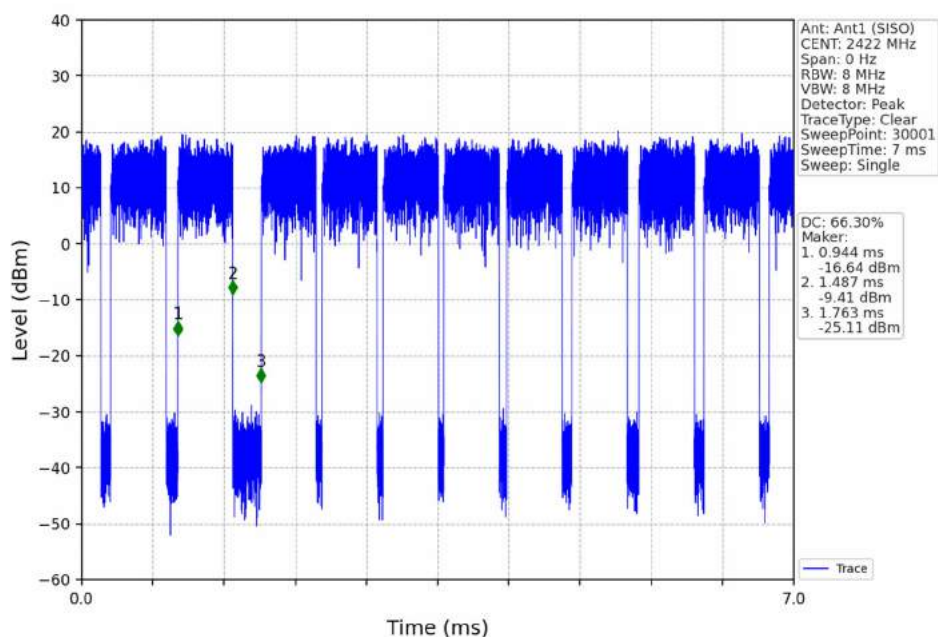


802.11ax(HEW40)_MCH_2437MHz_RU484_Left_Ant2 (SISO)_NTNV

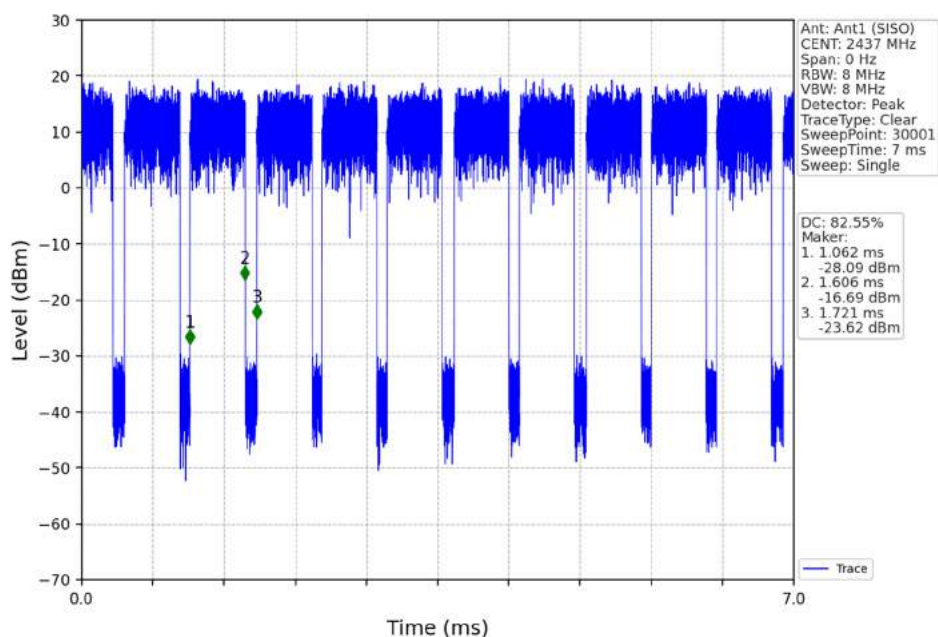


802.11ax(HEW40)_HCH_2452MHz_RU484_Left_Ant2 (SISO)_NTNV

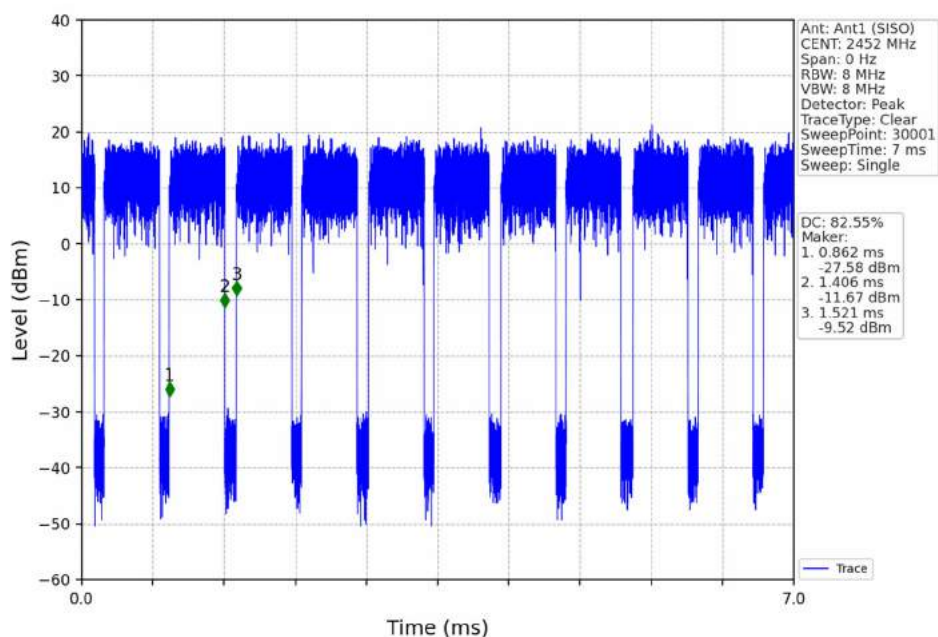


802.11ac(VHT20)_LCH_2412MHz_Ant2 (SISO)_NTNV

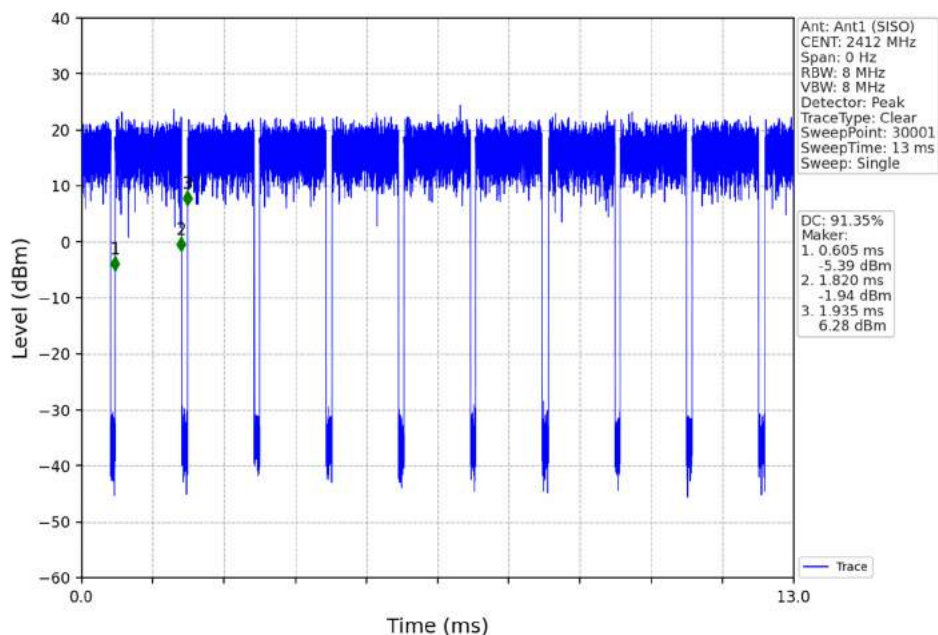


802.11ac(VHT20)_MCH_2437MHz_Ant2 (SISO)_NTNV

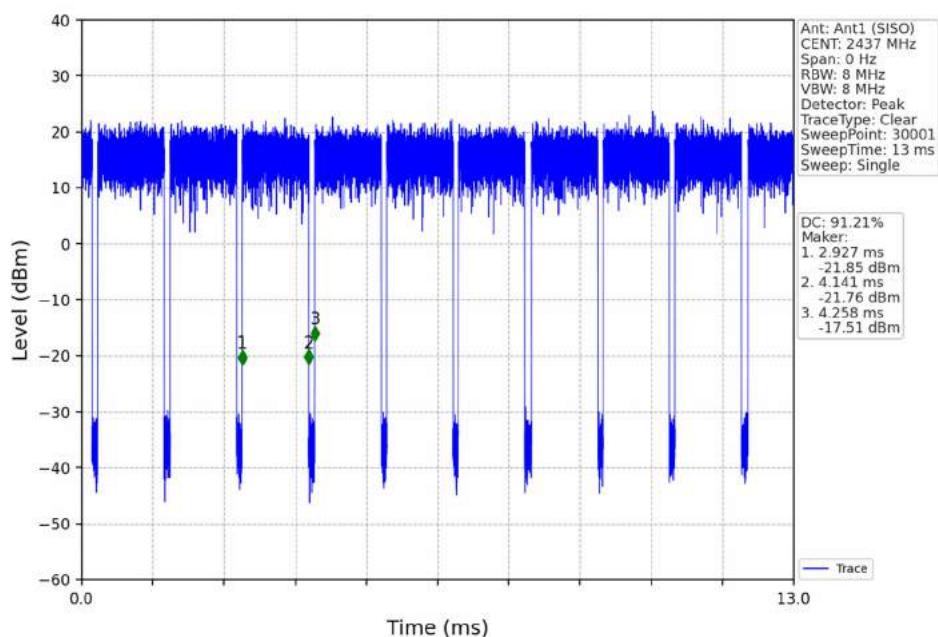


802.11ac(VHT20)_HCH_2462MHz_Ant2 (SISO)_NTNV

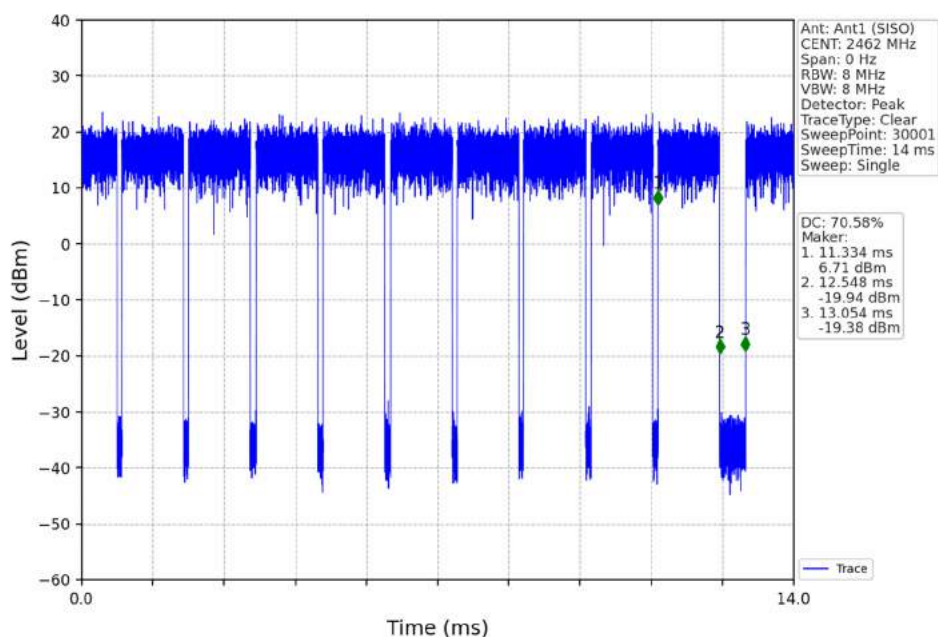


802.11ac(VHT40)_LCH_2422MHz_Ant2 (SISO)_NTNV

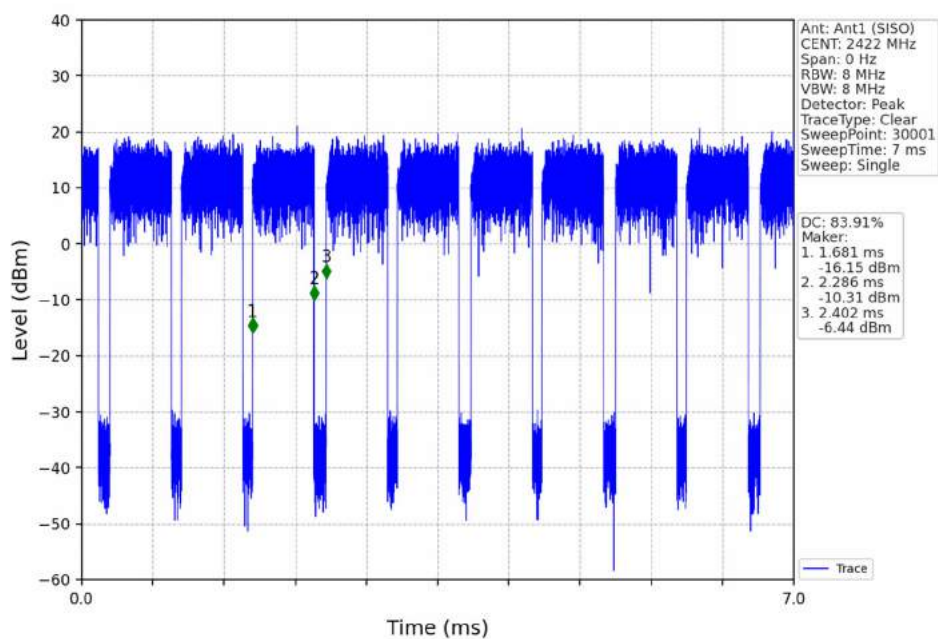

802.11ac(VHT40)_MCH_2437MHz_Ant2 (SISO)_NTNV

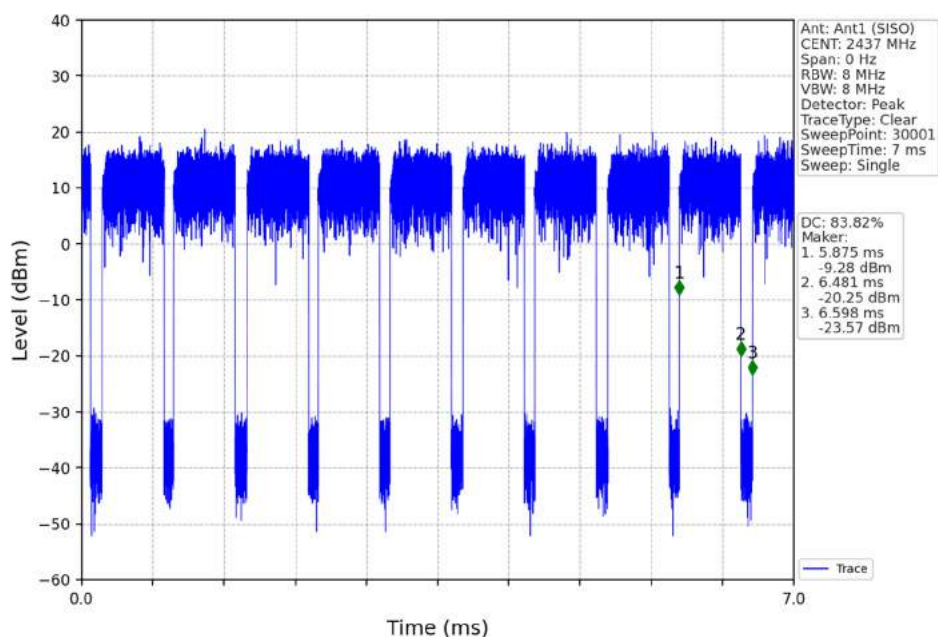

802.11ac(VHT40)_HCH_2452MHz_Ant2 (SISO)_NTNV

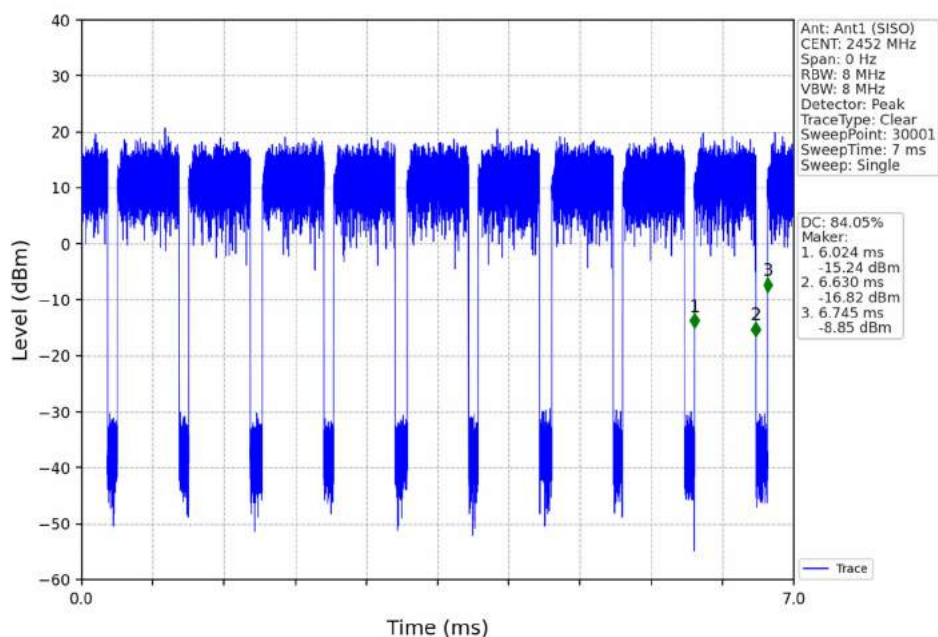

2. Bandwidth

2.1 OBW

2.1.1 Test Result


ANT 1:

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)	Verdict
						Result	
802.11b	SISO	2412	/	/	1	15.734	Pass
		2437	/	/	1	15.881	Pass
		2462	/	/	1	15.771	Pass
802.11g	SISO	2412	/	/	1	18.221	Pass
		2437	/	/	1	18.326	Pass
		2462	/	/	1	18.094	Pass
802.11n (HT20)	SISO	2412	/	/	1	19.351	Pass
		2437	/	/	1	19.561	Pass
		2462	/	/	1	19.200	Pass
802.11n (HT40)	SISO	2422	/	/	1	37.869	Pass
		2437	/	/	1	38.276	Pass
		2452	/	/	1	38.361	Pass
802.11ax (HEW20)	SISO	2412	RU242	Left	1	19.837	Pass
		2437	RU242	Left	1	19.931	Pass
		2462	RU242	Left	1	19.859	Pass
802.11ax (HEW40)	SISO	2422	RU484	Left	1	38.743	Pass
		2437	RU484	Left	1	39.021	Pass
		2452	RU484	Left	1	39.013	Pass
802.11ac (VHT20)	SISO	2412	/	/	1	19.157	Pass
		2437	/	/	1	19.301	Pass
		2462	/	/	1	19.117	Pass
802.11ac (VHT40)	SISO	2422	/	/	1	37.741	Pass
		2437	/	/	1	38.126	Pass
		2452	/	/	1	37.992	Pass


ANT 2:

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)	Verdict
						Result	
802.11b	SISO	2412	/	/	2	15.735	Pass
		2437	/	/	2	15.842	Pass
		2462	/	/	2	15.768	Pass
802.11g	SISO	2412	/	/	2	18.162	Pass
		2437	/	/	2	18.240	Pass
		2462	/	/	2	18.083	Pass
802.11n (HT20)	SISO	2412	/	/	2	19.248	Pass
		2437	/	/	2	19.307	Pass
		2462	/	/	2	19.145	Pass
802.11n (HT40)	SISO	2422	/	/	2	37.890	Pass
		2437	/	/	2	38.208	Pass
		2452	/	/	2	38.191	Pass
802.11ax (HEW20)	SISO	2412	RU242	Left	2	19.836	Pass
		2437	RU242	Left	2	19.932	Pass
		2462	RU242	Left	2	19.820	Pass
802.11ax (HEW40)	SISO	2422	RU484	Left	2	38.691	Pass
		2437	RU484	Left	2	38.955	Pass
		2452	RU484	Left	2	38.976	Pass
802.11ac (VHT20)	SISO	2412	/	/	2	19.091	Pass
		2437	/	/	2	19.173	Pass
		2462	/	/	2	19.033	Pass
802.11ac (VHT40)	SISO	2422	/	/	2	37.703	Pass
		2437	/	/	2	38.019	Pass
		2452	/	/	2	37.989	Pass


2.1.2 Test Graph

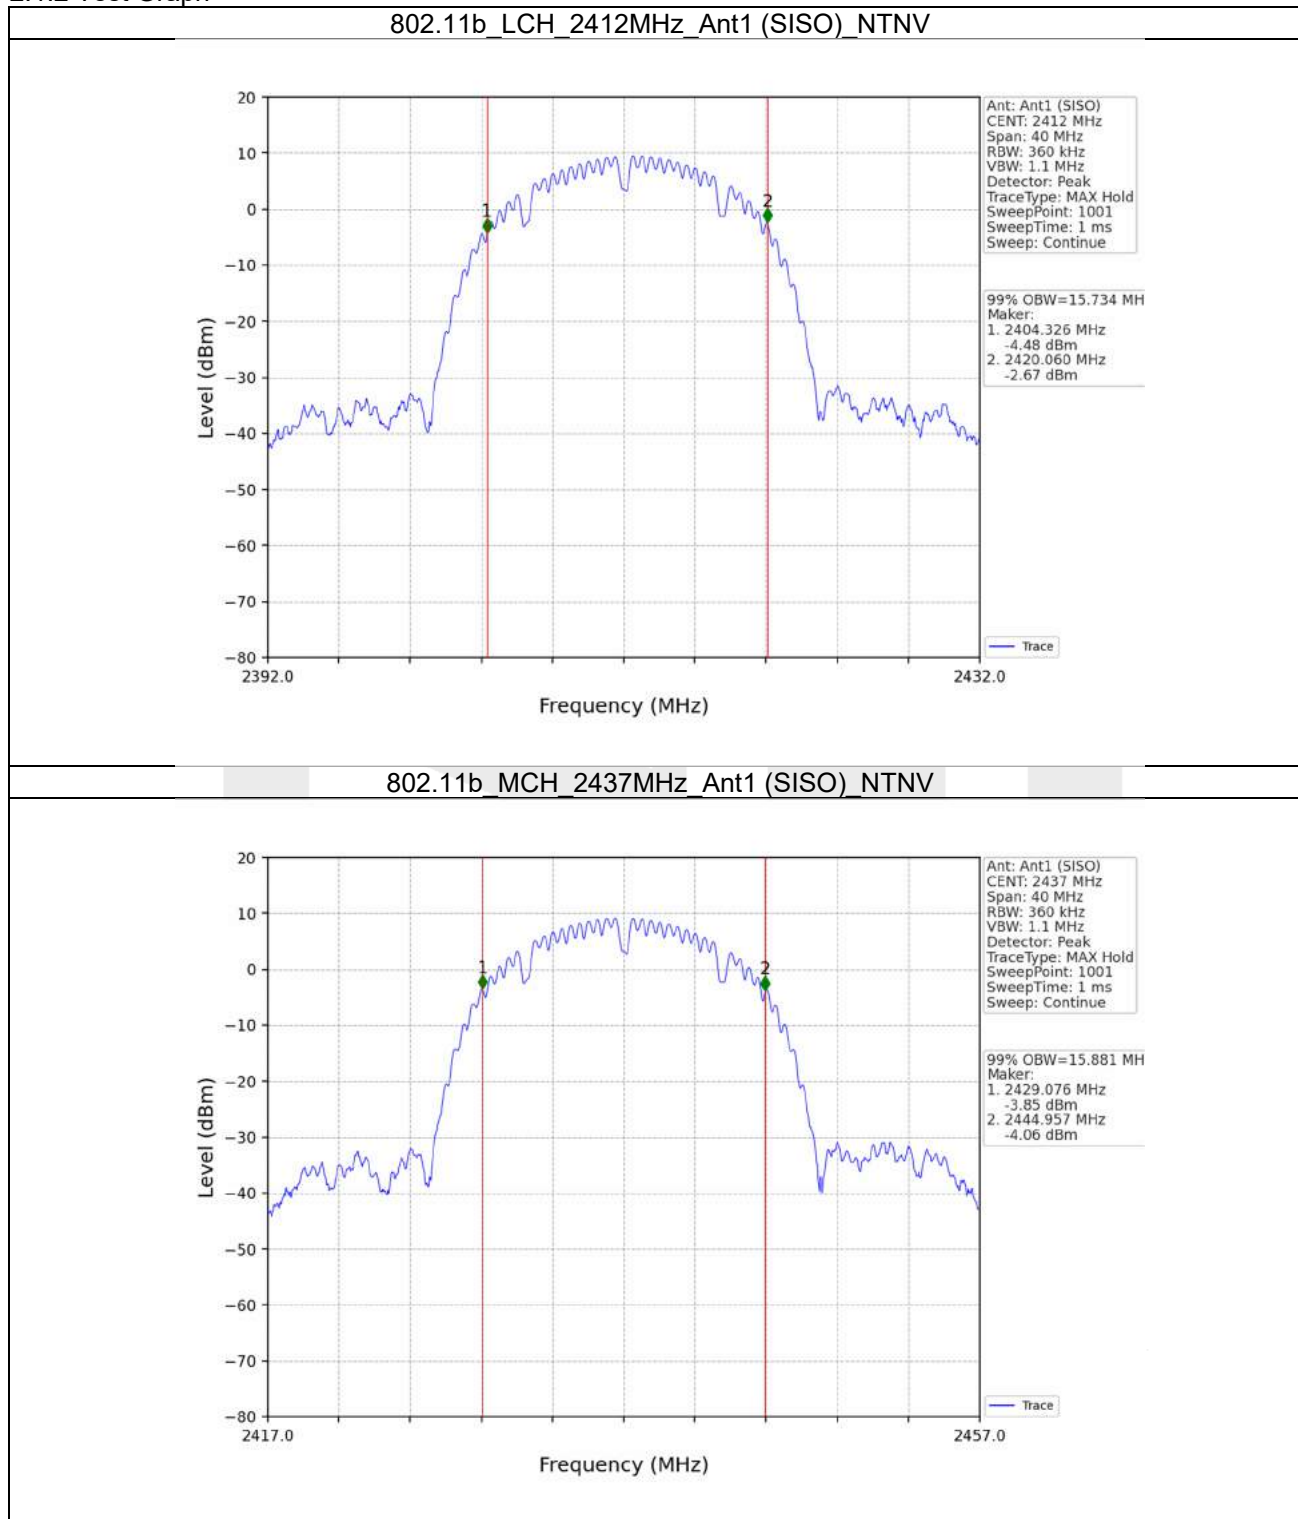


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

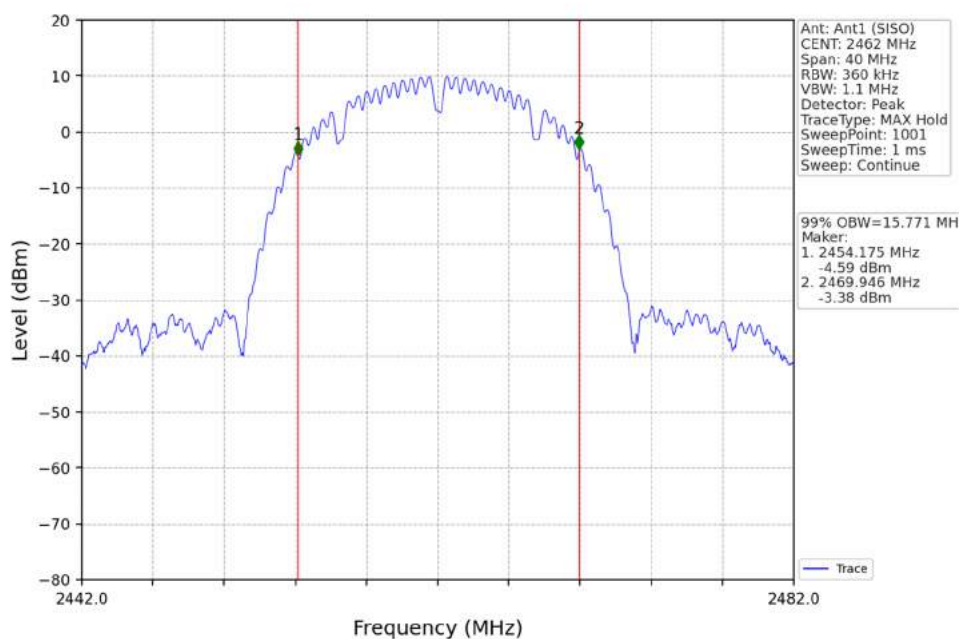


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

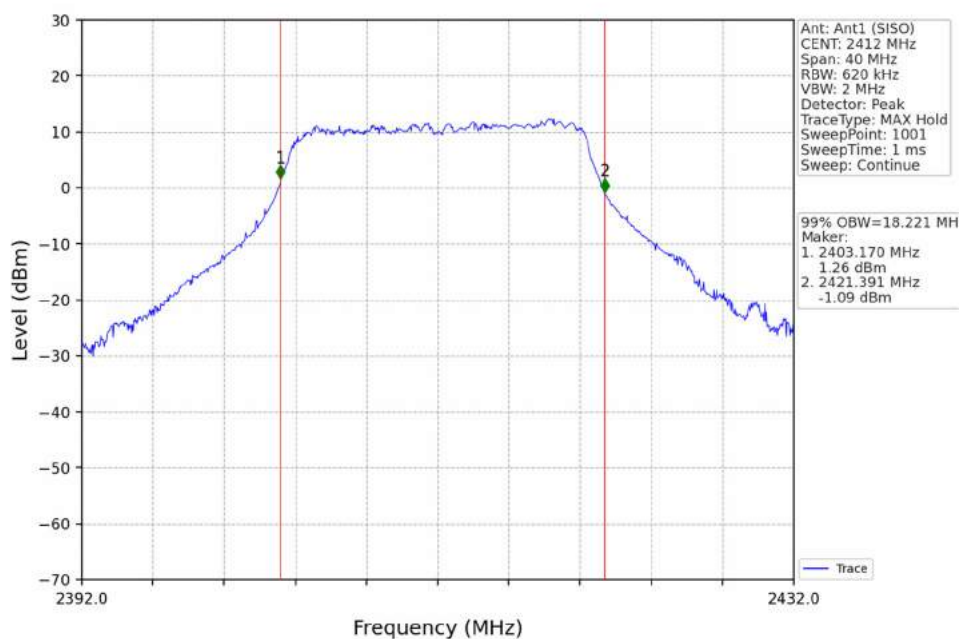


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

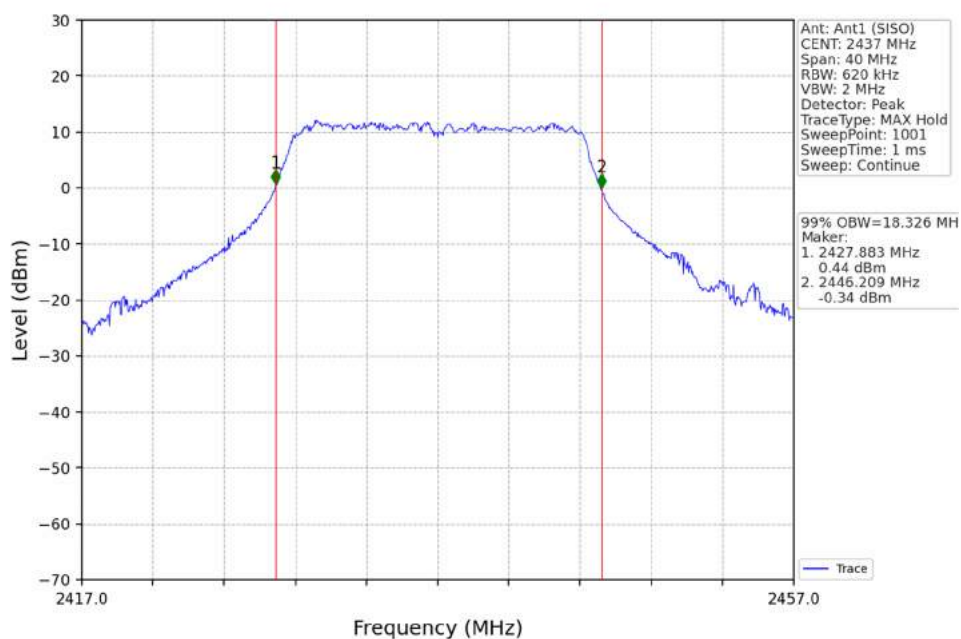


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

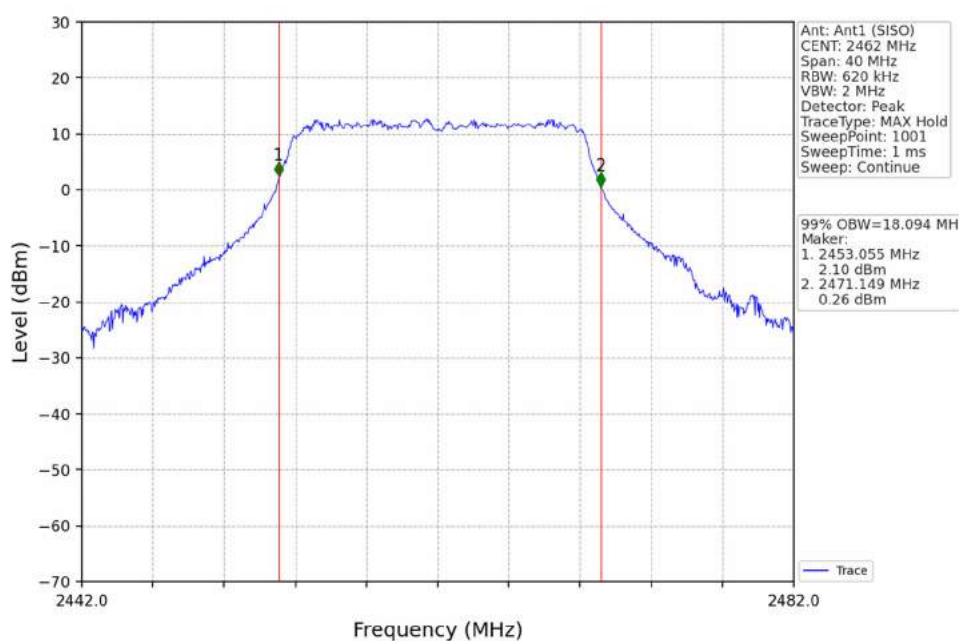


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

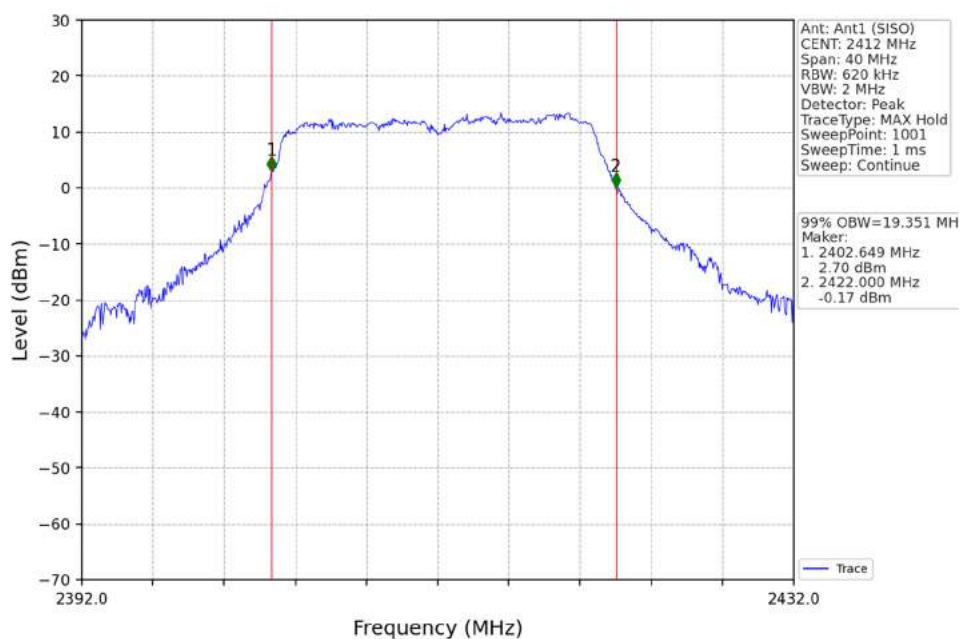


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

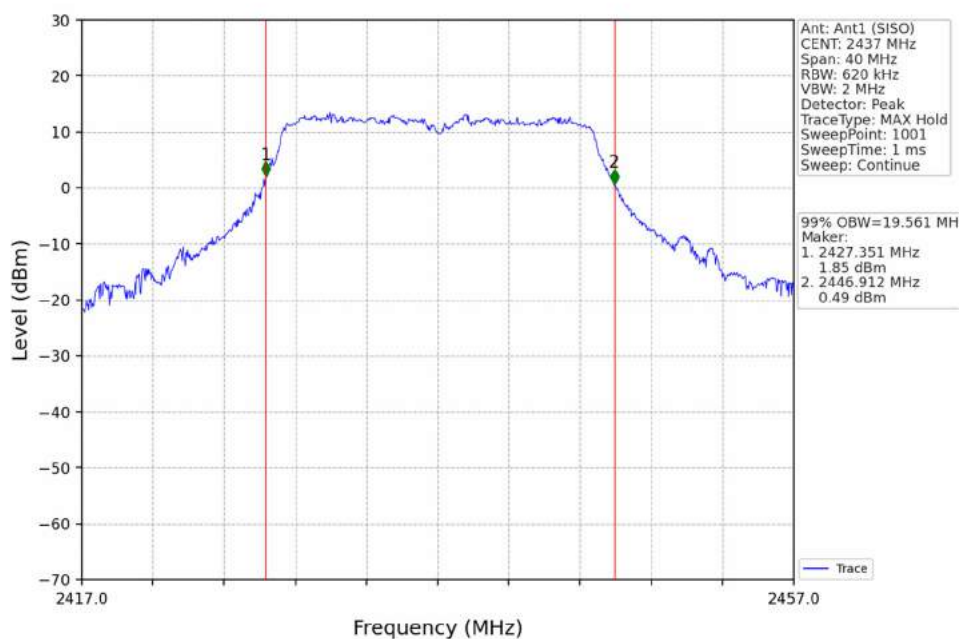


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

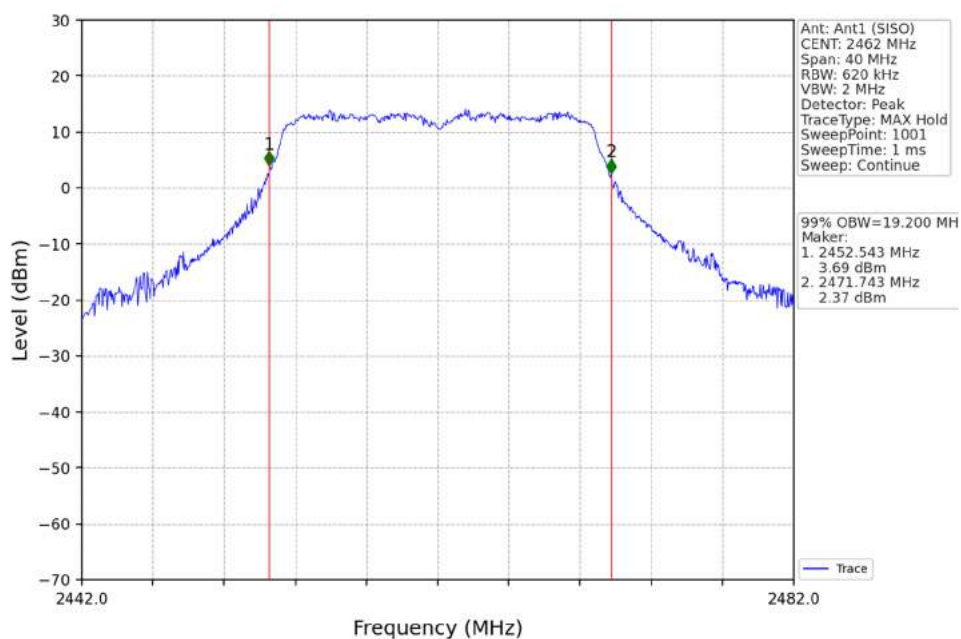


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

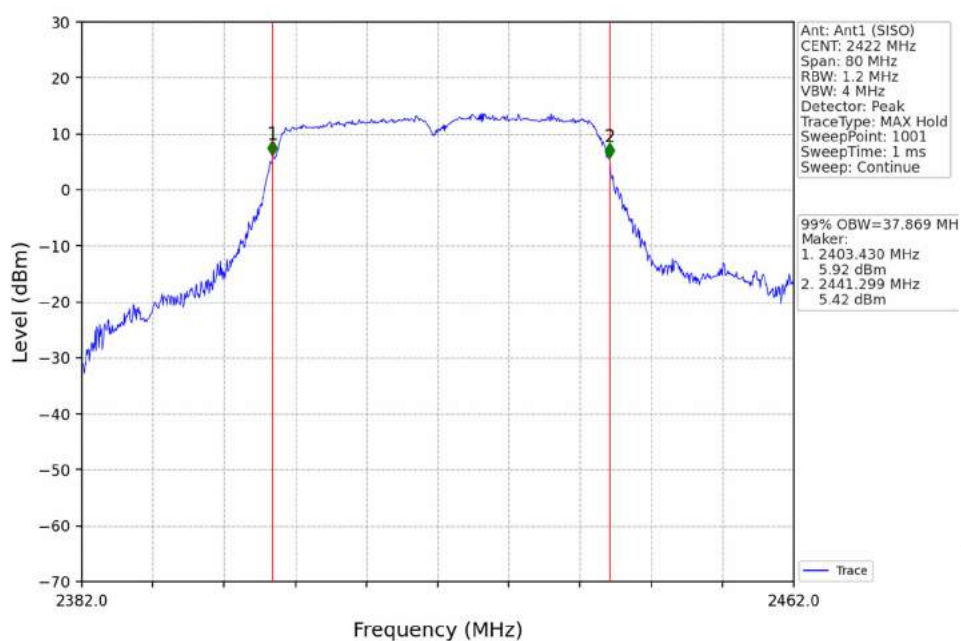


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

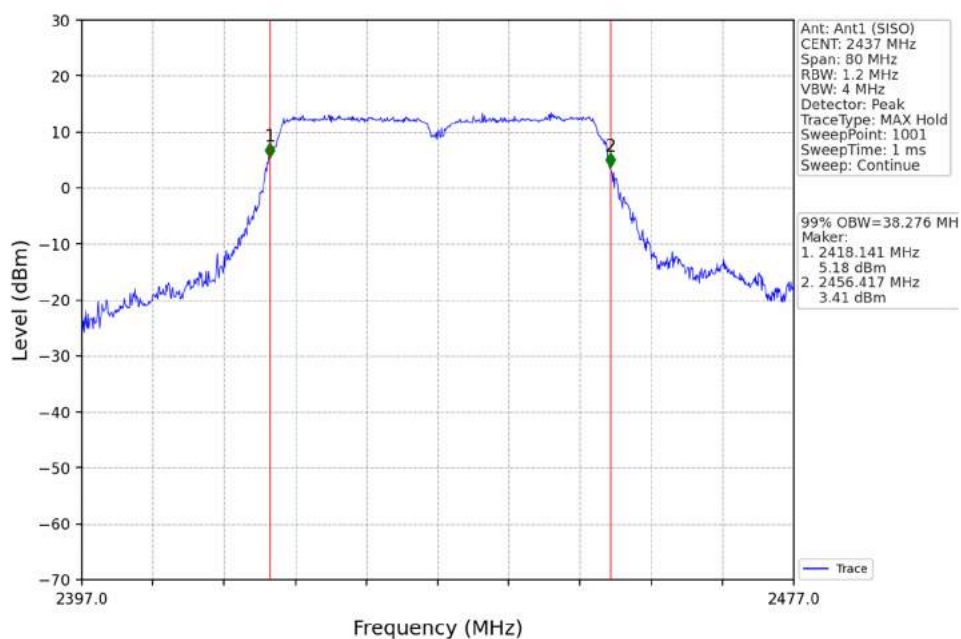


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

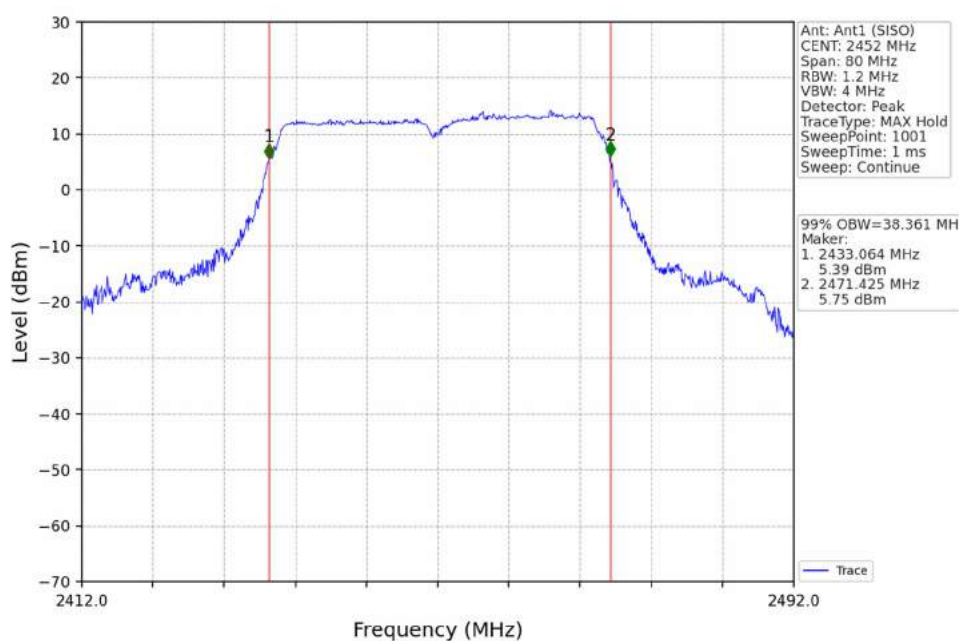


802.11ax(HEW20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

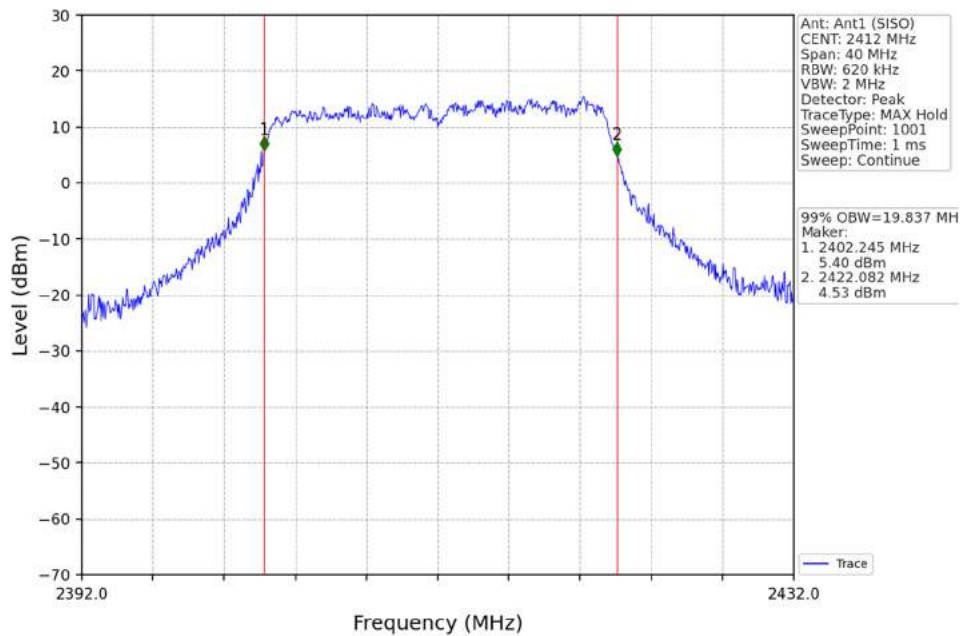


802.11ax(HEW20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

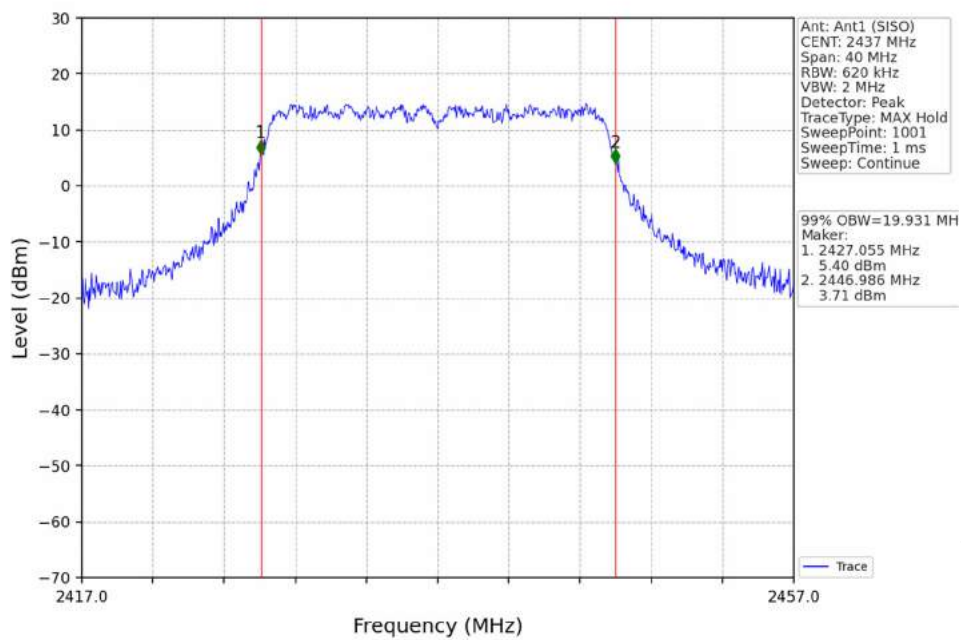


802.11ax(HEW20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

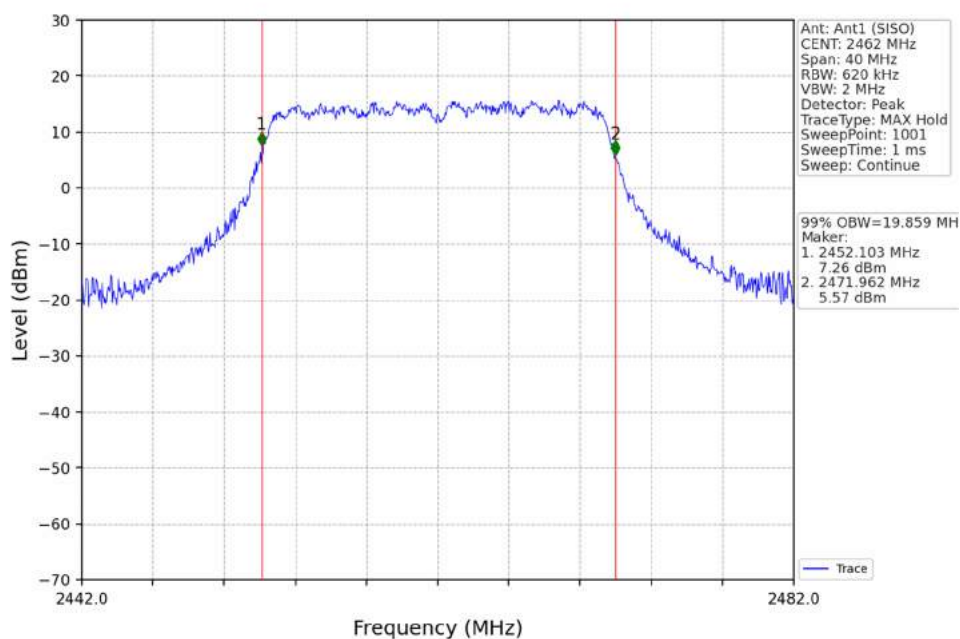


802.11ax(HEW40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

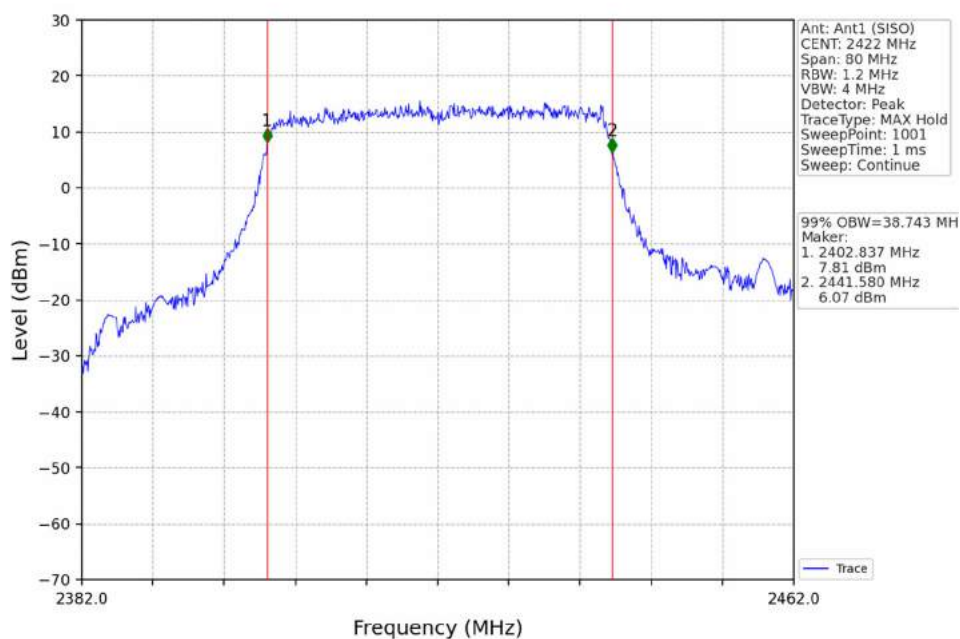


802.11ax(HEW40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

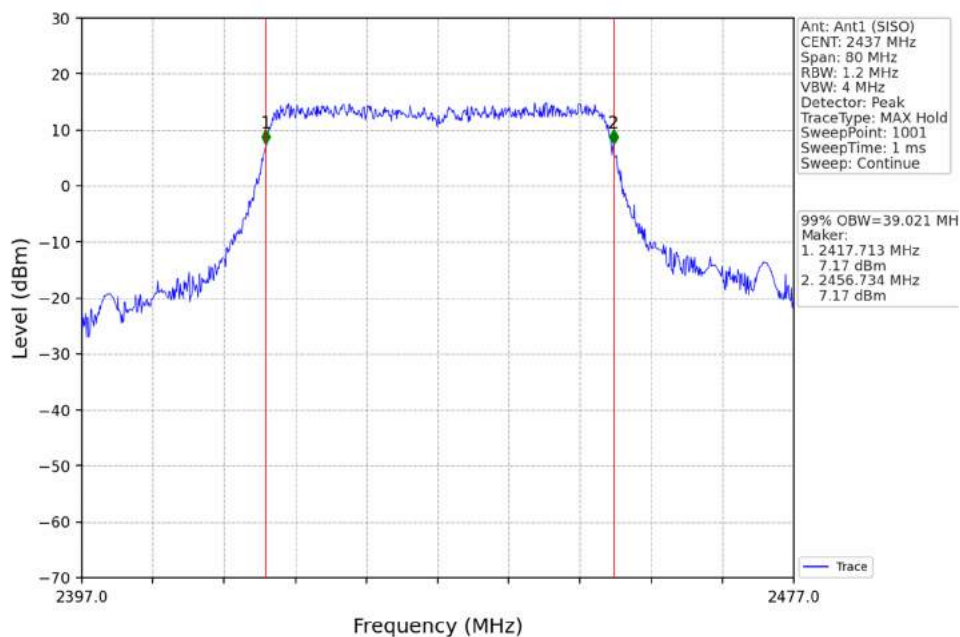


802.11ax(HEW40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

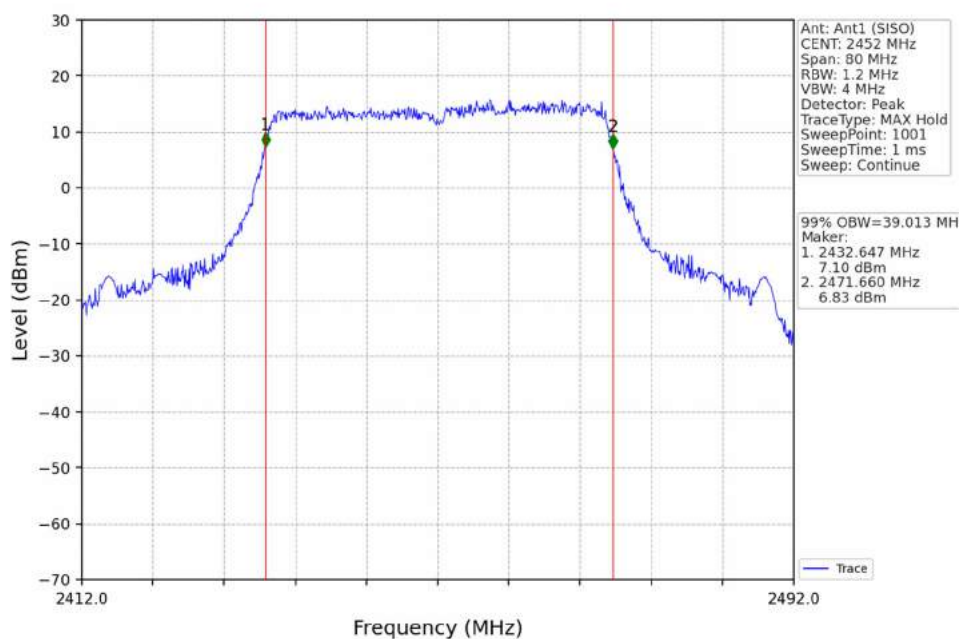


802.11ac(VHT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

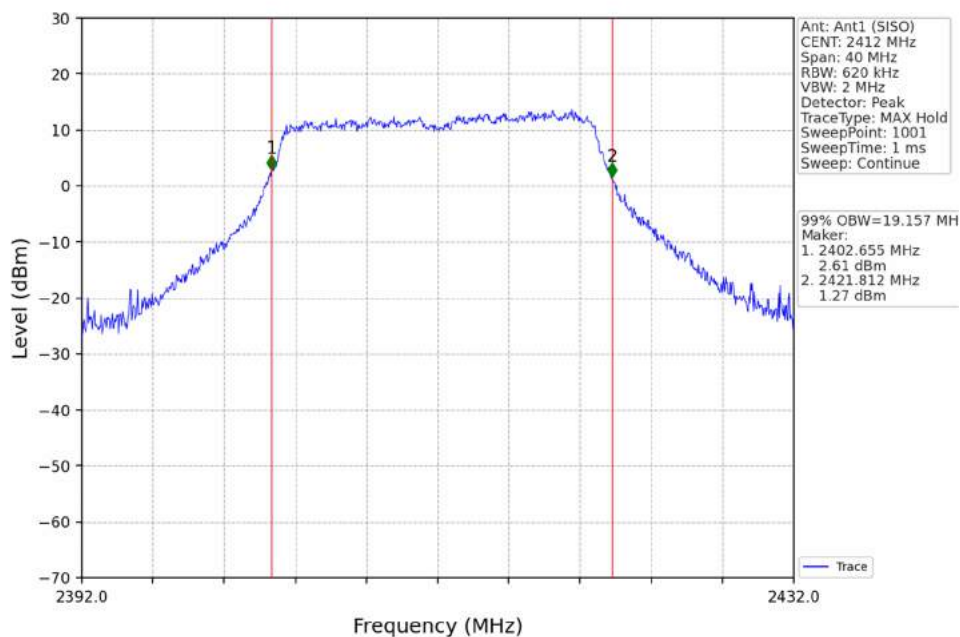


802.11ac(VHT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

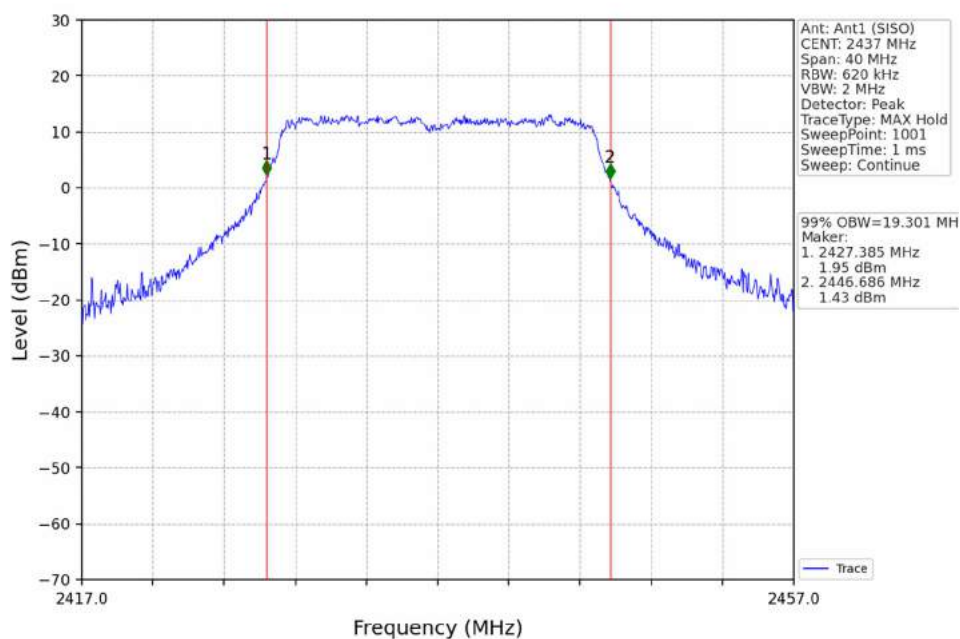


802.11ac(VHT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

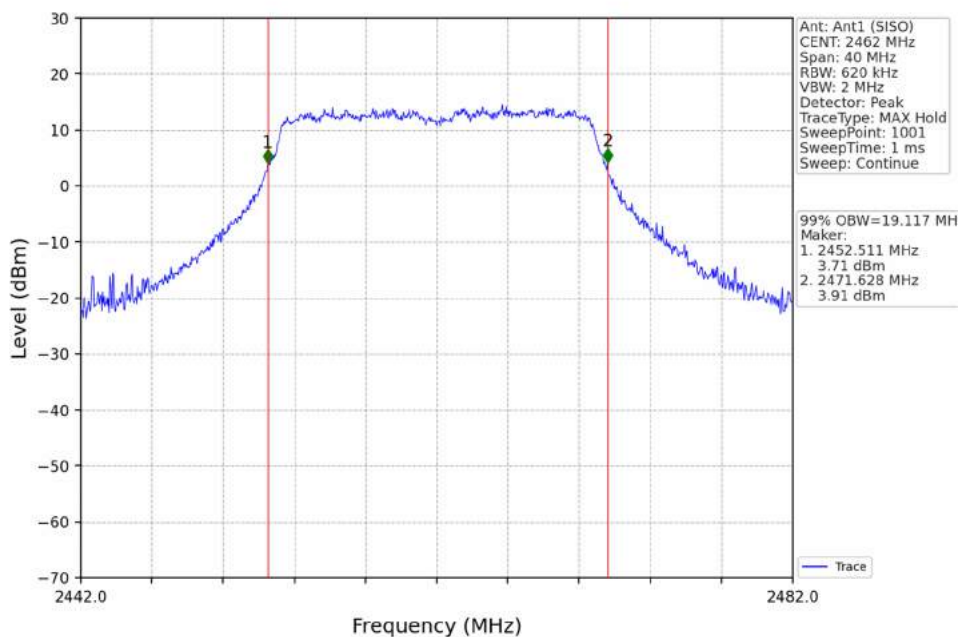


802.11ac(VHT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

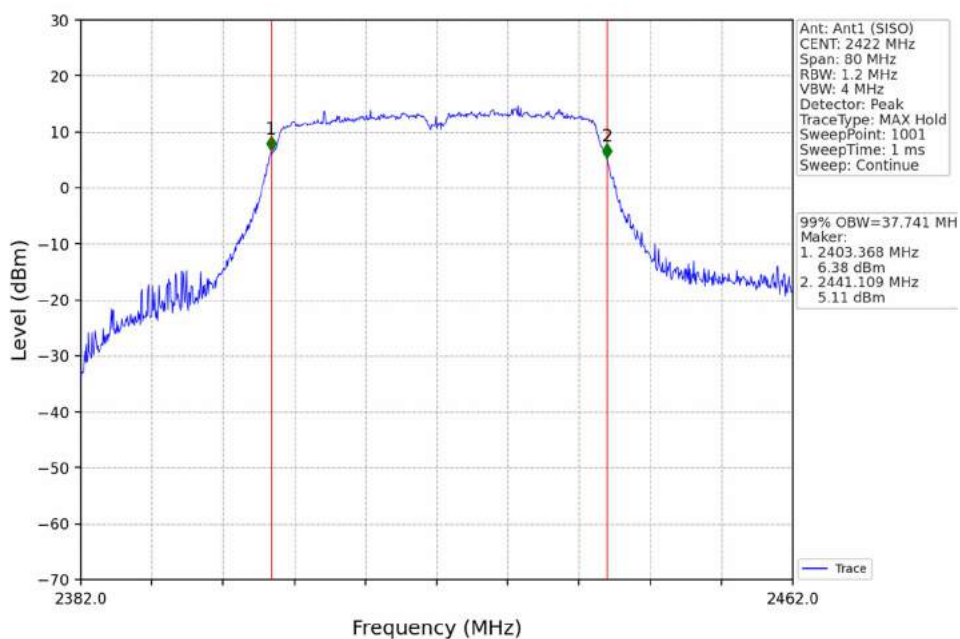


802.11ac(VHT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

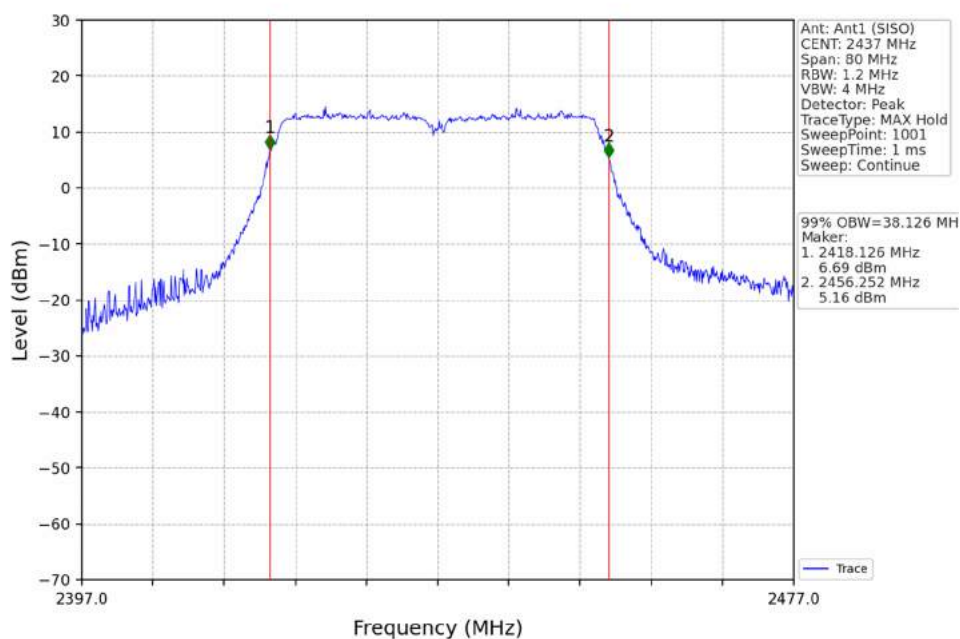


802.11ac(VHT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

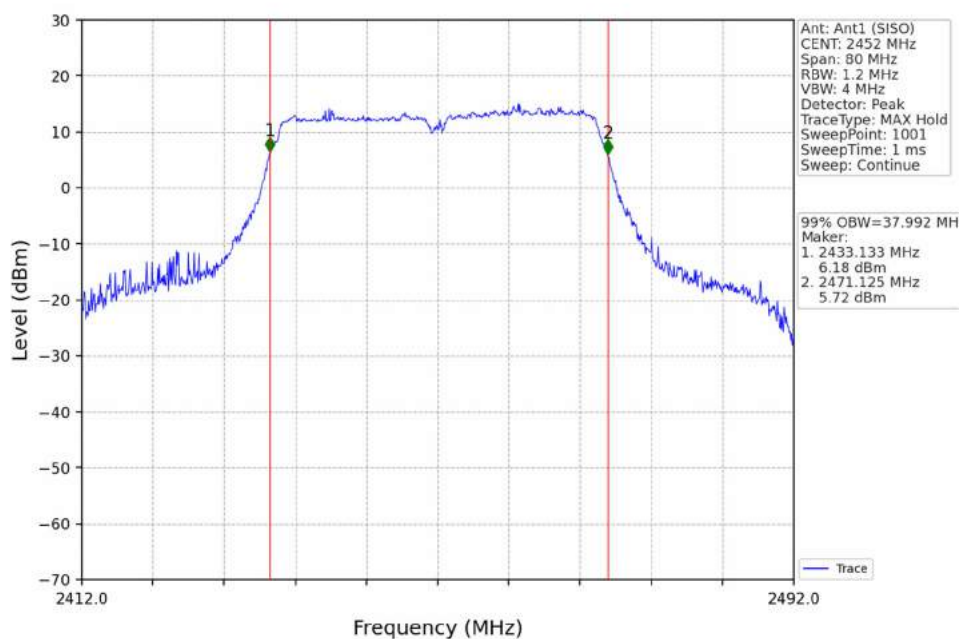


802.11b LCH_2412MHz_Ant2 (SISO) NTN

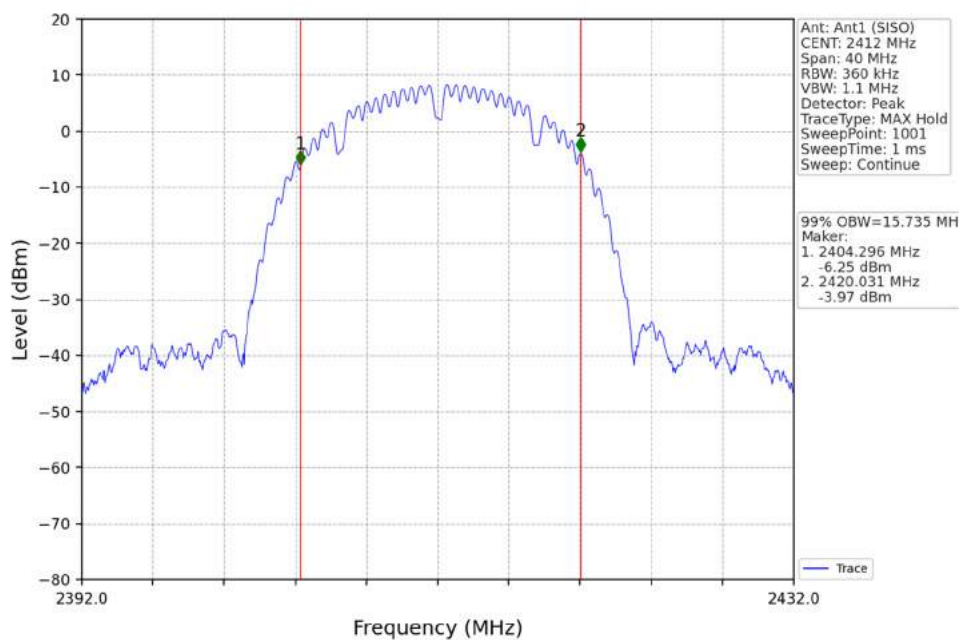


802.11b MCH_2437MHz_Ant2 (SISO) NTN

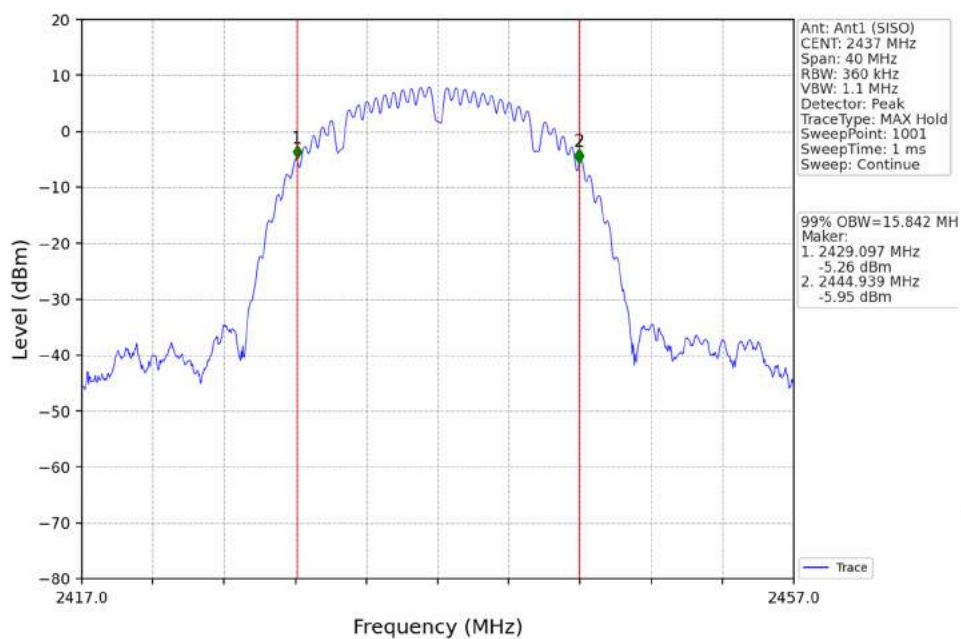


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

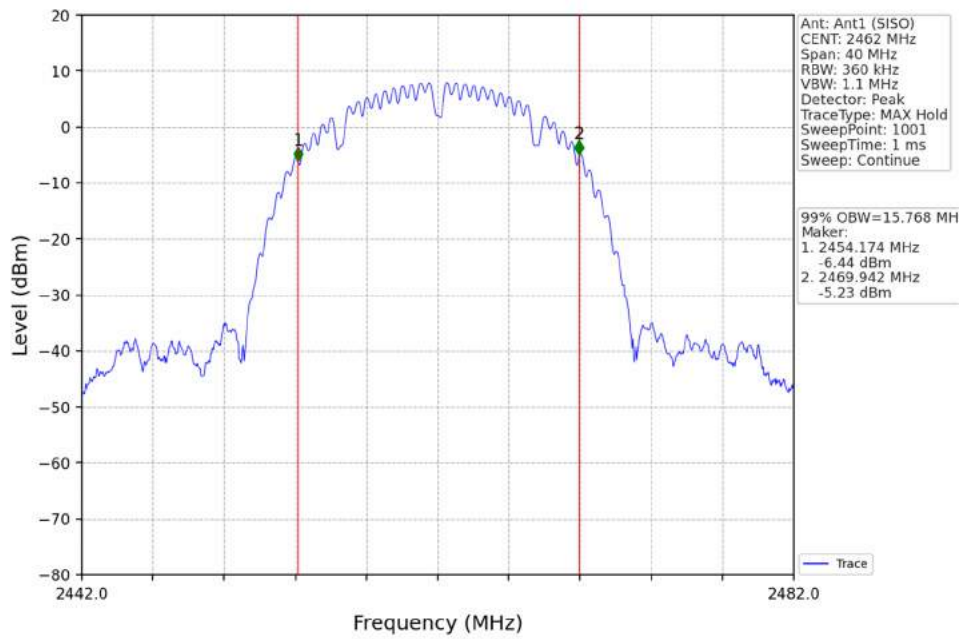


802.11g_LCH_2412MHz_Ant2 (SISO)_NTNV

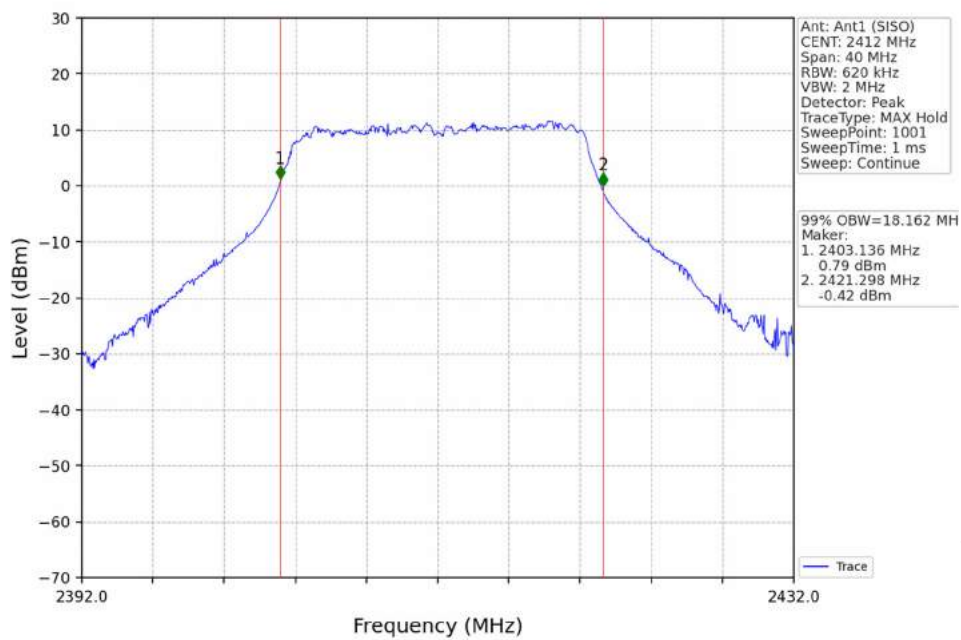


802.11g_MCH_2437MHz_Ant2 (SISO)_NTNV

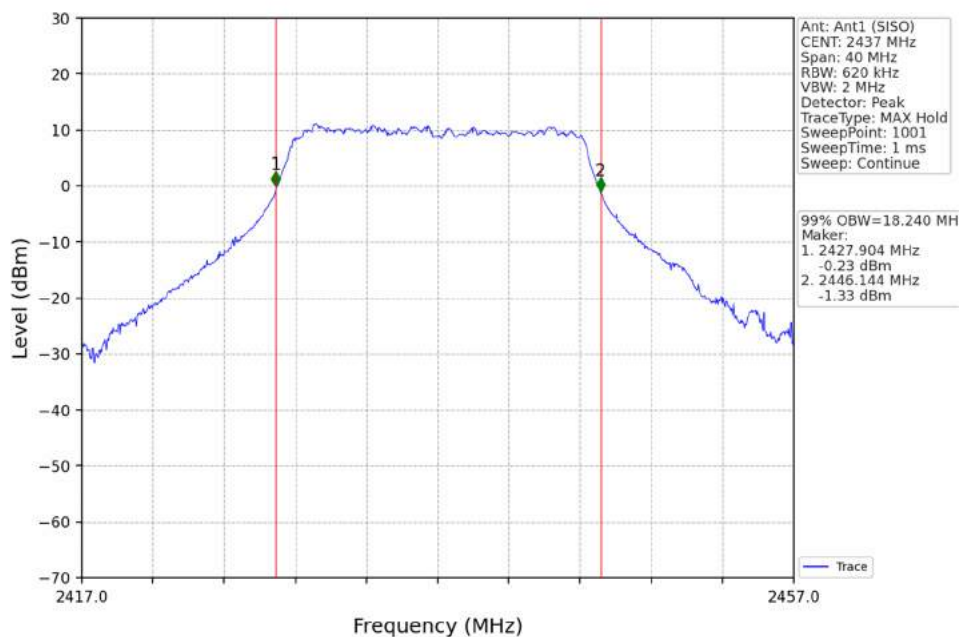


802.11g_HCH_2462MHz_Ant2 (SISO)_NTNV

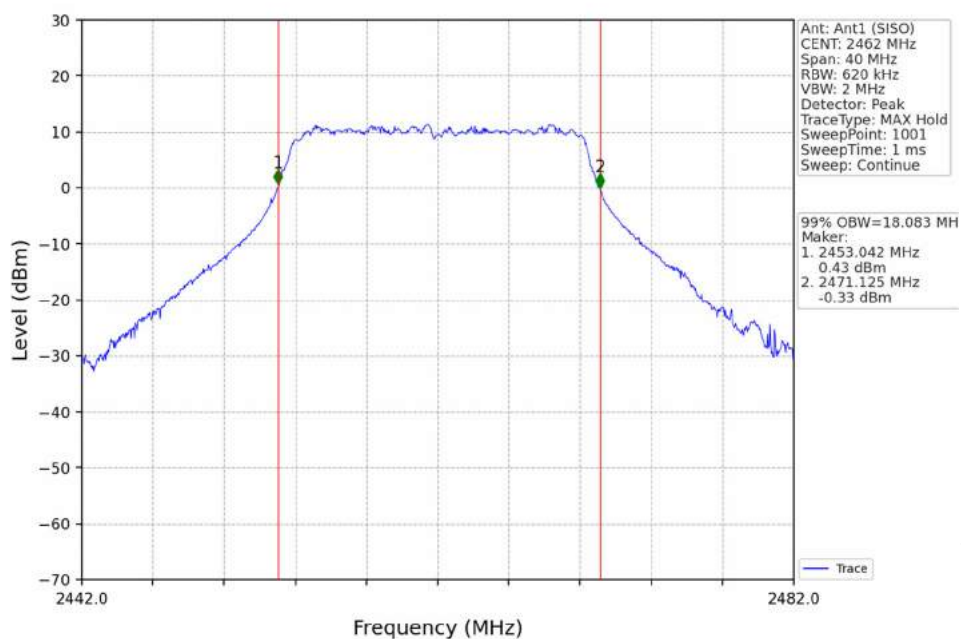


802.11n(HT20)_LCH_2412MHz_Ant2 (SISO)_NTNV

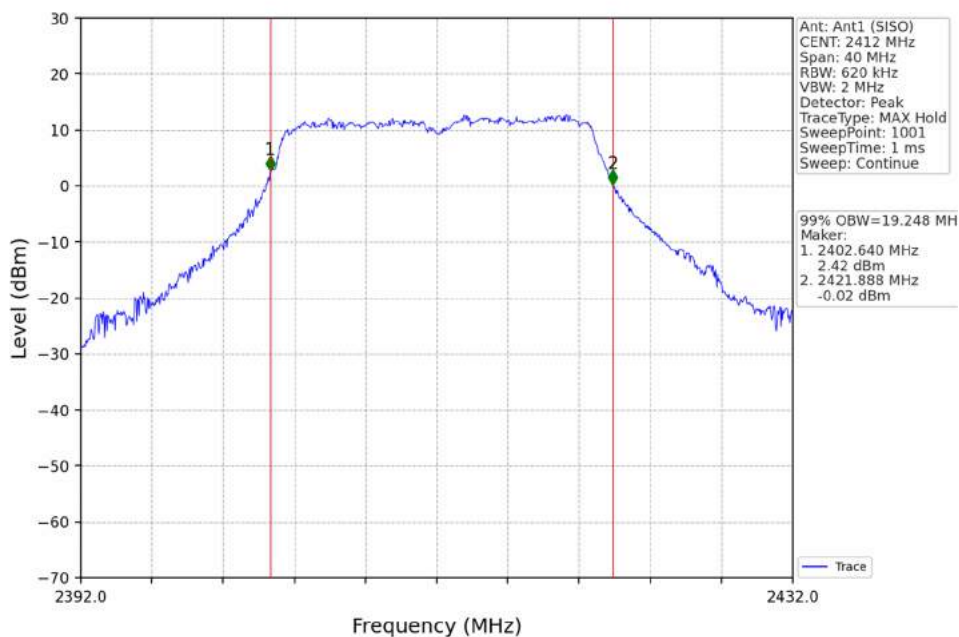


802.11n(HT20)_MCH_2437MHz_Ant2 (SISO)_NTNV

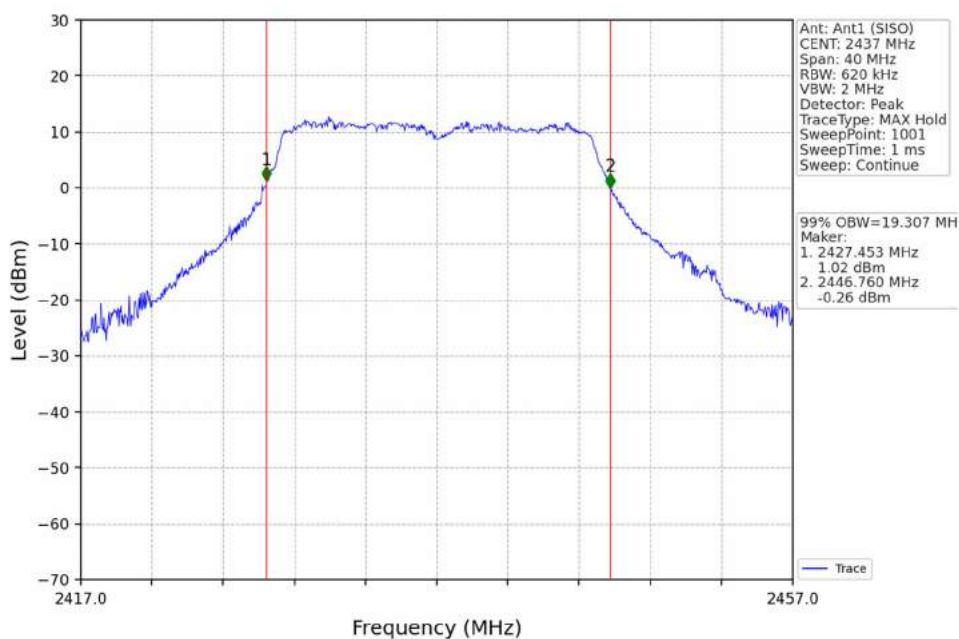


802.11n(HT20)_HCH_2462MHz_Ant2 (SISO)_NTNV

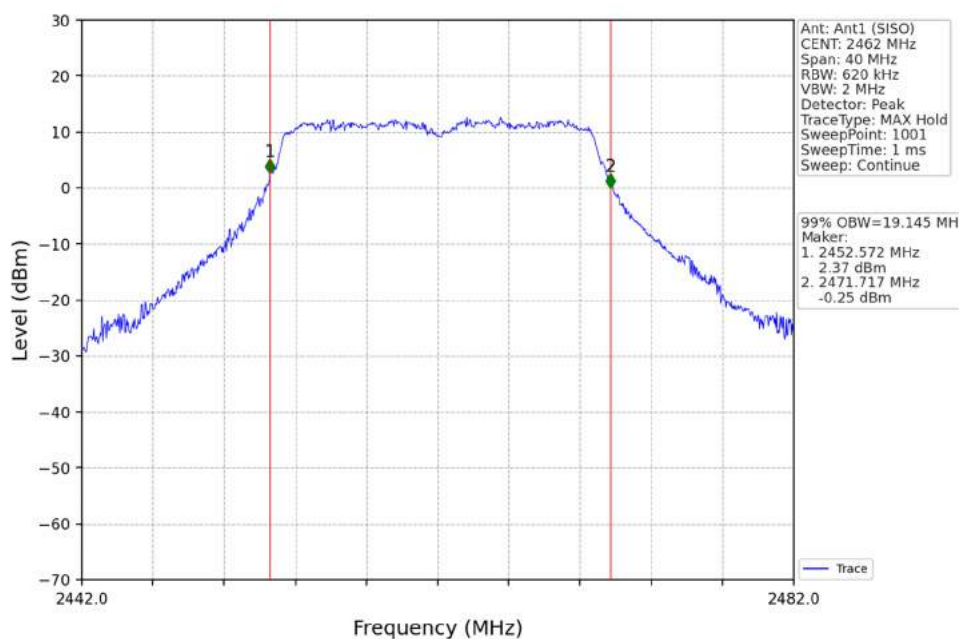


802.11n(HT40)_LCH_2422MHz_Ant2 (SISO)_NTNV

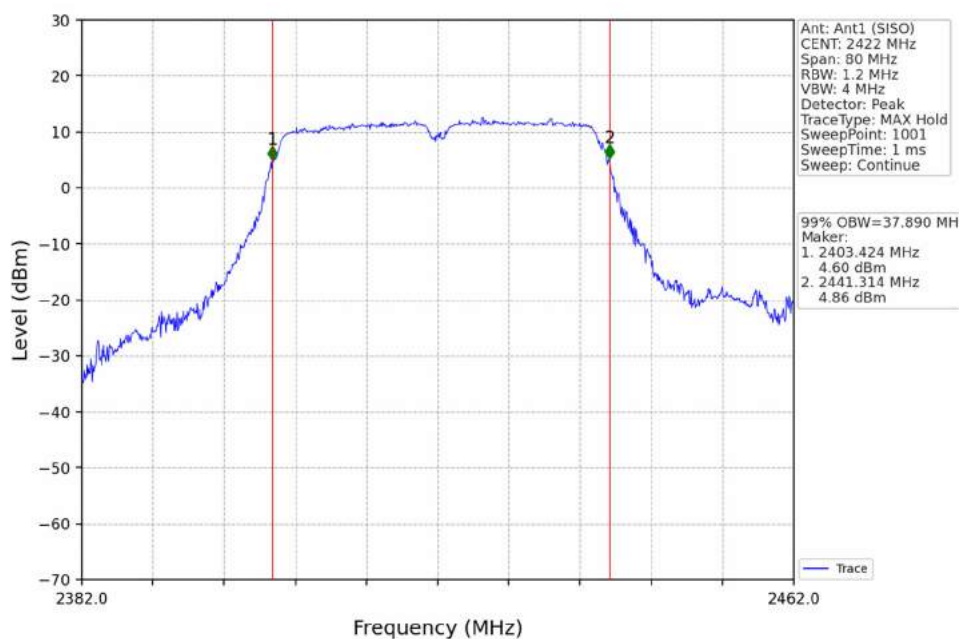


802.11n(HT40)_MCH_2437MHz_Ant2 (SISO)_NTNV

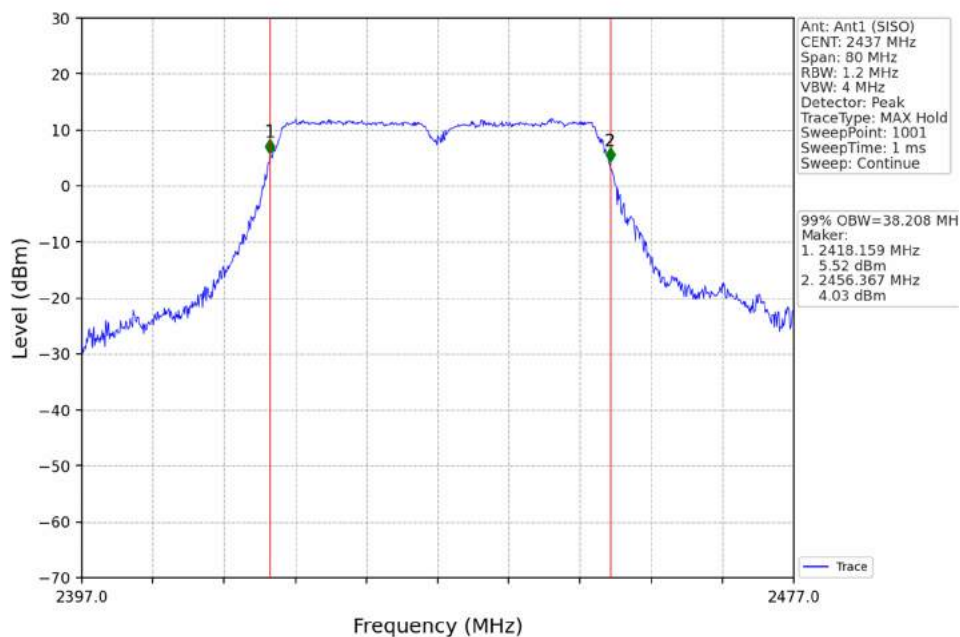


802.11n(HT40)_HCH_2452MHz_Ant2 (SISO)_NTNV

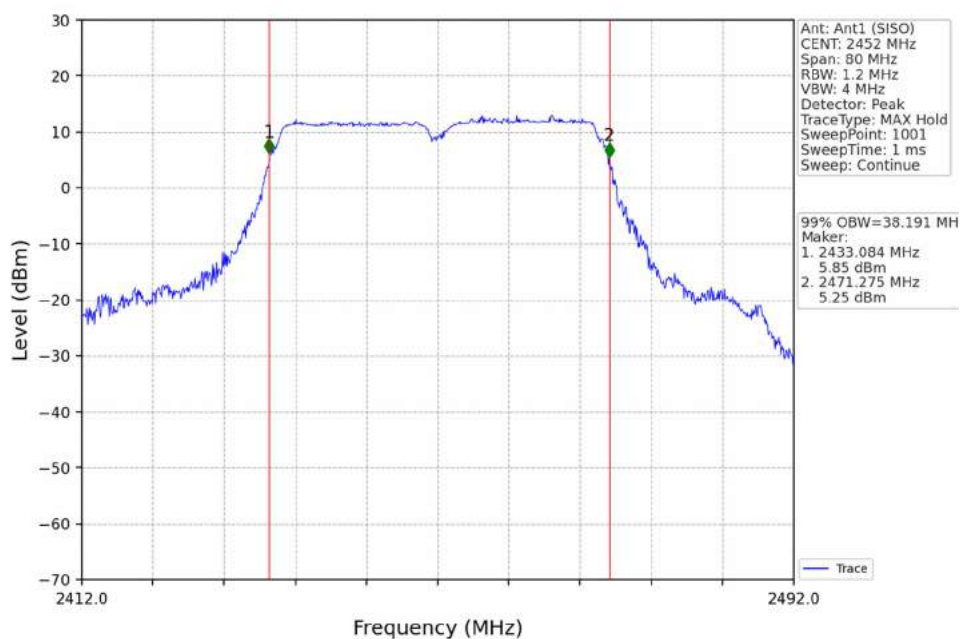


802.11ax(HEW20)_LCH_2412MHz_RU242_Left_Ant2 (SISO)_NTNV

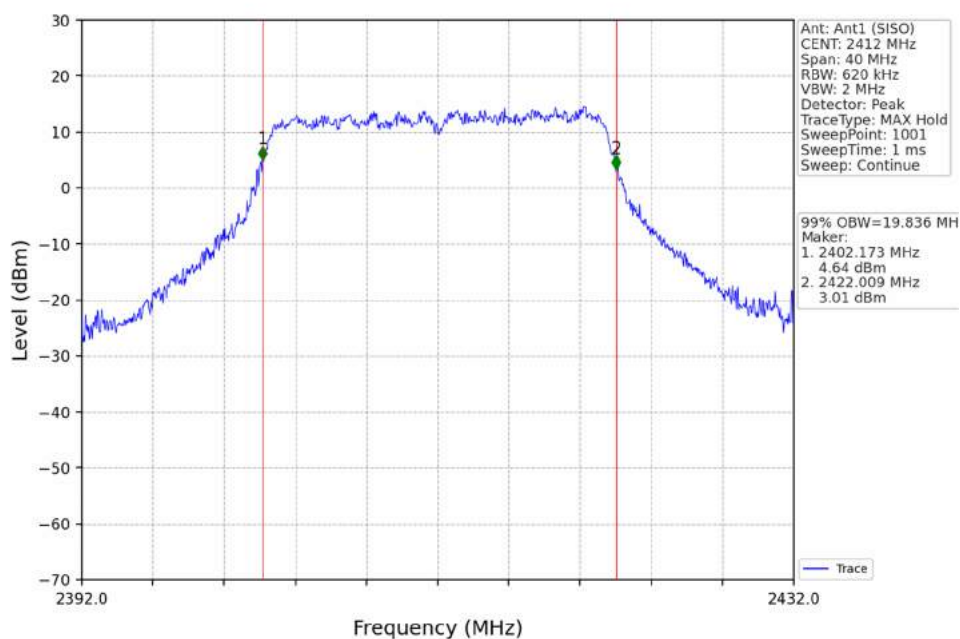


802.11ax(HEW20)_MCH_2437MHz_RU242_Left_Ant2 (SISO)_NTNV

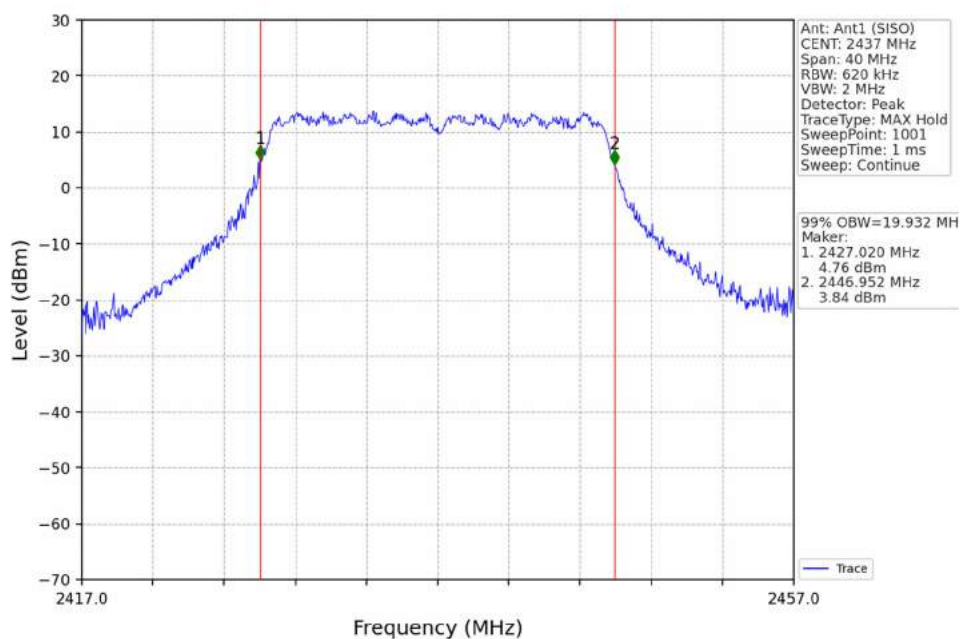


802.11ax(HEW20)_HCH_2462MHz_RU242_Left_Ant2 (SISO)_NTNV

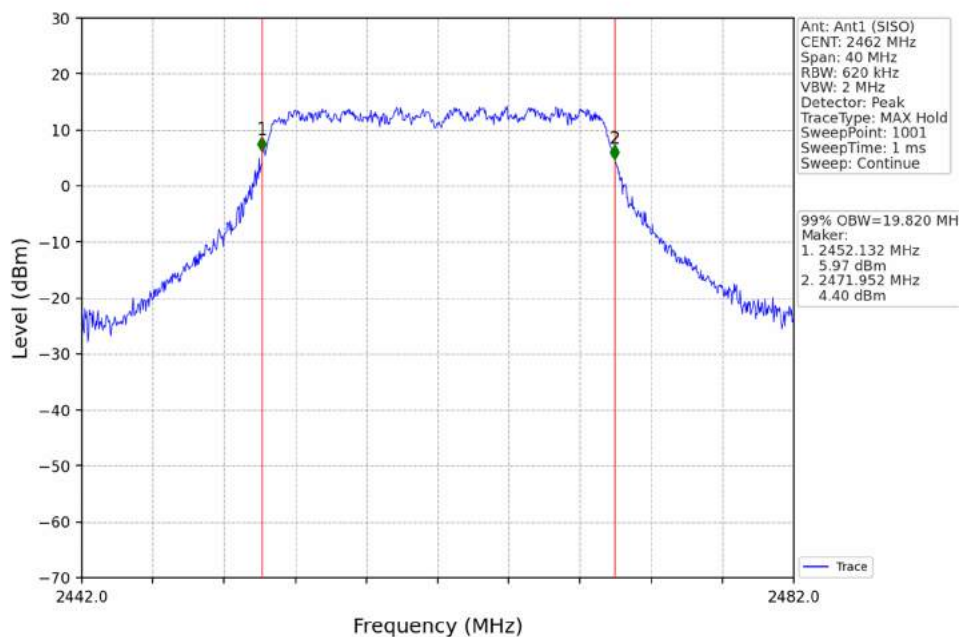


802.11ax(HEW40)_LCH_2422MHz_RU484_Left_Ant2 (SISO)_NTNV

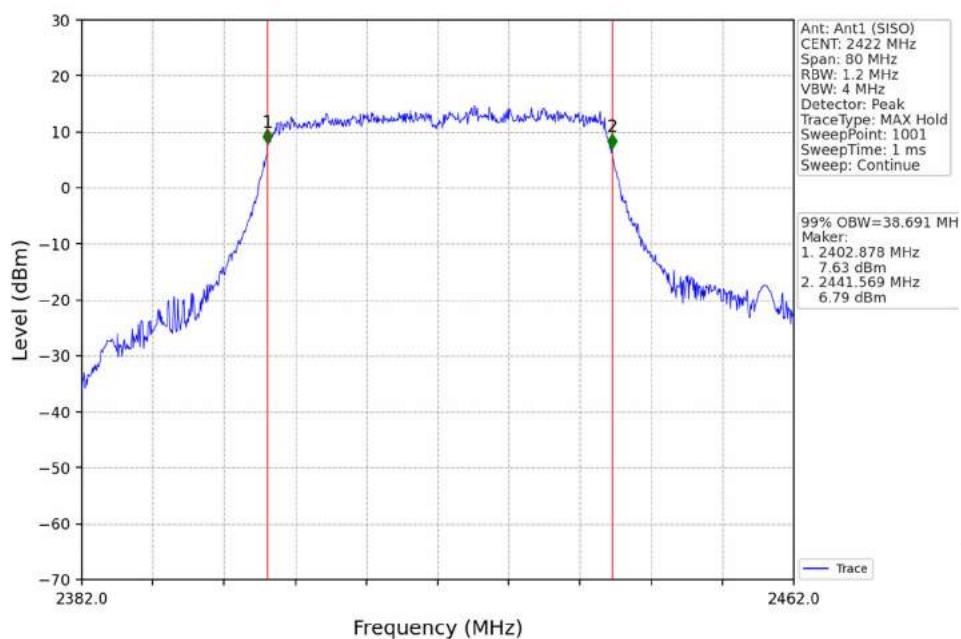


802.11ax(HEW40)_MCH_2437MHz_RU484_Left_Ant2 (SISO)_NTNV

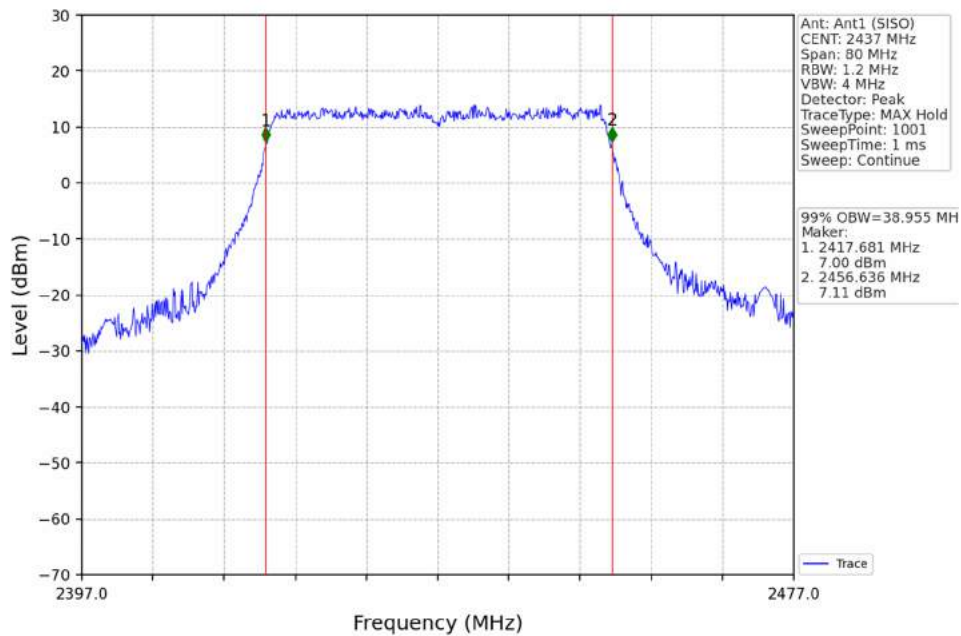


802.11ax(HEW40)_HCH_2452MHz_RU484_Left_Ant2 (SISO)_NTNV

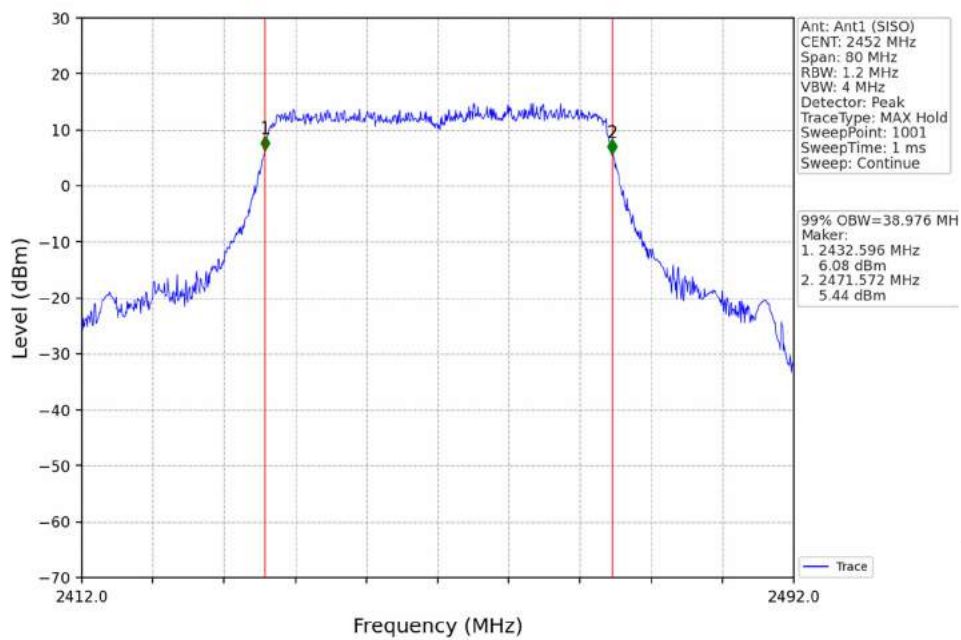


802.11ac(VHT20)_LCH_2412MHz_Ant2 (SISO)_NTNV

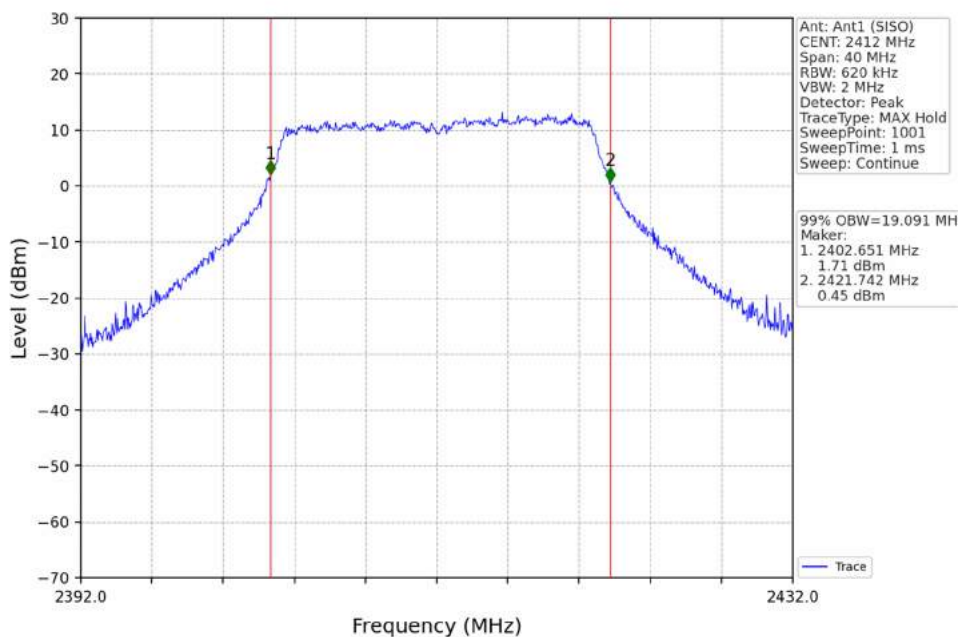


802.11ac(VHT20)_MCH_2437MHz_Ant2 (SISO)_NTNV

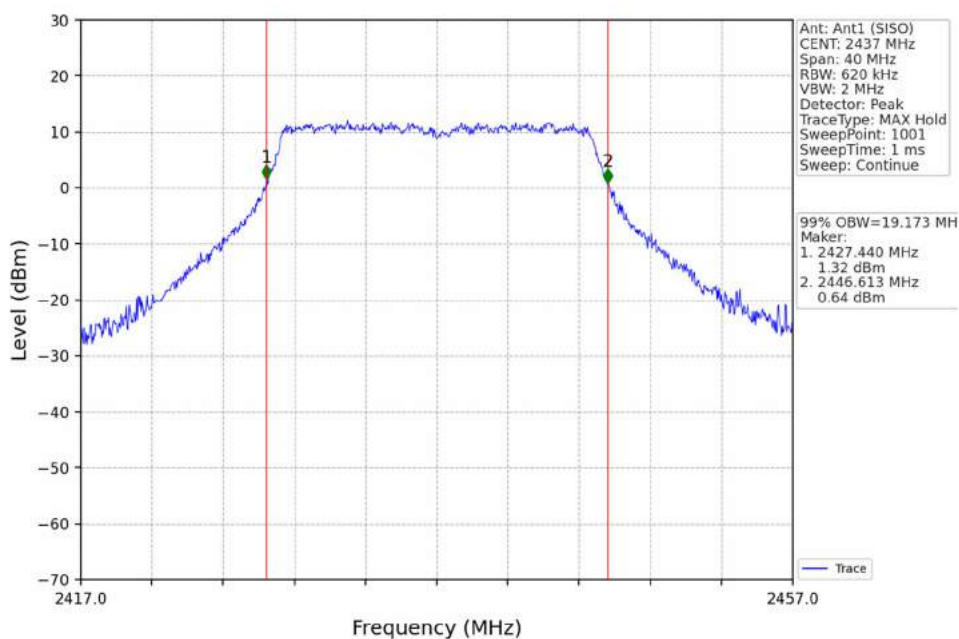


802.11ac(VHT20)_HCH_2462MHz_Ant2 (SISO)_NTNV

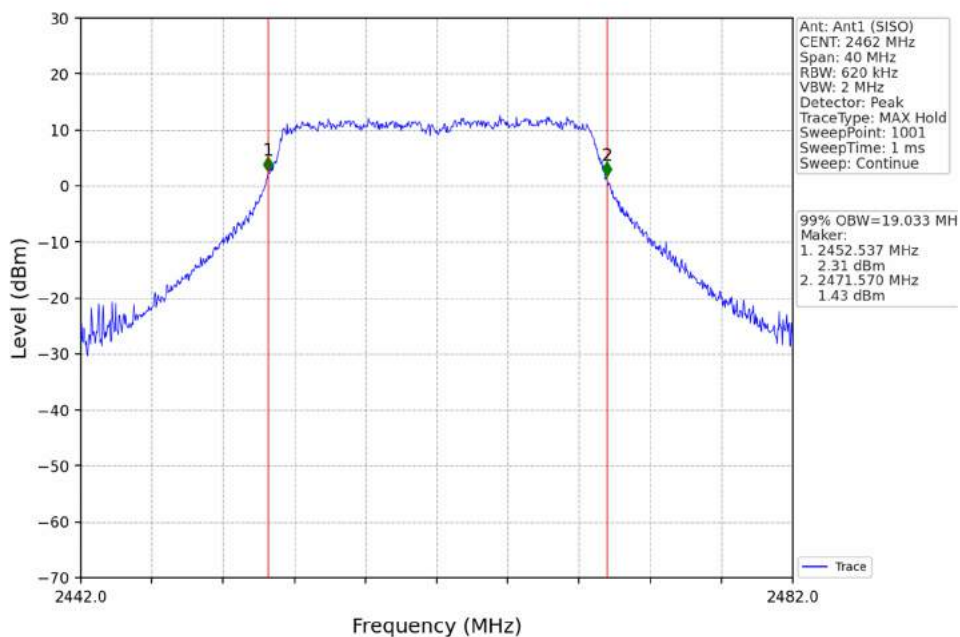


802.11ac(VHT40)_LCH_2422MHz_Ant2 (SISO)_NTNV

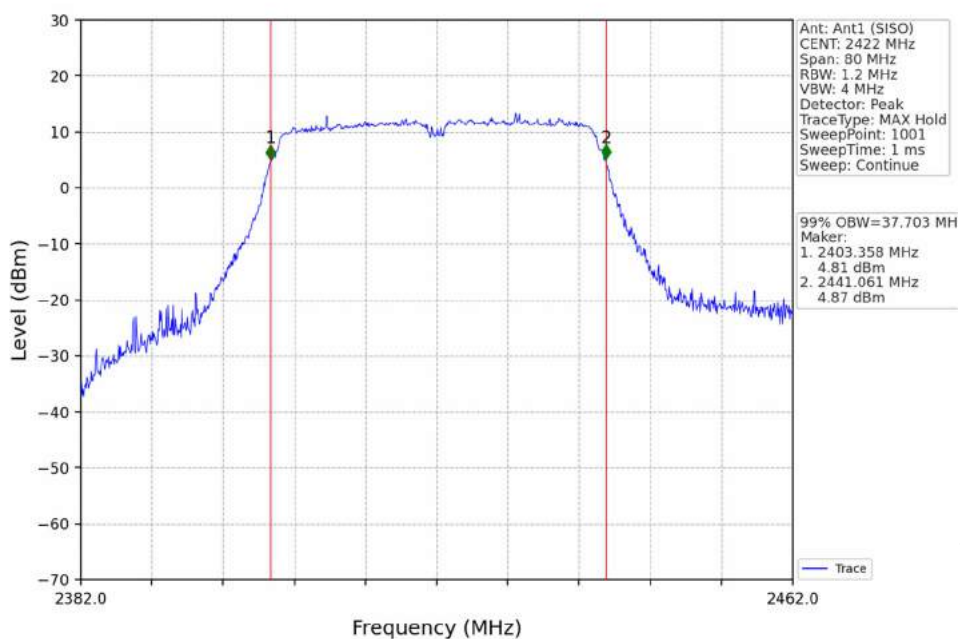

802.11ac(VHT40)_MCH_2437MHz_Ant2 (SISO)_NTNV

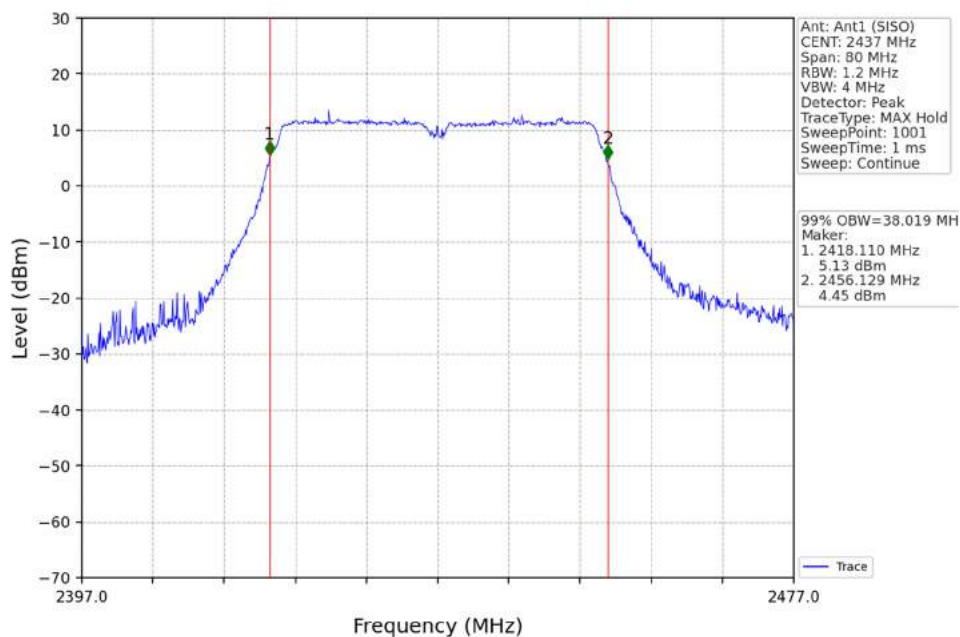

802.11ac(VHT40)_HCH_2452MHz_Ant2 (SISO)_NTNV

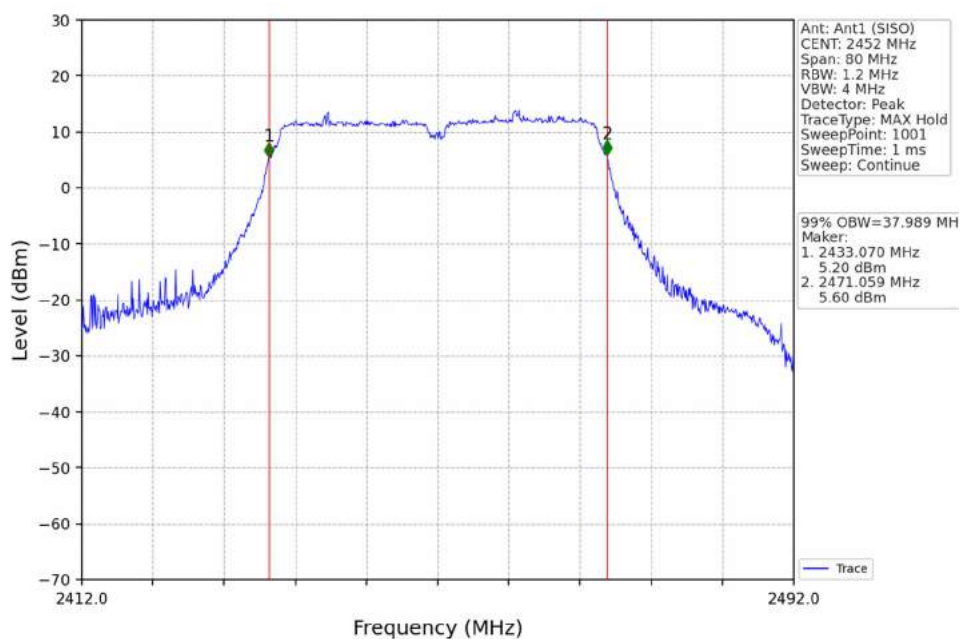

2.2 6dB BW

2.2.1 Test Result

ANT 1:


Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	11.102	≥ 0.5	Pass
		2437	/	/	1	10.139	≥ 0.5	Pass
		2462	/	/	1	11.062	≥ 0.5	Pass
802.11g	SISO	2412	/	/	1	16.388	≥ 0.5	Pass
		2437	/	/	1	16.425	≥ 0.5	Pass
		2462	/	/	1	16.412	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	/	/	1	17.525	≥ 0.5	Pass
		2437	/	/	1	17.674	≥ 0.5	Pass
		2462	/	/	1	17.664	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	/	/	1	36.219	≥ 0.5	Pass
		2437	/	/	1	36.519	≥ 0.5	Pass
		2452	/	/	1	36.485	≥ 0.5	Pass
802.11ax (HEW20)	SISO	2412	RU242	Left	1	19.003	≥ 0.5	Pass
		2437	RU242	Left	1	19.170	≥ 0.5	Pass
		2462	RU242	Left	1	19.082	≥ 0.5	Pass
802.11ax (HEW40)	SISO	2422	RU484	Left	1	37.993	≥ 0.5	Pass
		2437	RU484	Left	1	38.242	≥ 0.5	Pass
		2452	RU484	Left	1	38.220	≥ 0.5	Pass
802.11ac (VHT20)	SISO	2412	/	/	1	17.654	≥ 0.5	Pass
		2437	/	/	1	17.695	≥ 0.5	Pass
		2462	/	/	1	17.661	≥ 0.5	Pass
802.11ac (VHT40)	SISO	2422	/	/	1	35.952	≥ 0.5	Pass
		2437	/	/	1	36.532	≥ 0.5	Pass
		2452	/	/	1	36.491	≥ 0.5	Pass

ANT 2:


Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	2	11.109	≥ 0.5	Pass
		2437	/	/	2	11.082	≥ 0.5	Pass
		2462	/	/	2	10.144	≥ 0.5	Pass
802.11g	SISO	2412	/	/	2	16.398	≥ 0.5	Pass
		2437	/	/	2	16.423	≥ 0.5	Pass
		2462	/	/	2	16.418	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	/	/	2	17.545	≥ 0.5	Pass
		2437	/	/	2	17.687	≥ 0.5	Pass
		2462	/	/	2	17.667	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	/	/	2	36.466	≥ 0.5	Pass
		2437	/	/	2	36.521	≥ 0.5	Pass
		2452	/	/	2	36.501	≥ 0.5	Pass
802.11ax (HEW20)	SISO	2412	RU242	Left	2	19.052	≥ 0.5	Pass
		2437	RU242	Left	2	19.174	≥ 0.5	Pass
		2462	RU242	Left	2	19.138	≥ 0.5	Pass
802.11ax (HEW40)	SISO	2422	RU484	Left	2	38.155	≥ 0.5	Pass
		2437	RU484	Left	2	38.222	≥ 0.5	Pass
		2452	RU484	Left	2	38.220	≥ 0.5	Pass
802.11ac (VHT20)	SISO	2412	/	/	2	17.653	≥ 0.5	Pass
		2437	/	/	2	17.666	≥ 0.5	Pass
		2462	/	/	2	17.706	≥ 0.5	Pass
802.11ac (VHT40)	SISO	2422	/	/	2	36.231	≥ 0.5	Pass
		2437	/	/	2	36.532	≥ 0.5	Pass
		2452	/	/	2	36.505	≥ 0.5	Pass

2.2.2 Test Graph


802.11b LCH_2412MHz_Ant1 (SISO)_NTNV

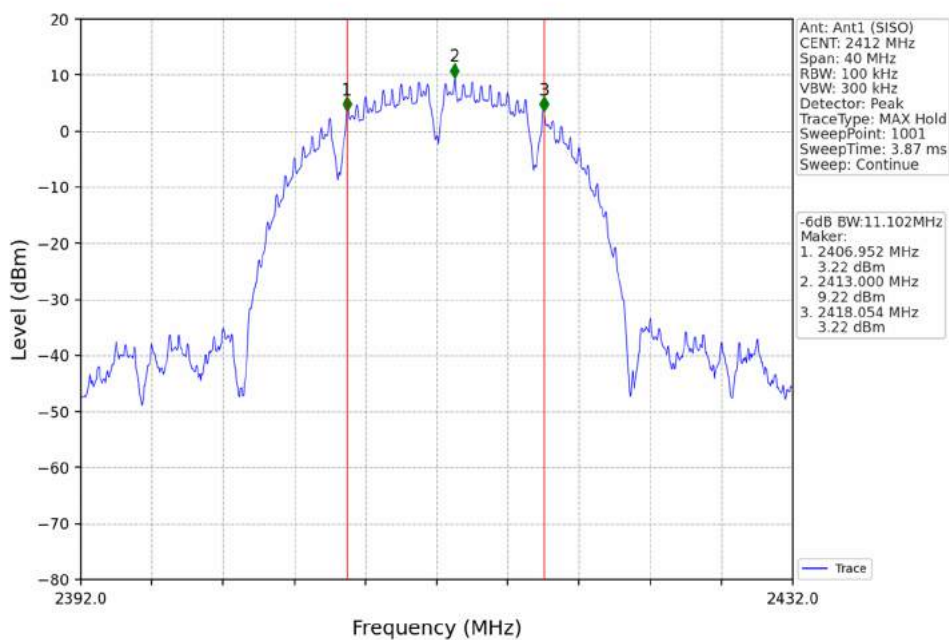


802.11b MCH_2437MHz_Ant1 (SISO)_NTNV

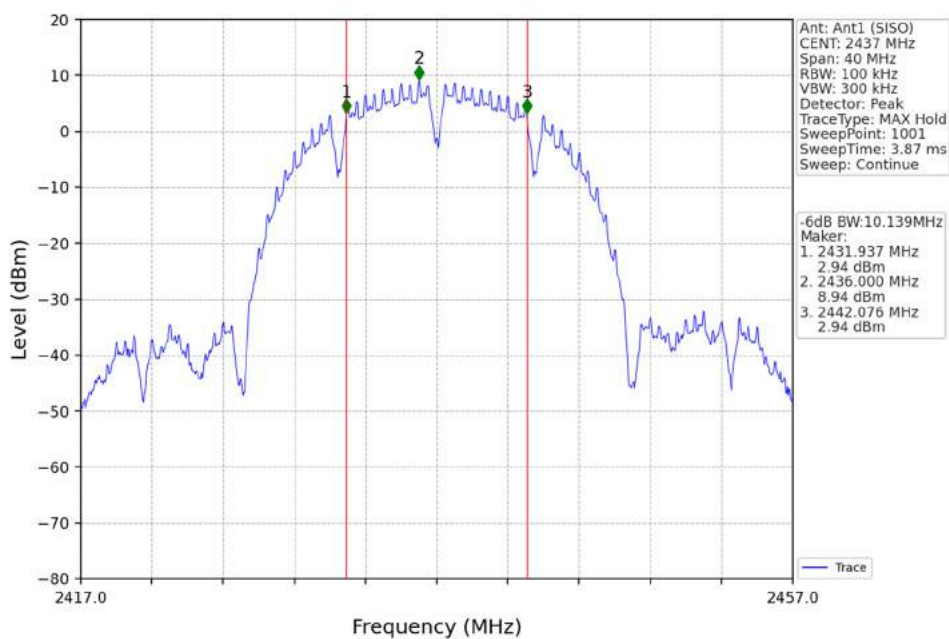


802.11b_HCH_2462MHz_Ant1 (SISO)_NTNV

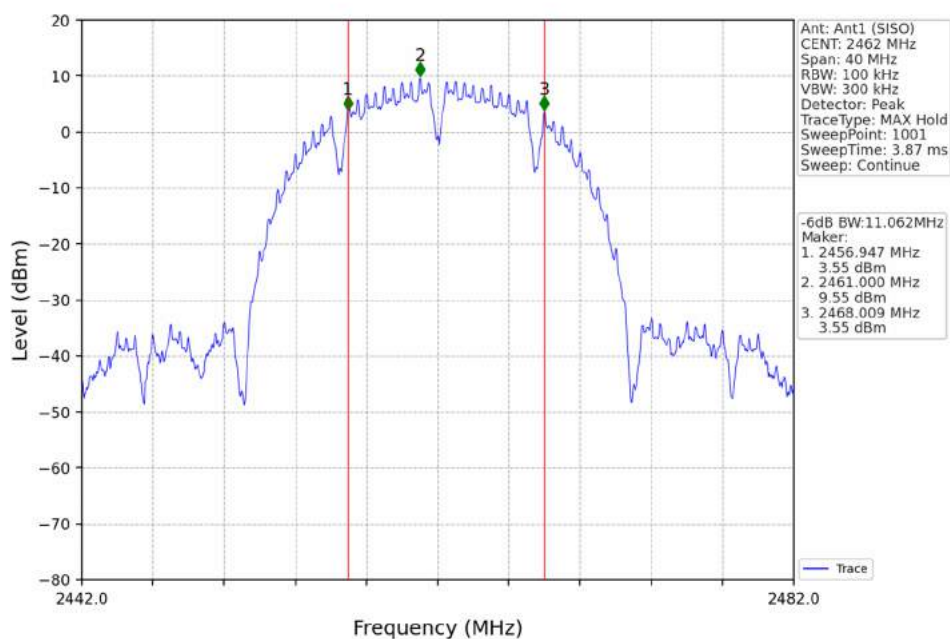


802.11g_LCH_2412MHz_Ant1 (SISO)_NTNV

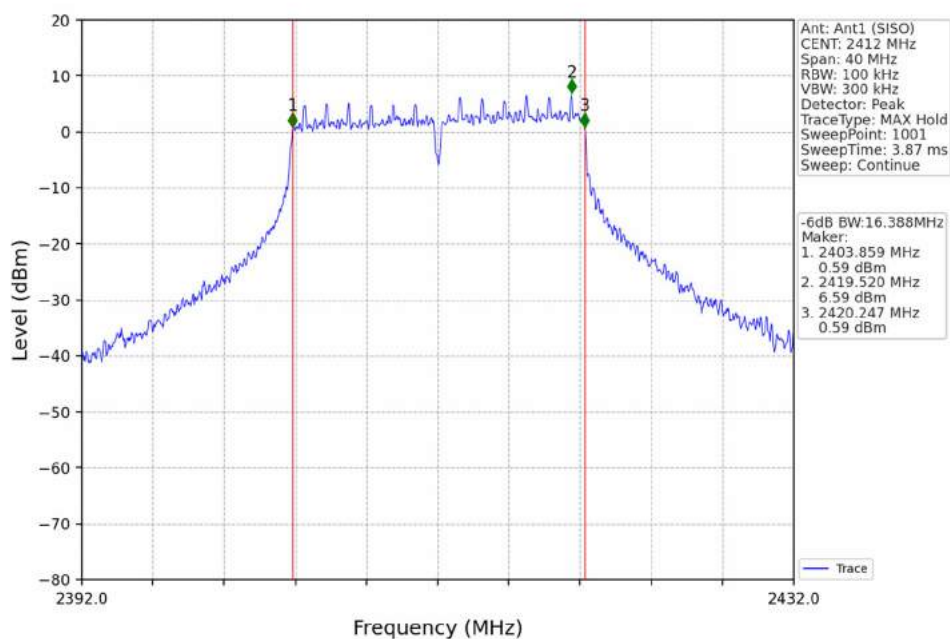


802.11g_MCH_2437MHz_Ant1 (SISO)_NTNV

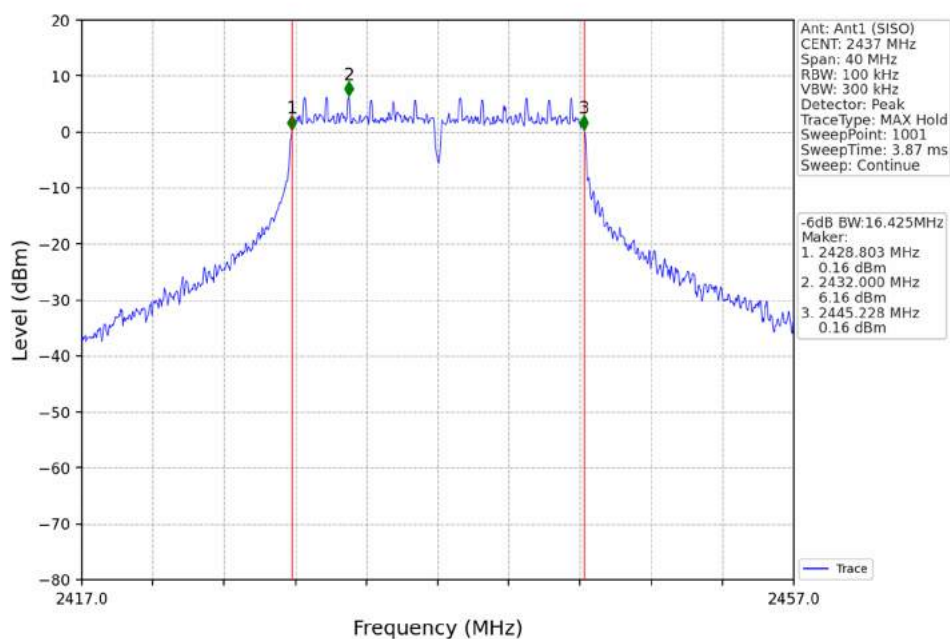


802.11g_HCH_2462MHz_Ant1 (SISO)_NTNV

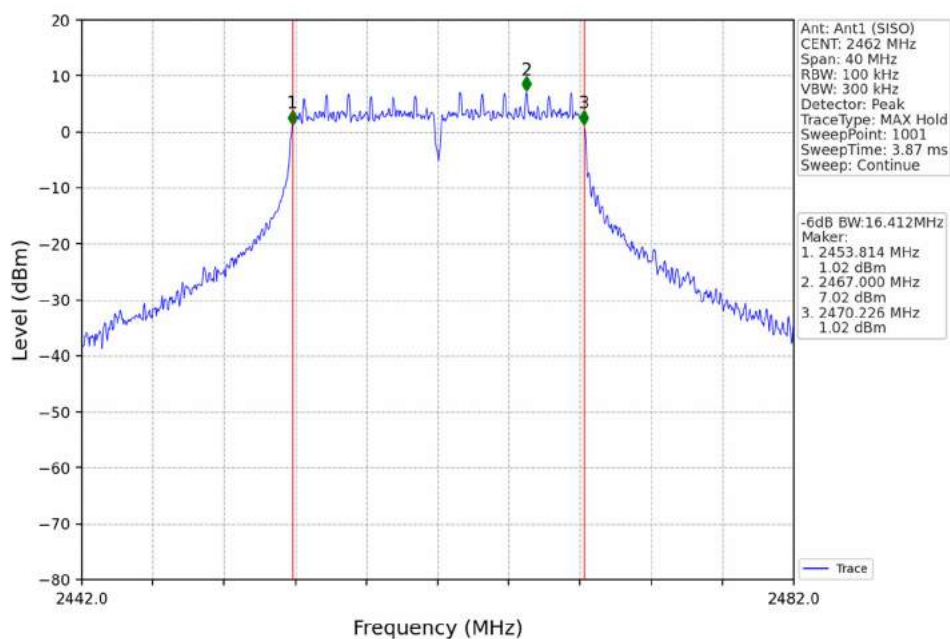


802.11n(HT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

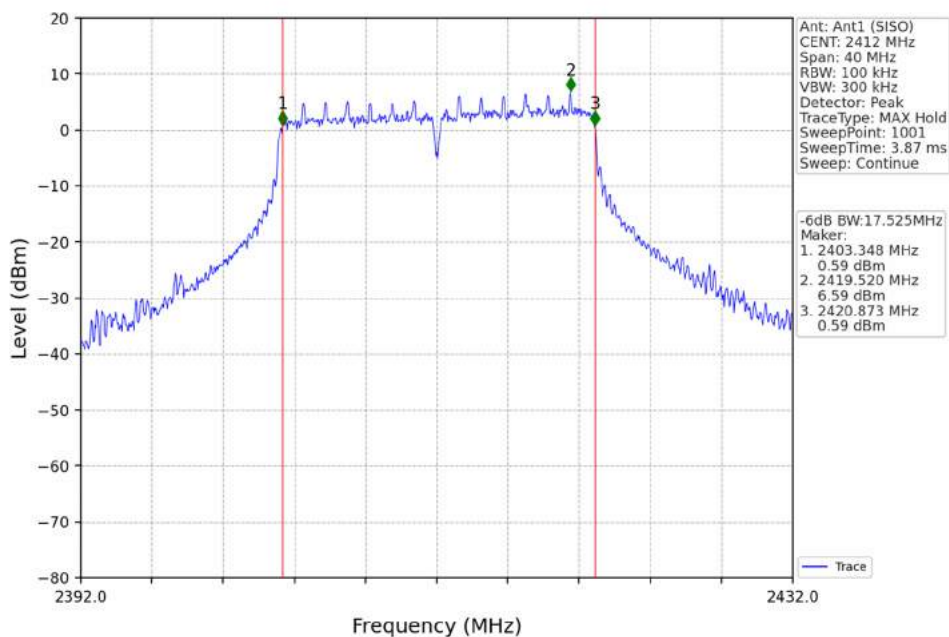


802.11n(HT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

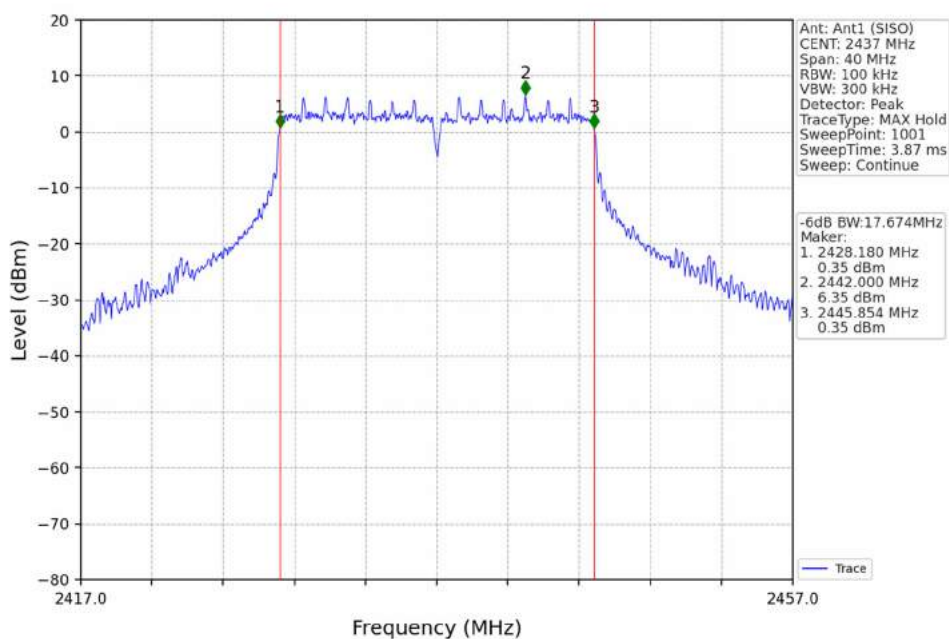


802.11n(HT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

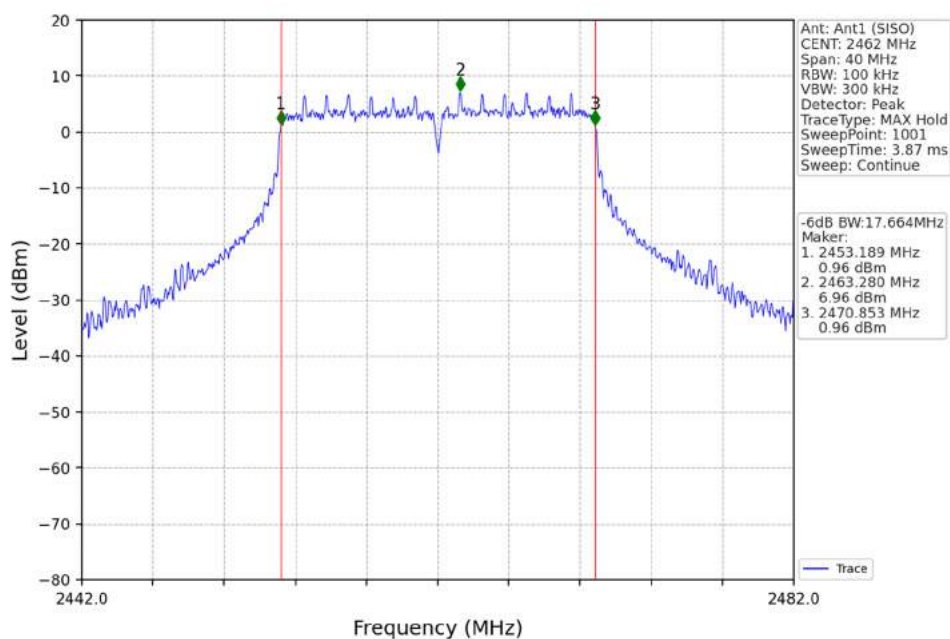


802.11n(HT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

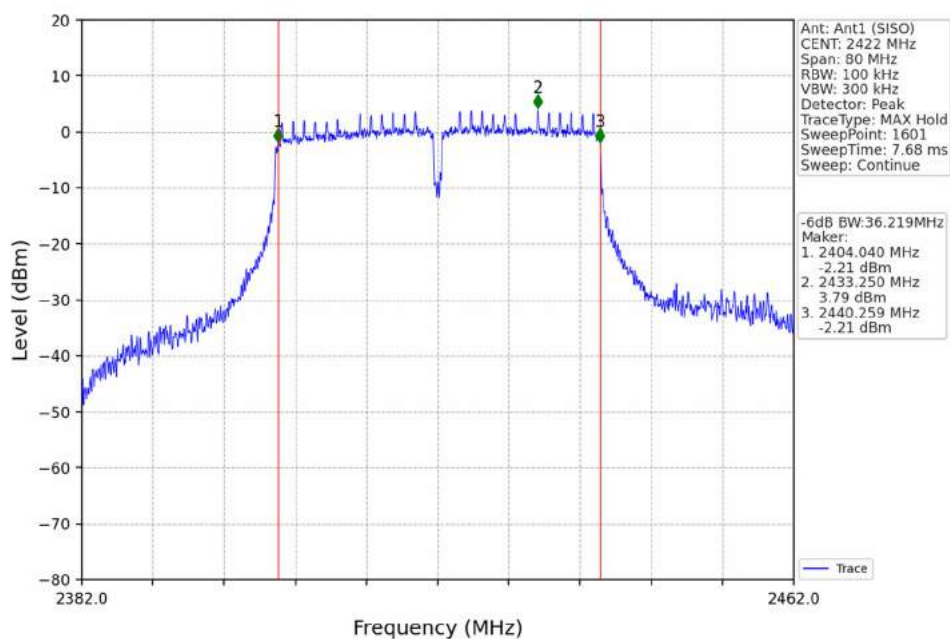


802.11n(HT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

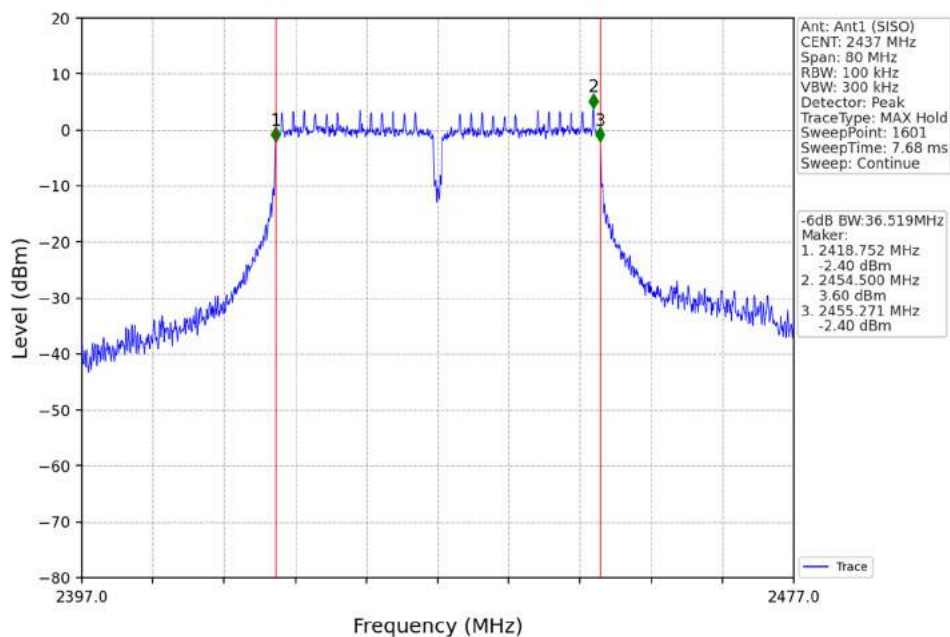


802.11n(HT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

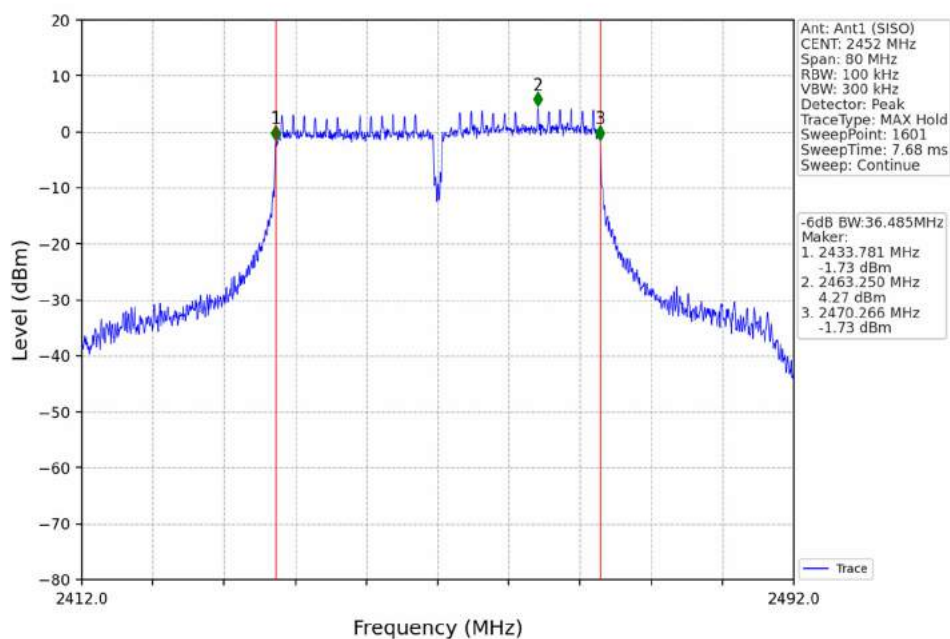


802.11ax(HEW20)_LCH_2412MHz_RU242_Left_Ant1 (SISO)_NTNV

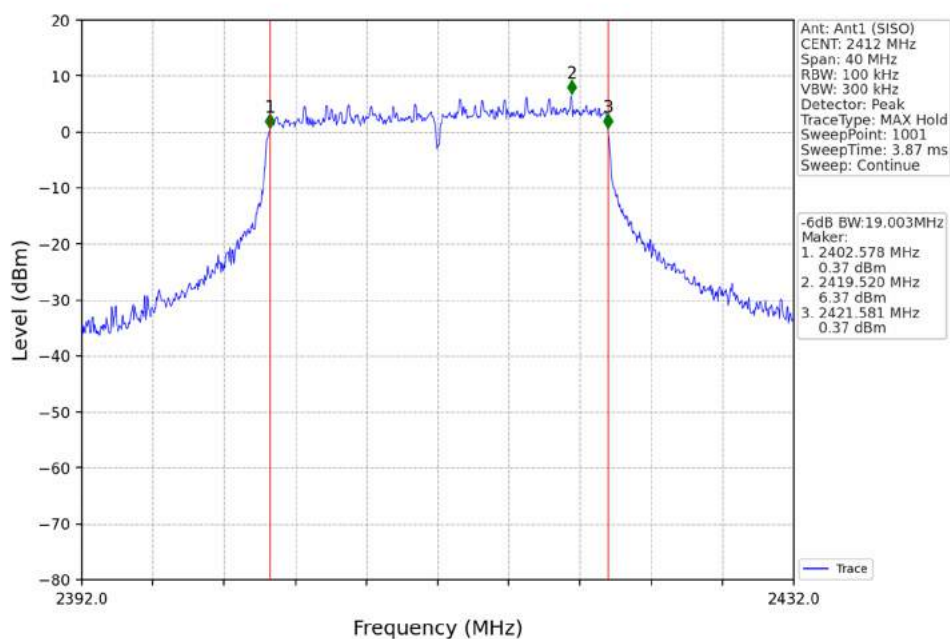


802.11ax(HEW20)_MCH_2437MHz_RU242_Left_Ant1 (SISO)_NTNV

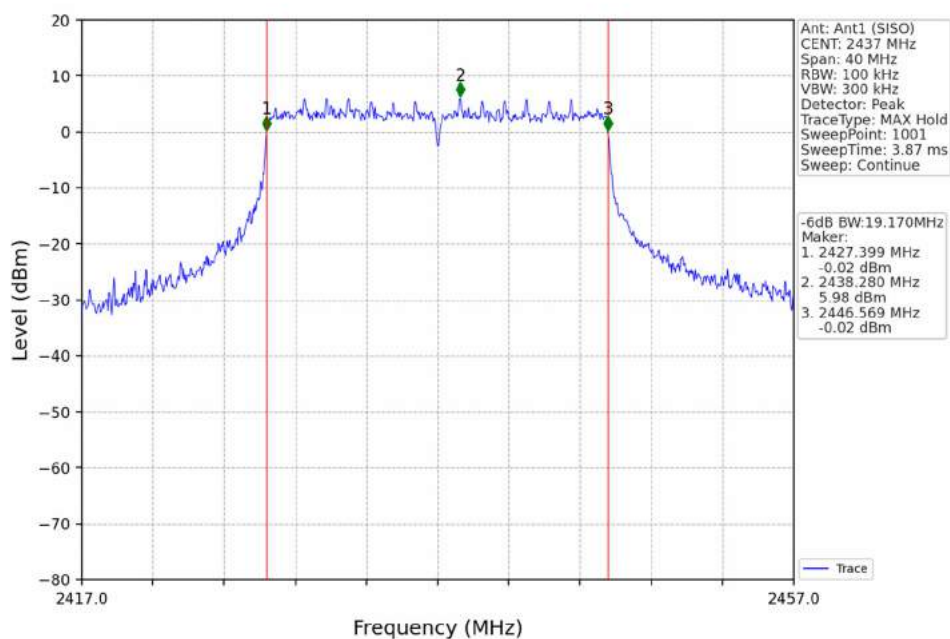


802.11ax(HEW20)_HCH_2462MHz_RU242_Left_Ant1 (SISO)_NTNV

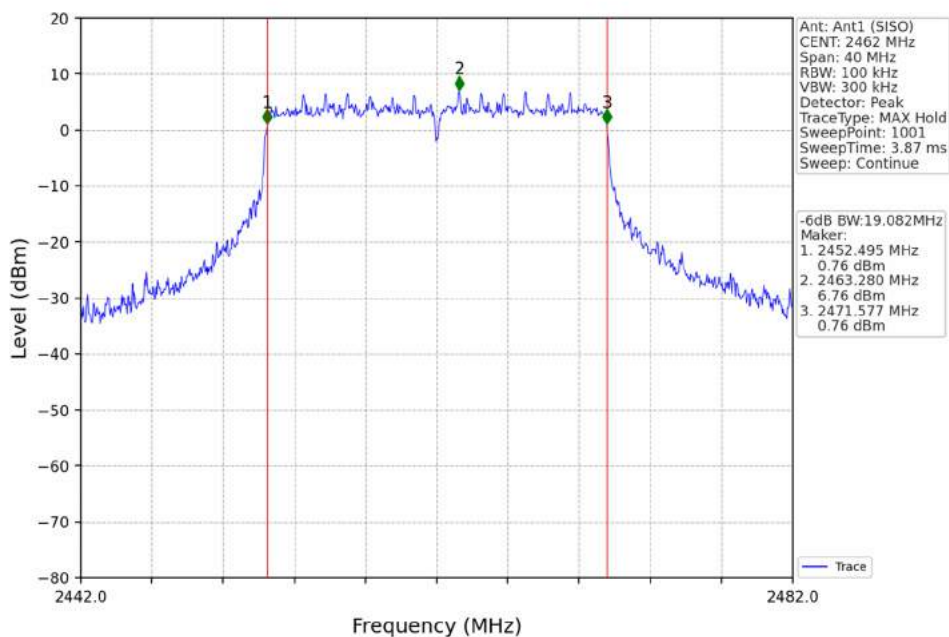


802.11ax(HEW40)_LCH_2422MHz_RU484_Left_Ant1 (SISO)_NTNV

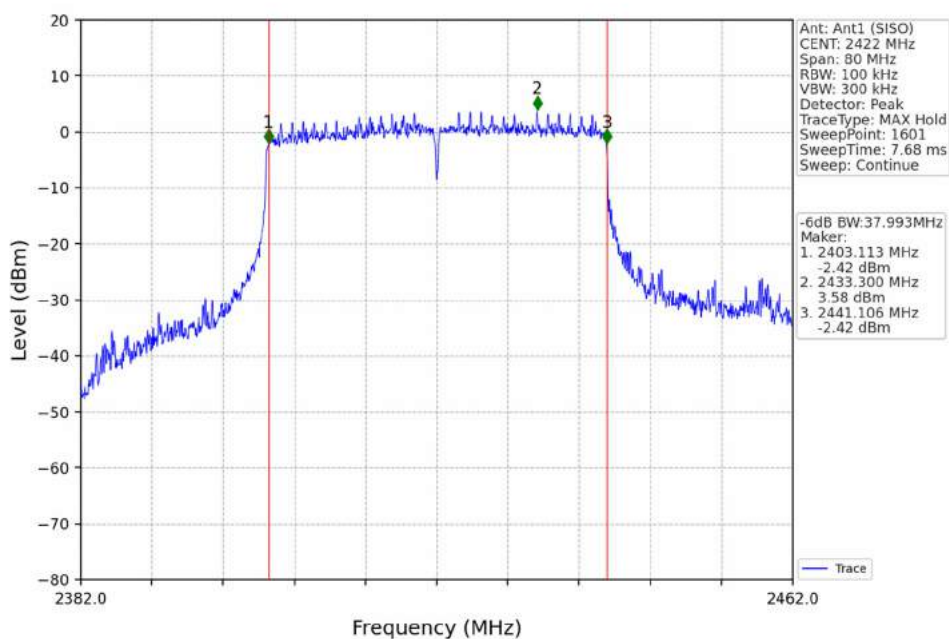


802.11ax(HEW40)_MCH_2437MHz_RU484_Left_Ant1 (SISO)_NTNV

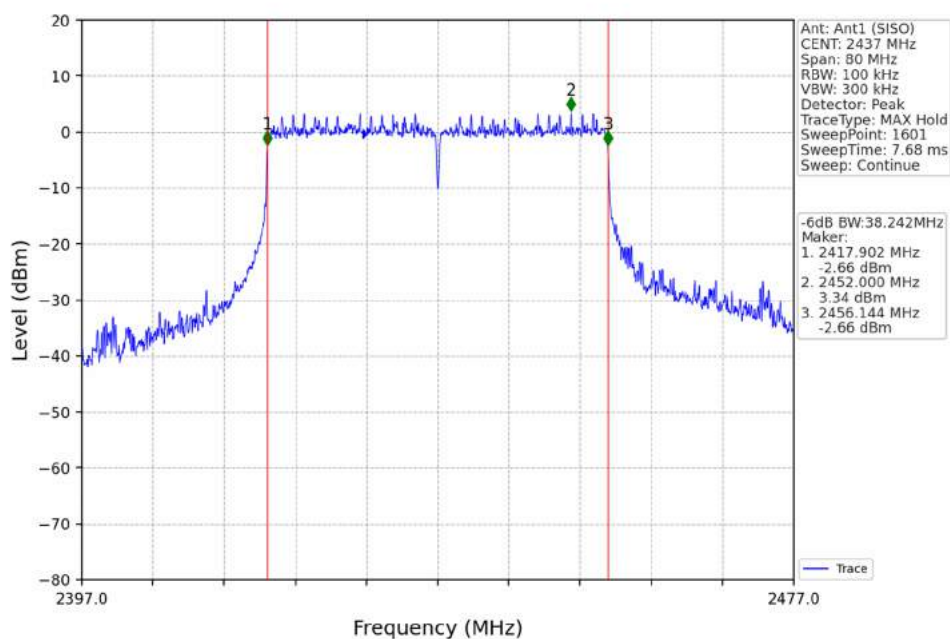


802.11ax(HEW40)_HCH_2452MHz_RU484_Left_Ant1 (SISO)_NTNV

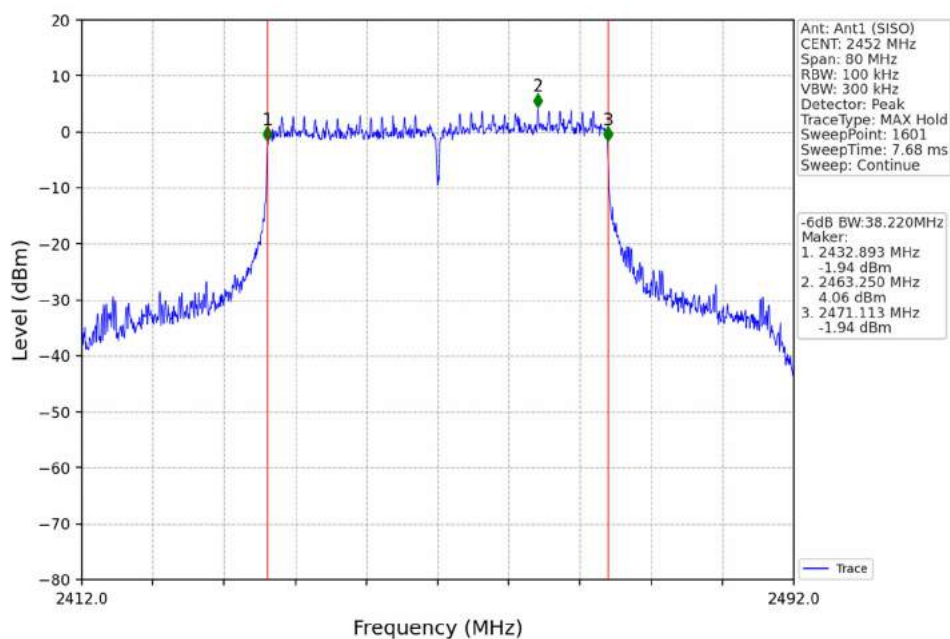


802.11ac(VHT20)_LCH_2412MHz_Ant1 (SISO)_NTNV

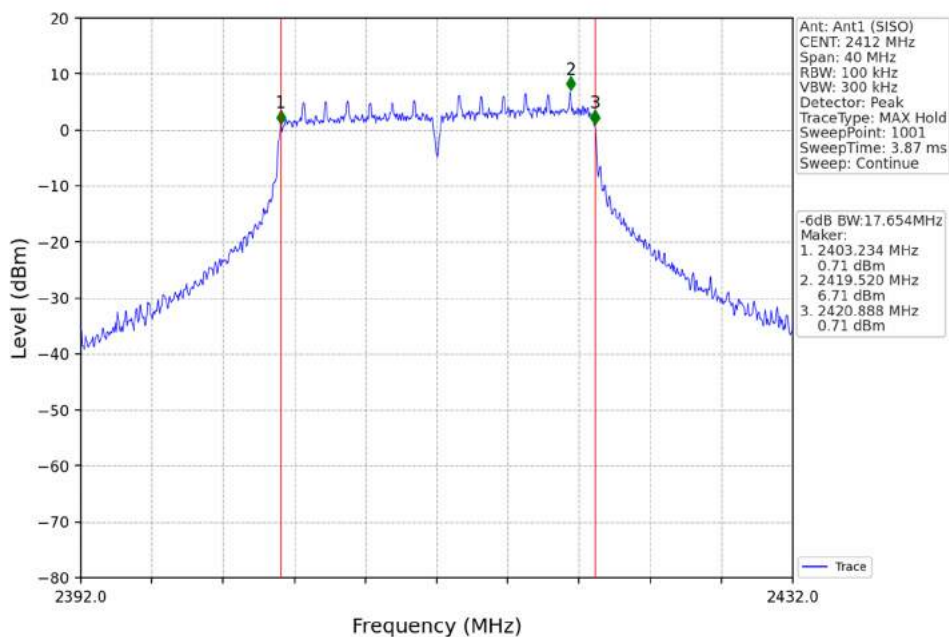


802.11ac(VHT20)_MCH_2437MHz_Ant1 (SISO)_NTNV

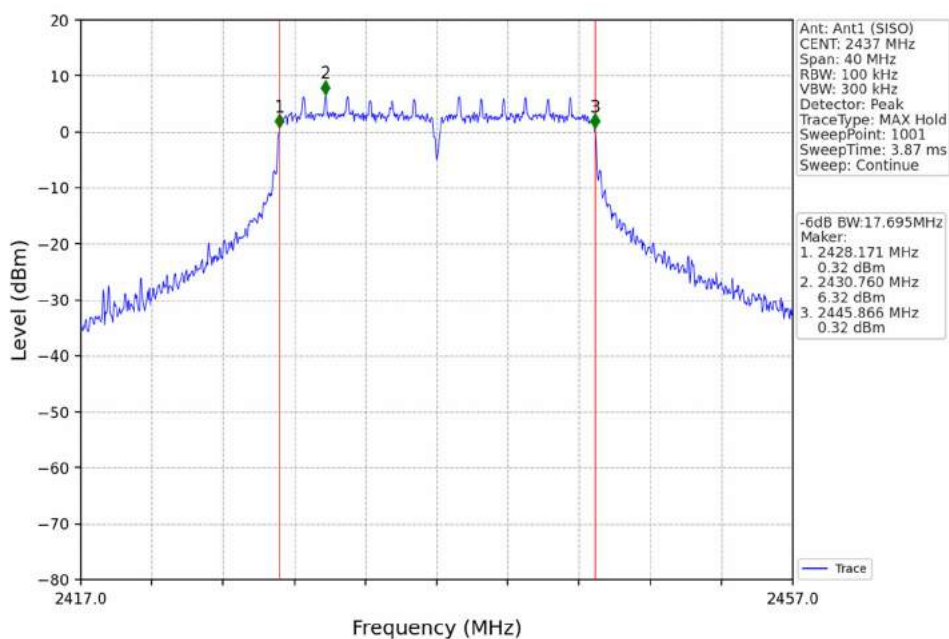


802.11ac(VHT20)_HCH_2462MHz_Ant1 (SISO)_NTNV

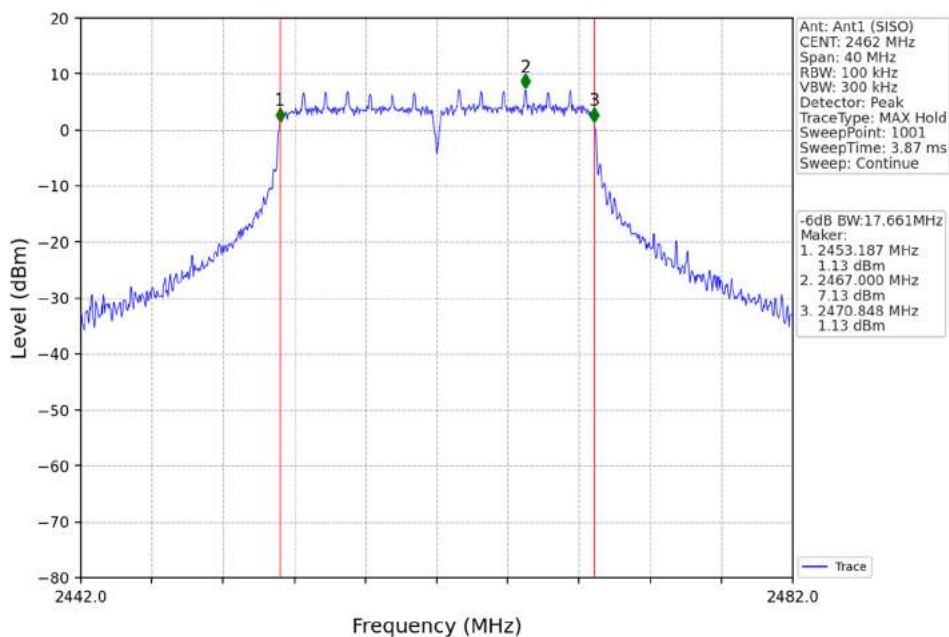


802.11ac(VHT40)_LCH_2422MHz_Ant1 (SISO)_NTNV

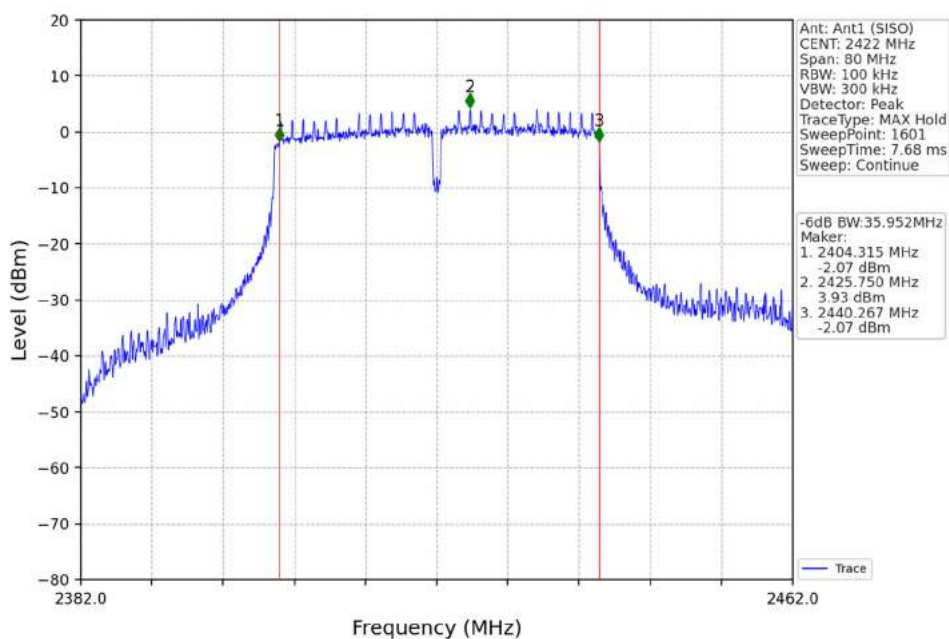


802.11ac(VHT40)_MCH_2437MHz_Ant1 (SISO)_NTNV

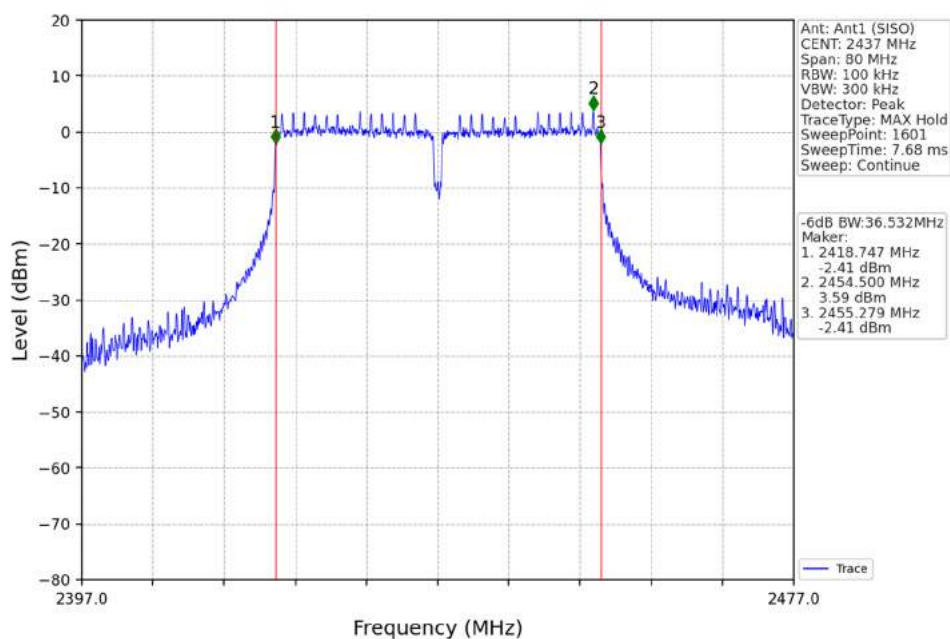


802.11ac(VHT40)_HCH_2452MHz_Ant1 (SISO)_NTNV

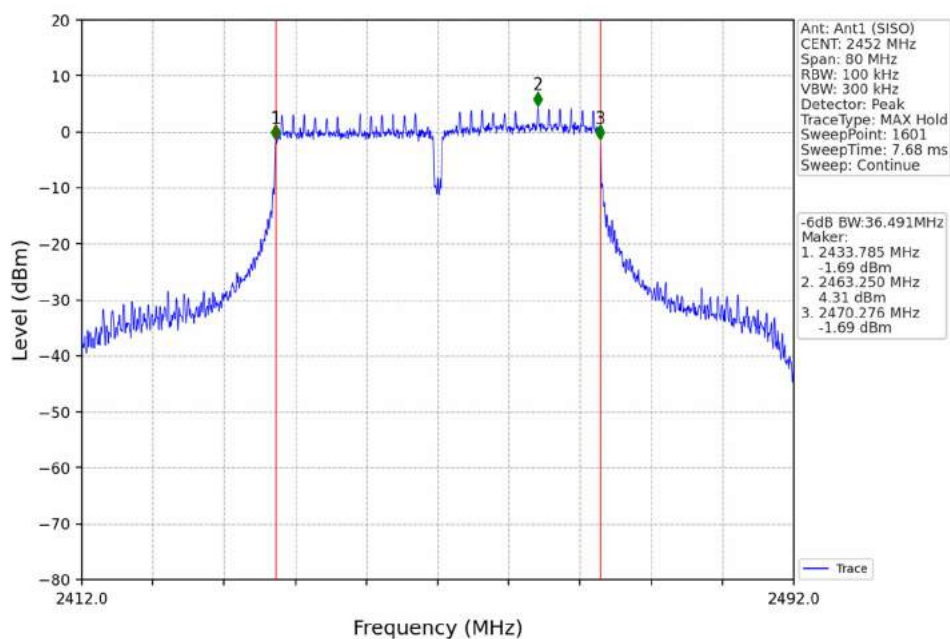


802.11b LCH_2412MHz_Ant2 (SISO)_NTNV

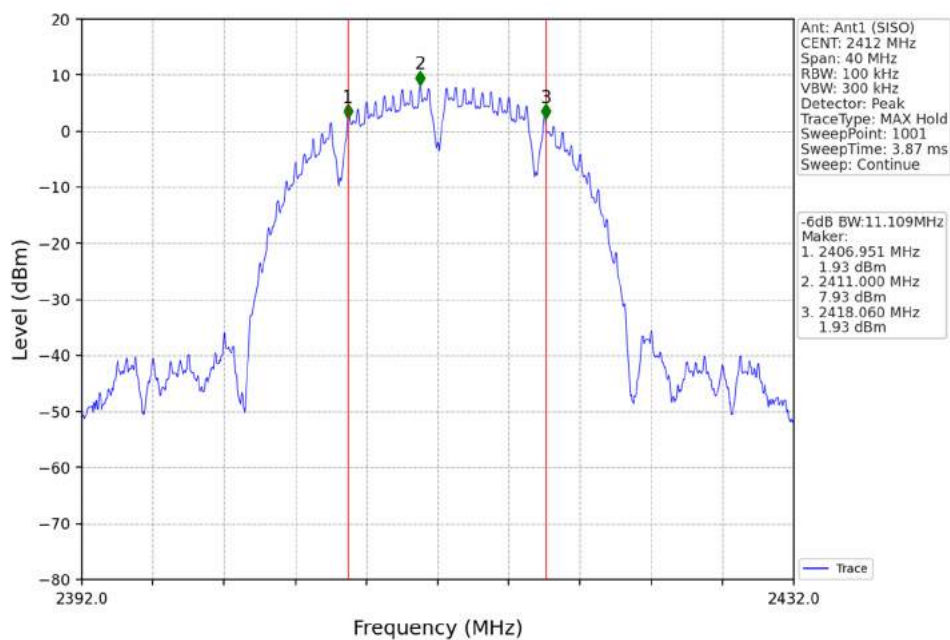


802.11b MCH_2437MHz_Ant2 (SISO)_NTNV

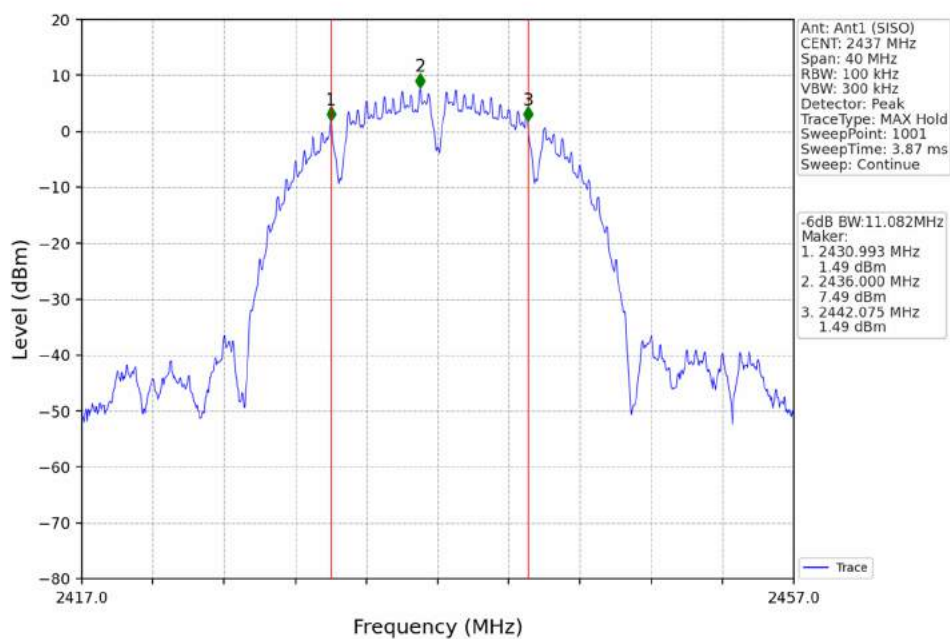


802.11b_HCH_2462MHz_Ant2 (SISO)_NTNV

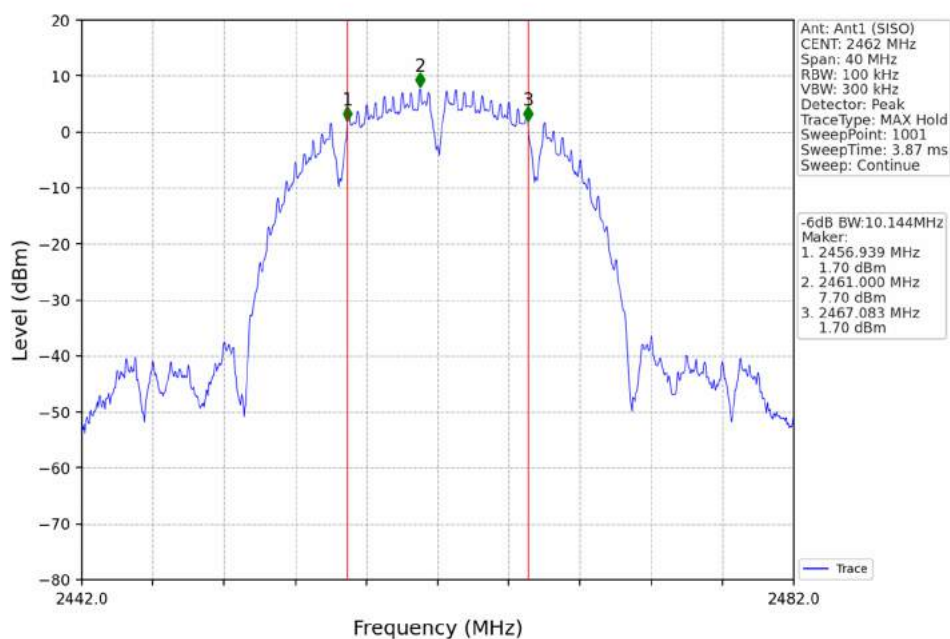


802.11g_LCH_2412MHz_Ant2 (SISO)_NTNV

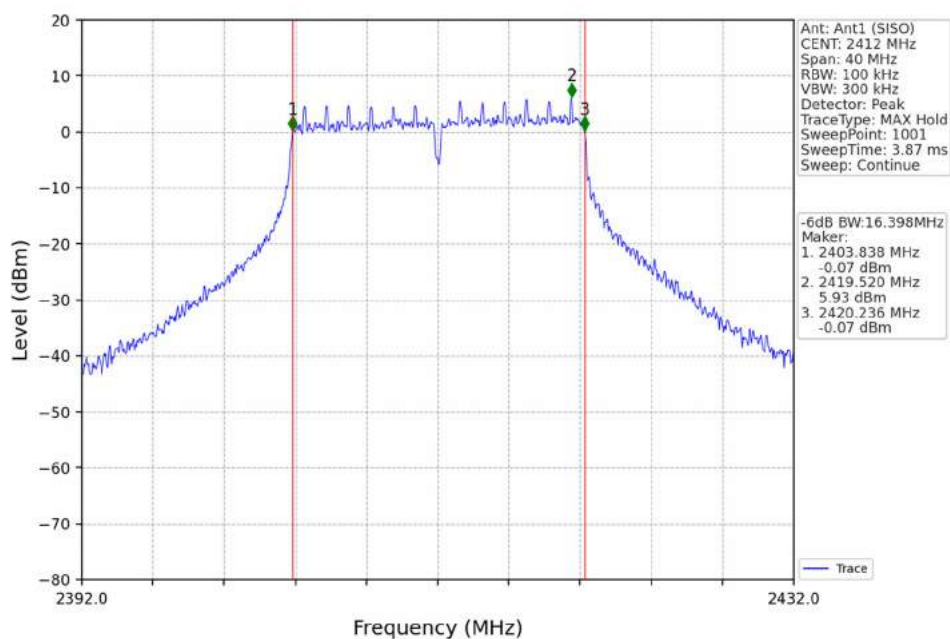


802.11g_MCH_2437MHz_Ant2 (SISO)_NTNV

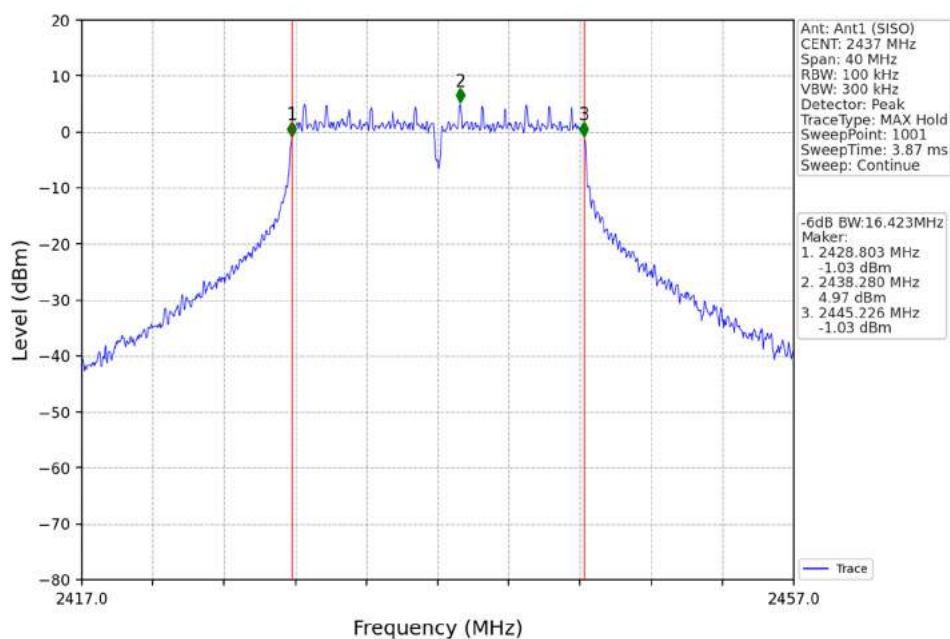


802.11g_HCH_2462MHz_Ant2 (SISO)_NTNV

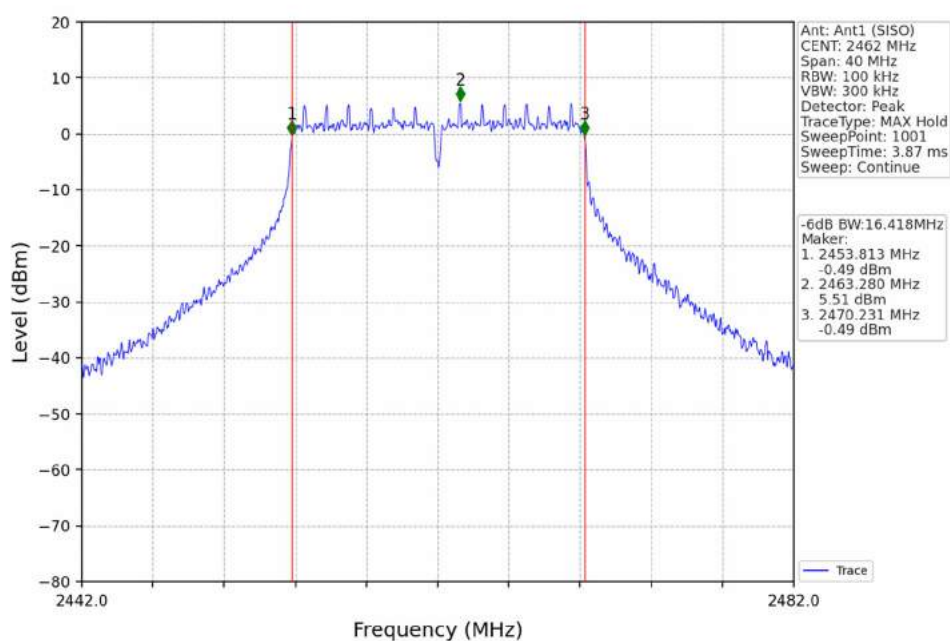


802.11n(HT20)_LCH_2412MHz_Ant2 (SISO)_NTNV

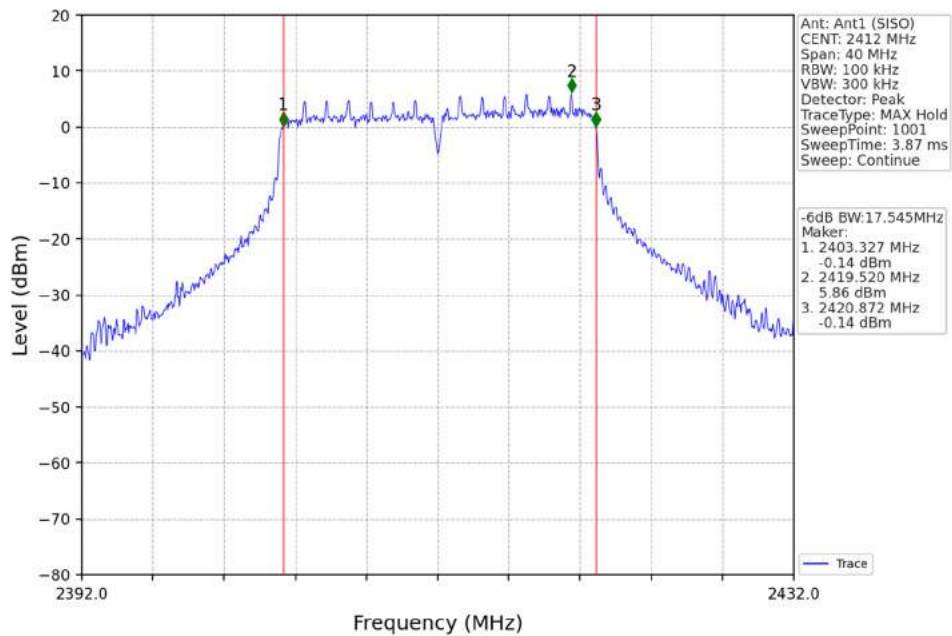

802.11n(HT20)_MCH_2437MHz_Ant2 (SISO)_NTNV

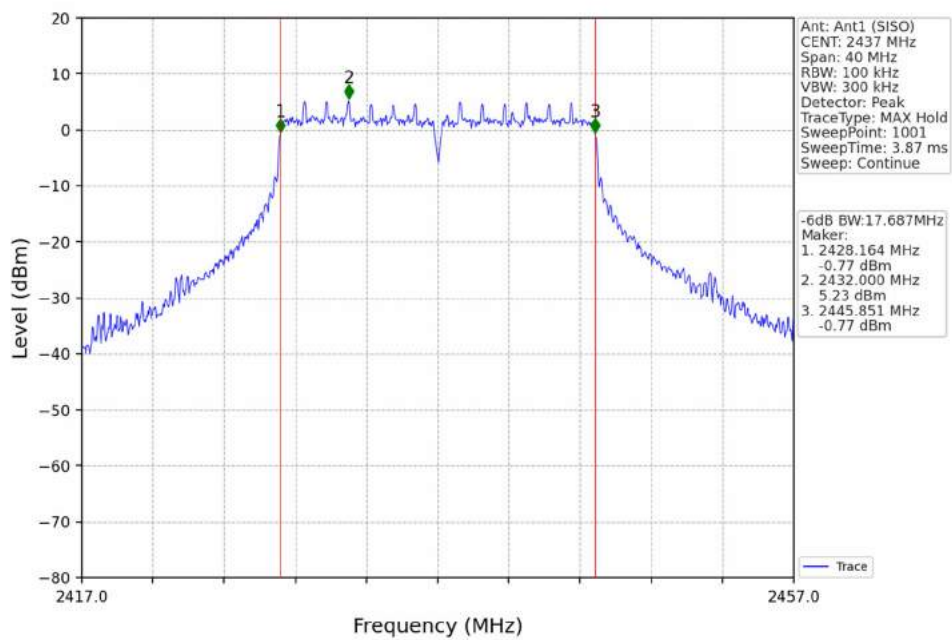

802.11n(HT20)_HCH_2462MHz_Ant2 (SISO)_NTNV

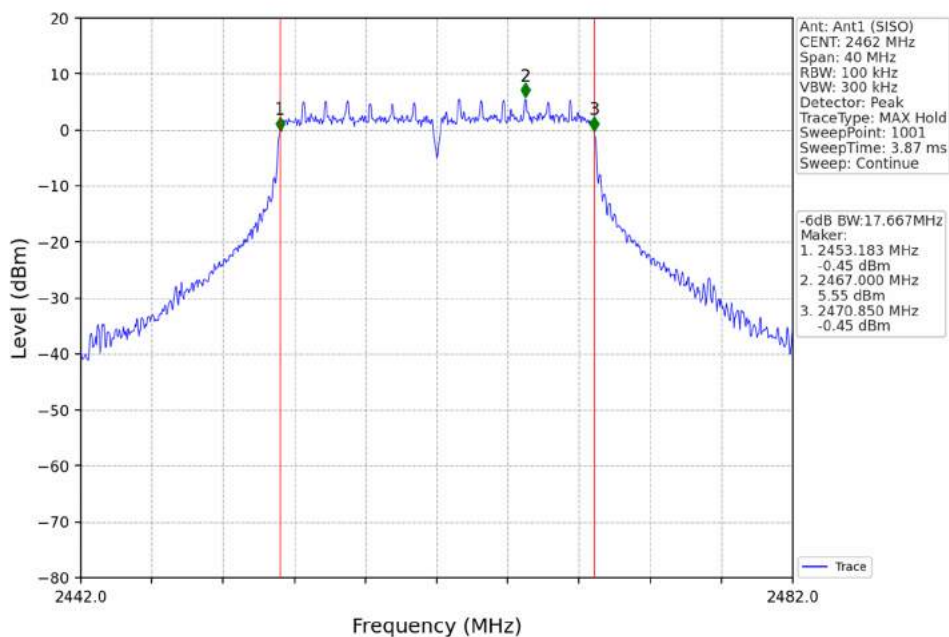

802.11n(HT40)_LCH_2422MHz_Ant2 (SISO)_NTNV

