

TEST REPORT

EUT Description	WLAN and BT, 2x2 PCIe M.2 1216 SD adapter card
Brand Name	Intel® Wi-Fi 6E AX210
Model Name	AX210D2W
FCC ID	PD9AX210D2
Date of Test Start/End	2020-09-22 /2020-10-13
Features	802.11ax, Dual Band, 2x2 Wi-Fi + Bluetooth® 5.2 (see section 5)

Applicant	Intel Mobile Communications
Address	100 Center Point Circle, Suite 200 Columbia, South Carolina 29210 USA
Contact Person	Steven Hackett
Telephone/Fax/ Email	steven.c.hackett@intel.com

Reference Standards	FCC CFR Title 47 Part 15 E (see section 1)
---------------------	---

Test Report identification	200611-04.TR01
Revision Control	Rev. 00 This test report revision replaces any previous test report revision (see section 8)

The test results relate only to the samples tested.
This report shall not be reproduced, except in full, without the written approval of the laboratory.
Reference to accreditation shall be used only by full reproduction of test report.

Issued by _____ Reviewed by _____

Zayd OUACHICHA
(Test Engineer Lead)

Cheiel In
(Technical Manager)

Intel Corporation S.A.S – WRF Lab
425 rue de Goa – Le Cargo B6 - 06600, Antibes, France
Tel. +33493001400 / Fax +33493001401

Table of Contents

1. Standards, reference documents and applicable test methods	3
2. General conditions, competences and guarantees	3
3. Environmental Conditions	3
4. Test samples	4
5. EUT Features	5
6. Remarks and comments	5
7. Test Verdicts summary	6
7.1. 802.11 A/N/AC/AX – U-NII-1	6
7.2. 802.11 A/N/AC/AX – U-NII-2A	6
8. Document Revision History	6
Annex A. Test & System Description	7
A.1 MEASUREMENT SYSTEM.....	7
A.2 TEST EQUIPMENT LIST	9
A.3 MEASUREMENT UNCERTAINTY EVALUATION	10
Annex B. Test Results U-NII-1 & U-NII-2A.....	11
B.1 TEST CONDITIONS.....	11
B.2 TEST RESULTS TABLES U-NII-1.....	12
B.2.1 26dB & 99% Bandwidth.....	12
B.2.2 Power Limits. Maximum Output power & Maximum power spectral density.....	15
B.2.3 Undesirable emission limits : out of band (Conducted).....	22
B.2.4 Radiated spurious emission.....	24
B.3 TEST RESULTS TABLES U-NII-2A	38
B.3.1 26dB & 99% Bandwidth.....	38
B.3.2 Power Limits. Maximum Output power & Maximum power spectral density.....	40
B.3.3 Undesirable emissions limits : out of band (Conducted).....	48
B.3.4 Radiated spurious emission.....	50
Annex C. System Plots	62
C.1.1 26dB and 99% bandwidth.....	62
C.1.2 Maximum output power	69
C.1.3 Undesirable emission limits: out of band (Conducted).....	75
Annex D. Photographs	91
D.1 TEST SETUP	91
D.2 TEST SAMPLE	93

1. Standards, reference documents and applicable test methods

1. FCC Title 47 CFR part 15 – Subpart E – Unlicensed National Information Infrastructure Devices. 2019-10-01 Edition
2. FCC Title 47 CFR part 15 - Subpart C – §15.209 Radiated emission limits; general requirements. 2019-10-01 Edition
3. FCC OET KDB 789033 D02 v02r01 General U-NII Test Procedures New Rules – Guidelines for compliance testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E).
4. FCC OET KDB 662911 D01 v02r01 - Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
5. ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

2. General conditions, competences and guarantees

- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an ISO/IEC 17025:2017 laboratory accredited by the American Association for Laboratory Accreditation (A2LA) with the certificate number 3478.01.
- ✓ Intel Corporation SAS Wireless RF Lab (Intel WRF Lab) is an Accredited Test Firm recognized by the FCC, with Designation Number FR0011.
- ✓ Intel WRF Lab declines any responsibility with respect to the identified information provided by the customer and that may affect the validity of results.
- ✓ Intel WRF Lab only provides testing services and is committed to providing reliable, unbiased test results and interpretations.
- ✓ Intel WRF Lab is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.
- ✓ Intel WRF Lab has developed calibration and proficiency programs for its measurement equipment to ensure correlated and reliable results to its customers.
- ✓ This report is only referred to the item that has undergone the test.
- ✓ This report does not imply an approval of the product by the Certification Bodies or competent Authorities.
- ✓ Complete or partial reproduction of the report cannot be made without written permission of Intel WRF Lab.

3. Environmental Conditions

- ✓ At the site where the measurements were performed the following limits were not exceeded during the tests:

Temperature	22.5°C ± 3.5°C
Humidity	48% ± 24%

4. Test samples

Sample	Control #	Description	Model	Serial #	Date of receipt	Note
#1	200611-04.S11	WiFi 6E Module	AX210D2W	WFM: BC17B87707EF	2020-09-18	RF Conducted
	180001-01.S18	Adapter	Socket	-	2018-11-22	
	170000-01.S02	Laptop	Latitude E5450	21HTPF2	2017-03-28	
	170524-01.S13	Extender	PCB00495	4955013-032	2017-05-29	
#2	200611-04.S10	WiFi 6E Module	AX210D2W	WFM:BC17B8770880	2020-09-18	Used for 30MHz-1GHz and MIMO 18-40GHz Radiated Spurious Emissions tests
	200504-04.S07	Laptop	Latitude 5401	BVHLK13	2020-06-02	
	200504-04.S07	Extender	ADEXELEC	-	2020-06-02	
	180001-01.S17	Socket	Socket WsP/ThP	8882-043	2018-11-22	
	200611-03.S28	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S29	Aux Antenna	Skycross	-	2020-07-01	
#3	200611-04.S08	WiFi 6E Module	AX210D2W	WFM:BC17B8770597	2020-09-18	Used for SISO 18-40GHz Radiated Spurious Emissions Tests
	200504-04.S07	Laptop	Latitude 5401	BVHLK13	2020-06-02	
	200504-04.S07	Extender	ADEXELEC	-	2020-06-02	
	180001-01.S17	Socket	Socket WsP/ThP	8882-043	2018-11-22	
	200611-03.S28	Main Antenna	Skycross	-	2020-07-01	
	200611-03.S29	Aux Antenna	Skycross	-	2020-07-01	
#4	200611-04.S07	WiFi 6E Module	AX210D2W	WFM:BC17B87707B8	2020-09-18	Used for 1-18GHz Radiated Spurious Emissions tests
	200615-05.S09	Laptop	Latitude 5401	GVGLK13	2020-06-12	
	200611-03.S31	Extender	ADEXELEC	-	2020-08-19	
	180001-01.S16	Socket	Socket WsP/ThP	8882-017	2018-11-22	
	200611-03.S12	Main Antenna	Skycross	-	2020-07-15	
	200611-03.S11	Aux Antenna	Skycross	-	2020-07-15	

5. EUT Features

The herein information is provided by the customer

Brand Name	Intel® Wi-Fi 6E AX210		
Model Name	AX210D2W		
Software Version	DRTU version: 01465_99_3500_57W		
Driver Version	V0.17.2		
Prototype / Production	Production		
Supported Radios	802.11b/g/n/ax2.4GHz (2400.0 – 2483.5 MHz) 802.11a/n/ac/ax5.2GHz (5150.0 – 5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz) Bluetooth 5.22.4GHz (2400.0 – 2483.5 MHz)		
Antenna Information	Transmitter	Main (chain A)	Aux (chain B)
	Manufacturer	SkyCross	Skycross
	Antenna type	PIFA antenna	PIFA antenna
	Part number	N/A	N/A
	Declared antenna gain (dBi)	+5	+5
Document			
	Filename		Date of receipt
	Intel_Ref_Antenna data_HMC-M2 Ant_Spec_Universe_SkyCross Antenna		2013-01-28

6. Remarks and comments

1. No deviations were made from the test methods listed in section 1 of this report

7. Test Verdicts summary

The statement of conformity to applicable standards in the table below are based on the measured values, without taking into account the measurement uncertainties.

7.1. 802.11 a/n/ac/ax – U-NII-1

FCC part	Test name	Verdict
15.407 (a) (1)	Power Limits. Maximum output power	P
15.407 (a) (1)	Power spectral density	P
15.407 (b) (1) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (1) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

7.2. 802.11 a/n/ac/ax – U-NII-2A

FCC part	Test name	Verdict
15.407 (a) (2)	Power Limits. Maximum output power	P
15.407 (a) (2)	Power spectral density	P
15.407 (b) (2) 15.209	Undesirable emissions limits: Band Edge (conducted)	P
15.407 (b) (2) 15.209	Undesirable emissions limits: Spurious emissions (radiated)	P

P: Pass
F: Fail
NM: Not Measured
NA: Not Applicable

8. Document Revision History

Revision #	Modified by	Revision Details
Rev. 00	C.Requin	First Issue


Annex A. Test & System Description

A.1 Measurement System

Measurements were performed using the following setups, made in accordance to the general provisions of FCC OET KDB 789033 D02 General UNII Test Procedures.


The DUT was installed in a test fixture and this test fixture is connected to a laptop computer and AC/DC power adapter. The laptop computer was used to configure the EUT to continuously transmit at a specified output power using all different modes and modulation schemes, using the Intel proprietary tool DRTU.

Conducted test setup

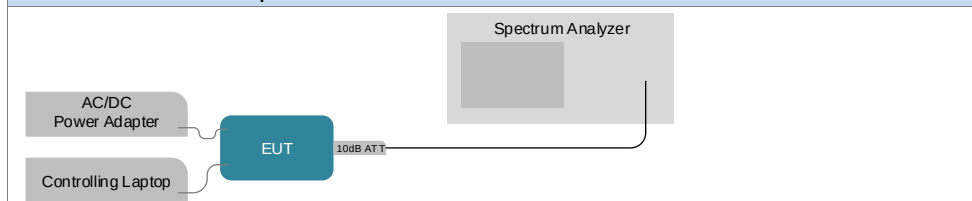


Radiated test setup


Radiated Setup 30 MHz - 1 GHz

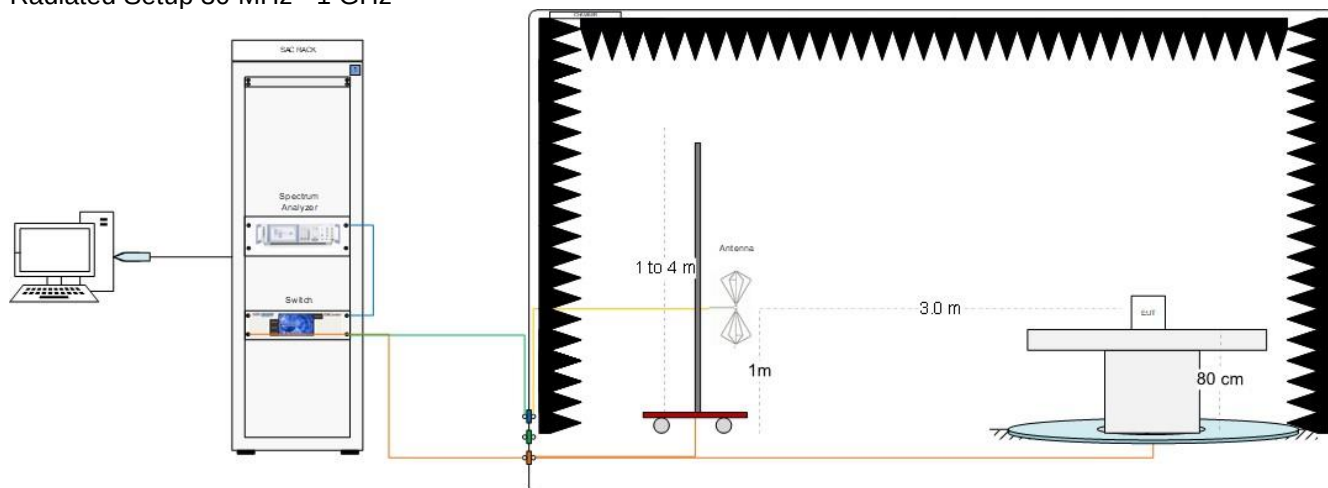


Radiated Setup 1 GHz – 6.4 GHz

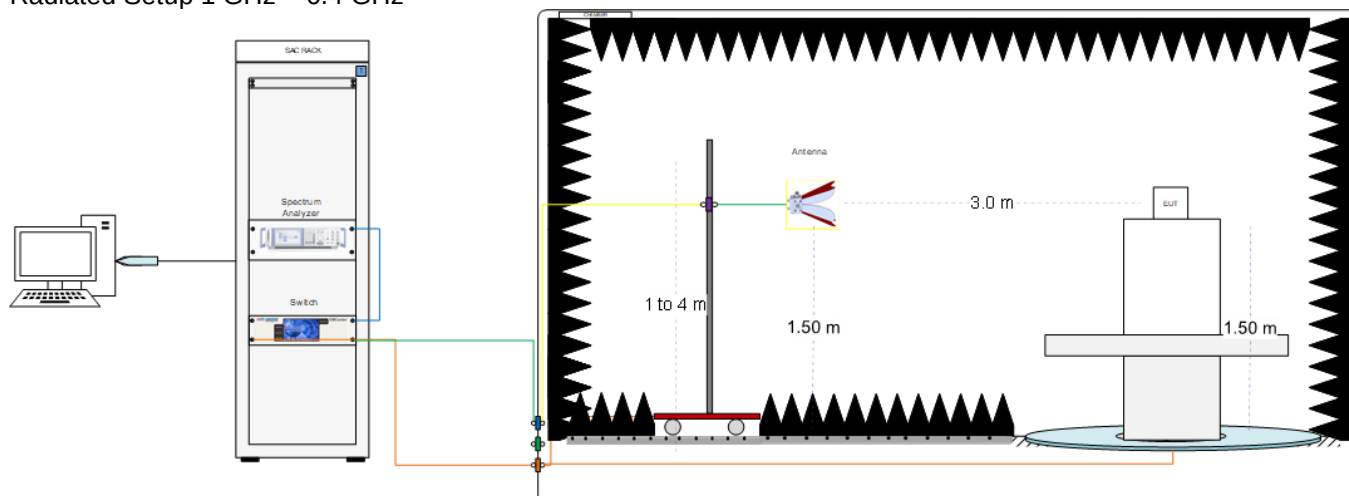

Radiated Setup 6.4 GHz - 18 GHz

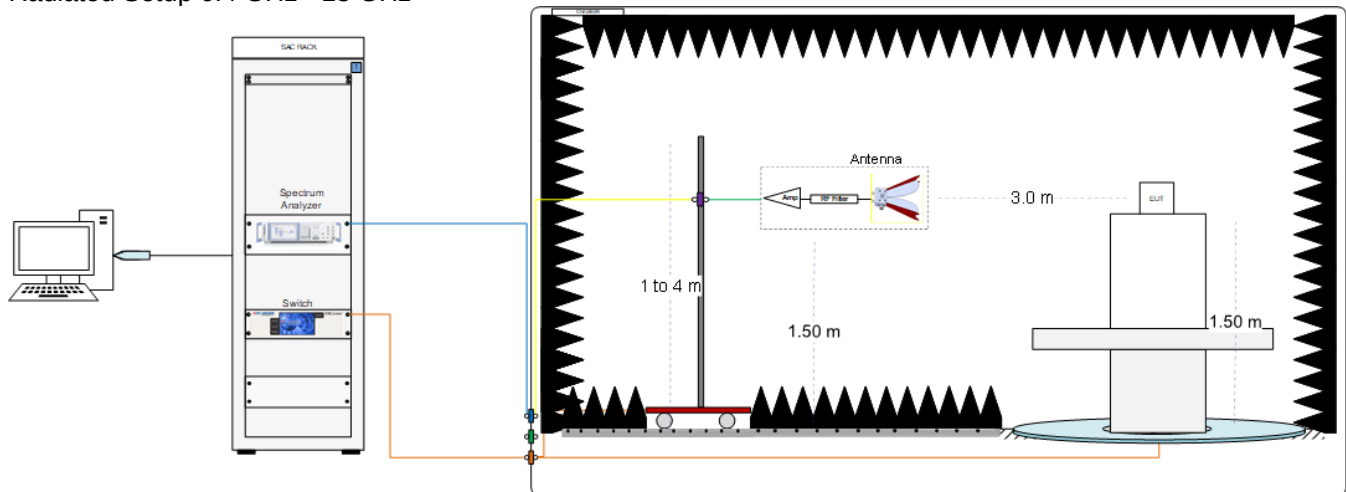

Radiated Setup 18 GHz – 40 GHz

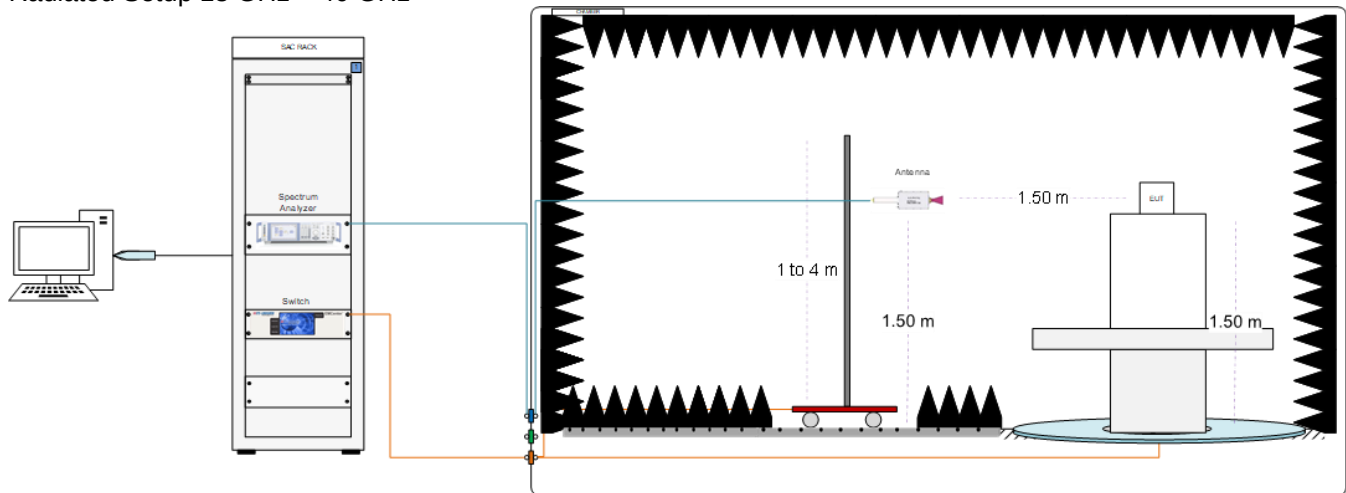Sample Calculation

The spurious received voltage $V(\text{dB}\mu\text{V})$ in the spectrum Analyzer is converted to Electric field strength using the transducer factor F corresponding to the Rx path Loss:

$$F (\text{dB/m}) = \text{Rx Antenna Factor (dB/m)} + \text{Cable losses (dB)} - \text{Amplifiers Gain (dBi)}$$

$$E (\text{dB}\mu\text{V/m}) = V(\text{dB}\mu\text{V}) + F (\text{dB/m})$$

For field strength measurements made at other than the distance at which the applicable limit is specified, the field strength of the emission at the distance specified by the limit is deduced as follows:

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \cdot \log(D_{\text{Meas}}/D_{\text{SpecLimit}})$$

where

$E_{\text{SpecLimit}}$ is the field strength of the emission at the distance specified by the limit, in $\text{dB}\mu\text{V/m}$

E_{Meas} is the field strength of the emission at the measurement distance, in $\text{dB}\mu\text{V/m}$

D_{Meas} is the measurement distance, in m

$D_{\text{SpecLimit}}$ is the distance specified by the limit, in m

A.2 Test Equipment List

Conducted setup

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0316	Spectrum Analyzer	FSV30	103309	Rohde & Schwarz	2019-09-02	2021-09-02
0442	RF cable 50cm	Coax 2.92mm Male To 2.92mm Male	N/A	PASTERNAK	2020-08-26	2021-02-26
1044	10dB Attenuator + MH4	N/A	N/A	N/A	N/A	N/A
0583	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-B9D6E	AVITECH	2019-09-06	2021-09-06
1002	Measurement SW v1.5.4.2	Octopi	N/A	Step AT	N/A	N/A

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0135	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2020-07-06	2022-01-07
0136	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
0147	Switch & Positioning systems	EMC Center	00159757	ETS-Lindgren	N/A	N/A
0530	Measurement SW	EMC32, v10.40.10	100623	Rohde & Schwarz	2020-06-24	2021-06-24
1033	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
0420	Spectrum Analyzer	FSV40	101556	Rohde & Schwarz	2020-05-25	2022-05-25
0993	Biconical antenna 30 MHz – 1 GHz	UBAA9115 + BBVU9135 + DGA9552N	0286 + CH 9044	Schwarzbeck	2019-11-22	2021-11-22
0325	Horn antenna	3117	00157734	ETS-Lindgren	2019-08-12	2021-08-12
0141	Horn Antenna + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-02	2022-04-02
0334	Double-Ridged Waveguide Horn with Pre-Amplifier 18 GHz to 40 GHz	3116C+PA	00169308bis + 00196308	ETS-Lindgren	2019-07-24	2021-07-24
0202	Cable 1m - 30MHz to 18 GHz	UFB311A-0-3360-50U300	MFR 64639223229-001	Micro-coax	2020-08-25	2021-02-25
0206	Cable 1.2m – 18 to 40 GHz	UFA147A-0-0480-200200	MFR 64639223720-003	Micro-coax	2020-08-25	2021-02-25
0263	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utiliflex	2020-08-25	2021-02-25
0369	Cable 2m - 26.5GHz to 40GHz	794-9191-2000A	E00327	Atem	2020-08-25	2021-02-25
0371	Cable 1m – 30 MHz - 18GHz	UFB311A-0-0590-50U50U	MFR 64639 223230-001	Micro-coax	2020-08-25	2021-02-25
0758	Cable 7.5m - 30MHz to 18GHz	0501051057000GX	18.23.181	Radiall	2020-08-25	2021-02-25
0809	Cable 7m - 18GHz to 40GHz	R286304009	-	Radiall	2020-08-25	2021-02-25
0859	Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radiall	2020-08-25	2021-02-25
0797	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	Avtech	2019-07-04	2021-07-04

N/A: Not Applicable

Radiated Setup #2

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0337	Anechoic chamber	RFD-FA-100	5996	ETS Lindgren	2020-07-06	2022-07-06
0238	Switch & Positioner	EMCenter	00151232	ETS Lindgren	N/A	N/A
0382	Antenna Tower	2171B-3.0M	00150123	ETS Lindgren	N/A	N/A
0383	Turntable	-	-	ETS Lindgren	N/A	N/A
0329	Measurement SW	EMC32, v10.50.10	100401	Rohde & Schwarz	N/A	N/A
0133	Spectrum Analyzer	FSV40	101358	Rohde & Schwarz	2020-02-25	2022-02-25
0138	Double Ridge Horn (1- 18GHz)	3117	00152266	ETS Lindgren	2020-03-08	2022-03-08
0141	Horn Antenna 3117 + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-02	2022-04-02
0334	Double Horn Ridged antenna	3116C-PA	00169308bis + 00196308	ETS-Lindgren	2019-07-24	2021-07-24
0871	RF Cable 1-18GHz, 1.5 m	0501050991200GX	19.21.710	Radiall	2020-08-20	2021-02-20
0860	RF Cable 1-18GHz, 1.2 m	2301761761200PJ	12.22.1104	Radiall	2020-08-20	2021-02-20
0275	RF Cable 1-18GHz - 6.5m	140-8500-11-51	001	Spectrum	2020-08-20	2021-02-20
0684	RF Cable 1GHz-18GHz 1.5m	-	-	Spirent	2020-08-20	2021-02-20
0679	RF Cable 18-40 GHz 6m	R286304009	1747364	Radiall	2020-08-20	2021-02-20
0028	RF Cable 1.2m 40MHz-40GHz	794-9191-1200A	DA585	Atem	2020-08-20	2021-02-20
0725	RF Cable 1-9.5GHz 1.2m	0500990991200KE	-	Radiall	2020-08-20	2021-02-20
0796	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D4F316	Avtech	2019-07-05	2021-07-05

N/A: Not Applicable

Radiated Setup - shared equipments

Shared Radiated Equipment

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0616	Power Sensor	NRP-Z81	104385	Rohde & Schwarz	2020-04-08	2022-04-08
0617	Power Sensor	NRP-Z81	104386	Rohde & Schwarz	2020-04-08	2022-04-08
0618	Power Sensor	NRP-Z81	104382	Rohde & Schwarz	2020-04-08	2022-04-08

A.3 Measurement Uncertainty Evaluation

The system uncertainty evaluation is shown in the table below with a coverage factor of $k = 2$ to indicate a 95% level of confidence:

Measurement type	Uncertainty	Unit
Timing	± 0.12	%
Power Spectral density	± 1.47	dB
Occupied bandwidth	± 2.07	%
Conducted Power	± 1.03	dB
Conducted Spurious Emission <40 GHz	± 3.45	dB
Radiated tests <1GHz	± 3.24	dB
Radiated tests 1GHz – 40 GHz	± 4.34	dB

Annex B. Test Results U-NII-1 & U-NII-2A

The herein test results were performed by:

Test case measurement	Test Engineer
26dB & 99% bandwidth	C.Requin
Power Limits. Maximum output power	C.Requin
Power spectral density	C.Requin
Undesirable emissions limits: Band Edge (conducted)	C.Requin
Undesirable emissions limits (radiated)	A.Lounes. N.Nachabe, N.Bui

B.1 Test Conditions

For 802.11a mode the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, but not simultaneously.

For 802.11n20 & 802.11ax20 (20 MHz channel bandwidth), 802.11n40 & 802.11ax40 (40MHz channel bandwidth), 802.11ac80 & 802.11ax80 (80MHz channel bandwidth) and 802.11ac160 & 802.11ax160 (160MHz channel bandwidth) modes the EUT can transmit at both CHAIN A and CHAIN B RF outputs individually, and also simultaneously.

The following data rates were selected based on preliminary testing that identified those rates as the worst cases for output power and spurious levels at the band edges:

Transmission	Mode	Bandwidth (MHz)	Worst Case Data Rate
SISO	802.11a	20	6Mbps
	802.11n	20	HT0
		40	HT0
	802.11ac	80	VHT0
		160	VHT0
	802.11ax	20	HE0
		40	HE0
		80	HE0
		160	HE0
MIMO	802.11n	20/40	HT8
	802.11ac	80/160	VHT0
	802.11ax	20/40/80/160	HE0

B.2 Test Results Tables U-NII-1

B.2.1 26dB & 99% Bandwidth

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

See Annex C.1.1 for the screenshot results

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO A	36	5180	23.75	16.52
			40	5200	24.75	16.68
			48	5240	25.40	16.72
		SISO B	36	5180	23.60	16.64
			40	5200	23.90	16.56
			48	5240	23.55	16.64
802.11n20	HT0	SISO A	36	5180	24.45	17.76
			40	5200	24.75	17.76
			48	5240	25.65	17.92
		SISO B	36	5180	23.80	17.80
			40	5200	24.00	17.76
			48	5240	24.45	17.72
	HT8	MIMO A	36	5180	24.50	17.72
			40	5200	24.95	17.76
			48	5240	25.50	17.96
		MIMO B	36	5180	24.00	17.80
			40	5200	23.45	17.68
			48	5240	23.35	17.72
802.11n40	HT0	SISO A	38	5190	43.11	36.16
			46	5230	47.07	36.24
		SISO B	38	5190	43.83	36.08
			46	5230	44.55	36.08
	HT8	MIMO A	38	5190	42.93	36.00
			46	5230	44.46	36.08
		MIMO B	38	5190	42.84	35.92
			46	5230	43.74	36.08
			46	5230	43.74	36.08
802.11ac80	VHT0	SISO A	42	5210	88.35	75.12
		SISO B			86.83	75.12
		MIMO A			87.02	75.12
		MIMO B			87.21	75.00
		MIMO B			87.21	75.00
802.11ac160	VHT0	SISO A	50	5250	164.67	153.00
		SISO B			164.34	153.20
		MIMO A			164.34	153.00
		MIMO B			163.68	153.00
		MIMO B			163.68	153.00

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	RU config.	26dB BW [MHz]	99% BW [MHz]
802.11ax20	HE0	SISO A	36	5180	Full	24.20	18.96
					26/0	20.65	18.16
					52/37	21.60	18.32
					106/53	22.65	17.20
			40	5200	Full	25.30	19.00
			48	5240	Full	25.55	19.00
		SISO B	36	5180	Full	23.10	18.92
					26/0	20.65	18.12
					52/37	21.65	18.40
					106/53	22.60	18.20
			40	5200	Full	23.95	18.92
			48	5240	Full	24.35	18.92
		MIMO A	36	5180	Full	23.65	18.92
					26/0	20.60	18.64
					52/37	21.70	18.20
					106/53	22.75	17.20
			40	5200	Full	24.35	18.92
			48	5240	Full	25.75	19.00
		MIMO B	36	5180	Full	24.30	18.96
					26/0	21.15	18.56
					52/37	22.05	18.48
					106/53	23.35	17.20
			40	5200	Full	23.95	18.92
			48	5240	Full	23.45	18.84
802.11ax40	HE0	SISO A	38	5190	Full	43.56	37.44
			46	5230	242/61	24.39	18.80
		SISO B	38	5190	Full	43.02	37.36
			46	5230	242/61	24.12	18.80
		MIMO A	38	5190	Full	43.29	37.60
			46	5230	Full	43.11	37.60
		MIMO A	38	5190	242/61	24.57	18.80
			46	5230	Full	44.19	37.68
		MIMO B	38	5190	Full	42.30	37.52
			46	5230	242/61	24.66	18.96
		MIMO B	38	5190	Full	42.93	37.44
			46	5230	Full	42.93	37.44
802.11ax80	HE0	SISO A	42	5210	Full	83.22	76.92
					484/65	42.75	37.44
		SISO B			Full	84.74	76.56
					484/65	43.13	37.44
		MIMO A			Full	83.41	76.68
					484/65	43.13	37.32
		MIMO B			Full	83.03	76.68
					484/65	43.32	37.32
802.11ax160	HE0	SISO A	50	5250	Full	162.69	154.40
					996/67	85.80	76.80
					996/S67	85.47	77.00
		SISO B			Full	163.02	154.80
					996/67	84.48	76.80
					996/S67	84.81	76.80
		MIMO A			Full	162.69	154.60
					996/67	85.80	76.80
					996/S67	85.80	76.80
		MIMO B			Full	162.36	154.40
					996/67	83.82	76.80
					996/S67	85.14	76.80

Max Value

B.2.2 Power Limits. Maximum Output power & Maximum power spectral density

Test limits

FCC part	Limits
15.407 (a) (1) (iv)	For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

See Annex C.1.2 for the screenshot results

Results tables

Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	98.0
		SISO B	98.0
802.11n20	HT0	SISO A	98.9
		SISO B	98.9
	HT8	MIMO A	98.9
		MIMO B	98.9
802.11ax20	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.4
		MIMO B	99.4
802.11n40	HT0	SISO A	98.8
		SISO B	98.8
	HT8	MIMO A	98.7
		MIMO B	98.7
802.11ax40	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.3
		MIMO B	99.3
802.11ac80	VHT0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.4
		MIMO B	99.4
802.11ax80	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.4
		MIMO B	99.4
802.11ac160	VTH0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.1
		MIMO B	99.1
802.11ax160	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	98.9
		MIMO B	98.9

Maximum output power

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11a	6Mbps	36	5180	SISO A	18.95	18.95	23.95	78.52
				SISO B	19.11	19.11	24.11	81.47
		40	5200	SISO A	20.98	20.98	25.98	125.31
				SISO B	20.87	20.87	25.87	122.18
		48	5240	SISO A	20.85	20.85	25.85	121.62
				SISO B	20.92	20.92	25.92	123.59
802.11n20	HT0	36	5180	SISO A	18.81	18.81	23.81	76.03
				SISO B	18.94	18.94	23.94	78.34
		40	5200	SISO A	20.68	20.68	25.68	116.95
				SISO B	20.84	20.84	25.84	121.34
		48	5240	SISO A	21.01	21.01	26.01	126.18
				SISO B	20.78	20.78	25.78	119.67
	HT8	36	5180	MIMO A	17.17	17.17	22.17	52.12
				MIMO B	17.32	17.32	22.32	53.95
				Combined A+B	20.26	20.26	25.26	106.07
		40	5200	MIMO A	18.70	18.70	23.70	74.13
				MIMO B	18.90	18.90	23.90	77.62
				Combined A+B	21.81	21.81	26.81	151.76
		48	5240	MIMO A	18.76	18.76	23.76	75.16
				MIMO B	18.93	18.93	23.93	78.16
				Combined A+B	21.86	21.86	26.86	153.33
802.11n40	HT0	38	5190	SISO A	18.43	18.43	23.43	69.66
				SISO B	18.25	18.25	23.25	66.83
		46	5230	SISO A	21.04	21.04	26.04	127.06
				SISO B	21.03	21.03	26.03	126.77
	HT8	38	5190	MIMO A	15.55	15.55	20.55	35.89
				MIMO B	15.38	15.38	20.38	34.51
				Combined A+B	18.48	18.48	23.48	70.41
		46	5230	MIMO A	20.43	20.43	25.43	110.41
				MIMO B	20.36	20.36	25.36	108.64
				Combined A+B	23.41	23.41	28.41	219.05
802.11ac80	VHT0	42	5210	SISO A	18.82	18.82	23.82	76.21
				SISO B	18.03	18.03	23.03	63.53
				MIMO A	15.55	15.55	20.55	35.89
				MIMO B	14.37	14.37	19.37	27.35
				Combined A+B	18.01	18.01	23.01	63.24
802.11ac160	VHT0	50	5250	SISO A	15.00	15.00	20.00	31.62
				SISO B	14.48	14.48	19.48	28.05
				MIMO A	13.29	13.29	18.29	21.33
				MIMO B	13.41	13.41	18.41	21.93
				Combined A+B	16.36	16.36	21.36	43.26

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max* EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11ax20	HE0	36	5180	SISO A	Full	18.95	18.95	23.95	78.52
					26/0	13.59	13.59	18.59	22.86
					52/37	16.39	16.39	21.39	43.55
					106/53	19.56	19.56	24.56	90.36
				SISO B	Full	19.10	19.10	24.10	81.28
					26/0	13.80	13.80	18.80	23.99
					52/37	16.65	16.65	21.65	46.24
					106/53	19.74	19.74	24.74	94.19
				MIMO A	Full	17.30	17.30	22.30	53.70
					26/0	10.78	10.78	15.78	11.97
					52/37	13.67	13.67	18.67	23.28
					106/53	16.75	16.75	21.75	47.32
				MIMO B	Full	17.41	17.41	22.41	55.08
					26/0	10.77	10.77	15.77	11.94
					52/37	13.70	13.70	18.70	23.44
					106/53	16.67	16.67	21.67	46.45
				Combined A+B	Full	20.37	20.37	25.37	108.78
					26/0	13.79	13.79	18.79	23.91
					52/37	16.70	16.70	21.70	46.72
					106/53	19.72	19.72	24.72	93.77
		40	5200	SISO A	Full	20.84	20.84	25.84	121.34
				SISO B	Full	20.91	20.91	25.91	123.31
				MIMO A	Full	18.88	18.88	23.88	77.27
				MIMO B	Full	19.08	19.08	24.08	80.91
				Combined A+B	Full	21.99	21.99	26.99	158.18
		48	5240	SISO A	Full	20.95	20.95	25.95	124.45
				SISO B	Full	20.94	20.94	25.94	124.17
				MIMO A	Full	18.90	18.90	23.90	77.62
				MIMO B	Full	19.08	19.08	24.08	80.91
				Combined A+B	Full	22.00	22.00	27.00	158.53
802.11ax40	HE0	38	5190	SISO A	Full	18.43	18.43	23.43	69.66
					242/61	19.03	19.03	24.03	79.98
				SISO B	Full	18.07	18.07	23.07	64.12
					242/61	19.21	19.21	24.21	83.37
				MIMO A	Full	15.43	15.43	20.43	34.91
					242/61	17.68	17.68	22.68	58.61
				MIMO B	Full	15.58	15.58	20.58	36.14
					242/61	17.43	17.43	22.43	55.34
		46	5230	Combined A+B	Full	18.52	18.52	23.52	71.06
					242/61	20.57	20.57	25.57	113.95
				SISO A	Full	20.99	20.99	25.99	125.60
				SISO B	Full	20.82	20.82	25.82	120.78
				MIMO A	Full	20.41	20.41	25.41	109.90
				MIMO B	Full	20.22	20.22	25.22	105.20
				Combined A+B	Full	23.33	23.33	28.33	215.10
802.11ax80	HE0	42	5210	SISO A	Full	18.62	18.62	23.62	72.78
					484/65	18.55	18.55	23.55	71.61
				SISO B	Full	17.80	17.80	22.80	60.26
					484/65	17.89	17.89	22.89	61.52
				MIMO A	Full	16.56	16.56	21.56	45.29
					484/65	15.43	15.43	20.43	34.91
				MIMO B	Full	14.28	14.28	19.28	26.79
					484/65	15.62	15.62	20.62	36.48
				Combined A+B	Full	18.58	18.58	23.58	72.08
					484/65	18.54	18.54	23.54	71.39

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11ax160	HE0	50	5250	SISO A	Full	15.02	15.02	20.02	31.77
					996/67	17.11	17.11	22.11	51.40
					996/S67	15.78	15.78	20.78	37.84
				SISO B	Full	14.67	14.67	19.67	29.31
					996/67	16.93	16.93	21.93	49.32
					996/S67	16.06	16.06	21.06	40.36
				MIMO A	Full	13.68	13.68	18.68	23.33
					996/67	15.22	15.22	20.22	33.27
					996/S67	14.92	14.92	19.92	31.05
				MIMO B	Full	13.31	13.31	18.31	21.43
					996/67	14.77	14.77	19.77	29.99
					996/S67	14.77	14.77	19.77	29.99
				Combined A+B	Full	16.51	16.51	21.51	44.76
					996/67	18.01	18.01	23.01	63.26
					996/S67	17.86	17.86	22.86	61.04

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Maximum power spectral Density (PSD)

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11a	6Mbps	36	5180	SISO A	8.17	8.17
				SISO B	8.34	8.34
		40	5200	SISO A	10.19	10.19
				SISO B	10.08	10.08
		48	5240	SISO A	10.07	10.07
				SISO B	10.12	10.12
802.11n20	HT0	36	5180	SISO A	7.79	7.79
				SISO B	7.94	7.94
		40	5200	SISO A	9.71	9.71
				SISO B	9.85	9.85
		48	5240	SISO A	10.02	10.02
				SISO B	9.80	9.80
	HT8	36	5180	MIMO A	6.18	6.18
				MIMO B	6.31	6.31
				Combined A+B	9.26	9.26
		40	5200	MIMO A	7.74	7.74
				MIMO B	7.90	7.90
				Combined A+B	10.83	10.83
802.11n40	HT0	38	5190	SISO A	4.06	4.06
				SISO B	3.82	3.82
		46	5230	SISO A	6.59	6.59
				SISO B	6.61	6.61
	HT8	38	5190	MIMO A	1.15	1.15
				MIMO B	0.97	0.97
				Combined A+B	4.07	4.07
		46	5230	MIMO A	6.01	6.01
				MIMO B	5.91	5.91
				Combined A+B	8.97	8.97
				SISO A	1.31	1.31
				SISO B	0.62	0.62
				MIMO A	-1.95	-1.95
				MIMO B	-3.10	-3.10
				Combined A+B	0.52	0.52
802.11ac80	VHT0	42	5210	SISO A	1.31	1.31
				SISO B	0.62	0.62
				MIMO A	-1.95	-1.95
				MIMO B	-3.10	-3.10
				Combined A+B	0.52	0.52
				SISO A	-5.32	-5.32
802.11ac160	VHT0	50	5250	SISO B	-5.80	-5.80
				MIMO A	-7.03	-7.03
				MIMO B	-6.93	-6.93
				Combined A+B	-3.97	-3.97
				SISO A	-5.32	-5.32
				SISO B	-5.80	-5.80

* Maximum values are the duty cycle compensated values calculated from the measured average values

Mode	Rate	#Ch	Freq [MHz]	Antenna	RU config.	Average cond.PSD [dBm/MHz]	Max*cond.PSD [dBm/MHz]
802.11ax20	HE0	36	5180	SISO A	Full	7.80	7.80
					26/0	10.74	10.74
					52/37	10.65	10.65
					106/53	10.76	10.76
				SISO B	Full	7.91	7.91
					26/0	10.96	10.96
					52/37	10.90	10.90
					106/53	10.99	10.99
				MIMO A	Full	6.16	6.16
					26/0	7.95	7.95
					52/37	7.97	7.97
					106/53	7.93	7.93
				MIMO B	Full	6.23	6.23
					26/0	7.93	7.93
					52/37	7.91	7.91
					106/53	7.84	7.84
				Combined A+B	Full	9.21	9.21
					26/0	10.95	10.95
					52/37	10.95	10.95
					106/53	10.90	10.90
		40	5200	SISO A	Full	9.64	9.64
				SISO B	Full	9.72	9.72
				MIMO A	Full	7.65	7.65
				MIMO B	Full	7.88	7.88
				Combined A+B	Full	10.78	10.78
		48	5240	SISO A	Full	9.76	9.76
				SISO B	Full	9.75	9.75
				MIMO A	Full	7.74	7.74
				MIMO B	Full	7.88	7.88
				Combined A+B	Full	10.82	10.82
802.11ax40	HE0	38	5190	SISO A	Full	3.81	3.81
					242/61	7.74	7.74
				SISO B	Full	3.47	3.47
					242/61	7.92	7.92
				MIMO A	Full	0.88	0.88
					242/61	6.43	6.43
		46	5230	MIMO B	Full	1.01	1.01
					242/61	6.14	6.14
				Combined A+B	Full	3.96	3.96
					242/61	9.30	9.30
				SISO A	Full	6.37	6.37
				SISO B	Full	6.24	6.24
				MIMO A	Full	5.78	5.78
				MIMO B	Full	5.59	5.59
				Combined A+B	Full	8.70	8.70
802.11ax80	HE0	42	5210	SISO A	Full	1.01	1.01
					484/65	4.04	4.04
				SISO B	Full	0.20	0.20
					484/65	3.38	3.38
				MIMO A	Full	-0.96	-0.96
					484/65	0.89	0.89
				MIMO B	Full	-3.28	-3.28
					484/65	1.15	1.15
				Combined A+B	Full	1.04	1.04
					484/65	4.03	4.03
802.11ax160	HE0	50	5250	SISO A	Full	-5.48	-5.48
					996/67	-0.38	-0.38
					996/S67	-1.73	-1.73
				SISO B	Full	-5.80	-5.80
					996/67	-0.59	-0.59
					996/S67	1.44	1.44
				MIMO A	Full	-6.80	-6.80
					996/67	-2.28	-2.28
					996/S67	-2.61	-2.61
				MIMO B	Full	-7.12	-7.12
					996/67	-2.76	-2.76
					996/S67	-2.72	-2.72
				Combined A+B	Full	-3.95	-3.95
					996/67	0.50	0.50
					996/S67	0.35	0.35

* Maximum values are the duty cycle compensated values calculated from the measured average values

B.2.3 Undesirable emission limits : out of band (Conducted)

Test limits

FCC part	Limits																				
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																				
15.209	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the out of band domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

Both lower and upper side of the out of band were performed using the integration method as defined in the out of band measurements section (paragraph II.G.3.d) of 789033 D02 v02r01

In case of out of band measurements falling in restricted bands, the declared antenna gain is also compensated in the graph.

For out of band measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
Above 960	3	500	54.0	-41.2

See Annex C.1.3 for the screenshot results

Results tables

Bande Edge

Mode	Rate	BW [MHz]	#Ch	Freq [MHz]	Antenna	RU config.	Restricted Peak Low channel	Restricted RMS Low channel	Non Restricted Peak Low channel	Restricted Peak High channel	Restricted RMS High channel	Non Restricted Peak High channel
802.11a	6	20	36	5180	SISO A	n/a	-34.21	-43.56	n/a	n/a	n/a	n/a
					SISO B	n/a	-33.67	-43.23	n/a	n/a	n/a	n/a
802.11n	HT0	20	36	5180	SISO A	n/a	-33.55	-43.21	n/a	n/a	n/a	n/a
					SISO B	n/a	-33.86	-42.13	n/a	n/a	n/a	n/a
		40	38	5190	SISO A	n/a	-38.50	-46.53	n/a	n/a	n/a	n/a
					SISO B	n/a	-36.59	-44.00	n/a	n/a	n/a	n/a
	HT8	20	36	5180	MIMO A	n/a	-40.62	-49.64	n/a	n/a	n/a	n/a
					MIMO B	n/a	-38.22	-47.79	n/a	n/a	n/a	n/a
		40	38	5190	MIMO A	n/a	-39.79	-48.27	n/a	n/a	n/a	n/a
					MIMO B	n/a	-37.96	-46.53	n/a	n/a	n/a	n/a
802.11ac	VHT0	80	42	5210	SISO A	n/a	-37.48	-44.76	n/a	n/a	n/a	n/a
					SISO B	n/a	-37.56	-45.51	n/a	n/a	n/a	n/a
					MIMO A	n/a	-38.50	-45.22	n/a	n/a	n/a	n/a
					MIMO B	n/a	-37.35	-45.32	n/a	n/a	n/a	n/a
		160	50	5250	SISO A	n/a	-39.14	-47.63	n/a	-32.60	-43.23	na
					SISO B	n/a	-39.22	-48.17	n/a	-34.80	-45.43	na
					MIMO A	n/a	-39.05	-48.15	n/a	-34.30	-45.04	na
					MIMO B	n/a	-38.35	-48.03	n/a	-36.36	-46.02	na
802.11ax	HE0	20	36	5180	SISO A	FullBW	-33.96	-43.55	n/a	n/a	n/a	n/a
						26/0	-43.31	-51.83	n/a	n/a	n/a	n/a
						52/37	-43.28	-50.97	n/a	n/a	n/a	n/a
						106/53	-35.81	-46.30	n/a	n/a	n/a	n/a
					SISO B	FullBW	-34.43	-43.12	n/a	n/a	n/a	n/a
						26/0	-44.15	-53.06	n/a	n/a	n/a	n/a
						52/37	-41.86	-50.77	n/a	n/a	n/a	n/a
						106/53	-38.11	-47.88	n/a	n/a	n/a	n/a
					MIMO A	FullBW	-41.17	-49.81	n/a	n/a	n/a	n/a
						26/0	-43.70	-52.61	n/a	n/a	n/a	n/a
						52/37	-44.53	-52.49	n/a	n/a	n/a	n/a
						106/53	-42.18	-50.53	n/a	n/a	n/a	n/a
					MIMO B	FullBW	-38.40	-47.71	n/a	n/a	n/a	n/a
						26/0	-43.95	-53.91	n/a	n/a	n/a	n/a
						52/37	-42.33	-52.94	n/a	n/a	n/a	n/a
						106/53	-40.55	-51.22	n/a	n/a	n/a	n/a
		40	38	5190	SISO A	FullBW	-38.71	-46.34	n/a	n/a	n/a	n/a
						242/61	-37.89	-46.61	n/a	n/a	n/a	n/a
					SISO B	FullBW	-40.79	-46.28	n/a	n/a	n/a	n/a
						242/61	-38.08	-46.52	n/a	n/a	n/a	n/a
					MIMO A	FullBW	-39.30	-48.64	n/a	n/a	n/a	n/a
						242/61	-40.22	-48.72	n/a	n/a	n/a	n/a
					MIMO B	FullBW	-36.53	-45.11	n/a	n/a	n/a	n/a
						242/61	-39.61	-47.54	n/a	n/a	n/a	n/a
					SISO A	FullBW	-36.53	-44.13	n/a	n/a	n/a	n/a
						484/65	-34.95	-43.31	n/a	n/a	n/a	n/a
						FullBW	-37.18	-45.65	n/a	n/a	n/a	n/a
						484/65	-33.88	-42.69	n/a	n/a	n/a	n/a
		80	42	5210	SISO B	FullBW	-37.05	-45.21	n/a	n/a	n/a	n/a
						484/65	-39.82	-48.40	n/a	n/a	n/a	n/a
					MIMO A	FullBW	-35.80	-45.29	n/a	n/a	n/a	n/a
						484/65	-37.72	-46.55	n/a	n/a	n/a	n/a
					SISO A	FullBW	-39.53	-47.57	n/a	-34.69	-44.40	n/a
						996/67	-37.85	-45.42	n/a	-38.29	-48.13	n/a
						996/S67	-43.05	-52.11	n/a	-35.15	-43.96	n/a
						FullBW	-39.07	-48.97	n/a	-34.42	-44.47	n/a
					SISO B	996/67	-33.75	-43.20	n/a	-39.80	-49.31	n/a
						996/S67	-43.26	-51.88	n/a	-34.43	-43.40	n/a
						FullBW	-39.45	-48.07	n/a	-34.89	-44.73	n/a
		160	50	5250	MIMO A	996/67	-35.97	-45.11	n/a	-42.01	-50.70	n/a
						996/S67	-44.02	-52.90	n/a	-35.57	-45.03	n/a
					MIMO B	FullBW	-40.29	-47.83	n/a	-37.84	-47.66	n/a
						996/67	-36.07	-44.67	n/a	-42.87	-51.35	n/a
						996/S67	-44.38	-52.61	n/a	-38.06	-47.55	n/a

B.2.4 Radiated spurious emission

Standard references

FCC part	Limits																																
15.407 (b) (1)	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.																																
15.209	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>0.009-0.490</td><td>2400/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/f(kHz)</td><td>-</td><td>300</td></tr><tr><td>1.705-30.0</td><td>30</td><td>-</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	0.009-0.490	2400/f(kHz)	-	300	0.490-1.705	24000/f(kHz)	-	300	1.705-30.0	30	-	30	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																														
0.009-0.490	2400/f(kHz)	-	300																														
0.490-1.705	24000/f(kHz)	-	300																														
1.705-30.0	30	-	30																														
30-88	100	40	3																														
88-216	150	43.5	3																														
216-960	200	46	3																														
Above 960	500	54	3																														

Test procedure

The radiated setup shown in section *Test & System Description* was used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used. The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the section B.1 and using the low, middle and high channels.

For 802.11ax20, 802.11ax40, 802.11ax80 and 802.11ax160 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).

For 802.11n20, 802.11n40, 802.11ac80 and 802.11ac160 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on 802.11ax20, 802.11ax40, 802.11ax80 and 802.11ax160 is used to perform the test in chain A, B ,and A+B modes.

Test Results

Radiated spurious - 30 MHz – 1 GHz

Radiated Spurious – All modes

Frequency	Quasi-Peak	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dB	---
965.3	39.8	54.0	14.2	H

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

802.11a

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2967.5	57.8	---	68.2	10.4	H
17977.8	---	42.0	54.0	12.0	H
17980.2	53.7	---	74.0	20.3	H
39583.9	55.4	---	74.0	18.6	H
39624.4	---	44.8	54.0	9.2	V

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2919.5	57.6	---	68.2	10.6	H
10400.1	48.1	---	68.2	20.1	V
39650.4	---	45.6	54.0	8.4	V
39668.8	55.9	---	74.0	18.1	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2931.0	57.3	---	68.2	10.9	V
10479.8	47.9	---	68.2	20.3	H
39608.0	55.8	---	74.0	18.2	V
39634.5	---	45.1	54.0	8.9	V

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain B
Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2944.5	57.8	---	68.2	10.4	V
10360.0	48.4	---	68.2	19.8	V
39383.8	---	44.8	54.0	9.2	V
39394.4	54.2	---	74.0	19.8	H

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2987.0	57.5	---	68.2	10.7	V
10399.6	48.6	---	68.2	19.6	V
39630.7	56.5	---	74.0	17.5	H
39637.9	---	45.0	54.0	9.0	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2941.5	57.4	---	68.2	10.8	V
10479.8	47.1	---	68.2	21.1	V
39542.0	55.8	---	74.0	18.2	H
39676.5	---	45.2	54.0	8.8	H

802.11n

1 GHz – 40 GHz, 802.11n20, HT0, Chain A

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2824.5	56.8	---	74.0	17.2	H
2825.5	---	45.2	54.0	8.8	H
10479.8	48.6	---	68.2	19.6	H
39648.5	56.3	---	74.0	17.7	H
39700.6	---	45.0	54.0	9.0	H

1 GHz – 40 GHz, 802.11n20, HT0, Chain B

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2841.0	57.8	---	74.0	16.2	V
2842.5	---	45.5	54.0	8.5	H
10480.3	47.3	---	68.2	20.9	V
39507.7	56.4	---	74.0	17.6	V
39623.4	---	45.1	54.0	8.9	V

1 GHz – 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.2	---	68.2	12.0	V
10480.3	49.0	---	68.2	19.2	H
39619.6	---	44.7	54.0	9.3	H
39655.8	56.2	---	74.0	17.8	V

1 GHz – 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2835.5	57.9	---	74.0	16.1	V
2838.5	---	45.0	54.0	9.0	V
10460.0	46.0	---	68.2	22.2	V
39647.6	---	44.7	54.0	9.3	V
39648.5	56.2	---	74.0	17.8	V

1 GHz – 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2836.0	57.8	---	74.0	16.2	V
2838.0	---	45.5	54.0	8.5	V
17983.6	51.7	---	74.0	22.3	V
17983.6	---	41.2	54.0	12.8	H
39664.4	55.7	---	74.0	18.3	H
39724.2	---	45.4	54.0	8.7	H

1 GHz – 40 GHz, 802.11n40, HT8, Chain A+B

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	57.0	---	68.2	11.2	H
10460.0	47.3	---	68.2	20.9	H
39583.4	55.6	---	74.0	18.4	H
39660.6	---	44.8	54.0	9.2	V

802.11ac

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2968.5	57.8	---	68.2	10.4	V
10419.9	48.6	---	68.2	19.6	V
39510.6	56.0	---	74.0	18.0	H
39646.1	---	44.7	54.0	9.3	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain B

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2946.5	57.6	---	68.2	10.6	V
10420.4	47.3	---	68.2	20.9	V
39494.7	55.2	---	74.0	18.8	H
39656.7	---	44.5	54.0	9.5	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A+B

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3370.5	59.2	---	68.2	9.0	V
10416.5	48.0	---	68.2	20.2	H
39497.6	56.1	---	74.0	17.9	V
39596.4	---	45.1	54.0	8.9	H

1 GHz – 40 GHz, 802.11ac160, VHT0, Chain A

Radiated Spurious – CH50

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	57.0	---	68.2	11.2	V
17477.5	50.6	---	68.2	17.6	V
39634.5	55.7	---	74.0	18.3	V
39655.8	---	45.0	54.0	9.0	V

1 GHz – 40 GHz, 802.11ac160, VHT0, Chain B

Radiated Spurious – CH50

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2849.5	---	45.2	54.0	8.8	H
2850.5	57.5	---	74.0	16.5	H
17966.2	---	40.1	54.0	13.9	H
17966.2	52.7	---	74.0	21.3	H
39553.5	55.4	---	74.0	18.6	V
39555.0	---	44.8	54.0	9.2	V

1 GHz – 40 GHz, 802.11ac160, VHT0, Chain A+B

Radiated Spurious – CH50

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3383.0	58.5	---	68.2	9.7	V
17027.0	50.6	---	68.2	17.6	H
39473.0	---	44.8	54.0	9.2	H
39567.5	55.8	---	74.0	18.2	V

802.11ax

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A

Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2821.0	57.9	---	74.0	16.1	H
2822.5	---	45.2	54.0	8.8	V
10343.0	48.7	---	68.2	19.5	V
15514.2	---	41.0	54.0	13.1	V
155147.0	49.8	---	74.0	24.2	V
39655.3	55.6	---	74.0	18.4	V
39662.0	---	45.1	54.0	8.9	H

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2840.5	---	45.5	54.0	8.5	H
2840.5	57.9	---	74.0	16.1	V
10384.1	51.6	---	68.2	16.6	V
15574.6	50.6	---	74.0	23.4	V
15574.6	---	39.9	54.0	13.3	V
39604.6	55.7	---	74.0	18.3	V
39642.2	---	45.1	54.0	8.9	V

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2783.0	58.4	---	74.0	15.6	H
2785.5	---	45.6	54.0	8.4	H
10464.4	49.7	---	68.2	18.5	H
15695.5	50.5	---	74.0	23.5	V
15695.5	---	42.1	54.0	11.9	V
39477.8	56.0	---	74.0	18.0	V
39581.0	---	44.8	54.0	9.2	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain B

Radiated Spurious – CH36

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2829.5	---	45.2	54.0	8.8	H
2829.5	57.7	---	74.0	16.3	H
10342.1	51.7	---	68.2	16.5	V
15514.7	50.8	---	74.0	23.2	V
15514.7	---	40.0	54.0	12.3	V
39652.4	55.9	---	74.0	18.1	V
39807.1	---	44.6	54.0	9.4	H

Radiated Spurious – CH40

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2777.0	58.4	---	74.0	15.6	H
2779.0	---	45.2	54.0	8.8	V
10382.7	50.9	---	68.2	17.3	V
15575.1	51.2	---	74.0	22.8	H
15575.1	---	40.0	54.0	12.0	H
39517.9	---	45.1	54.0	8.9	V
39556.9	55.8	---	74.0	18.2	H

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2851.5	58.2	---	74.0	15.8	H
2852.0	---	45.3	54.0	8.7	H
10463.4	49.6	---	68.2	18.6	V
15695.5	51.1	---	74.0	22.9	H
15695.5	---	40.8	54.0	11.5	H
39480.7	55.5	---	74.0	18.5	H
39523.6	---	45.0	54.0	9.0	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A+B

Radiated Spurious – CH48

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.3	---	68.2	11.9	H
10463.9	51.6	---	68.2	16.6	H
10475.0	47.0	---	68.2	21.2	H
15694.5	---	40.9	54.0	13.1	V
15695.5	51.0	---	74.0	23.0	V
20924.9	46.5	---	74.0	27.5	H
20925.9	---	35.6	54.0	18.4	H
32199.9	50.1	---	68.2	18.1	H

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A

Radiated Spurious – CH38F

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2970.0	57.8	---	68.2	10.4	V
10344.0	49.9	---	68.2	18.3	V
15515.7	49.4	---	74.0	24.6	V
15515.7	---	39.9	54.0	14.1	V
39671.7	55.5	---	74.0	18.5	H
39675.0	---	44.7	54.0	9.3	H

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2997.0	57.6	---	68.2	10.6	V
10424.7	50.4	---	68.2	17.9	V
15635.5	48.8	---	74.0	25.2	V
15635.5	---	39.2	54.0	14.8	V
39620.6	56.2	---	74.0	17.8	H
39653.3	---	45.4	54.0	8.6	H

1 GHz – 40 GHz, 802.11ax40, HE0, Chain B

Radiated Spurious – CH38

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2992.0	57.8	---	68.2	10.4	H
10343.5	51.3	---	68.2	16.9	V
15516.6	49.9	---	74.0	24.1	H
15516.6	---	39.6	54.0	12.2	V
39599.8	55.7	---	74.0	18.3	H
39606.6	---	44.6	54.0	9.4	V

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2885.5	57.5	---	74.0	16.6	H
2888.5	---	45.1	54.0	8.9	H
10424.2	50.1	---	68.2	18.1	V
15636.5	50.5	---	74.0	23.5	H
15636.5	---	40.2	54.0	12.1	H
39629.2	55.9	---	74.0	18.1	H
39630.2	---	45.1	54.0	8.9	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A+B

Radiated Spurious – CH46

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	57.0	---	68.2	11.2	H
6518.4	47.3	---	68.2	20.9	H
10424.2	53.5	---	68.2	14.7	H
15636.0	---	39.5	54.0	14.5	V

15636.5	49.3	---	74.0	24.7	V
20847.0	---	36.0	54.0	18.0	H
20847.5	47.1	---	74.0	26.9	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2829.5	58.3	---	74.0	15.7	H
2831.0	---	45.2	54.0	8.8	H
6469.6	47.4	---	68.2	20.8	H
10345.5	50.1	---	68.2	18.1	V
15515.7	49.3	---	74.0	24.7	V
15515.7	---	41.5	54.0	12.5	V
39601.8	55.3	---	74.0	18.7	H
39658.2	---	44.8	54.0	9.2	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain B

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3874.5	---	41.2	54.0	12.8	V
3874.5	51.0	---	74.0	23.0	V
10345.0	51.1	---	68.2	17.1	V
15516.1	50.5	---	74.0	23.5	H
15516.1	---	41.8	54.0	12.2	H
24250.8	48.3	---	68.2	19.9	H
39636.0	55.4	---	74.0	18.6	V
39637.4	---	45.2	54.0	8.8	H

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A+B

Radiated Spurious – CH42

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.6	---	68.2	11.6	H
6470.1	47.5	---	68.2	20.8	H
10344.0	56.4	---	68.2	11.8	H
10368.6	49.7	---	68.2	18.5	H
15516.6	---	39.1	54.0	14.8	V
15516.6	49.3	---	74.0	24.7	V
20686.9	---	36.1	54.0	17.9	V
20688.8	47.5	---	74.0	26.5	V

1 GHz – 40 GHz, 802.11ax160, HE0, Chain A

Radiated Spurious – CH50

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3868.9	50.2	---	74.0	23.8	V
3868.9	---	41.0	54.0	13.0	V
6473.9	47.5	---	68.2	20.8	H
10343.5	49.0	---	68.2	19.2	V
10420.4	47.6	---	68.2	20.6	H
15516.1	49.6	---	74.0	24.4	V
15516.1	---	46.3	54.0	13.7	V
39655.3	55.5	---	74.0	18.5	V
39660.1	---	44.7	54.0	9.3	V

1 GHz – 40 GHz, 802.11ax160, HE0, Chain B

Radiated Spurious – CH50

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3869.2	---	42.5	54.0	11.5	V
3869.2	51.5	---	74.0	22.6	V
10345.5	50.8	---	68.2	17.4	V
15515.7	51.1	---	74.0	22.9	H
15515.7	---	44.2	54.0	9.8	H
39488.4	---	44.9	54.0	9.2	V
39498.6	55.6	---	74.0	18.4	H

1 GHz – 40 GHz, 802.11ax160, HE0, Chain A+B

Radiated Spurious – CH50

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3869.4	53.5	---	74.0	20.5	V
3869.4	---	44.2	54.0	9.8	V
6473.5	48.3	---	68.2	19.9	H
6512.1	46.9	---	68.2	21.4	V
10345.0	57.1	---	68.2	11.1	H
10428.1	47.5	---	68.2	20.7	H
15516.1	---	39.3	54.0	14.7	V
15517.1	48.4	---	74.0	25.6	V
20688.8	---	36.1	54.0	17.9	V
20694.0	47.7	---	74.0	26.3	H

B.3 Test Results Tables U-NII-2A

B.3.1 26dB & 99% Bandwidth

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure the 26dB & 99% Bandwidth. The antenna terminal of the EUT is connected to the spectrum through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

See Annex C.1.1 for the screenshot results

Results tables

Mode	Rate	Antenna	Channel	Freq [MHz]	26dB BW [MHz]	99% BW [MHz]
802.11a	6Mbps	SISO A	52	5260	24.50	16.68
			56	5280	24.00	16.60
			64	5320	24.10	16.72
		SISO B	52	5260	23.60	16.68
			56	5280	24.10	16.60
			64	5320	23.65	16.68
802.11n20	HT0	SISO A	52	5260	24.45	17.84
			56	5280	25.05	17.80
			64	5320	24.50	17.84
		SISO B	52	5260	24.55	17.72
			56	5280	24.35	17.80
			64	5320	24.05	17.76
	HT8	MIMO A	52	5260	25.65	17.80
			56	5280	24.65	17.84
			64	5320	24.15	17.72
		MIMO B	52	5260	24.25	17.72
			56	5280	23.45	17.72
			64	5320	24.00	17.84
802.11n40	HT0	SISO A	54	5270	45.72	36.32
			62	5310	42.84	36.16
		SISO B	54	5270	45.63	36.24
			62	5310	43.47	36.16
	HT8	MIMO A	54	5270	44.55	36.24
			62	5310	42.75	36.08
		MIMO B	54	5270	42.66	35.92
			62	5310	42.66	36.08
802.11ac80	VHT0	SISO A	58	5290	87.78	75.00
		SISO B			85.69	75.00
		MIMO A			87.02	75.00
		MIMO B			85.31	75.00

Max Value

Mode	Rate	Antenna	Channel	Freq [MHz]	RU config.	26dB BW [MHz]	99% BW [MHz]
802.11ax20	HE0	SISO A	52	5260	Full	25.05	18.92
			56	5280	Full	24.25	18.88
			64	5320	Full	24.10	19.00
					26/8	21.10	18.44
					52/40	22.00	18.16
					106/54	23.35	17.56
		SISO B	52	5260	Full	24.35	18.92
			56	5280	Full	24.15	18.92
			64	5320	Full	23.90	19.04
					26/8	21.20	18.80
					52/40	22.10	18.52
					106/54	23.40	17.88
		MIMO A	52	5260	Full	25.30	18.92
			56	5280	Full	24.95	19.00
			64	5320	Full	24.10	18.88
					26/8	21.20	18.60
					52/40	22.55	18.36
					106/54	23.35	18.36
		MIMO B	52	5260	Full	23.55	18.92
			56	5280	Full	23.30	18.84
			64	5320	Full	23.90	18.92
					26/8	21.00	18.56
					52/40	22.10	18.52
					106/54	23.70	18.16
802.11ax40	HE0	SISO A	54	5270	Full	44.64	37.52
			62	5310	Full	43.02	37.44
					242/62	24.75	18.80
		SISO B	54	5270	Full	43.02	37.68
			62	5310	Full	42.57	37.44
					242/62	24.21	18.80
		MIMO A	54	5270	Full	43.83	37.68
			62	5310	Full	42.75	37.68
					242/62	24.57	18.80
		MIMO B	54	5270	Full	43.29	37.52
			62	5310	Full	42.75	37.76
					242/62	24.57	18.96
802.11ax80	HE0	SISO A	58	5290	Full	84.17	76.68
					484/66	43.32	37.44
		SISO B			Full	85.31	76.56
					484/66	43.13	37.32
		MIMO A			Full	84.36	76.80
					484/66	43.13	37.56
		MIMO B			Full	83.03	76.68
					484/66	48.83	37.56

Max Value

B.3.2 Power Limits. Maximum Output power & Maximum power spectral density

Test limits

FCC part	Limits
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.

Test procedure

The Maximum Conducted Output Power was measured using the channel integration method according to section E) 2) e) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

The maximum power spectral density (PSD) was measured using the method according to section F) (Method SA-2 Alternative) of FCC OET KDB 789033 D02

In the measure-and-sum approach for MIMO mode, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically in linear power units to determine the total emission level from the device.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

The conducted setup shown in section *Test & System Description* was used to measure the maximum conducted output power and power spectral density. The antenna terminal of the EUT is connected to the spectrum analyser through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss.

See Annex C.1.2 for the screenshot results

Results tables

Duty cycle

Mode	Rate	Antenna	Duty Cycle [%]
802.11a	6Mbps	SISO A	98.0
		SISO B	98.0
802.11n20	HT0	SISO A	98.9
		SISO B	98.9
	HT8	MIMO A	98.9
		MIMO B	98.9
802.11ax20	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.4
		MIMO B	99.4
802.11n40	HT0	SISO A	98.8
		SISO B	98.8
	HT8	MIMO A	98.7
		MIMO B	98.7
802.11ax40	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.3
		MIMO B	99.3
802.11ac80	VHT0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.4
		MIMO B	99.4
802.11ax80	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.4
		MIMO B	99.4
802.11ac160	VTH0	SISO A	98.8
		SISO B	98.8
		MIMO A	99.1
		MIMO B	99.1
802.11ax160	HE0	SISO A	98.8
		SISO B	98.8
		MIMO A	98.9
		MIMO B	98.9

Maximum output power

Mode	Rate	Channel	Freq [MHz]	Antenna	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11a	6Mbps	52	5260	SISO A	20.99	20.99	25.99	125.60
				SISO B	20.85	20.85	25.85	121.62
		56	5280	SISO A	20.82	20.82	25.82	120.78
				SISO B	20.85	20.85	25.85	121.62
		64	5320	SISO A	19.31	19.31	24.31	85.31
				SISO B	19.51	19.51	24.51	89.33
802.11n20	HT0	52	5260	SISO A	20.90	20.90	25.90	123.03
				SISO B	20.96	20.96	25.96	124.74
		56	5280	SISO A	21.02	21.02	26.02	126.47
				SISO B	20.94	20.94	25.94	124.17
		64	5320	SISO A	19.27	19.27	24.27	84.53
				SISO B	19.37	19.37	24.37	86.50
	HT8	52	5260	MIMO A	18.68	18.68	23.68	73.79
				MIMO B	18.88	18.88	23.88	77.27
				Combined A+B	21.79	21.79	26.79	151.06
		56	5280	MIMO A	18.82	18.82	23.82	76.21
				MIMO B	18.94	18.94	23.94	78.34
				Combined A+B	21.89	21.89	26.89	154.55
		64	5320	MIMO A	17.64	17.64	22.64	58.08
				MIMO B	17.84	17.84	22.84	60.81
				Combined A+B	20.75	20.75	25.75	118.89
802.11n40	HT0	54	5270	SISO A	21.08	21.08	26.08	128.23
				SISO B	21.20	21.20	26.20	131.83
		62	5310	SISO A	16.76	16.76	21.76	47.42
				SISO B	16.63	16.63	21.63	46.03
	HT8	54	5270	MIMO A	18.74	18.74	23.74	74.82
				MIMO B	18.82	18.82	23.82	76.21
				Combined A+B	21.79	21.79	26.79	151.02
		62	5310	MIMO A	14.90	14.90	19.90	30.90
				MIMO B	15.43	15.43	20.43	34.91
				Combined A+B	18.18	18.18	23.18	65.82
802.11ac80	VHT0	58	5290	SISO A	17.55	17.55	22.55	56.89
				SISO B	16.93	16.93	21.93	49.32
				MIMO A	15.40	15.40	20.40	34.67
				MIMO B	15.67	15.67	20.67	36.90
				Combined A+B	18.55	18.55	23.55	71.57
802.11ac160	VHT0	50	5250	SISO A	15.00	15.00	20.00	31.62
				SISO B	14.48	14.48	19.48	28.05
				MIMO A	13.29	13.29	18.29	21.33
				MIMO B	13.41	13.41	18.41	21.93
				Combined A+B	16.36	16.36	21.36	43.26

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max Value

Min Value

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Output Power [dBm]	Avg Max* Conducted Output Power [dBm]	Avg Max* EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11ax20	HE0	52	5260	SISO A	Full	21.05	21.05	26.05	127.35
				SISO B	Full	20.89	20.89	25.89	122.74
				MIMO A	Full	18.96	18.96	23.96	78.70
				MIMO B	Full	19.07	19.07	24.07	80.72
				Combined A+B	Full	22.03	22.03	27.03	159.43
		56	5280	SISO A	Full	20.90	20.90	25.90	123.03
				SISO B	Full	20.86	20.86	25.86	121.90
				MIMO A	Full	19.07	19.07	24.07	80.72
				MIMO B	Full	19.10	19.10	24.10	81.28
				Combined A+B	Full	22.10	22.10	27.10	162.01
		64	5320	SISO A	Full	19.14	19.14	24.14	82.04
					26/8	13.55	13.55	18.55	22.65
					52/40	16.74	16.74	21.74	47.21
					106/54	18.85	18.85	23.85	76.74
				SISO B	Full	19.47	19.47	24.47	88.51
					26/8	13.76	13.76	18.76	23.77
					52/40	16.63	16.63	21.63	46.03
					106/54	19.67	19.67	24.67	92.68
				MIMO A	Full	17.80	17.80	22.80	60.26
					26/8	10.54	10.54	15.54	11.32
					52/40	13.50	13.50	18.50	22.39
					106/54	15.86	15.86	20.86	38.55
				MIMO B	Full	17.62	17.62	22.62	57.81
					26/8	10.69	10.69	15.69	11.72
					52/40	13.70	13.70	18.70	23.44
					106/54	15.98	15.98	20.98	39.63
				Combined A+B	Full	20.72	20.72	25.72	118.07
					26/8	13.63	13.63	18.63	23.05
					52/40	16.61	16.61	21.61	45.83
					106/54	18.93	18.93	23.93	78.18
802.11ax40	HE0	54	5270	SISO A	Full	21.09	21.09	26.09	128.53
				SISO B	Full	20.91	20.91	25.91	123.31
				MIMO A	Full	18.71	18.71	23.71	74.30
				MIMO B	Full	18.83	18.83	23.83	76.38
				Combined A+B	Full	21.78	21.78	26.78	150.69
		62	5310	SISO A	Full	16.73	16.73	21.73	47.10
					242/62	19.18	19.18	24.18	82.79
				SISO B	Full	16.37	16.37	21.37	43.35
					242/62	19.07	19.07	24.07	80.72
				MIMO A	Full	14.93	14.93	19.93	31.12
					242/62	17.85	17.85	22.85	60.95
				MIMO B	Full	15.47	15.47	20.47	35.24
					242/62	17.56	17.56	22.56	57.02
				Combined A+B	Full	18.22	18.22	23.22	66.35
					242/62	20.72	20.72	25.72	117.97
802.11ax80	HE0	58	5290	SISO A	Full	17.49	17.49	22.49	56.10
					484/66	15.15	15.15	20.15	32.73
				SISO B	Full	16.87	16.87	21.87	48.64
					484/66	15.26	15.26	20.26	33.57
				MIMO A	Full	15.51	15.51	20.51	35.56
					484/66	13.26	13.26	18.26	21.18
				MIMO B	Full	15.27	15.27	20.27	33.65
					484/66	13.12	13.12	18.12	20.51
				Combined A+B	Full	18.40	18.40	23.40	69.21
					484/66	16.20	16.20	21.20	41.70

Mode	Rate	Channel	Freq [MHz]	Antenna	RU config.	Average Conducted Ouput Power [dBm]	Avg Max* Conducted Ouput Power [dBm]	Avg Max*. EIRP [dBm]	Avg Max* Conducted Power [mW]
802.11ax160	HE0	50	5250	SISO A	Full	15.02	15.02	20.02	31.77
					996/67	17.11	17.11	22.11	51.40
					996/S67	15.78	15.78	20.78	37.84
				SISO B	Full	14.67	14.67	19.67	29.31
					996/67	16.93	16.93	21.93	49.32
					996/S67	16.06	16.06	21.06	40.36
				MIMO A	Full	13.68	13.68	18.68	23.33
					996/67	15.22	15.22	20.22	33.27
					996/S67	14.92	14.92	19.92	31.05
				MIMO B	Full	13.31	13.31	18.31	21.43
					996/67	14.77	14.77	19.77	29.99
					996/S67	14.77	14.77	19.77	29.99
				Combined A+B	Full	16.51	16.51	21.51	44.76
					996/67	18.01	18.01	23.01	63.26
					996/S67	17.86	17.86	22.86	61.04

*Maximum values are the duty cycle compensated values calculated from the average (measured) values

Max/Min Value

Maximum Power Spectral Density (PSD)

Mode	Rate	Channel	Freq [MHz]	Antenna	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11a	6Mbps	52	5260	SISO A	10.20	10.20
				SISO B	10.06	10.06
		56	5280	SISO A	10.03	10.03
				SISO B	10.05	10.05
		64	5320	SISO A	8.49	8.49
				SISO B	8.69	8.69
802.11n20	HT0	52	5260	SISO A	9.92	9.92
				SISO B	9.97	9.97
		56	5280	SISO A	10.03	10.03
				SISO B	9.93	9.93
		64	5320	SISO A	8.25	8.25
				SISO B	8.34	8.34
	HT8	52	5260	MIMO A	7.68	7.68
				MIMO B	7.87	7.87
				Combined A+B	10.79	10.79
		56	5280	MIMO A	7.83	7.83
				MIMO B	7.96	7.96
				Combined A+B	10.91	10.91
		64	5320	MIMO A	6.64	6.64
				MIMO B	6.85	6.85
				Combined A+B	9.76	9.76
802.11n40	HT0	54	5270	SISO A	6.61	6.61
				SISO B	6.75	6.75
		62	5310	SISO A	2.38	2.38
				SISO B	2.17	2.17
	HT8	54	5270	MIMO A	4.29	4.29
				MIMO B	4.40	4.40
				Combined A+B	7.36	7.36
		62	5310	MIMO A	0.46	0.46
				MIMO B	1.01	1.01
				Combined A+B	3.75	3.75
802.11ac80	VHT0	58	5290	SISO A	0.14	0.14
				SISO B	-0.50	-0.50
				MIMO A	-2.01	-2.01
				MIMO B	-1.80	-1.80
				Combined A+B	1.11	1.11
802.11ac160	VHT0	50	5250	SISO A	-5.32	-5.32
				SISO B	-5.80	-5.80
				MIMO A	-7.03	-7.03
				MIMO B	-6.93	-6.93
				Combined A+B	-3.97	-3.97

* Maximum values are the duty cycle compensated values calculated from the measured average values

Mode	Rate	#Ch	Freq [MHz]	Antenna	RU config.	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11ax20	HE0	52	5260	SISO A	Full	9.87	9.87
				SISO B	Full	9.68	9.68
				MIMO A	Full	7.75	7.75
				MIMO B	Full	7.86	7.86
				Combined A+B	Full	10.82	10.82
		56	5280	SISO A	Full	9.71	9.71
				SISO B	Full	9.67	9.67
				MIMO A	Full	7.87	7.87
				MIMO B	Full	7.92	7.92
				Combined A+B	Full	10.91	10.91
		64	5320	SISO A	Full	7.92	7.92
					26/8	10.73	10.73
					52/40	10.97	10.97
					106/54	10.02	10.02
				SISO B	Full	8.25	8.25
					26/8	10.91	10.91
					52/40	10.95	10.95
					106/54	10.85	10.85
				MIMO A	Full	6.63	6.63
					26/8	7.71	7.71
					52/40	7.74	7.74
					106/54	7.08	7.08
				MIMO B	Full	6.40	6.40
					26/8	7.85	7.85
					52/40	7.93	7.93
					106/54	7.21	7.21
				Combined A+B	Full	9.53	9.53
					26/8	10.79	10.79
					52/40	10.85	10.85
					106/54	10.16	10.16
802.11ax40	HE0	54	5270	SISO A	Full	6.47	6.47
				SISO B	Full	6.27	6.27
				MIMO A	Full	4.11	4.11
				MIMO B	Full	4.20	4.20
				Combined A+B	Full	7.17	7.17
		62	5310	SISO A	Full	2.09	2.09
					242/62	7.86	7.86
				SISO B	Full	1.74	1.74
					242/62	7.75	7.75
				MIMO A	Full	0.32	0.32
					242/62	6.52	6.52
				MIMO B	Full	0.90	0.90
					242/62	6.26	6.26
				Combined A+B	Full	3.63	3.63
					242/62	9.40	9.40
802.11ax80	HE0	58	5290	SISO A	Full	-0.10	-0.10
					484/66	0.55	0.55
				SISO B	Full	-0.69	-0.69
					484/66	0.61	0.61
				MIMO A	Full	-2.04	-2.04
					484/66	-1.38	-1.38
				MIMO B	Full	-2.30	-2.30
					484/66	-1.55	-1.55
				Combined A+B	Full	0.84	0.84
					484/66	1.55	1.55

Mode	Rate	#Ch	Freq [MHz]	Antenna	RU config.	Average conducted PSD [dBm/MHz]	Maximum* conducted PSD [dBm/MHz]
802.11ax160	HE0	50	5250	SISO A	Full	-5.48	-5.48
					996/67	-0.38	-0.38
					996/S67	-1.73	-1.73
				SISO B	Full	-5.80	-5.80
					996/67	-0.59	-0.59
					996/S67	1.44	1.44
				MIMO A	Full	-6.80	-6.80
					996/67	-2.28	-2.28
					996/S67	-2.61	-2.61
				MIMO B	Full	-7.12	-7.12
					996/67	-2.76	-2.76
					996/S67	-2.72	-2.72
				Combined A+B	Full	-3.95	-3.95
					996/67	0.50	0.50
					996/S67	0.35	0.35

* Maximum values are the duty cycle compensated values calculated from the measured average values

B.3.3 Undesirable emissions limits : out of band (Conducted)

Test limits

FCC part	Limits																				
15.407 (b) (2)	For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.																				
15.209	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The conducted setup shown in section *Test & System Description* was used to measure undesirable emissions on the Band Edge domain. The antenna terminal of the EUT is connected to the spectrum analyzer through an attenuator, and the spectrum analyzer reading is compensated to include the RF path loss and the declared antenna gain.

Both lower and upper side of the out of band were performed using the integration method as defined in the out of band measurements section (paragraph II.G.3.d) of 789033 D02 v02r01.

In case of out of band measurements falling in restricted bands, the declared antenna gain is also compensated in the graph.

For out of band measurements falling in restricted bands, the following limits in dBm were applied for the average detector after the conversion from the limits detailed above in dBμV/m, according to FCC 47 CFR part 15 - Subpart C – §15.209(a). The limits in dBm for peak detector are 20dB above the indicated values in the table.

§15.209(a)			Converted values	
Freq Range (MHz)	Distance (m)	Field strength (microvolts/meter)	Field strength (dB microvolts/meter)	Power (dBm)
960-25000	3	500	53.98	-41.2

See Annex C.1.3 for the screenshot results

Results tables

Band Edge

Mode	Rate	BW [MHz]	#Ch	Freq [MHz]	Antenna	RU config.	Restricted Peak Low channel	Restricted RMS Low channel	Non Restricted Peak Low channel	Restricted Peak High channel	Restricted RMS High channel	Non Restricted Peak High channel
802.11a	6	20	64	5320	SISO A	n/a	n/a	n/a	n/a	-35.60	-44.69	n/a
					SISO B	n/a	n/a	n/a	n/a	-34.41	-43.68	n/a
802.11n	HT0	20	64	5320	SISO A	n/a	n/a	n/a	n/a	-34.63	-44.05	n/a
					SISO B	n/a	n/a	n/a	n/a	-34.56	-43.71	n/a
		40	62	5310	SISO A	n/a	n/a	n/a	n/a	-36.53	-45.23	n/a
					SISO B	n/a	n/a	n/a	n/a	-37.30	-46.46	n/a
	HT8	20	64	5320	MIMO A	n/a	n/a	n/a	n/a	-38.66	-47.73	n/a
					MIMO B	n/a	n/a	n/a	n/a	-37.59	-46.96	n/a
		40	62	5310	MIMO A	n/a	n/a	n/a	n/a	-36.24	-45.23	n/a
					MIMO B	n/a	n/a	n/a	n/a	-37.55	-46.37	n/a
802.11ac	VHT0	80	58	5290	SISO A	n/a	n/a	n/a	n/a	-35.37	-44.15	n/a
					SISO B	n/a	n/a	n/a	n/a	-38.20	-46.35	n/a
					MIMO A	n/a	n/a	n/a	n/a	-35.37	-44.84	n/a
					MIMO B	n/a	n/a	n/a	n/a	-38.71	-47.75	n/a
		160	50	5250	SISO A	n/a	-39.14	-47.63	n/a	-32.60	-43.23	n/a
					SISO B	n/a	-39.22	-48.17	n/a	-34.80	-45.43	n/a
					MIMO A	n/a	-39.05	-48.15	n/a	-34.30	-45.04	n/a
					MIMO B	n/a	-38.35	-48.03	n/a	-36.36	-46.06	n/a
802.11ax	HE0	20	64	5320	SISO A	FullBW	n/a	n/a	n/a	-36.15	-45.05	n/a
						26/8	n/a	n/a	n/a	-40.30	-51.87	n/a
						52/40	n/a	n/a	n/a	-38.93	-49.40	n/a
						106/54	n/a	n/a	n/a	-36.08	-47.56	n/a
					SISO B	FullBW	n/a	n/a	n/a	-35.46	-43.80	n/a
						26/8	n/a	n/a	n/a	-41.86	-51.85	n/a
						52/40	n/a	n/a	n/a	-38.44	-50.25	n/a
						106/54	n/a	n/a	n/a	-36.99	-46.52	n/a
					MIMO A	FullBW	n/a	n/a	n/a	-36.96	-45.72	n/a
						26/8	n/a	n/a	n/a	-43.02	-52.25	n/a
						52/40	n/a	n/a	n/a	-41.44	-51.46	n/a
						106/54	n/a	n/a	n/a	-39.66	-50.02	n/a
					MIMO B	FullBW	n/a	n/a	n/a	-37.35	-46.98	n/a
						26/8	n/a	n/a	n/a	-42.62	-52.52	n/a
						52/40	n/a	n/a	n/a	-40.62	-52.21	n/a
						106/54	n/a	n/a	n/a	-38.64	-50.38	n/a
		40	62	5310	SISO A	FullBW	n/a	n/a	n/a	-37.60	-45.21	n/a
						242/62	n/a	n/a	n/a	-34.59	-44.23	n/a
					SISO B	FullBW	n/a	n/a	n/a	-38.91	-48.21	n/a
						242/62	n/a	n/a	n/a	-33.36	-44.46	n/a
					MIMO A	FullBW	n/a	n/a	n/a	-36.46	-45.72	n/a
						242/62	n/a	n/a	n/a	-38.11	-46.46	n/a
					MIMO B	FullBW	n/a	n/a	n/a	-37.72	-46.49	n/a
						242/62	n/a	n/a	n/a	-38.62	-47.89	n/a
		80	58	5290	SISO A	FullBW	n/a	n/a	n/a	-35.47	-43.81	n/a
						484/66	n/a	n/a	n/a	-31.89	-41.85	n/a
					SISO B	FullBW	n/a	n/a	n/a	-38.06	-46.01	n/a
						484/66	n/a	n/a	n/a	-33.21	-42.24	n/a
					MIMO A	FullBW	n/a	n/a	n/a	-36.98	-45.86	n/a
						484/66	n/a	n/a	n/a	-35.84	-45.80	n/a
					MIMO B	FullBW	n/a	n/a	n/a	-40.23	-48.52	n/a
						484/66	n/a	n/a	n/a	-32.29	-44.86	n/a
		160	50	5250	SISO A	FullBW	-39.53	-47.57	n/a	-34.69	-44.40	n/a
						996/67	-37.85	-45.42	n/a	-38.29	-48.13	n/a
						996/S67	-43.05	-52.11	n/a	-35.15	-43.96	n/a
					SISO B	FullBW	-39.07	-48.97	n/a	-34.42	-44.47	n/a
						996/67	-33.75	-43.20	n/a	-39.80	-49.31	n/a
						996/S67	-43.26	-51.88	n/a	-34.43	-43.40	n/a
					MIMO A	FullBW	-39.45	-48.07	n/a	-34.89	-44.73	n/a
						996/67	-35.97	-45.11	n/a	-42.01	-50.70	n/a
						996/S67	-44.02	-52.90	n/a	-35.57	-45.03	n/a
					MIMO B	FullBW	-40.29	-47.83	n/a	-37.84	-47.66	n/a
						996/67	-36.07	-44.67	n/a	-42.87	-51.35	n/a
						996/S67	-44.38	-52.61	n/a	-38.06	-47.55	n/a

B.3.4 Radiated spurious emission

Standard references

FCC part	Limits																				
15.407 (a) (2)	For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed 11 dBm in any 1 megahertz band.																				
15.209	Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a): <table><thead><tr><th>Freq Range (MHz)</th><th>Field Strength (μV/m)</th><th>Field Strength (dBμV/m)</th><th>Meas. Distance (m)</th></tr></thead><tbody><tr><td>30-88</td><td>100</td><td>40</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>43.5</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>46</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>54</td><td>3</td></tr></tbody></table> The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit specified when measuring with peak detector function, corresponding to 20 dB above the indicated values in the table.	Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)	30-88	100	40	3	88-216	150	43.5	3	216-960	200	46	3	Above 960	500	54	3
Freq Range (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Meas. Distance (m)																		
30-88	100	40	3																		
88-216	150	43.5	3																		
216-960	200	46	3																		
Above 960	500	54	3																		

Test procedure

The radiated setups shown in section *Test & System Description* were used to measure the radiated spurious emissions. Depending of the frequency range and bands being tested, different antennas and filters were used.

The final measurement is done by varying the antenna height, the EUT azimuth over 360° and for both Vertical and Horizontal polarizations.

The radiated spurious emission was measured on the worst case configuration selected from the section B.1 and using the low, middle and high channels.

For 802.11ax20, 802.11ax40, 802.11ax80 and 802.11ax160 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on chain A and B separately is used to perform the test in MIMO mode (Chain A+B).

For 802.11n20, 802.11n40, 802.11ac80 and 802.11ac160 modes the worst case in terms of spurious emissions found among the low, mid and high channels tested on 802.11ax20, 802.11ax40, 802.11ax80 and 802.11ax160 is used to perform the test in chain A, B ,and A+B modes.

Test Results

Radiated spurious - 30 MHz to 1 GHz

Frequency	Quasi-Peak	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dB	---
978.3	39.5	54.0	14.5	H

Note 1: The spurious signals detected do not depend on either the operating channel or the modulation mode.

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain A

Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	55.8	---	68.2	12.4	V
17994.2	52.1	---	74.0	21.9	H
17994.2	---	41.4	54.0	12.6	V
39693.4	---	44.8	54.0	9.2	H
39703.5	56.1	---	74.0	17.9	H

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.3	---	68.2	11.9	H
10565.9	50.9	---	68.2	17.3	H
39523.2	---	44.7	54.0	9.3	H
39523.2	56.1	---	74.0	17.9	H

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	57.1	---	68.2	11.1	V
10640.3	48.3	---	74.0	25.7	H
10640.3	---	39.3	54.0	14.7	H
39647.1	---	45.1	54.0	8.9	H
39674.6	55.5	---	74.0	18.5	V

1 GHz – 40 GHz, 802.11a, 6Mbps, Chain B

Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.8	---	68.2	11.4	V
10519.9	47.8	---	68.2	20.4	V
39472.5	56.1	---	74.0	17.9	H
39638.4	---	45.1	54.0	8.9	H

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	57.5	---	68.2	10.7	V
10558.6	49.5	---	68.2	18.7	V
39635.0	---	44.7	54.0	9.3	V
39636.9	55.6	---	74.0	18.4	H

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.4	---	68.2	11.8	H
10636.4	48.6	---	74.0	25.4	V
10636.4	---	37.9	54.0	16.1	V
39630.7	55.7	---	74.0	18.3	H
39699.1	---	44.7	54.0	9.3	V

1 GHz – 40 GHz, 802.11n20, HT0, Chain A

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2852.5	---	45.2	54.0	8.8	H
2852.5	58.1	---	74.0	15.9	V
10641.7	48.5	---	74.0	25.5	H
10641.7	---	38.7	54.0	15.3	H
39527.5	55.3	---	74.0	18.7	H
39668.8	---	45.6	54.0	8.4	H

1 GHz – 40 GHz, 802.11n20, HT0, Chain B

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
2856.0	57.4	---	74.0	16.6	H
2858.5	---	44.9	54.0	9.1	H
17976.3	51.5	---	74.0	22.4	H
17976.3	---	41.2	54.0	12.8	H
39510.1	---	44.4	54.0	9.6	V
39514.5	55.5	---	74.0	18.4	H

1 GHz – 40 GHz, 802.11n20, HT8, Chain A+B

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.2	---	68.2	12.0	H
10640.3	---	37.4	54.0	16.6	V
10644.1	48.6	---	74.0	25.4	V
39623.0	55.9	---	74.0	18.1	H
39623.4	---	44.9	54.0	9.1	H

1 GHz – 40 GHz, 802.11n40, HT0, Chain A

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2838.0	---	45.5	54.0	8.5	V
2838.0	57.9	---	74.0	16.1	V
17984.0	50.9	---	74.0	23.1	H
17984.0	---	41.1	54.0	12.9	H
39738.2	55.5	---	74.0	18.5	V
39751.7	---	44.6	54.0	9.4	V

1 GHz – 40 GHz, 802.11n40, HT0, Chain B

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2816.0	---	45.2	54.0	8.8	V
2816.0	57.8	---	74.0	16.2	V
17987.9	51.5	---	74.0	22.5	V
17987.9	---	41.4	54.0	12.6	V
39650.4	56.1	---	74.0	17.9	H
39660.1	---	44.5	54.0	9.5	H

1 GHz – 40 GHz, 802.11n40, HT8, Chain A+B

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.8	---	68.2	11.4	H
10547.5	47.2	---	68.2	21.0	V
39496.6	56.5	---	74.0	17.5	H
39498.1	---	44.6	54.0	9.4	H

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	57.1	---	68.2	11.1	V
17987.4	51.1	---	74.0	22.9	H
17987.4	---	41.6	54.0	12.4	V
39634.5	55.8	---	74.0	18.2	H
39660.6	---	44.9	54.0	9.1	V

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain B

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.2	---	68.2	11.9	V
17982.1	50.9	---	74.0	23.1	H
17982.1	---	41.4	54.0	12.6	H
39595.0	---	45.0	54.0	9.0	H
39660.1	56.4	---	74.0	17.6	H

1 GHz – 40 GHz, 802.11ac80, VHT0, Chain A+B

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3184.5	58.4	---	68.2	9.8	H
16447.0	50.1	---	68.2	18.1	V
39569.9	---	45.5	54.0	8.5	H
39584.4	55.9	---	74.0	18.1	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A

Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.2	---	68.2	11.9	V
10503.0	50.8	---	68.2	17.4	H
15754.4	49.6	---	74.0	24.4	V
15754.4	---	40.0	54.0	14.0	V
39626.3	---	44.9	54.0	9.1	H
39683.7	56.0	---	74.0	18.0	H

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2847.5	58.7	---	74.0	15.3	V
2849.5	---	45.4	54.0	8.6	H
10544.1	52.5	---	68.2	15.8	H
15814.4	48.6	---	74.0	25.4	V
15814.4	---	39.6	54.0	14.4	V
39582.5	56.3	---	74.0	17.7	H
39605.1	---	44.8	54.0	9.2	V

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2866.5	57.4	---	74.0	16.6	V
2867.5	---	45.1	54.0	8.9	V
10623.4	51.8	---	74.0	22.2	H
10623.4	---	46.2	54.0	7.8	H
15934.7	49.3	---	74.0	24.7	V
15934.7	---	46.8	54.0	7.2	V
39534.7	---	44.1	54.0	9.9	H
39534.7	55.7	---	74.0	18.3	V

1 GHz – 40 GHz, 802.11ax20, HE0, Chain B
Radiated Spurious – CH52

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.5	---	68.2	11.7	V
10503.0	50.5	---	68.2	17.7	V
15754.4	52.0	---	74.0	22.0	H
15754.4	---	43.3	54.0	10.7	H
39589.2	---	45.4	54.0	8.6	H
39642.2	56.2	---	74.0	17.8	V

Radiated Spurious – CH56

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2858.0	---	45.1	54.0	8.9	H
2858.5	58.2	---	74.0	15.8	H
10543.1	51.9	---	68.2	16.3	V
15815.3	53.8	---	74.0	20.2	H
15815.3	---	39.5	54.0	12.8	H
39634.1	---	43.9	54.0	10.1	H
39634.1	56.1	---	74.0	17.9	V

Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2841.5	58.5	---	74.0	15.5	V
2842.5	---	45.6	54.0	8.4	V
10623.9	50.6	---	74.0	23.4	V
10623.9	---	39.2	54.0	12.4	V
15934.2	49.7	---	74.0	24.3	H
15934.2	---	40.1	54.0	12.6	H
39596.4	---	44.5	54.0	9.5	V
39596.9	57.1	---	74.0	16.9	H

1 GHz – 40 GHz, 802.11ax20, HE0, Chain A+B
Radiated Spurious – CH64

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.0	---	68.2	12.2	V
10622.4	---	43.2	54.0	10.8	V
10622.4	51.6	---	74.0	22.4	V
15934.7	---	38.2	54.0	15.8	V
15935.7	49.1	---	74.0	24.9	V
22906.9	---	36.2	54.0	17.8	H
22906.9	48.6	---	74.0	25.4	H

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A
Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
2844.5	58.3	---	74.0	15.7	H
2846.0	---	45.5	54.0	8.5	H
10504.0	51.7	---	68.2	16.5	H
15755.9	50.3	---	74.0	23.7	H
15755.9	---	39.9	54.0	14.1	V

39528.5	---	44.3	54.0	9.7	H
39528.5	55.5	---	74.0	18.5	H

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.2	---	68.2	12.0	H
10583.2	52.3	---	68.2	15.9	H
15876.2	51.1	---	74.0	22.9	V
15876.2	---	43.3	54.0	10.7	V
39489.4	55.7	---	74.0	18.3	V
39494.7	---	44.4	54.0	9.6	V

1 GHz – 40 GHz, 802.11ax40, HE0, Chain B

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.4	---	68.2	11.8	H
10504.0	51.0	---	68.2	17.2	V
15755.9	51.1	---	74.0	22.9	H
15755.9	---	40.1	54.0	10.9	H
39596.9	---	44.9	54.0	9.1	H
39605.1	55.7	---	74.0	18.3	H

Radiated Spurious – CH62

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBµV/m	dBµV/m	dBµV/m	dB	---
3000.0	56.6	---	68.2	11.6	H
10583.2	51.2	---	68.2	16.7	H
15876.7	53.1	---	74.0	20.9	H
15876.7	---	40.1	54.0	9.6	H
39547.8	56.3	---	74.0	17.7	V
39568.5	---	44.7	54.0	9.3	H

1 GHz – 40 GHz, 802.11ax40, HE0, Chain A+B

Radiated Spurious – CH54

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.6	---	68.2	11.6	H
10504.5	49.8	---	68.2	18.4	V
10540.2	46.5	---	68.2	21.7	H
15755.9	---	40.1	54.0	13.9	V
15757.8	50.7	---	74.0	23.3	V
39509.2	56.0	---	74.0	18.0	H
39518.3	---	44.9	54.0	9.1	H

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.2	---	68.2	12.0	V
10505.0	50.4	---	68.2	17.8	H
15755.9	49.4	---	74.0	24.6	H
15755.9	---	39.8	54.0	14.2	V
39363.1	---	43.4	54.0	10.6	V
39391.5	54.8	---	74.0	19.2	H

1 GHz – 40 GHz, 802.11ax80, HE0, Chain B

Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.4	---	68.2	11.8	V
10503.5	50.6	---	68.2	17.6	V
15756.4	51.3	---	74.0	22.7	H
15756.4	---	42.4	54.0	11.9	H

39547.8	55.5	---	74.0	18.5	V
39562.7	---	44.6	54.0	9.4	V

1 GHz – 40 GHz, 802.11ax80, HE0, Chain A+B


Radiated Spurious – CH58

Frequency	MaxPeak	Average	Limit	Margin	Polar
MHz	dBμV/m	dBμV/m	dBμV/m	dB	---
3000.0	56.8	---	68.2	11.4	V
6568.7	47.2	---	68.2	21.0	H
10503.5	49.9	---	68.2	18.3	V
15754.9	50.1	---	74.0	23.9	V
15755.9	---	40.6	54.0	13.4	V
39504.8	56.1	---	74.0	17.9	V
39508.2	---	44.8	54.0	9.2	H


Annex C. System Plots

C.1.1 26dB and 99% bandwidth

U-NII-1

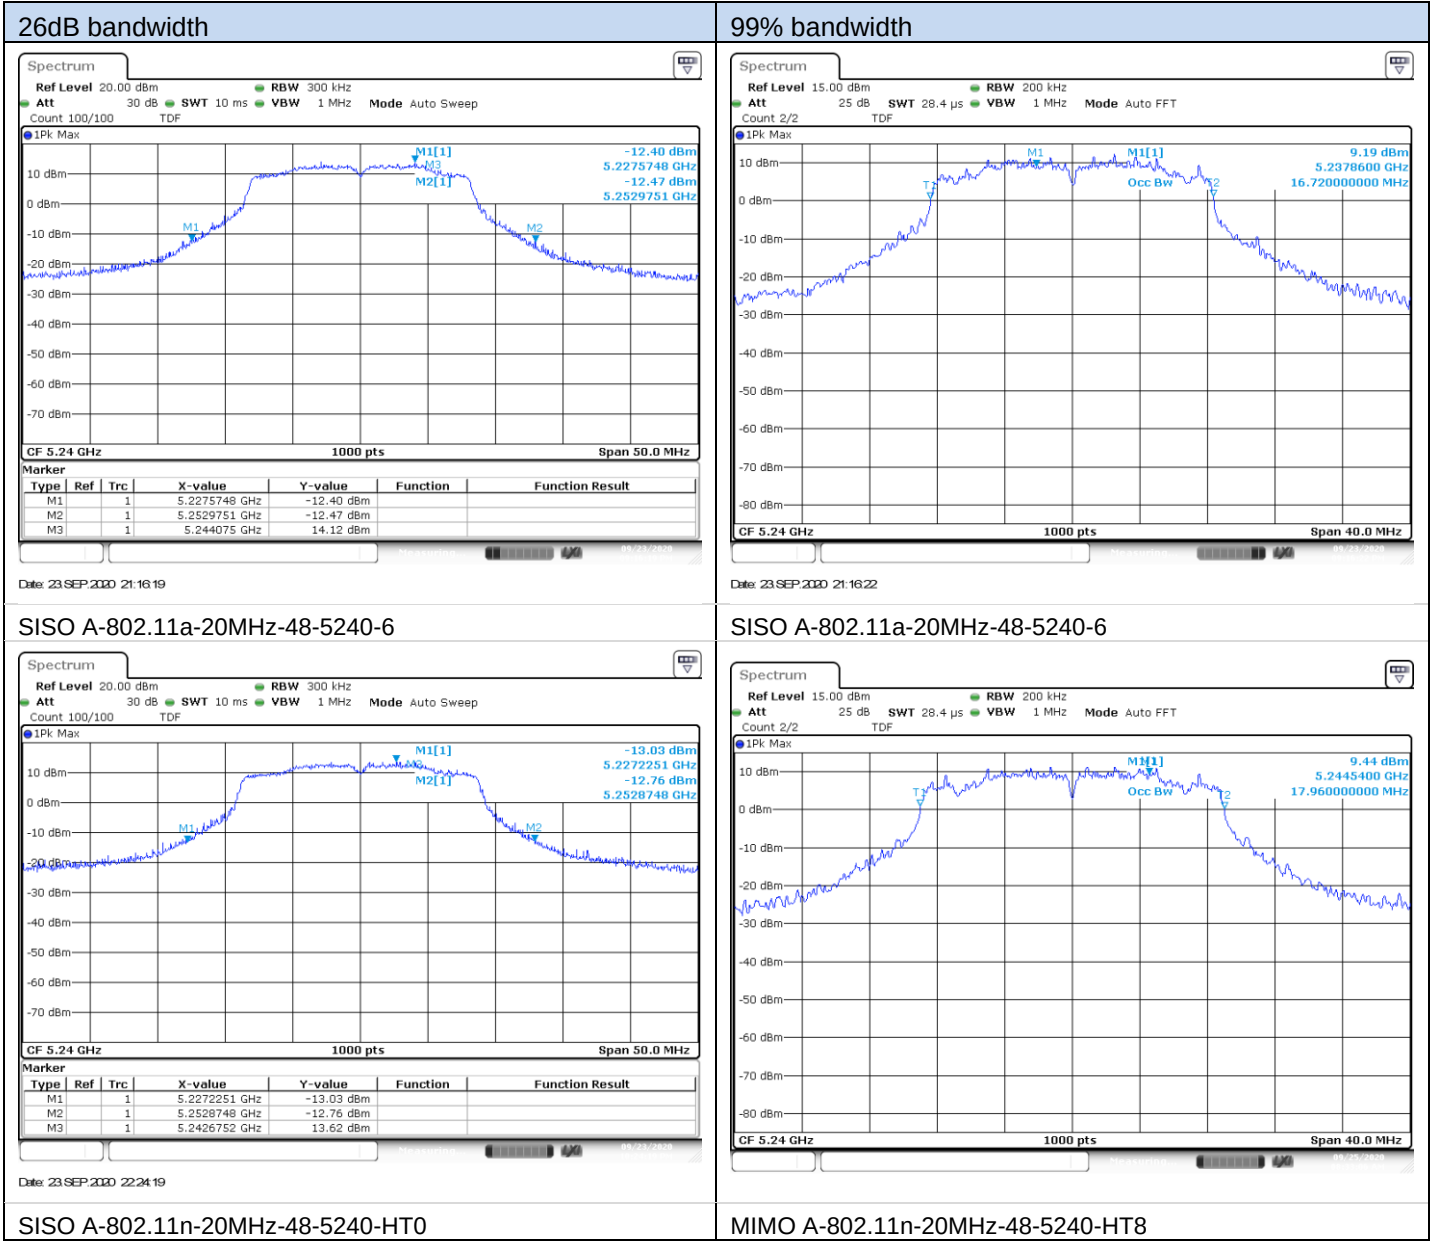


26dB bandwidth

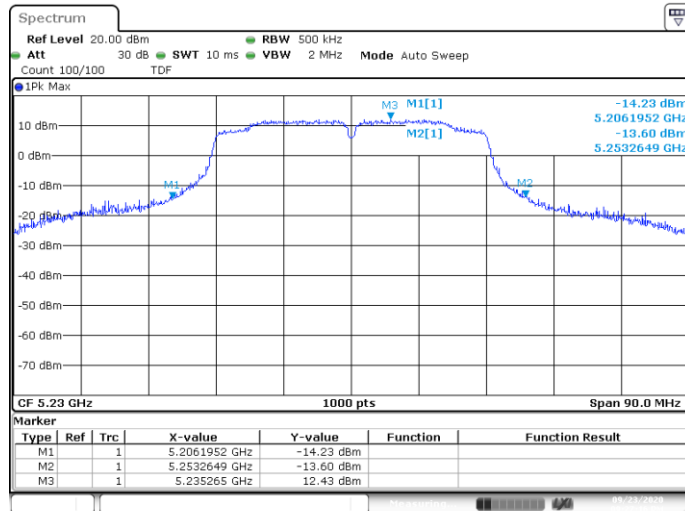


Date: 23 SEP 2020 21:27:16

99% bandwidth

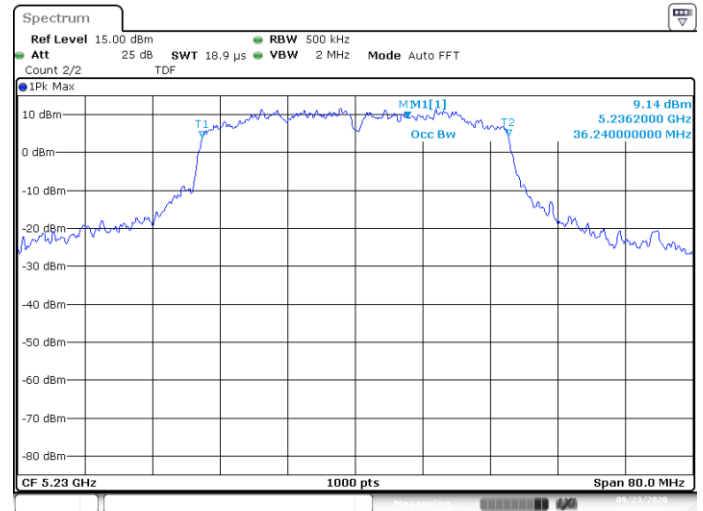


Date: 23 SEP 2020 21:27:20

SISO A-802.11n-40MHz-46-5230-HT0

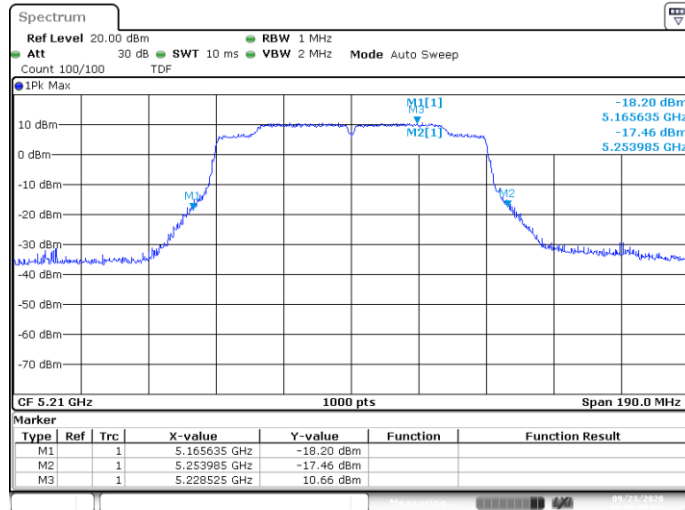


Date: 23 SEP 2020 21:58:07

SISO A-802.11n-40MHz-46-5230-HT0

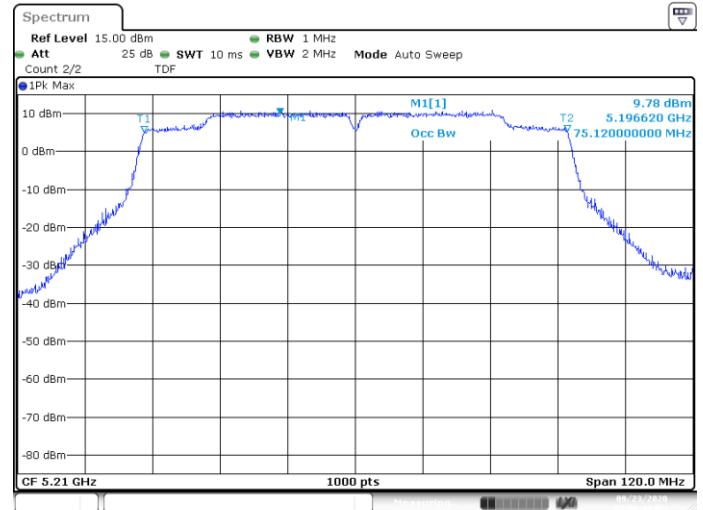


Date: 23 SEP 2020 21:58:10

SISO A-802.11ac-80MHz-42-5210-VHT0

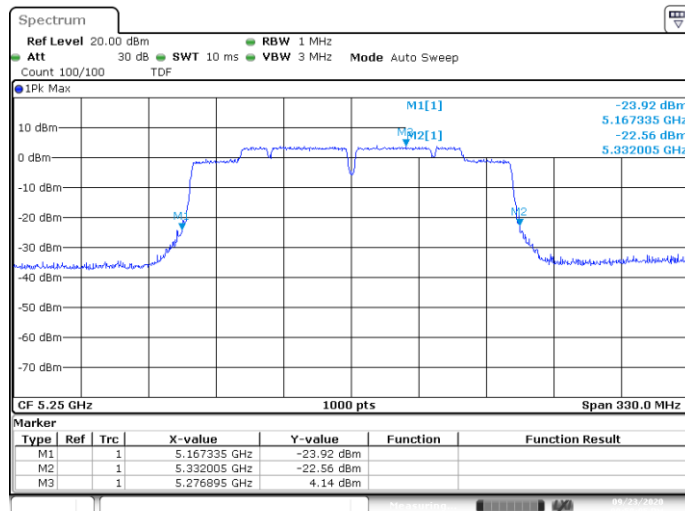

Date: 23 SEP 2020 21:58:05


SISO A-802.11ac-80MHz-42-5210-VHT0

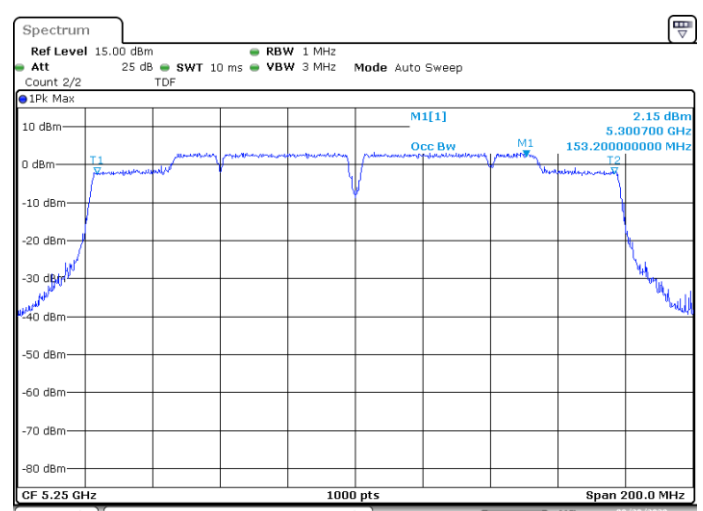

SISO A-802.11ac-160MHz-50-5250-VHT0


SISO B-802.11ac-160MHz-50-5250-VHT0

26dB bandwidth

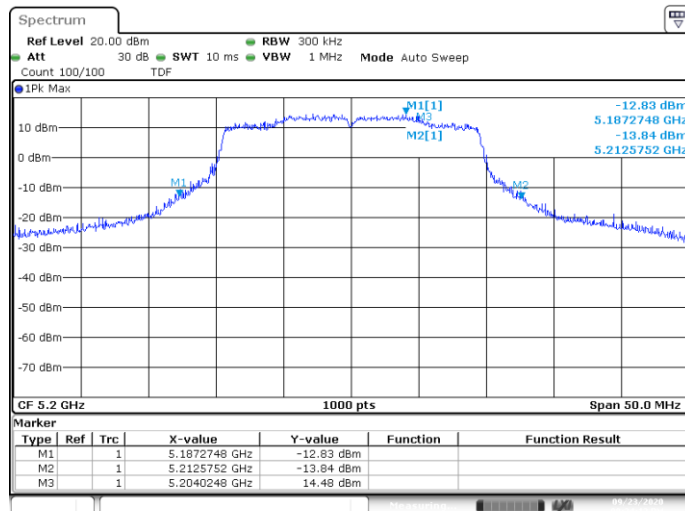


Date: 23 SEP 2020 21:34:14

99% bandwidth

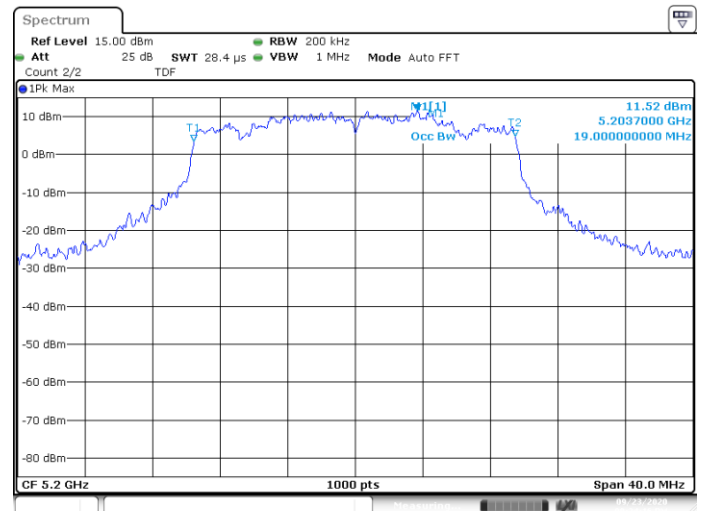


Date: 23 SEP 2020 21:34:17

SISO A-802.11ax-20MHz-40-5200-HE0

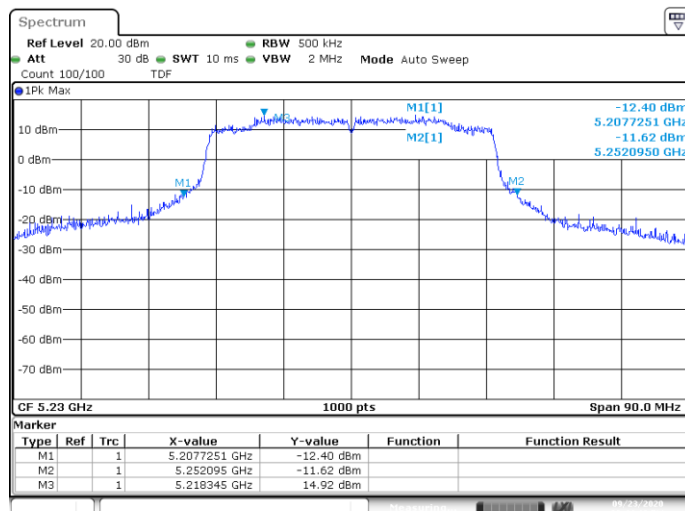


Date: 23 SEP 2020 21:44:12

SISO A-802.11ax-20MHz-40-5200-HE0

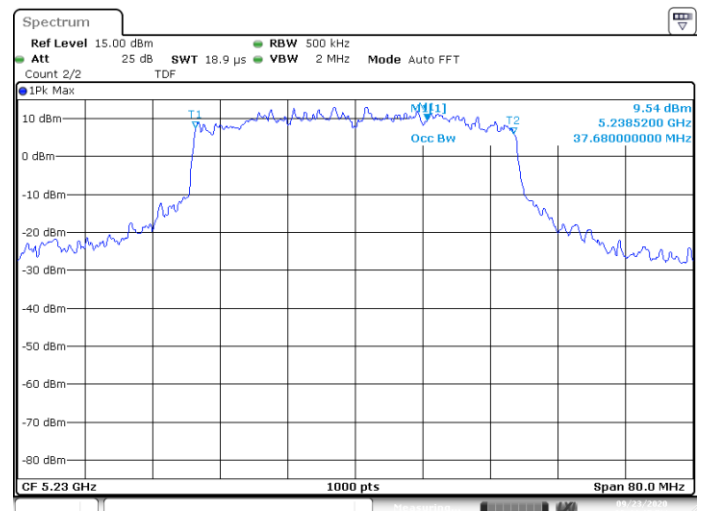


Date: 23 SEP 2020 21:44:15

SISO A-802.11ax-40MHz-46-5230-HE0

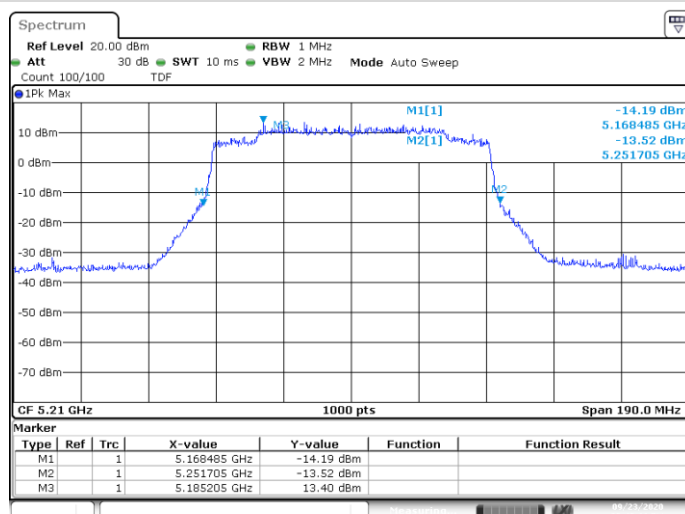

Date: 23 SEP 2020 21:48:11


SISO A-802.11ax-40MHz-46-5230-HE0

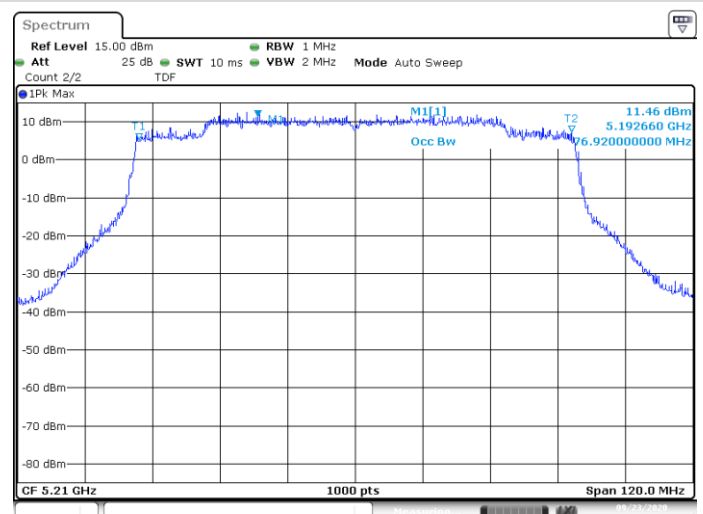

Date: 23 SEP 2020 21:48:14


SISO B-802.11ax-80MHz-42-5210-HE0

SISO A-802.11ax-80MHz-42-5210-HE0

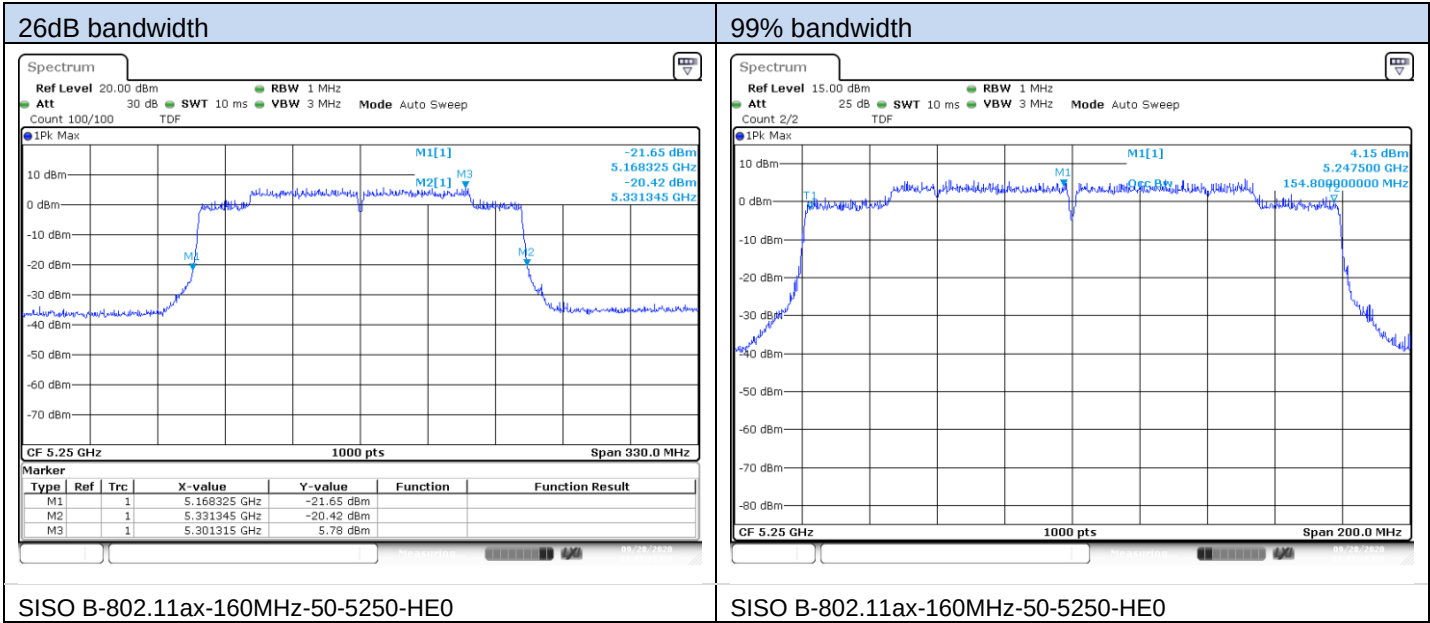


U-NII-2A


26dB bandwidth

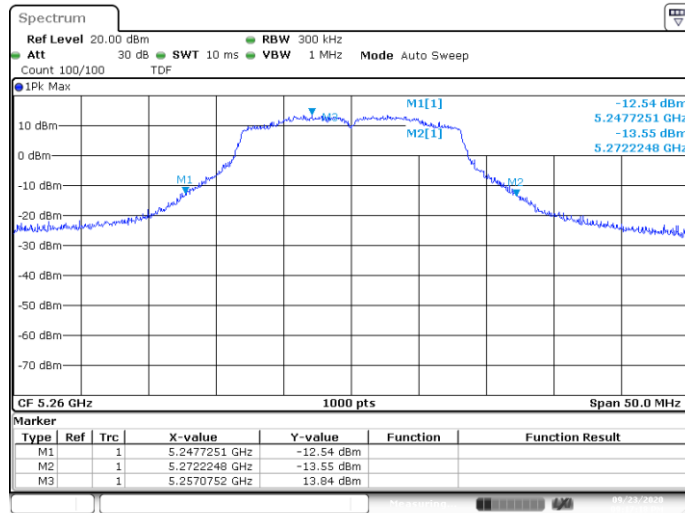


99% bandwidth

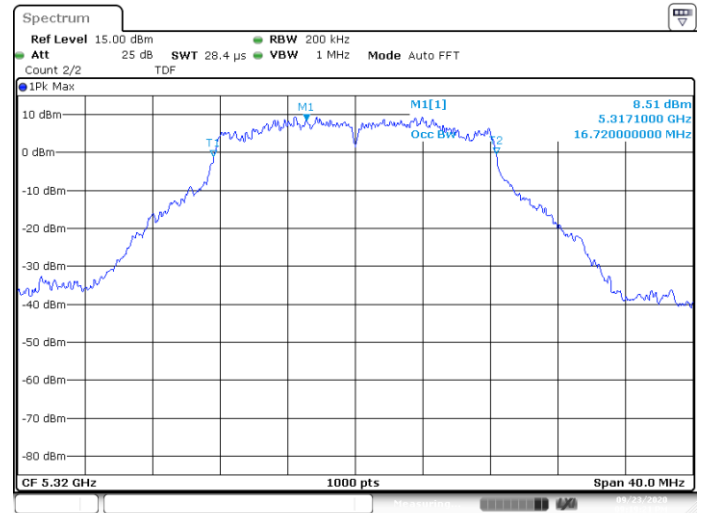


SISO A-802.11a-20MHz-52-5260-6

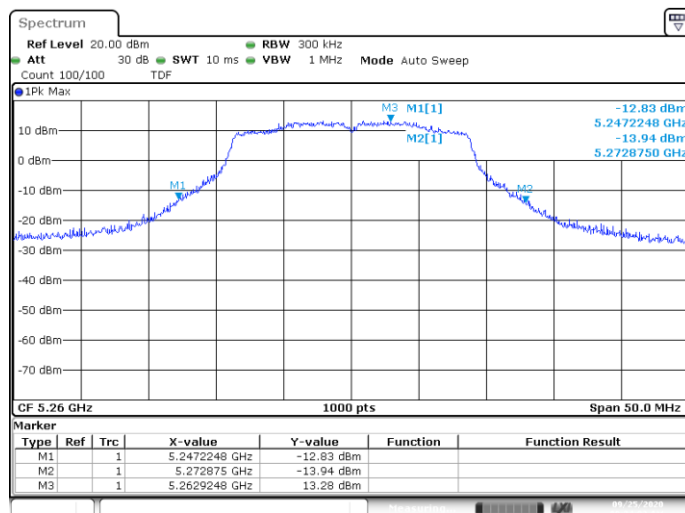


SISO A-802.11a-20MHz-64-5320-6

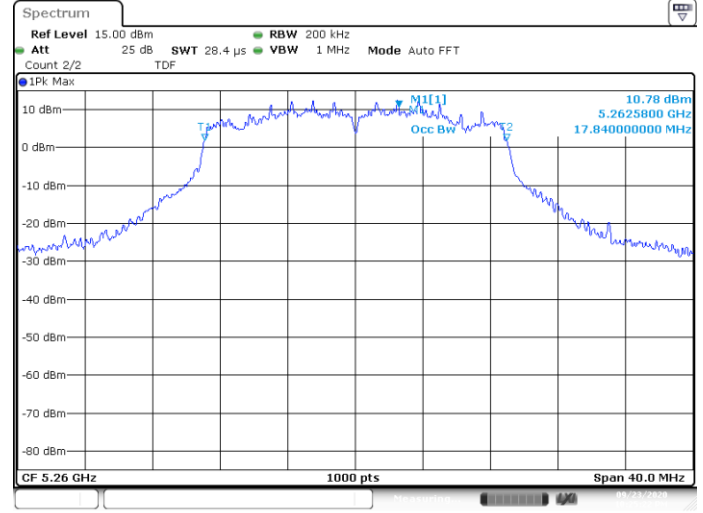

MIMO A-802.11n-20MHz-52-5260-HT8

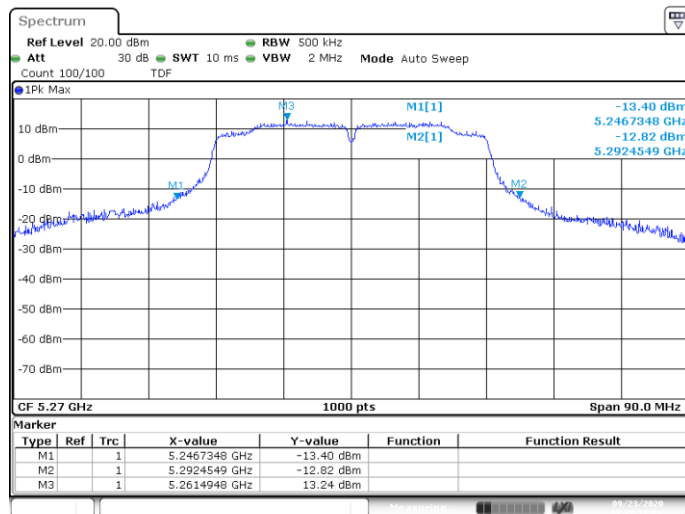


SISO A-802.11n-20MHz-52-5260-HT0

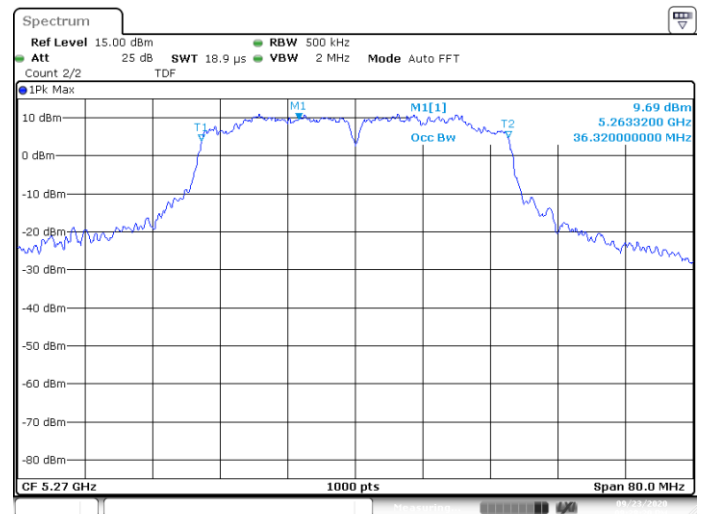


SISO A-802.11n-40MHz-54-5270-HT0

SISO A-802.11n-40MHz-54-5270-HT0


26dB bandwidth

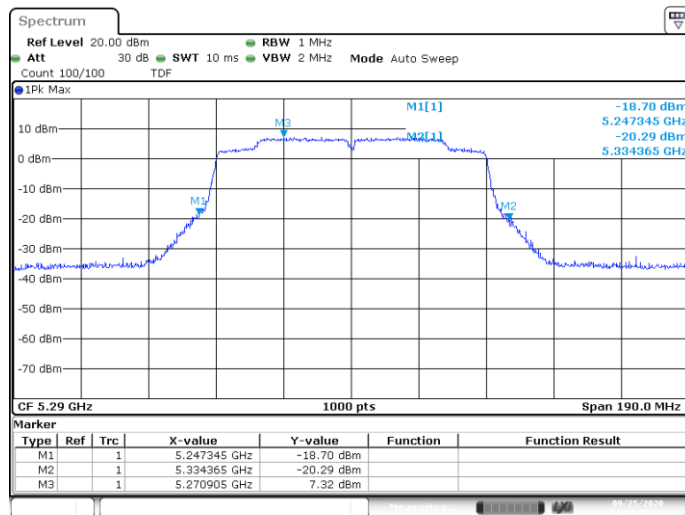


99% bandwidth

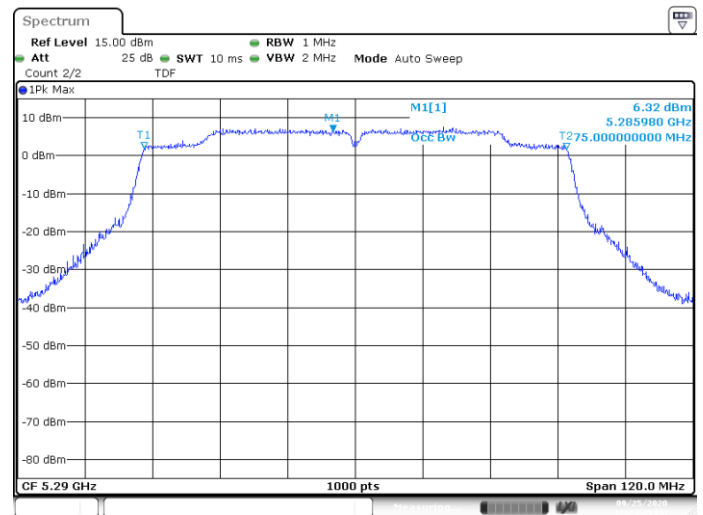


SISO A-802.11ac-80MHz-58-5290-VHT0

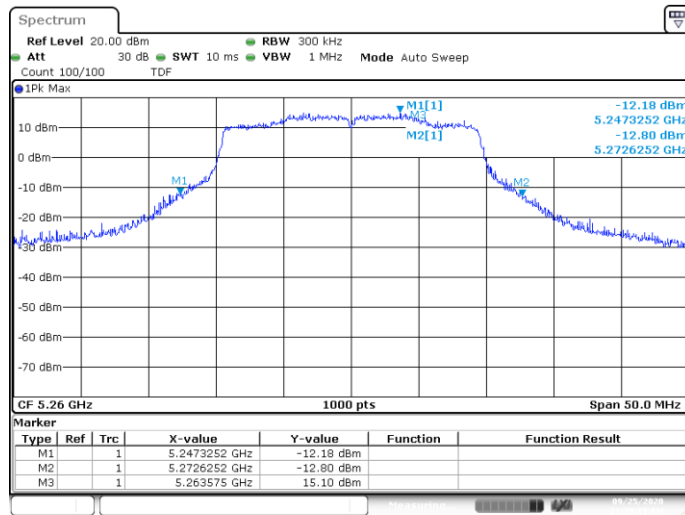


SISO A-802.11ac-80MHz-58-5290-VHT0

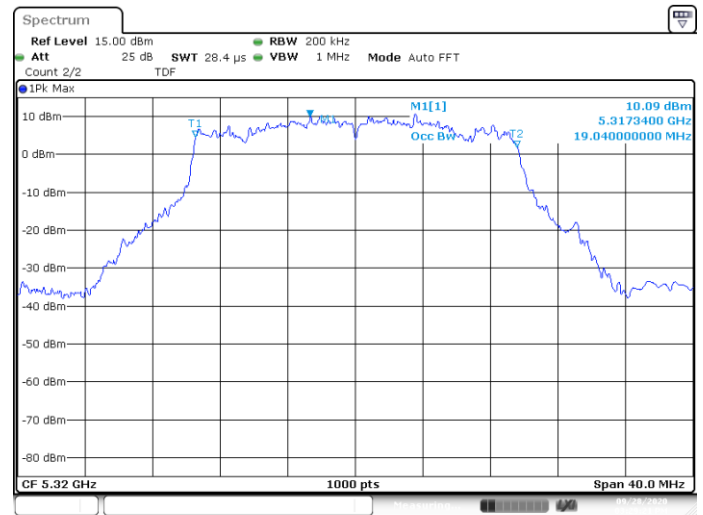

MIMO A-802.11ax-20MHz-52-5260-HE0

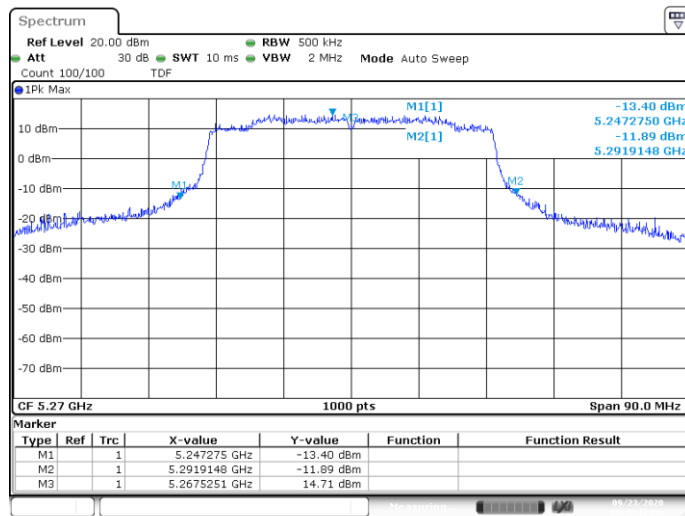


SISO B-802.11ax-20MHz-64-5320-HE0

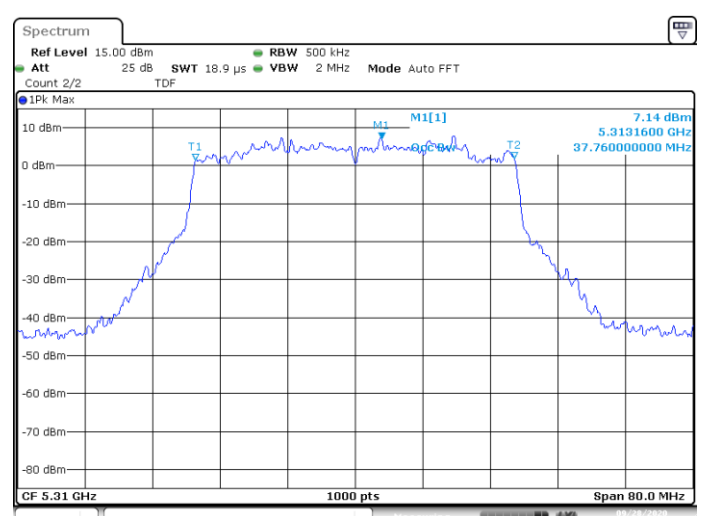

SISO A-802.11ax-40MHz-54-5270-HE0


MIMO B-802.11ax-40MHz-62-5310-HE0

Date: 23 SEP 2020 21:45:12

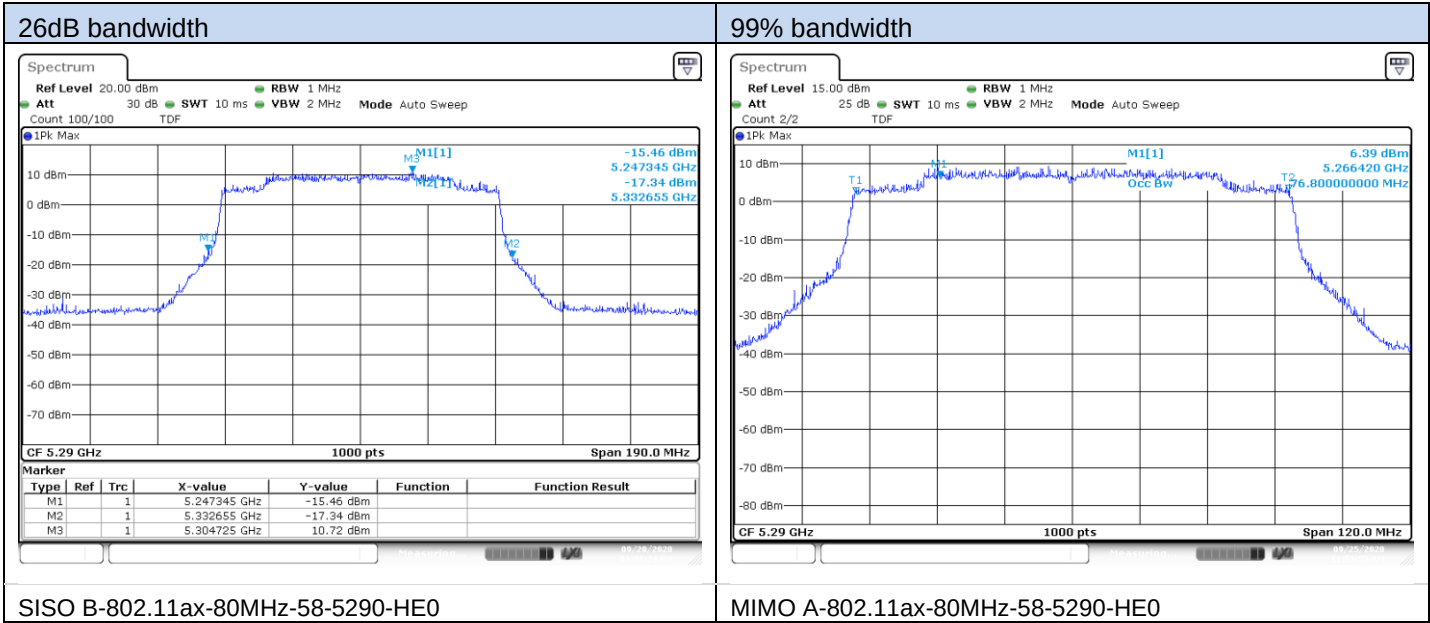



C.1.2 Maximum output power

U-NII-1

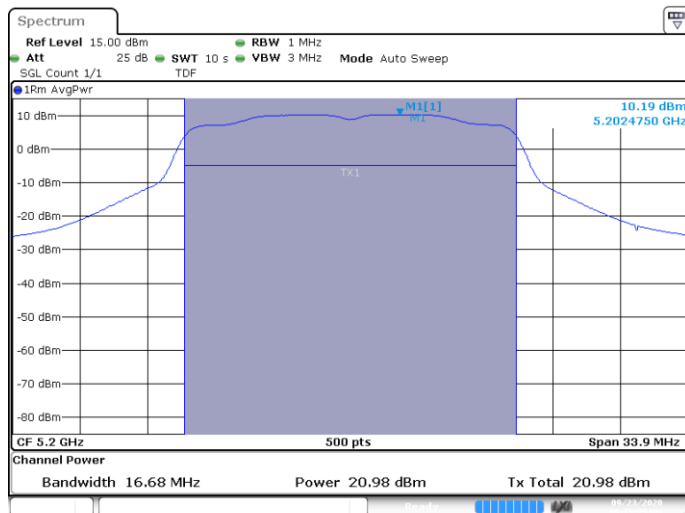


Date: 23 SEP 2020 21:15:35

SISO A-802.11a-20MHz-Ch40-5200MHz-6

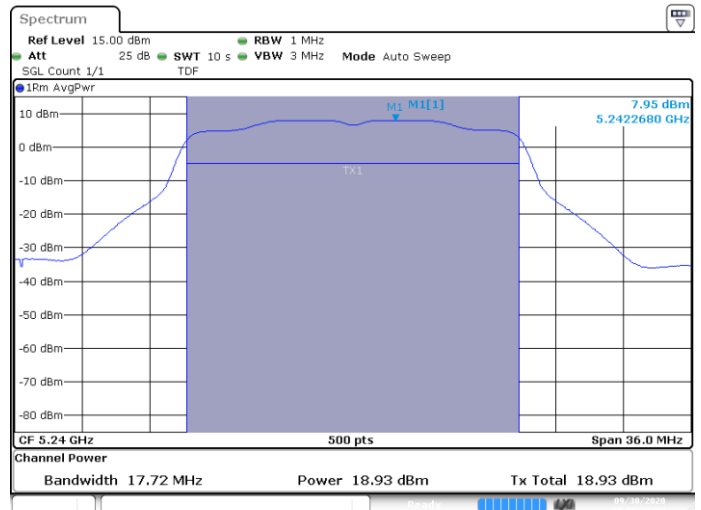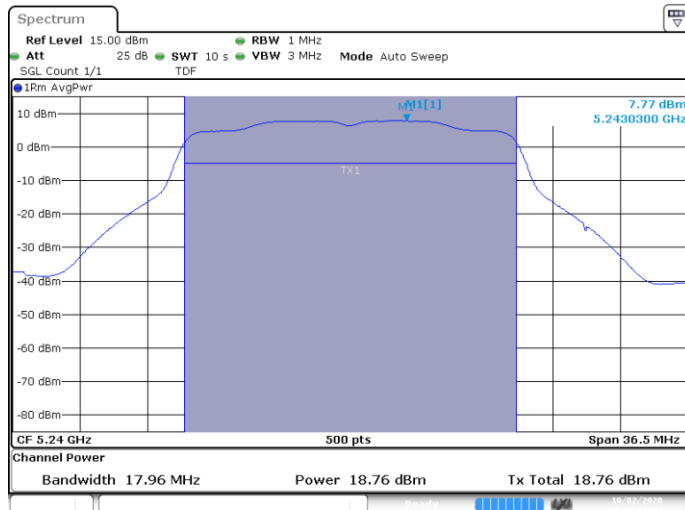


Date: 30 SEP 2020 20:08:33

MIMO A-802.11n-20MHz-Ch48-5240MHz-HT8

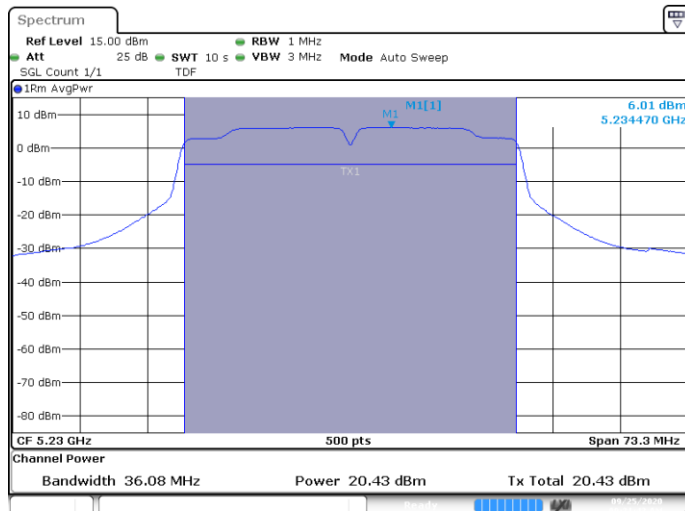


MIMO B-802.11n-20MHz-Ch48-5240MHz-HT8

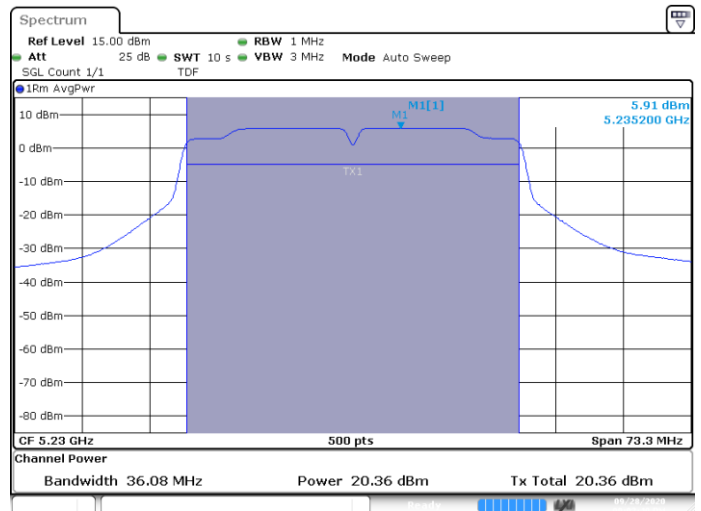



MIMO A-802.11n-40MHz-Ch46-5230MHz-HT8

MIMO B-802.11n-40MHz-Ch46-5230MHz-HT8

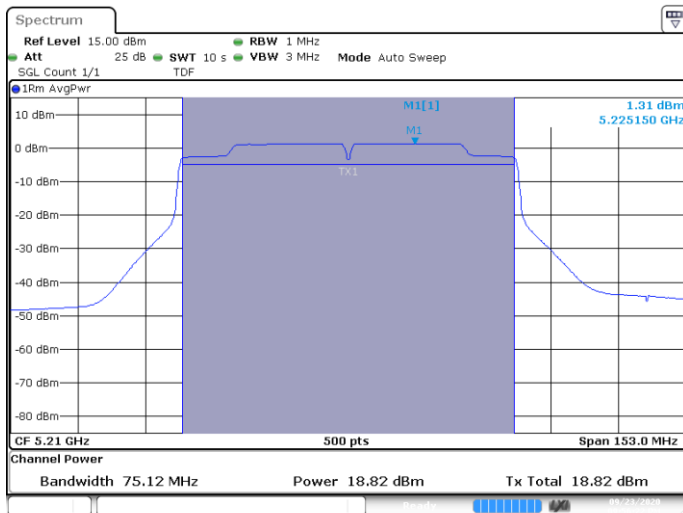


Date: 23 SEP 2020 21:58:22


SISO A-802.11ac-80MHz-Ch42-5210MHz-VHT0

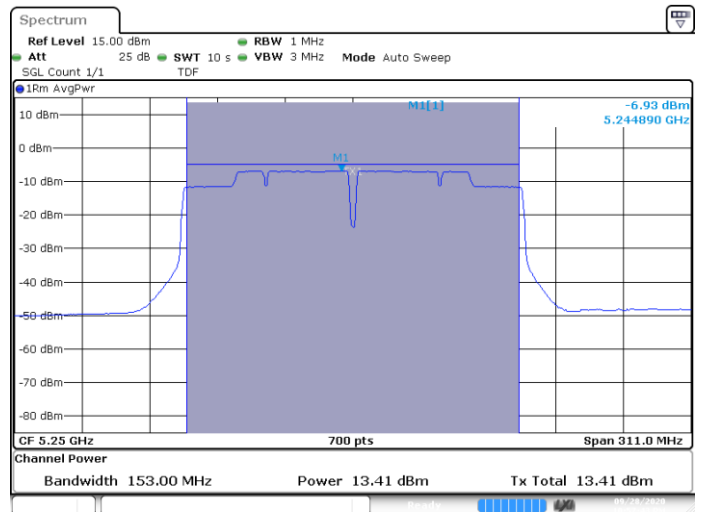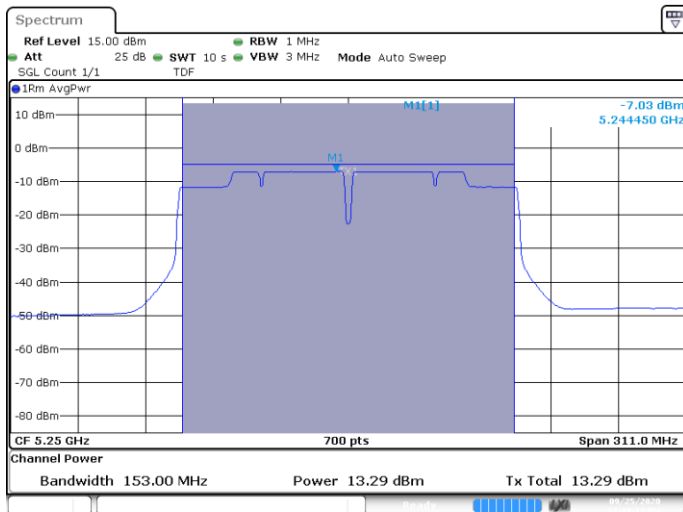

MIMO A-802.11ac-160MHz-Ch50-5250MHz-VHT0

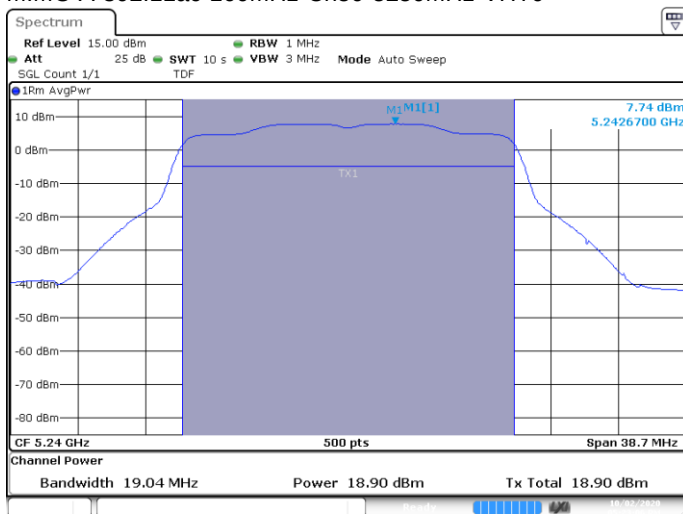



MIMO B-802.11ac-160MHz-Ch50-5250MHz-VHT0

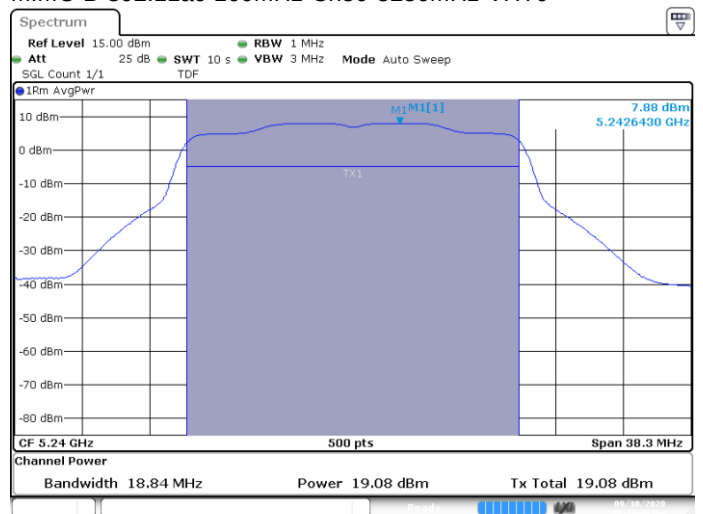

Date: 30 SEP 2020 20:13:35


MIMO A-802.11ax-20MHz-Ch48-5240MHz-HE0

MIMO B-802.11ax-20MHz-Ch48-5240MHz-HE0

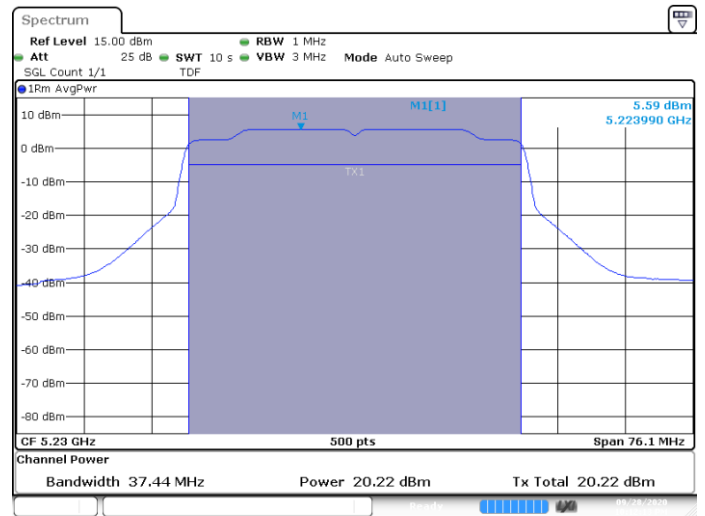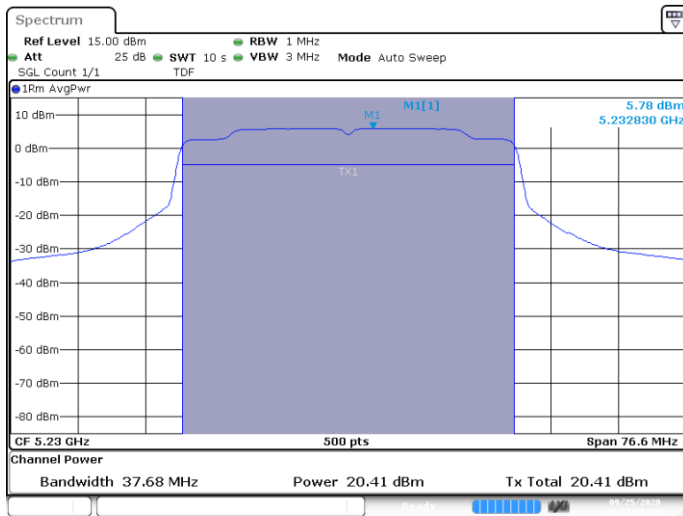


MIMO A-802.11ax-40MHz-Ch46-5230MHz-HE0

MIMO B-802.11ax-40MHz-Ch46-5230MHz-HE0

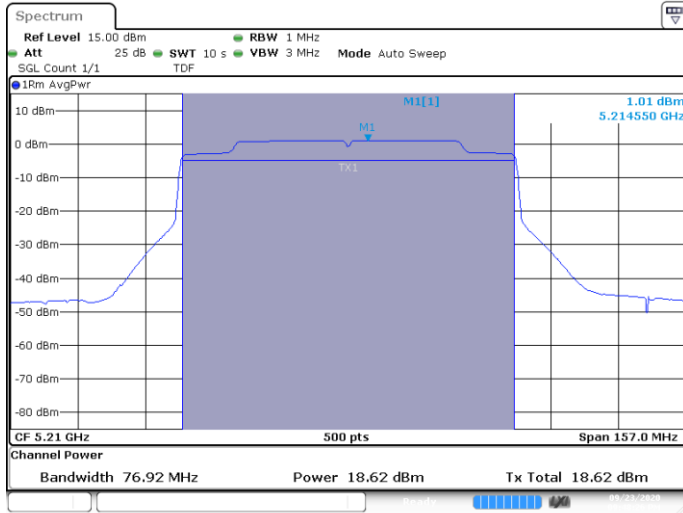


Date: 23 SEP 2020 21:43:26

SISO A-802.11ax-80MHz-Ch42-5210MHz-HE0

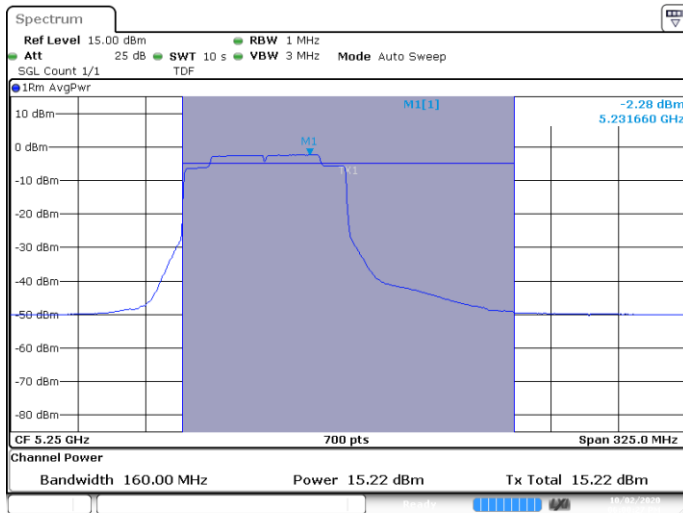

MIMO A-802.11ax-160MHz-Ch50-5250MHz-HE0-996/67

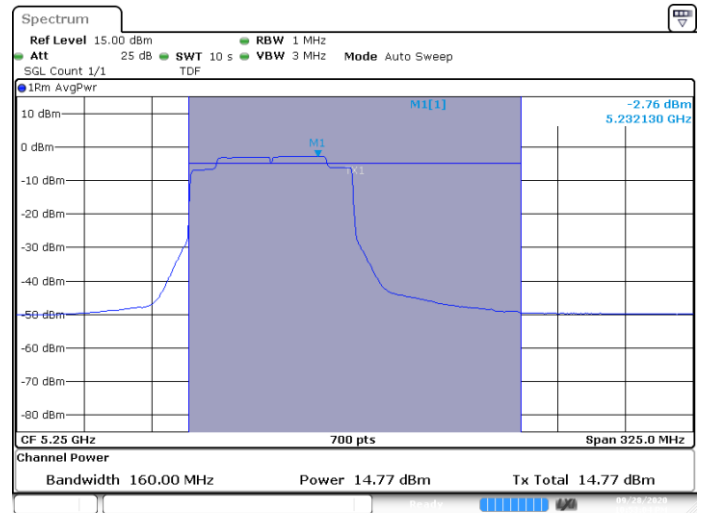

MIMO B-802.11ax-160MHz-Ch50-5250MHz-HE0-996/67