

**key layout**

The toggle switch is a three segment toggle switch, with 2.4G to the left, power off in the middle, and Bluetooth mode to the right. The mouse TYPE-C connects to the computer and is plug and play.

- Forced code matching: Press and hold for 3s on the right, middle, and left sides to force code matching. The bottom indicator light of the corresponding mode flashes.
- Bluetooth pairing for new device connection method: Use forced code matching mode, with a blue flashing light at the bottom, indicating that the mouse has entered Bluetooth code matching or search mode. After the mouse connection is successful, the blue light at the bottom will turn off.
- In Bluetooth loopback pairing status: The blue light slowly flashes, and the previous device memorized by the mouse is looped back. After the mouse is successfully connected, the bottom indicator blue light turns off.
- Low voltage indicator light: Three slow flashing blue lights on the front of the mouse indicate that if the voltage is below 3.2V, the mouse will shut down and stop flashing.
- 1 minute to enter level 1 mild sleep, default to deep sleep after 6 minutes. Level 1 mild sleep allows customers to move or press the button to wake up the mouse. 3-10min allows customers to wake up the mouse by modifying the deep sleep time through the driver.
- Long press and hold the bottom button corresponding to the mode indicator light: when Bluetooth channel 1 is on, the first light will turn on and turn off after 5 seconds; when Bluetooth channel 2 is on and the second light will turn on and turn off after 5 seconds. In 2.4G mode, the third light will turn on and turn off within 5 seconds.

**Installation and usage instructions**

**Computer system requirements:**


- Windows 2000, Windows XP, Windows Vista, Windows 7, Windows 8, Windows 10, Linux, MAC, iOS, Android and other operating systems; In Win95 and Win98 systems, drivers may be required.
- Equipped with USB 1.1 or higher ports.

**Hardware connection**

- Turn on the computer power.
- Connect the USB receiver or USB data cable that comes with this mouse to the USB interface of the computer.
- After the computer starts, you can start using the mouse.
- When the computer is in use, the USB receiver or USB data cable can be unplugged or plugged in at any time.
- It is not recommended to plug the USB data cable and receiver into the same computer at the same time.

**Product specifications**

- Mouse size: 119x62x38±0.2mm
- Product weight: about 81.9g (contain receiver 2g, No weighting block)
- Connection method: wired/2.4G/Bluetooth mode
- Working voltage: wired 5V/wireless 3.7V (2.4G/Bluetooth)
- Working current: wired 500mA/wireless 15mA
- Charging voltage/current: DCSV=500mA
- Charging interface: Type-C
- Battery capacity: 500mAh
- Return rate: 125Hz-500Hz-1000Hz default 500Hz
- Six speed DPI adjustment: 800-1600-2400-3200-6400-10000 (default 1600)

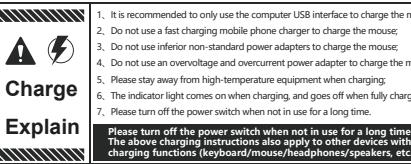

**Certificate** Wolf spider game mouse series: high quality products

Part name	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
Plastic parts	X	O	X	O	O	O
Metal parts	X	O	O	O	O	O
Circuit board assembly	X	O	X	O	O	O
Cable	X	O	O	O	O	O

**Remarks:**

O=It means that the content of the toxic and harmful substance in all homogeneous materials of the component is below the limit specified in GB/T 26245-2010 standard.

X= indicates that the content of the toxic and harmful substances in at least one homogeneous part of the component exceeds the limit specified in GB/T 26245-2010 standard.

**10 Service life of environmental protection:**

According to the administrative measures for pollution control of electronic information products of the people's Republic of China, electronic information products sold within the territory of the people's Republic of China must:

1. Since the date of purchase, under normal use, the product failure caused by poor electrical performance can be guaranteed for one year, but the damage caused by man-made damage (such as self disassembly, handling damage, bumping, soaking in water, improper input current and voltage, etc.) and damage caused by natural disasters (such as fire, flood, earthquake, rat damage, etc.) are not covered by this warranty.
2. The replacement of consumables (such as batteries, foot stickers, etc.) and accessories is not covered by the warranty card.
3. Please fill in all the columns in this warranty card truthfully and stamp it with the seal of the dealer.
4. Once lost, this warranty card will not be reissued. Please keep it properly.
5. This warranty card is only valid within the territory of the people's Republic of China.

**Dear user**

Dear users, thank you for your choice **AULA** Brand products, in order to protect your legitimate rights and interests, better service for you, our company strictly in accordance with the people's Republic of China "microcomputer commodity repair, replacement and return responsibility provisions", to provide you with three guarantees after-sales service, product warranty instructions are as follows.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

**Federal Communications Commission Notice**  
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.